

# RF Exposure Evaluation Report

**Report No.:** JYTSZ-R12-2301820  
**Applicant:** NINGBO SEAGO ELECTRIC CO., LTD  
**Address of Applicant:** NO.239 JIANGHU ROAD,JIANGBEI DISTRICT, NINGBO, CHINA  
**Equipment Under Test (EUT)**  
Product Name: sonic toothbrush  
Model No.: SG-982  
Trade mark: seago  
**FCC ID:** 2BC87SG-982  
**Applicable standards:** FCC CFR Title 47 Part 2 (§2.1091)  
**Date of sample receipt:** 25 Dec., 2023  
**Date of Test:** 26 Dec., 2023 to 09 Jan., 2024  
**Date of report issue:** 10 Jan., 2024  
**Test Result:** PASS

**Project by:** \_\_\_\_\_

**Date:** \_\_\_\_\_

10 Jan., 2024

**Reviewed by:** \_\_\_\_\_

**Date:** \_\_\_\_\_


10 Jan., 2024

**Approved by:** \_\_\_\_\_

**Date:** \_\_\_\_\_

10 Jan., 2024

**Manager**



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 1 Version

Version No.	Date	Description
00	10 Jan., 2024	Original

## 2 Contents

Page

Cover Page .....	1
<b>1 Version .....</b>	<b>2</b>
<b>2 Contents.....</b>	<b>3</b>
<b>3 General Information .....</b>	<b>4</b>
3.1 Client Information .....	4
3.2 General Description of E.U.T. ....	4
3.3 Operating Modes.....	4
3.4 Description of Support Units .....	4
3.5 Measurement Uncertainty .....	4
3.6 Additions to, deviations, or exclusions from the method .....	4
3.7 Laboratory Facility .....	5
3.8 Laboratory Location .....	5
3.9 Test Instruments list .....	5
<b>4 Technical Requirements Specification .....</b>	<b>6</b>
4.1 Limits .....	6
4.2 Test Setup Block .....	6
4.3 Test Procedure .....	7
4.4 Result.....	8
4.5 Conclusion .....	8

### 3 General Information

#### 3.1 Client Information

Applicant:	NINGBO SEAGO ELECTRIC CO., LTD
Address:	NO.239 JIANGHU ROAD, JIANGBEI DISTRICT, NINGBO, CHINA
Manufacturer/Factory:	NINGBO SEAGO ELECTRIC CO., LTD
Address:	NO.239 JIANGHU ROAD, JIANGBEI DISTRICT, NINGBO, CHINA

#### 3.2 General Description of E.U.T.

Product Name:	sonic toothbrush
Model No.:	SG-982
Operation Frequency:	112.20kHz
Modulation technology:	ASK
Antenna Type:	Coil Antenna
Power supply (Wireless Charger):	Model: SG-982 Input: DC 5V, 1.5W Output Wireless: 0.6W
AC Adapter:	Model: M11US Input: AC100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 1A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

#### 3.3 Operating Modes

Operating mode	Detail description
Full mode	Keep the EUT in Full mode
<b>Remark:</b>	
1. Pre-scan input: 15V, 3.5A, output for coil 1: 5W, 7.5W, 10W, 15W of the Power supply, found output: 15W was worse case mode. Output for coil 2: 5W was worse case mode. So the report only reflects the worse mode. 2. No load, mid load, full load mode all have been tested, only worse case full load mode is reported.	

#### 3.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
N/A	N/A	N/A	N/A	N/A

#### 3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Magnetic (Mode A) field measurements (3kHz ~ 300kHz)	7.8% (k=2)
Magnetic (Mode B) field measurements (30kHz ~ 30MHz)	3.5% (k=2)
Electric field measurements (3kHz ~ 30MHz)	7.8% (k=2)

#### 3.6 Additions to, deviations, or exclusions from the method

No
----

### 3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

### 3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

### 3.9 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Electric and Magnetic field Probe - Analyzer	narda Safety Test Solutions S.r.l.	EHP-200AC	180ZX10203	02-24-2021	02-23-2022
				02-22-2023	02-23-2024
EHP200-TS Software	narda Safety Test Solutions S.r.l.	EHP200-TS	Version: Rel 1.94	N.C.R	N.C.R

## 4 Technical Requirements Specification

### 4.1 Limits


Human exposure to RF emissions from mobile devices (47 CFR §2.1091) may be evaluated based on the MPE limits adopted by the FCC for electric and magnetic field strength and/or power density, as appropriate, since exposures are assumed to occur at distances of 20 cm or more from persons.

According to KDB680106 D01 Wireless Power Transfer v04, for § 2.1091-Mobile devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively. For § 2.1093-Portable devices below 4 MHz and down to 100 kHz, the MPE limits in § 1.1310 (with the 300 kHz limit applicable all the way down to 100 kHz) can be used for the purpose of equipment authorization in lieu of SAR evaluations.

**Limits For General Population/Uncontrolled Exposure**

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW /cm <sup>2</sup> )	Averaging Time (minutes)
0.3 ~ 1.34	614	1.63	(100)*	30
1.34 ~ 30	824/f	2.19/f	(180/f <sub>2</sub> )*	30
30 ~ 300	27.5	0.073	0.2	30
300~1500	-	-	f/1500	30
1500~100000	-	-	1.0	30

### 4.2 Test Setup Block

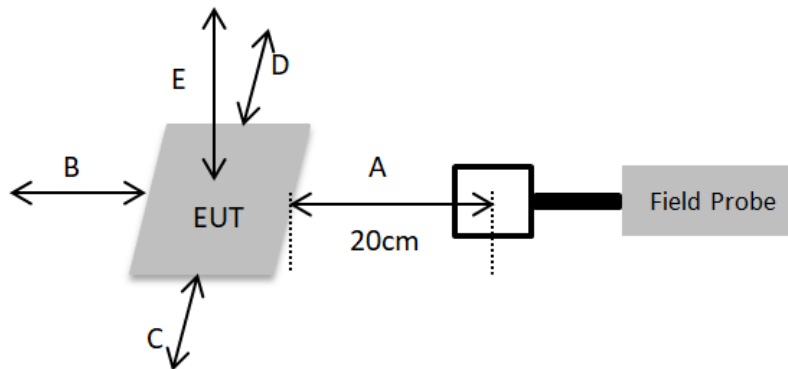

**Remrak:**

1. The EHP 200AC probe antenna diameter is 8.8 cm.
2. A is Front side, B is Back side, C is Left side, D is Right side, E is Top side.
3. The test distance of A, B, C, D and E side is 20cm.

### 4.3 Test Procedure

<p>KDB 680106 D01 Section 5.2:</p> <p>(1) Power transfer frequency is less than 1 MHz.  -- Yes, the device operate in the frequency 112.2kHz.</p> <p>(2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.  -- Yes, the maximum output power of the primary coil is 0.6W.</p> <p>(3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)..  -- Yes, the client device providing the maximum permitted load is placed in physical contact with the transmitter..</p> <p>(4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).  -- Yes, while the EUT is in reverse charging, it is unable to use its features and now it is a mobile device.</p> <p>(5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.).  -- Yes, the EUT field strength levels are less than 50% of the MPE limit.</p> <p>(6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested..  -- Yes, the EUT only has one coil and operating at maximum power during test.</p>
---

1. Installing the probe and turn on the EHP 200AC power switch, in the testing software, select the magnetic field test mode and the A/m unit, select the peak detection mode, select the Max-Hold display.
2. Check the background noise.
3. Make DUT work at maximum transmit power.
4. During the measurement, the probe centre of the EHP 200AC is kept in 20cm distance from each test surface of the wireless charging base, and recorded the measured values of the A, B, C, D and E side are separately.
5. In the testing software, Select the electric field test mode and the V/m unit, select the peak detection mode, select the Max-Hold display.
6. Repeat step 2 to 4 and then get the strength of the electric field.
7. Desktop device should be installed on the edge.(table : 0.8 m (H) high table structure of nonmetallic materials).

#### 4.4 Result

Empty load, half load and full load have been tested, the full load mode is the worst, and only the worst test data is reflected in the report.

##### a) Magnetic Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	20	0.2906	0.815	1.63
B	20	0.3055	0.815	1.63
C	20	0.2985	0.815	1.63
D	20	0.3001	0.815	1.63
E	20	0.6029	0.815	1.63

##### b) Electric Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (V/m)	50 % of Limit (V/m)	Limit (V/m)
A	20	0.3108	307.00	614
B	20	0.3025	307.00	614
C	20	0.3041	307.00	614
D	20	0.3268	307.00	614
E	20	0.5710	307.00	614

#### 4.5 Conclusion

The Measured Value of Magnetic Field and Electric Field are separately Less than their Limit, so the SAR test is exclusion and satisfies RF exposure evaluation.

-----End of report-----