



# FCC RF Test Report

**APPLICANT** : Espressif Systems (Shanghai) Co.,Ltd.  
**EQUIPMENT** : 2.4GHz Wi-Fi & BT IoT Module  
**BRAND NAME** : ESPRESSIF  
**MODEL NAME** : ESP32-S3-MINI-1  
**FCC ID** : 2AC7Z-ESPS3MINI1  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Dec. 19, 2021 ~ Jan. 18, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: Alex Wang / Manager



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Test Software ..... 6

    1.8 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 9

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 10

**3 TEST RESULT ..... 11**

    3.1 6dB and 99% Bandwidth Measurement ..... 11

    3.2 Output Power Measurement..... 18

    3.3 Power Spectral Density Measurement ..... 19

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 28

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 37

    3.6 AC Conducted Emission Measurement..... 41

    3.7 Antenna Requirements ..... 43

**4 LIST OF MEASURING EQUIPMENT ..... 44**

**5 UNCERTAINTY OF EVALUATION..... 45**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**

**APPENDIX F. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1N0918A	Rev. 01	Initial issue of report	Feb. 14, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.47 dB at 2483.50 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.23 dB at 0.153 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**Espressif Systems (Shanghai) Co.,Ltd.**

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

## 1.2 Manufacturer

**Espressif Systems (Shanghai) Co.,Ltd.**

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP32-S3-MINI-1
FCC ID	2AC7Z-ESPS3MINI1
HW Version	V1.1
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps : 9.96dBm (0.0099 W) Bluetooth LE 2Mbps : 10.31dBm (0.0107 W)
99% Occupied Bandwidth	Bluetooth LE 1Mbps : 1.021MHz Bluetooth LE 2Mbps : 2.014MHz
Antenna Type / Gain	PCB Antenna type with gain 4.54 dBi
Type of Modulation	Bluetooth LE : GFSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Bluetooth LE Link + Test Jig powered by Notebook



## 2.3 Connection Diagram of Test System

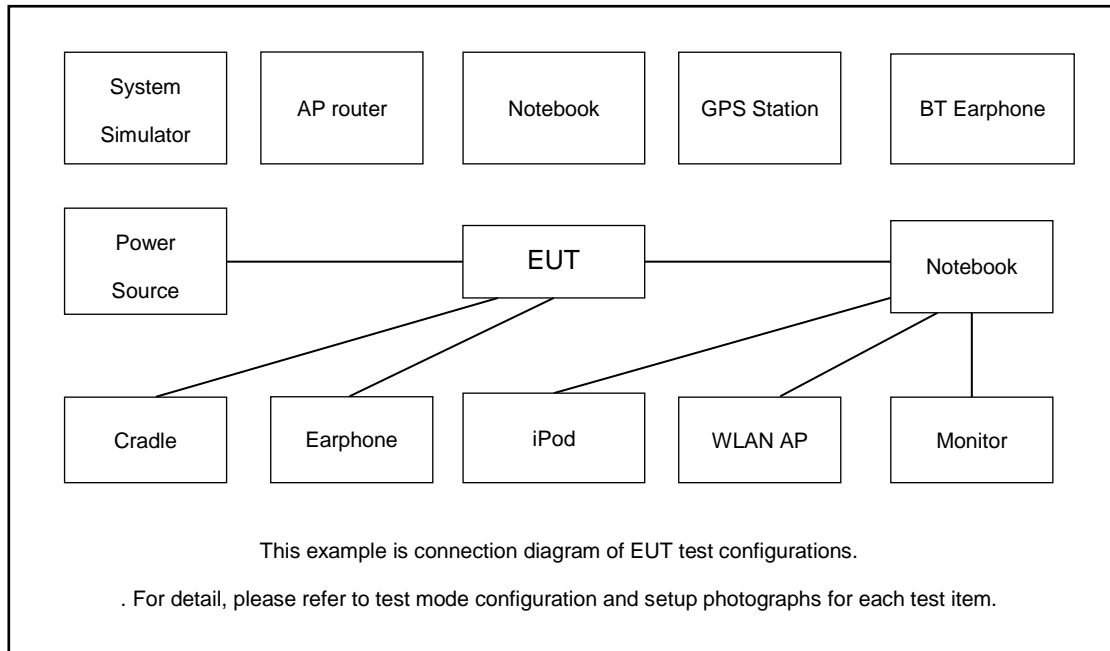

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m



## 2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss*

Following shows an offset computation example with cable loss 5.50dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.50 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

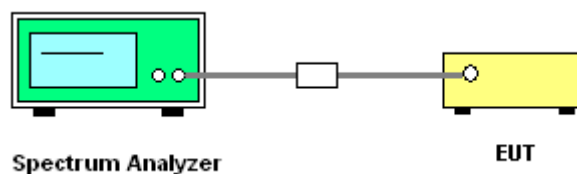




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


#### Bluetooth LE 1Mbps:

#### 6 dB Bandwidth Plot on Channel 00

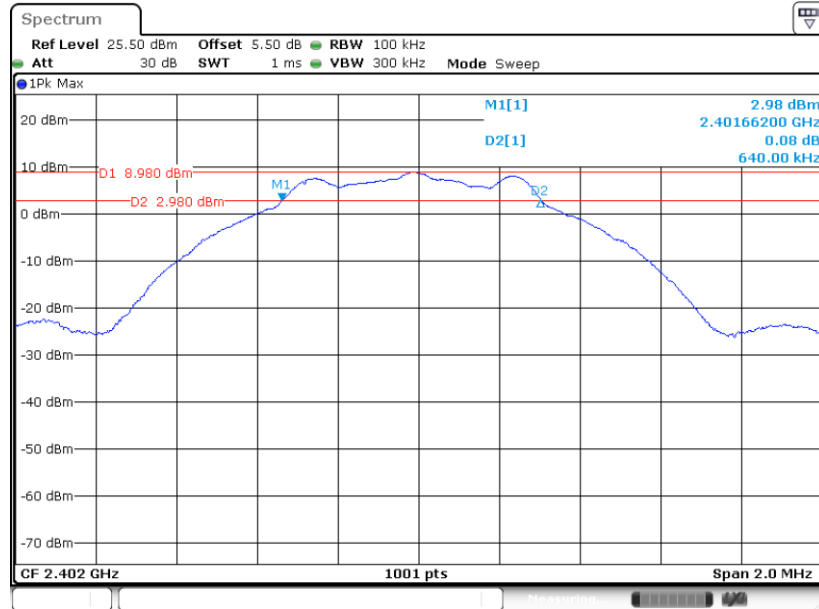

Date: 19.DEC.2021 21:24:31


#### 6 dB Bandwidth Plot on Channel 19

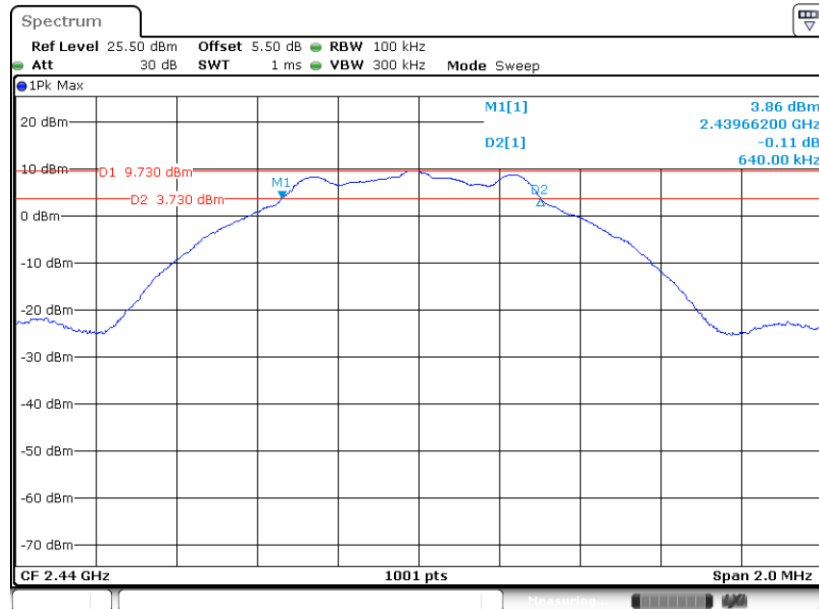

Date: 19.DEC.2021 21:27:36




6 dB Bandwidth Plot on Channel 39

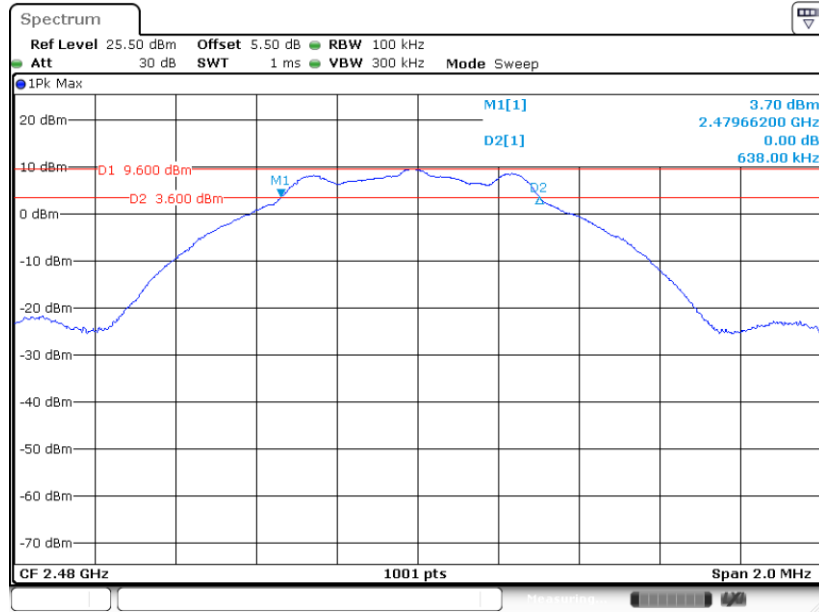

Date: 19.DEC.2021 21:30:23

Bluetooth LE 2Mbps:


6 dB Bandwidth Plot on Channel 00

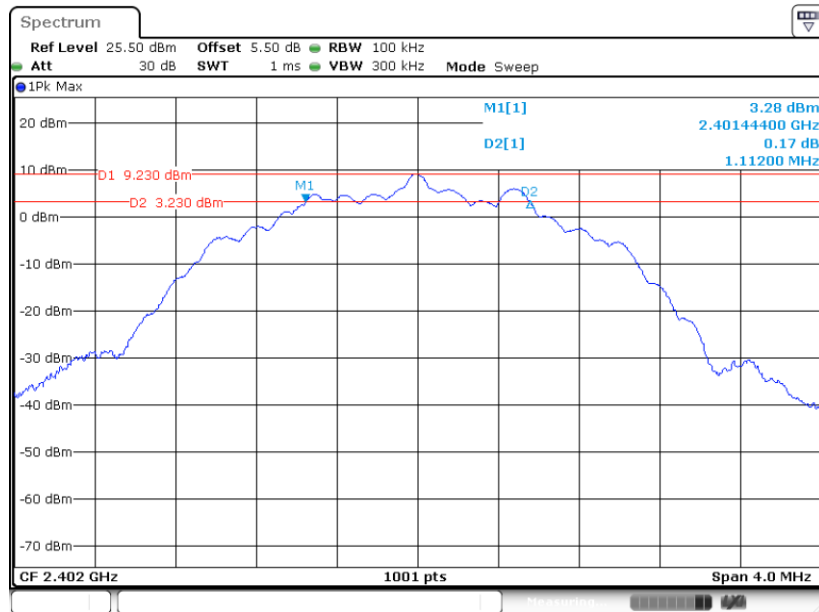

Date: 19.DEC.2021 21:38:08




6 dB Bandwidth Plot on Channel 19

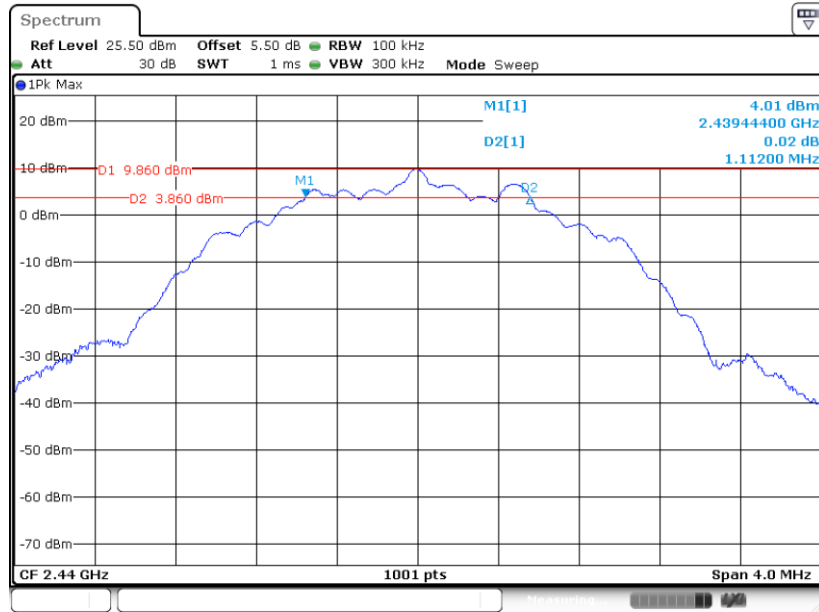

Date: 19.DEC.2021 21:41:41

6 dB Bandwidth Plot on Channel 39

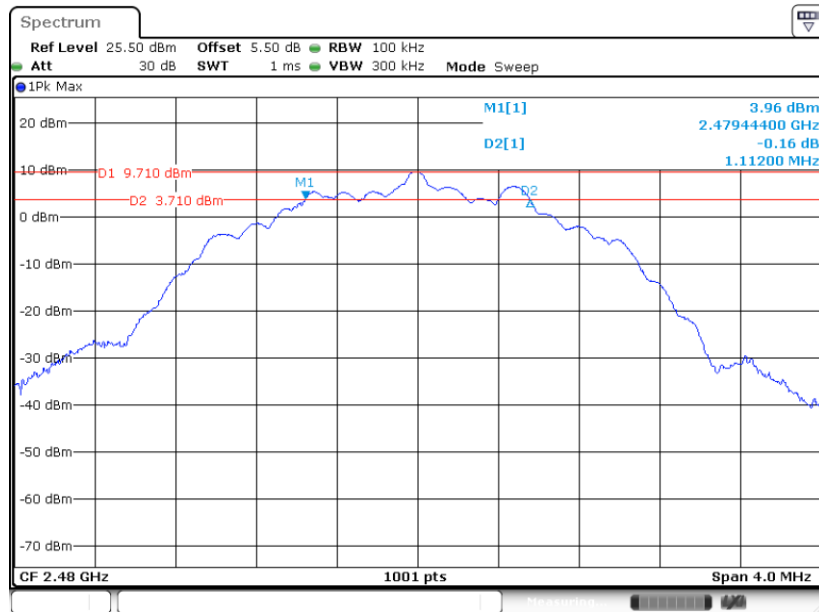

Date: 19.DEC.2021 21:33:47




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


#### Bluetooth LE 1Mbps:

#### 99% Occupied Bandwidth Plot on Channel 00

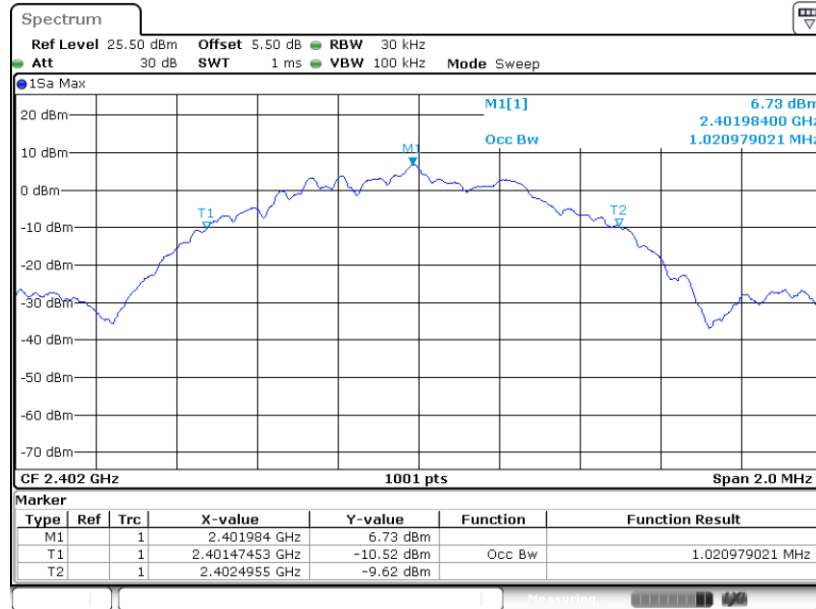

Date: 19.DEC.2021 21:25:19


#### 99% Occupied Bandwidth Plot on Channel 19

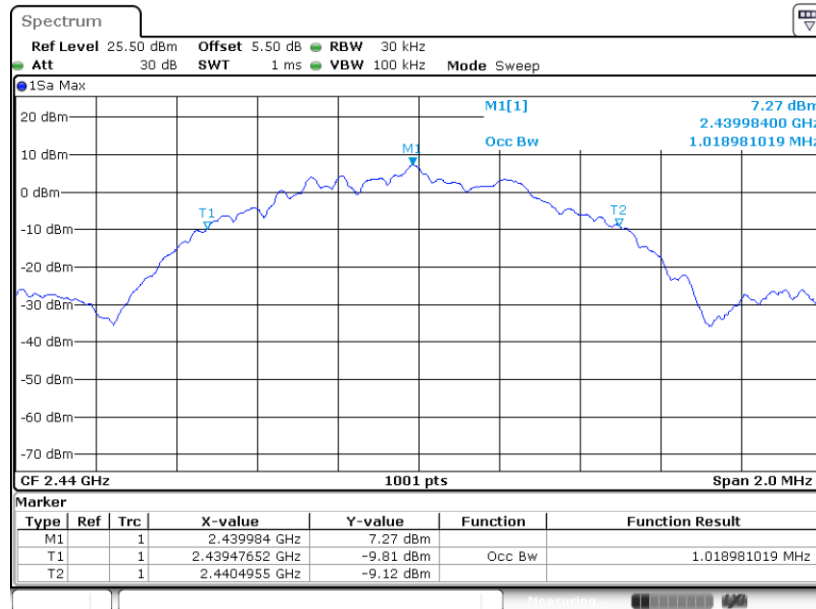

Date: 19.DEC.2021 21:28:24




99% Occupied Bandwidth Plot on Channel 39

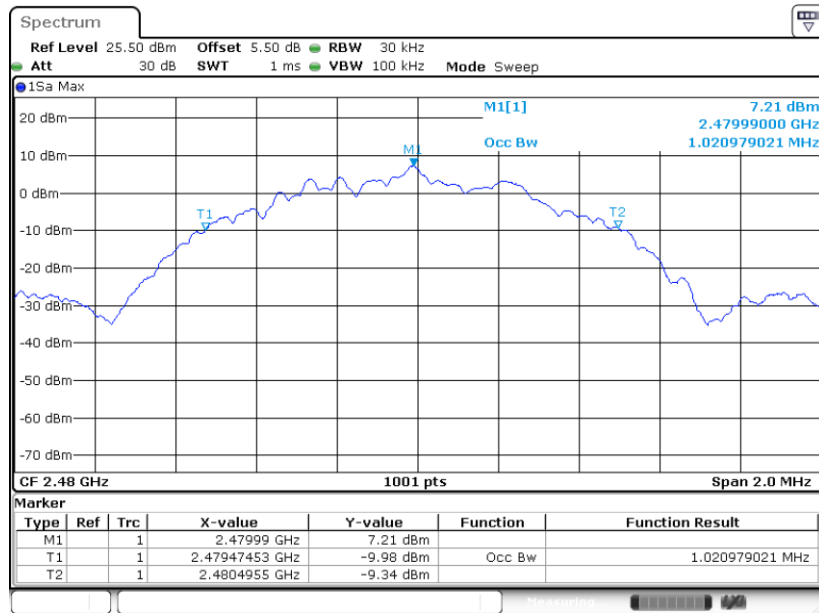

Date: 19.DEC.2021 21:31:11

Bluetooth LE 2Mbps:

99% Occupied Bandwidth Plot on Channel 00

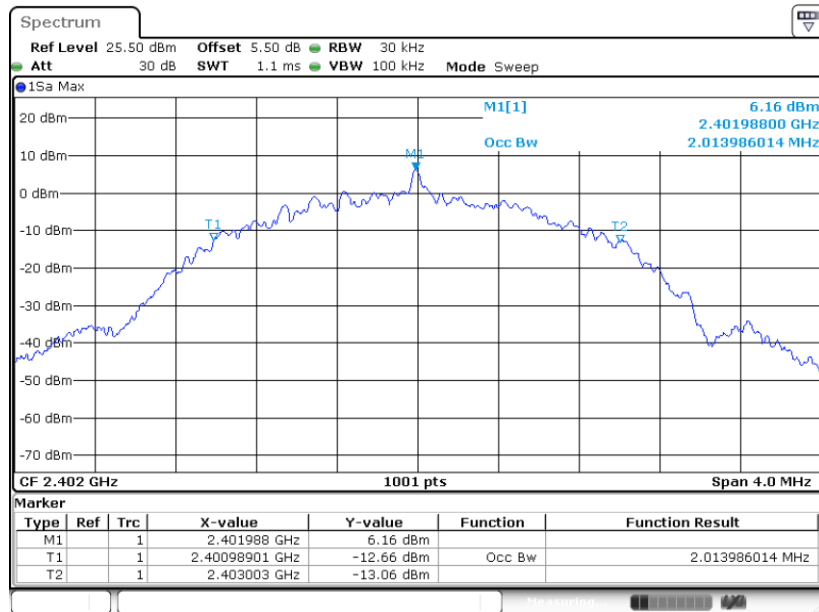


Date: 19.DEC.2021 22:49:33






99% Occupied Bandwidth Plot on Channel 19

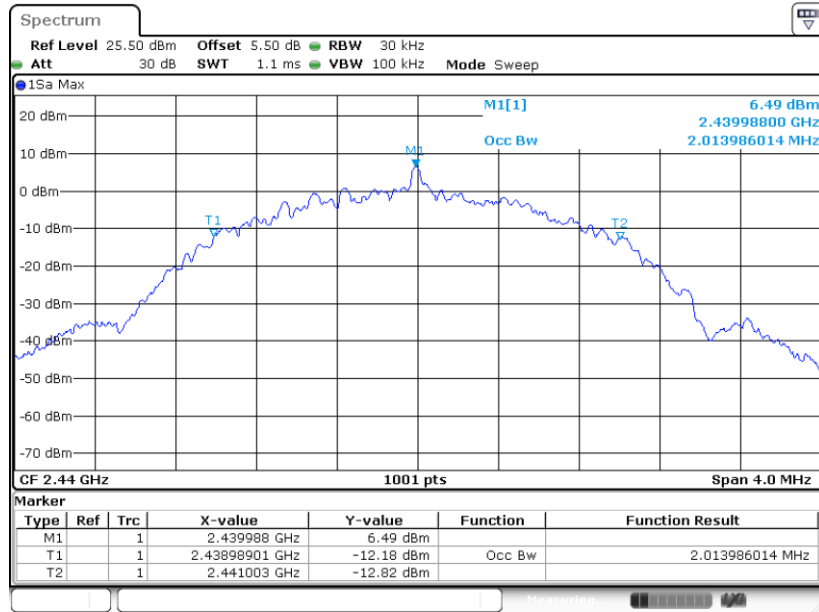

Date: 19.DEC.2021 22:48:14

99% Occupied Bandwidth Plot on Channel 39

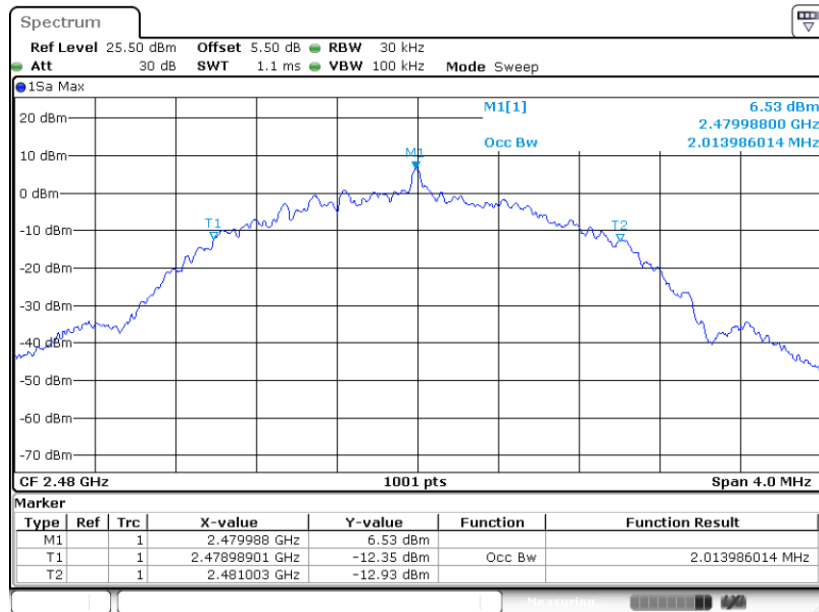

Date: 19.DEC.2021 22:47:38

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

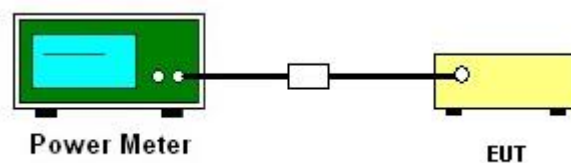

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

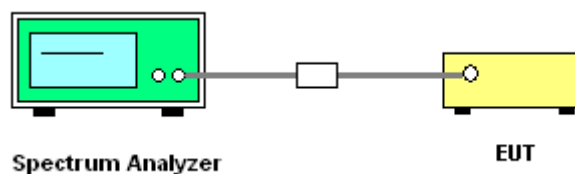

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


Bluetooth LE 1Mbps:

PSD 100kHz Plot on Channel 00

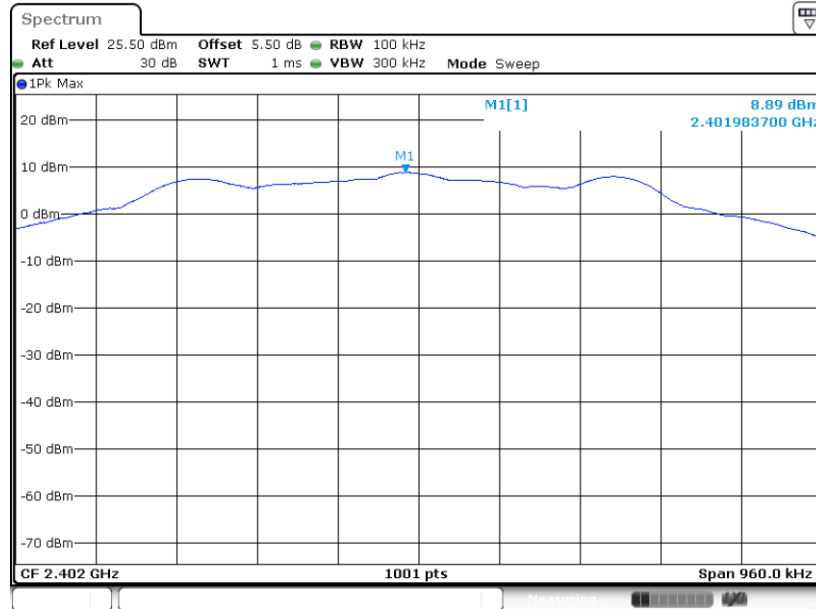

Date: 19.DEC.2021 21:25:10


PSD 100kHz Plot on Channel 19

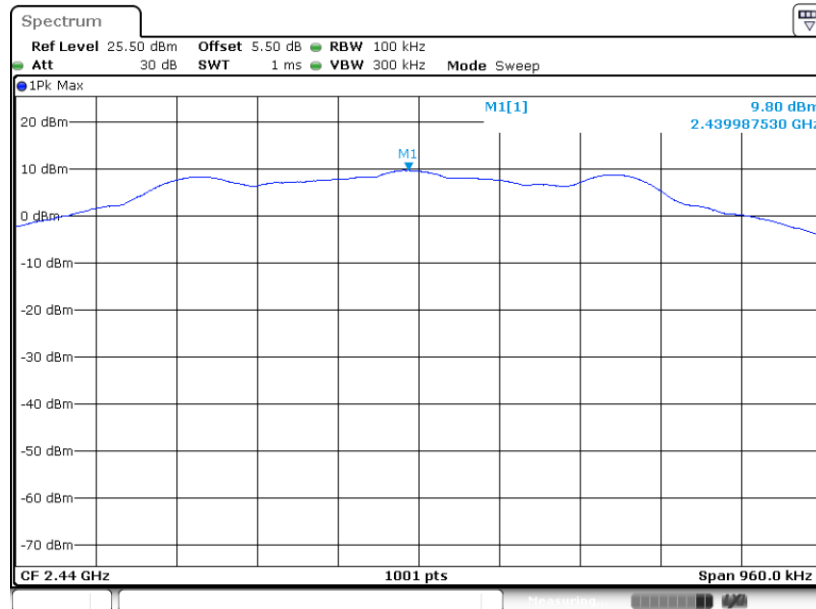

Date: 19.DEC.2021 21:28:14




PSD 100kHz Plot on Channel 39

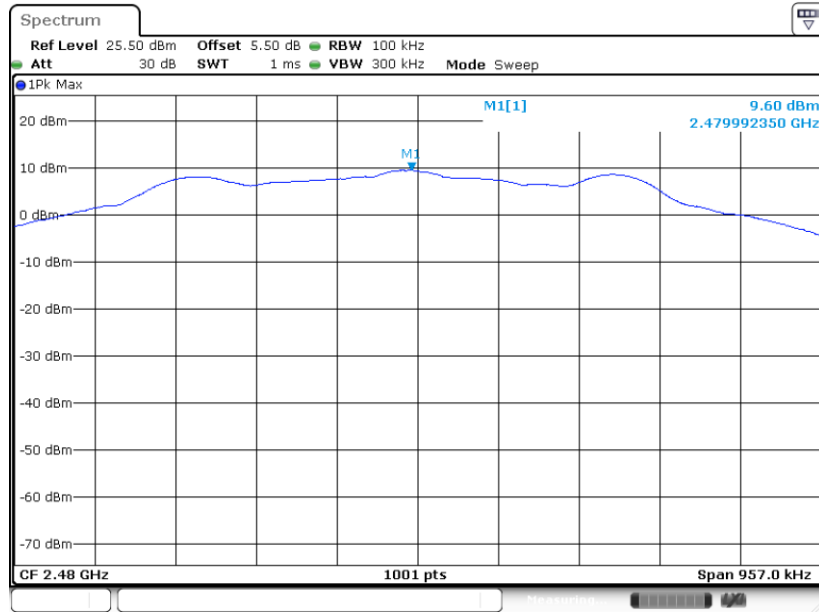

Date: 19.DEC.2021 21:31:02




Bluetooth LE 2Mbps:
PSD 100kHz Plot on Channel 00

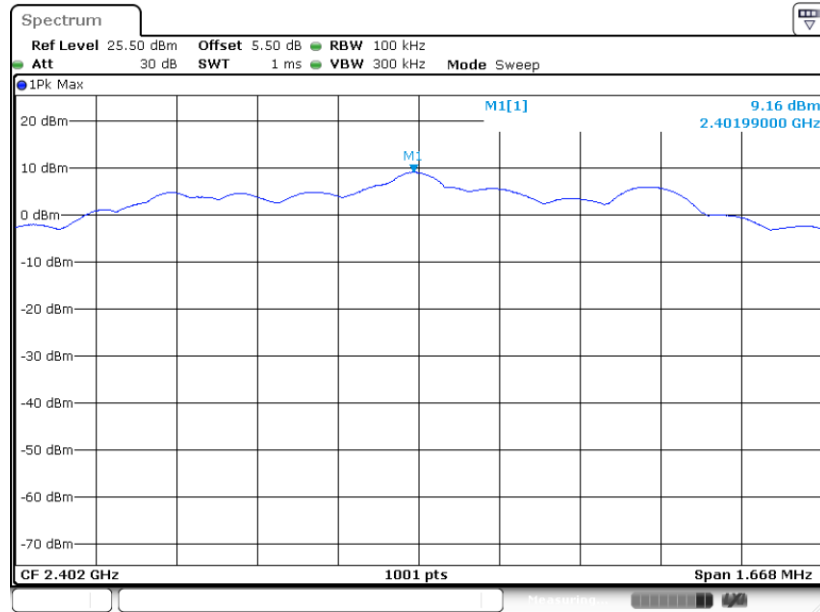

Date: 19.DEC.2021 21:38:46


PSD 100kHz Plot on Channel 19

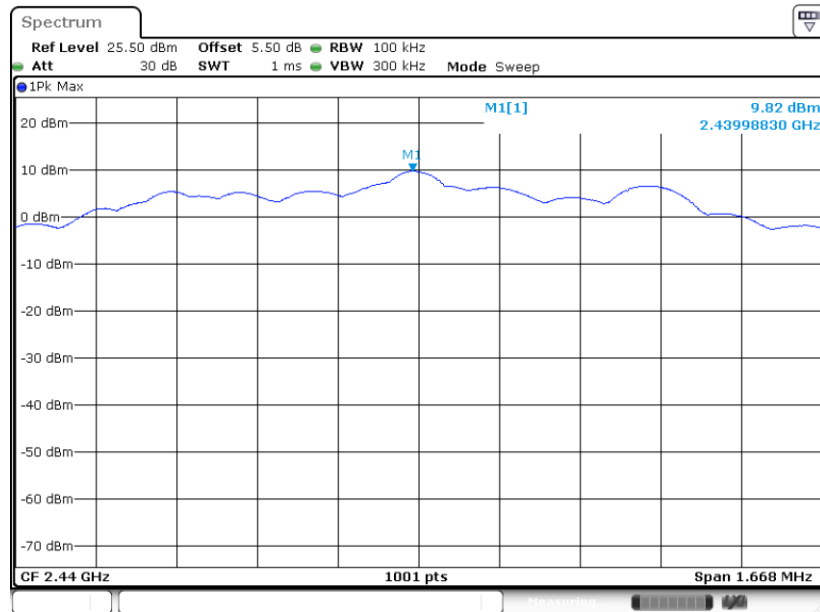

Date: 19.DEC.2021 21:42:19



PSD 100kHz Plot on Channel 39

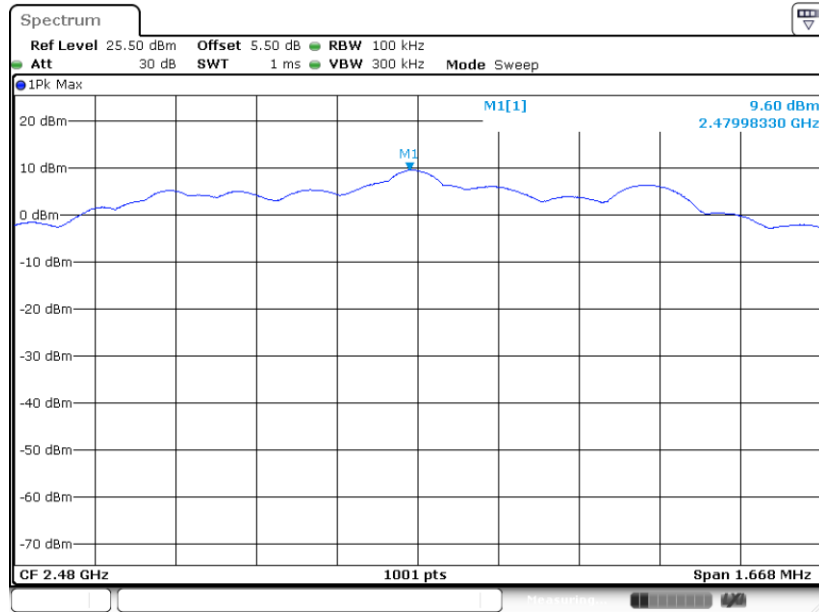


Date: 19.DEC.2021 21:34:25




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

Bluetooth LE 1Mbps:

PSD 3kHz Plot on Channel 00

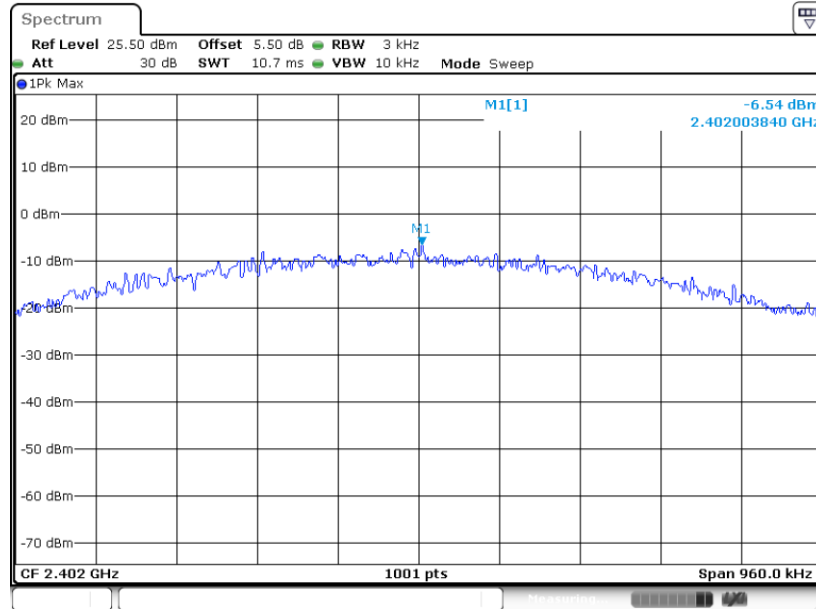


PSD 3kHz Plot on Channel 19

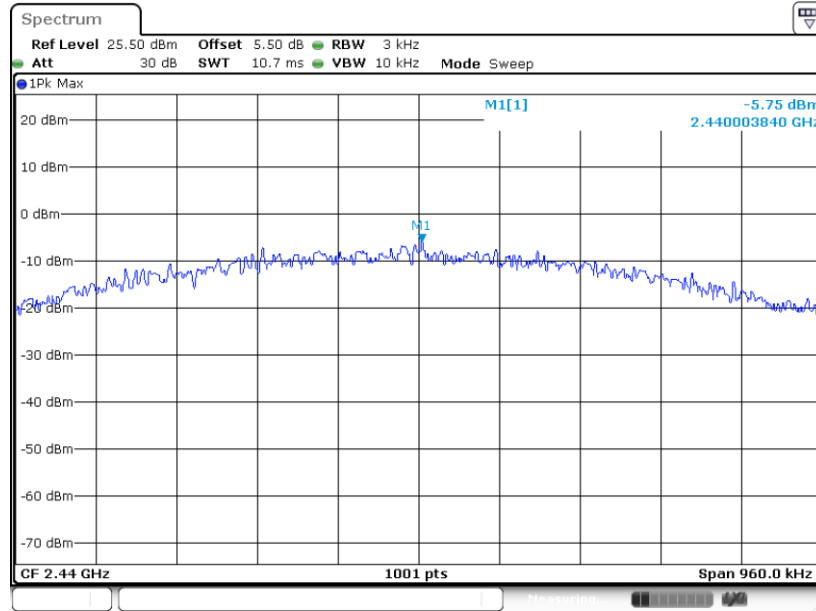






PSD 3kHz Plot on Channel 39

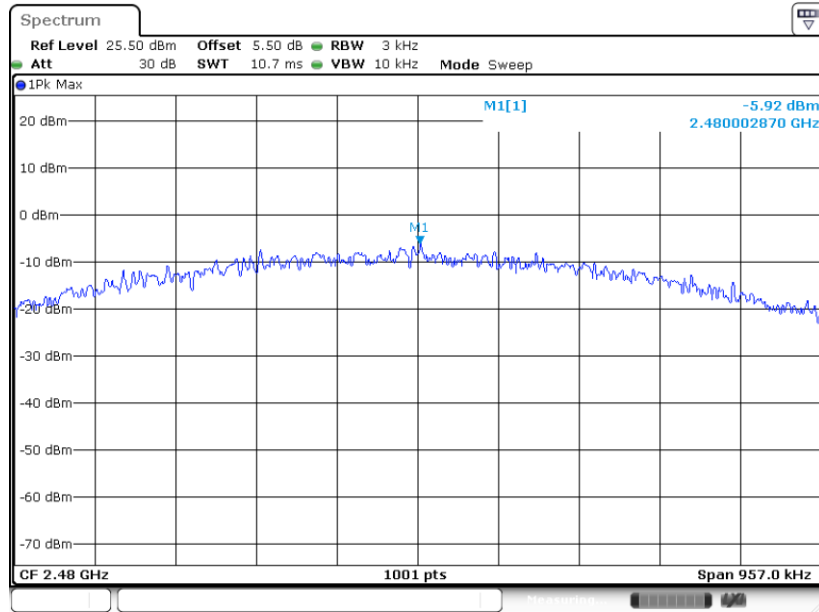

Date: 19.DEC.2021 21:30:42




Bluetooth LE 2Mbps:  
PSD 3kHz Plot on Channel 00

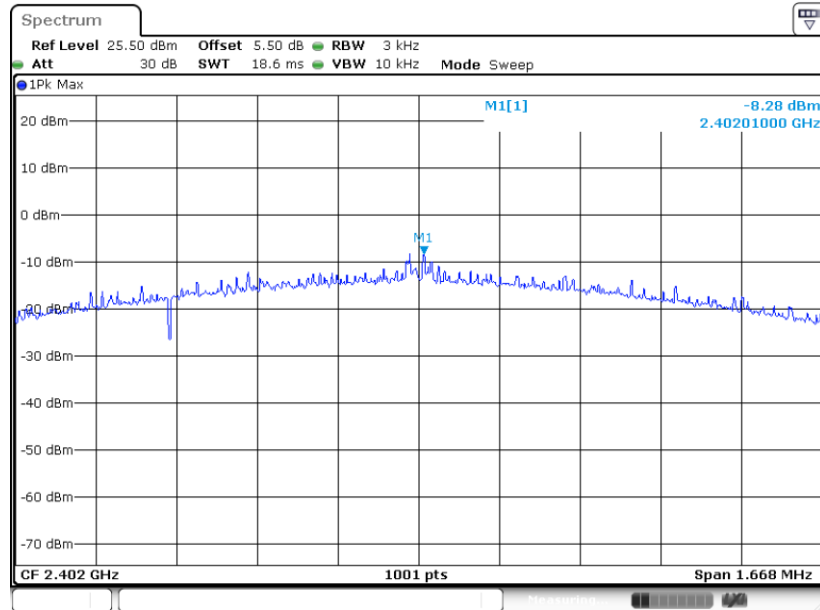

Date: 19.DEC.2021 21:38:27


PSD 3kHz Plot on Channel 19

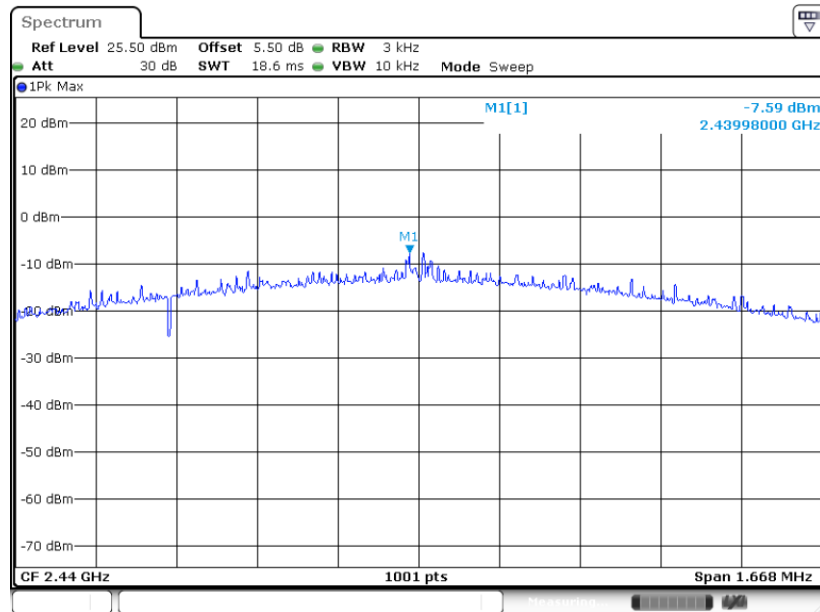

Date: 19.DEC.2021 21:42:00



PSD 3kHz Plot on Channel 39

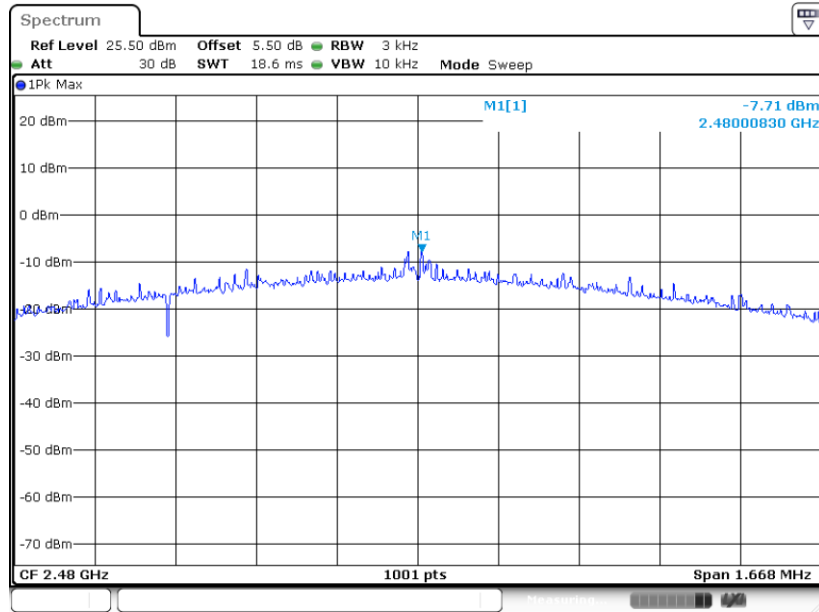

Date: 19.DEC.2021 21:34:06

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

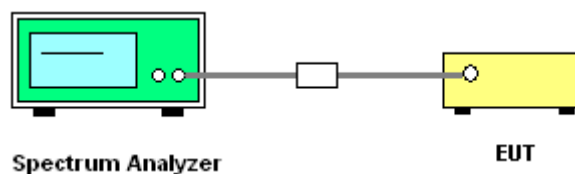




### 3.4.5 Test Result of Conducted Band Edges Plots


Bluetooth LE 1Mbps:

Low Band Edge Plot on Channel 00

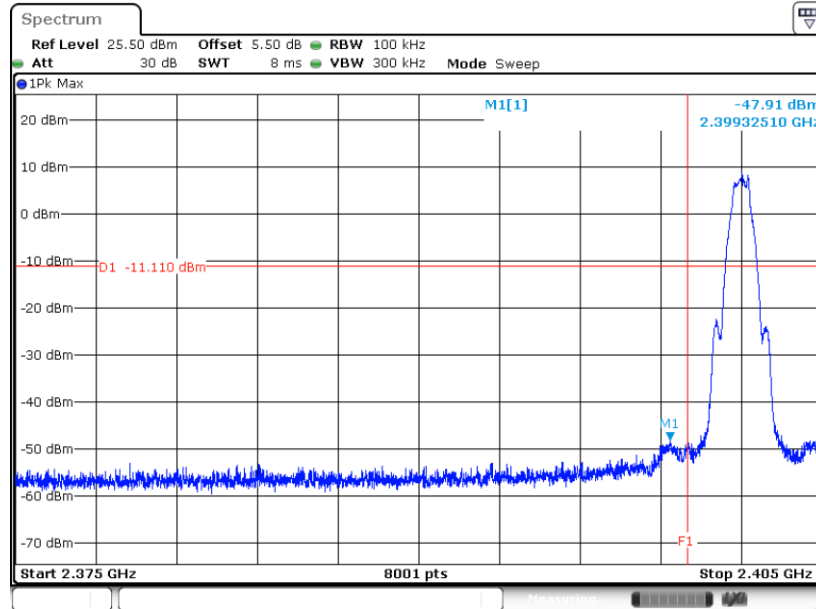

Date: 19.DEC.2021 21:25:33

High Band Edge Plot on Channel 39

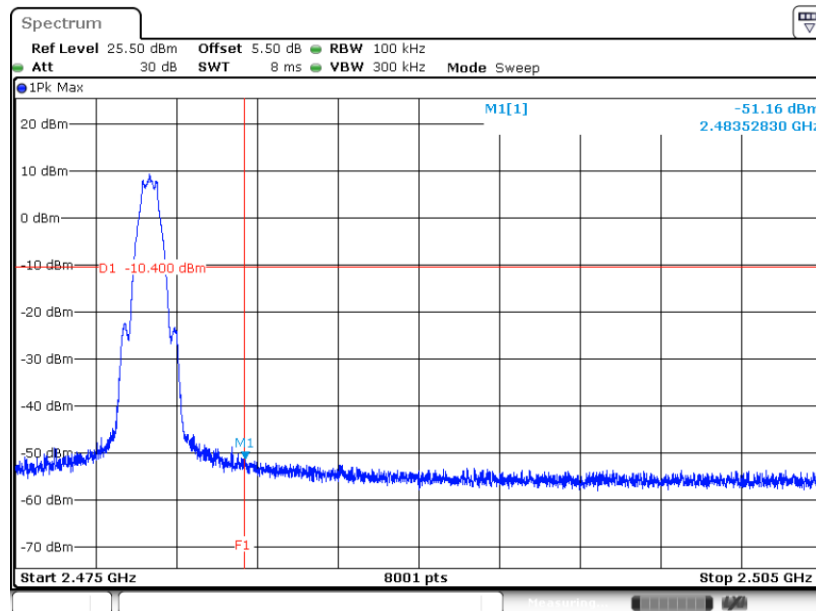


Date: 19.DEC.2021 21:31:27




Bluetooth LE 2Mbps:

Low Band Edge Plot on Channel 00

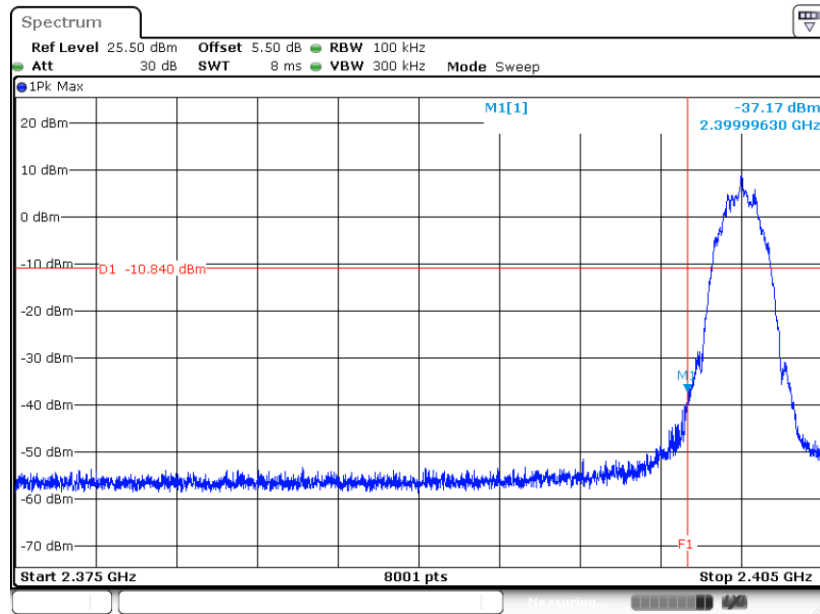

High Band Edge Plot on Channel 39

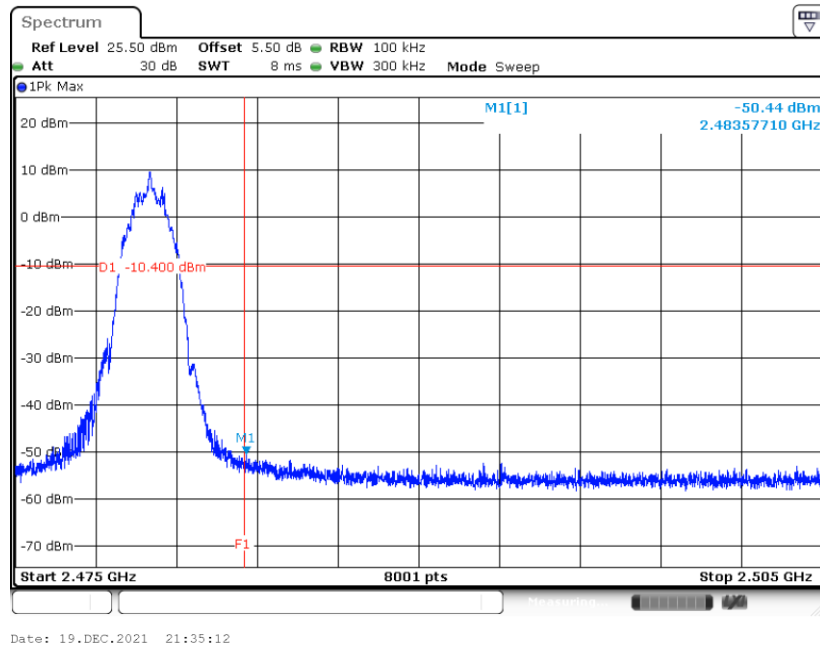




### 3.4.6 Test Result of Conducted Spurious Emission Plots

Bluetooth LE 1Mbps:

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

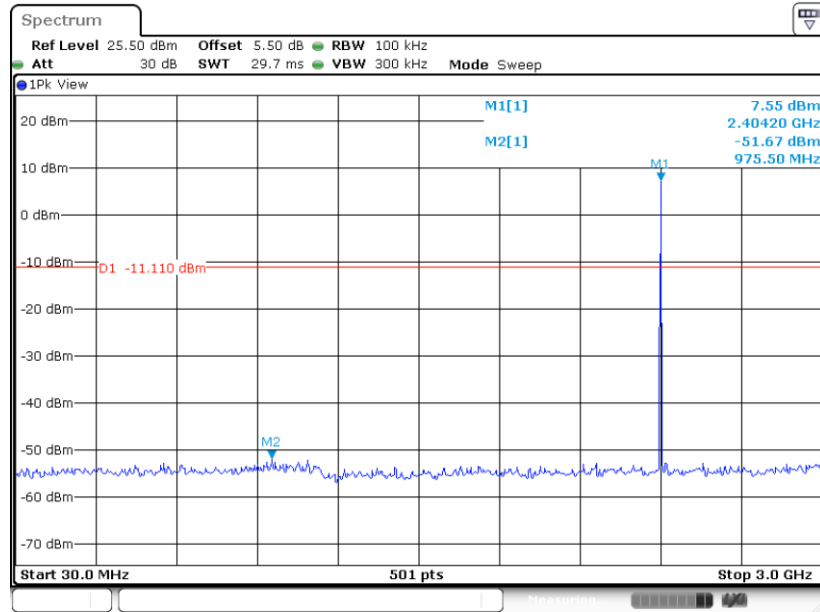

Date: 19.DEC.2021 21:26:26

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

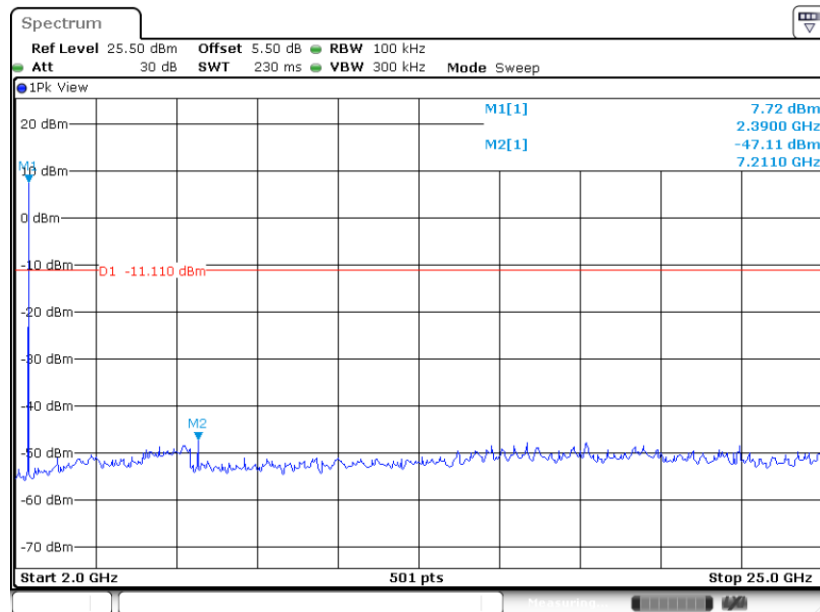

Date: 19.DEC.2021 21:26:39




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

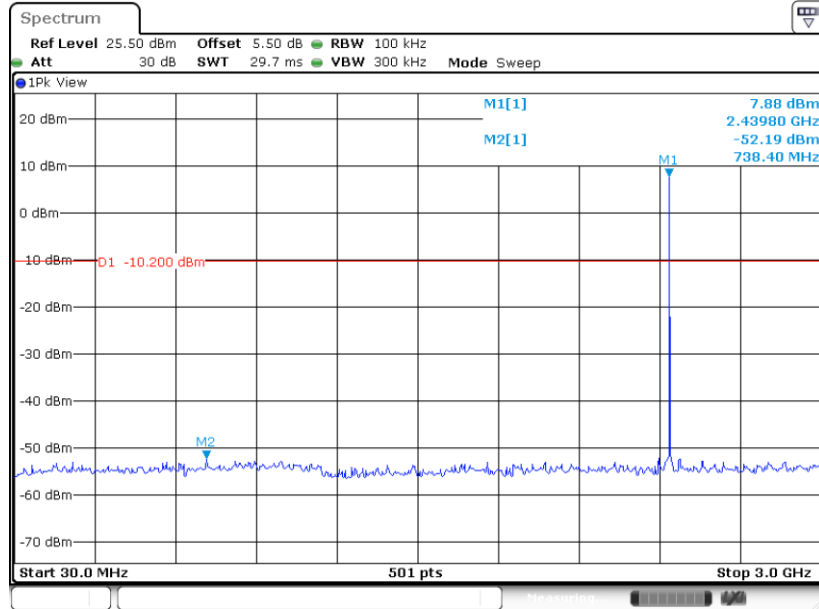

Date: 19.DEC.2021 21:29:38

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

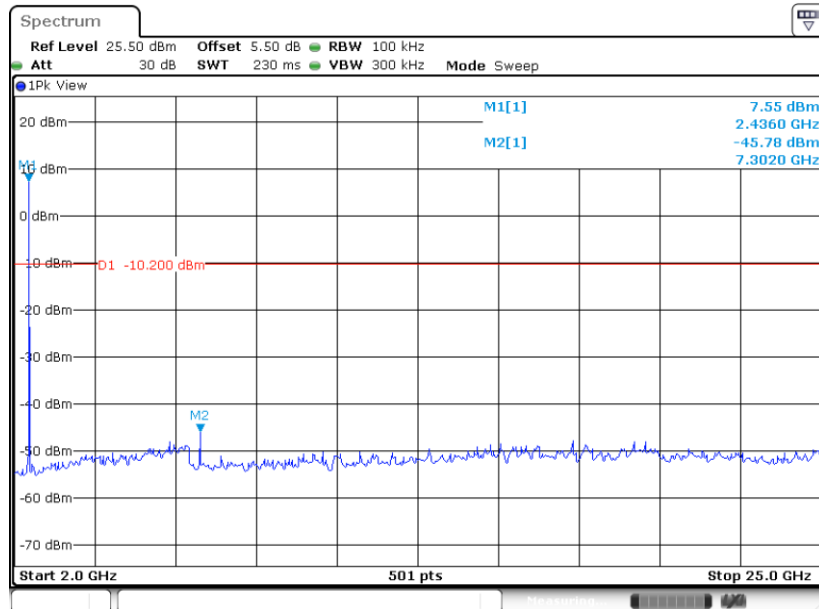


Date: 19.DEC.2021 21:29:51






Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

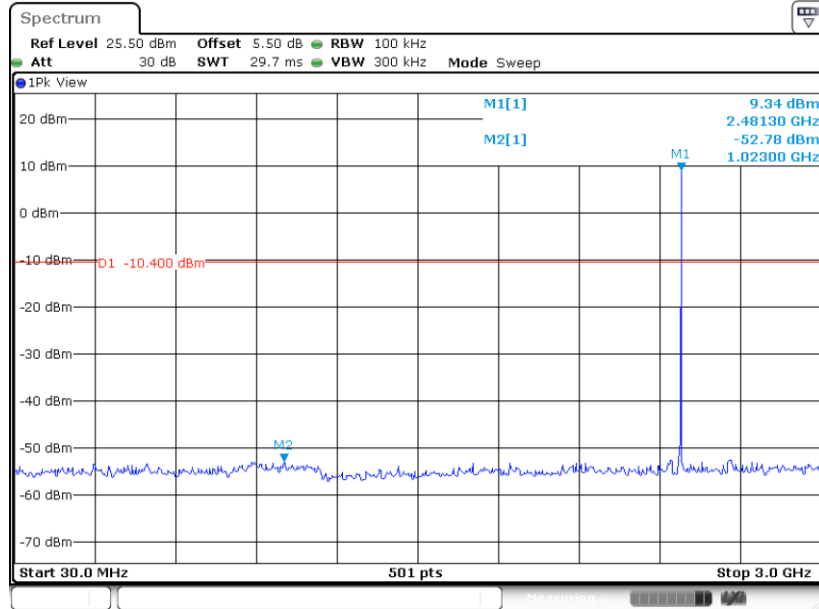

Date: 19.DEC.2021 21:32:09

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

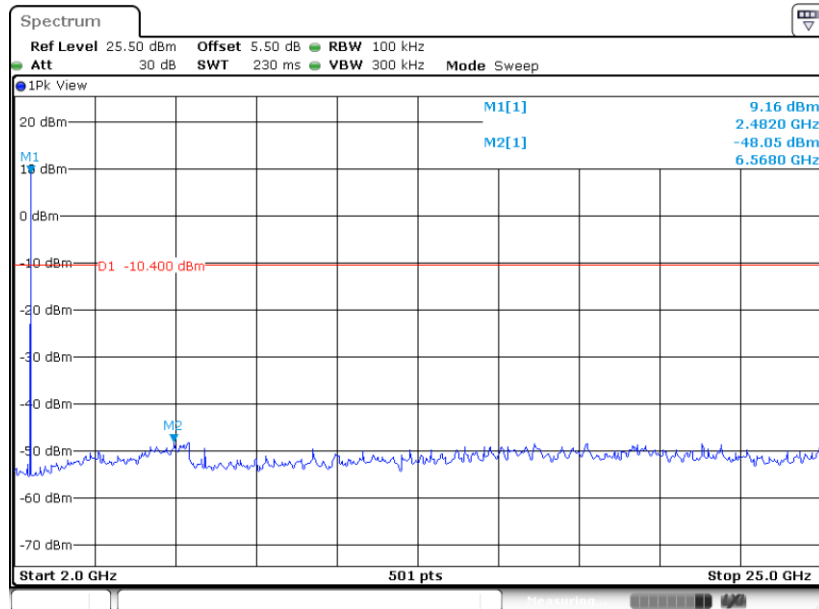


Date: 19.DEC.2021 21:32:23




Bluetooth LE 2Mbps:

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

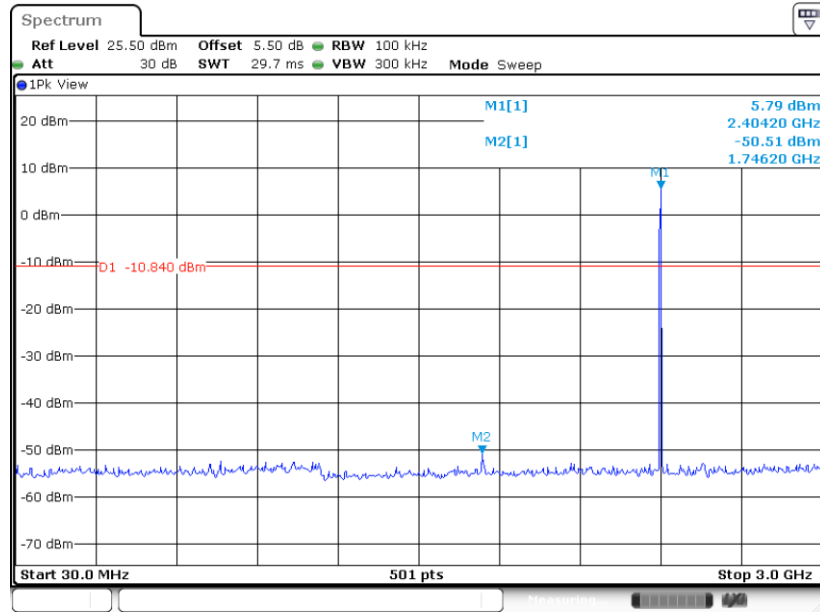


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

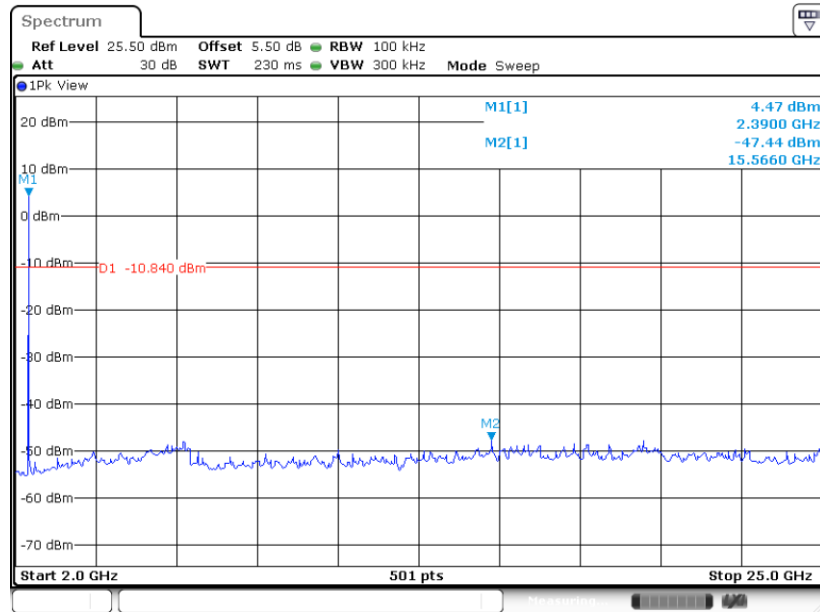




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

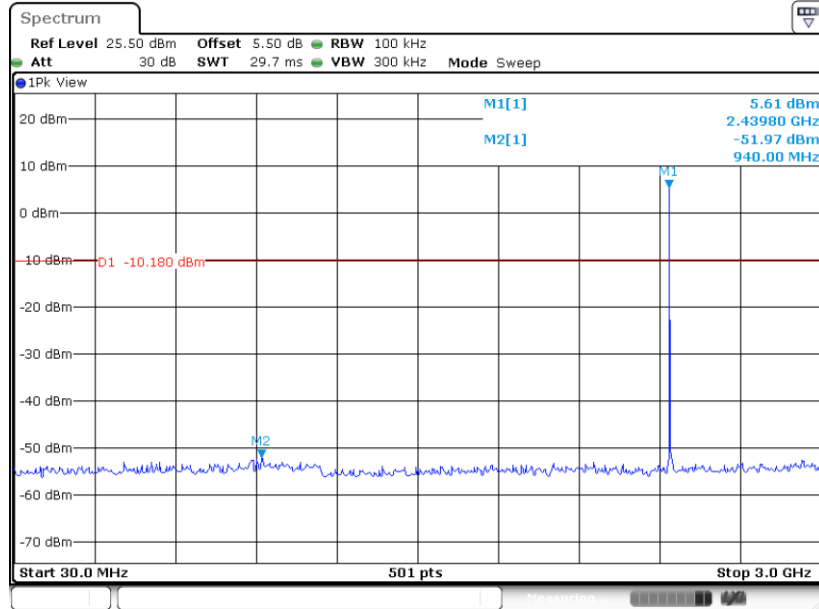

Date: 19.DEC.2021 21:43:44


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

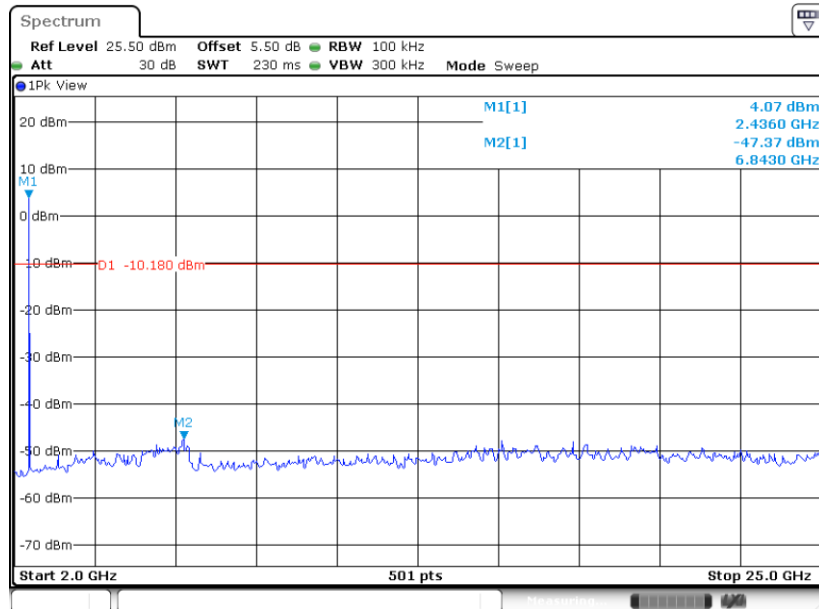

Date: 19.DEC.2021 21:43:56




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

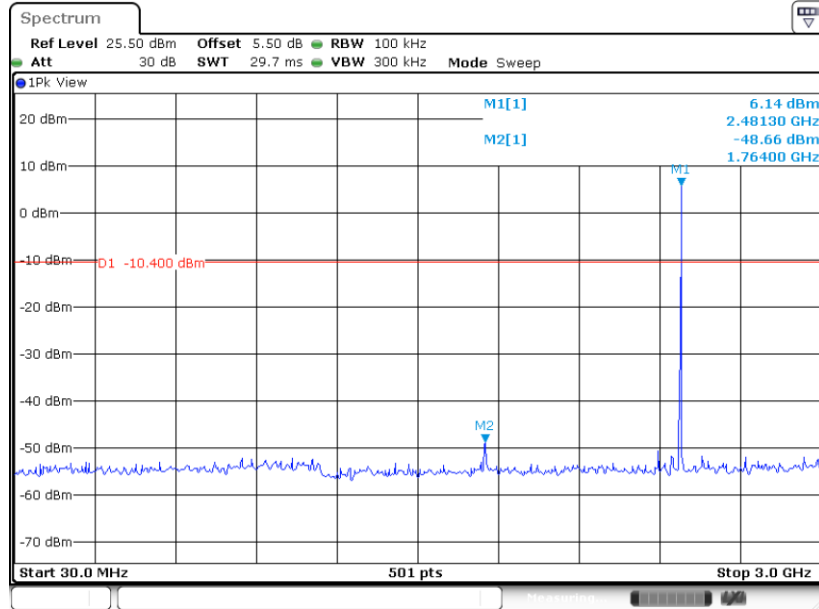

Date: 19.DEC.2021 21:37:23

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

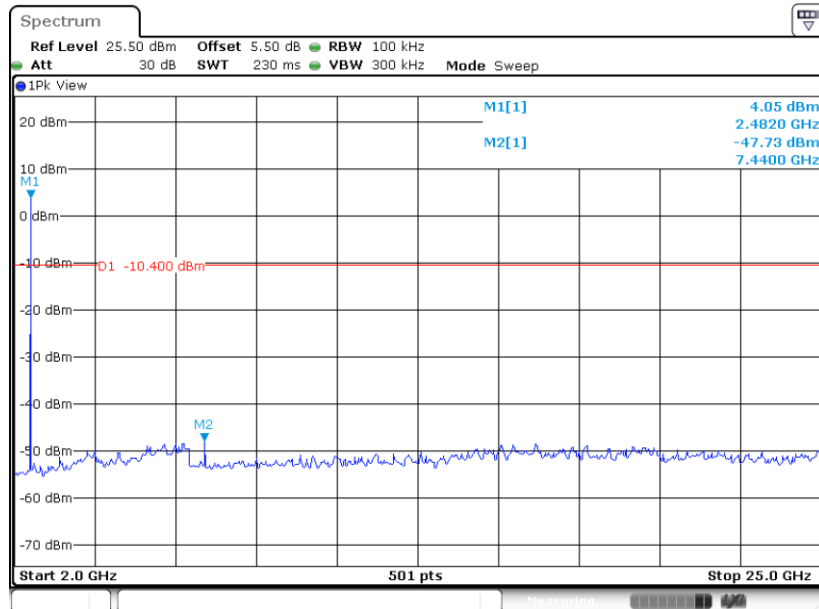

Date: 19.DEC.2021 21:37:35



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

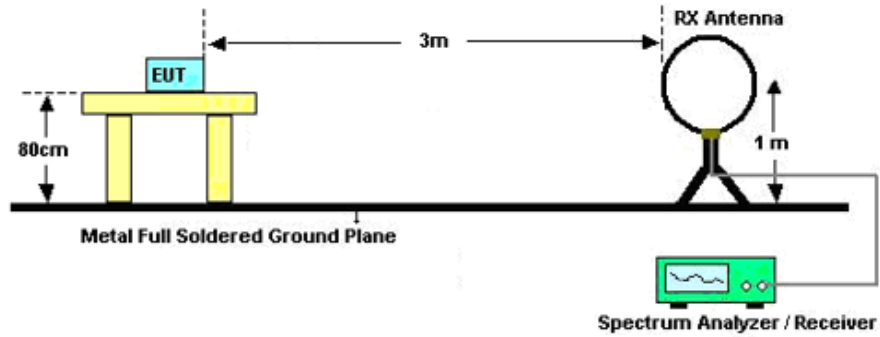

For radiated emissions from 30MHz to 1GHz

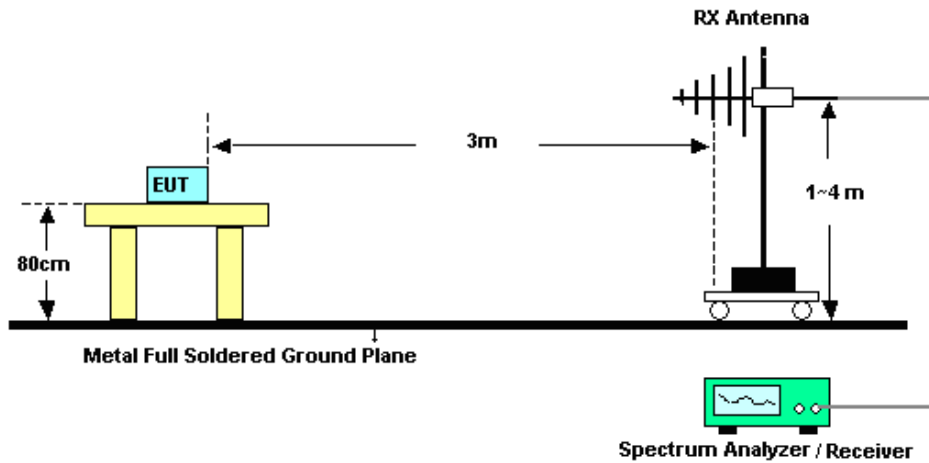

For radiated emissions above 1GHz

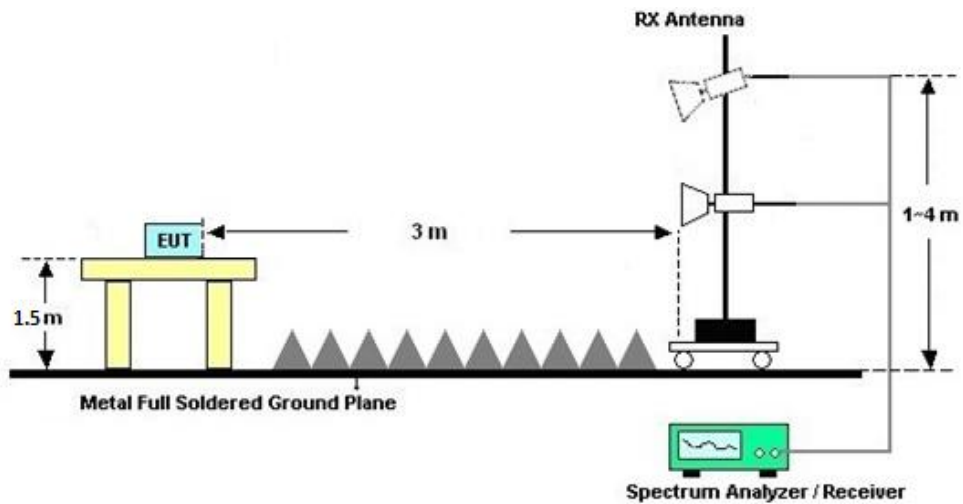



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.





### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

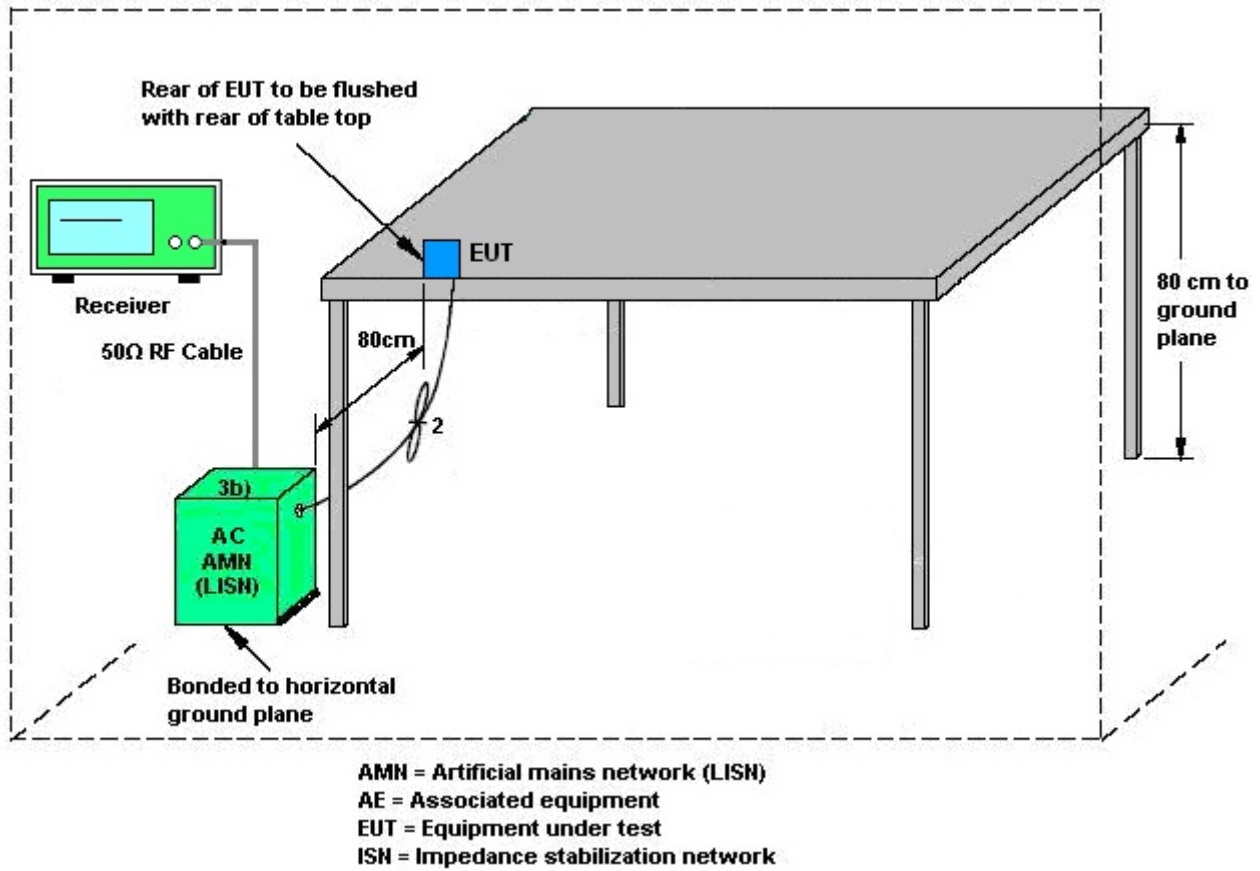

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Dec. 19, 2021	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Dec. 19, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Dec. 19, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Jan. 03, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 16, 2021	Jan. 03, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jan. 03, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 26, 2021	Jan. 03, 2022	Jan. 25, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Jan. 03, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 05, 2021	Jan. 03, 2022	Nov. 04, 2022	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 06, 2021	Jan. 03, 2022	Jan. 05, 2022	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	100MHz-18GHz	Jan. 06, 2021	Jan. 03, 2022	Jan. 05, 2022	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jan. 03, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 06, 2021	Jan. 03, 2022	Jan. 05, 2022	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jan. 03, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 03, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 03, 2022	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Jan. 18, 2022	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jan. 18, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Apr. 13, 2021	Jan. 18, 2022	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jan. 18, 2022	Oct. 13, 2022	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

———— THE END ————



## **Appendix A. Conducted Test Results**

**Bluetooth Low Energy**

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2021/12/19	Relative Humidity:	40~51	%

**TEST RESULTS DATA****6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.02	0.64	0.50	Pass
BLE	1Mbps	1	19	2440	1.02	0.64	0.50	Pass
BLE	1Mbps	1	39	2480	1.02	0.64	0.50	Pass

**TEST RESULTS DATA****Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	9.81	30.00	4.54	14.35	36.00	Pass
BLE	1Mbps	1	19	2440	9.96	30.00	4.54	14.50	36.00	Pass
BLE	1Mbps	1	39	2480	9.91	30.00	4.54	14.45	36.00	Pass

**TEST RESULTS DATA****Average Power Table  
(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.77	8.84
BLE	1Mbps	1	19	2440	0.77	9.05
BLE	1Mbps	1	39	2480	0.77	9.03

**TEST RESULTS DATA****Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	8.89	-6.54	4.54	8.00	Pass
BLE	1Mbps	1	19	2440	9.80	-5.75	4.54	8.00	Pass
BLE	1Mbps	1	39	2480	9.60	-5.92	4.54	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**Bluetooth Low Energy**

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2021/12/19	Relative Humidity:	40~51	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.01	1.11	0.50	Pass
BLE	2Mbps	1	19	2440	2.01	1.11	0.50	Pass
BLE	2Mbps	1	39	2480	2.01	1.11	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	10.02	30.00	4.54	14.56	36.00	Pass
BLE	2Mbps	1	19	2440	10.31	30.00	4.54	14.85	36.00	Pass
BLE	2Mbps	1	39	2480	10.28	30.00	4.54	14.82	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	2.47	9.11
BLE	2Mbps	1	19	2440	2.47	9.52
BLE	2Mbps	1	39	2480	2.47	9.28

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	9.16	-8.28	4.54	8.00	Pass
BLE	2Mbps	1	19	2440	9.82	-7.59	4.54	8.00	Pass
BLE	2Mbps	1	39	2480	9.60	-7.71	4.54	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.





## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

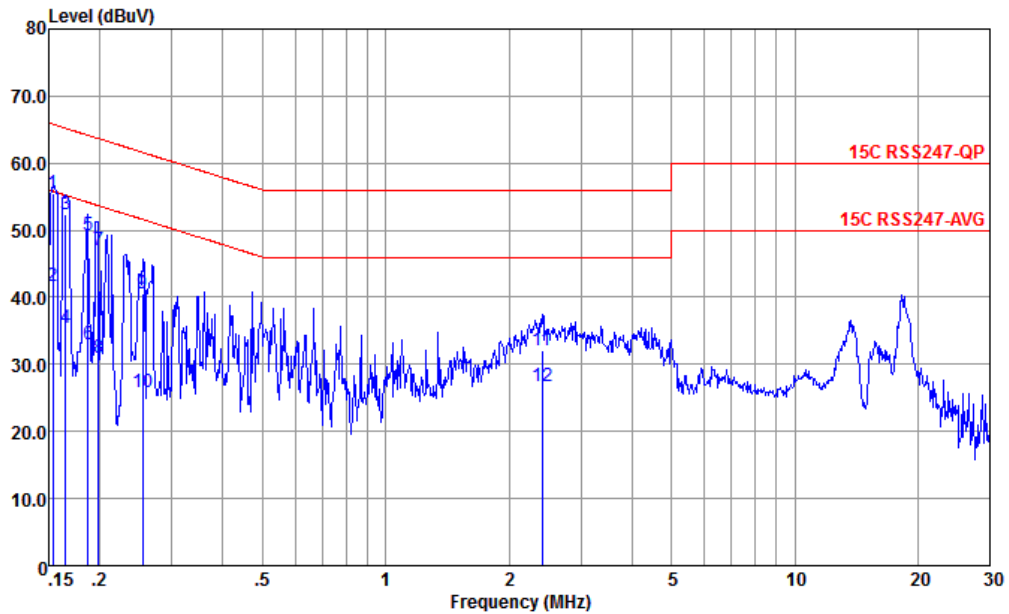


Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.153	55.59	-10.23	65.82	45.10	0.02	10.47	QP
2	0.153	41.69	-14.13	55.82	31.20	0.02	10.47	Average
3	0.165	52.37	-12.84	65.21	41.90	0.03	10.44	QP
4	0.165	35.37	-19.84	55.21	24.90	0.03	10.44	Average
5	0.187	49.33	-14.82	64.15	38.90	0.04	10.39	QP
6	0.187	33.03	-21.12	54.15	22.60	0.04	10.39	Average
7	0.199	47.01	-16.66	63.67	36.60	0.04	10.37	QP
8	0.199	30.91	-22.76	53.67	20.50	0.04	10.37	Average
9	0.255	40.59	-21.01	61.60	30.20	0.06	10.33	QP
10	0.255	25.89	-25.71	51.60	15.50	0.06	10.33	Average
11	2.409	31.98	-24.02	56.00	21.61	0.14	10.23	QP
12	2.409	26.68	-19.32	46.00	16.31	0.14	10.23	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

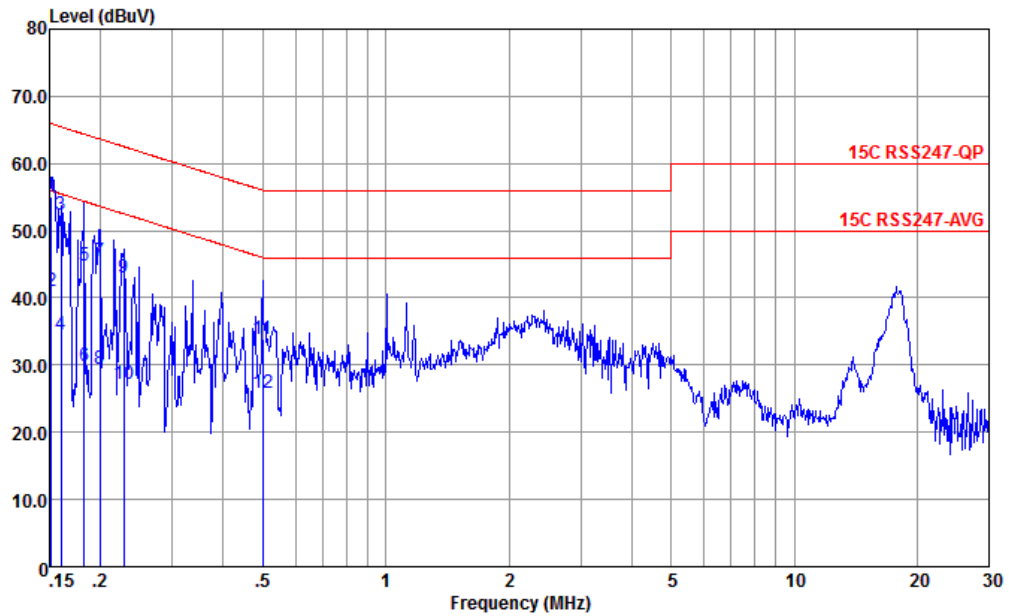

Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	55.09	-10.82	65.91	44.50	0.11	10.48	QP
2	0.152	41.09	-14.82	55.91	30.50	0.11	10.48	Average
3	0.160	52.46	-13.01	65.47	41.90	0.11	10.45	QP
4	0.160	34.46	-21.01	55.47	23.90	0.11	10.45	Average
5	0.182	44.70	-19.67	64.37	34.20	0.10	10.40	QP
6	0.182	29.80	-24.57	54.37	19.30	0.10	10.40	Average
7	0.200	45.37	-18.25	63.62	34.91	0.10	10.36	QP
8	0.200	29.36	-24.26	53.62	18.90	0.10	10.36	Average
9	0.228	42.95	-19.57	62.52	32.50	0.10	10.35	QP
10	0.228	27.25	-25.27	52.52	16.80	0.10	10.35	Average
11	0.499	33.85	-22.16	56.01	23.51	0.11	10.23	QP
12	0.499	25.84	-20.17	46.01	15.50	0.11	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

Test Engineer :	Henry LI	Temperature :	22~23°C
		Relative Humidity :	41~42%

Band			Power setting
BLE Tx	CH00	1Mbps	11
BLE Tx	CH19	1Mbps	11
BLE Tx	CH39	1Mbps	11
BLE Tx	CH00	2Mbps	11
BLE Tx	CH19	2Mbps	11
BLE Tx	CH39	2Mbps	11



2.4GHz 2400~2483.5MHz

BLE\_1M (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2364.99	48.58	-25.42	74	47.93	30.46	7.07	36.88	364	61	P	H
		2388.39	38.23	-15.77	54	37.49	30.5	7.1	36.86	364	61	A	H
	*	2404	102.89	-	-	102.04	30.57	7.13	36.85	364	61	P	H
	*	2404	101.69	-	-	100.84	30.57	7.13	36.85	364	61	A	H
		2358.62	48.36	-25.64	74	47.71	30.46	7.07	36.88	367	321	P	V
		2389.3	37.84	-16.16	54	37.1	30.5	7.1	36.86	367	321	A	V
	*	2404	101.1	-	-	100.25	30.57	7.13	36.85	367	321	P	V
	*	2404	99.96	-	-	99.11	30.57	7.13	36.85	367	321	A	V
BLE CH 39 2480MHz		2483.92	55.44	-18.56	74	54.15	30.86	7.25	36.82	340	55	P	H
		2483.5	48.03	-5.97	54	46.74	30.86	7.25	36.82	340	55	A	H
	*	2480	105.84	-	-	104.55	30.86	7.25	36.82	340	55	P	H
	*	2480	104.73	-	-	103.44	30.86	7.25	36.82	340	55	A	H
		2483.5	53.7	-20.3	74	52.41	30.86	7.25	36.82	390	320	P	V
		2483.5	46.68	-7.32	54	45.39	30.86	7.25	36.82	390	320	A	V
	*	2480	104.24	-	-	102.95	30.86	7.25	36.82	390	320	P	V
	*	2480	103.12	-	-	101.83	30.86	7.25	36.82	390	320	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE\_1M (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4808	40.55	-33.45	74	61.14	34.58	10.2	65.37	300	0	P	H
		4808	40.45	-33.55	74	61.04	34.58	10.2	65.37	100	0	P	V
BLE CH 19 2440MHz		4875	41.41	-32.59	74	61.85	34.69	10.29	65.42	300	0	P	H
		7320	44.02	-29.98	74	60.59	36.67	12.72	65.96	300	0	P	H
		4875	41.02	-32.98	74	61.46	34.69	10.29	65.42	100	0	P	V
BLE CH 39 2480MHz		7320	44.04	-29.96	74	60.61	36.67	12.72	65.96	100	0	P	V
		4965	42.07	-31.93	74	62.31	34.82	10.41	65.47	300	0	P	H
		7440	43.63	-30.37	74	60.53	36.62	12.79	66.31	300	0	P	H
		4965	41.67	-32.33	74	61.91	34.82	10.41	65.47	100	0	P	V
		7440	43.99	-30.01	74	60.89	36.62	12.79	66.31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE\_2M (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2369.93	49.23	-24.77	74	48.55	30.48	7.07	36.87	183	341	P	H
		2388.52	38.06	-15.94	54	37.32	30.5	7.1	36.86	183	341	A	H
	*	2404	101.87	-	-	101.02	30.57	7.13	36.85	183	341	P	H
	*	2404	99.97	-	-	99.12	30.57	7.13	36.85	183	341	A	H
		2324.17	48.28	-25.72	74	47.74	30.43	7.01	36.9	366	323	P	V
		2388.91	38.09	-15.91	54	37.35	30.5	7.1	36.86	366	323	A	V
	*	2404	100.98	-	-	100.13	30.57	7.13	36.85	366	323	P	V
	*	2404	98.96	-	-	98.11	30.57	7.13	36.85	366	323	A	V
BLE CH 39 2480MHz		2483.62	60.35	-13.65	74	59.06	30.86	7.25	36.82	340	51	P	H
		2483.5	51.53	-2.47	54	50.24	30.86	7.25	36.82	340	51	A	H
	*	2480	105.95	-	-	104.66	30.86	7.25	36.82	340	51	P	H
	*	2480	103.98	-	-	102.69	30.86	7.25	36.82	340	51	A	H
		2483.68	58.14	-15.86	74	56.85	30.86	7.25	36.82	390	320	P	V
		2483.5	50.21	-3.79	54	48.92	30.86	7.25	36.82	390	320	A	V
	*	2480	104.71	-	-	103.42	30.86	7.25	36.82	390	320	P	V
	*	2480	102.75	-	-	101.46	30.86	7.25	36.82	390	320	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE\_2M (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4808	40.92	-33.08	74	61.51	34.58	10.2	65.37	300	0	P	H
		4808	40.61	-33.39	74	61.2	34.58	10.2	65.37	100	0	P	V
BLE CH 19 2440MHz		4875	41.09	-32.91	74	61.53	34.69	10.29	65.42	300	0	P	H
		7320	44.32	-29.68	74	60.89	36.67	12.72	65.96	300	0	P	H
		4875	41.09	-32.91	74	61.53	34.69	10.29	65.42	100	0	P	V
		7320	44.06	-29.94	74	60.63	36.67	12.72	65.96	100	0	P	V
BLE CH 39 2480MHz		4965	41.79	-32.21	74	62.03	34.82	10.41	65.47	300	0	P	H
		7440	44.06	-29.94	74	60.96	36.62	12.79	66.31	300	0	P	H
		4960	42.05	-31.95	74	62.31	34.82	10.39	65.47	100	0	P	V
		7440	43.55	-30.45	74	60.45	36.62	12.79	66.31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE LF		167.74	26.75	-16.75	43.5	41.47	15.5	1.88	32.1	-	-	P	H
		216.24	30.62	-15.38	46	45.78	14.88	2.09	32.13	-	-	P	H
		408.3	30.85	-15.15	46	38.05	22.06	3.02	32.28	-	-	P	H
		531.49	34.09	-11.91	46	39.36	23.9	3.17	32.34	-	-	P	H
		764.29	28.18	-17.82	46	28.25	28.12	4.11	32.3	-	-	P	H
		900.09	30.8	-15.2	46	29.62	28.9	4.48	32.2	-	-	P	H
		167.74	23.2	-20.3	43.5	37.92	15.5	1.88	32.1	-	-	P	V
		263.77	21.76	-24.24	46	31.71	20	2.22	32.17	-	-	P	V
		408.3	24.69	-21.31	46	31.89	22.06	3.02	32.28	-	-	P	V
		497.54	34.61	-11.39	46	40.11	23.75	3.14	32.39	-	-	P	V
		640.13	33.16	-12.84	46	35.37	26.3	3.71	32.22	-	-	P	V
		719.67	28.71	-17.29	46	29.95	27	4	32.24	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>





A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

### Note symbol

-L	Low channel location
-R	High channel location
Only the worst cases Radiated Spurious Emission Plots are shown.	



2.4GHz 2400~2483.5MHz  
BLE\_2M (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																															
ANT	BLE CH39 2480MHz																																																															
1	Horizontal	Fundamental																																																														
Peak	<p>Site : 032005-KS Condition : FCC PART 15C 3m 3117 00218652 HORIZONTAL Project : RSR 1000.000000 VBR 3000.000000 SRT:Auto Mode : (FR) 1M0918 Plane : 0 Full-directivity : X Powersetting : #2</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>60.35</td> <td>-13.65</td> <td>74.00</td> <td>09.06</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>340</td> <td>51</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg		1	2483.62	60.35	-13.65	74.00	09.06	30.86	7.25	36.82	340	51	Peak	HORIZONTAL	<p>Site : 032005-KS Condition : FCC PART 15C 3m 3117 00218652 HORIZONTAL Project : RSR 1000.000000 VBR 3000.000000 SRT:Auto Mode : (FR) 1M0918 Plane : 0 Full-directivity : X Powersetting : #2</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>105.95</td> <td>31.95</td> <td>74.00</td> <td>104.66</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>340</td> <td>51</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg		1	2480.00	105.95	31.95	74.00	104.66	30.86	7.25	36.82	340	51	Peak	HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg																																																									
1	2483.62	60.35	-13.65	74.00	09.06	30.86	7.25	36.82	340	51	Peak	HORIZONTAL																																																				
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg																																																									
1	2480.00	105.95	31.95	74.00	104.66	30.86	7.25	36.82	340	51	Peak	HORIZONTAL																																																				
Avg.	<p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3117 00218652 HORIZONTAL Project : RSR 1000.000000 VBR 1.000000 SRT:Auto Mode : (FR) 1M0918 Plane : 0 Full-directivity : X Powersetting : #2</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>51.53</td> <td>-2.47</td> <td>54.00</td> <td>50.24</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>340</td> <td>51</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg		1	2483.50	51.53	-2.47	54.00	50.24	30.86	7.25	36.82	340	51	Average	HORIZONTAL	<p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3117 00218652 HORIZONTAL Project : RSR 1000.000000 VBR 1.000000 SRT:Auto Mode : (FR) 1M0918 Plane : 0 Full-directivity : X Powersetting : #2</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>103.98</td> <td>49.98</td> <td>54.00</td> <td>102.69</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>340</td> <td>51</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg		1	2480.00	103.98	49.98	54.00	102.69	30.86	7.25	36.82	340	51	Average	HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg																																																									
1	2483.50	51.53	-2.47	54.00	50.24	30.86	7.25	36.82	340	51	Average	HORIZONTAL																																																				
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBm/Vm	dBm/Vm	dBm/Vm	dBm	dB	deg	deg																																																									
1	2480.00	103.98	49.98	54.00	102.69	30.86	7.25	36.82	340	51	Average	HORIZONTAL																																																				



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																									
ANT	BLE CH39 2480MHZ																																																									
1	Vertical	Fundamental																																																								
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 00218652 VERTICAL Project : RRM 1000.000000 VBR 3000.000000 SRT:Auto Mode : 0 Plane : X Full-directivity MEI : 02 Powersetting : 11B</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>58.14</td> <td>-15.86</td> <td>74.00</td> <td>56.85</td> <td>30.86</td> <td>7.25 36.82</td> <td>390</td> <td>320</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2483.68	58.14	-15.86	74.00	56.85	30.86	7.25 36.82	390	320	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 00218652 VERTICAL Project : RRM 1000.000000 VBR 3000.000000 SRT:Auto Mode : 0 Plane : X Full-directivity MEI : 02 Powersetting : 11B</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>104.71</td> <td>30.71</td> <td>74.00</td> <td>103.42</td> <td>30.86</td> <td>7.25 36.82</td> <td>390</td> <td>320</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2480.00	104.71	30.71	74.00	103.42	30.86	7.25 36.82	390	320	Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																			
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																			
1	2483.68	58.14	-15.86	74.00	56.85	30.86	7.25 36.82	390	320	Peak	VERTICAL																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																			
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																			
1	2480.00	104.71	30.71	74.00	103.42	30.86	7.25 36.82	390	320	Peak	VERTICAL																																															
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 00218652 VERTICAL Project : RRM 1000.000000 VBR 1.000000 SRT:Auto Mode : 0 Plane : X Full-directivity MEI : 02 Powersetting : 11B</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>50.21</td> <td>-3.79</td> <td>54.00</td> <td>48.92</td> <td>30.86</td> <td>7.25 36.82</td> <td>390</td> <td>320</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2483.50	50.21	-3.79	54.00	48.92	30.86	7.25 36.82	390	320	Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 00218652 VERTICAL Project : RRM 1000.000000 VBR 1.000000 SRT:Auto Mode : 0 Plane : X Full-directivity MEI : 02 Powersetting : 11B</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>102.75</td> <td>48.75</td> <td>54.00</td> <td>101.46</td> <td>30.86</td> <td>7.25 36.82</td> <td>390</td> <td>320</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2480.00	102.75	48.75	54.00	101.46	30.86	7.25 36.82	390	320	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																			
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																			
1	2483.50	50.21	-3.79	54.00	48.92	30.86	7.25 36.82	390	320	Average	VERTICAL																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																			
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																			
1	2480.00	102.75	48.75	54.00	101.46	30.86	7.25 36.82	390	320	Average	VERTICAL																																															



2.4GHz 2400~2483.5MHz

BLE\_2M (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																			
ANT	BLE CH19 2440MHz																																																																			
1	Horizontal	Vertical																																																																		
Peak Avg.	<p>Site : 03DH05-KS Condition : FCC PART 15C 3m 3117.00218653 HORIZONTAL Project : RSM 1000.0000Hz VBR 3000.0000Hz SRT Auto Mode : FRS 1N0918A Plane : X IMEI : Full-directivity Powersetting : #2</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>41.09</td> <td>-32.91</td> <td>74.00</td> <td>61.53</td> <td>34.69</td> <td>10.29</td> <td>65.42</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>44.32</td> <td>-29.68</td> <td>74.00</td> <td>60.89</td> <td>36.67</td> <td>12.72</td> <td>65.96</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	4875.00	41.09	-32.91	74.00	61.53	34.69	10.29	65.42	300	0 Peak HORIZONTAL	2	7320.00	44.32	-29.68	74.00	60.89	36.67	12.72	65.96	300	0 Peak HORIZONTAL	<p>Site : 03DH05-KS Condition : FCC PART 15C 3m 3117.00218653 VERTICAL Project : RSM 1000.0000Hz VBR 3000.0000Hz SRT Auto Mode : FRS 1N0918A Plane : X IMEI : Full-directivity Powersetting : #2</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>41.09</td> <td>-32.91</td> <td>74.00</td> <td>61.53</td> <td>34.69</td> <td>10.29</td> <td>65.42</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>44.56</td> <td>-29.44</td> <td>74.00</td> <td>60.63</td> <td>36.67</td> <td>12.72</td> <td>65.96</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	4875.00	41.09	-32.91	74.00	61.53	34.69	10.29	65.42	100	0 Peak VERTICAL	2	7320.00	44.56	-29.44	74.00	60.63	36.67	12.72	65.96	100	0 Peak VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
1	4875.00	41.09	-32.91	74.00	61.53	34.69	10.29	65.42	300	0 Peak HORIZONTAL																																																										
2	7320.00	44.32	-29.68	74.00	60.89	36.67	12.72	65.96	300	0 Peak HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
1	4875.00	41.09	-32.91	74.00	61.53	34.69	10.29	65.42	100	0 Peak VERTICAL																																																										
2	7320.00	44.56	-29.44	74.00	60.63	36.67	12.72	65.96	100	0 Peak VERTICAL																																																										



Emission below 1GHz  
2.4GHz BLE\_2M (LF)


BLE	2.4GHz 2400~2483.5MHz																																																																																																																																																											
ANT	BLE LF																																																																																																																																																											
1	Horizontal	Vertical																																																																																																																																																										
QP / Peak	<p>Site : 030902-KS Condition : FCC PART 15C 3m CBL 6110 59913 HORIZONTAL Project : FR1N0918 Mode : 0 Plane : E Full-directivity : 2 IME1 : 01</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr><td>1</td><td>167.74</td><td>26.75</td><td>-16.25</td><td>43.50</td><td>41.47</td><td>15.50</td><td>1.88</td><td>32.10</td><td>--- Peak</td><td>HORIZONTAL</td></tr> <tr><td>2</td><td>216.24</td><td>30.62</td><td>-15.38</td><td>46.00</td><td>45.78</td><td>14.88</td><td>2.09</td><td>32.13</td><td>--- Peak</td><td>HORIZONTAL</td></tr> <tr><td>3</td><td>408.30</td><td>30.85</td><td>-15.15</td><td>46.00</td><td>38.50</td><td>22.50</td><td>3.20</td><td>32.28</td><td>--- Peak</td><td>HORIZONTAL</td></tr> <tr><td>4</td><td>531.49</td><td>34.09</td><td>-11.91</td><td>46.00</td><td>39.36</td><td>23.90</td><td>2.17</td><td>32.34</td><td>--- Peak</td><td>HORIZONTAL</td></tr> <tr><td>5</td><td>164.29</td><td>28.18</td><td>-17.82</td><td>46.00</td><td>28.22</td><td>16.12</td><td>6.18</td><td>32.30</td><td>--- Peak</td><td>HORIZONTAL</td></tr> <tr><td>6</td><td>900.09</td><td>30.80</td><td>-15.20</td><td>46.00</td><td>29.62</td><td>28.90</td><td>4.48</td><td>32.20</td><td>--- Peak</td><td>HORIZONTAL</td></tr> </tbody> </table>	Peak	Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	167.74	26.75	-16.25	43.50	41.47	15.50	1.88	32.10	--- Peak	HORIZONTAL	2	216.24	30.62	-15.38	46.00	45.78	14.88	2.09	32.13	--- Peak	HORIZONTAL	3	408.30	30.85	-15.15	46.00	38.50	22.50	3.20	32.28	--- Peak	HORIZONTAL	4	531.49	34.09	-11.91	46.00	39.36	23.90	2.17	32.34	--- Peak	HORIZONTAL	5	164.29	28.18	-17.82	46.00	28.22	16.12	6.18	32.30	--- Peak	HORIZONTAL	6	900.09	30.80	-15.20	46.00	29.62	28.90	4.48	32.20	--- Peak	HORIZONTAL	<p>Site : 030902-KS Condition : FCC PART 15C 3m CBL 6110 59913 VERTICAL Project : FR1N0918 Mode : 0 Plane : E Full-directivity : 2 IME1 : 01</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr><td>1</td><td>167.74</td><td>23.20</td><td>-30.30</td><td>43.50</td><td>37.92</td><td>15.50</td><td>1.88</td><td>32.10</td><td>--- Peak</td><td>VERTICAL</td></tr> <tr><td>2</td><td>216.24</td><td>21.70</td><td>-24.24</td><td>46.00</td><td>31.71</td><td>20.00</td><td>2.22</td><td>32.17</td><td>--- Peak</td><td>VERTICAL</td></tr> <tr><td>3</td><td>408.30</td><td>24.49</td><td>-21.31</td><td>46.00</td><td>31.89</td><td>21.04</td><td>3.02</td><td>32.28</td><td>--- Peak</td><td>VERTICAL</td></tr> <tr><td>4</td><td>497.54</td><td>34.41</td><td>-11.39</td><td>46.00</td><td>40.51</td><td>23.75</td><td>3.14</td><td>32.39</td><td>--- Peak</td><td>VERTICAL</td></tr> <tr><td>5</td><td>440.13</td><td>23.18</td><td>-18.84</td><td>46.00</td><td>32.37</td><td>26.29</td><td>2.71</td><td>32.22</td><td>--- Peak</td><td>VERTICAL</td></tr> <tr><td>6</td><td>719.67</td><td>28.71</td><td>-17.29</td><td>46.00</td><td>29.95</td><td>27.00</td><td>4.00</td><td>32.24</td><td>--- Peak</td><td>VERTICAL</td></tr> </tbody> </table>	Peak	Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	167.74	23.20	-30.30	43.50	37.92	15.50	1.88	32.10	--- Peak	VERTICAL	2	216.24	21.70	-24.24	46.00	31.71	20.00	2.22	32.17	--- Peak	VERTICAL	3	408.30	24.49	-21.31	46.00	31.89	21.04	3.02	32.28	--- Peak	VERTICAL	4	497.54	34.41	-11.39	46.00	40.51	23.75	3.14	32.39	--- Peak	VERTICAL	5	440.13	23.18	-18.84	46.00	32.37	26.29	2.71	32.22	--- Peak	VERTICAL	6	719.67	28.71	-17.29	46.00	29.95	27.00	4.00	32.24	--- Peak	VERTICAL
	Peak	Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																	
1	167.74	26.75	-16.25	43.50	41.47	15.50	1.88	32.10	--- Peak	HORIZONTAL																																																																																																																																																		
2	216.24	30.62	-15.38	46.00	45.78	14.88	2.09	32.13	--- Peak	HORIZONTAL																																																																																																																																																		
3	408.30	30.85	-15.15	46.00	38.50	22.50	3.20	32.28	--- Peak	HORIZONTAL																																																																																																																																																		
4	531.49	34.09	-11.91	46.00	39.36	23.90	2.17	32.34	--- Peak	HORIZONTAL																																																																																																																																																		
5	164.29	28.18	-17.82	46.00	28.22	16.12	6.18	32.30	--- Peak	HORIZONTAL																																																																																																																																																		
6	900.09	30.80	-15.20	46.00	29.62	28.90	4.48	32.20	--- Peak	HORIZONTAL																																																																																																																																																		
Peak	Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																		
1	167.74	23.20	-30.30	43.50	37.92	15.50	1.88	32.10	--- Peak	VERTICAL																																																																																																																																																		
2	216.24	21.70	-24.24	46.00	31.71	20.00	2.22	32.17	--- Peak	VERTICAL																																																																																																																																																		
3	408.30	24.49	-21.31	46.00	31.89	21.04	3.02	32.28	--- Peak	VERTICAL																																																																																																																																																		
4	497.54	34.41	-11.39	46.00	40.51	23.75	3.14	32.39	--- Peak	VERTICAL																																																																																																																																																		
5	440.13	23.18	-18.84	46.00	32.37	26.29	2.71	32.22	--- Peak	VERTICAL																																																																																																																																																		
6	719.67	28.71	-17.29	46.00	29.95	27.00	4.00	32.24	--- Peak	VERTICAL																																																																																																																																																		




## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	84.03	2.1	0.476	0.51KHz
Bluetooth LE 2Mbps	56.58	1.062	0.942	1KHz

### Bluetooth LE 1Mbps

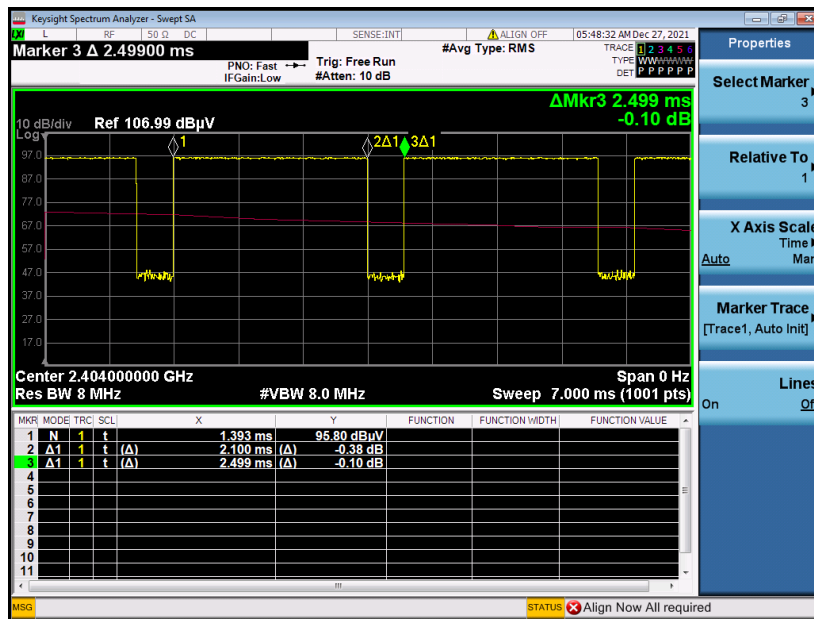

### Bluetooth LE 2Mbps

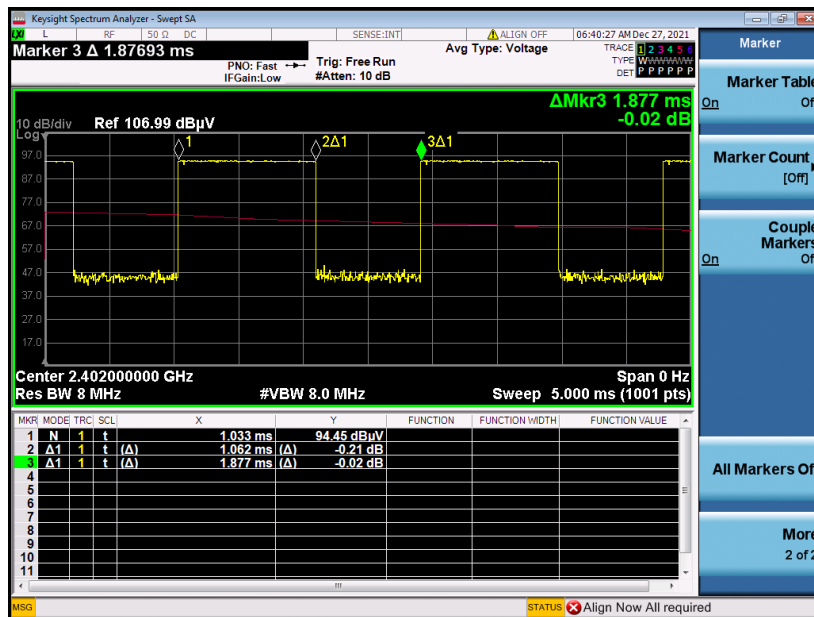


## Appendix F. Setup Photographs

### <AC Conducted Emission>

Mode 1

Remote View

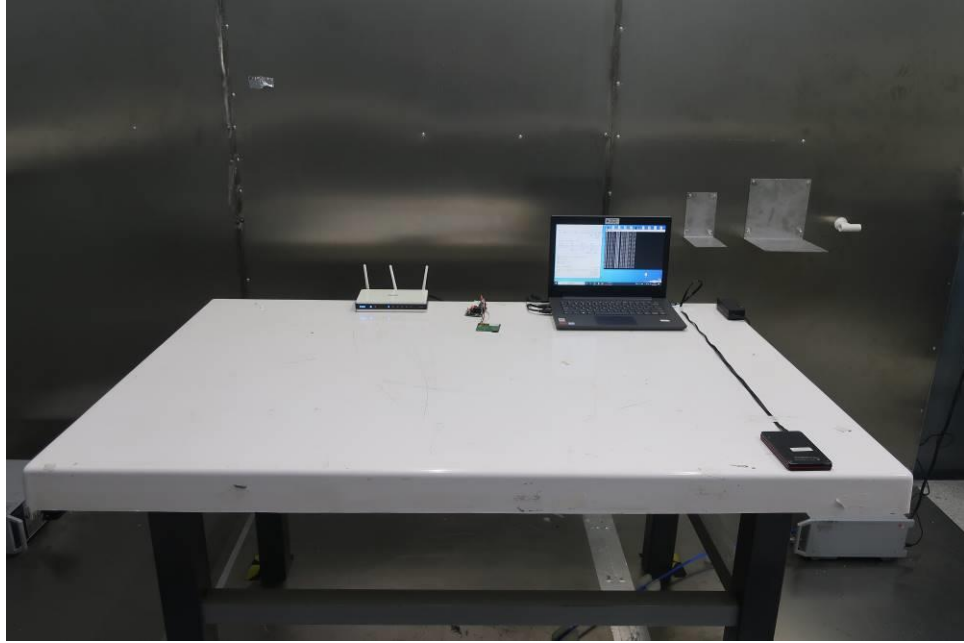

Rear View





<Radiated Emission>

X plane

LF



HF

