



Appendix B

RF Test Data for BT LE (Conducted Measurement)

Product Name: Mini PC

Test Model: ArieBox10

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng





B.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant0	0.659	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant0	0.653	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant0	0.657	≥ 0.5	Pass







Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant0

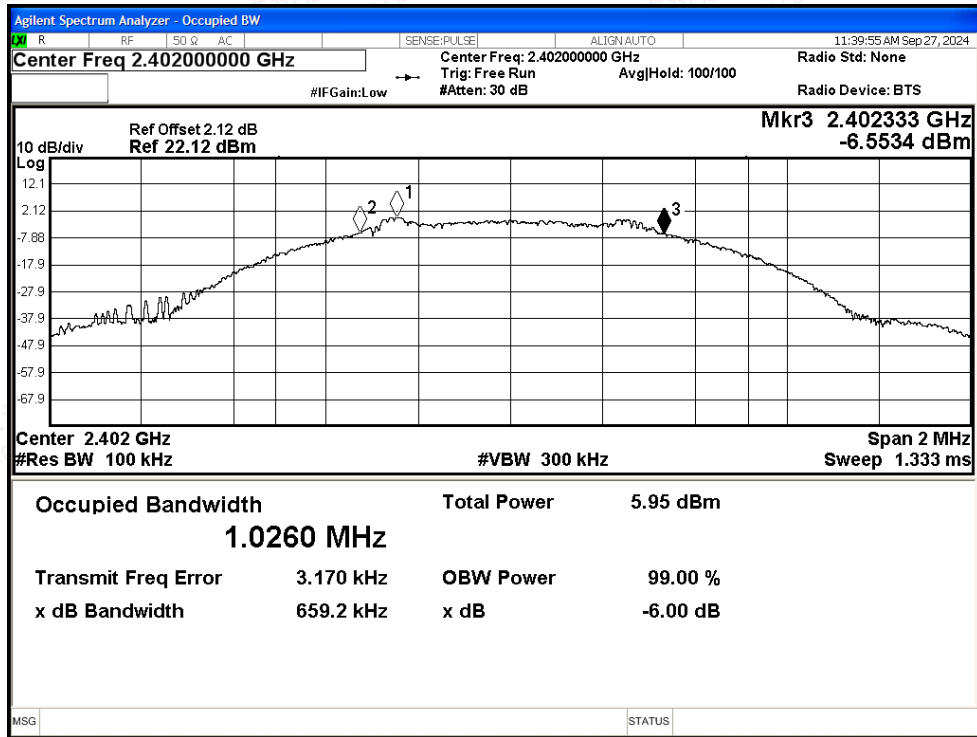

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant0

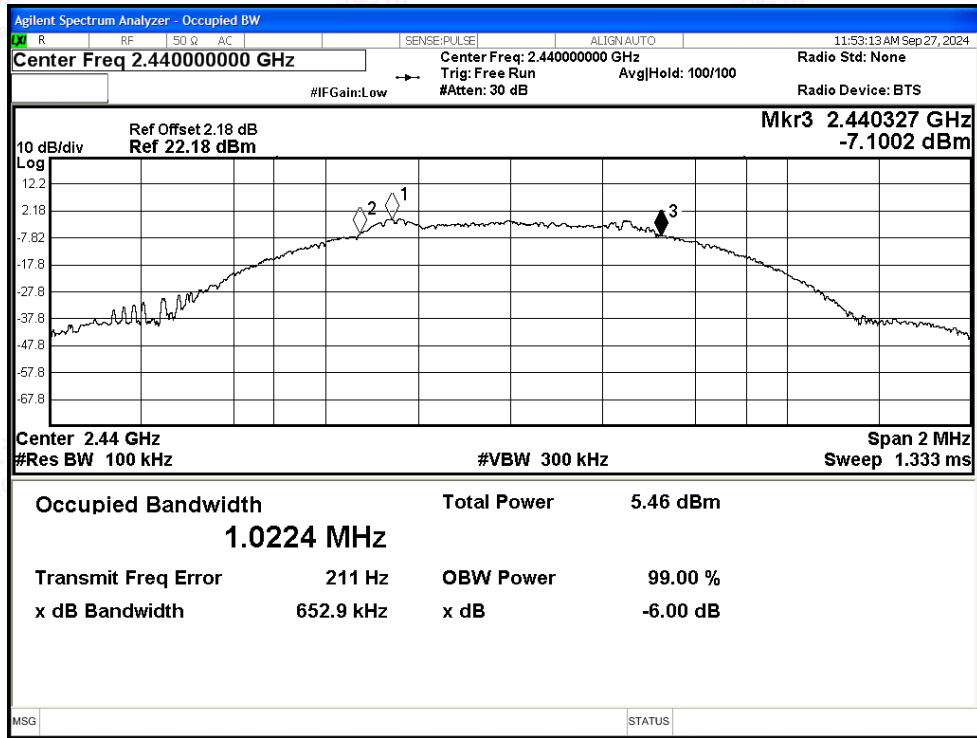

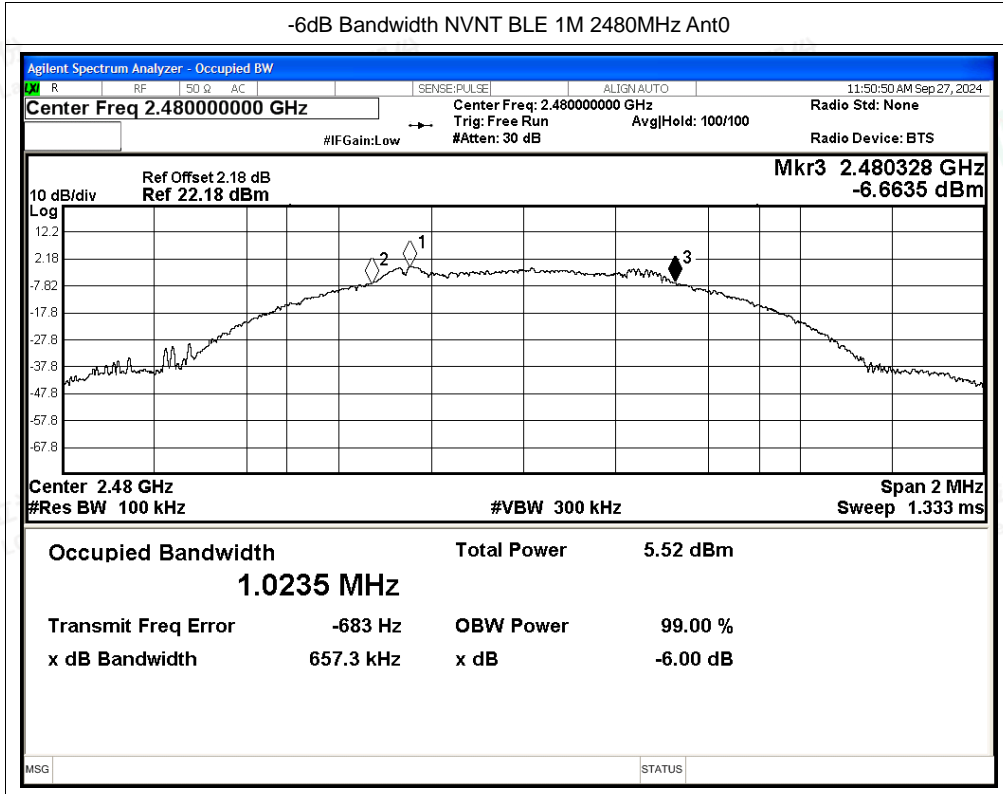



B.2 Maximum peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant0	0.16	30	Pass
NVNT	BLE 1M	2440	Ant0	-0.4	30	Pass
NVNT	BLE 1M	2480	Ant0	-0.35	30	Pass







Test Graphs

Power NVNT BLE 1M 2402MHz Ant0

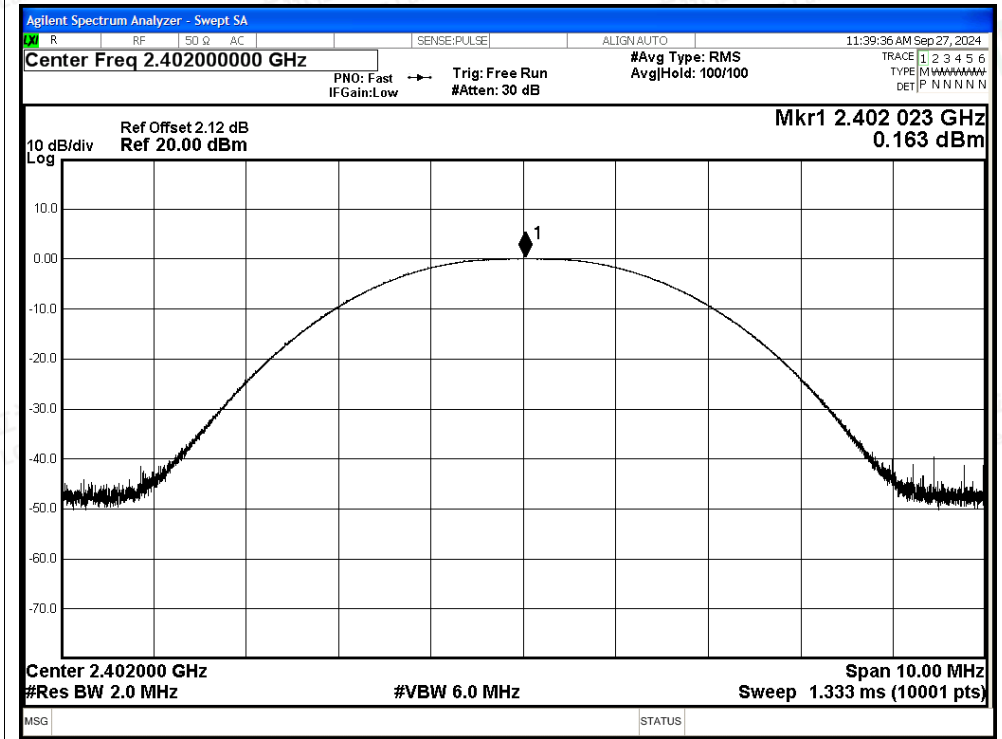

Power NVNT BLE 1M 2440MHz Ant0

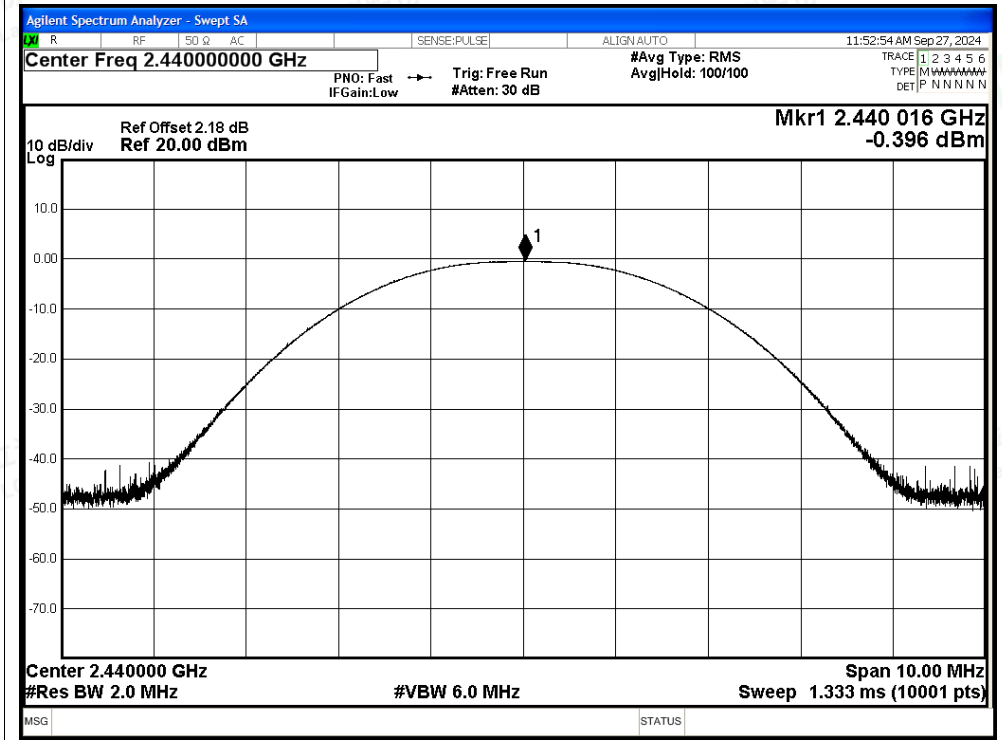


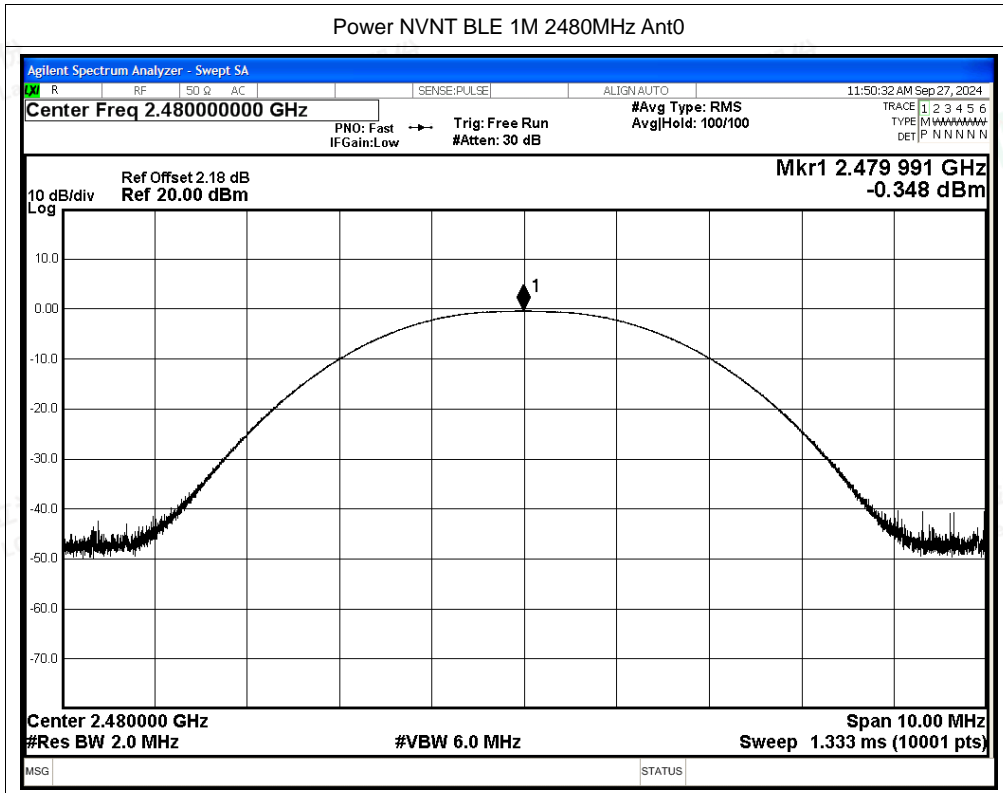





B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant0	-16.91	8	Pass
NVNT	BLE 1M	2440	Ant0	-17.09	8	Pass
NVNT	BLE 1M	2480	Ant0	-16.99	8	Pass



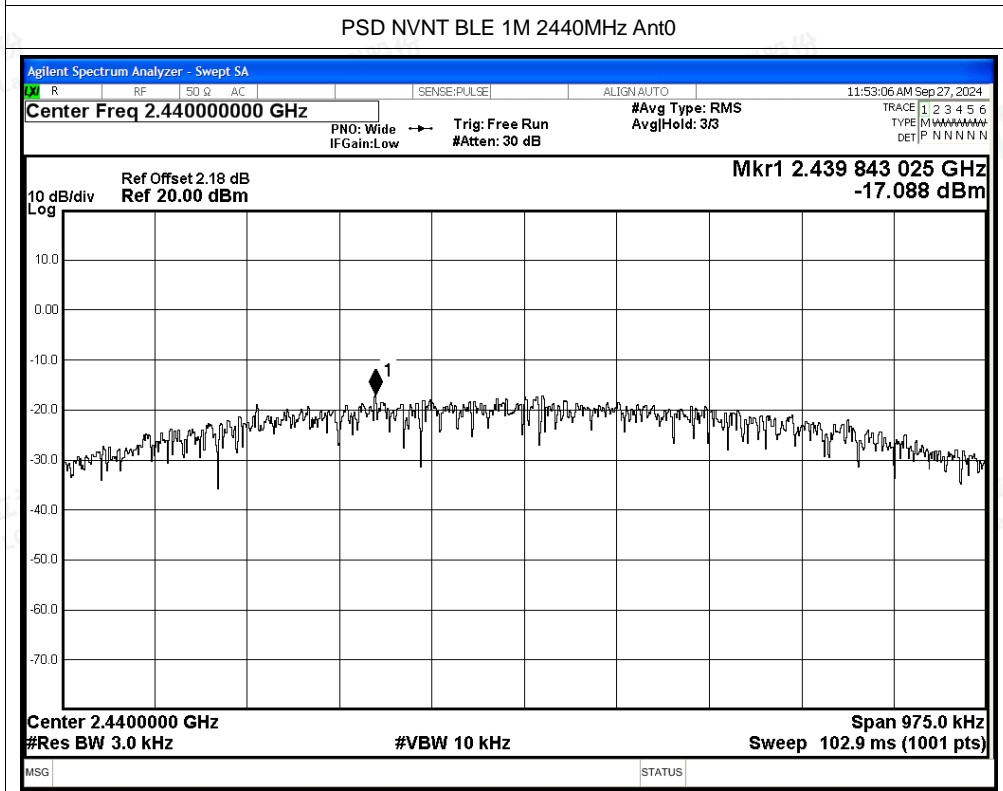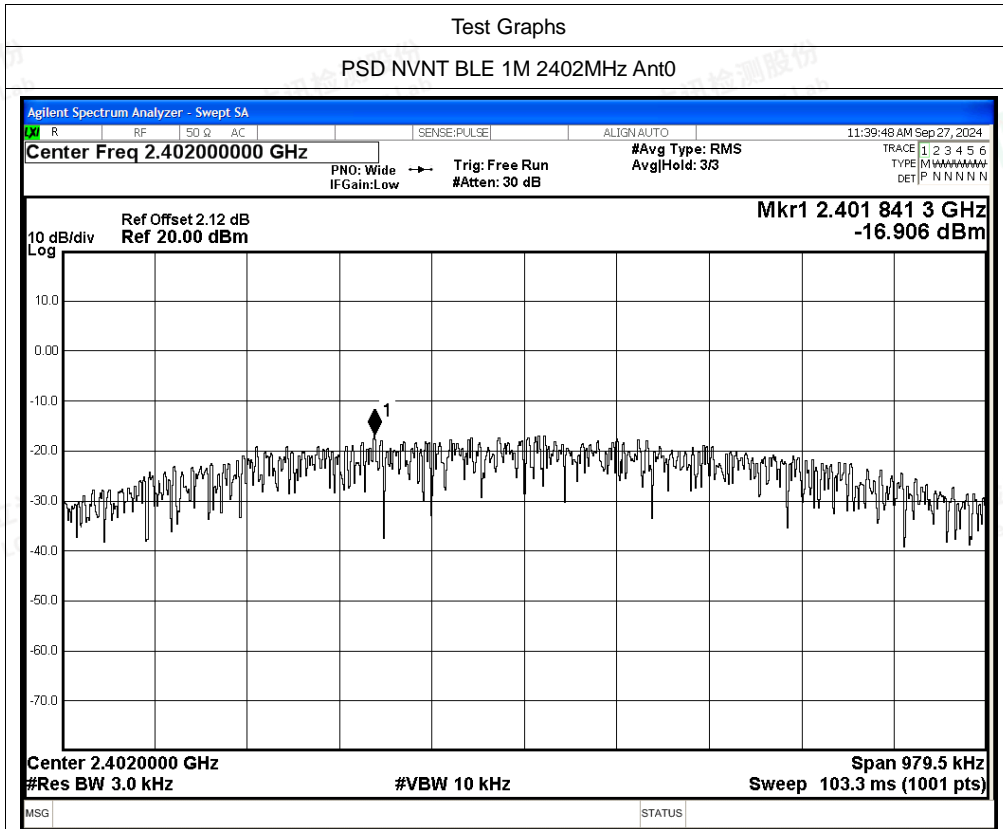

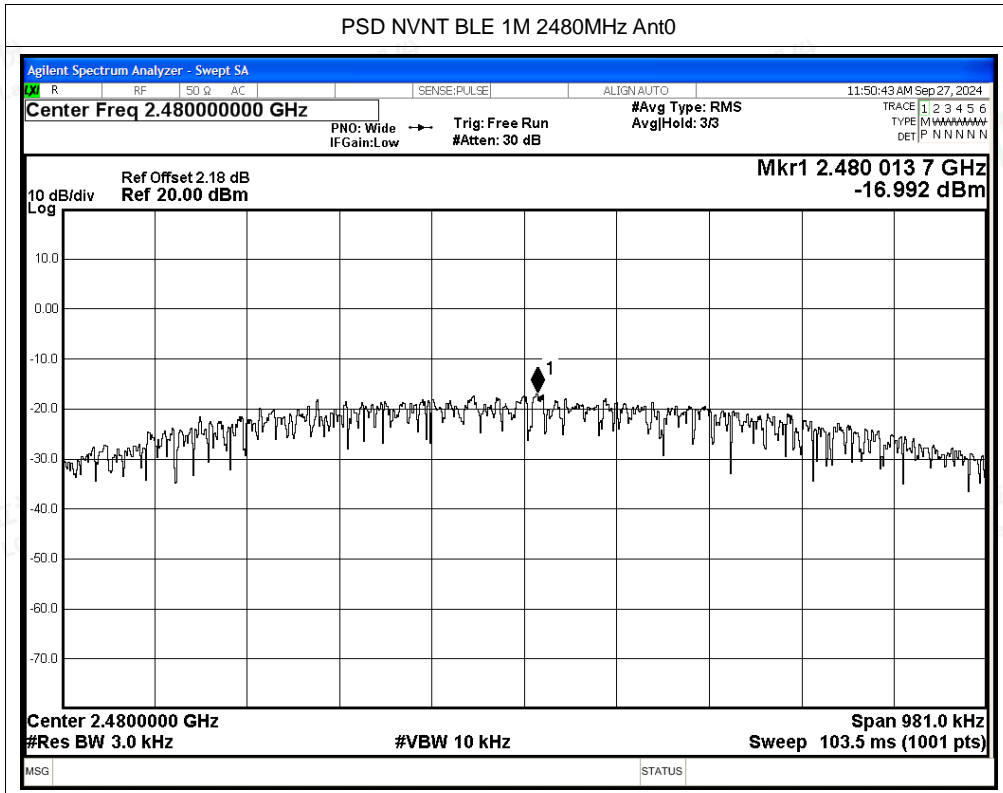



B.4 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant0	-56.22	-20	Pass
NVNT	BLE 1M	2480	Ant0	-55.76	-20	Pass






Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant0 Ref

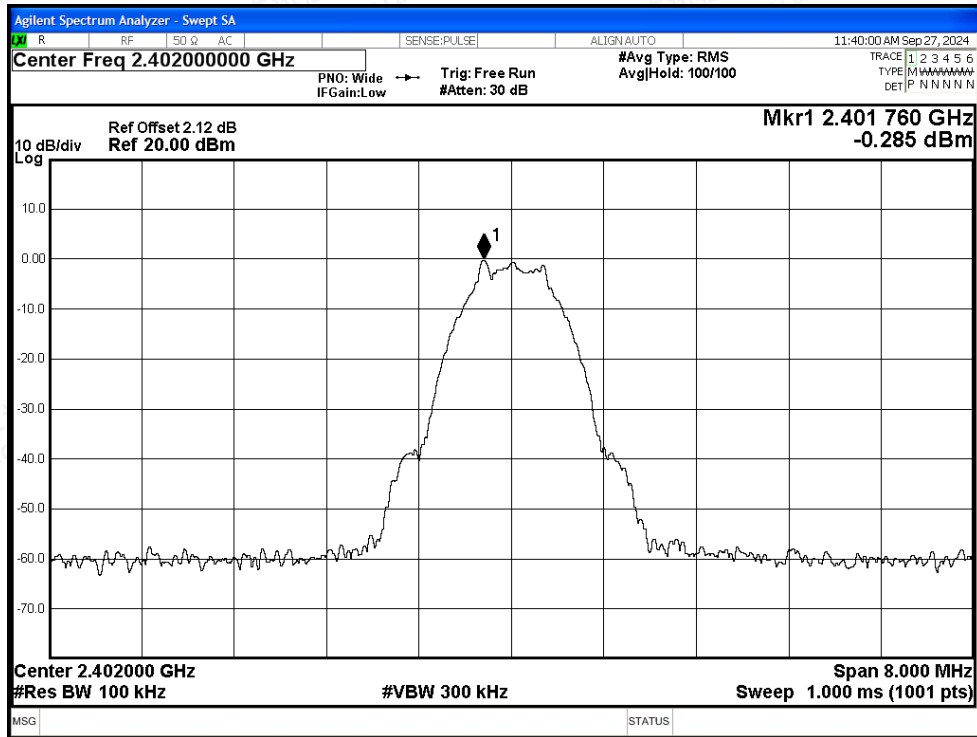


Band Edge NVNT BLE 1M 2402MHz Ant0 Emission

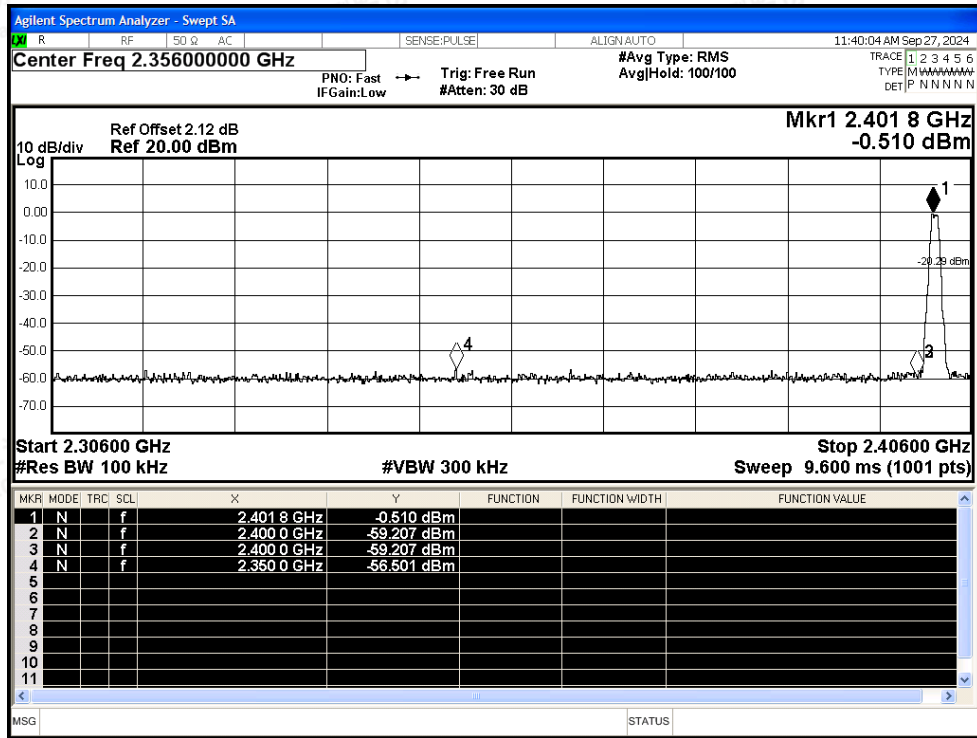




Band Edge NVNT BLE 1M 2480MHz Ant0 Ref

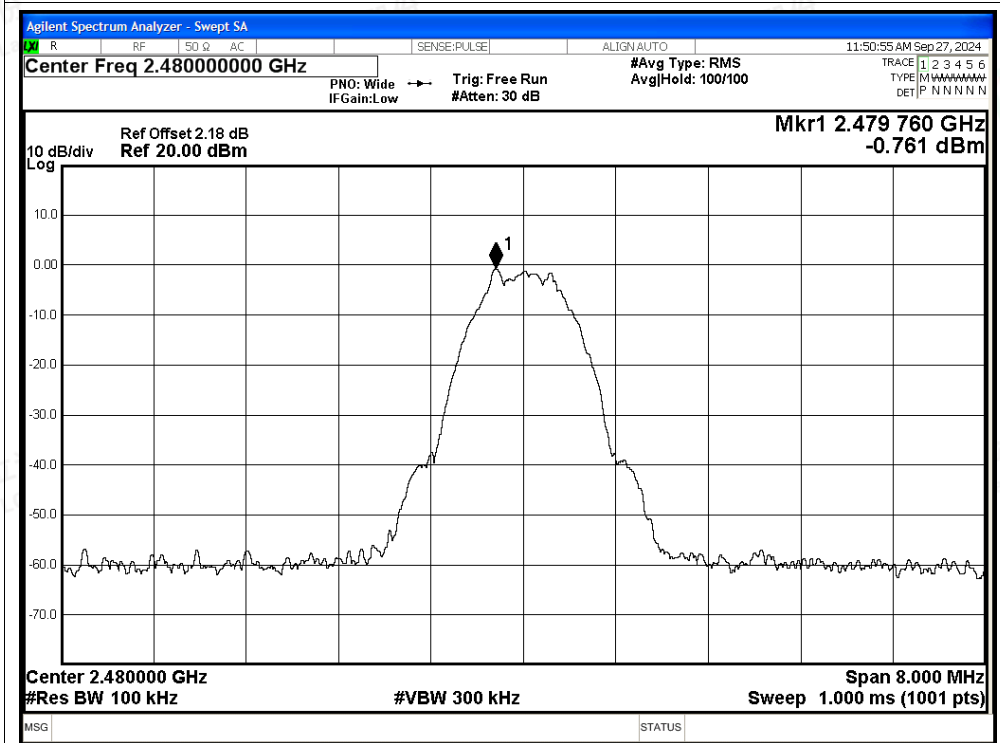

Band Edge NVNT BLE 1M 2480MHz Ant0 Emission

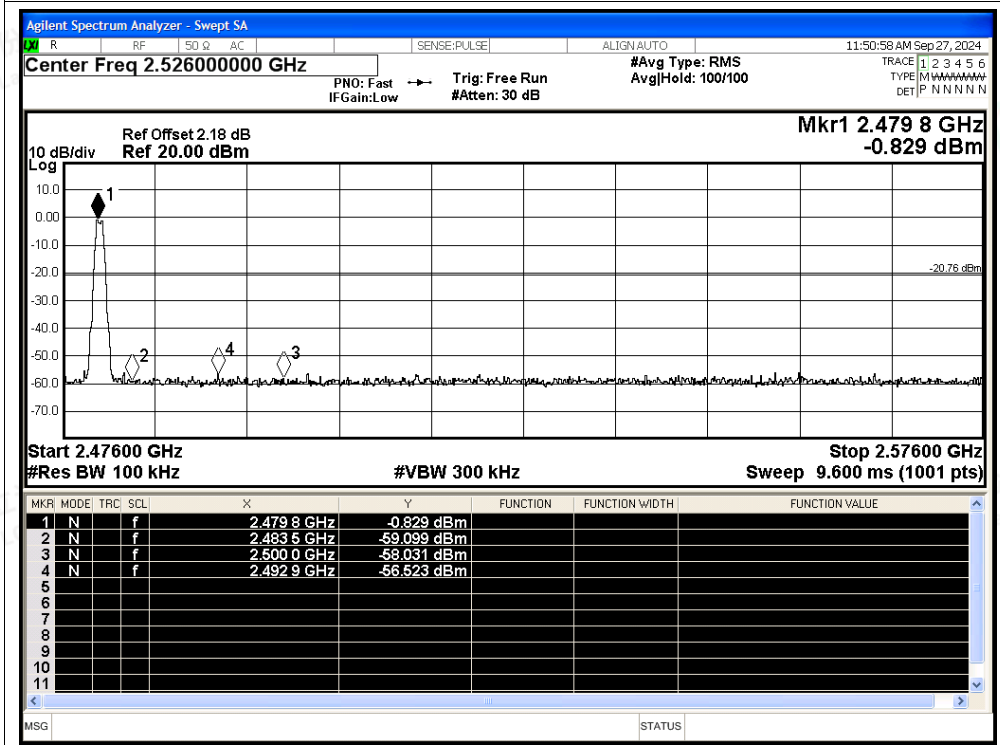



B.5 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant0	-55.41	-20	Pass
NVNT	BLE 1M	2440	Ant0	-54.34	-20	Pass
NVNT	BLE 1M	2480	Ant0	-55.13	-20	Pass






Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant0 Ref

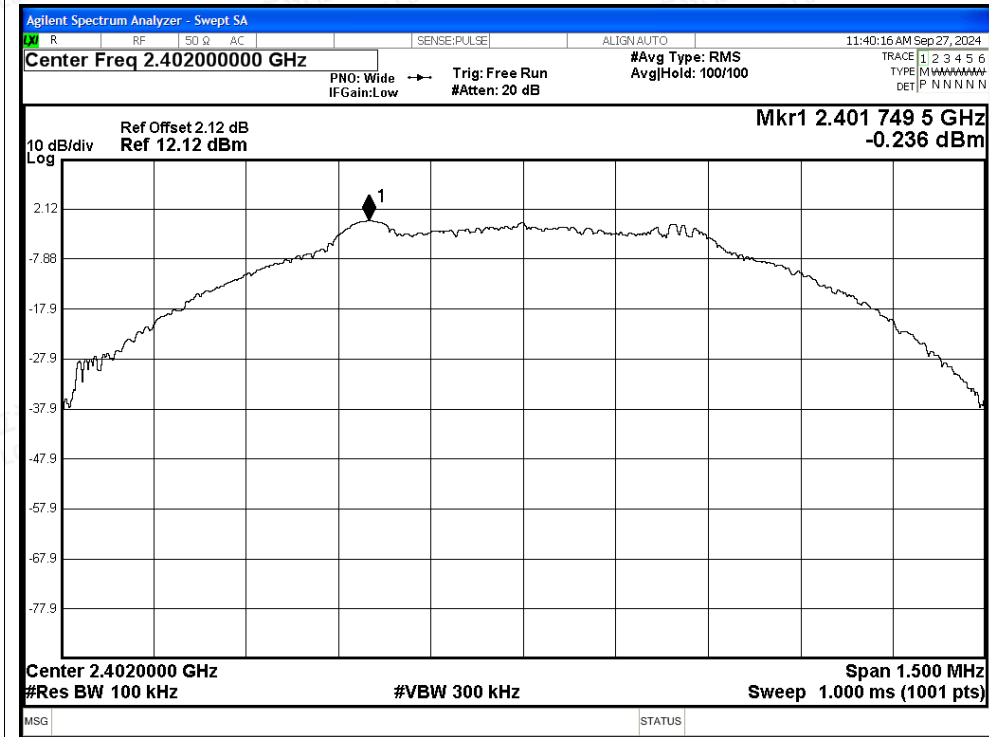


Tx. Spurious NVNT BLE 1M 2402MHz Ant0 Emission

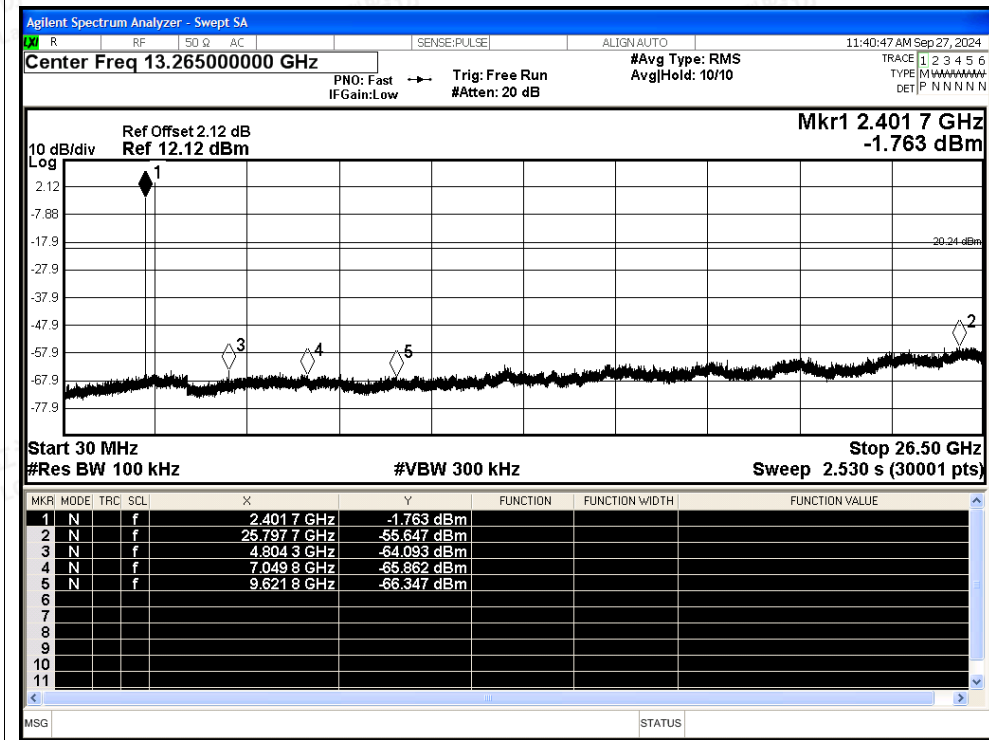




Tx. Spurious NVNT BLE 1M 2440MHz Ant0 Ref

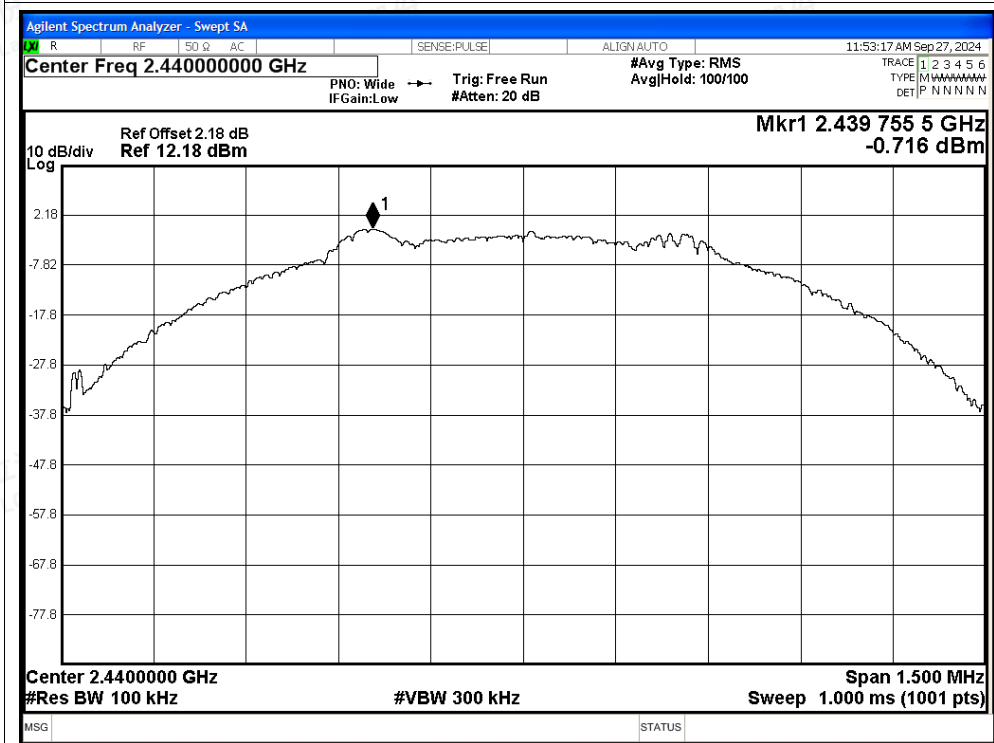


Tx. Spurious NVNT BLE 1M 2440MHz Ant0 Emission

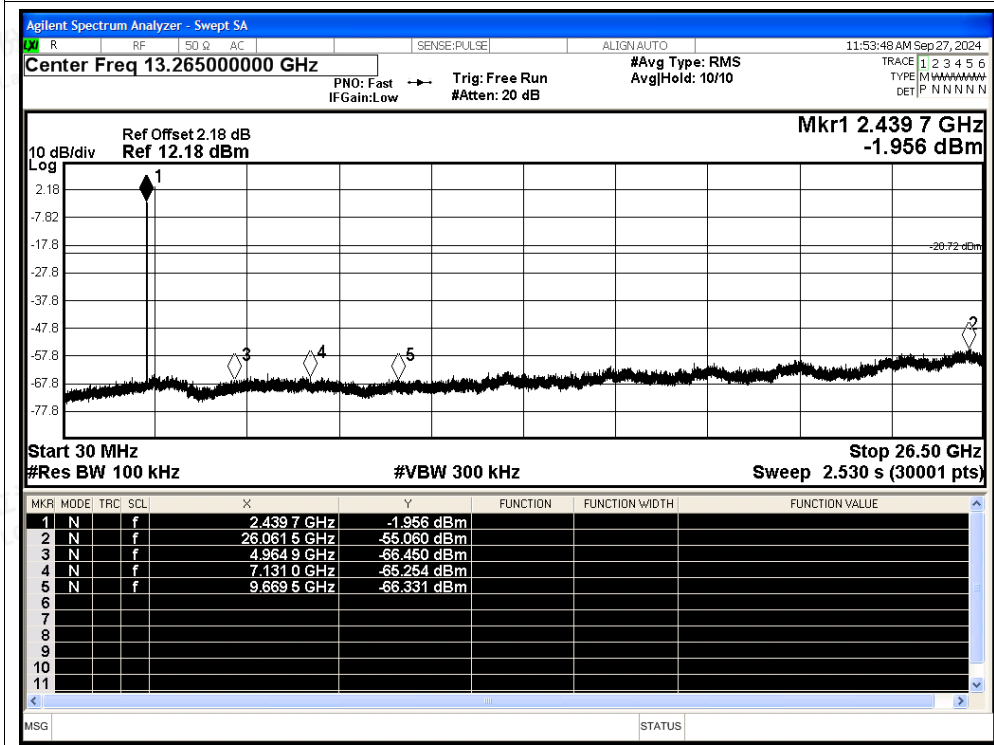




Tx. Spurious NVNT BLE 1M 2480MHz Ant0 Ref

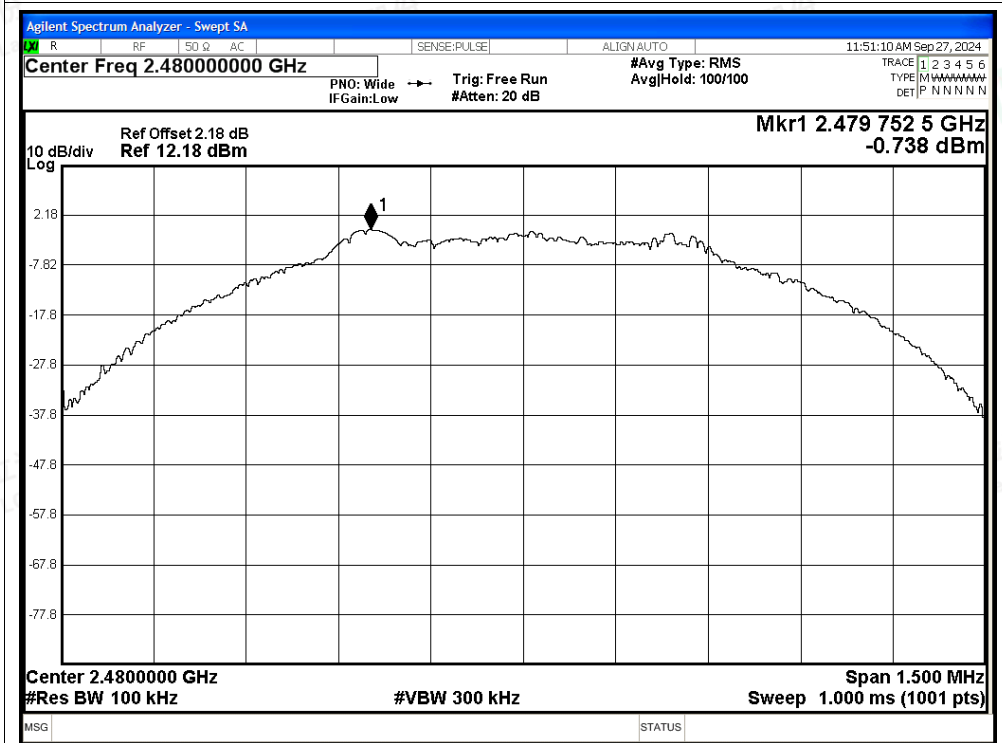

Tx. Spurious NVNT BLE 1M 2480MHz Ant0 Emission

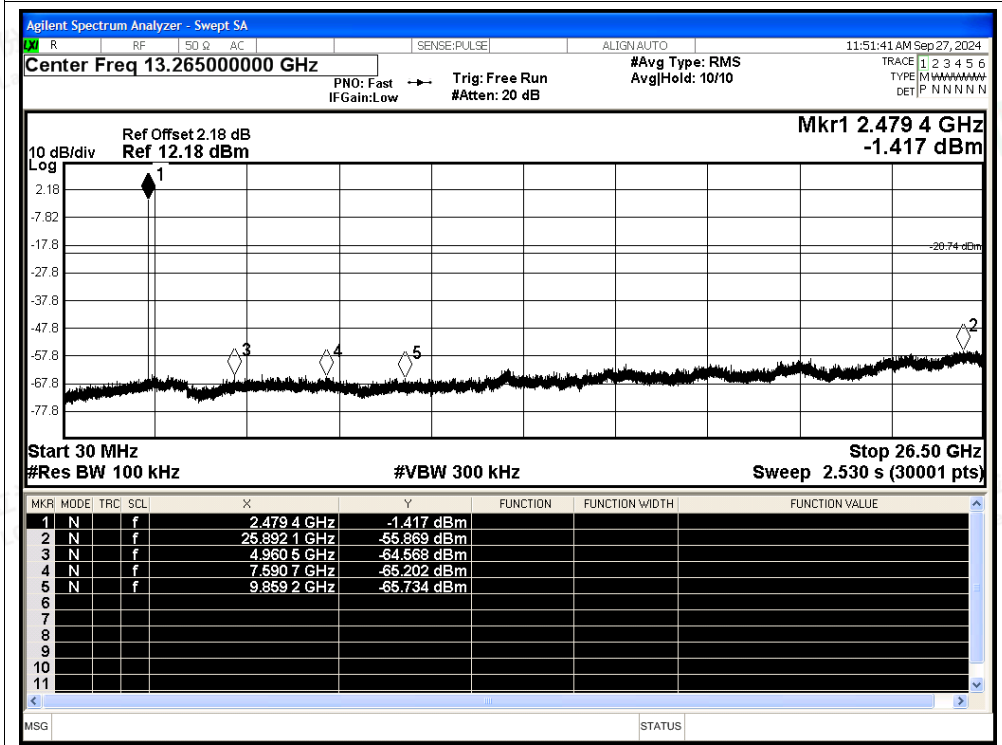



B.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant0	87.39	0.59	0.61
NVNT	BLE 1M	2440	Ant0	87.39	0.59	0.61
NVNT	BLE 1M	2480	Ant0	87.39	0.59	0.61







Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant0

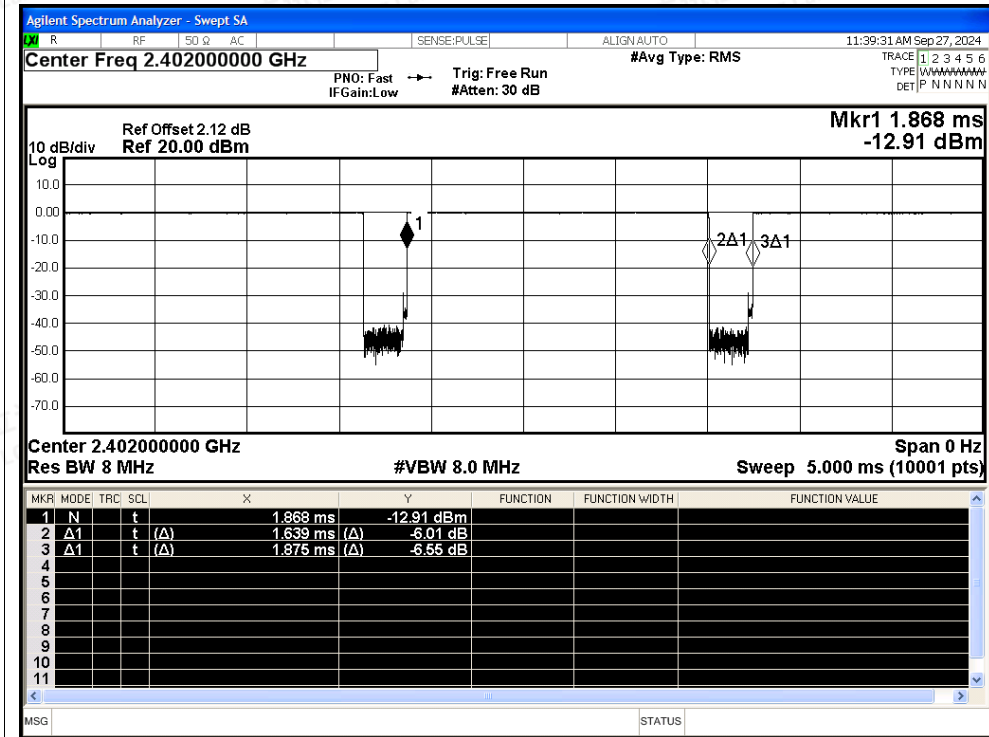

Duty Cycle NVNT BLE 1M 2440MHz Ant0

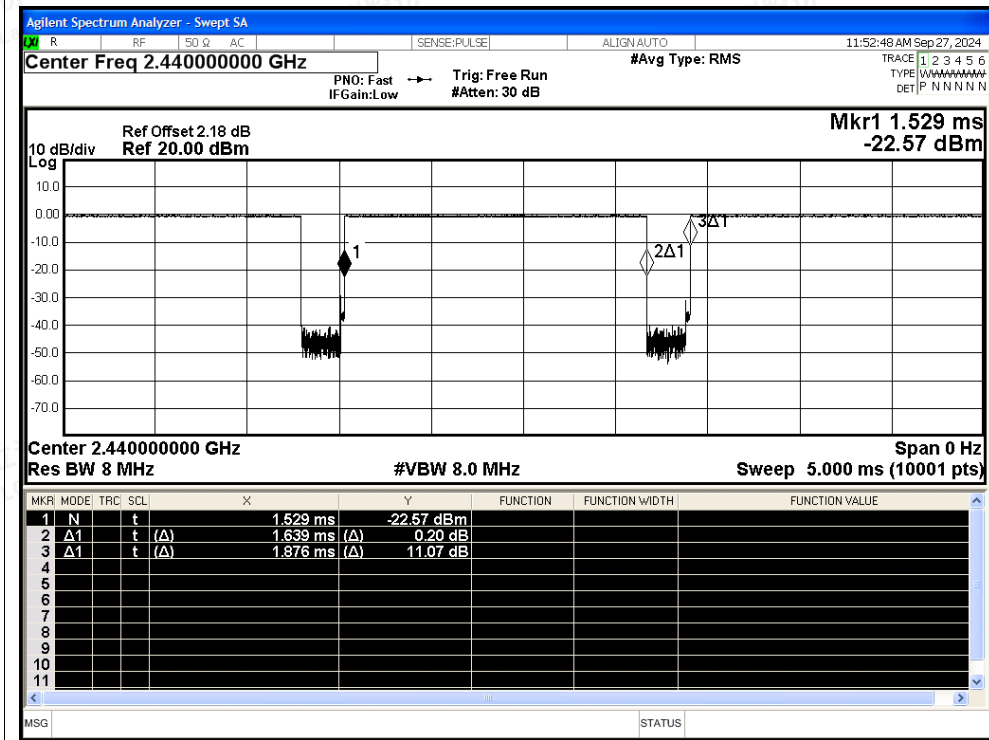

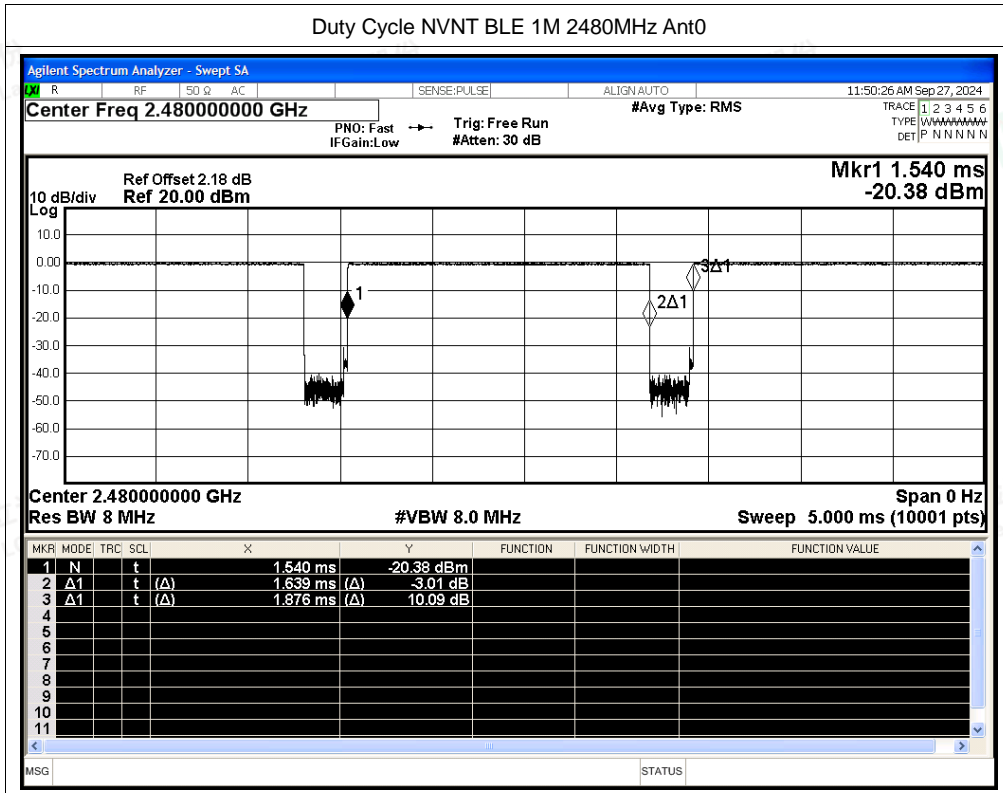



B.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant0	2310	-51.91	2	-	45.35	Peak	74	Pass
NVNT	BLE 1M	2402	Ant0	2310	-58.2	2	0.59	39.65	Average	54	Pass
NVNT	BLE 1M	2402	Ant0	2379.312	-47.56	2	-	49.70	Peak	74	Pass
NVNT	BLE 1M	2402	Ant0	2376.528	-57.66	2	0.59	40.19	Average	54	Pass
NVNT	BLE 1M	2402	Ant0	2390	-50.71	2	-	46.55	Peak	74	Pass
NVNT	BLE 1M	2402	Ant0	2390	-58.19	2	0.59	39.66	Average	54	Pass
NVNT	BLE 1M	2480	Ant0	2483.5	-47.86	2	-	49.40	Peak	74	Pass
NVNT	BLE 1M	2480	Ant0	2483.5	-57.58	2	0.59	40.27	Average	54	Pass
NVNT	BLE 1M	2480	Ant0	2486.464	-45.8	2	-	51.46	Peak	74	Pass
NVNT	BLE 1M	2480	Ant0	2483.608	-57.1	2	0.59	40.75	Average	54	Pass
NVNT	BLE 1M	2480	Ant0	2500	-49.18	2	-	48.08	Peak	74	Pass
NVNT	BLE 1M	2480	Ant0	2500	-58.36	2	0.59	39.49	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant0 Peak

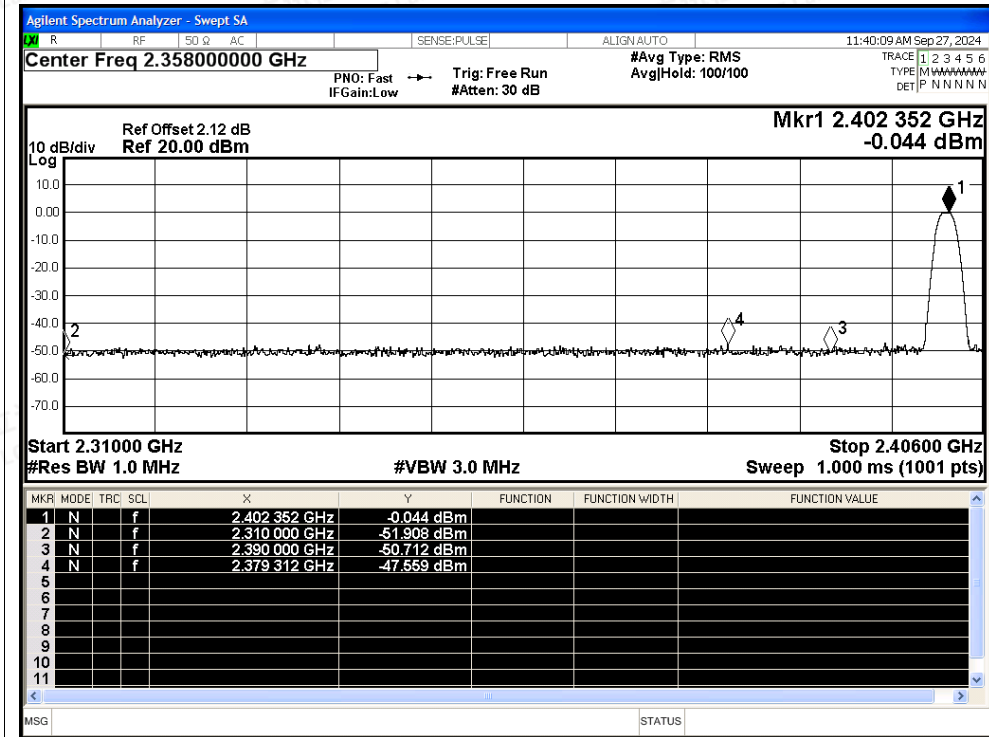


Restrict Band NVNT BLE 1M 2402MHz Ant0 Average

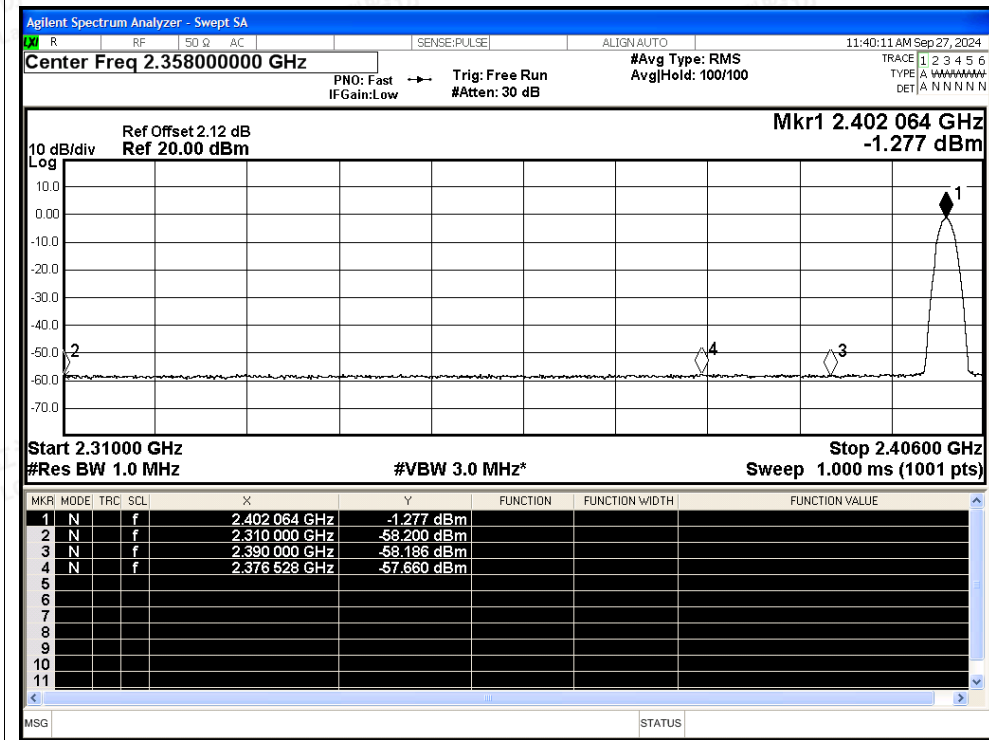



Restrict Band NVNT BLE 1M 2480MHz Ant0 Peak

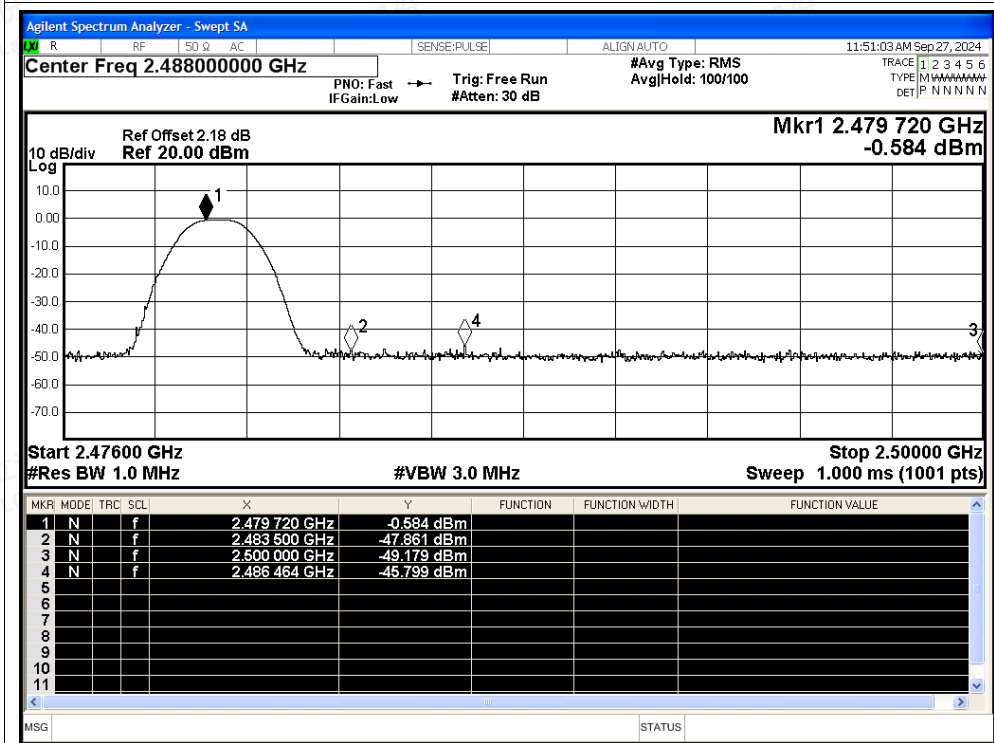

Restrict Band NVNT BLE 1M 2480MHz Ant0 Average

