



Appendix B

Detailed Test Results

| |
|----------------------|
| 1. WIFI |
| WIFI 2.4GHz for Body |
| WIFI 5.2GHz for Body |
| WIFI 5.8GHz for Body |



Date: 2024/6/18

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 6CH Rear side 0mm ANT0**DUT: detachable Tablet; Type: PM1005P; Serial: A240611111-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 38.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.638 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.453 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.642 W/kg

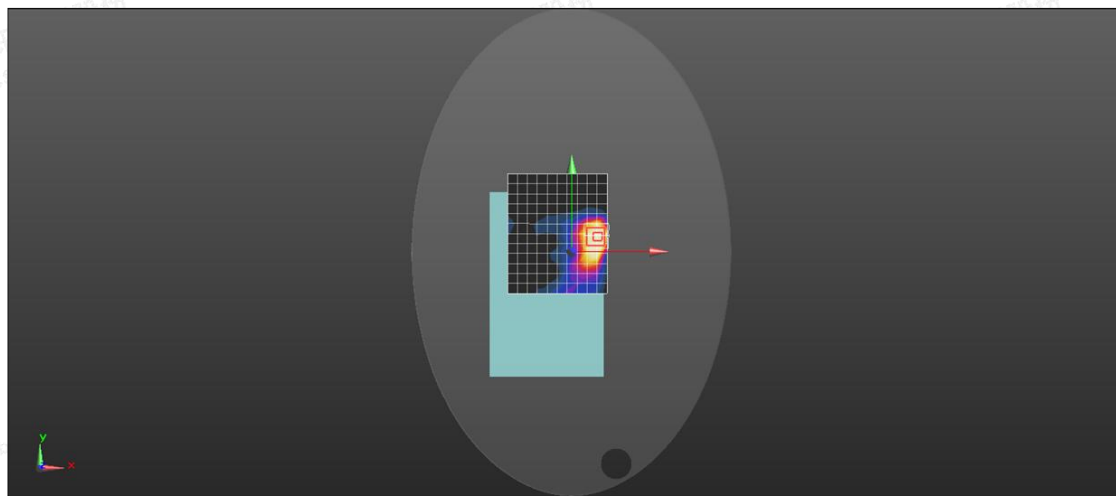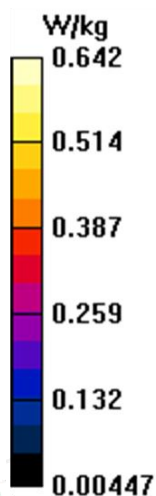

Date: 2024/6/18

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 11CH Rear side 0mm ANT 1

DUT: detachable Tablet; Type: PM1005P; Serial: A240611111-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.776$ S/m; $\epsilon_r = 39.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.569 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.667 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.571 W/kg

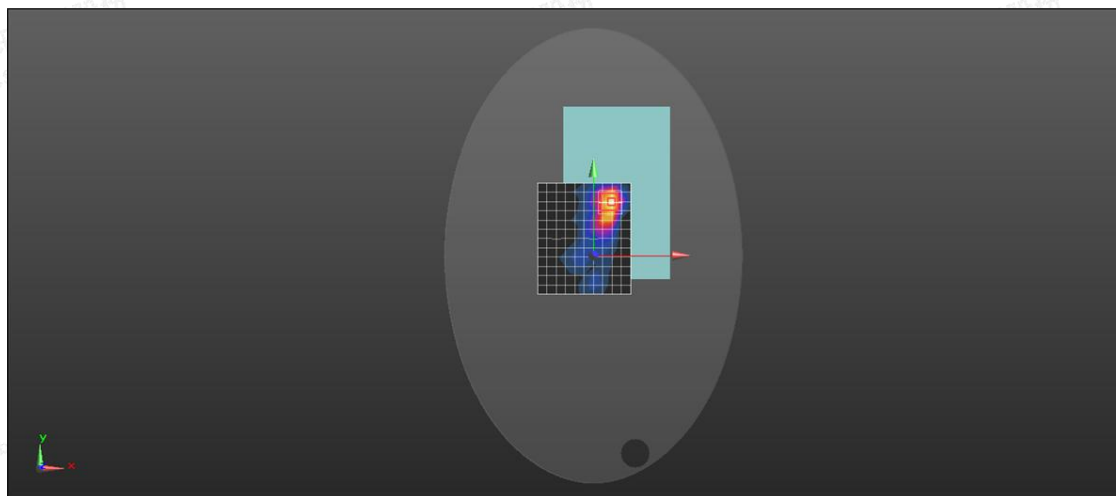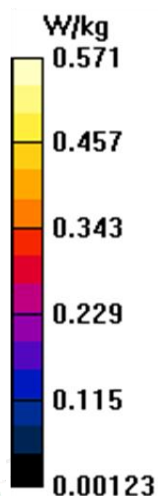

Date: 2024/6/19

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Body Rear 0mm ANT 0**DUT: detachable Tablet; Type: PM1005P; Serial: A240611111-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.621 \text{ S/m}$; $\epsilon_r = 35.59$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.478 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

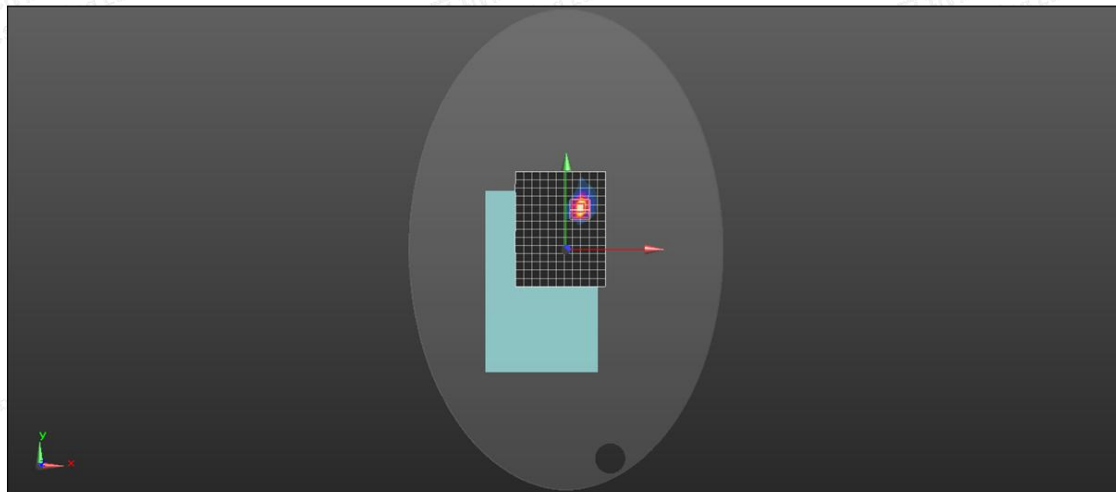

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/6/19

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 40CH Body Rear 0mm ANT 1**DUT: detachable Tablet; Type: PM1005P; Serial: A240611111-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.644 \text{ S/m}$; $\epsilon_r = 35.984$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.423 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

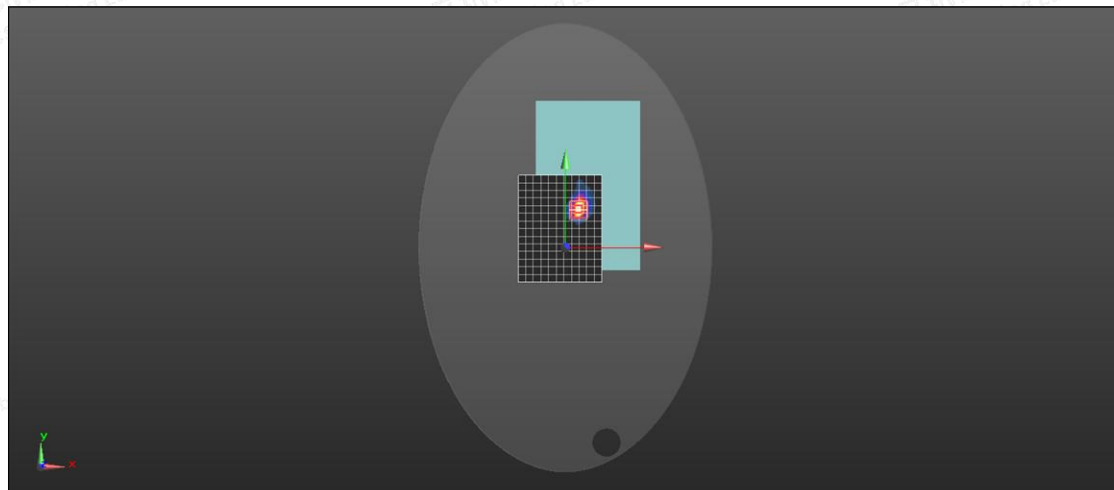

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/6/20

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Body Rear 0mm ANT 0**DUT: detachable Tablet; Type: PM1005P; Serial: A240611111-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.646$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.480 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.4190 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.483 W/kg

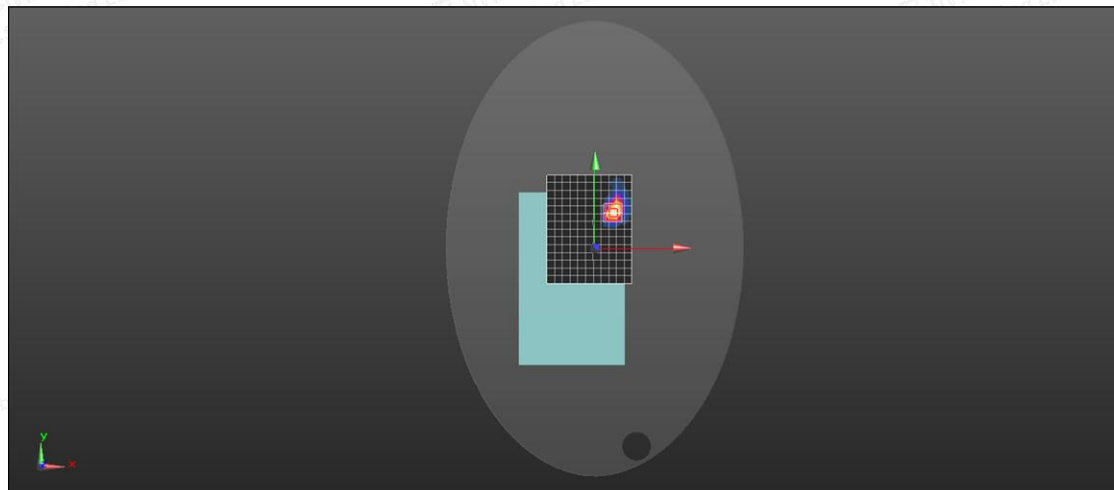

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/6/20

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Body Rear 0mm ANT 1**DUT: detachable Tablet; Type: PM1005P; Serial: A240611111-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.646$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.388 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.392 W/kg

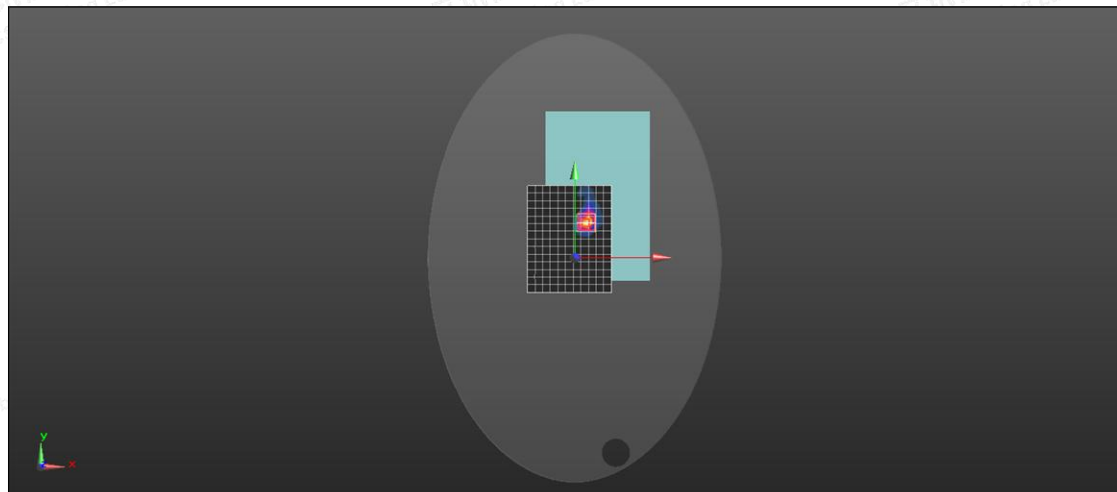

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity