

TEST REPORT

FCC ID: 2BCAX-HY320N

IC:31576-HY320NTV

Product : LCD Projector
HY320N, HY320Mini, GM300, HY320, HY320Pro, HY300,
Model Name : HY300Pro, HY450, HY450Pro, HY260, HY260Pro, HY200,
HY200Pro, GM600, HY320 NTV, HY350, HY350N,
HY350 NTV, HY450N, HY450 NTV, GM500 NTV,
GM800 NTV
Brand : N/A
Report No. : NCT24042473XE1-3

Prepared for

GuangDong SINOY Smart Technology CO., LTD

5TH Floor, Building #2, RunFengZhiGu IndustrialPark Changpin Town,
DongGuan City, Guangdong, China

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant : GuangDong SINOY Smart Technology CO., LTD

Address : 5TH Floor, Building #2, RunFengZhiGu IndustrialPark Changpin
Town, DongGuan City, Guangdong, China

Manufacturer : GuangDong SINOY Smart Technology CO., LTD

Address : 5TH Floor, Building #2, RunFengZhiGu IndustrialPark Changpin
Town, DongGuan City, Guangdong, China

Product name : LCD Projector

Model name : HY320N, HY320Mini, GM300, HY320, HY320Pro, HY300, HY300Pro, HY450,
HY450Pro, HY260, HY260Pro, HY200, HY200Pro, GM600, HY320 NTV, HY350,
HY350N, HY350 NTV, HY450N, HY450 NTV, GM500 NTV, GM800 NTV

Standards : FCC CFR47 Part 15 Section 15.247
RSS-247 Issue 3, August 2023
RSS-Gen Issue 5, Amendment 2, February, 2021

Test procedure : ANSI C63.10:2020

Date of test : Oct. 14, 2024 to Nov. 19, 2024

Date of Issue : Nov. 20, 2024

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	8
3.4 TEST SETUP CONFIGURATION	9
3.5 TEST MODE	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION	14
5.7 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	17
6.2 TEST SETUP	18
6.3 SPECTRUM ANALYZER SETUP	19
6.4 TEST PROCEDURE	20
6.5 SUMMARY OF TEST RESULTS	21
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	32
7.1 TEST SETUP	33

7.2 TEST PROCEDURE	33
7.3 TEST RESULT	33
8 6DB&99% BANDWIDTH MEASUREMENT	34
8.1 TEST SETUP	34
8.2 TEST PROCEDURE	34
8.3 TEST RESULT	34
9 MAXIMUM PEAK OUTPUT POWER	35
9.1 TEST SETUP	35
9.2 TEST PROCEDURE	35
9.3 TEST RESULT	36
10 POWER SPECTRAL DENSITY	37
10.1 TEST SETUP	37
10.2 TEST PROCEDURE	37
10.3 TEST RESULT	37
11 ANTENNA APPLICATION	38
11.1 ANTENNA REQUIREMENT	38
11.2 RESULT	38
12 TEST SETUP AND EUT PHOTOS	39

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC part 15.207 RSS-Gen 8.8	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209 RSS-Gen §6.13	PASS
Conducted Spurious Emission	FCC part 15.205/15.209 RSS-Gen 8.9	PASS
Band edge	FCC part 15.247(d) RSS-247 5.5	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2) RSS-247 5.2(a) RSS-Gen section 6.7	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3) RSS-247 5.4(d)	PASS
Power Spectral Density	FCC part 15.247 (e) RSS-247 5.2(b)	PASS
Antenna Requirement	FCC part 15.203/15.247 (c) RSS-Gen 6.8	PASS

Remark:

"N/A" denotes test is not applicable in this Test Report.

3 General Information

3.1 General Description of E.U.T.

Product Name	:	LCD Projector
Model Name	:	HY320N(applicable to FCC only)
Model Name	:	HY320 NTV(applicable to ISED only)
HVIN	:	HY320 NTV
Sample ID	:	24042473X-001#
Sample(s) Status:	:	Engineer sample
Series Model	:	HY320Mini, GM300, HY320, HY320Pro, HY300, HY300Pro, HY450, HY450Pro, HY260, HY260Pro, HY200, HY200Pro, GM600, HY320 NTV, HY350, HY350N, HY350 NTV, HY450N, HY450 NTV, GM500 NTV, GM800 NTV(applicable to FCC only)
Model Different.:	:	All the same except the model number.
Specification	:	802.11b/g/n/ax HT20;n/ax HT40 (802.11ax Only support full RU Mode)
Operation Frequency	:	2412-2462MHz for 802.11b/g/n20/ax20; 2422-2452MHz for 802.11n40/ax40;
Number of Channel	:	11 channels for 802.11b/g/n20/ax20; 7 channels for 802.11n40/ax40;
Type of Modulation	:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20)/ ax(20)/ ax(40)n(40): DSSS (CCK, DQPSK,DBPSK)+OFDM+OFAMA (QPSK, BPSK, 16-QAM, 64-QAM)
Antenna installation	:	Internal Antenna
Antenna Gain	:	3.84dBi
Power supply	:	110-240Vac 50/60Hz 2.5A
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20); 802.11ax (HT20): MCS0; 802.11n (HT40); 802.11ax (HT40): MCS0; were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n/ax (HT20/HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n/ax (HT20/HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	6	2437	9	2452

3.3 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150


Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

3.4 Test Setup Configuration

Conducted Emission



Radiated Emission (30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



3.5 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	Tera Term
Power level setup	10

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/17	2025/6/16
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/17	2025/6/16
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/17	2025/6/16
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2024/6/17	2025/6/16
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNWARZBECK	2024/6/17	2025/6/16
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	CHNWARZBECK	2024/6/17	2025/6/16

MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/17	2025/6/16
Power Sensor	TR1029-2	512364	Techoy	2024/6/17	2025/6/16
RF Swith	TR1029-1	512364	Techoy	2024/6/17	2025/6/16
Cable	DA800-4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800-11000MM	NA	DA	2024/6/17	2025/6/16

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	LCD Projector	N/A	HY320 NTV	N/A	EUT

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207,RSS-Gen 8.8
Test Method : ANSI C63.10:2020
Test Result : PASS
Frequency Range : 150kHz to 30MHz
Class/Severity : Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature : 24.5 °C
Humidity : 51.3 % RH
Atmospheric Pressure : 101.11kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2020.

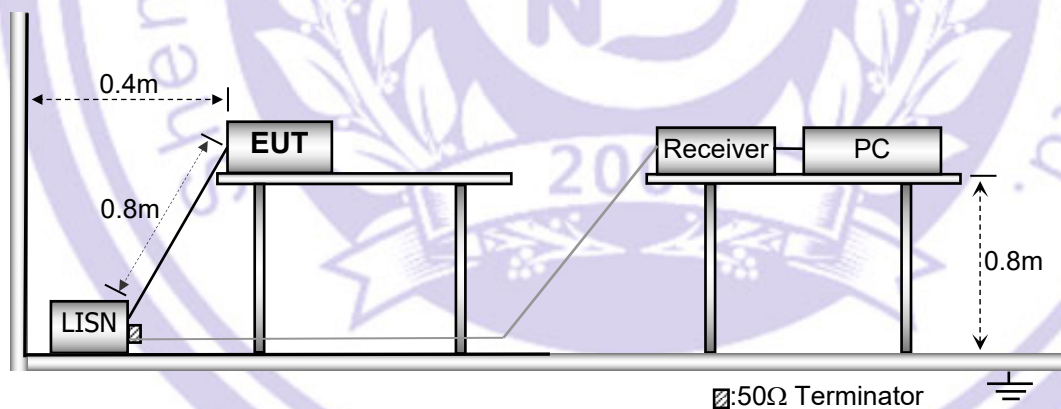

5.3 Test SET-UP (Block Diagram of Configuration)

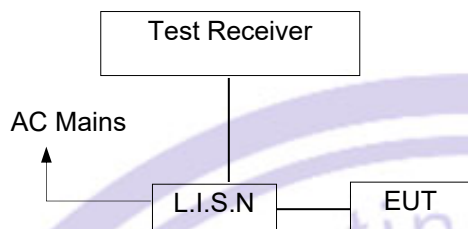

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass.

Please refer to the following pages.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

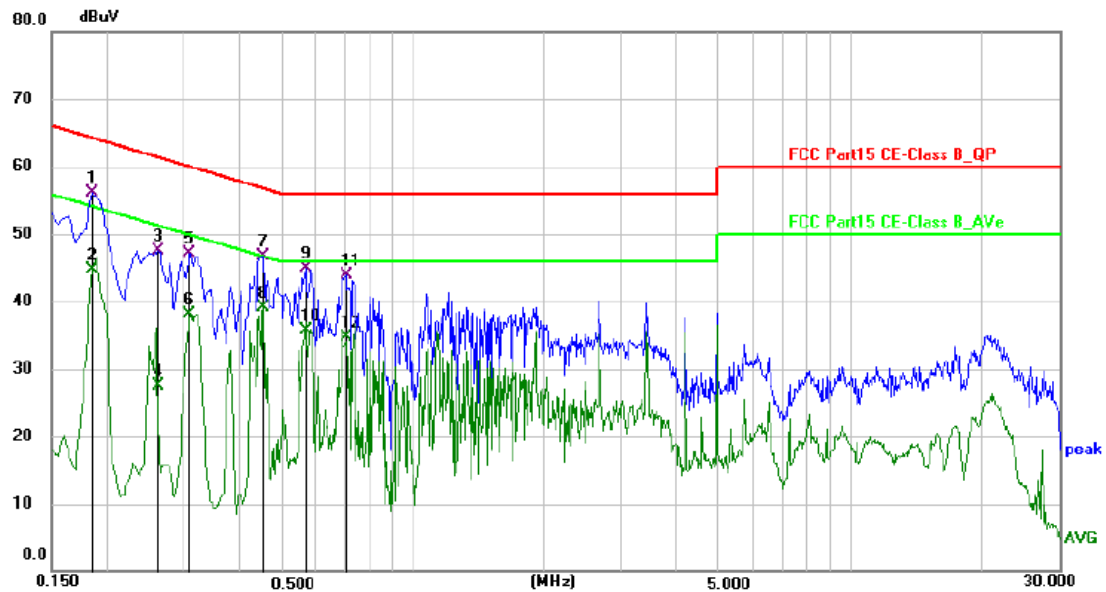


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1850	46.37	9.67	56.04	64.26	-8.22	QP	P
2	0.1850	35.09	9.67	44.76	54.26	-9.50	AVG	P
3	0.2630	37.83	9.67	47.50	61.34	-13.84	QP	P
4	0.2630	17.76	9.67	27.43	51.34	-23.91	AVG	P
5	0.3100	37.38	9.67	47.05	59.97	-12.92	QP	P
6	0.3100	28.48	9.67	38.15	49.97	-11.82	AVG	P
7	0.4550	37.02	9.66	46.68	56.78	-10.10	QP	P
8 *	0.4550	29.46	9.66	39.12	46.78	-7.66	AVG	P
9	0.5700	35.23	9.67	44.90	56.00	-11.10	QP	P
10	0.5700	25.94	9.67	35.61	46.00	-10.39	AVG	P
11	0.7050	34.22	9.66	43.88	56.00	-12.12	QP	P
12	0.7050	25.10	9.66	34.76	46.00	-11.24	AVG	P

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

3.Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

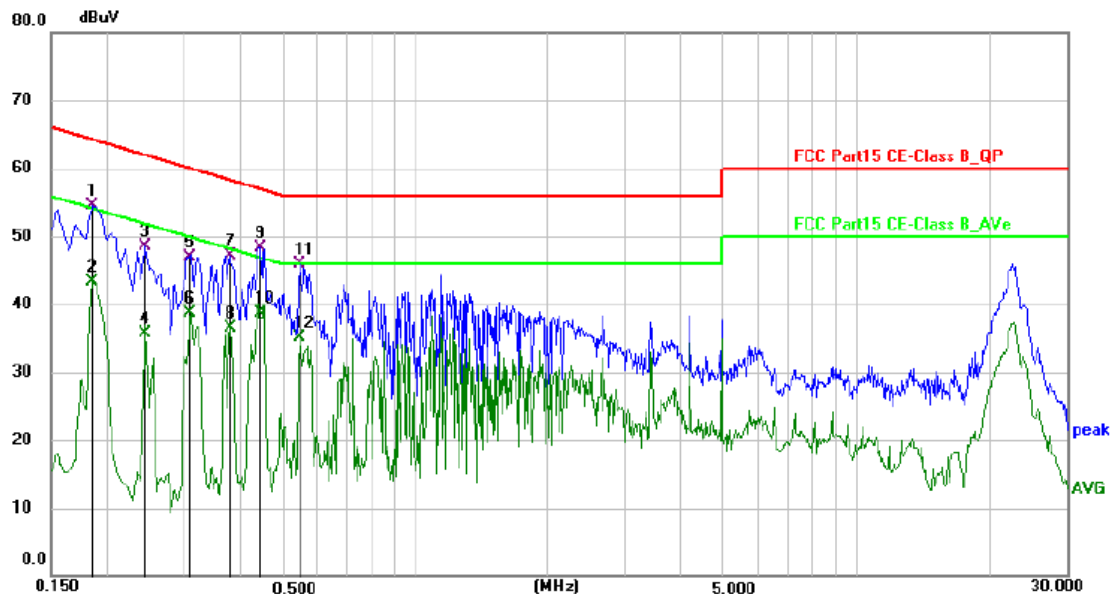

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1862	44.77	9.68	54.45	64.20	-9.75	QP	P
2	0.1862	33.57	9.68	43.25	54.20	-10.95	AVG	P
3	0.2450	38.88	9.66	48.54	61.92	-13.38	QP	P
4	0.2450	26.08	9.66	35.74	51.92	-16.18	AVG	P
5	0.3100	37.18	9.66	46.84	59.97	-13.13	QP	P
6	0.3100	29.05	9.66	38.71	49.97	-11.26	AVG	P
7	0.3800	37.35	9.67	47.02	58.28	-11.26	QP	P
8	0.3800	26.76	9.67	36.43	48.28	-11.85	AVG	P
9	0.4450	38.73	9.67	48.40	56.97	-8.57	QP	P
10 *	0.4450	29.06	9.67	38.73	46.97	-8.24	AVG	P
11	0.5500	36.16	9.67	45.83	56.00	-10.17	QP	P
12	0.5500	25.44	9.67	35.11	46.00	-10.89	AVG	P

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
 3.Measurement Level = Reading level + Correct Factor

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
Test Method : ANSI C63.10:2020
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 24.5°C
Humidity: : 52 % RH
Atmospheric Pressure: : 101.11kPa
Test Voltage : AC 120V/60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

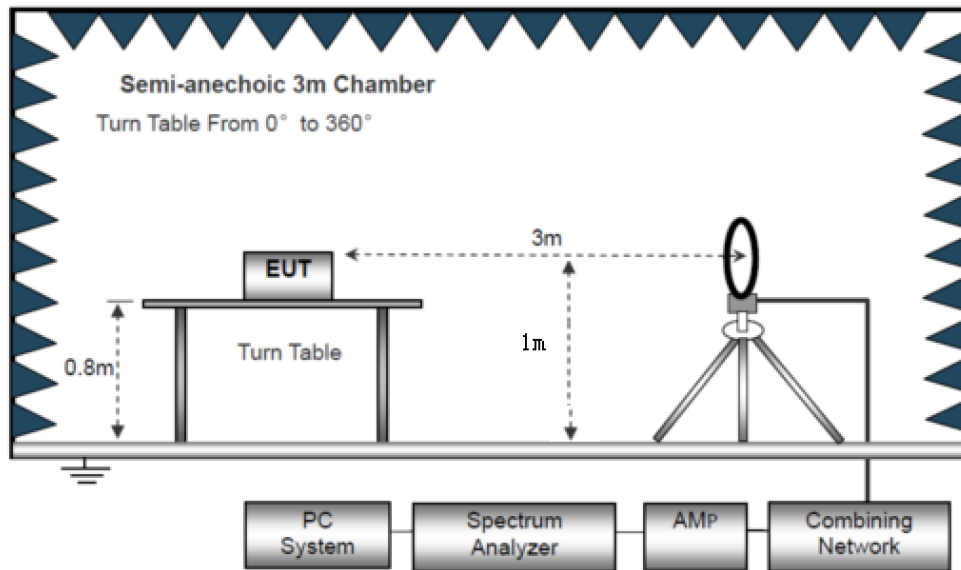

The test setup for emission measurement from 30 MHz to 1 GHz.

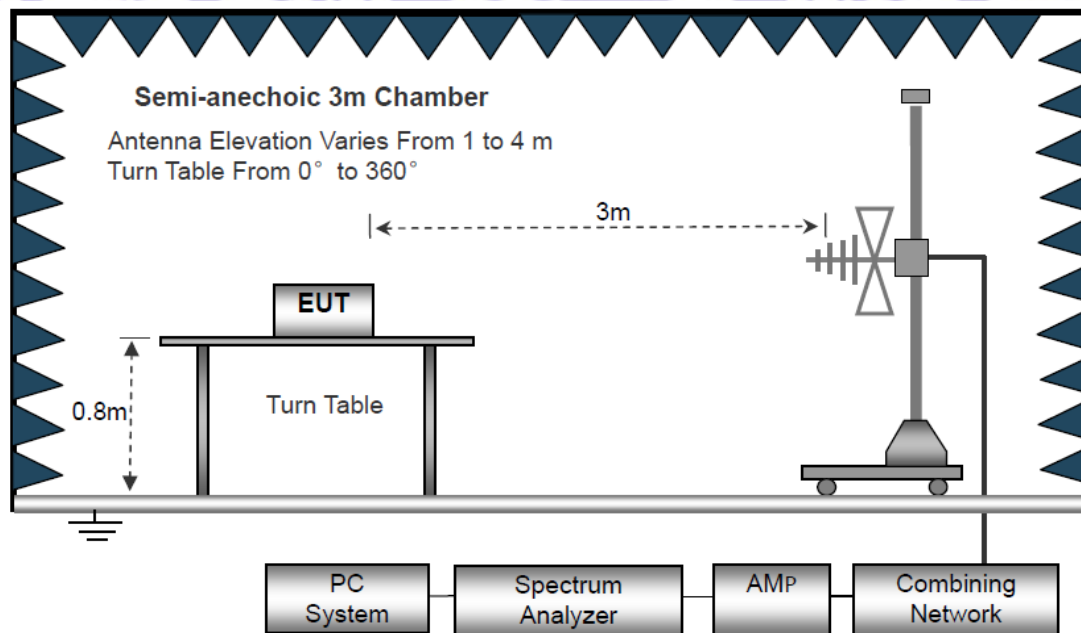

The test setup for emission measurement above 1 GHz

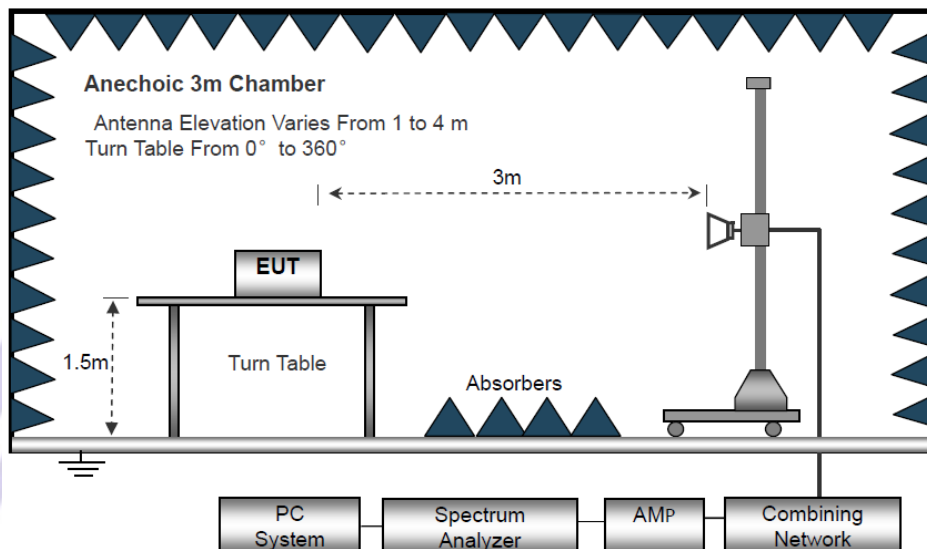

6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

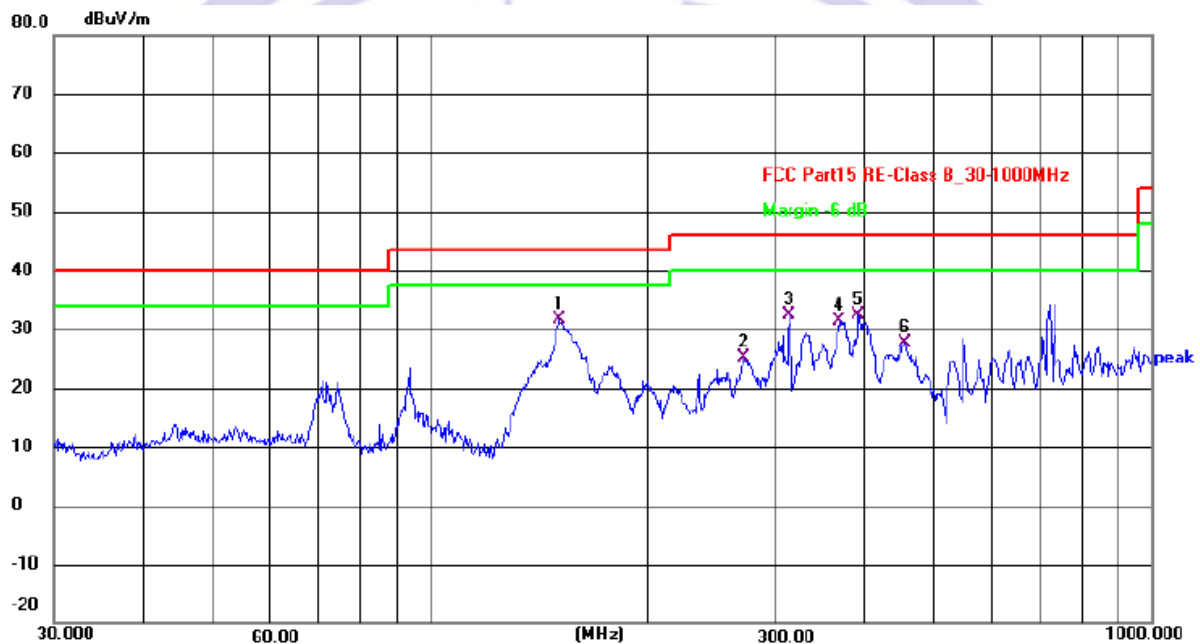

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	151.0663	50.81	-19.25	31.56	43.50	-11.94	QP
2	271.3245	39.37	-14.33	25.04	46.00	-20.96	QP
3	314.3763	45.78	-13.38	32.40	46.00	-13.60	QP
4	369.4045	43.49	-12.13	31.36	46.00	-14.64	QP
5	392.0950	44.19	-11.70	32.49	46.00	-13.51	QP
6	454.3100	37.97	-10.25	27.72	46.00	-18.28	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	93.1131	47.08	-17.52	29.56	43.50	-13.94	QP
2	152.6640	44.94	-19.12	25.82	43.50	-17.68	QP
3	313.2760	49.06	-13.38	35.68	46.00	-10.32	QP
4	344.3854	47.23	-12.79	34.44	46.00	-11.56	QP
5	401.8383	45.59	-11.55	34.04	46.00	-11.96	QP
6	550.9480	42.12	-8.88	33.24	46.00	-12.76	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor

Test Frequency: From 1GHz to 25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	53.03	34.12	5.03	32.39	56.33	74.00	-17.67	PK
V	4824.00	39.89	34.12	5.03	32.39	43.19	54.00	-10.81	AV
V	7236.00	49.6	32.54	6.29	35.86	59.21	74.00	-14.79	PK
V	7236.00	35.54	32.54	6.29	35.86	45.15	54.00	-8.85	AV
V	9648.00	43.93	32.98	7.55	38.4	56.9	74.00	-17.10	PK
V	9648.00	32.9	32.98	7.55	38.4	45.87	54.00	-8.13	AV
V	12060.00	41.64	32.09	8.93	39	57.48	74.00	-16.52	PK
V	12060.00	30.95	32.09	8.93	39	46.79	54.00	-7.21	AV
H	4824.00	51.96	34.12	5.03	32.39	55.26	74.00	-18.74	PK
H	4824.00	38.14	34.12	5.03	32.39	41.44	54.00	-12.56	AV
H	7236.00	46.07	32.54	6.29	35.86	55.68	74.00	-18.32	PK
H	7236.00	33.86	32.54	6.29	35.86	43.47	54.00	-10.53	AV
H	9648.00	45.84	32.98	7.55	38.4	58.81	74.00	-15.19	PK
H	9648.00	30.99	32.98	7.55	38.4	43.96	54.00	-10.04	AV
H	12060.00	42.24	32.09	8.93	39	58.08	74.00	-15.92	PK
H	12060.00	27.86	32.09	8.93	39	43.7	54.00	-10.30	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	53.35	30.55	5.77	24.66	53.23	74.00	-20.77	PK
V	4874.00	42.49	30.55	5.77	24.66	42.37	54.00	-11.63	AV
V	7311.00	54.06	30.33	6.32	24.55	54.6	74.00	-19.4	PK
V	7311.00	43.46	30.33	6.32	24.55	44	54.00	-10	AV
V	9748.00	54.63	30.85	7.45	24.69	55.92	74.00	-18.08	PK
V	9748.00	44.47	30.85	7.45	24.69	45.76	54.00	-8.24	AV
V	12185.00	52.86	31.02	8.99	25.57	56.4	74.00	-17.6	PK
V	12185.00	42.59	31.02	8.99	25.57	46.13	54.00	-7.87	AV
H	4874.00	52.76	30.55	5.77	24.66	52.64	74.00	-21.36	PK
H	4874.00	41.77	30.55	5.77	24.66	41.65	54.00	-12.35	AV
H	7311.00	53.03	30.33	6.32	24.55	53.57	74.00	-20.43	PK
H	7311.00	41.98	30.33	6.32	24.55	42.52	54.00	-11.48	AV
H	9748.00	52.49	30.85	7.45	24.69	53.78	74.00	-20.22	PK
H	9748.00	41.9	30.85	7.45	24.69	43.19	54.00	-10.81	AV
H	12185.00	54.48	31.02	8.99	25.57	58.02	74.00	-15.98	PK
H	12185.00	41.95	31.02	8.99	25.57	45.49	54.00	-8.51	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	54.67	30.55	5.77	24.66	54.55	74.00	-19.45	PK
V	4924.00	43.89	30.55	5.77	24.66	43.77	54.00	-10.23	AV
V	7386.00	52.94	30.33	6.32	24.55	53.48	74.00	-20.52	PK
V	7386.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	9848.00	55.34	30.85	7.45	24.69	56.63	74.00	-17.37	PK
V	9848.00	42.87	30.85	7.45	24.69	44.16	54.00	-9.84	AV
V	12310.00	55.18	31.02	8.99	25.57	58.72	74.00	-15.28	PK
V	12310.00	43.65	31.02	8.99	25.57	47.19	54.00	-6.81	AV
H	4924.00	53.84	30.55	5.77	24.66	53.72	74.00	-20.28	PK
H	4924.00	43.72	30.55	5.77	24.66	43.6	54.00	-10.4	AV
H	7386.00	54.8	30.33	6.32	24.55	55.34	74.00	-18.66	PK
H	7386.00	43.69	30.33	6.32	24.55	44.23	54.00	-9.77	AV
H	9848.00	53.22	30.85	7.45	24.69	54.51	74.00	-19.49	PK
H	9848.00	42.5	30.85	7.45	24.69	43.79	54.00	-10.21	AV
H	12310.00	53.35	31.02	8.99	25.57	56.89	74.00	-17.11	PK
H	12310.00	42.87	31.02	8.99	25.57	46.41	54.00	-7.59	AV

Note:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. We test all the mode and recorded the worst mode (802.11b) in the report.

Radiated Band Emission Measurement:

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	58.43	35.17	3.48	27.49	54.23	74.00	PK	PASS
	H	2390.00	50.37	35.17	3.48	27.49	46.17	54.00	AV	PASS
	H	2400.00	61.78	35.16	3.49	27.52	57.63	74.00	PK	PASS
	H	2400.00	51.05	35.16	3.49	27.52	46.9	54.00	AV	PASS
	V	2390.00	59.31	35.17	3.48	27.49	55.11	74.00	PK	PASS
	V	2390.00	51.27	35.17	3.48	27.49	47.07	54.00	AV	PASS
	V	2400.00	60.23	35.16	3.49	27.52	56.08	74.00	PK	PASS
	V	2400.00	50.62	35.16	3.49	27.52	46.47	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	58.51	35.11	3.56	27.75	54.71	74.00	PK	PASS
	H	2483.50	50.13	35.11	3.56	27.75	46.33	54.00	AV	PASS
	H	2500.00	59.95	35.1	3.57	27.8	56.22	74.00	PK	PASS
	H	2500.00	50.03	35.1	3.57	27.8	46.3	54.00	AV	PASS
	V	2483.50	59.03	35.11	3.56	27.75	55.23	74.00	PK	PASS
	V	2483.50	50.92	35.11	3.56	27.75	47.12	54.00	AV	PASS
	V	2500.00	59.22	35.1	3.57	27.8	55.49	74.00	PK	PASS
	V	2500.00	50.91	35.1	3.57	27.8	47.18	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	57.15	35.17	3.48	27.49	52.95	74.00	PK	PASS
	H	2390.00	49.22	35.17	3.48	27.49	45.02	54.00	AV	PASS
	H	2400.00	58.31	35.16	3.49	27.52	54.16	74.00	PK	PASS
	H	2400.00	49.26	35.16	3.49	27.52	45.11	54.00	AV	PASS

802.11 n20	V	2390.00	57.03	35.17	3.48	27.49	52.83	74.00	PK	PASS
	V	2390.00	49.19	35.17	3.48	27.49	44.99	54.00	AV	PASS
	V	2400.00	58.58	35.16	3.49	27.52	54.43	74.00	PK	PASS
	V	2400.00	49.29	35.16	3.49	27.52	45.14	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	56.85	35.11	3.56	27.75	53.05	74.00	PK	PASS
	H	2483.50	48.86	35.11	3.56	27.75	45.06	54.00	AV	PASS
	H	2500.00	59.47	35.1	3.57	27.8	55.74	74.00	PK	PASS
	H	2500.00	48.98	35.1	3.57	27.8	45.25	54.00	AV	PASS
	V	2483.50	57.74	35.11	3.56	27.75	53.94	74.00	PK	PASS
	V	2483.50	50.6	35.11	3.56	27.75	46.8	54.00	AV	PASS
	V	2500.00	58.9	35.1	3.57	27.8	55.17	74.00	PK	PASS
	V	2500.00	50	35.1	3.57	27.8	46.27	54.00	AV	PASS
	Low Channel 2412MHz									
	H	2390.00	58.22	35.17	3.48	27.49	54.02	74.00	PK	PASS
	H	2390.00	50.02	35.17	3.48	27.49	45.82	54.00	AV	PASS
	H	2400.00	60.7	35.16	3.49	27.52	56.55	74.00	PK	PASS
	H	2400.00	49.88	35.16	3.49	27.52	45.73	54.00	AV	PASS
	V	2390.00	58.37	35.17	3.48	27.49	54.17	74.00	PK	PASS
	V	2390.00	51.17	35.17	3.48	27.49	46.97	54.00	AV	PASS
	V	2400.00	60.47	35.16	3.49	27.52	56.32	74.00	PK	PASS
	V	2400.00	50.25	35.16	3.49	27.52	46.1	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	57.82	35.17	3.48	27.49	53.62	74.00	PK	PASS
	H	2483.50	50.46	35.17	3.48	27.49	46.26	54.00	AV	PASS
	H	2500.00	60.73	35.16	3.49	27.52	56.58	74.00	PK	PASS

	H	2500.00	49.9	35.16	3.49	27.52	45.75	54.00	AV	PASS
	V	2483.50	58.13	35.17	3.48	27.49	53.93	74.00	PK	PASS
	V	2483.50	51.06	35.17	3.48	27.49	46.86	54.00	AV	PASS
	V	2500.00	60.16	35.16	3.49	27.52	56.01	74.00	PK	PASS
	V	2500.00	50.19	35.16	3.49	27.52	46.04	54.00	AV	PASS
802.11 ax20	Low Channel 2412MHz									
	H	2390.00	58.23	35.11	3.56	27.75	54.43	74.00	PK	PASS
	H	2390.00	49.22	35.11	3.56	27.75	45.42	54.00	AV	PASS
	H	2400.00	60.05	35.1	3.57	27.8	56.32	74.00	PK	PASS
	H	2400.00	50.1	35.1	3.57	27.8	46.37	54.00	AV	PASS
	V	2390.00	58.99	35.11	3.56	27.75	55.19	74.00	PK	PASS
	V	2390.00	50.42	35.11	3.56	27.75	46.62	54.00	AV	PASS
	V	2400.00	58.83	35.1	3.57	27.8	55.1	74.00	PK	PASS
	V	2400.00	50.74	35.1	3.57	27.8	47.01	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	57.69	35.17	3.48	27.49	53.49	74.00	PK	PASS
	H	2483.50	50.15	35.17	3.48	27.49	45.95	54.00	AV	PASS
	H	2500.00	59.18	35.16	3.49	27.52	55.03	74.00	PK	PASS
	H	2500.00	49.94	35.16	3.49	27.52	45.79	54.00	AV	PASS
	V	2483.50	57.31	35.17	3.48	27.49	53.11	74.00	PK	PASS
	V	2483.50	49.49	35.17	3.48	27.49	45.29	54.00	AV	PASS
	V	2500.00	59.37	35.16	3.49	27.52	55.22	74.00	PK	PASS
	V	2500.00	49.67	35.16	3.49	27.52	45.52	54.00	AV	PASS
802.11 n40	Low Channel 2422MHz									
	H	2390.00	56.84	35.11	3.56	27.75	53.04	74.00	PK	PASS
	H	2390.00	48.71	35.11	3.56	27.75	44.91	54.00	AV	PASS

	H	2400.00	59.29	35.1	3.57	27.8	55.56	74.00	PK	PASS
	H	2400.00	49.73	35.1	3.57	27.8	46	54.00	AV	PASS
	V	2390.00	57.99	35.11	3.56	27.75	54.19	74.00	PK	PASS
	V	2390.00	50.55	35.11	3.56	27.75	46.75	54.00	AV	PASS
	V	2400.00	58.72	35.1	3.57	27.8	54.99	74.00	PK	PASS
	V	2400.00	49.9	35.1	3.57	27.8	46.17	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	58.11	35.17	3.48	27.49	53.91	74.00	PK	PASS
	H	2483.50	50.41	35.17	3.48	27.49	46.21	54.00	AV	PASS
	H	2500.00	60.53	35.16	3.49	27.52	56.38	74.00	PK	PASS
	H	2500.00	49.77	35.16	3.49	27.52	45.62	54.00	AV	PASS
	V	2483.50	57.8	35.17	3.48	27.49	53.6	74.00	PK	PASS
	V	2483.50	50.5	35.17	3.48	27.49	46.3	54.00	AV	PASS
	V	2500.00	60.46	35.16	3.49	27.52	56.31	74.00	PK	PASS
	V	2500.00	50.46	35.16	3.49	27.52	46.31	54.00	AV	PASS
802.11 ax40	Low Channel 2422MHz									
	H	2390.00	58.25	35.11	3.56	27.75	54.45	74.00	PK	PASS
	H	2390.00	49.73	35.11	3.56	27.75	45.93	54.00	AV	PASS
	H	2400.00	59.81	35.1	3.57	27.8	56.08	74.00	PK	PASS
	H	2400.00	50.4	35.1	3.57	27.8	46.67	54.00	AV	PASS
	V	2390.00	58.93	35.11	3.56	27.75	55.13	74.00	PK	PASS
	V	2390.00	50.13	35.11	3.56	27.75	46.33	54.00	AV	PASS
	V	2400.00	59.22	35.1	3.57	27.8	55.49	74.00	PK	PASS
	V	2400.00	50	35.1	3.57	27.8	46.27	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	58.6	35.17	3.48	27.49	54.4	74.00	PK	PASS

	H	2483.50	50.55	35.17	3.48	27.49	46.35	54.00	AV	PASS
	H	2500.00	61.81	35.16	3.49	27.52	57.66	74.00	PK	PASS
	H	2500.00	51.23	35.16	3.49	27.52	47.08	54.00	AV	PASS
	V	2483.50	59.41	35.17	3.48	27.49	55.21	74.00	PK	PASS
	V	2483.50	51.88	35.17	3.48	27.49	47.68	54.00	AV	PASS
	V	2500.00	60.32	35.16	3.49	27.52	56.17	74.00	PK	PASS
	V	2500.00	51	35.16	3.49	27.52	46.85	54.00	AV	PASS


Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

7 Conduct Band Edge And Spurious Emissions Measurement

Test Requirement	: FCC CFR47 Part 15 Section 15.247 RSS-247 § 5.5; RSS-Gen 8.9
Test Method	: ANSI C63.10:2020
Test Limit	: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). RSS-247 § 5.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.1 Test Setup



7.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.3 Test Result

Please see the attachment for the data.


8 6dB&99% Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247, RSS-247,
RSS-Gen 5.2(a), RSS-Gen 6.7

Test Method : ANSI C63.10:2020

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Setup



8.2 Test Procedure

For 6dB Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW $\geq$ 3RBW

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW $\geq$ 3RBW

8.3 Test Result

Please see the attachment for the data.

9 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247, RSS-247 § 5.4
Test Method	: ANSI C63.10:2020
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. RSS-247 § 5.4 (d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

9.1 Test Setup



9.2 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

9.3 Test Result

Mode	Test Channel	Peak Output Power (dBm)	LIMIT (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit(dBm)	Result
802.11b	Low	12.95	30.00	3.84	16.79	36.02	PASS
	Moddle	12.90	30.00	3.84	16.74	36.02	PASS
	High	13.75	30.00	3.84	17.59	36.02	PASS
802.11g	Low	16.36	30.00	3.84	20.2	36.02	PASS
	Moddle	16.59	30.00	3.84	20.43	36.02	PASS
	High	17.46	30.00	3.84	21.3	36.02	PASS
802.11n HT20	Low	16.20	30.00	3.84	20.04	36.02	PASS
	Moddle	16.39	30.00	3.84	20.23	36.02	PASS
	High	17.30	30.00	3.84	21.14	36.02	PASS
802.11ax HT20	Low	15.01	30.00	3.84	18.85	36.02	PASS
	Moddle	16.17	30.00	3.84	20.01	36.02	PASS
	High	16.48	30.00	3.84	20.32	36.02	PASS
802.11n HT40	Low	16.57	30.00	3.84	20.41	36.02	PASS
	Moddle	16.35	30.00	3.84	20.19	36.02	PASS
	High	15.83	30.00	3.84	19.67	36.02	PASS
802.11ax HT40	Low	16.60	30.00	3.84	20.44	36.02	PASS
	Moddle	16.43	30.00	3.84	20.27	36.02	PASS
	High	15.84	30.00	3.84	19.68	36.02	PASS


10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247,RSS-247 §5.2 (b)
Test Method	: ANSI C63.10:2020
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RSS-247 §5.2 (b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

10.1 Test Setup



10.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

10.3 Test Result

Please see the attachment for the data.

11 Antenna Application

11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to RSS-GEN section 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

11.2 Result

The EUT'S antenna, permanent attached antenna, is Internal Antenna. The antenna's gain is 3.84 dBi and meets the requirement.

12 Test Setup and EUT Photos

Reference to the attachment for details.

*****THE END REPORT*****

