



Prüfbericht-Nr.: Test report no.:	CN23WKHY (P15C-BT) 001	Auftrags-Nr.: Order no.:	48219362	Seite 1 von 31 Page 1 of 31
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-04-13	
Auftraggeber: Client:	Daiso Industries Co., Ltd. 1-4-14 Saijoyoshiyukihigashi, Higashihiroshima-shi, Hiroshima 739-8501, Japan			
Prüfgegenstand: Test item:	True Wireless Earphone			
Bezeichnung / Typ-Nr.: Identification / Type no.:	TWS002			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (BT)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2023-05-30			
Prüfmuster-Nr.: Test sample no.:	A003485783-001 A003485783-007			
Prüfzeitraum: Testing period:	2023-06-08 - 2023-06-14			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
zusammengestellt von: compiled by:	genehmigt von: authorized by:			
Datum: Date: 2023-06-30	 Ryan Chen		 Brenda Chen	
Stellung / Position:	Senior Project Manager	Ausstellungsdatum: Issue date: 2023-06-30	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(1)	Peak Output Power	Pass
5.1.3	15.247(a)(1)	20 dB Bandwidth	Note 1
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(d)	Conducted Spurious Emission and Band Edges	Pass
5.1.5	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.1.6	15.247(a)(1)	Hopping Channel Separation	Pass
5.1.7	15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass
5.1.8	15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note:

1. If the Frequency Hopping Systems operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	14
4.6 DUTY CYCLE OF TEST SIGNAL	16
5. TEST RESULTS	17
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	17
5.1.1 Antenna Requirement	17
5.1.2 Peak Output Power	18
5.1.3 20 dB Bandwidth and 99% Occupied Bandwidth.....	20
5.1.4 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth	21
5.1.5 Radiated Spurious Emissions and Band Edges	22
5.1.6 Hopping Channel Separation	27
5.1.7 Number of Hopping Frequency.....	28
5.1.8 Dwell Time.....	29
5.2 MAINS EMISSION	30
5.2.1 Mains Conducted Emission.....	30

Prüfbericht - Nr.: CN23WKHY (P15C-BT) 001
Test Report No.

Seite 4 von 31
Page 4 of 31

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN23WKHY (P15C-BT) 001
Test Report No.

Seite 5 von 31
Page 5 of 31

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN23WKHY (P15C-BT) 001	Original Release	2023-06-30

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a True Wireless Earphone. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	True Wireless Earphone
Type Identification	TWS002
FCC ID	2BCCJ-DAISOTWS002

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	1 MHz
Channel Number	79
Operation Voltage	3.7Vdc
Modulation	GFSK, $\pi/4$ -DQPSK
Maximum Output Power (mW)	0.394
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting	
	GFSK	$\pi/4$ -DQPSK
2402	8	8
2441	8	8
2480	8	8

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	FCC_assist_1.0.2.2.exe
---------------	------------------------

The samples were used as follows:

A003485783-001

A003485783-007

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	-	-
Charge	-	-	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on X-plane.
2. "-" means no effect.

Antenna Port Conducted Measurement

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2402, 2441, 2480	GFSK	1DH5
-	2402 to 2480	2402, 2441, 2480	$\pi/4$ -DQPSK	2DH5

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2402, 2441, 2480	GFSK	1DH5
-	2402 to 2480	2402, 2441, 2480	$\pi/4$ -DQPSK	2DH5

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2402	GFSK	1DH5
Charge	2402 to 2480	2402	GFSK	1DH5

Mains Conducted Emission Test

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
Charge	2402 to 2480	2402	GFSK	1DH5

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22.2-23.3 °C	50-65 %	Andy Chen
Radiated Spurious Emissions above 1 GHz	24.6-25.7 °C	54-56 %	Ray Huang
Radiated Spurious Emissions below 1 GHz	24.6-25.7 °C	54-56 %	Ray Huang
Mains Conducted Emission	22 °C	58 %	Peter Chiou

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None.

Support Unit


No.	Description	Brand	Model	S/N	Remark
Radiated Test with Charge Mode and Mains Conducted Test					
1	Adapter	OPPO	VC56JACH	J119492AC1009359	non-shielded cable w/o core
2	USB To Type C	TUV	TUV-001	-	100 cm
Conducted Test					
-	Notebook	HP	9470m	CNU4099WK7	NB-15

4.5 Test Setup Diagram


<Radiated Spurious Emissions Mode>

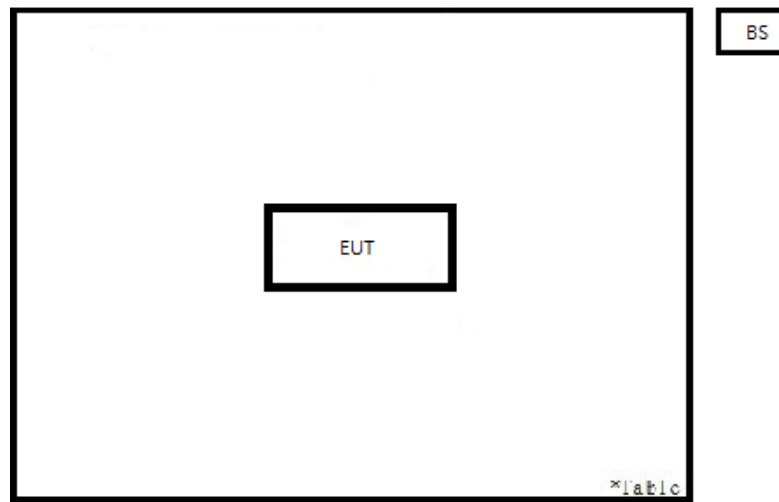

<Radiated Spurious Emissions, Charge Mode>

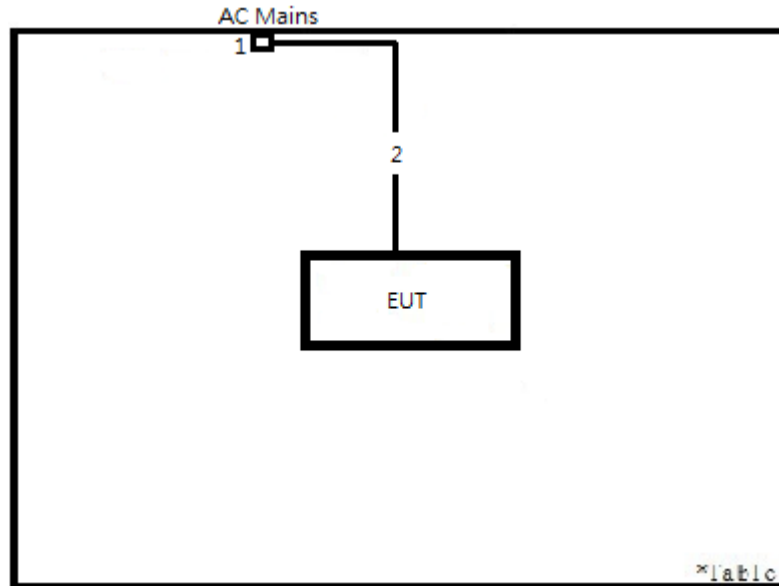

<Mains Conducted Emission Mode>

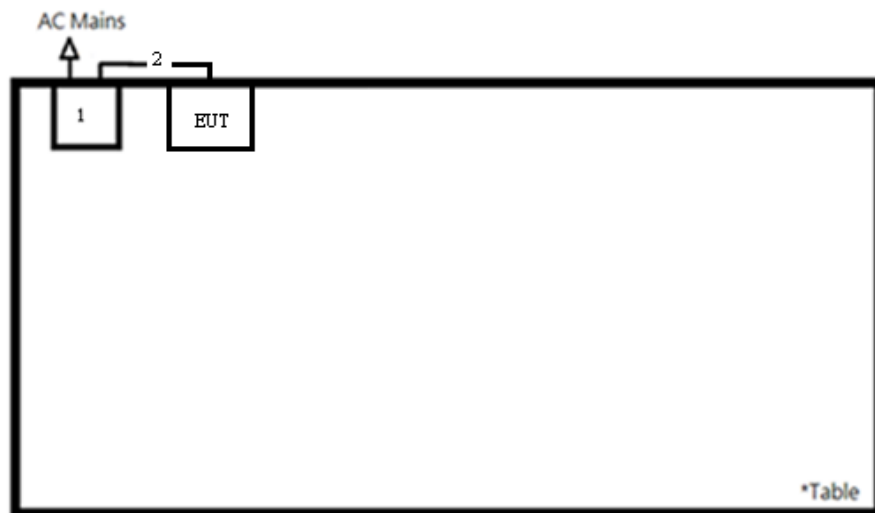

4.6 Duty Cycle of Test Signal

Based on the BT hopping rate 1600/s, the transmission time would be $6/1600 = 3.75\text{ms}$

$3.75\text{ms} \times 79 = 296.25 > 100\text{ms}$, thus, 1 time appear on 100ms.

Duty Cycle Factor on DH5: $20\log(3.75 \times 5 / 6 \times 1 / 100) = -30.1$

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 1.73 dBi. The antenna is a Chip Antenna soldered to the PCB with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision. Refer to EUT photo for details.


5.1.2 Peak Output Power

Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2023/3/17	2024/3/15	2023/6/8	2023/6/9
Power Sensor	Anritsu	MA2411B	1725269	2023/3/17	2024/3/15	2023/6/8	2023/6/9

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<GFSK>

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(mW)
Low Channel	2402	-5.08	0.310	125
Middle Channel	2441	-5.81	0.262	125
High Channel	2480	-6.51	0.223	125

< $\pi/4$ -DQPSK>

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(mW)
Low Channel	2402	-4.05	0.394	125
Middle Channel	2441	-4.79	0.332	125
High Channel	2480	-5.48	0.283	125

Average Power
<GFSK>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	-5.54	0.279
Middle Channel	2441	-6.29	0.235
High Channel	2480	-6.99	0.200


< $\pi/4$ -DQPSK>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	-7.00	0.200
Middle Channel	2441	-7.74	0.168
High Channel	2480	-8.43	0.144

5.1.3 20 dB Bandwidth and 99% Occupied Bandwidth

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/6/8	2023/6/9

Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.
- The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/6/8	2023/6/9

Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

Test Results

Please refer to Appendix A.

5.1.5 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

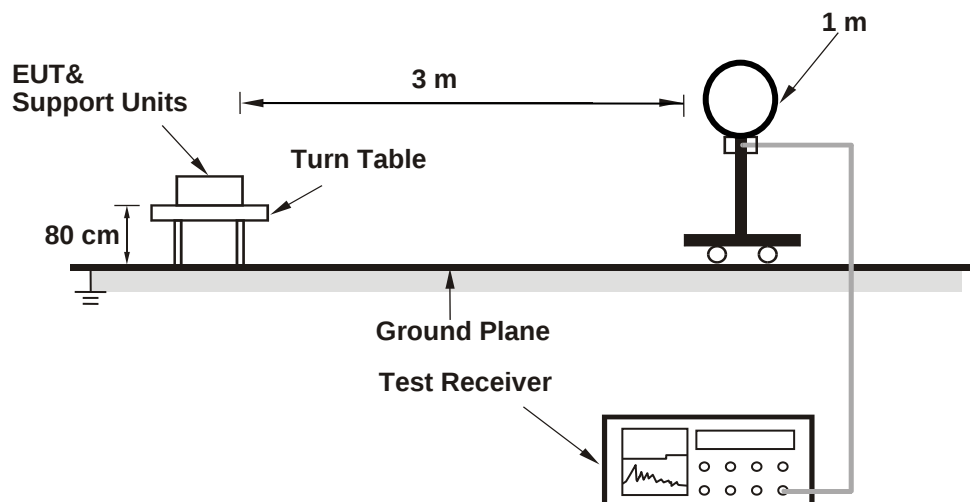

<Radiated Emissions 30 MHz to 1 GHz>

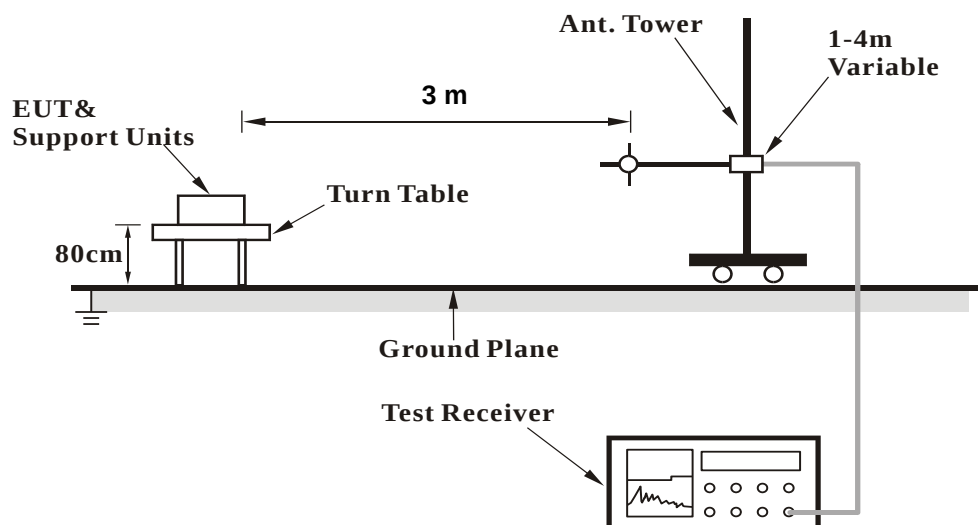

<Radiated Emissions above 1 GHz>

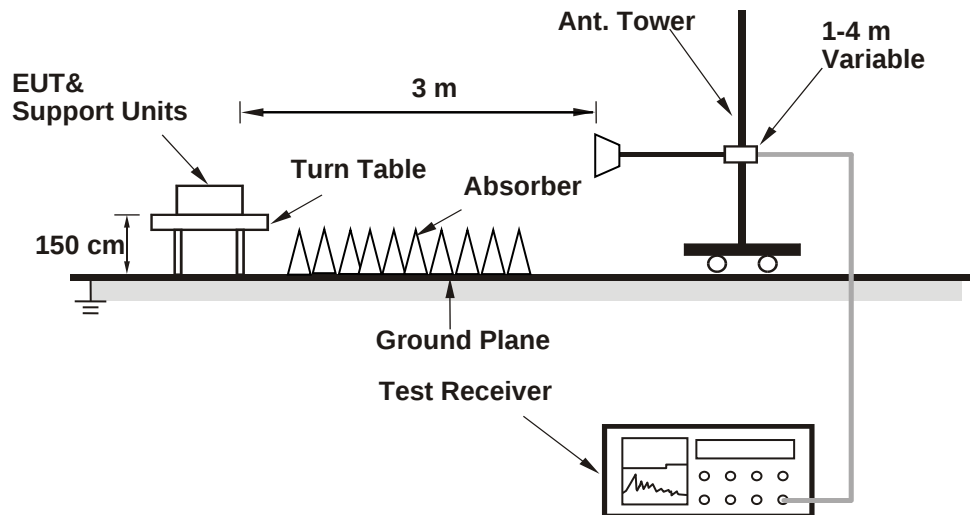

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Test Date: 2023/6/13 ~ 2023/6/14

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1GHz					
Signal Analyzer	R&S	FSV40	101508	2023/4/20	2024/4/18
Base Station	ROHDE & SCHWARZ	CBT	100866	2023/4/12	2024/4/10
Horn Antenna	ETS-Lindgren	3117	00218929	2022/12/8	2023/12/7
HF-AMP + AC source	EMCI	EMC051845SE	980633	2023/2/22	2024/2/21
HF-AMP + AC source	EMCI	EMC184045SE	980657	2023/2/16	2024/2/15
Horn Antenna	SCHWARZBECK	BBHA 9170	00218930	2022/12/8	2023/12/7
30MHz-1GHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Base Station	ROHDE & SCHWARZ	CBT	100866	2023/4/12	2024/4/10
Bilog Antenna	SCHWARZBECK	VULB9618	00951	2023/3/31	2024/3/30
LF-AMP	Agilent	8447D	2944A107722	2023/3/22	2024/3/20
Below 30MHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2023/1/4	2024/1/3

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency are 9-90 kHz, 110-490 kHz and above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. For fundamental frequency: The average value is "Average = Peak value + 20log(Duty cycle)

Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:

$$20\log(\text{Duty cycle}) = 20\log(\text{dwell time} / 100\text{ms}) = 20\log(3.125 / 100) = -30.1 \text{ dB}$$

5. All modes of operation were investigated and the worst-case emissions are reported.
6. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
7. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)


Please refer to Appendix B.

5.1.6 Hopping Channel Separation

Limit ≥ 25 kHz or 2/3 of 20 dB bandwidth, whichever is greater

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/6/8	2023/6/9

Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

Test Results


Please refer to Appendix A.

5.1.7 Number of Hopping Frequency

Limit ≥ 15 non-overlapping channels

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/6/8	2023/6/9

Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

Test Results


Please refer to Appendix A.

5.1.8 Dwell Time

Limit 0.4s

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/6/8	2023/6/9

Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

Test Results

Please refer to Appendix A.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

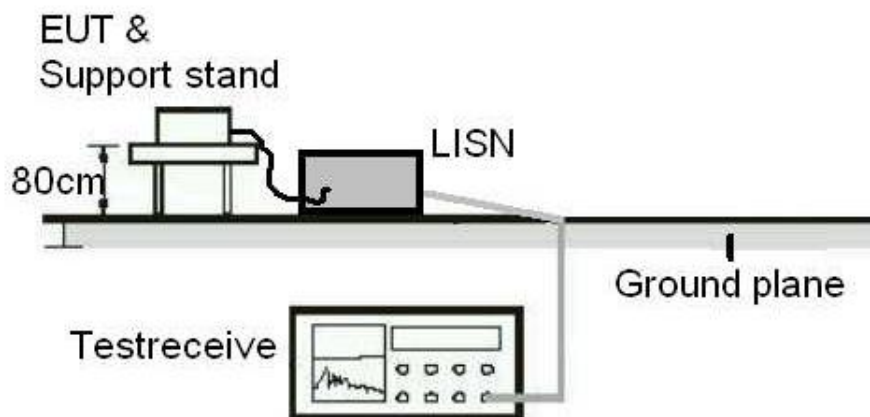

Test Instruments

Test Date: 2023/6/14

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2022/9/22	2023/9/21
EMI Test Receiver	R&S	ESCI	100797	2022/6/19	2023/6/18

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.


Appendix A: Test Results of Conducted Test

Test Result of 20 dB Bandwidth


GFSK

Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Result
Low Channel	2402	950.00	Pass
Middle Channel	2441	950.00	Pass
High Channel	2480	950.00	Pass


Low Channel

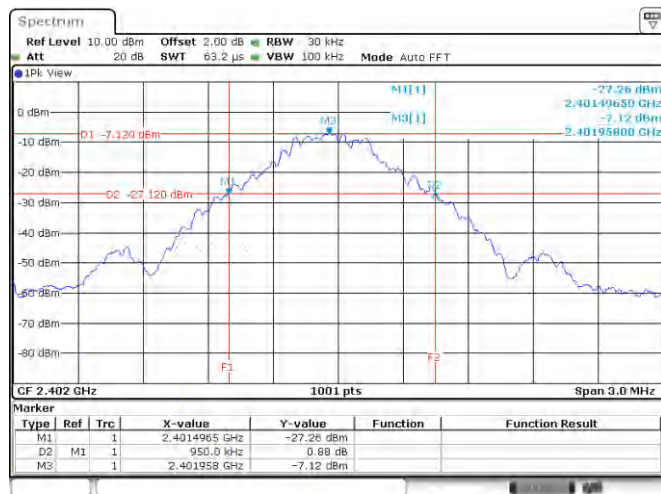

Middle Channel

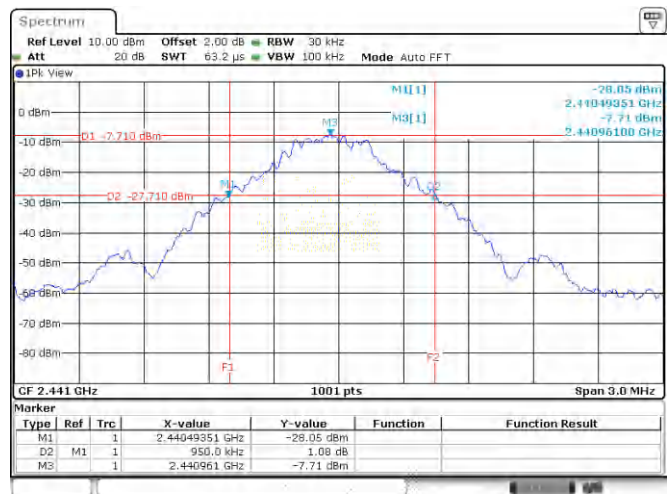


High Channel

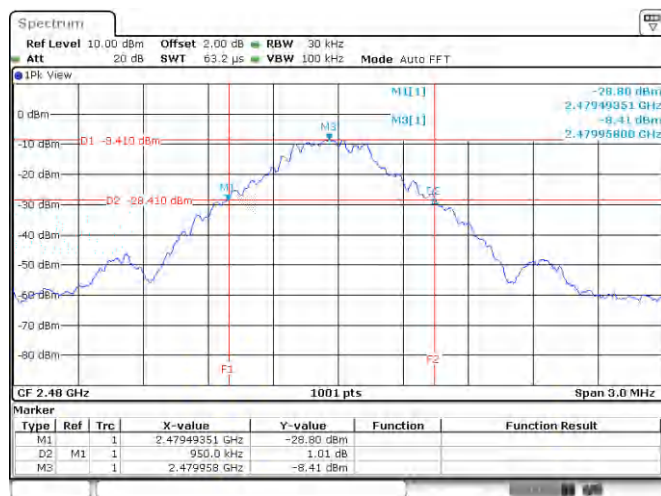


$\pi/4$ -DQPSK

Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Result
Low Channel	2402	1282.70	Pass
Middle Channel	2441	1279.70	Pass
High Channel	2480	1279.70	Pass


Low Channel

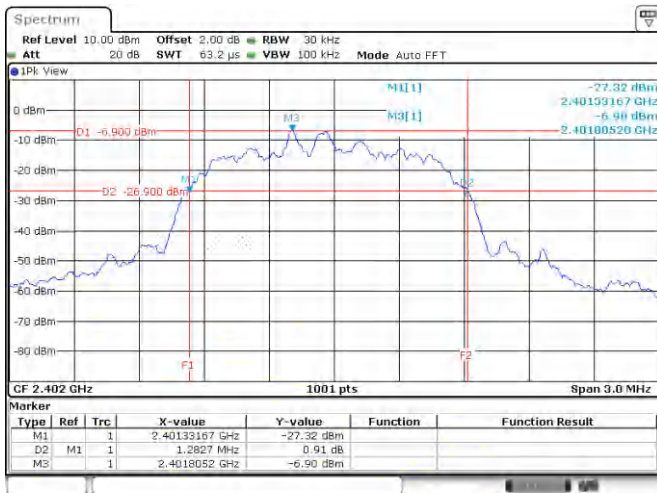

Middle Channel

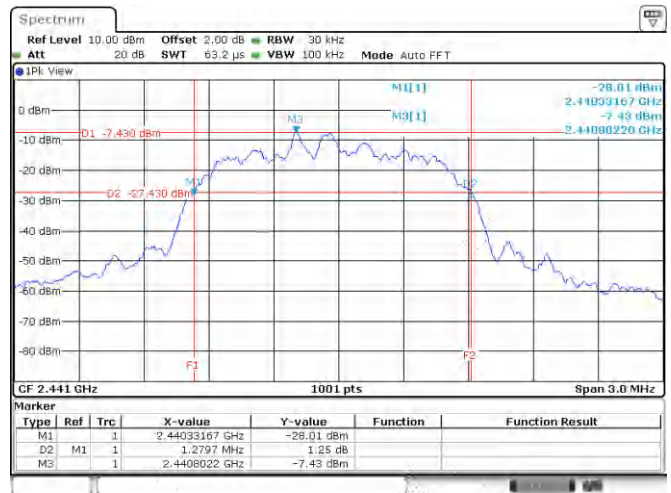

High Channel

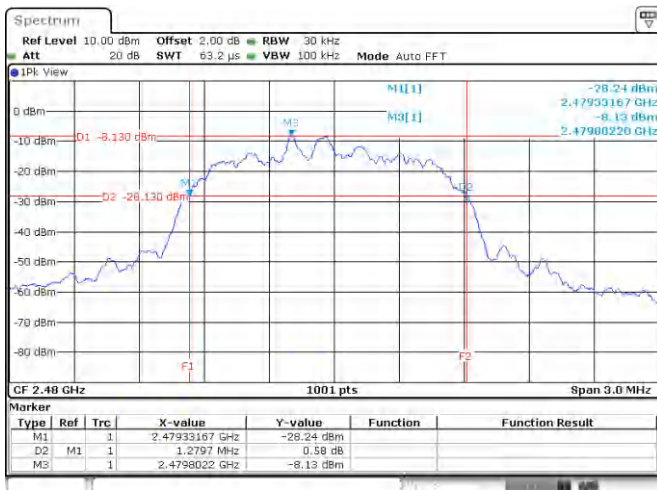


Test Result of 99% Occupied Bandwidth


GFSK

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2402	863.14
Middle Channel	2441	863.14
High Channel	2480	863.14


Low Channel

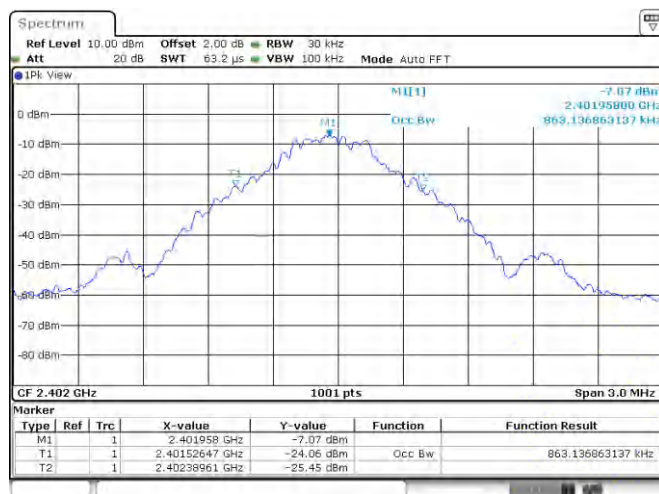

Middle Channel

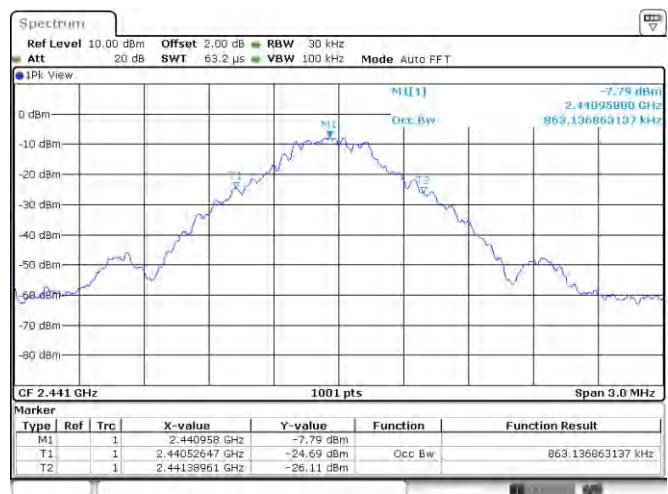


High Channel

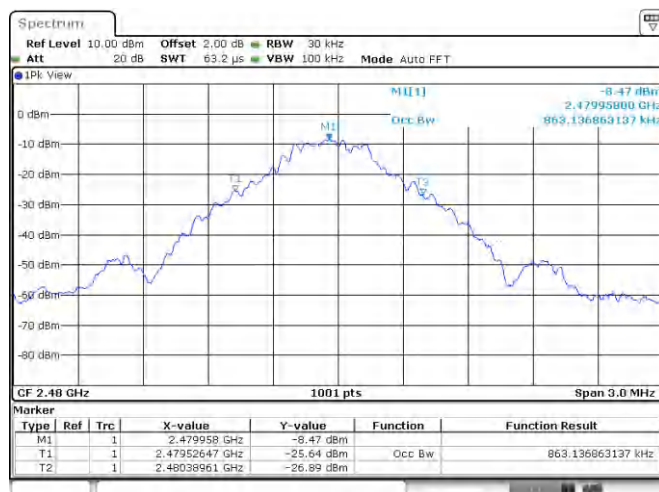


$\pi/4$ -DQPSK

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2402	1168.83
Middle Channel	2441	1165.83
High Channel	2480	1168.83


Low Channel

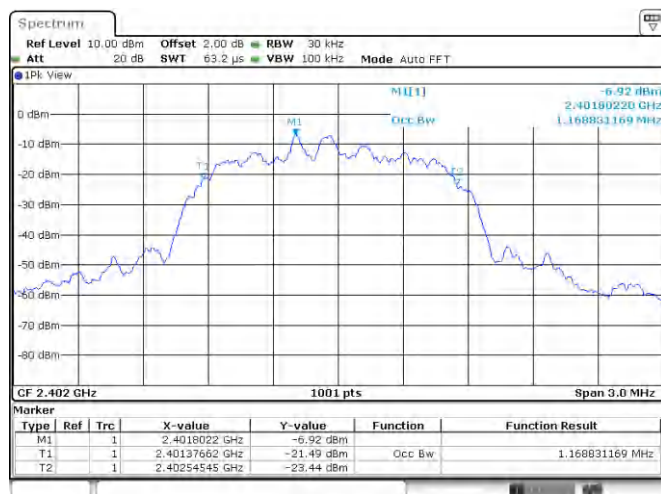

Middle Channel

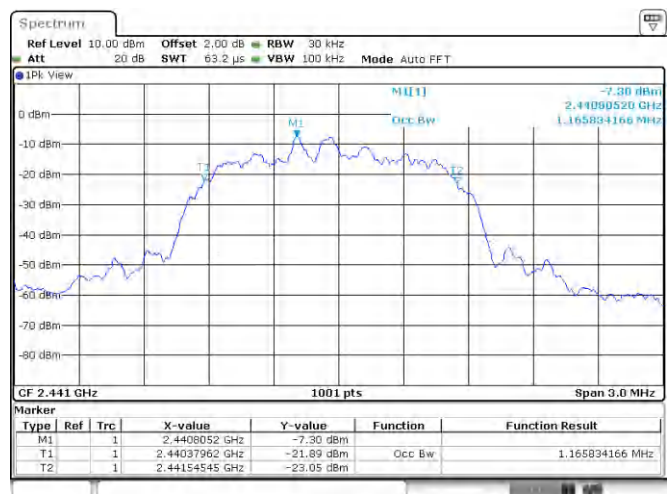


High Channel

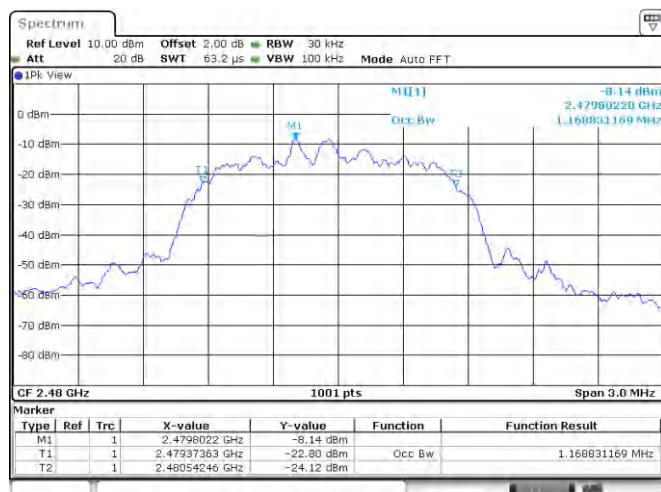


Test Result of Conducted Spurious Emissions, Tx Mode

GFSK


Low Channel

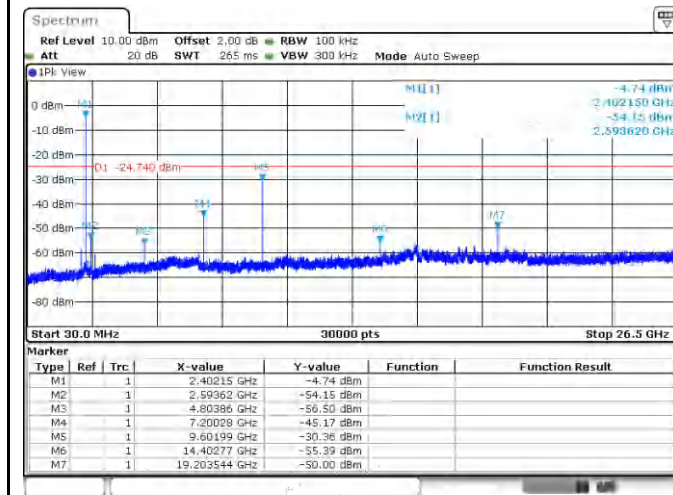

Middle Channel

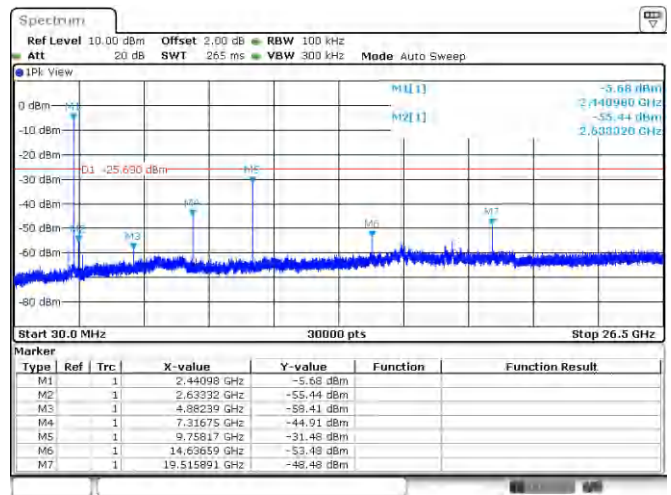



High Channel

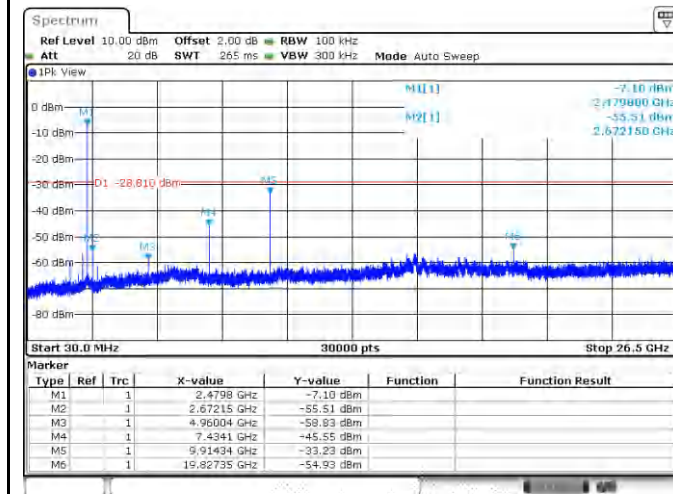


$\pi/4$ -DQPSK

Low Channel

Middle Channel

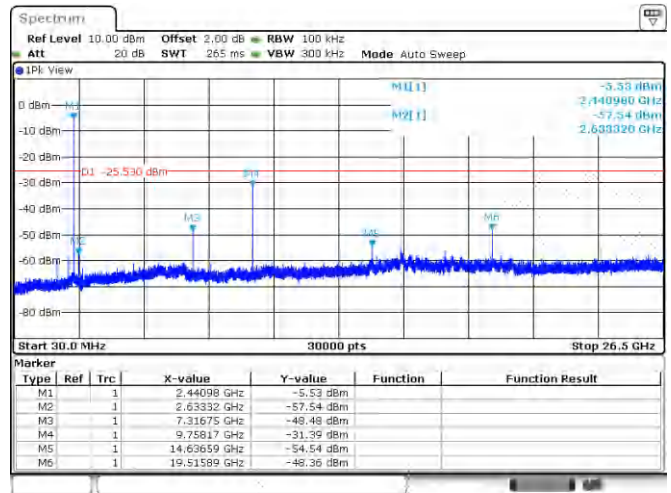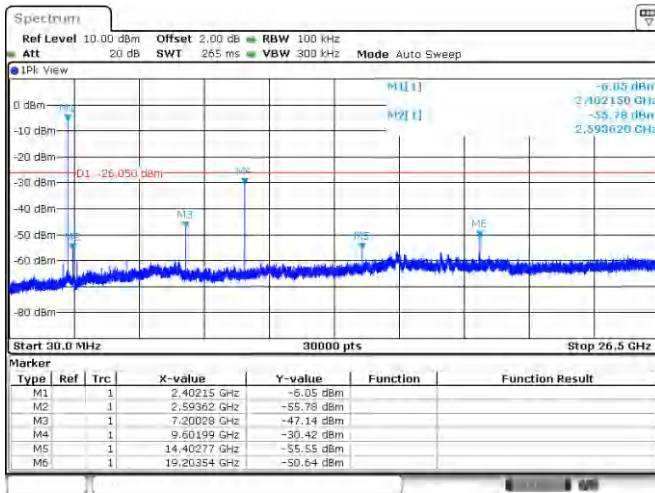


High Channel

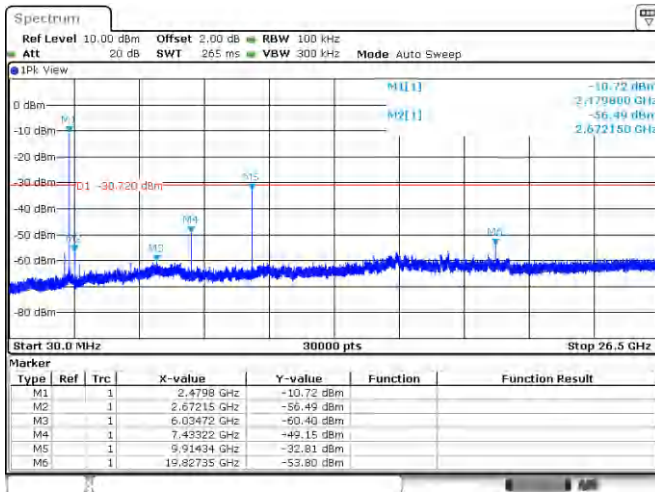


Test Result of Conducted Band Edge, Tx Mode

GFSK

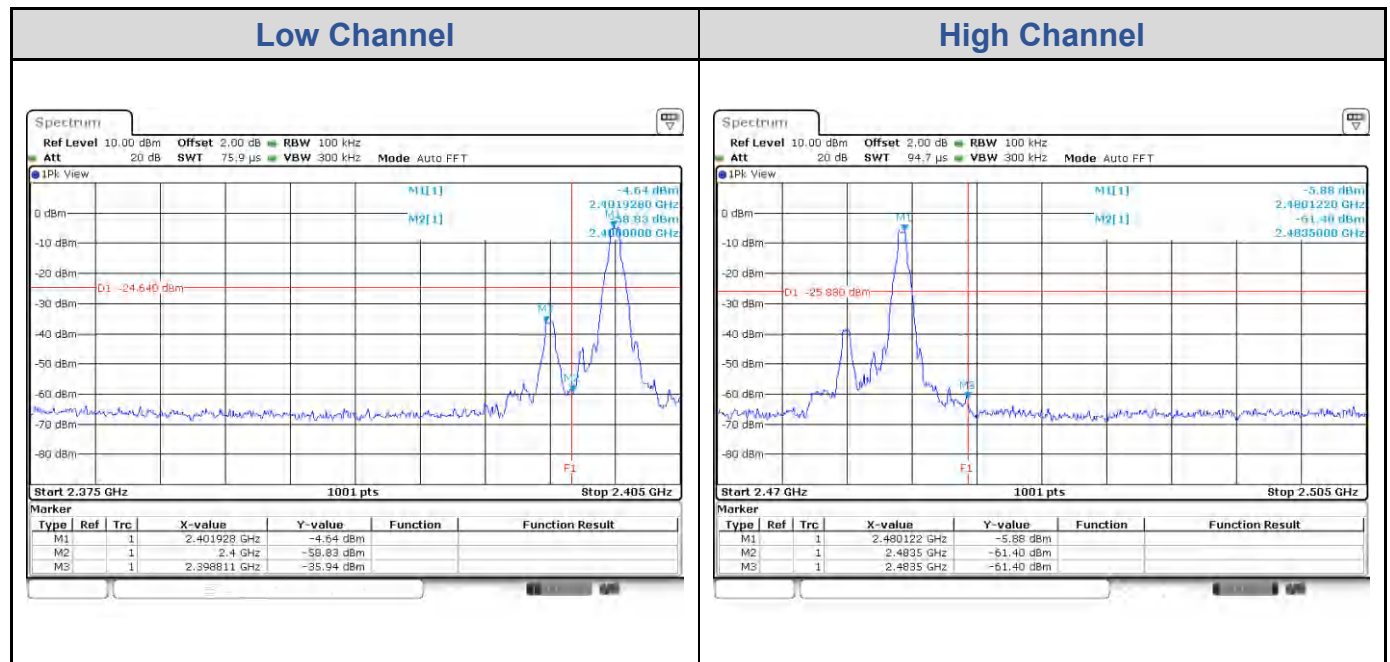


$\pi/4$ -DQPSK

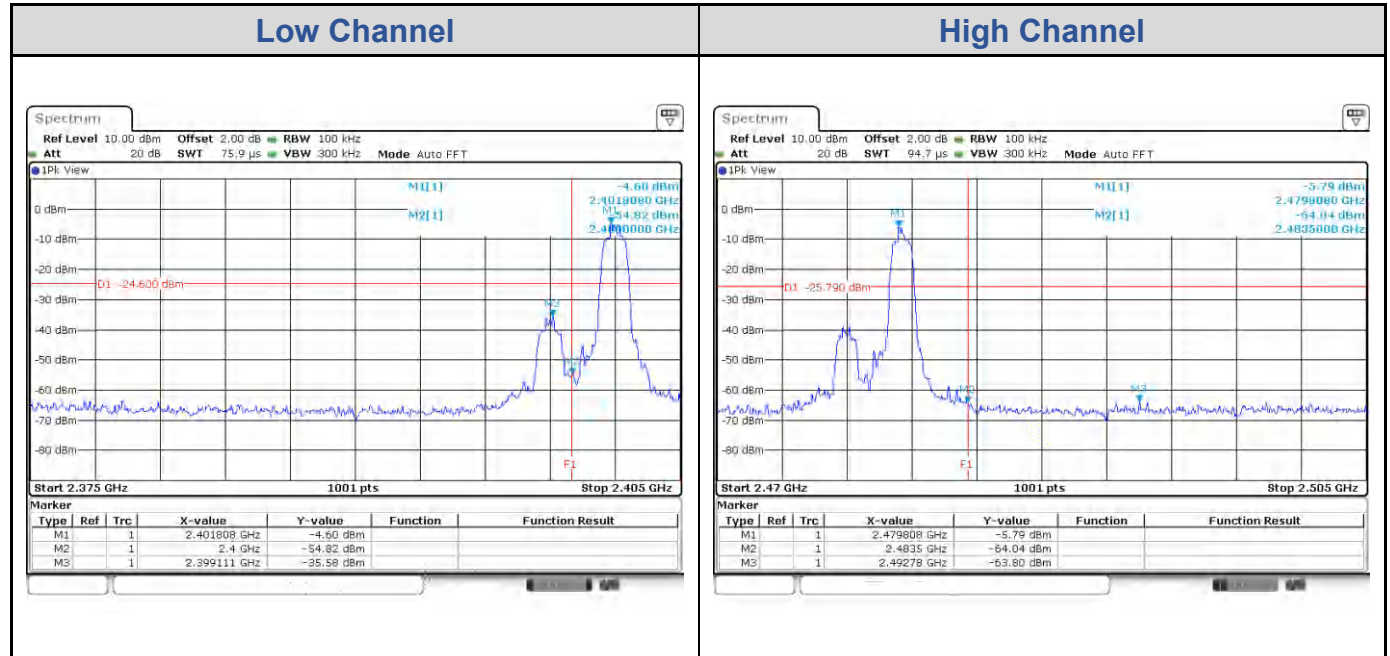


Test Result of Hopping Band Edge

GFSK

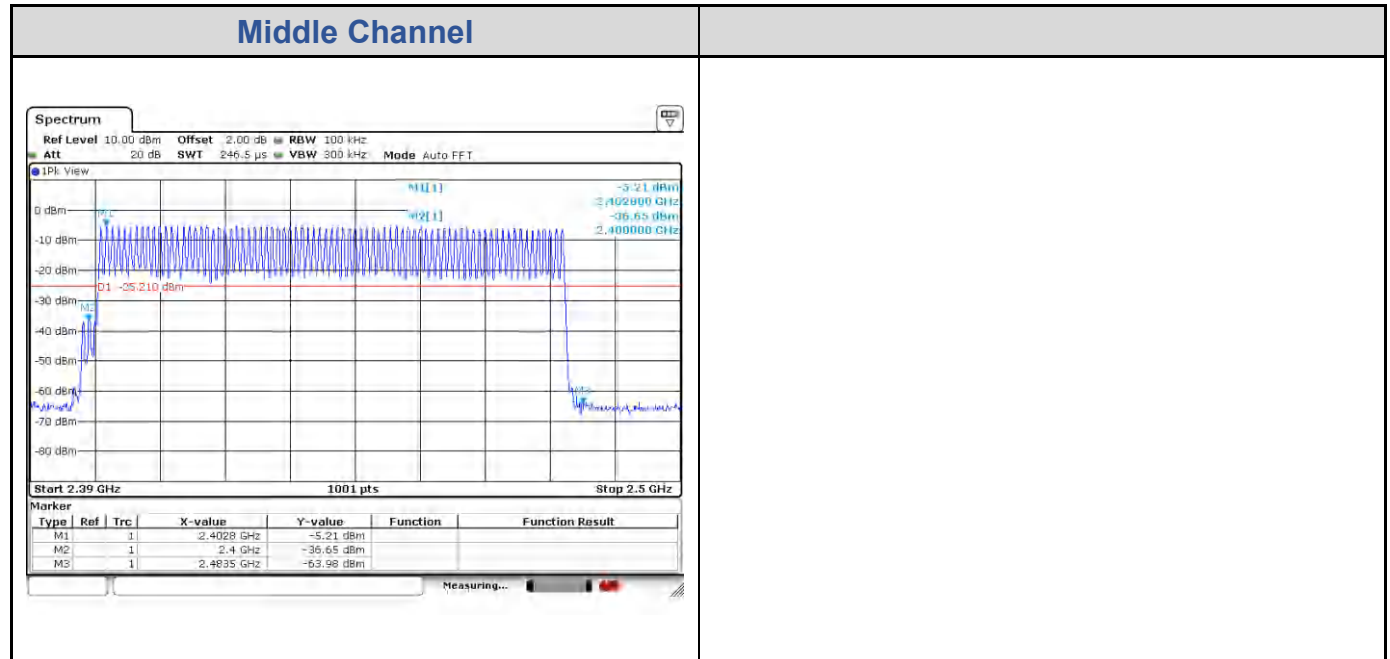

$\pi/4$ -DQPSK

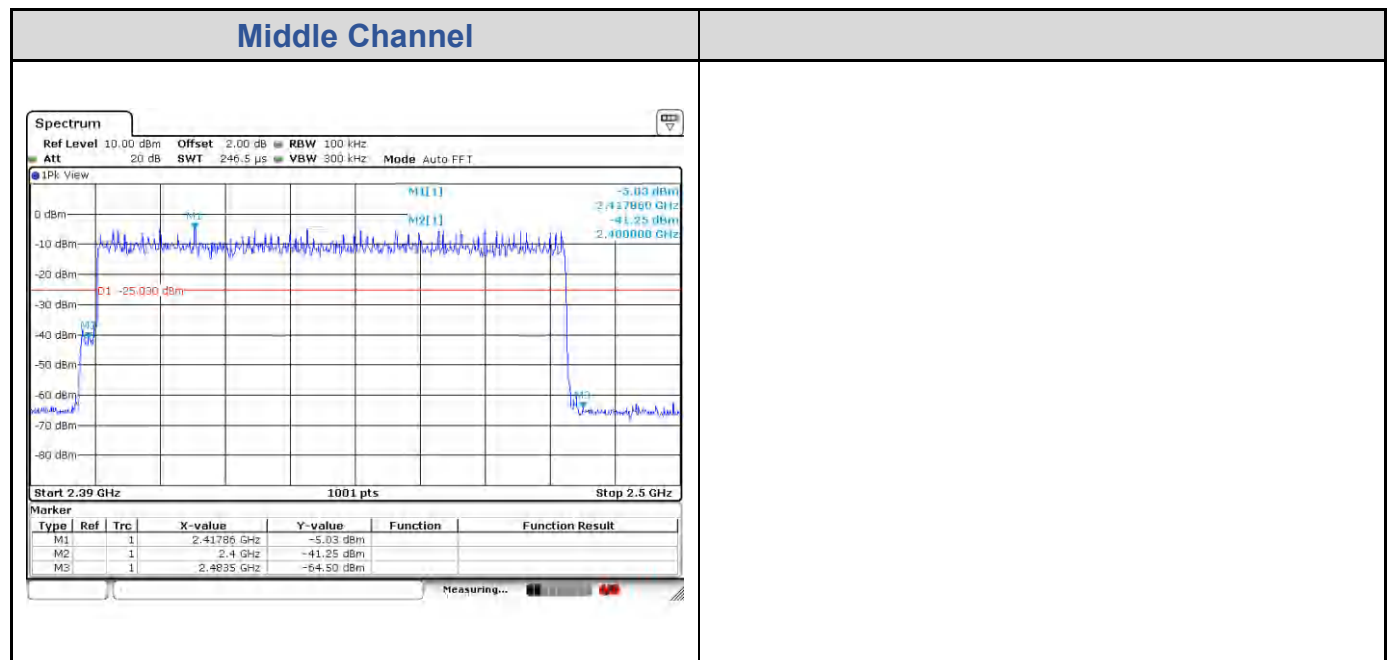


Test Result of Hopping Channel Separation


GFSK

Channel	Channel Frequency (MHz)	Adjacent Channel Separation (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (MHz)	Result
0	2402	1.00	950.00	0.633	Pass
39	2441	1.00	950.00	0.633	Pass
78	2480	1.00	950.00	0.633	Pass


Low Channel

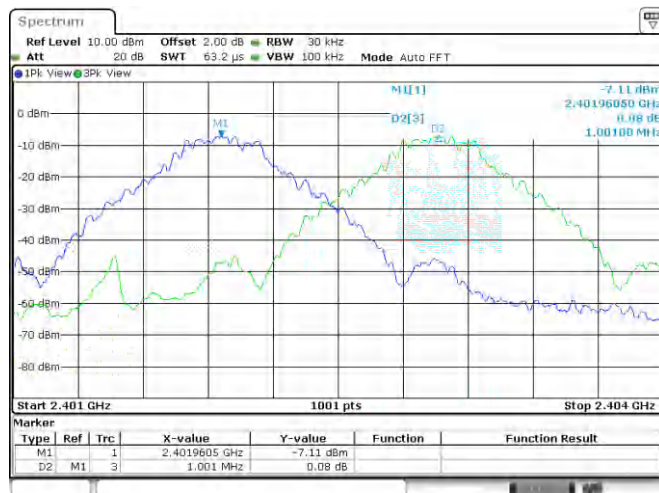

Middle Channel

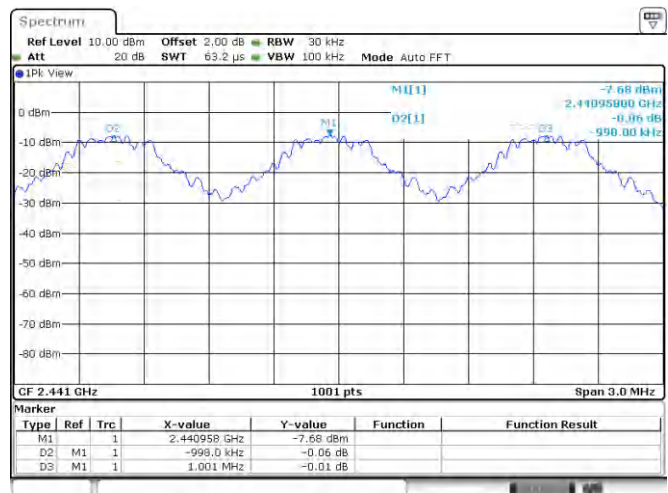


High Channel

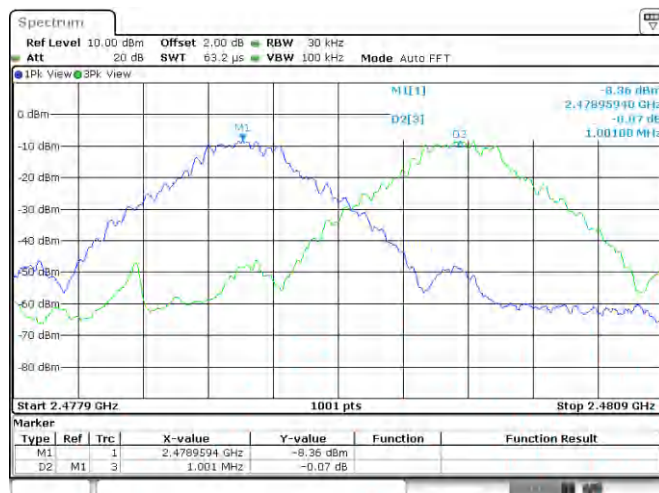


$\pi/4$ -DQPSK

Channel	Channel Frequency (MHz)	Adjacent Channel Separation (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (MHz)	Result
0	2402	1.00	1282.70	0.855	Pass
39	2441	1.00	1279.70	0.853	Pass
78	2480	1.00	1279.70	0.853	Pass


Low Channel

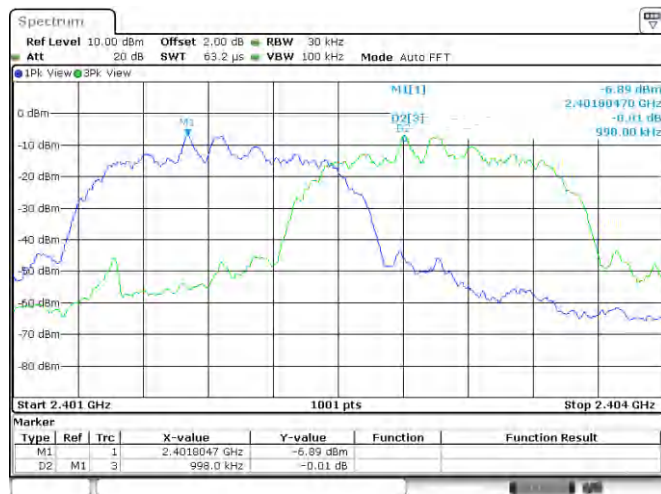

Middle Channel

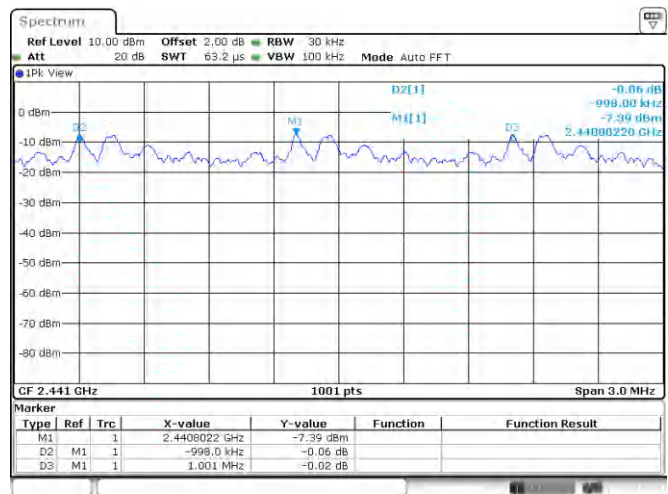


High Channel

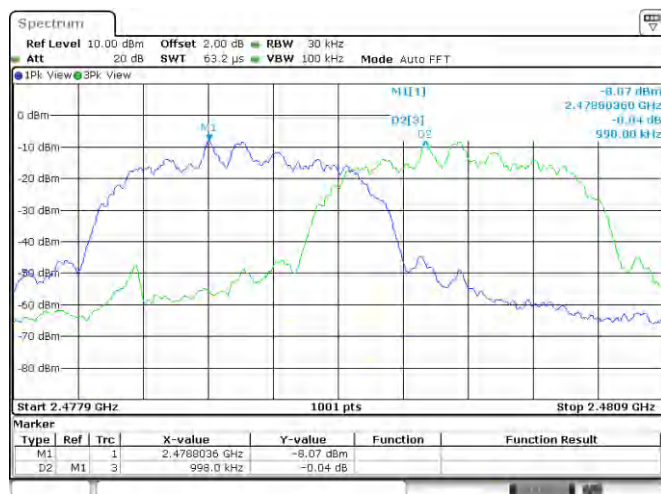

Test Result of Number of Hopping Frequency


Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
2400 to 2483.5 MHz	79	≥15	Pass

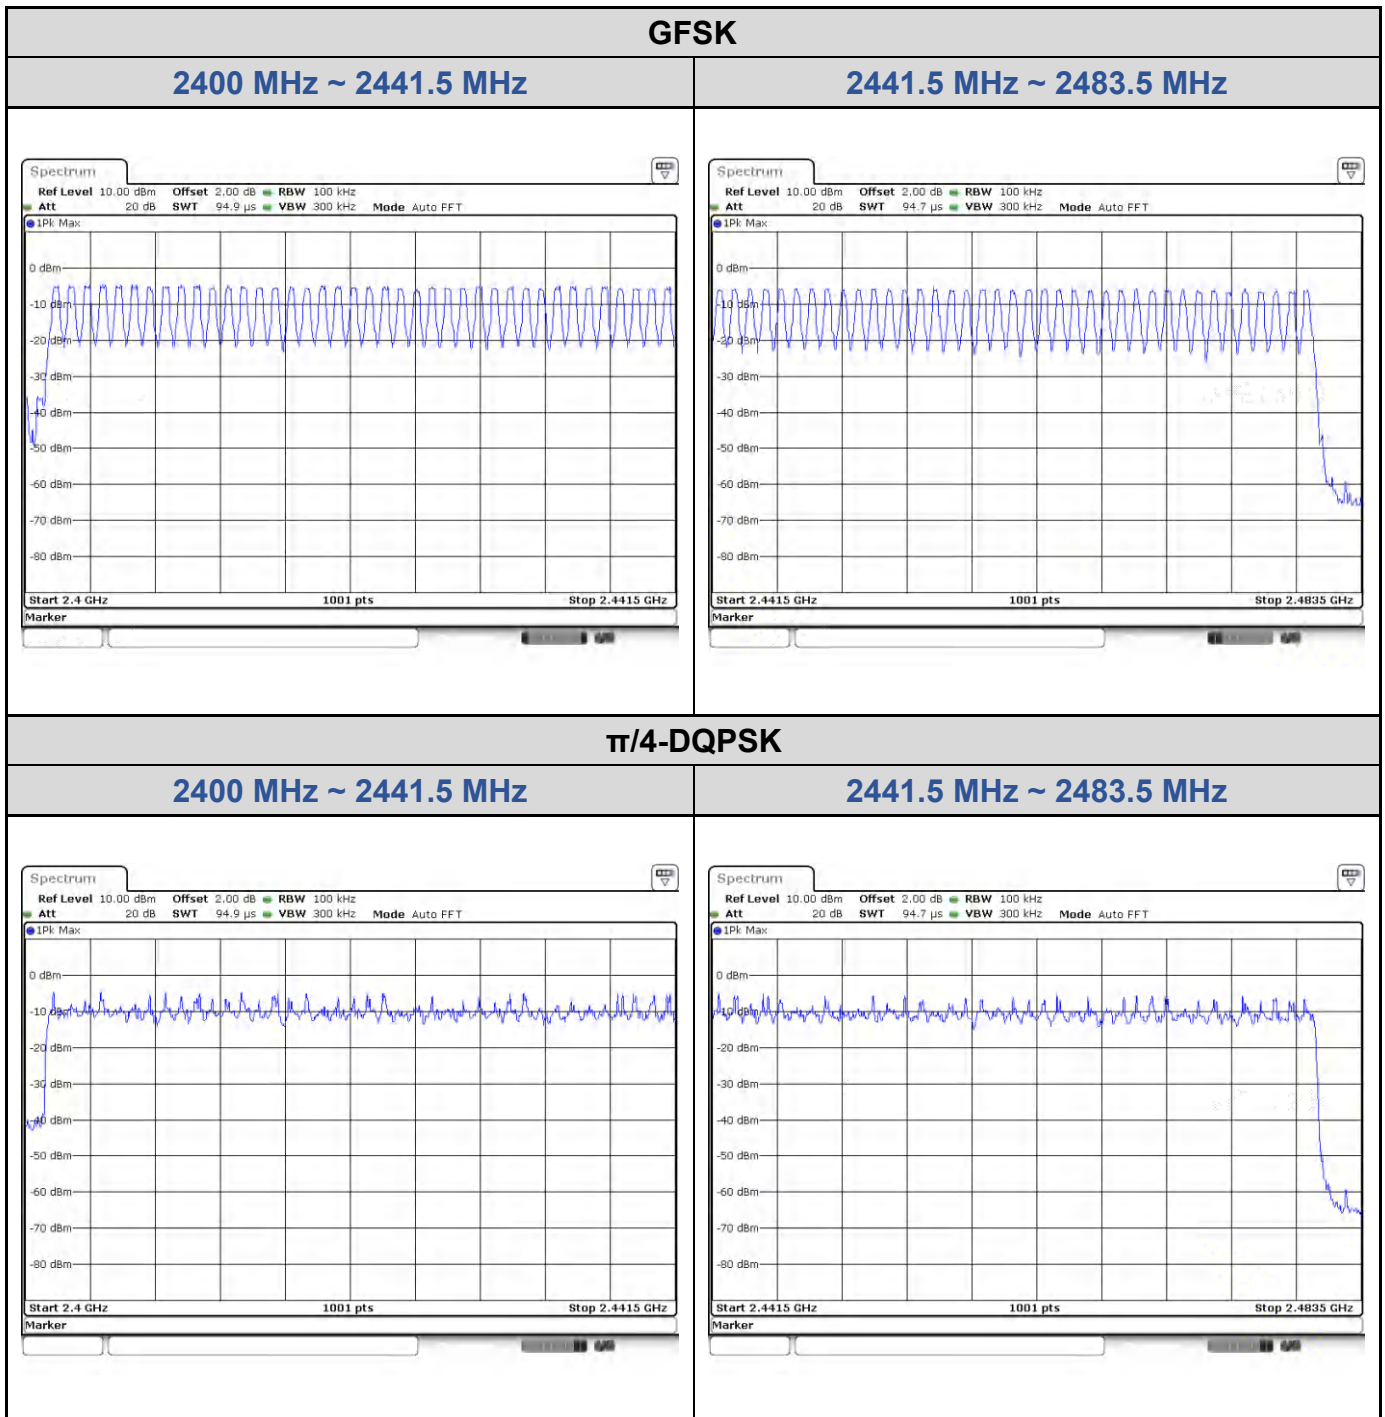

Test Result of Dwell Time


GFSK

Data Mode	Number of transfer in a 31.6 (79Hopping*0.4s)	Package transfer time (msec)	Dwell time (s)	Limit (s)	Result
1DH5	12 (times / 5 sec) * 6.32 = 75.84 times	2.92	0.2214528	0.4	Pass

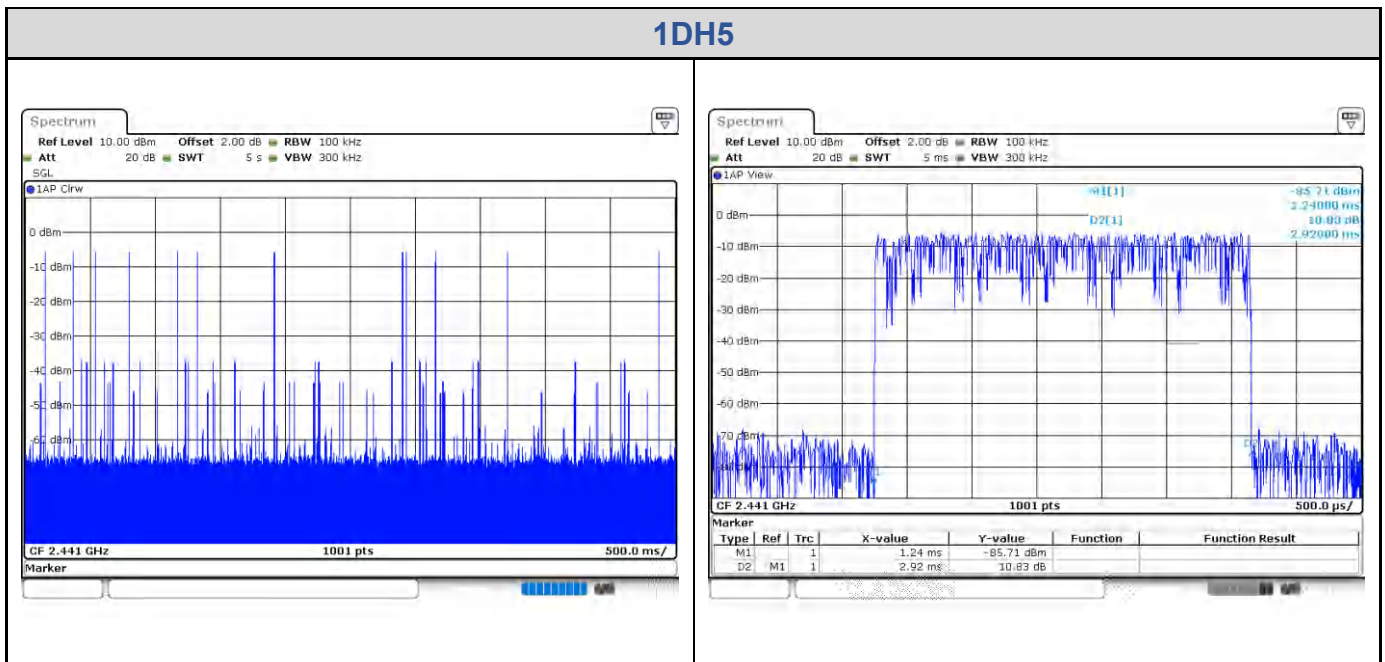

$\pi/4$ -DQPSK

Data Mode	Number of transfer in a 31.6 (79Hopping*0.4s)	Package transfer time (msec)	Dwell time (s)	Limit (s)	Result
2DH5	11 (times / 5 sec) * 6.32 = 69.52 times	2.925	0.203346	0.4	Pass

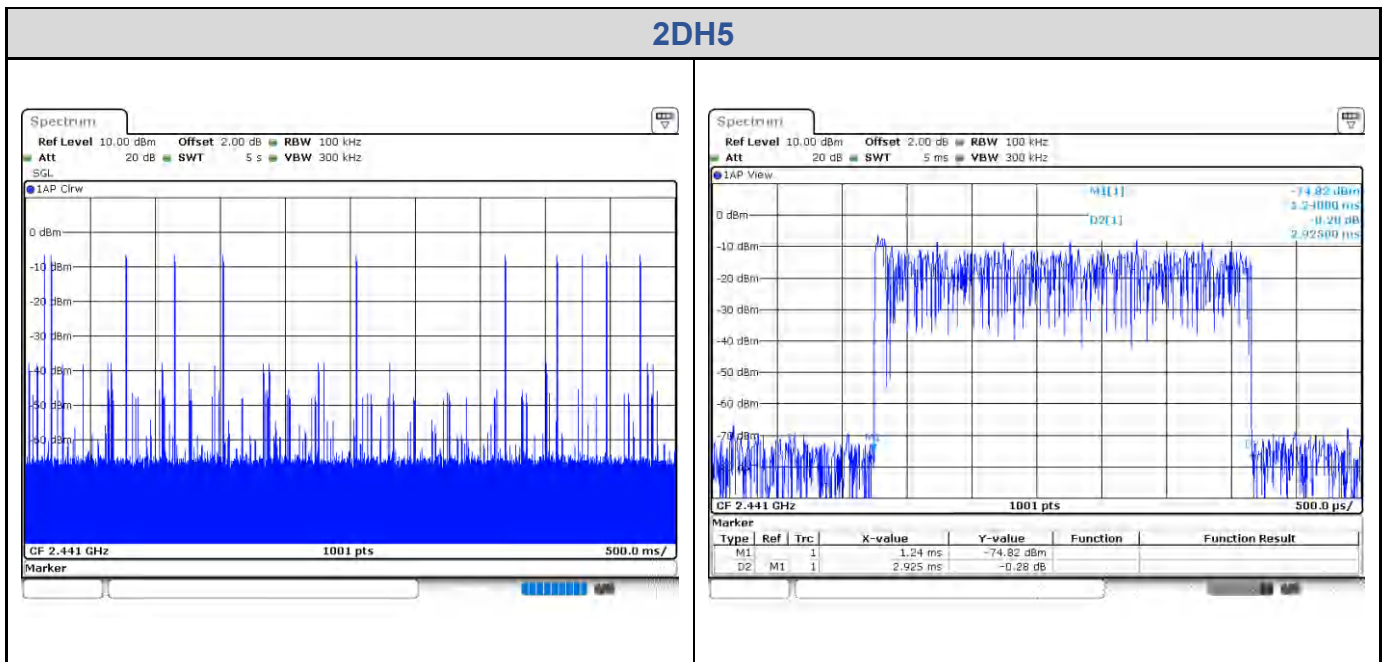

Appendix B: Test Results of Radiated Spurious Emissions & Mains

Conducted Emission Test

Band Edges, 2.31GHz ~ 2.9GHz


GFSK

Low Channel (Horizontal) Peak

Low Channel (Vertical) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliang, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

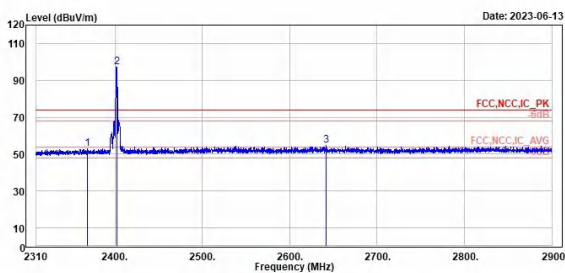

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2368.65	53.06	15.59	37.47	74.00	-20.94	346	157	Peak	Horizontal	
2 *	2402.00	97.26	59.63	37.63	74.00	23.26	346	157	Peak	Horizontal	
3	2641.70	54.78	16.76	38.02	74.00	-19.22	346	157	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliang, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

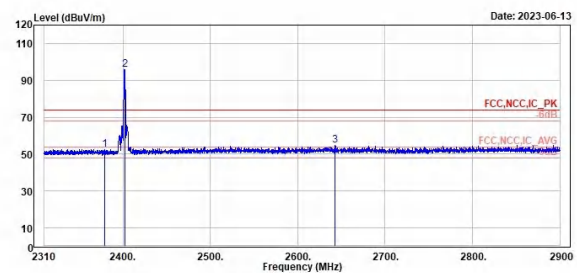

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2379.03	52.62	15.09	37.53	74.00	-21.38	346	263	Peak	Vertical	
2 *	2402.00	95.71	58.08	37.63	74.00	21.71	346	263	Peak	Vertical	
3	2642.64	54.76	16.74	38.02	74.00	-19.24	346	263	Peak	Vertical	


GFSK

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

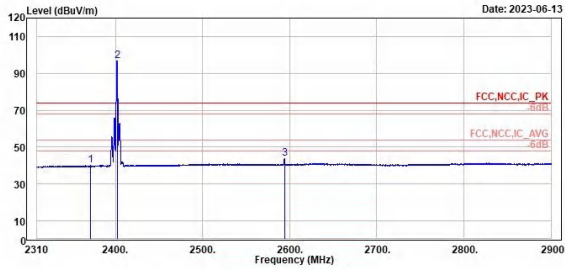

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2371.95	40.14	2.65	37.49	54.00	-13.86		346	157	Average	Horizontal	
2 *	2402.00	96.83	59.20	37.63	54.00	42.83		346	157	Average	Horizontal	
3	2594.14	43.77	5.81	37.96	54.00	-10.23		346	157	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

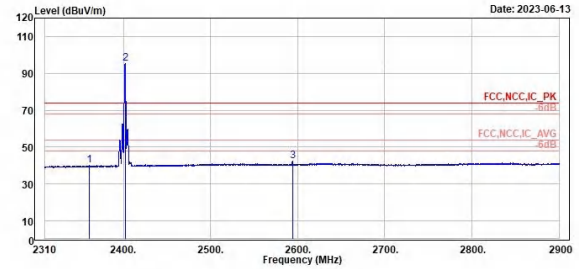

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2360.62	40.11	2.68	37.43	54.00	-13.89		346	263	Average	Vertical	
2 *	2402.00	95.30	57.67	37.63	54.00	41.30		346	263	Average	Vertical	
3	2594.03	42.53	4.57	37.96	54.00	-11.47		346	263	Average	Vertical	


GFSK

Middle Channel (Horizontal) Peak

Middle Channel (Vertical) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

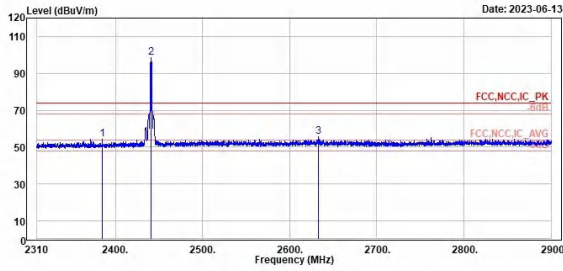

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2385.28	54.44	16.89	37.55	74.00	-19.56		372	167	Peak	Horizontal	
2 *	2441.00	98.61	60.93	37.68	74.00	24.61		372	167	Peak	Horizontal	
3	2633.44	55.79	17.78	38.01	74.00	-18.21		372	167	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

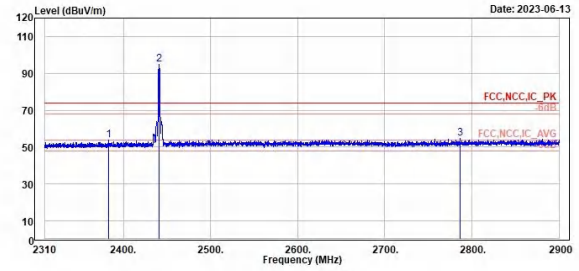


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2382.92	53.73	16.19	37.54	74.00	-20.27		332	58	Peak	Vertical	
2 *	2441.00	94.73	57.05	37.68	74.00	20.73		332	58	Peak	Vertical	
3	2786.25	54.56	16.37	38.19	74.00	-19.44		332	58	Peak	Vertical	


GFSK

Middle Channel (Horizontal) Average

Middle Channel (Vertical) Average

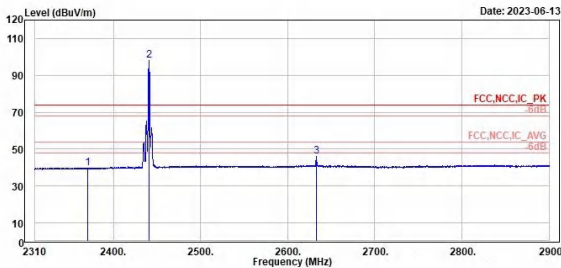

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2370.53	39.91	2.43	37.48	54.00	-14.09		372	167	Average	Horizontal	
2 *	2441.00	98.18	60.50	37.68	54.00	44.18		372	167	Average	Horizontal	
3	2632.97	46.25	8.24	38.01	54.00	-7.75		372	167	Average	Horizontal	

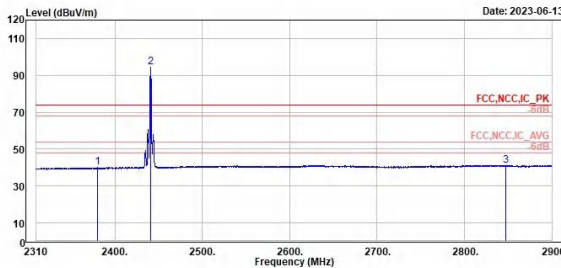

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2380.33	39.94	2.41	37.53	54.00	-14.06		332	58	Average	Vertical	
2 *	2441.00	94.30	56.62	37.68	54.00	40.30		332	58	Average	Vertical	
3	2846.78	41.29	3.12	38.17	54.00	-12.71		332	58	Average	Vertical	


GFSK

High Channel (Horizontal) Average

High Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

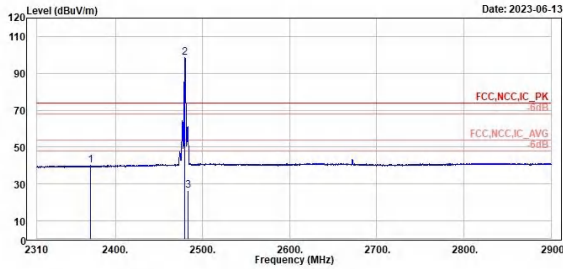

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2371.36	39.94	2.45	37.49	54.00	-14.06	364	139	Average	Horizontal		
2 *	2480.04	98.34	60.55	37.79	54.00	44.34	364	139	Average	Horizontal		
3	2483.46	26.35	-11.45	37.80	54.00	-27.65	364	139	Average	Horizontal	CF	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

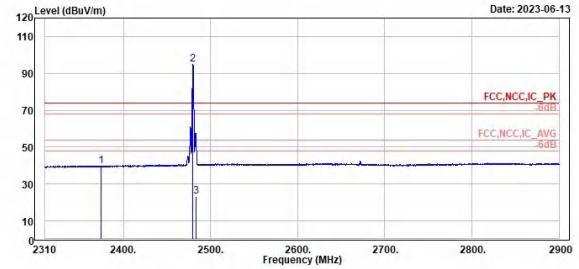


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2374.78	39.91	2.41	37.50	54.00	-14.09	364	268	Average	Vertical		
2 *	2480.00	94.87	57.08	37.79	54.00	40.87	364	268	Average	Vertical		
3	2483.46	23.25	-14.55	37.80	54.00	-30.75	364	268	Average	Vertical	CF	


Π/4-DQPSK

Low Channel (Horizontal) Peak

Low Channel (Vertical) Peak

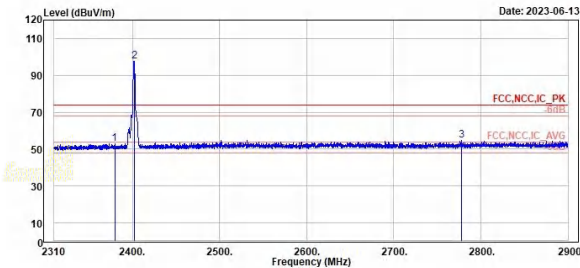

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2379.74	53.00	15.47	37.53	74.00	-21.00		344	165	Peak	Horizontal	
2 *	2402.00	97.54	59.91	37.63	74.00	23.54		344	165	Peak	Horizontal	
3	2777.28	54.83	16.65	38.18	74.00	-19.17		344	165	Peak	Horizontal	

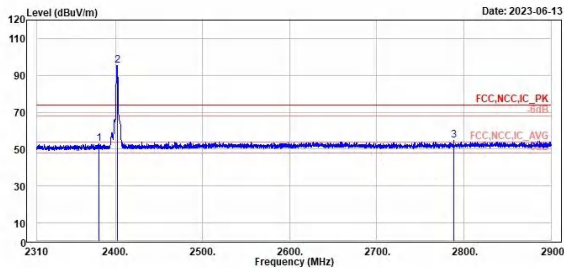

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2380.80	52.87	15.34	37.53	74.00	-21.13		382	255	Peak	Vertical	
2 *	2402.00	95.34	57.71	37.63	74.00	21.34		382	255	Peak	Vertical	
3	2788.61	54.70	16.51	38.19	74.00	-19.30		382	255	Peak	Vertical	


Π/4-DQPSK

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

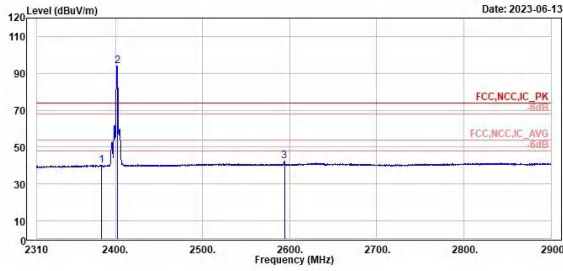

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2383.63	40.14	2.60	37.54	54.00	-13.86		344	165	Average	Horizontal	
2 *	2402.00	94.18	56.55	37.63	54.00	40.18		344	165	Average	Horizontal	
3	2593.91	42.25	4.29	37.96	54.00	-11.75		344	165	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

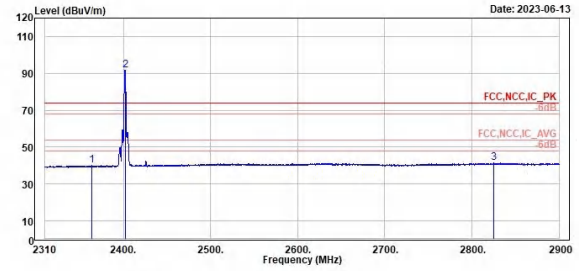


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2363.69	40.02	2.58	37.44	54.00	-13.98		382	255	Average	Vertical	
2 *	2402.00	91.94	54.31	37.63	54.00	37.94		382	255	Average	Vertical	
3	2825.31	41.36	3.18	38.18	54.00	-12.64		382	255	Average	Vertical	


Π/4-DQPSK

Middle Channel (Horizontal) Peak

Middle Channel (Vertical) Peak

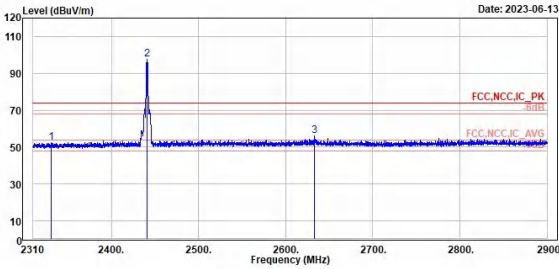

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2331.48	52.56	15.25	37.31	74.00	-21.44		371	150	Peak	Horizontal	
2 *	2441.00	97.78	60.10	37.68	74.00	23.78		371	150	Peak	Horizontal	
3	2632.97	56.06	18.05	38.01	74.00	-17.94		371	150	Peak	Horizontal	

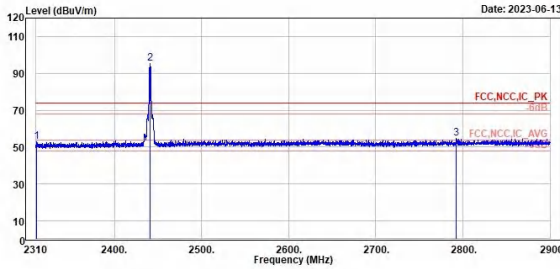

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2310.83	53.08	15.83	37.25	74.00	-20.92		378	32	Peak	Vertical	
2 *	2441.00	95.24	57.56	37.68	74.00	21.24		378	32	Peak	Vertical	
3	2792.62	54.61	16.41	38.20	74.00	-19.39		378	32	Peak	Vertical	


Π/4-DQPSK

Middle Channel (Horizontal) Average

Middle Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

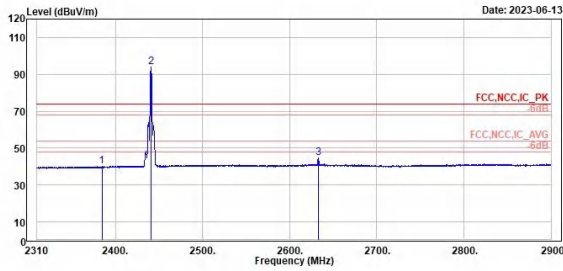

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2384.58	40.13	2.58	37.55	54.00	-13.87	371	150	Average	Horizontal	
2 *	2441.00	94.13	56.45	37.68	54.00	40.13	371	150	Average	Horizontal	
3	2632.97	44.86	6.85	38.01	54.00	-9.14	371	150	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

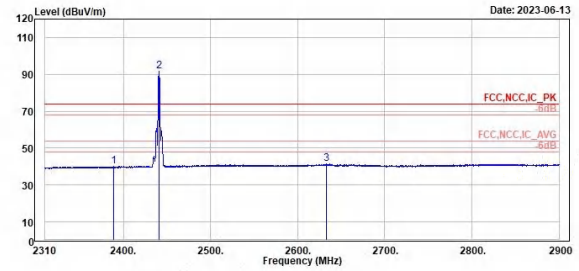

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2388.94	39.93	2.35	37.58	54.00	-14.07	378	32	Average	Vertical	
2 *	2441.00	91.68	53.92	37.68	54.00	37.68	378	32	Average	Vertical	
3	2632.97	41.34	3.33	38.01	54.00	-12.66	378	32	Average	Vertical	


Π/4-DQPSK

High Channel (Horizontal) Peak

High Channel (Vertical) Peak




TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

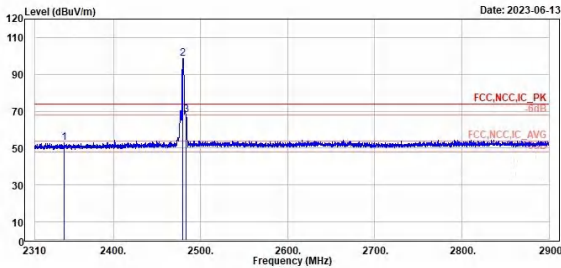

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2343.51	53.08	15.72	37.36	74.00	-20.92	363	143	Peak	Horizontal	
2 *	2480.00	98.57	60.78	37.79	74.00	24.57	363	143	Peak	Horizontal	
3 !	2483.46	68.13	30.33	37.80	74.00	-5.87	363	143	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

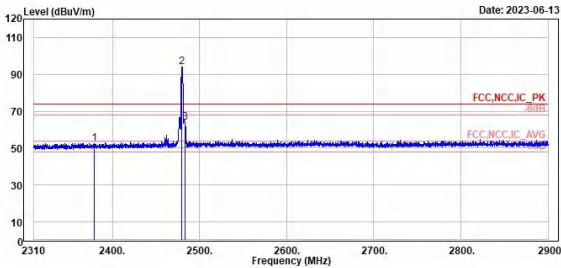


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2379.03	52.66	15.13	37.53	74.00	-21.34	361	71	Peak	Vertical	
2 *	2480.00	94.17	56.38	37.79	74.00	20.17	361	71	Peak	Vertical	
3	2483.46	63.79	25.99	37.80	74.00	-10.21	361	71	Peak	Vertical	

π/4-DQPSK

High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

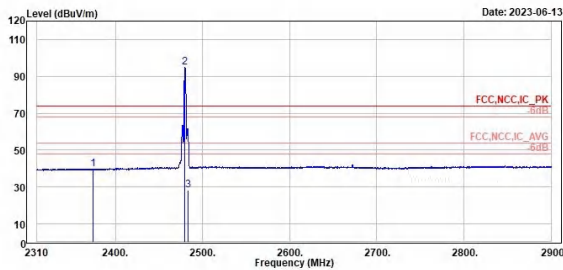


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2374.78	39.92	2.42	37.50	54.00	-14.08	363	143	Average	Horizontal	
2 *	2480.00	94.81	57.02	37.79	54.00	40.81	363	143	Average	Horizontal	
3	2483.46	28.19	-9.61	37.80	54.00	-25.81	363	143	Average	Horizontal	CF

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

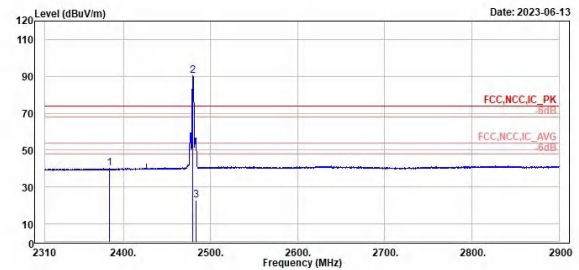

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2383.87	39.99	2.44	37.55	54.00	-14.01	361	71	Average	Vertical	
2 *	2480.00	90.26	52.47	37.79	54.00	36.26	361	71	Average	Vertical	
3	2483.46	23.03	-14.77	37.80	54.00	-30.97	361	71	Average	Vertical	CF

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


GFSK

Low Channel(Open) 9kHz~150kHz

Low Channel(Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linshui Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

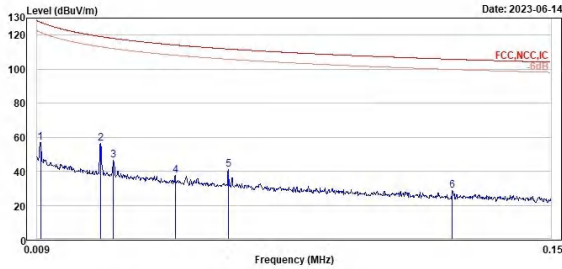

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	0.01	56.94	39.22	17.72	127.60	-70.66	100	255	Peak	Open	
2	0.03	56.28	37.33	18.95	119.13	-62.85	100	78	Peak	Open	
3	0.03	46.43	27.22	19.21	118.05	-71.62	100	153	Peak	Open	
4	0.05	37.43	18.29	19.14	114.16	-76.73	100	224	Peak	Open	
5	0.06	40.95	22.00	18.95	111.82	-70.97	100	198	Peak	Open	
6	0.12	28.83	10.81	18.02	105.80	-75.97	100	143	Peak	Open	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linshui Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

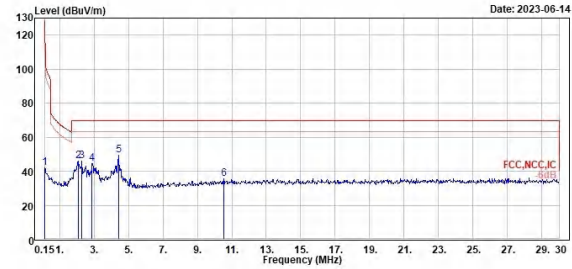


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	0.15	41.94	23.81	18.13	104.08	-62.14	100	28	Peak	Open	
2	2.09	45.88	26.50	19.38	69.50	-23.62	100	159	Peak	Open	
3	2.30	45.96	26.52	19.44	69.50	-23.54	100	298	Peak	Open	
4	2.90	44.64	25.04	19.60	69.50	-24.06	100	163	Peak	Open	
5	4.42	49.50	30.05	19.53	69.50	-19.92	100	136	Peak	Open	
6	10.54	35.64	14.05	21.59	69.50	-33.86	100	101	Peak	Open	

Charge Mode

Low Channel(Open) 9kHz~150kHz



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

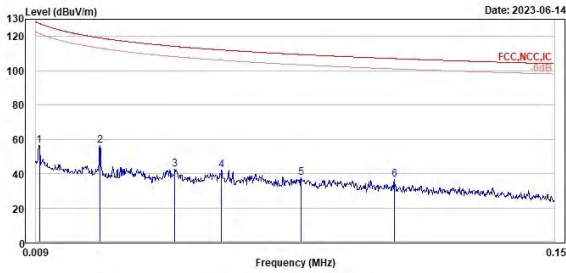


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.01	56.58	38.86	17.72	127.60	-71.02	100	61 Peak	Open	
2	0.03	56.28	37.33	18.95	119.13	-62.85	100	172 Peak	Open	
3	0.05	42.30	23.16	19.14	114.19	-71.89	100	207 Peak	Open	
4	0.06	41.85	22.96	18.89	112.11	-70.26	100	187 Peak	Open	
5	0.08	37.69	19.32	18.37	109.42	-71.73	100	137 Peak	Open	
6	0.11	36.38	18.42	17.96	107.06	-70.68	100	208 Peak	Open	

Low Channel(Open) 150kHz~30MHz



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

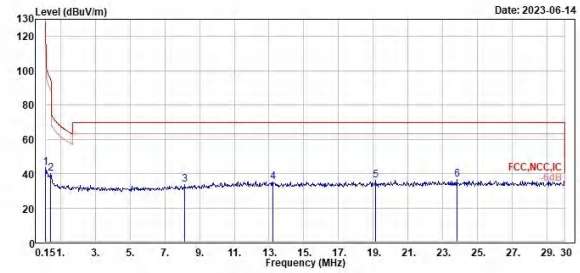

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.15	43.46	25.33	18.13	104.08	-60.62	100	180 Peak	Open	
2	0.45	40.19	21.37	18.82	94.57	-54.38	100	198 Peak	Open	
3	8.15	33.60	12.81	20.79	69.50	-35.90	100	106 Peak	Open	
4	13.22	35.16	13.38	21.78	69.50	-34.34	100	332 Peak	Open	
5	19.10	36.25	14.07	22.18	69.50	-33.25	100	344 Peak	Open	
6	23.79	36.77	14.50	22.27	69.50	-32.73	100	66 Peak	Open	


Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

GFSK

Low Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

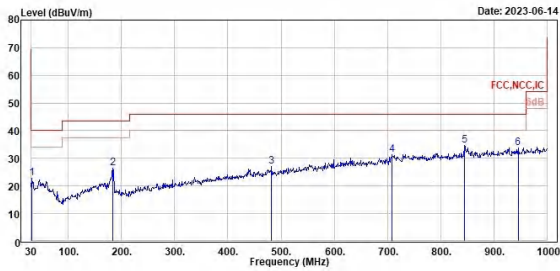

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	31.94	22.94	31.74	-8.88	40.00	-17.06		400	314	Peak	Horizontal	
2	184.23	26.54	35.15	-8.61	43.50	-16.96		279	126	Peak	Horizontal	
3	482.02	27.09	30.05	-2.96	46.00	-18.91		400	353	Peak	Horizontal	
4	709.00	31.46	29.74	1.72	46.00	-14.54		100	331	Peak	Horizontal	
5	844.00	34.56	30.64	3.72	46.00	-11.44		200	192	Peak	Horizontal	
6	945.68	33.89	29.00	4.89	46.00	-12.11		200	96	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

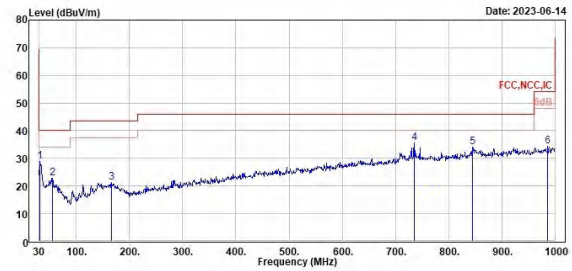


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	31.94	29.03	37.83	-8.88	40.00	-10.97		100	220	Peak	Vertical	
2	55.22	22.96	30.15	-7.19	40.00	-17.04		134	360	Peak	Vertical	
3	165.00	21.36	28.30	-6.94	43.50	-22.14		100	80	Peak	Vertical	
4	736.16	35.71	33.72	1.99	46.00	-10.29		200	128	Peak	Vertical	
5	844.00	33.93	30.21	3.72	46.00	-12.07		400	216	Peak	Vertical	
6	986.42	34.37	28.74	5.63	54.00	-19.63		100	252	Peak	Vertical	

Charge Mode

Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Feniliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

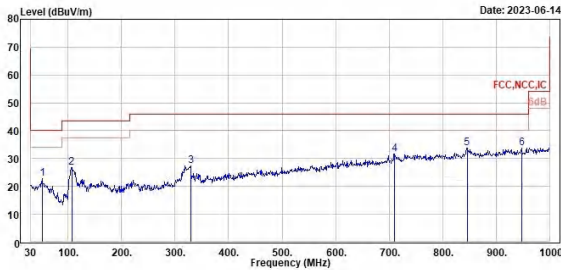


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	51.34	22.82	29.68	-6.86	40.00	-17.18	100	212 Peak	Horizontal	
2	106.63	26.84	38.11	-11.27	43.50	-16.66	300	151 Peak	Horizontal	
3	328.76	27.48	33.22	-5.74	46.00	-18.52	100	150 Peak	Horizontal	
4	709.97	31.76	38.06	1.70	46.00	-14.24	400	168 Peak	Horizontal	
5	845.77	33.73	38.03	3.70	46.00	-12.27	300	326 Peak	Horizontal	
6	947.62	33.88	28.98	4.90	46.00	-12.12	400	176 Peak	Horizontal	

Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Feniliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

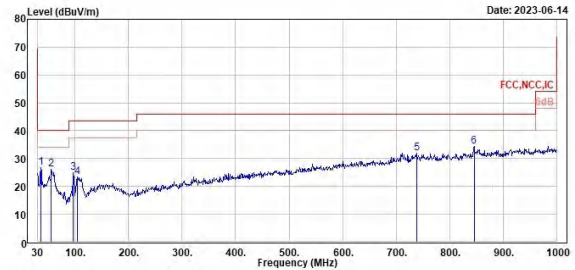

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	35.82	26.69	35.43	-8.74	40.00	-13.31	100	14 Peak	Vertical	
2	55.22	26.27	33.46	-7.19	40.00	-13.73	100	96 Peak	Vertical	
3	96.93	24.90	37.50	-12.60	43.50	-18.60	150	360 Peak	Vertical	
4	103.72	23.35	34.88	-11.53	43.50	-20.15	100	335 Peak	Vertical	
5	738.10	31.92	29.75	2.17	46.00	-14.00	233	306 Peak	Vertical	
6	845.77	34.27	30.57	3.70	46.00	-11.73	300	319 Peak	Vertical	


Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

GFSK


Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

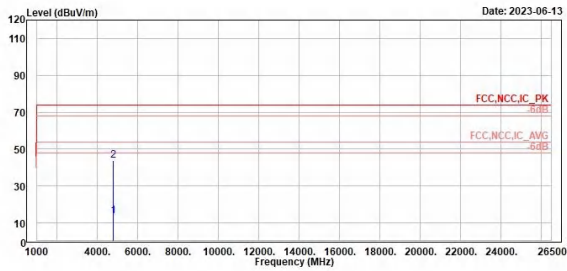

TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

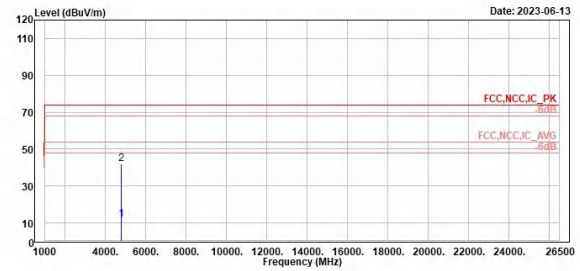


GFSK

Middle Channel (Horizontal)

Middle Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

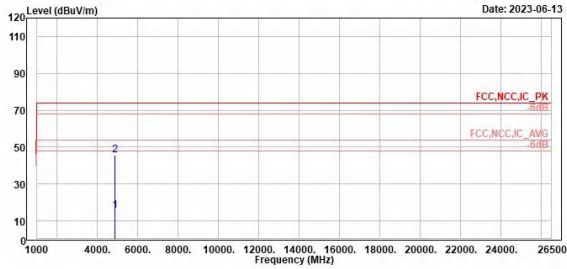

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4882.00	15.50	25.84	-10.34	54.00	-38.50	383	12	Average	Horizontal	CF	
2	4882.00	45.60	55.94	-10.34	74.00	-28.40	383	12	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

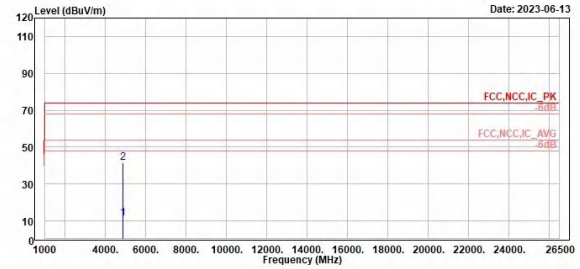

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4882.00	11.38	21.72	-10.34	54.00	-42.62	400	308	Average	Vertical	CF	
2	4882.00	41.48	51.82	-10.34	74.00	-32.52	400	308	Peak	Vertical		


GFSK

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

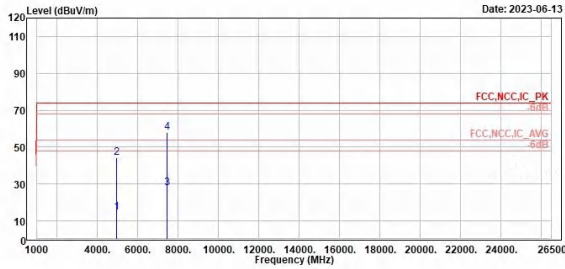

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4968.00	14.39	24.61	-10.22	54.00	-39.61	100	320	Average	Horizontal	CF	
2	4968.00	44.40	54.62	-10.22	74.00	-29.60	100	320	Peak	Horizontal		
3	7440.00	28.05	36.37	-8.32	54.00	-25.95	100	119	Average	Horizontal	CF	
4	7440.00	58.16	66.48	-8.32	74.00	-15.84	100	119	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

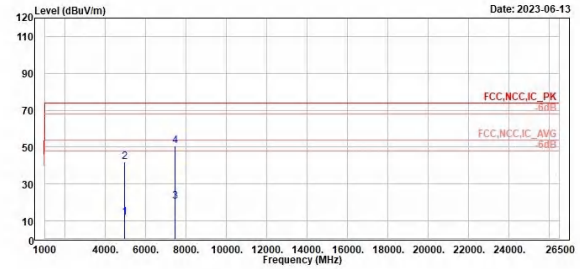

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4968.00	11.77	21.99	-10.22	54.00	-42.23	400	268	Average	Vertical	CF	
2	4968.00	41.88	52.10	-10.22	74.00	-32.12	400	268	Peak	Vertical		
3	7440.00	20.42	28.74	-8.32	54.00	-33.58	400	302	Average	Vertical	CF	
4	7440.00	50.52	58.84	-8.32	74.00	-23.48	400	302	Peak	Vertical		


Π/4-DQPSK

Low Channel (Horizontal)


Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

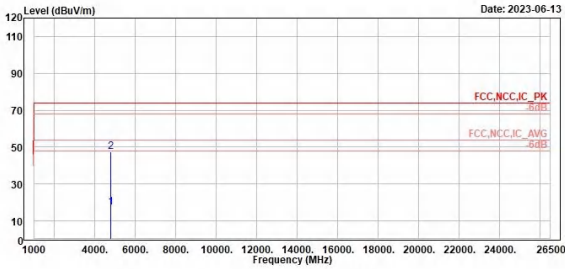

TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

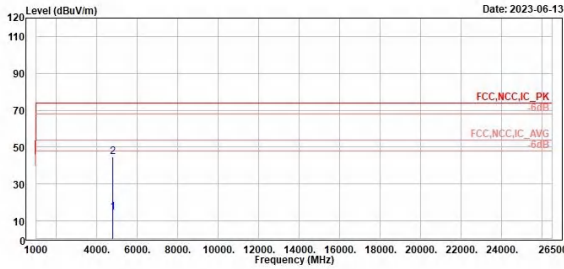


Π/4-DQPSK

Middle Channel (Horizontal)

Middle Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

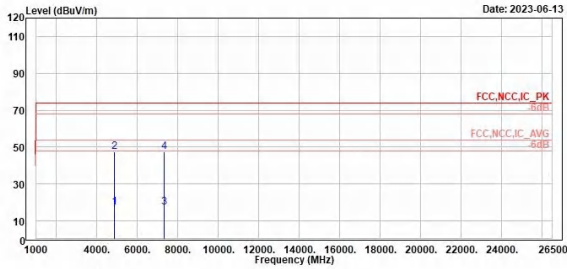

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4882.00	17.31	27.65	-10.34	54.00	-36.69	400	315	Average	Horizontal	CF	
2	4882.00	47.41	57.75	-10.34	74.00	-26.59	400	315	Peak	Horizontal		
3	7323.00	17.51	26.02	-8.51	54.00	-36.49	100	174	Average	Horizontal	CF	
4	7323.00	47.61	56.12	-8.51	74.00	-26.39	100	174	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

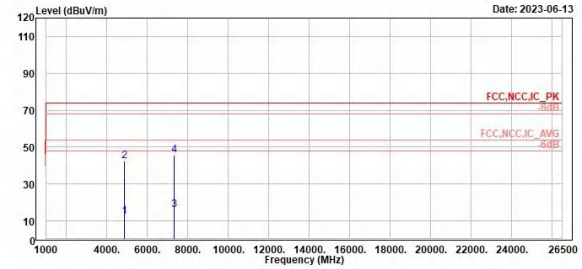

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4882.00	12.41	22.75	-10.34	54.00	-41.59	300	156	Average	Vertical	CF	
2	4882.00	42.51	52.85	-10.34	74.00	-31.49	300	156	Peak	Vertical		
3	7323.00	15.76	24.27	-8.51	54.00	-38.24	400	43	Average	Vertical	CF	
4	7323.00	45.85	54.36	-8.51	74.00	-28.15	400	43	Peak	Vertical		


Π/4-DQPSK

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

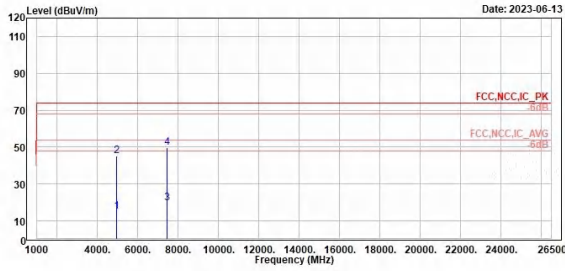

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4968.00	14.97	25.19	-10.22	54.00	-39.03		100	126	Average	Horizontal	CF
2	4968.00	45.07	55.29	-10.22	74.00	-28.93		100	126	Peak	Horizontal	
3	7440.00	19.59	27.91	-8.32	54.00	-34.41		280	360	Average	Horizontal	CF
4	7440.00	49.69	58.01	-8.32	74.00	-24.31		280	360	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

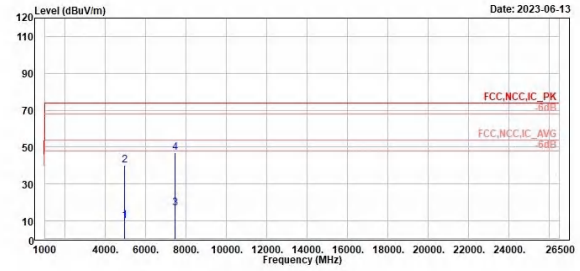

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4968.00	10.03	20.25	-10.22	54.00	-43.97		100	43	Average	Vertical	CF
2	4968.00	40.13	50.35	-10.22	74.00	-33.87		100	43	Peak	Vertical	
3	7440.00	16.88	25.20	-8.32	54.00	-37.12		224	44	Average	Vertical	CF
4	7440.00	46.98	55.30	-8.32	74.00	-27.02		224	44	Peak	Vertical	

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

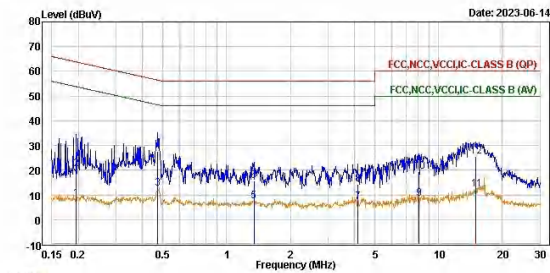

Trace: 1	Freq	Level	Read	Factor	Limit	Over	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.20	8.52	-1.10	9.62	53.81	-45.29	Average	line1	
2	0.20	20.50	10.88	9.62	63.81	-43.31	QP	line1	
3	0.47	12.59	2.96	9.63	46.44	-33.85	Average	line1	
4	0.47	27.48	17.85	9.63	56.44	-28.96	QP	line1	
5	1.34	7.47	-2.17	9.64	46.00	-38.53	Average	line1	
6	1.34	15.65	6.01	9.64	56.00	-40.35	QP	line1	
7	4.15	7.02	-2.66	9.68	46.00	-38.98	Average	line1	
8	4.15	14.41	4.73	9.68	56.00	-41.59	QP	line1	
9	8.09	8.50	-1.24	9.74	50.00	-41.50	Average	line1	
10	8.09	19.55	9.81	9.74	60.00	-40.45	QP	line1	
11	15.00	12.25	2.49	9.76	50.00	-37.75	Average	line1	
12	15.00	25.43	15.67	9.76	60.00	-34.57	QP	line1	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

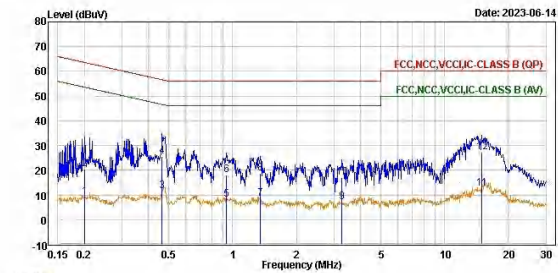

Trace: 1	Freq	Level	Read	Factor	Limit	Over	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.20	9.04	-0.58	9.62	53.56	-44.52	Average	neutral	
2	0.20	20.52	10.90	9.62	63.56	-42.66	QP	neutral	
3	0.47	11.53	1.90	9.63	46.60	-35.07	Average	neutral	
4	0.47	25.60	15.97	9.63	56.60	-31.00	QP	neutral	
5	0.99	8.26	-1.38	9.64	46.00	-37.74	Average	neutral	
6	0.99	18.02	8.38	9.64	56.00	-37.98	QP	neutral	
7	1.35	8.31	-1.33	9.64	46.00	-37.69	Average	neutral	
8	1.35	18.75	9.11	9.64	56.00	-37.25	QP	neutral	
9	3.28	7.06	-2.62	9.68	46.00	-38.94	Average	neutral	
10	3.28	16.97	7.29	9.68	56.00	-39.03	QP	neutral	
11	14.93	12.72	2.89	9.83	50.00	-37.28	Average	neutral	
12	14.93	27.28	17.45	9.83	60.00	-32.72	QP	neutral	