



TEST REPORT

Applicant: Shenzhen Youdisi E-Commerce Co., Ltd.
Address of Applicant: Room 402, Building A, Jiewei Industrial Zone, Pingxin North Road 53, Pinghu Street, Longgang, Shenzhen, Guangdong, China
Manufacturer/Factory: Shenzhen Youdisi E-Commerce Co., Ltd.
Address of Manufacturer: Room 402, Building A, Jiewei Industrial Zone, Pingxin North Road 53, Pinghu Street, Longgang, Shenzhen, Guangdong, China
Product Name: Laptop
Model No.: YEPBOOK,XBOOK-2,XBOOK-3,FLEXONE,A6,T1,YEPBOOK-2,YEPBOOK-3,YEPBOOK-4,XBOOK-4,A1
Trade Mark: KUU
FCC ID: 2BCD7-YEPBOOK
IC 31109-YEPBOOK
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-Gen Issue 5,RSS-247 Issue 2
Date of Test: Jul.17, 2023-Aug.03, 2023
Date of report issued: Aug.24, 2023
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Reviewed by:

Approved by:

Project Engineer

Project Manager

Authorized Signature



Report Revision History		
Report No.	Description	Issue Date
ET-23070831E02	Original	Aug.24, 2023



Contents

Page

1. TEST SUMMARY	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 TEST MODE	7
2.3 DESCRIPTION OF SUPPORT UNITS	7
2.4 DEVIATION FROM STANDARDS	7
2.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
2.6 TEST FACILITY	7
2.7 TEST LOCATION	7
2.8 ADDITIONAL INSTRUCTIONS	7
3. TEST INSTRUMENTS LIST	8
4. TEST RESULTS AND MEASUREMENT DATA	9
4.1 ANTENNA REQUIREMENT	9
4.2 CONDUCTED EMISSIONS	10
4.3 CONDUCTED OUTPUT POWER	13
4.4 6dB BANDWIDTH & 99% OCCUPY BANDWIDTH	15
4.5 POWER SPECTRAL DENSITY	20
4.6 BAND EDGES	23
Conducted Emission Method	23
Radiated Emission Method	26
4.7 SPURIOUS EMISSION	31
Conducted Emission Method	31
Radiated Emission Method	36
5. TEST SETUP PHOTO	53
6. EUT CONSTRUCTIONAL DETAILS	53

1. Test Summary

Test Item	Section	Result	Test by
Antenna requirement	FCC part 15.203/15.247 (c) RSS-Gen §6.8	Pass	/
AC Power Line Conducted Emission	FCC part 15.207 RSS-Gen §8.8	Pass	Qiao Li
Conducted Output Power&EIRP	FCC part 15.247 (b)(3) RSS-247 §5.4.b	Pass	Yvan Fan
6dB Bandwidth & 99% OCB	FCC part 15.247 (a)(2) RSS-247 §5.2.a RSS-Gen § 6.7	Pass	Yvan Fan
Power Spectral Density	FCC part 15.247 (e) RSS-247 §5.2.b	Pass	Yvan Fan
Band Edge	FCC part 15.247(d) RSS-247 §5.5	Pass	Yvan Fan
Spurious Emission	FCC part 15.205/15.209 RSS-Gen §8.9 §8.10	Pass	Qiao Li

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Uncertainty Criterion	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±5%	±0.55%	(1)
RF output power, conducted	±1.5dB	±0.99dB	(1)
Power Spectral Density, conducted	±3dB	±0.61dB	(1)
Unwanted Emissions, conducted	±3dB	±0.64dB	(1)
AC Power Line Conducted Emission	±6dB	± 3.02 dB	(1)
Radiated emissions Below 1GHz	±6dB	±4.30 dB	(1)
Radiated emissions Above 1GHz	±6dB	±4.35 dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

2. General Information

2.1 General Description of EUT

Product Name:	Laptop
Model No.:	YEPBOOK,XBOOK-2,XBOOK-3,FLEXONE,A6,T1,YEPBOOK-2, YEPBOOK-3,YEPBOOK-4,XBOOK-4,A1
Test Model:	YEPBOOK
Difference of model(s)	All the models are the same circuit and RF module, except the model names.
Hardware version:	V2.1
Software version:	V2.1
Sample(s) Status	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integrated antenna
Antenna gain:	2.66 dBi(Declare by applicant) Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.
Battery:	7.4V 5000mAh
Power supply:	DC 7.6V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode EUT was test with >98% duty cycle at its maximum power control level.
Remark: For battery operated equipment, the EUT was performed using a new DC 7.6V battery.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
1	Power supply	Shen Zhen Shi Yingyuan Electronics Co.,Ltd	ICP36-120-3000	/

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064
IC Company Number:	28440
CAB identifier:	CN0132

2.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392
Fax:	+86 755 27219460

2.8 Additional Instructions

Test Software	DRTU
Power level setup	Default

3. Test Instruments list

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100605	2023.3.02	2024.3.01
2	EMI Test Receiver	Rohde&schwarz	ESCI3	102696	2023.3.02	2024.3.01
3	Loop Antenna	schwarabeck	FMZB 1519 B	FMZB 1519 B	2022.3.11	2024.3.10
4	Broadband antenna	schwarabeck	VULB9168	1064	2022.3.11	2024.3.10
5	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2022.3.11	2024.3.10
6	amplifier	EMtrace	RP01A	50117	2023.3.02	2024.3.01
7	Artificial power network	schwarabeck	NSLK8127	8127483	2023.3.02	2024.3.01
8	Artificial power network	ETS	3186/2NM	1132	2023.3.02	2024.3.01
9	10dB attenuator	HUBER+SUHNER	10dB	/	2023.3.02	2024.3.01
10	amplifier	Space-Dtronics	EWLAN0118 G-P40	19113001	2023.3.02	2024.3.01
11	Filter	Xingbo	XBLBQ-GTA19	210410-3-1	2023.3.06	2024.3.05
12	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2023.3.02	2024.3.01
13	Power detector box	MWRFtest	MW100-PSB	MW201020JYT	2022.11.18	2023.11.17
14	Power meter	Rohde&Schwarz	NRP-Z11	1138.3004.02-117725-vh	2023.03.30	2024.03.29

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFtest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4. Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi. RSS-Gen 6.8: The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).	
EUT Antenna:	
<i>The antennas are Integrated antenna, the best case gain of the antennas are 2.66 dBi, reference to the appendix II for details</i>	

4.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207,RSS-Gen §8.8						
Test Method:	ANSI C63.10:2013 and RSS-Gen						
Test Frequency Range:	150KHz to 30MHz						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)	Limit (dBuV)					
		Quasi-peak			Average		
	0.15-0.5	66 to 56*			56 to 46*		
	0.5-5	56			46		
	5-30	60			50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane 40cm LISN AUX Equipment E.U.T Test table/Insulation plane 80cm LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 3.0 for details						
Test mode:	Refer to section 2.2 for details						
Test environment:	Temp.:	26.2°C	Humid.:	41%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						

Remark:

1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode (802.11b 2412MHz)


Measurement Result

Line:

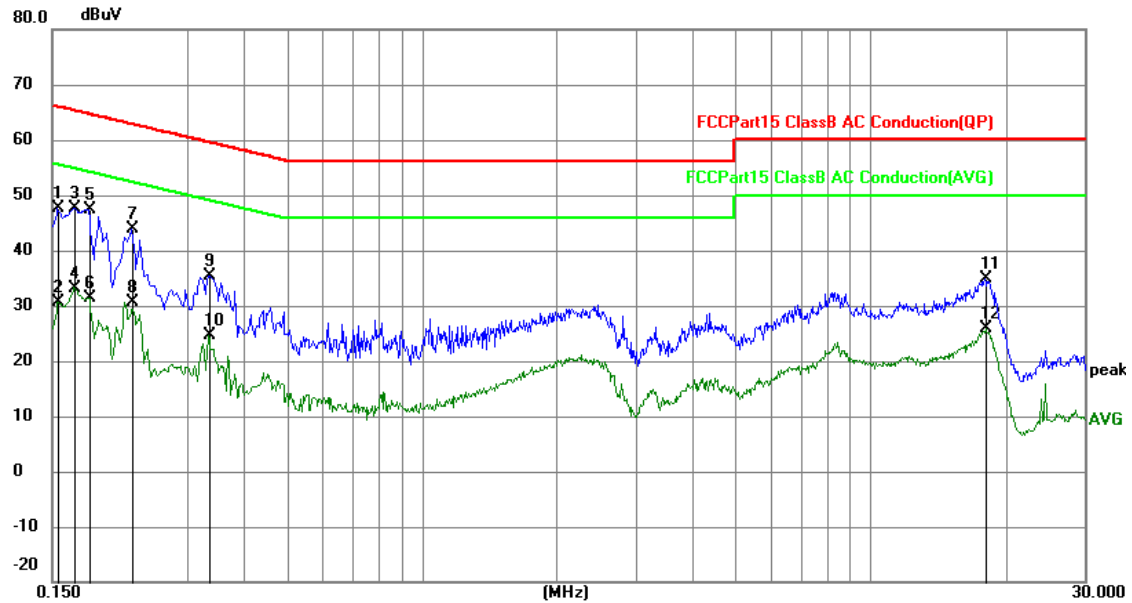

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1544	37.71	9.80	47.51	65.76	-18.25	QP
2	0.1544	20.84	9.80	30.64	55.76	-25.12	AVG
3	0.1680	37.93	9.81	47.74	65.06	-17.32	QP
4	0.1680	23.44	9.81	33.25	55.06	-21.81	AVG
5	0.1815	37.50	9.81	47.31	64.42	-17.11	QP
6	0.1815	21.54	9.81	31.35	54.42	-23.07	AVG
7	0.2265	34.10	9.82	43.92	62.58	-18.66	QP
8	0.2265	20.77	9.82	30.59	52.58	-21.99	AVG
9	0.3345	25.54	9.87	35.41	59.34	-23.93	QP
10	0.3345	14.70	9.87	24.57	49.34	-24.77	AVG
11	17.9520	25.20	9.70	34.90	60.00	-25.10	QP
12	17.9520	16.11	9.70	25.81	50.00	-24.19	AVG

Neutral:

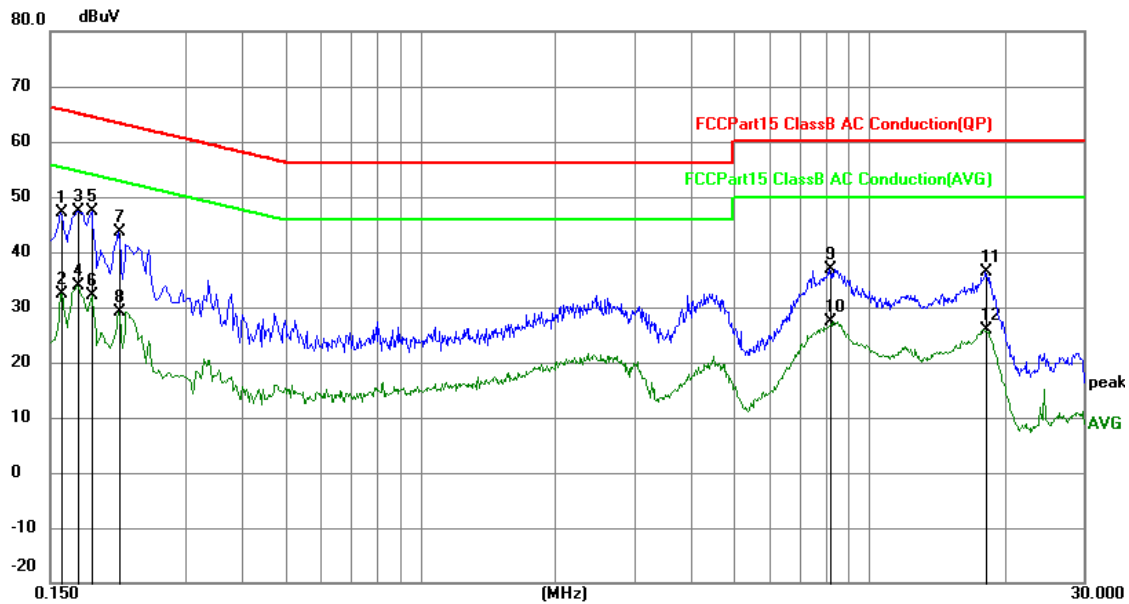


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1590	37.38	9.80	47.18	65.52	-18.34	QP
2	0.1590	22.62	9.80	32.42	55.52	-23.10	AVG
3	0.1724	37.53	9.81	47.34	64.84	-17.50	QP
4	0.1724	24.06	9.81	33.87	54.84	-20.97	AVG
5	0.1859	37.53	9.81	47.34	64.22	-16.88	QP
6	0.1859	22.29	9.81	32.10	54.22	-22.12	AVG
7	0.2129	33.87	9.81	43.68	63.09	-19.41	QP
8	0.2129	19.42	9.81	29.23	53.09	-23.86	AVG
9	8.1554	27.03	9.83	36.86	60.00	-23.14	QP
10	8.1554	17.57	9.83	27.40	50.00	-22.60	AVG
11	18.1680	26.80	9.70	36.50	60.00	-23.50	QP
12	18.1680	16.26	9.70	25.96	50.00	-24.04	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.3 Conducted Output Power

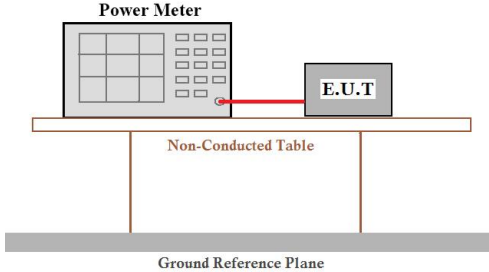Test Requirement :	FCC Part15 C Section 15.247 (b)(3),RSS-247 §5.4.b	
Test Method :	KDB 558074 D01 15.247 Meas Guidance v05r02 and RSS-Gen	
Limit:	30dBm	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 52%RH
Test voltage:	DC 7.6V	
Test results:	Pass	

Measurement Result

Test CH	Output Power(PK) (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	8.98	7.79	7.69	6.39	30.00	Pass
Middle	8.86	7.93	7.94	6.92		
Highest	8.81	7.91	7.86	6.78		


Test CH	Output Power(AV) (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	8.63	7.25	7.19	5.99	30.00	Pass
Middle	8.59	7.67	7.55	6.21		
Highest	8.49	7.67	7.48	6.31		

Remark: Measurement using a gated RF average power meter.

EIRP

mode	Test channel	Output Power(PK) (dBm)	Antenna Gain(dBi)	E.I.R.P (dBm)	Limit (dBm)	Result
802.11b	Lowest	8.98	2.66	11.64	36.00	Pass
	Middle	8.86	2.66	11.52		
	Highest	8.81	2.66	11.47		
802.11g	Lowest	7.79	2.66	10.45	36.00	Pass
	Middle	7.93	2.66	10.59		
	Highest	7.91	2.66	10.57		
802.11n(HT20)	Lowest	7.69	2.66	10.35	36.00	Pass
	Middle	7.94	2.66	10.60		
	Highest	7.86	2.66	10.52		
802.11n(HT40)	Lowest	6.39	2.66	9.05	36.00	Pass
	Middle	6.92	2.66	9.58		
	Highest	6.78	2.66	9.44		

4.4 6dB Bandwidth & 99% Occupancy Bandwidth

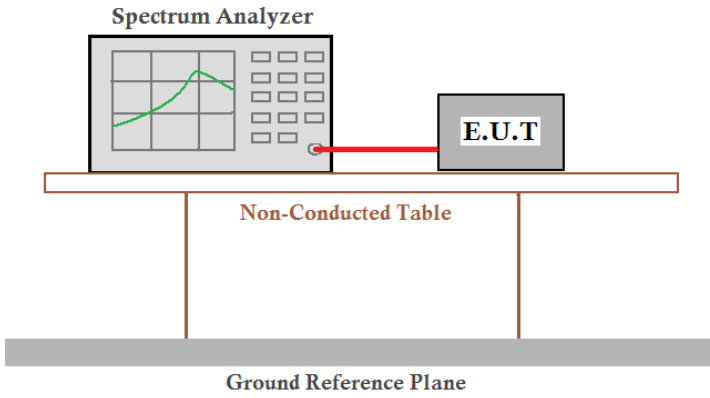Test Requirement :	FCC Part15 C Section 15.247 (a)(2), RSS-247 §5.2.a	
Test Method :	KDB558074 D01 DTS Meas Guidance v05or02 and RSS-Gen	
Limit:	>500KHz	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 52%RH
Test voltage:	DC 7.6V	
Test results:	Pass	

Measurement Result


Test CH	6dB Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.596	16.31	17.60	35.91	>500	Pass
Middle	9.560	16.32	17.56	36.06		
Highest	9.016	16.33	17.57	36.32		

Test CH	99% Occupancy Bandwidth (MHz)				Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	
Lowest	14.849	16.716	17.843	36.335	Pass
Middle	14.725	16.653	17.840	36.295	
Highest	14.744	16.662	17.791	36.363	



Test plot as follows:







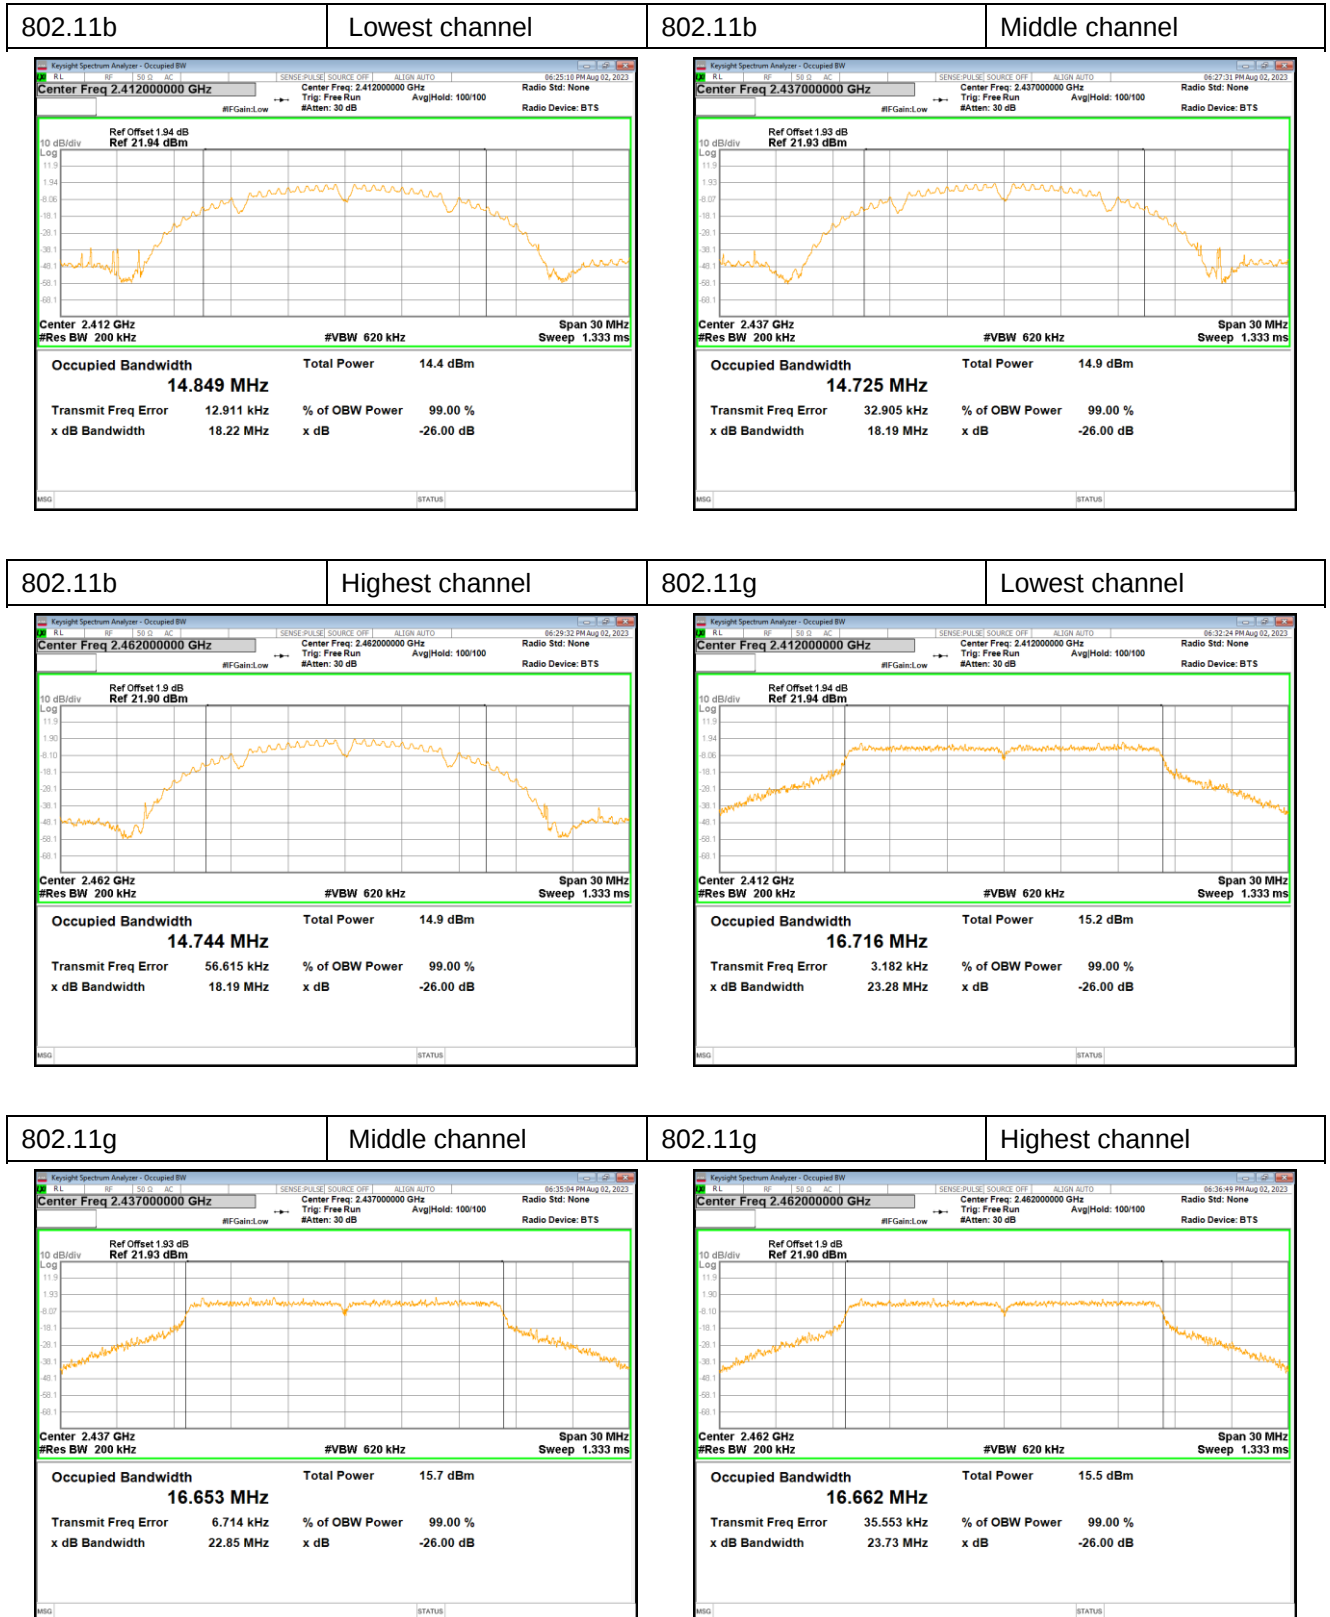



802.11n20	Lowest channel	802.1120	Middle channel
-----------	----------------	----------	----------------

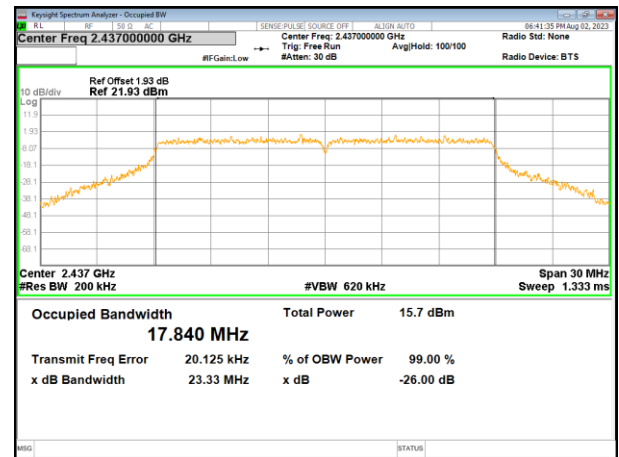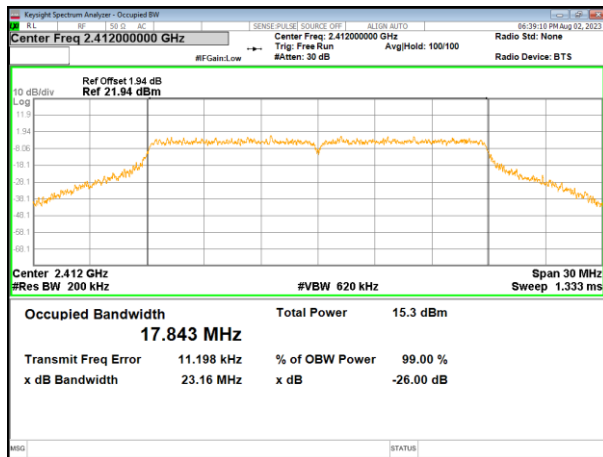


802.11n20	Highest channel	802.11n40	Lowest channel
-----------	-----------------	-----------	----------------

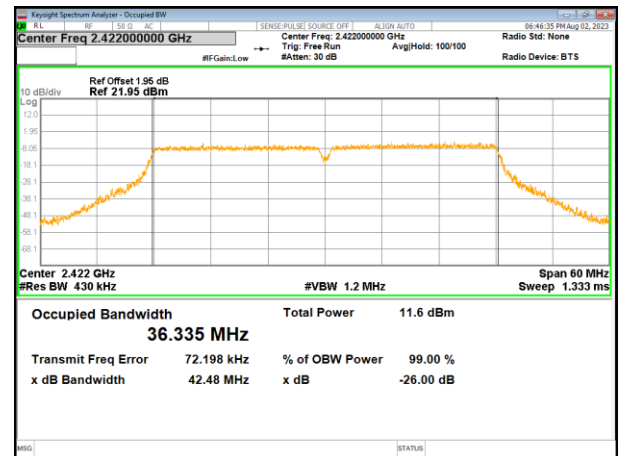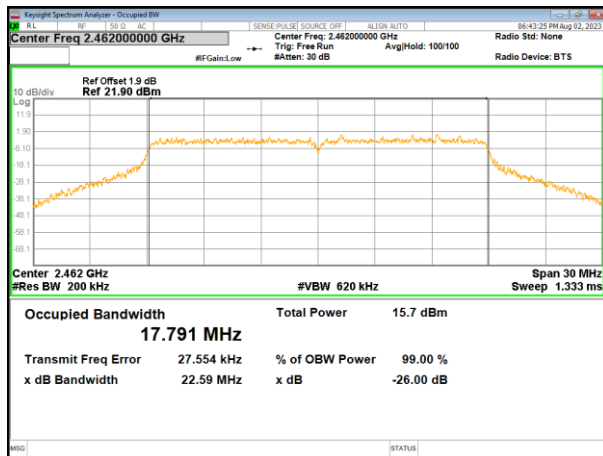

802.11n40	Middle channel	802.11n40	Highest channel
-----------	----------------	-----------	-----------------

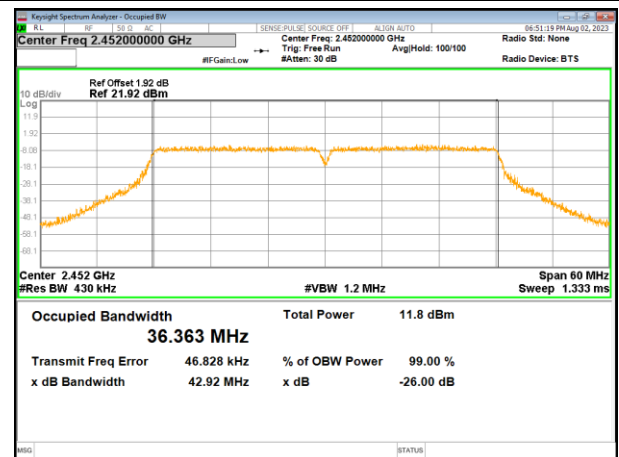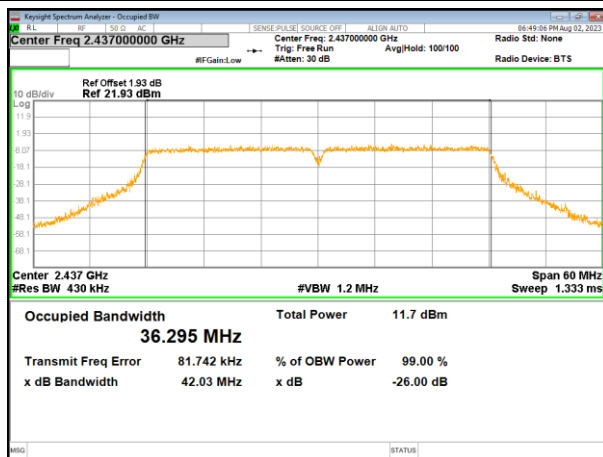


4.5 Power Spectral Density

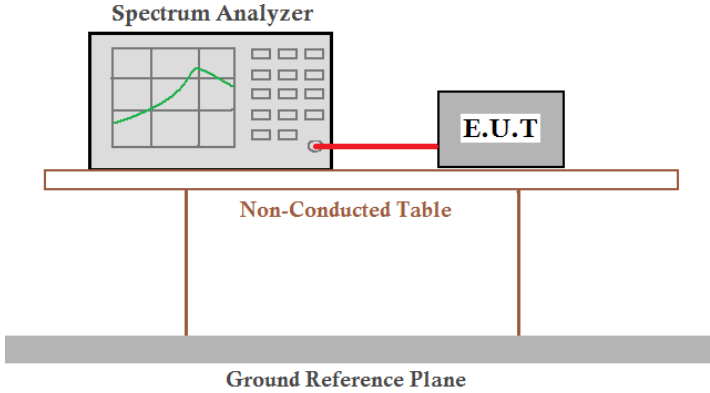
Test Requirement:	FCC Part15 C Section 15.247 (e),RSS-247 §5.2.b	
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02 and RSS-Gen	
Limit:	8dBm/3kHz	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 52%RH
Test voltage:	DC 7.6V	
Test results:	Pass	

Measurement Result

Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-14.880	-19.149	-22.433	-26.560	8.00	Pass
Middle	-14.851	-18.865	-22.071	-26.451		
Highest	-15.793	-18.195	-21.831	-26.858		


Test plot as follows:

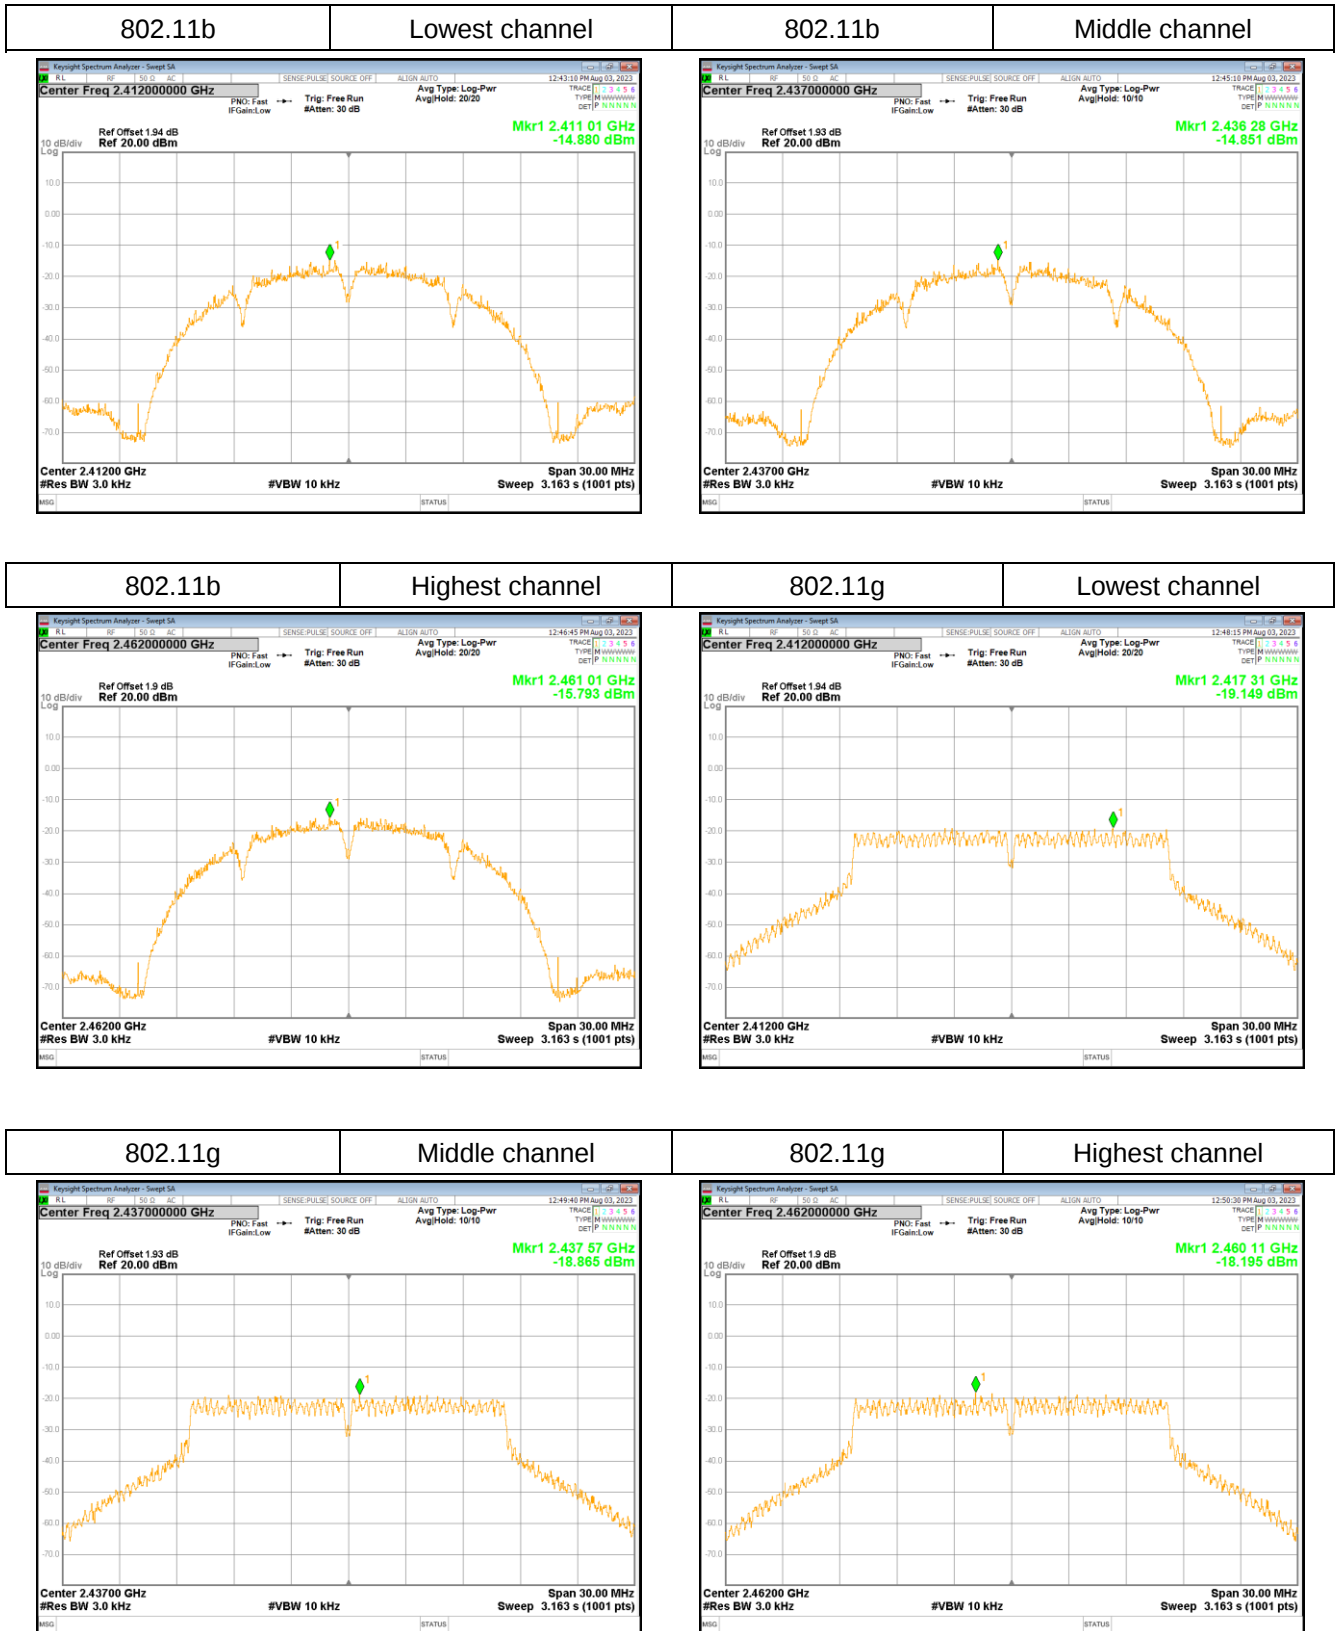

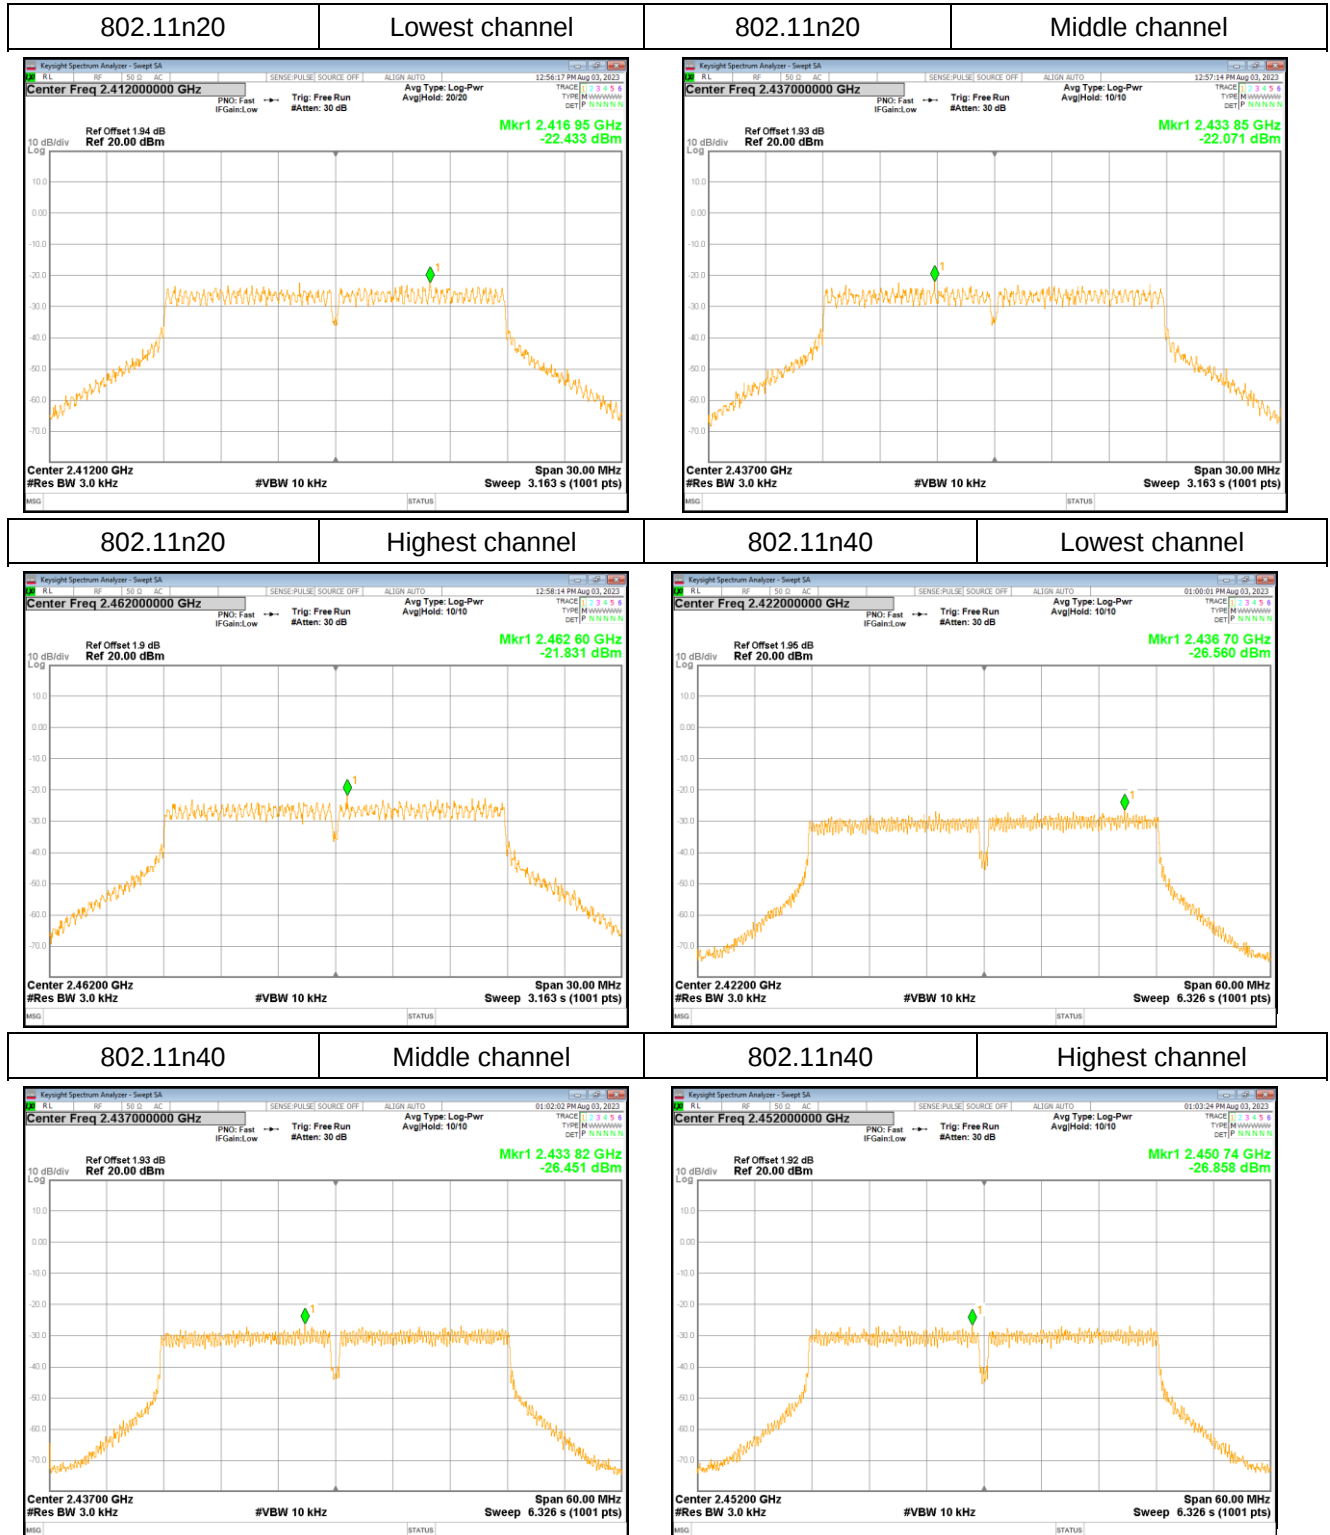

4.6 Band edges


Conducted Emission Method

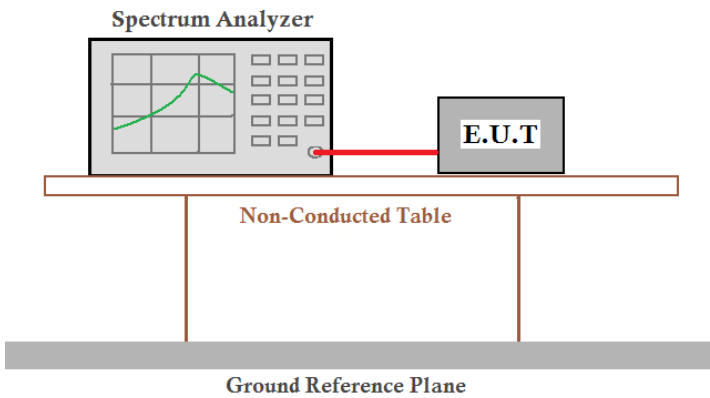Test Requirement:	FCC Part15 C Section 15.247 (d), RSS-247 §5.2.b	
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02,RSS -Gen	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 52%RH
Test voltage:	DC 7.6V	
Test results:	Pass	


Test plot as follows:

Test mode:

802.11b

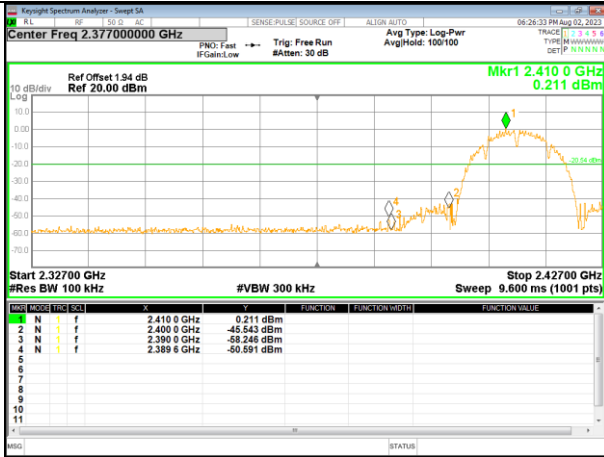


Lowest channel

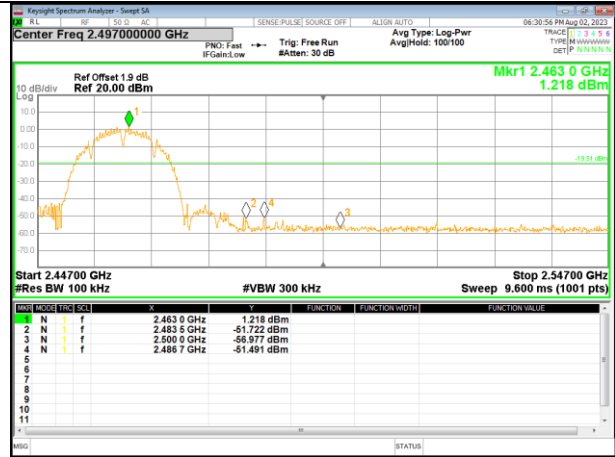

Highest channel

Test mode:

802.11g

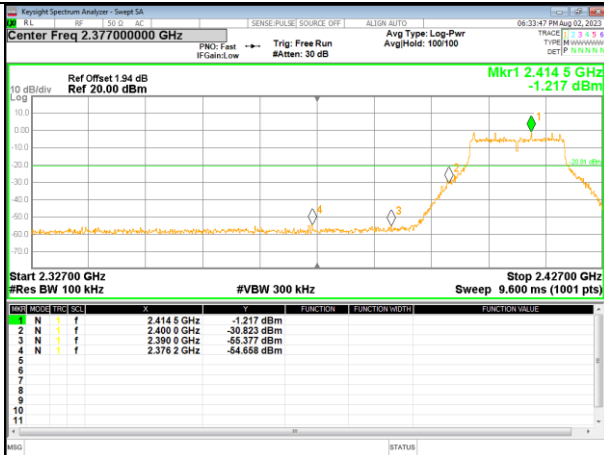


Lowest channel




Highest channel

Test mode:

802.11n20

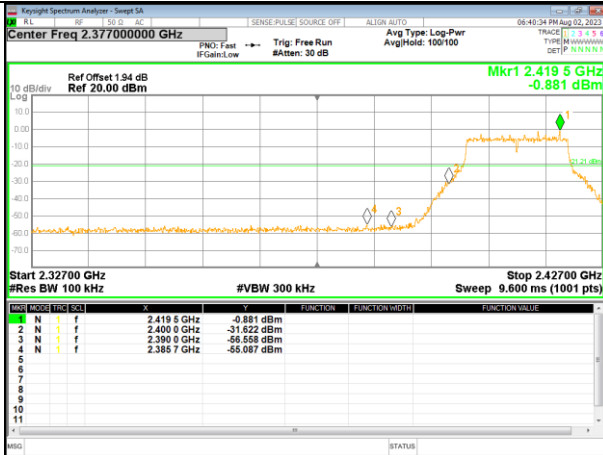


Lowest channel

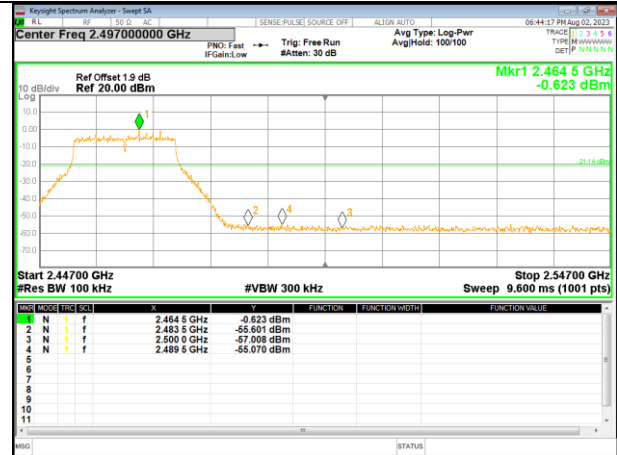


Highest channel

Test mode:

802.11n40

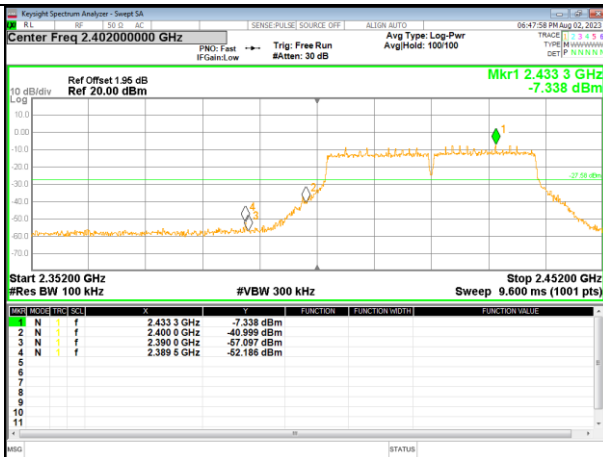


Lowest channel

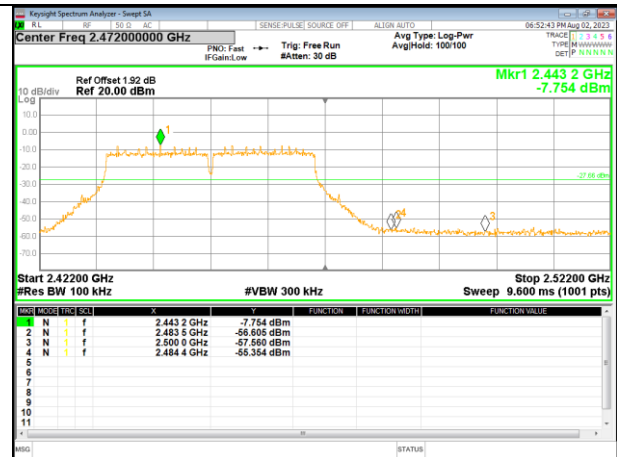

Highest channel

Radiated Emission Method

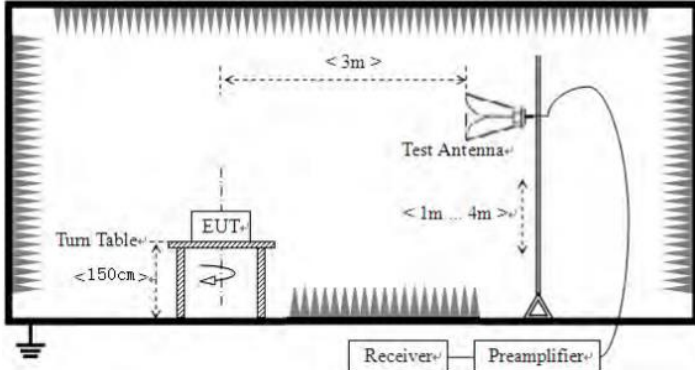Test Requirement:	FCC Part15 C Section 15.209 and 15.205, RSS-Gen §8.9 §8.10				
Test Method:	ANSI C63.10: 2013 and RSS-Gen				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 3.0 for details				
Test mode:	Refer to section 2.2 for details				
Test environment:	Temp.: 24.6°C		Humid.: 52%RH		
Test voltage:	DC 7.6V				
Test results:	Pass				

Measurement data:

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	72.60	27.40	3.43	45.40	58.03	74.00	15.97	Horizontal
2390.00	69.88	27.10	3.43	45.40	55.01	74.00	19.00	Horizontal
2310.00	74.05	27.40	3.43	45.40	59.48	74.00	14.52	Vertical
2390.00	72.24	27.10	3.43	45.40	57.37	74.00	16.63	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	47.40	27.40	3.43	45.40	32.83	54.00	21.17	Horizontal
2390.00	51.68	27.10	3.43	45.40	36.81	54.00	17.20	Horizontal
2310.00	47.04	27.40	3.43	45.40	32.47	54.00	21.53	Vertical
2390.00	52.51	27.10	3.43	45.40	37.64	54.00	16.36	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	72.73	27.80	3.56	45.40	58.69	74.00	15.32	Horizontal
2500.00	67.89	27.80	3.56	45.40	53.85	74.00	20.15	Horizontal
2483.50	72.45	27.80	3.56	45.40	58.41	74.00	15.59	Vertical
2500.00	67.13	27.80	3.56	45.40	53.09	74.00	20.92	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.88	27.80	3.56	45.40	34.84	54.00	19.17	Horizontal
2500.00	44.88	27.80	3.56	45.40	30.84	54.00	23.17	Horizontal
2483.50	49.99	27.80	3.56	45.40	35.95	54.00	18.05	Vertical
2500.00	44.59	27.80	3.56	45.40	30.55	54.00	23.45	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	69.53	27.40	3.43	45.40	54.96	74.00	19.05	Horizontal
2390.00	74.05	27.10	3.43	45.40	59.18	74.00	14.82	Horizontal
2310.00	69.25	27.40	3.43	45.40	54.68	74.00	19.32	Vertical
2390.00	73.38	27.10	3.43	45.40	58.51	74.00	15.50	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	47.44	27.40	3.43	45.40	32.87	54.00	21.13	Horizontal
2390.00	51.86	27.10	3.43	45.40	36.99	54.00	17.01	Horizontal
2310.00	48.30	27.40	3.43	45.40	33.73	54.00	20.27	Vertical
2390.00	52.30	27.10	3.43	45.40	37.43	54.00	16.57	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	73.06	27.80	3.56	45.40	59.02	74.00	14.98	Horizontal
2500.00	68.09	27.80	3.56	45.40	54.05	74.00	19.95	Horizontal
2483.50	74.04	27.80	3.56	45.40	60.00	74.00	14.00	Vertical
2500.00	68.90	27.80	3.56	45.40	54.86	74.00	19.14	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.68	27.80	3.56	45.40	38.64	54.00	15.37	Horizontal
2500.00	49.93	27.80	3.56	45.40	35.89	54.00	18.12	Horizontal
2483.50	51.40	27.80	3.56	45.40	37.36	54.00	16.64	Vertical
2500.00	49.85	27.80	3.56	45.40	35.81	54.00	18.19	Vertical

Remarks:

4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
6. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	76.29	27.40	3.43	45.40	61.72	74.00	12.28	Horizontal
2390.00	78.11	27.10	3.43	45.40	63.24	74.00	10.76	Horizontal
2310.00	76.01	27.40	3.43	45.40	61.44	74.00	12.56	Vertical
2390.00	75.21	27.10	3.43	45.40	60.34	74.00	13.66	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	50.45	27.40	3.43	45.40	35.88	54.00	18.12	Horizontal
2390.00	52.35	27.10	3.43	45.40	37.48	54.00	16.52	Horizontal
2310.00	51.50	27.40	3.43	45.40	36.93	54.00	17.07	Vertical
2390.00	53.23	27.10	3.43	45.40	38.36	54.00	15.65	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	71.59	27.80	3.56	45.40	57.55	74.00	16.45	Horizontal
2500.00	66.60	27.80	3.56	45.40	52.56	74.00	21.44	Horizontal
2483.50	71.96	27.80	3.56	45.40	57.92	74.00	16.08	Vertical
2500.00	73.50	27.80	3.56	45.40	59.46	74.00	14.54	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.16	27.80	3.56	45.40	36.12	54.00	17.88	Horizontal
2500.00	45.14	27.80	3.56	45.40	31.10	54.00	22.90	Horizontal
2483.50	49.85	27.80	3.56	45.40	35.81	54.00	18.19	Vertical
2500.00	45.90	27.80	3.56	45.40	31.86	54.00	22.14	Vertical

Remarks:

- The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	69.00	27.40	3.43	45.40	54.43	74.00	19.57	Horizontal
2390.00	72.40	27.10	3.43	45.40	57.53	74.00	16.47	Horizontal
2310.00	69.08	27.40	3.43	45.40	54.51	74.00	19.50	Vertical
2390.00	74.38	27.10	3.43	45.40	59.51	74.00	14.50	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	44.81	27.40	3.43	45.40	30.24	54.00	23.76	Horizontal
2390.00	50.39	27.10	3.43	45.40	35.52	54.00	18.48	Horizontal
2310.00	44.06	27.40	3.43	45.40	29.49	54.00	24.51	Vertical
2390.00	51.13	27.10	3.43	45.40	36.26	54.00	17.75	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	67.58	27.80	3.56	45.40	53.54	74.00	20.47	Horizontal
2500.00	67.06	27.80	3.56	45.40	53.02	74.00	20.98	Horizontal
2483.50	67.00	27.80	3.56	45.40	52.96	74.00	21.04	Vertical
2500.00	69.78	27.80	3.56	45.40	55.74	74.00	18.27	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	49.70	27.80	3.56	45.40	35.66	54.00	18.34	Horizontal
2500.00	45.48	27.80	3.56	45.40	31.44	54.00	22.57	Horizontal
2483.50	49.06	27.80	3.56	45.40	35.02	54.00	18.98	Vertical
2500.00	45.03	27.80	3.56	45.40	30.99	54.00	23.02	Vertical

Remarks:

10. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
11. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
12. Emissions more than 20 dB below the limit do not need to be reported.