

1

2

3

4

5

6

A

A

B

B

C

C

D

D

Remark	Description	Editor	Date



封底

封面

正面

反面

折痕线, 无需印刷

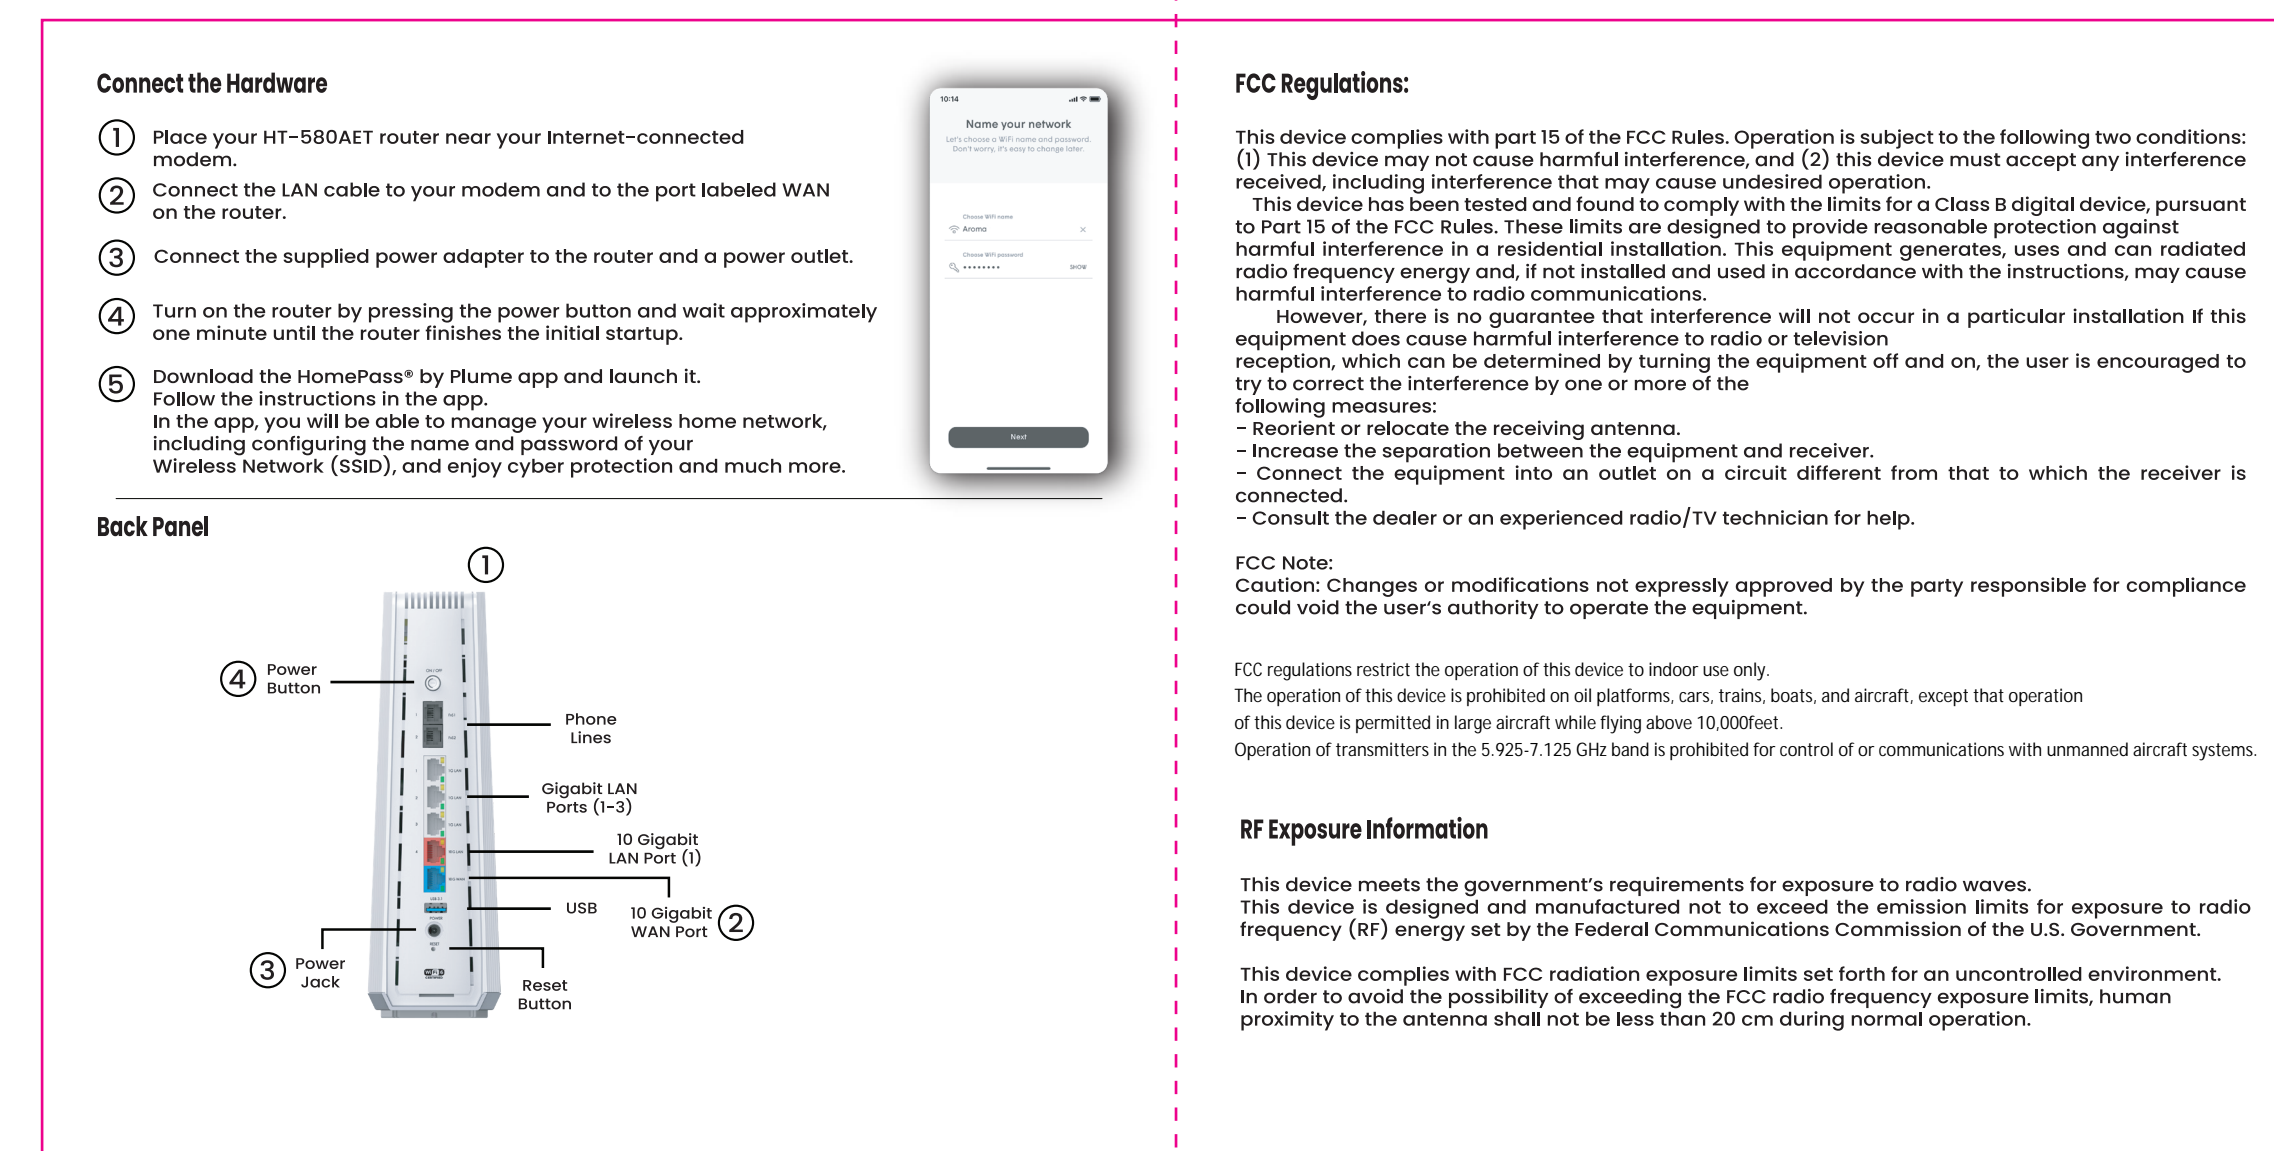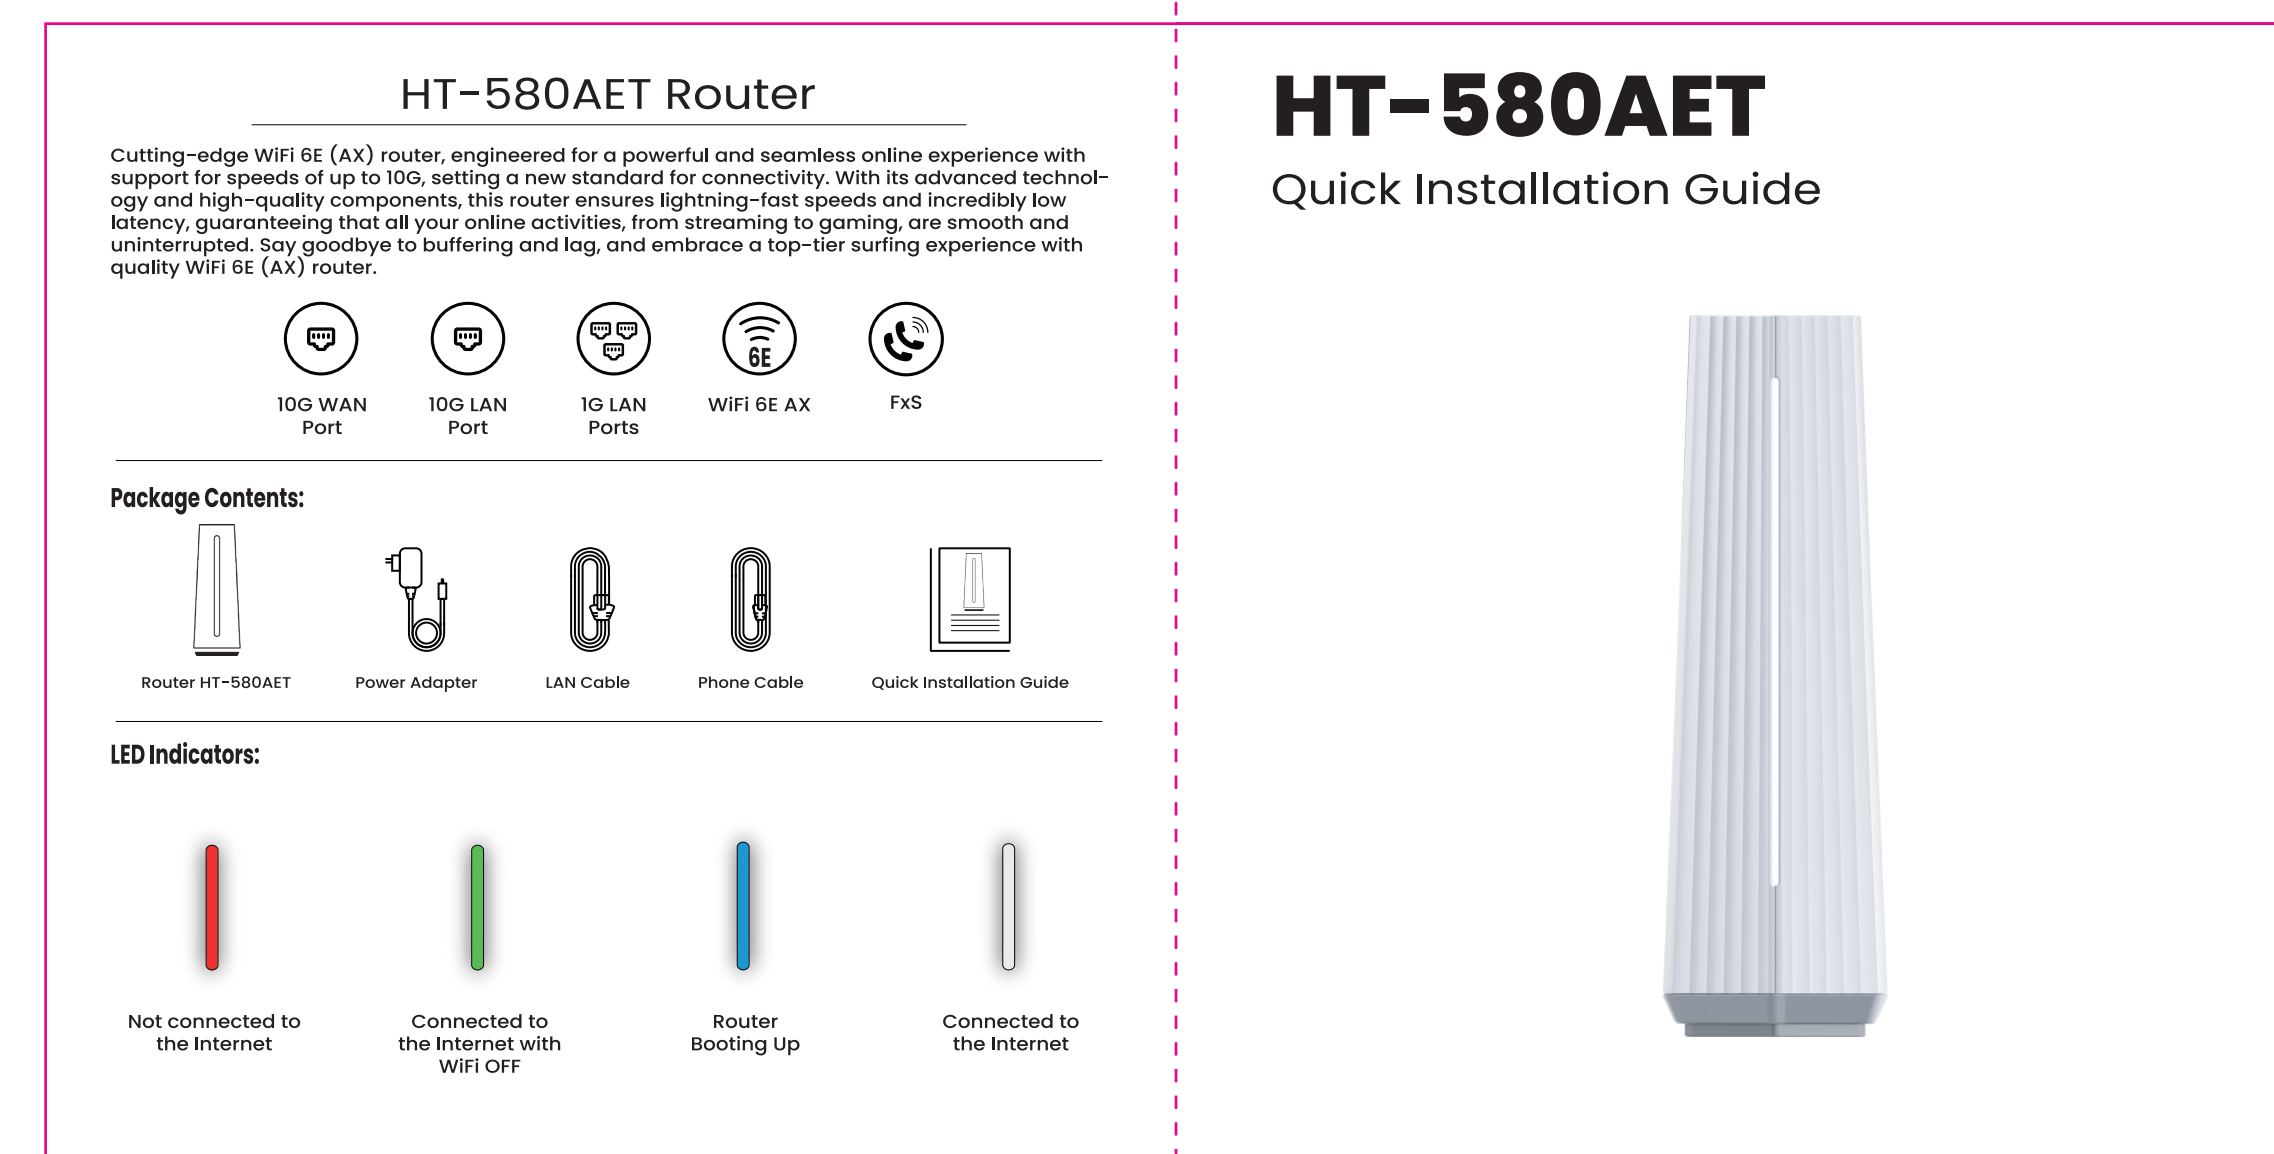

NOTES(技术要求):

- 1.Dimension after folding(折叠后尺寸): 150*150mm
- 2.Print colour(印刷颜色): 4Colour printing (四色印刷).
- 3.Material(材质): 128g copperplate paper(128g 铜版纸).
- 4.Coating(表面处理): Matte lamination (双面耐刮花哑膜)
- 5.Binding process(装订工艺): Paper folding(折页)——对折
- 6.Output lpi(输出网线): 200 lpi.
- 7.Tolerance(公差): L(长)*W(宽): ±1mm.
- 8.Raw materials and the corresponding post processing should meet requirements defined in the T&W Environmental Protection Technical Standards.
(原材料及后处理工艺均能满足我司《环保技术标准》要求).

TOL±										CUSTOMER:		T&W 同维		
DIM										Heights		SHENZHEN GONGJIN ELECTRONICS CO., LTD.		
RANGE		C1	C2	C3	C4	TITLE:		MODEL:		PART NO:				
0~6		0.1	0.1	0.15	0.2	QUICK INSTALLATION GUIDE		HT-580AET US		610000013577				
6~30		0.2	0.3	0.4	0.5	UNIT'S	mm	VER:	V01	DRAW	郭海涛	DATE: 240120		
30~80		0.25	0.5	0.9	1.2	MAT'L	/	SCALE	N/A	CHECK	赵柳			
80~180		0.3	0.8	1.2	1.5	FINISH	/	SHEET	1/1	PDE	N/A			
180~315		0.5	1.3	1.8	3									
315~500		0.7	1.5	2.5	4									
500~800		0.9	1.8	3	5									
ANG.TOL±		0°~30°/0.1°	30°~60°/0.3°	60°~90°/0.5°										

1

2

3

4

5

6