

1

2

3

4

5


6

Remark	Description	Editor	Date


A

A

正面

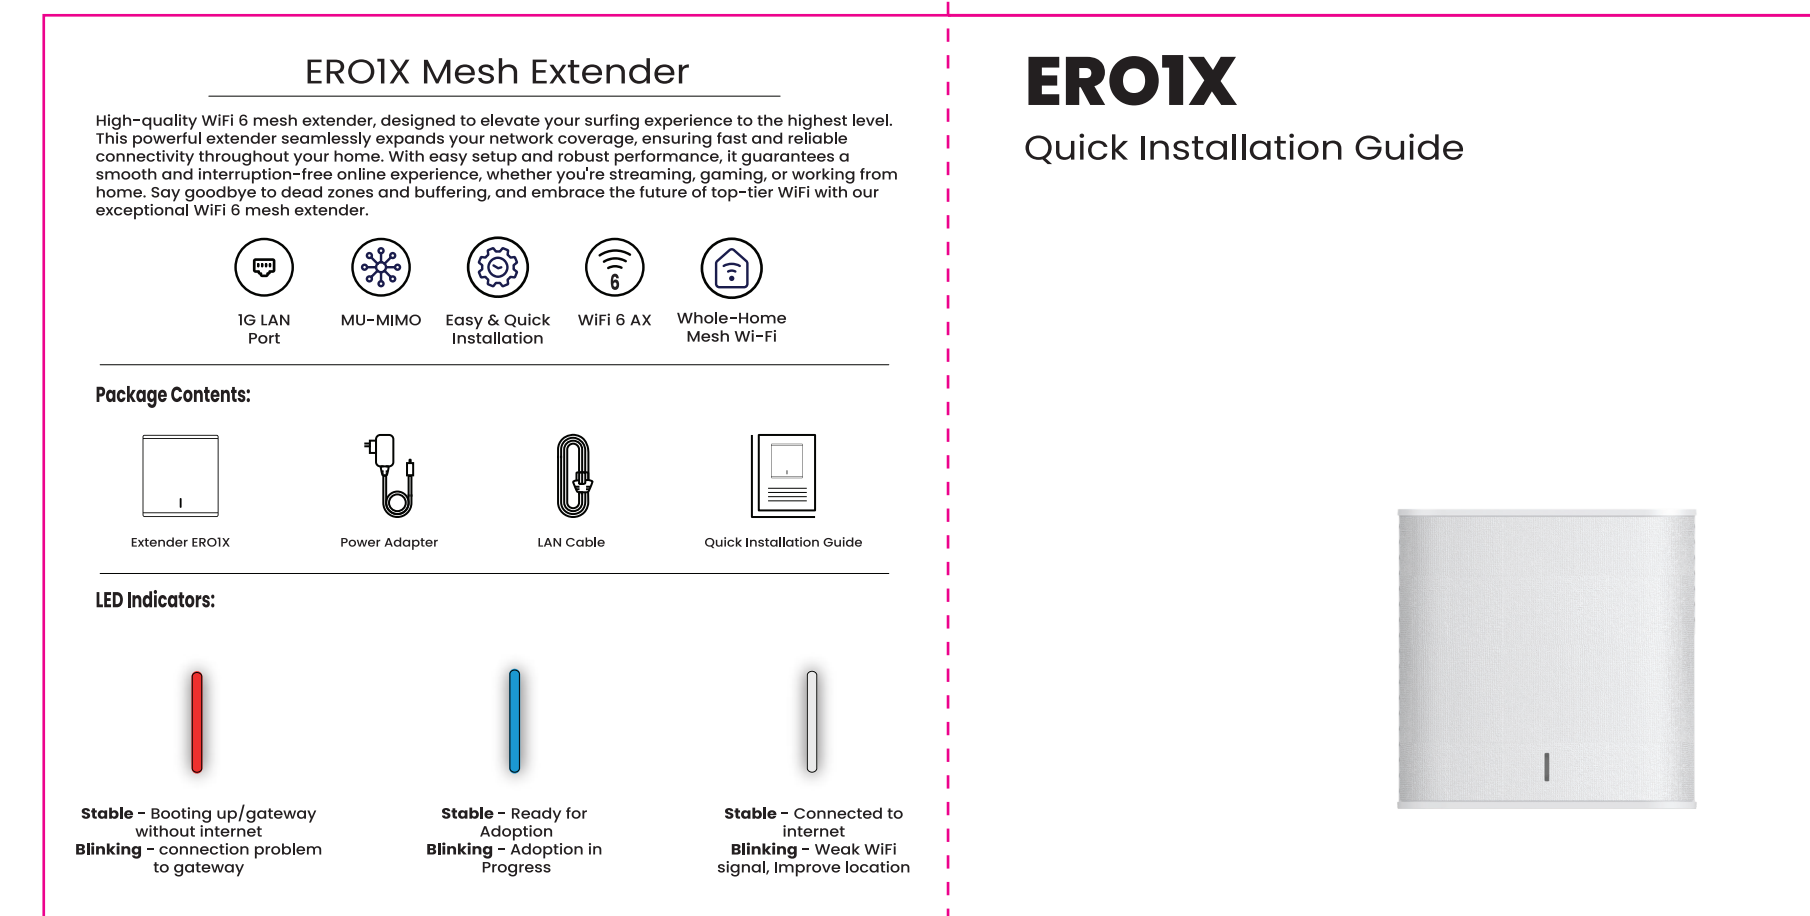

反面

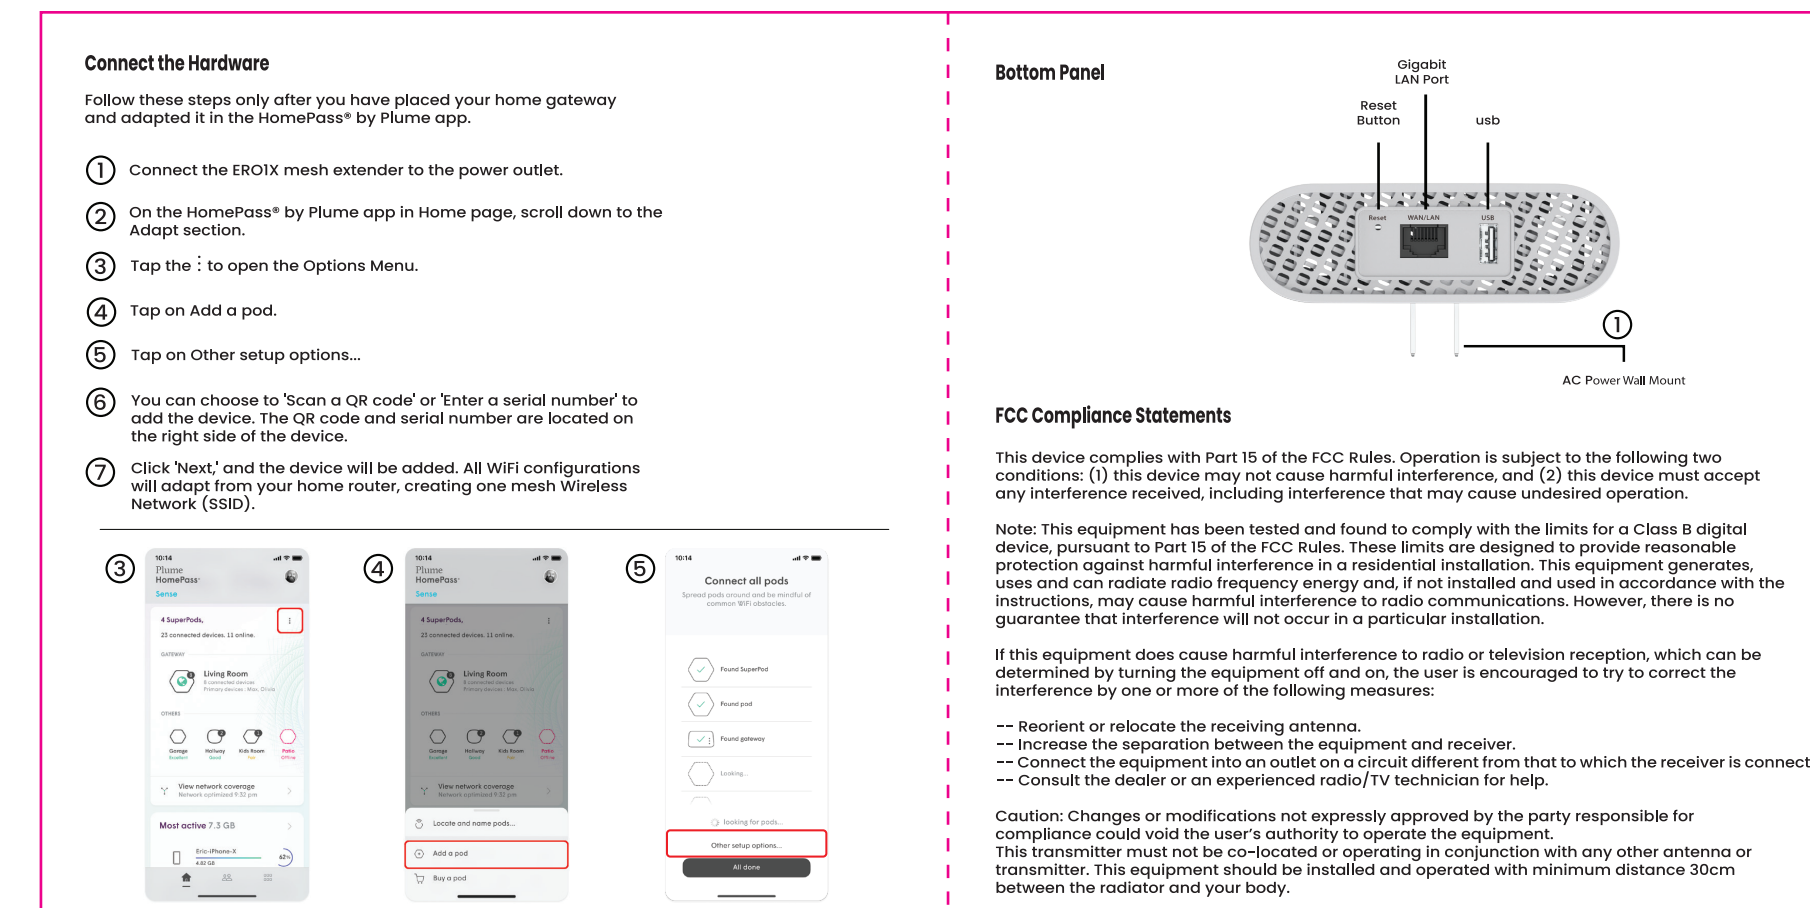

折痕线, 无需印刷

B

B

C

C

NOTES(技术要求):

- 1.Dimension after folding(折叠后尺寸): 120*120mm
- 2.Print colour(印刷颜色): 4Colour printing (四色印刷).
- 3.Material(材质): 128g copperplate paper(128g 铜版纸).
- 4.Coating(表面处理): Varnishing(双面过光油)
- 5.Binding process(装订工艺): Paper folding(折页)——对折
- 6.Output Ipi(输出网线): 200 Ipi.
- 7.Tolerance(公差): L(长)*W(宽): ±1mm.
- 8.Raw materials and the corresponding post processing should meet requirements defined in the T&W Environmental Protection Technical Standards. (原材料及后处理工艺均能满足我司《环保技术标准》要求).

D

D

TOL±							CUSTOMER:		T&W 同维					
DIM		C1	C2	C3	C4		Heights		SHENZHEN GONGJIN ELECTRONICS CO., LTD.					
RANGE						TITLE: QUICK INSTALLATION GUIDE	MODEL:		PART NO:					
0~6	0.1	0.1	0.15	0.2	ERO1X V2 US		614000005389							
6~30	0.2	0.3	0.4	0.5	UNIT'S		mm	VER:	V01	DRAW	郭海涛	DATE: 20231011		
30~80	0.25	0.5	0.9	1.2	MAT'L		/	SCALE	N/A	CHECK	赵柳			
80~180	0.3	0.8	1.2	1.5	FINISH		/	SHEET	1/1	PDE	N/A			
180~315	0.5	1.3	1.8	3	ANG.TOL±	0°~30°/0.1°	30°~60°/0.3°	60°~90°/0.5°						
315~500	0.7	1.5	2.5	4								5	6	
500~800	0.9	1.8	3	5										

1

2

3

4

5

6