

1

2

3

4

5

6

A

A

B

B

C

C

D

D

Remark	Description	Editor	Date


封底

封面

正面

反面

折痕线, 无需印刷

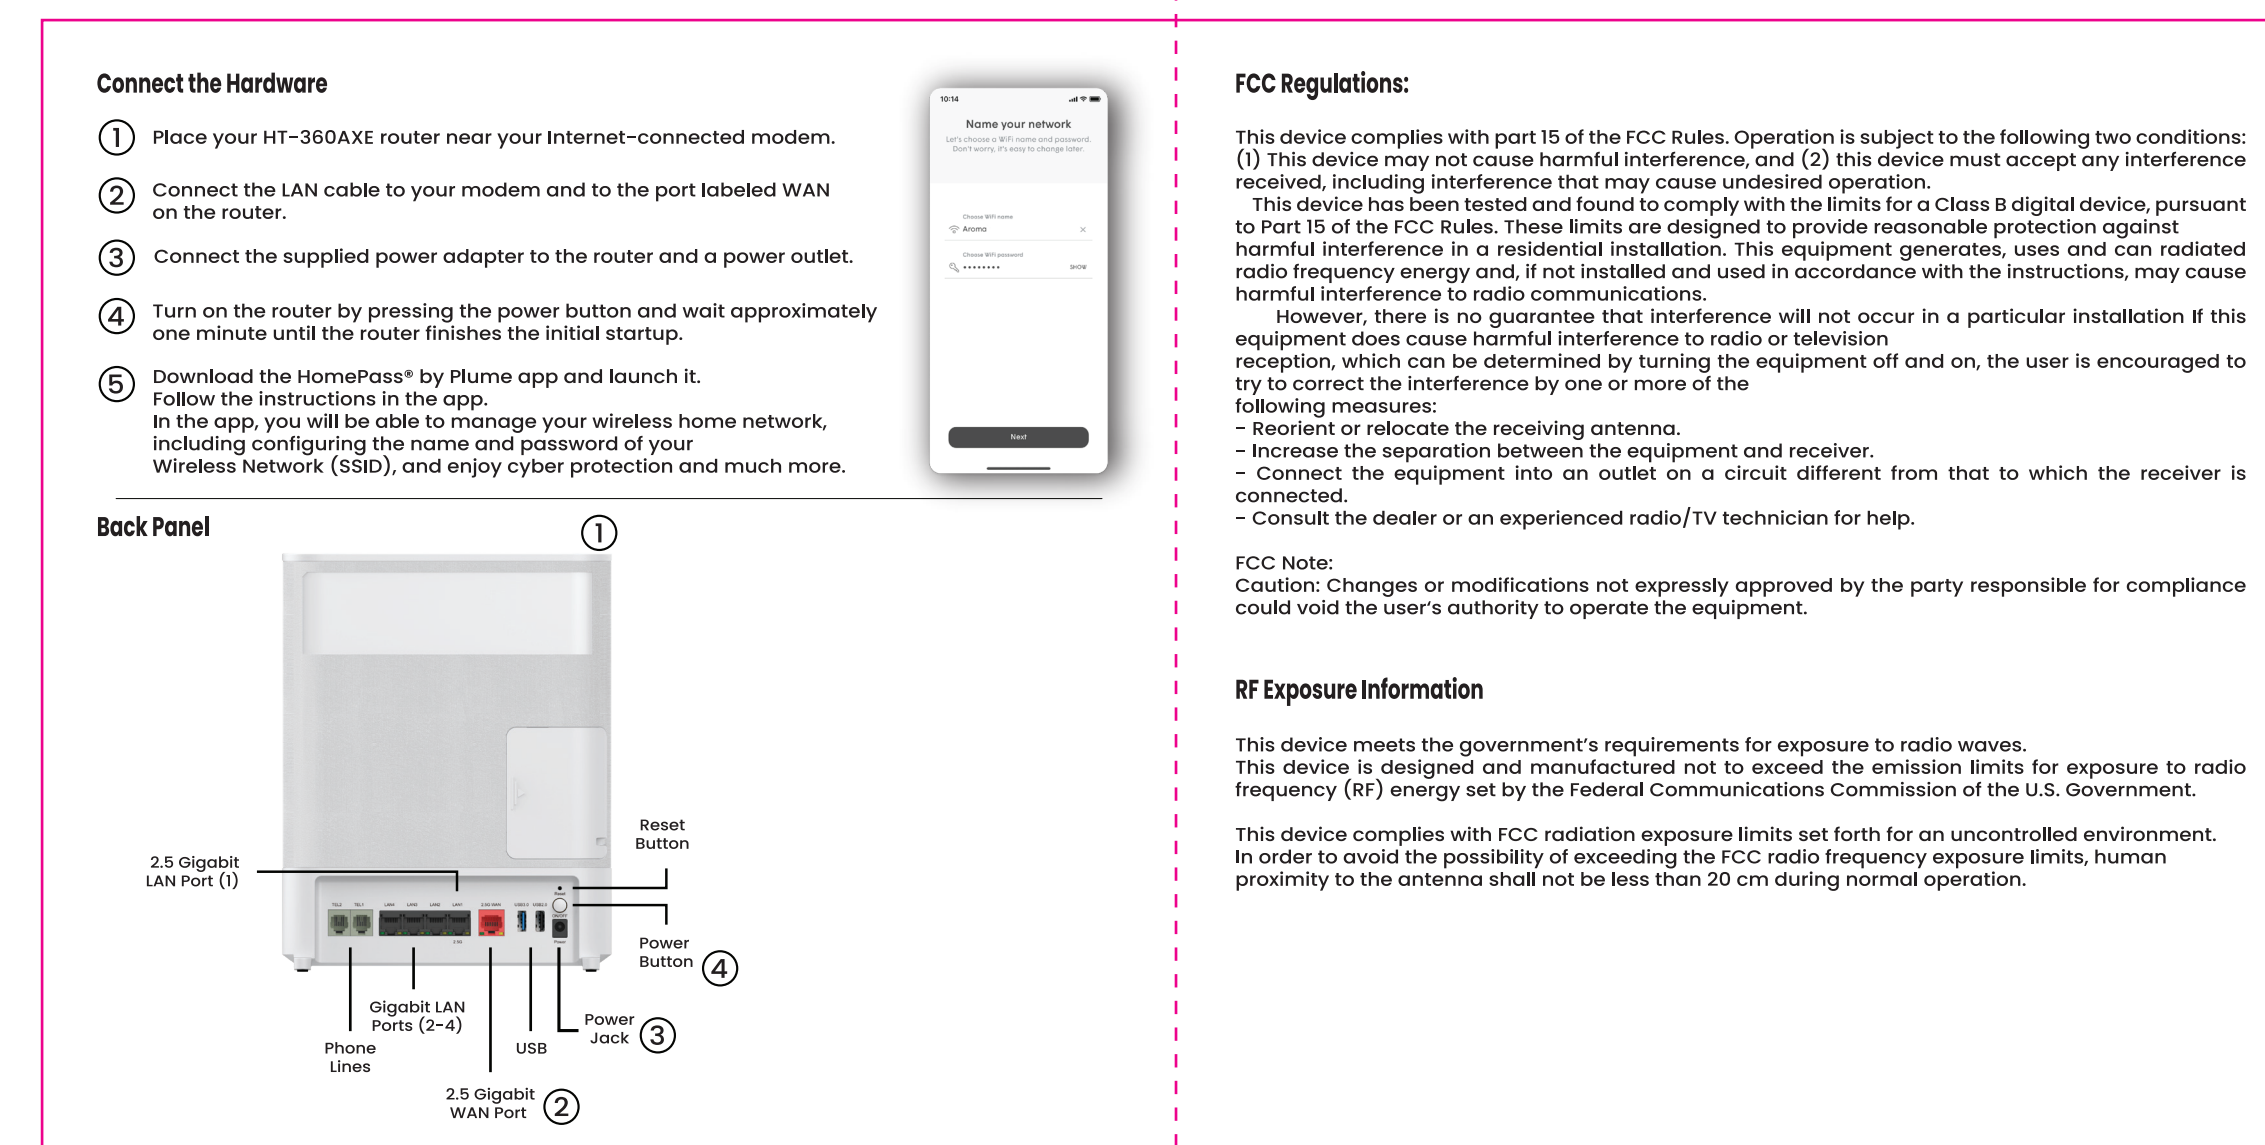

NOTES(技术要求):

- Dimension after folding(折叠后尺寸): 150*150mm
- Print colour(印刷颜色): 4Colour printing (四色印刷).
- Material(材质): 128g copperplate paper(128g 铜版纸).
- Coating(表面处理): Varnishing(双面过光油)
- Binding process(装订工艺): Paper folding(折页)——对折
- Output lpi(输出网线): 200 lpi.
- Tolerance(公差): L(长)*W(宽): ±1mm.
- Raw materials and the corresponding post processing should meet requirements defined in the T&W Environmental Protection Technical Standards.
(原材料及后处理工艺均能满足我司《环保技术标准》要求).

TOL±		DIM					CUSTOMER:		T&W 同维			
RANGE	C1	C2	C3	C4	Heights		SHENZHEN GONGJIN ELECTRONICS CO., LTD.					
0~6	0.1	0.1	0.15	0.2	TITLE:	MODEL:		PART NO:				
6~30	0.2	0.3	0.4	0.5								
30~80	0.25	0.5	0.9	1.2	QUICK INSTALLATION GUIDE	HT-360AXE V2		614000005387				
80~180	0.3	0.8	1.2	1.5								
180~315	0.5	1.3	1.8	3	UNIT'S	mm	VER:	V01	DRAW	郭海涛	DATE: 20231011	
315~500	0.7	1.5	2.5	4	MAT'L	/	SCALE	N/A	CHECK	赵柳		
500~800	0.9	1.8	3	5	FINISH	/	SHEET	1/1	PDE	N/A		
ANG.TOL±	0°~30°/0.1°		30°~60°/0.3°	60°~90°/0.5°								

1

2

3

4

5

6