

1

2

3

4

5

6

Remark	Description	Editor	Date


A

A

正面

封面


封底

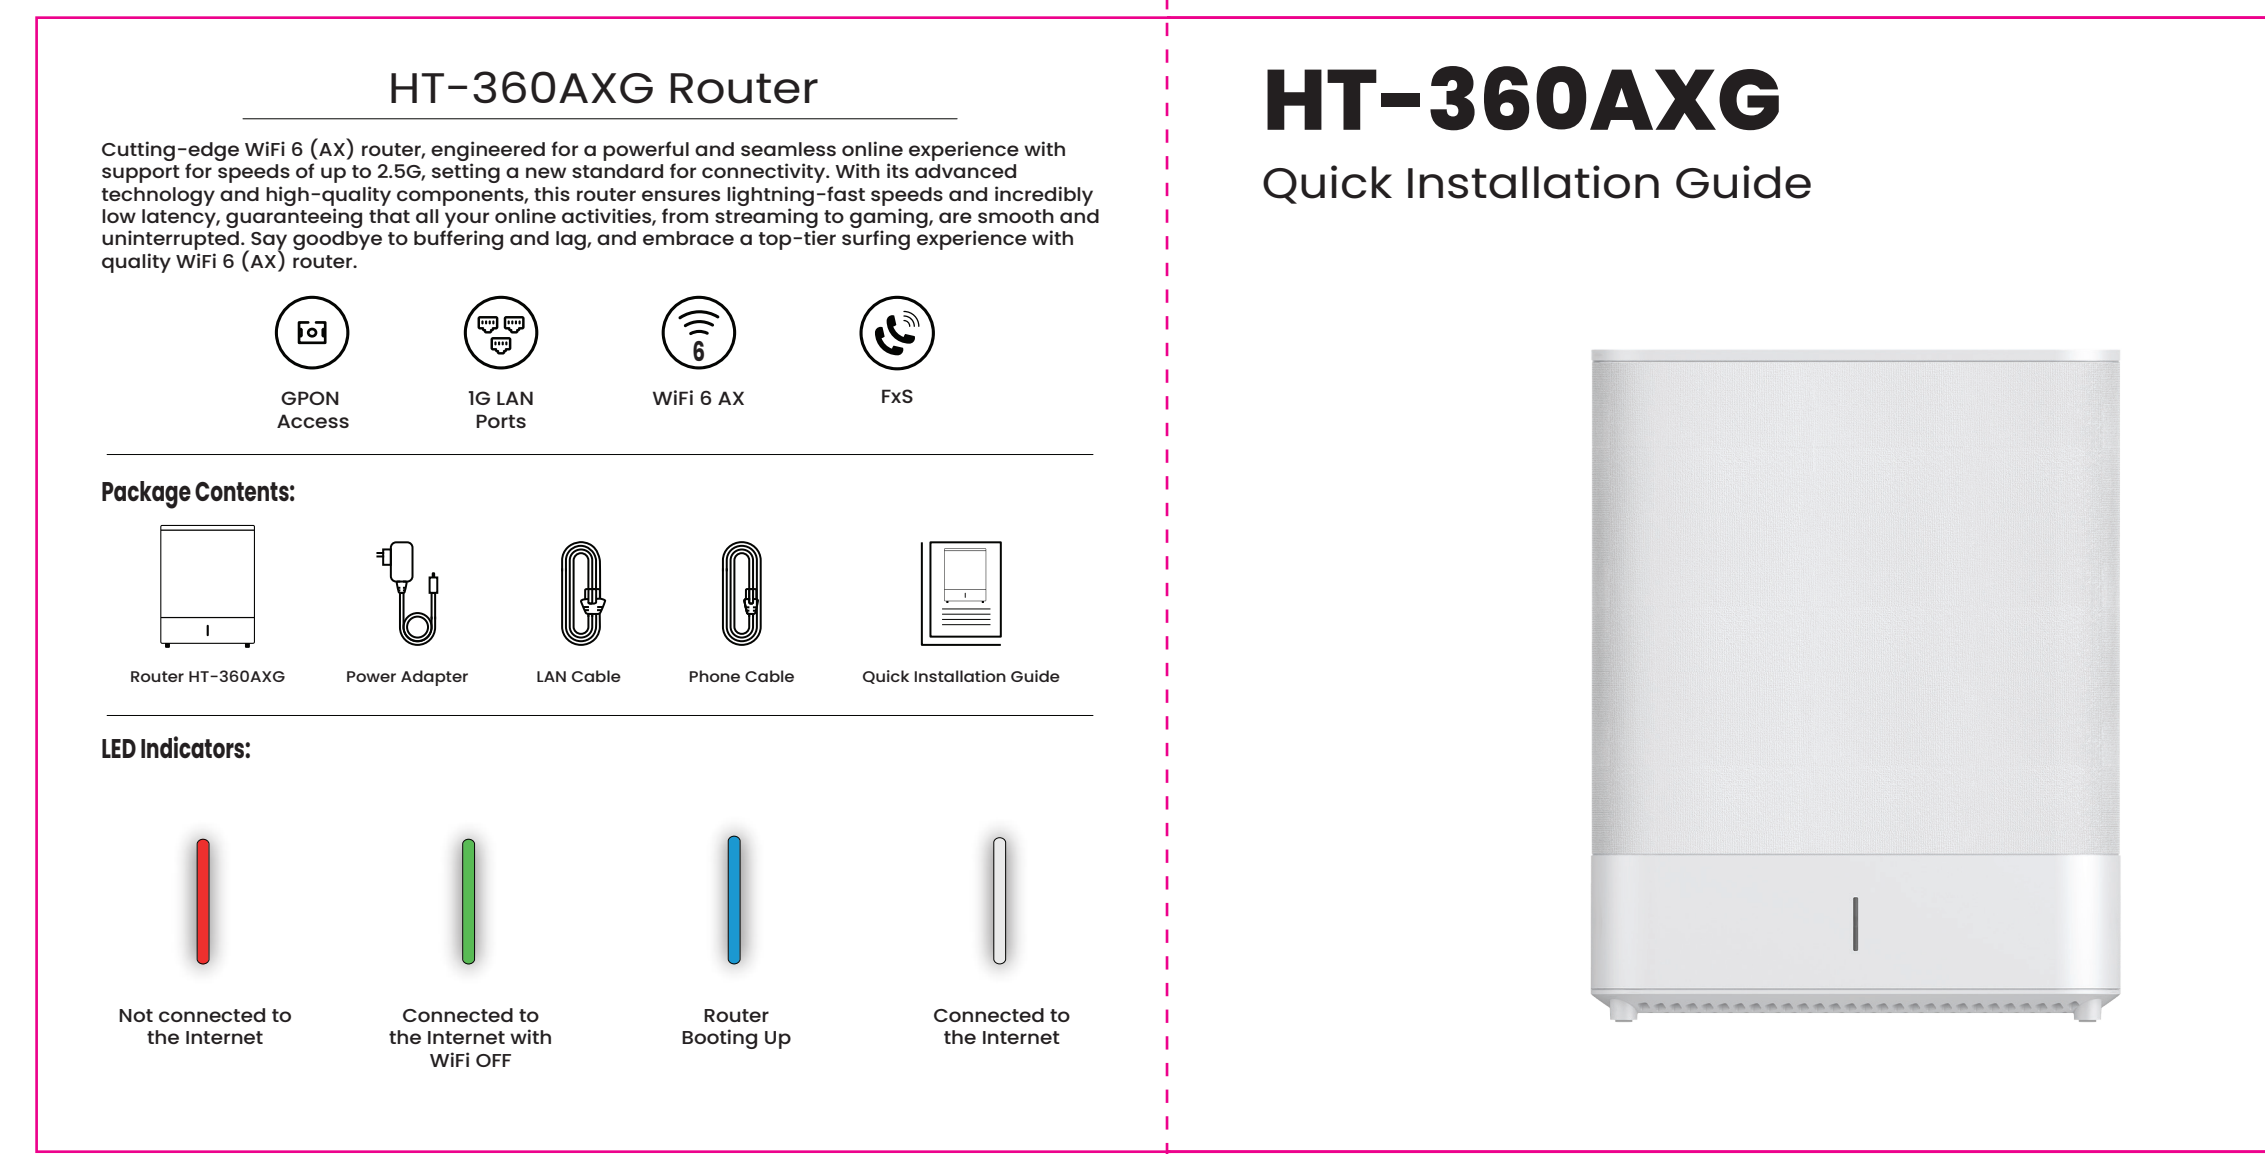

B

B

反面

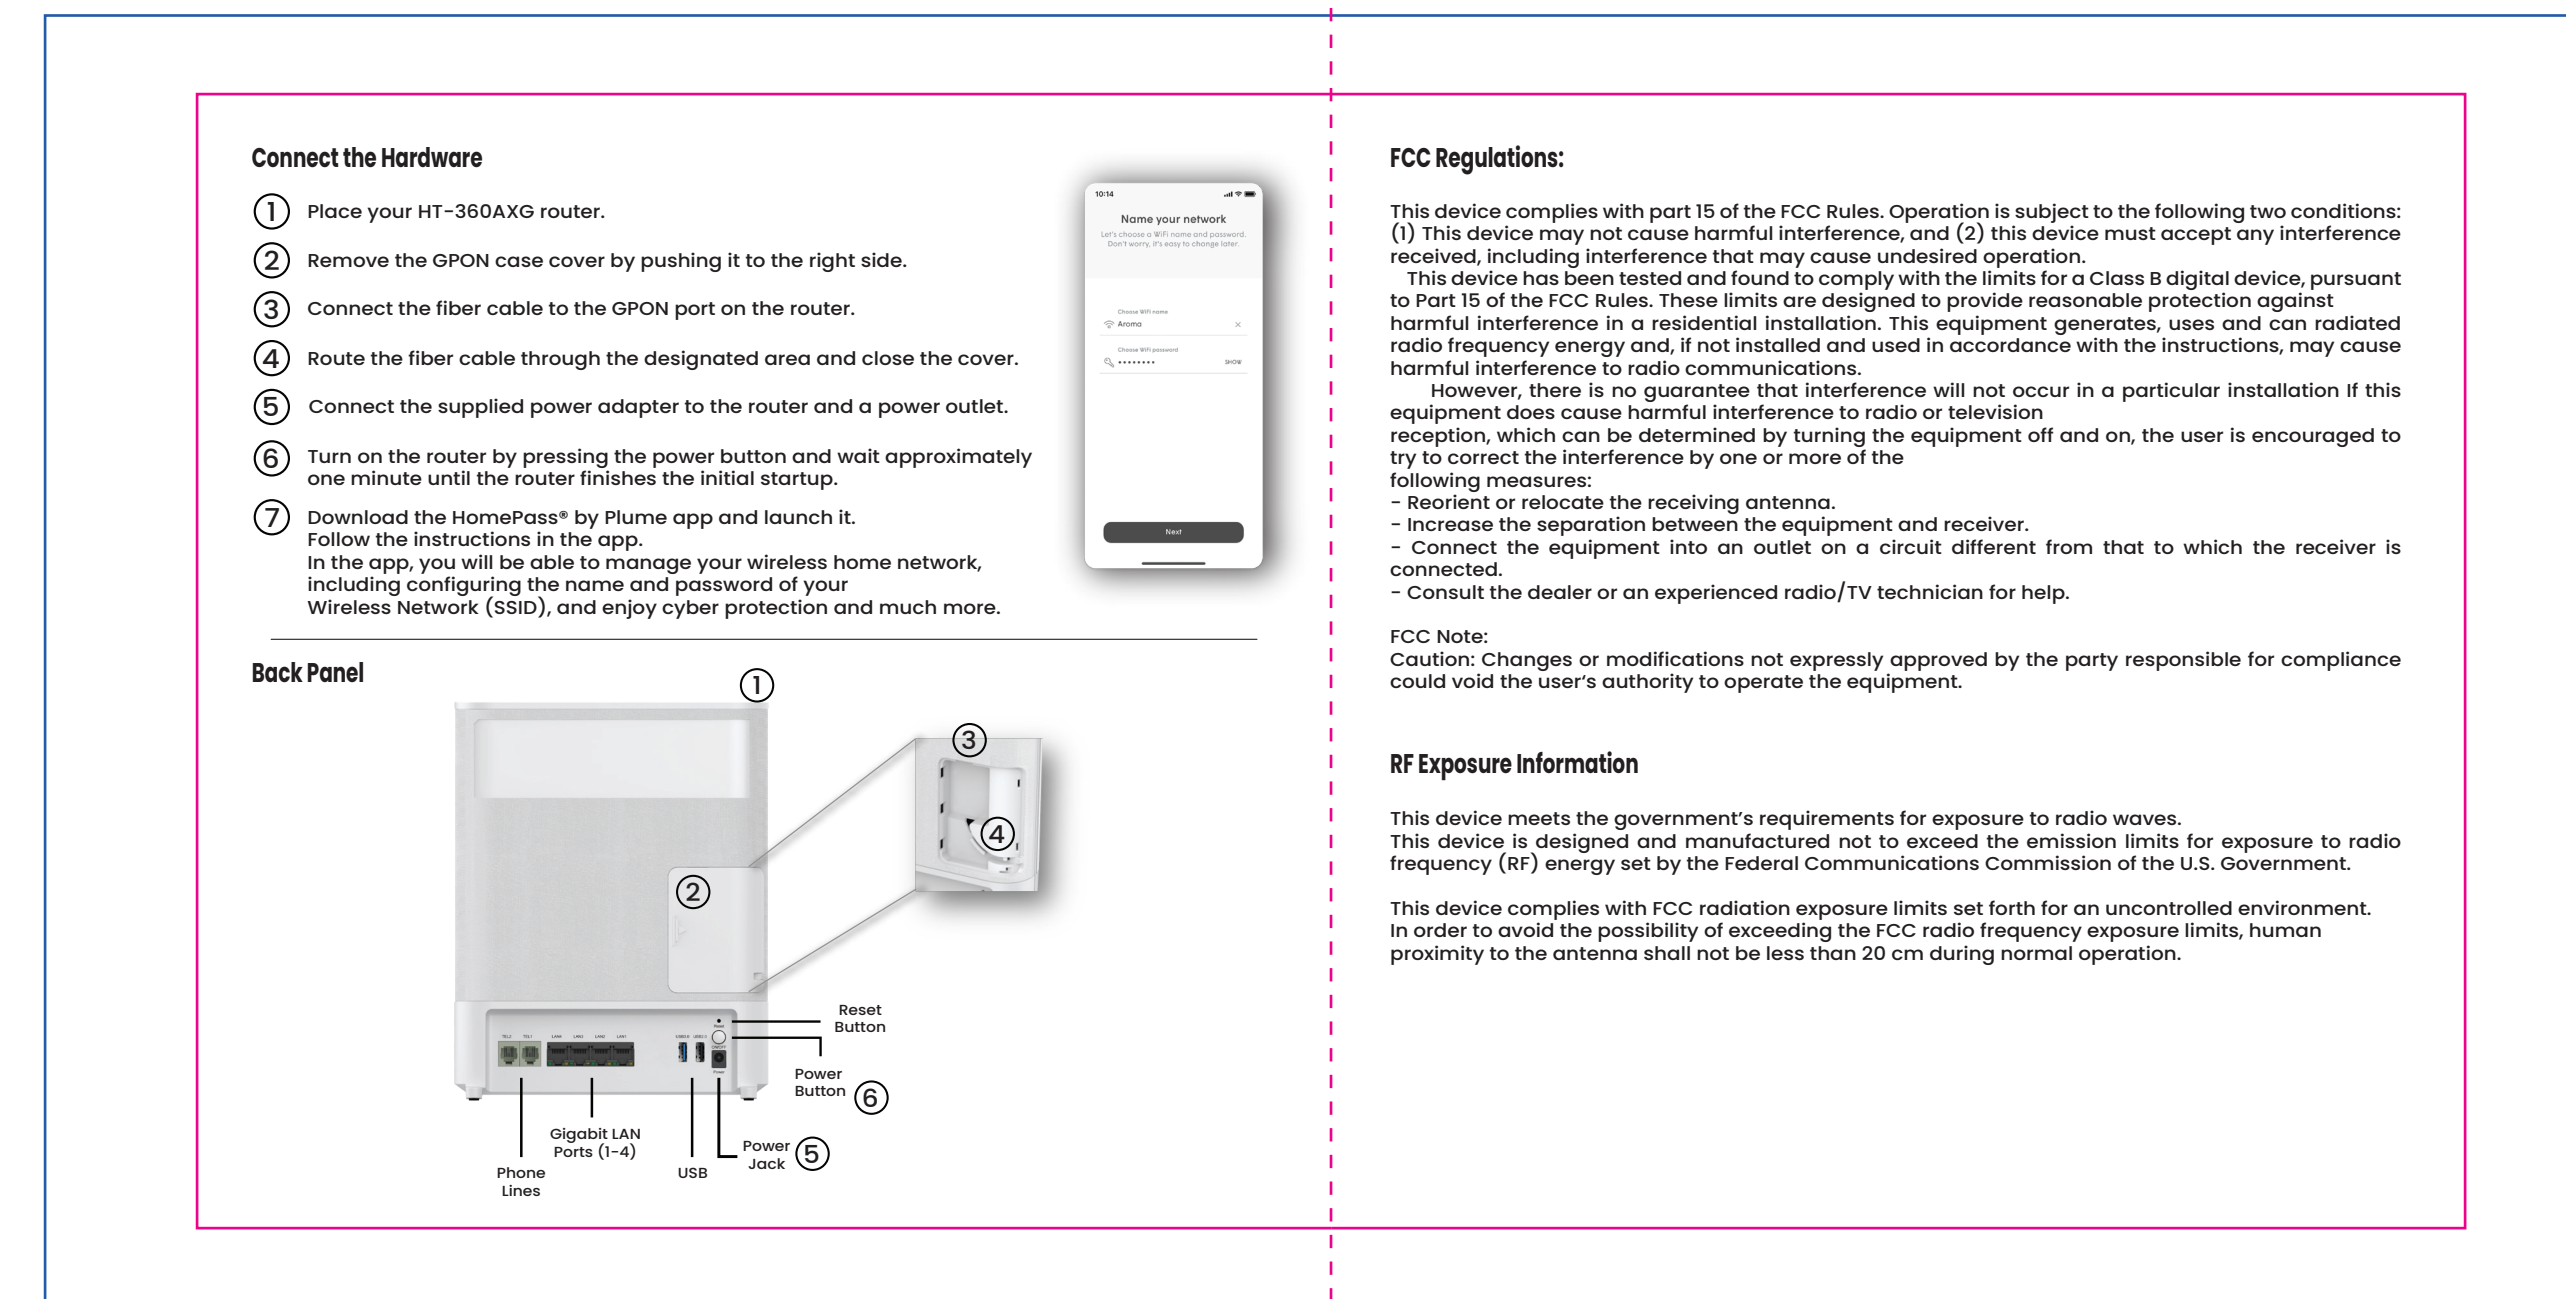

折痕线, 无需印刷

C

C

NOTES(技术要求):

- Dimension after folding(折叠后尺寸): 150\*150mm
- Print colour(印刷颜色): 4Colour printing (四色印刷).
- Material(材质): 128g copperplate paper(128g 铜版纸).
- Coating(表面处理): Matte lamination (双面耐刮花哑膜)
- Binding process(装订工艺): Paper folding(折页)——对折
- Output lpi(输出网线): 200 lpi.
- Tolerance(公差): L(长)\*W(宽): ±1mm.
- Raw materials and the corresponding post processing should meet requirements defined in the T&W Environmental Protection Technical Standards.  
(原材料及后处理工艺均能满足我司《环保技术标准》要求).

D

D

TOL±						CUSTOMER:		T&W 同维				
DIM		C1	C2	C3	C4	Heights		SHENZHEN GONGJIN ELECTRONICS CO., LTD.				
RANGE						TITLE:		MODEL:		PART NO:		
0~6		0.1	0.1	0.15	0.2	QUICK INSTALLATION GUIDE		HT-880BE		610000013160		
6~30		0.2	0.3	0.4	0.5	UNIT'S	mm	VER:	V01	DRAW	郭海涛	DATE: 20230810
30~80		0.25	0.5	0.9	1.2	MAT'L	/	SCALE	N/A	CHECK	赵柳	
80~180		0.3	0.8	1.2	1.5	FINISH	/	SHEET	1/1	PDE	N/A	
180~315		0.5	1.3	1.8	3							
315~500		0.7	1.5	2.5	4							
500~800		0.9	1.8	3	5							
ANG.TOL±		0°~30°/0.1°	30°~60°/0.3°	60°~90°/0.5°								

1

2

3

4

5

6