


EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band1_TX_CH 46 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

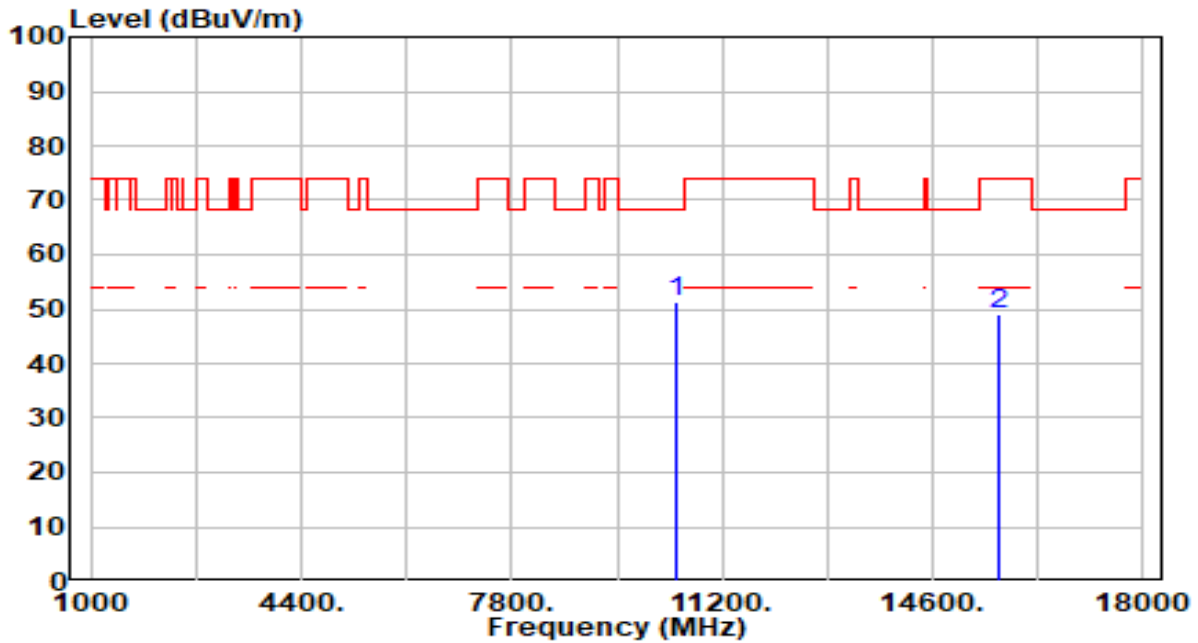


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	46.71	4.74	51.45	-16.75	68.20	300	2	Peak
2	15690.000	42.76	6.33	49.08	-24.92	74.00	300	69	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 54 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

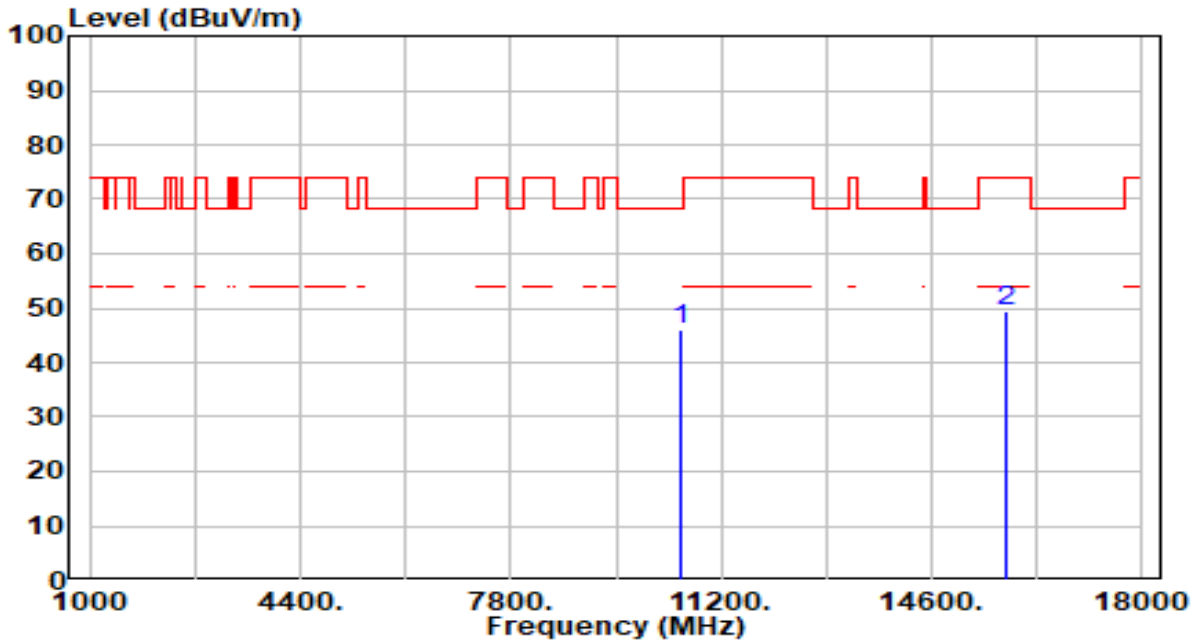


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.50	4.66	46.16	-22.04	68.20	300	76	Peak
2		43.07	6.55	49.62	-24.38	74.00	300	110	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 54 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

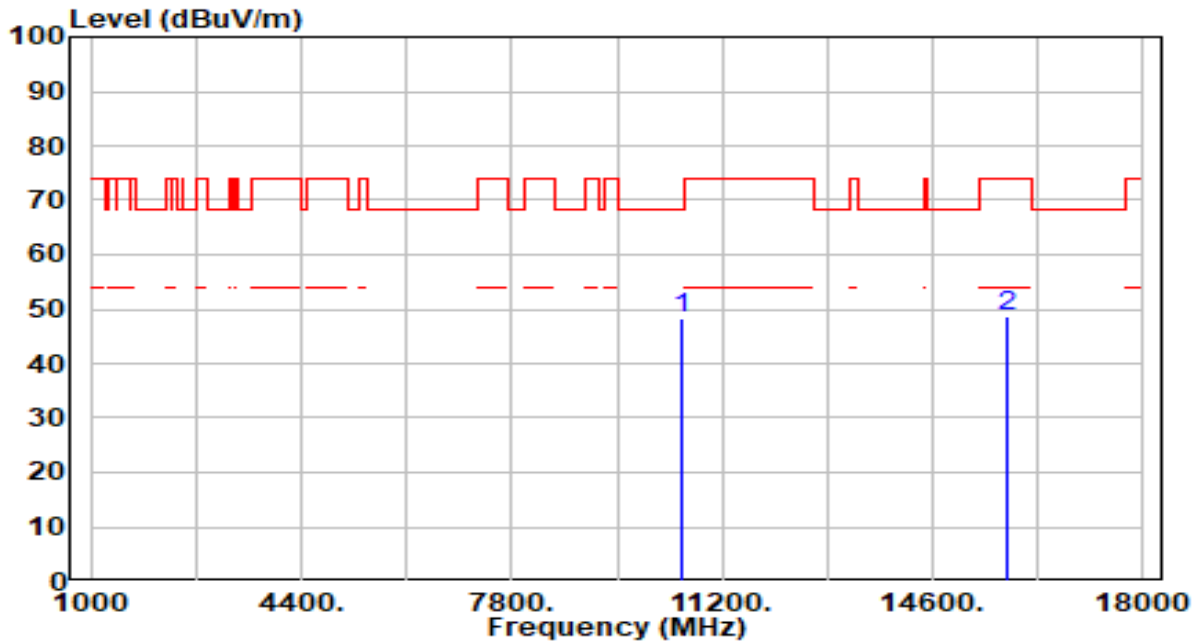


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	43.64	4.66	48.29	-19.91	68.20	300	128	Peak
2	15810.000	42.30	6.55	48.85	-25.15	74.00	300	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

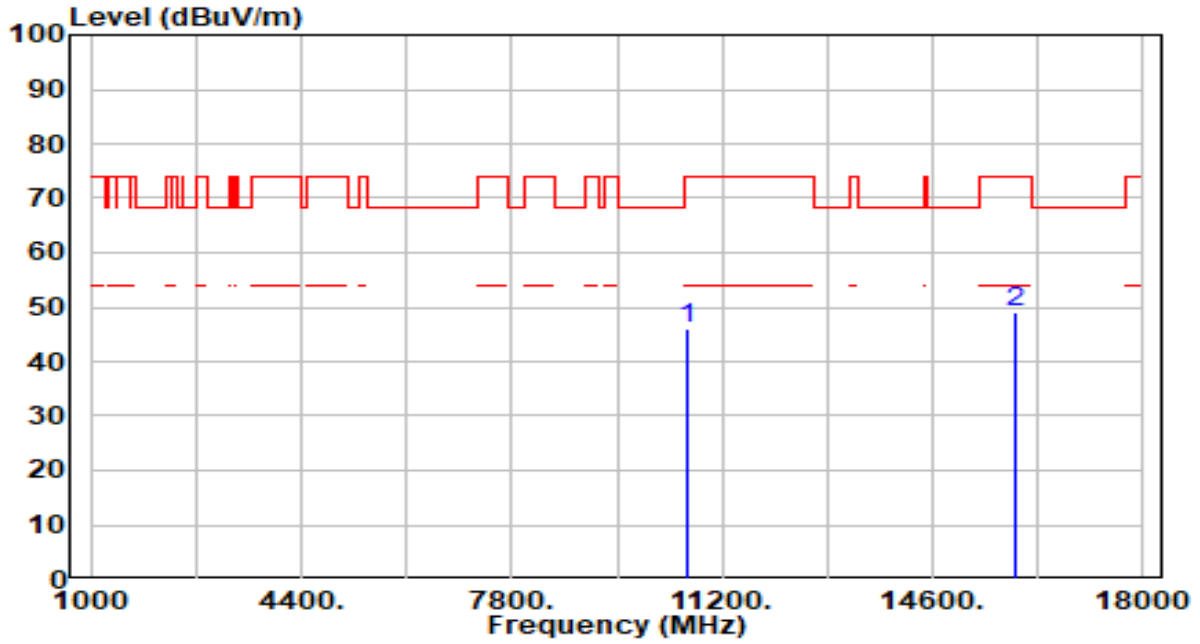


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.32	4.62	45.94	-28.06	74.00	300	37	Peak
2	* 15930.000	42.69	6.55	49.24	-24.76	74.00	300	76	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

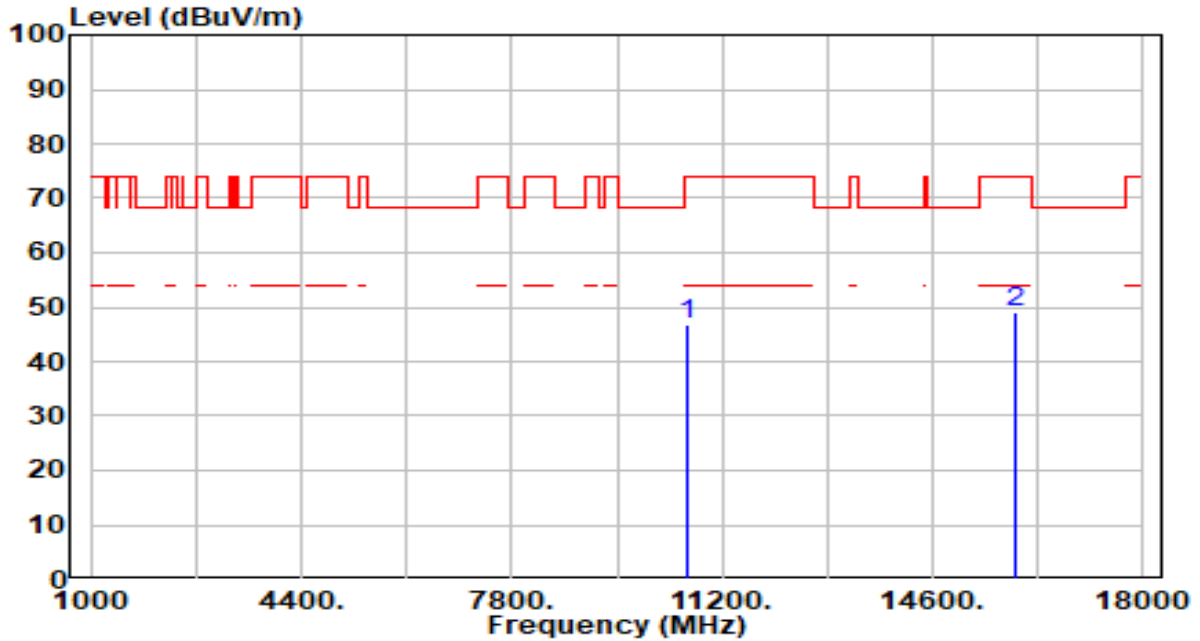


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.03	4.62	46.65	-27.35	74.00	300	170	Peak
2	* 15930.000	42.52	6.55	49.07	-24.93	74.00	300	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

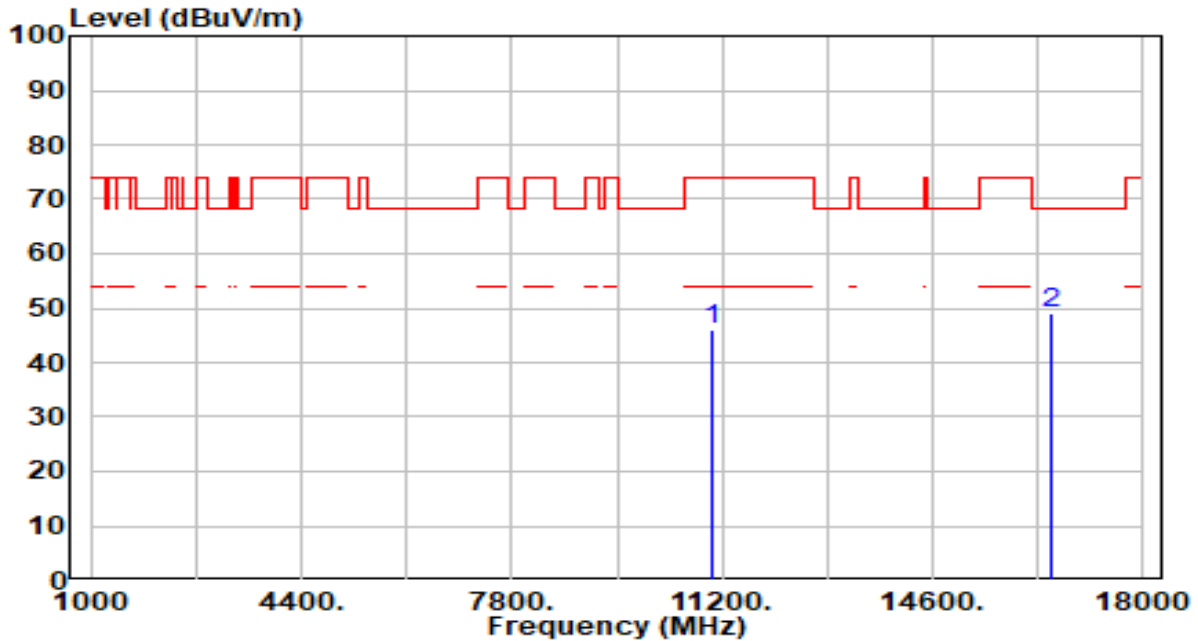


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.32	4.57	45.89	-28.11	74.00	300	136	Peak
2	* 16530.000	42.92	6.10	49.02	-19.18	68.20	300	202	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

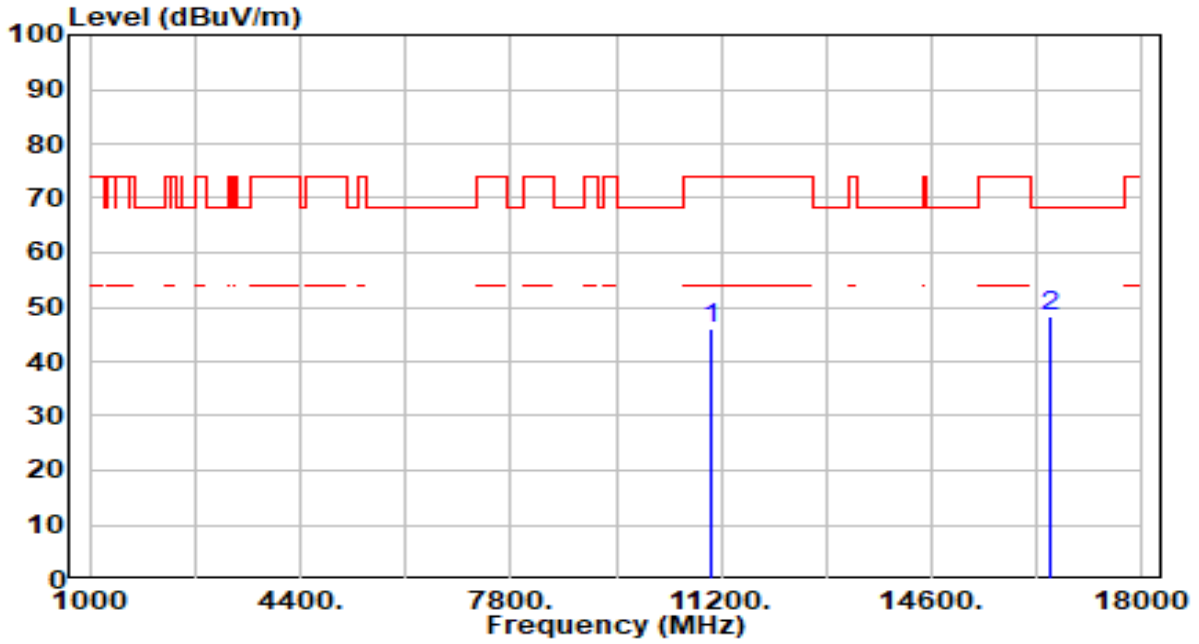


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.36	4.57	45.94	-28.06	74.00	300	18	Peak
2	* 16530.000	42.04	6.10	48.14	-20.06	68.20	300	0	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 110 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

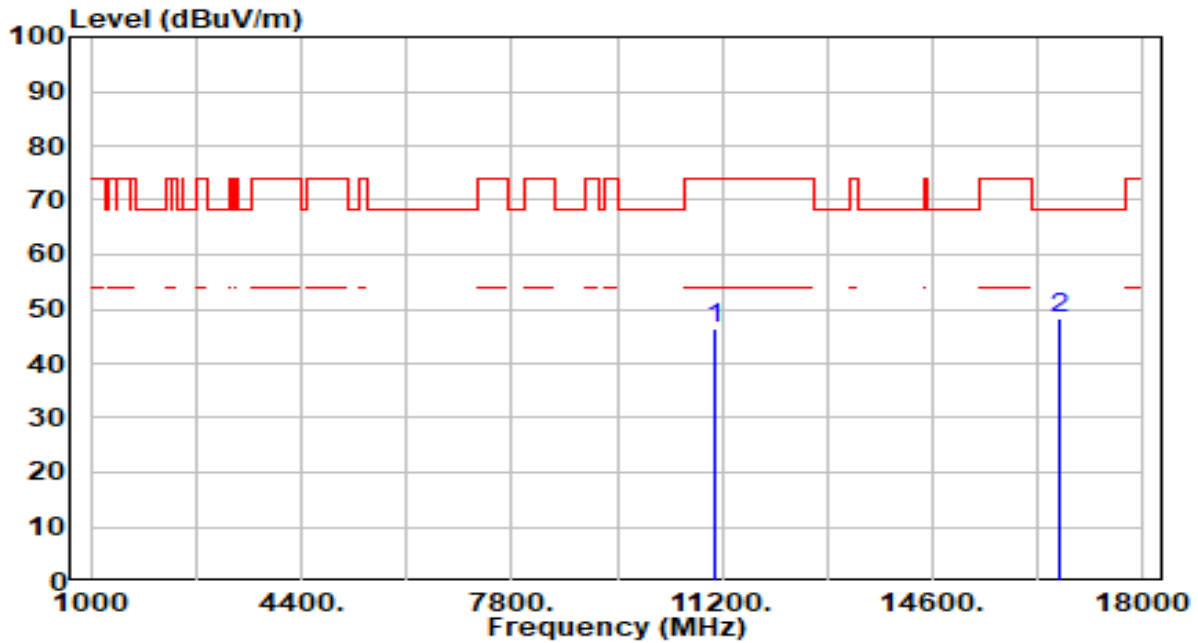


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.51	4.78	46.29	-27.71	74.00	300	128	Peak
2	* 16650.000	42.08	6.14	48.22	-19.98	68.20	300	179	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 110 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

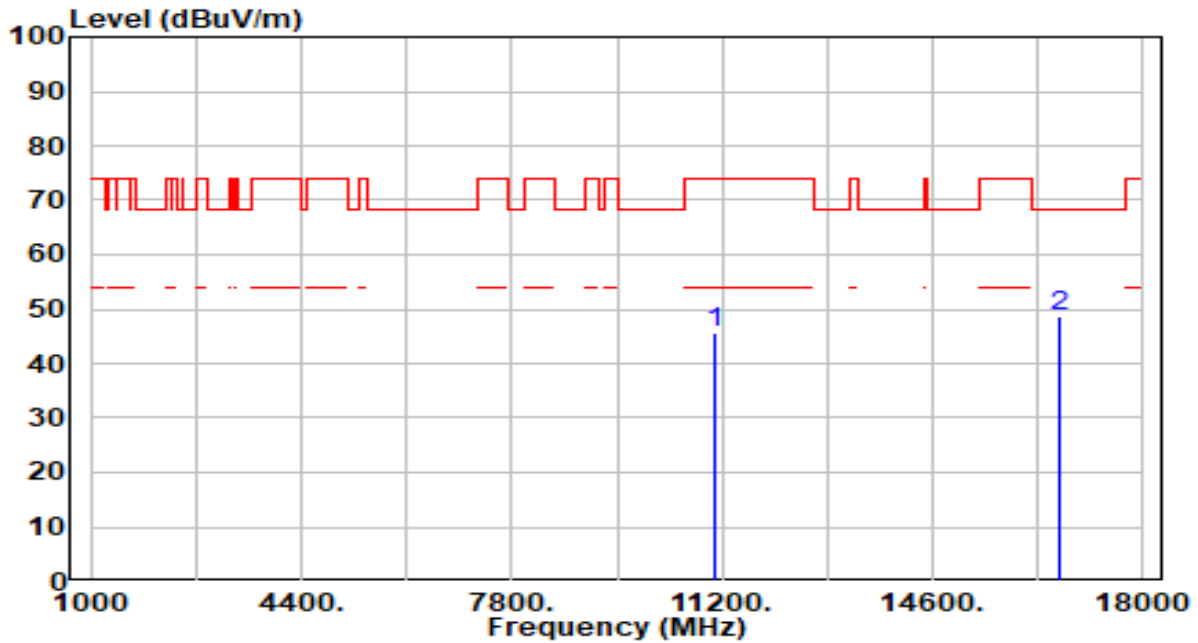


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.05	4.78	45.83	-28.17	74.00	300	266	Peak
2	* 16650.000	42.37	6.14	48.50	-19.70	68.20	300	4	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 134 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

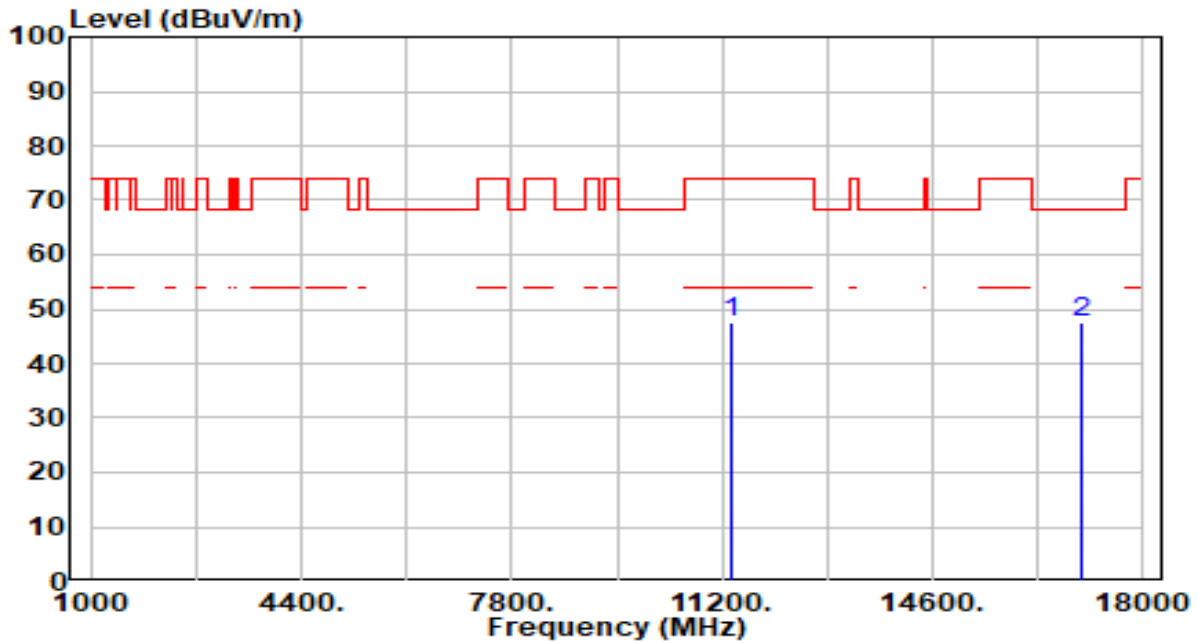


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.34	5.20	47.54	-26.46	74.00	300	82	Peak
2	* 17010.000	41.42	6.12	47.54	-20.66	68.20	300	156	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

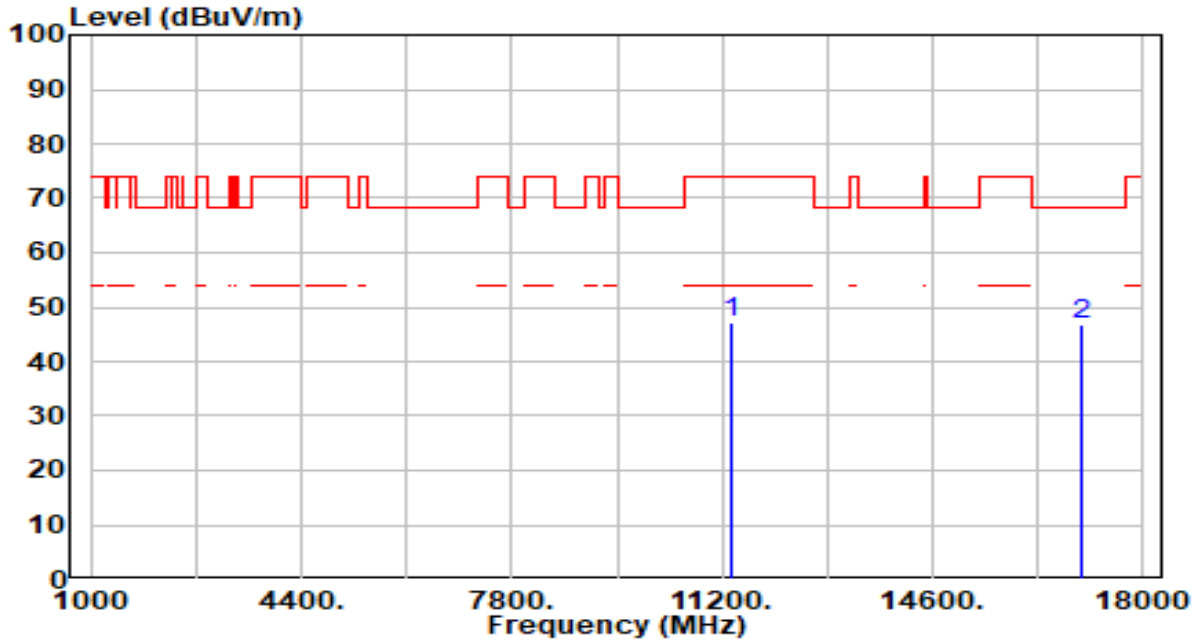


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.94	5.20	47.13	-26.87	74.00	300	75	Peak
2	* 17010.000	40.60	6.12	46.72	-21.48	68.20	300	123	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 142 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

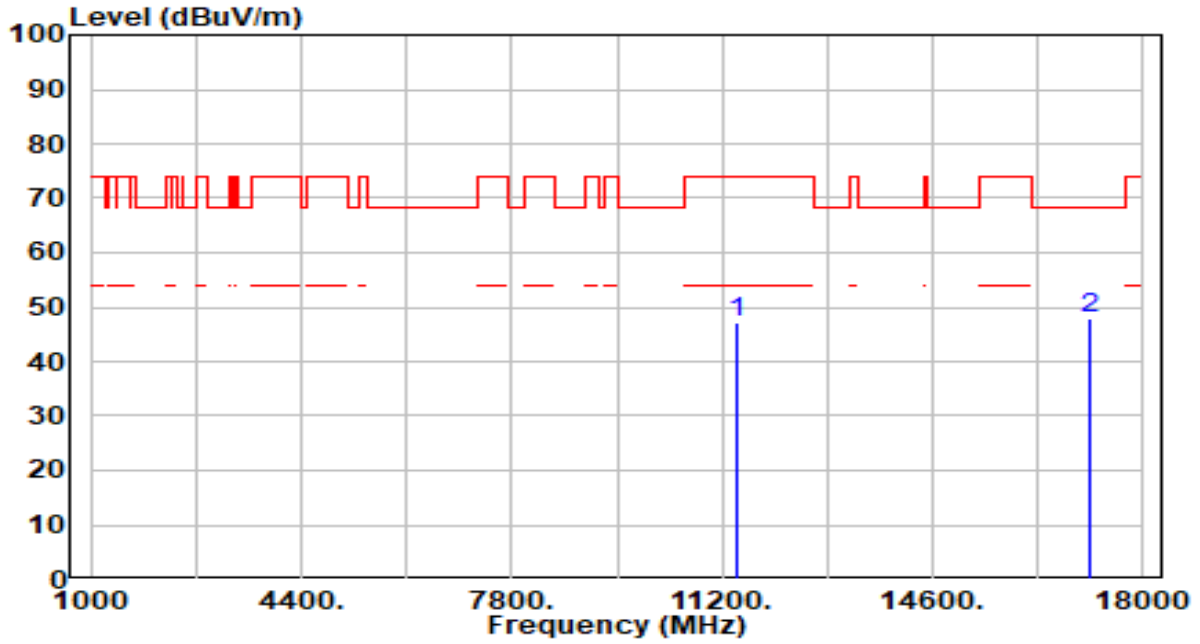


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.94	5.28	47.21	-26.79	74.00	300	152	Peak
2	* 17130.000	41.86	5.92	47.78	-20.42	68.20	300	228	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 142 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

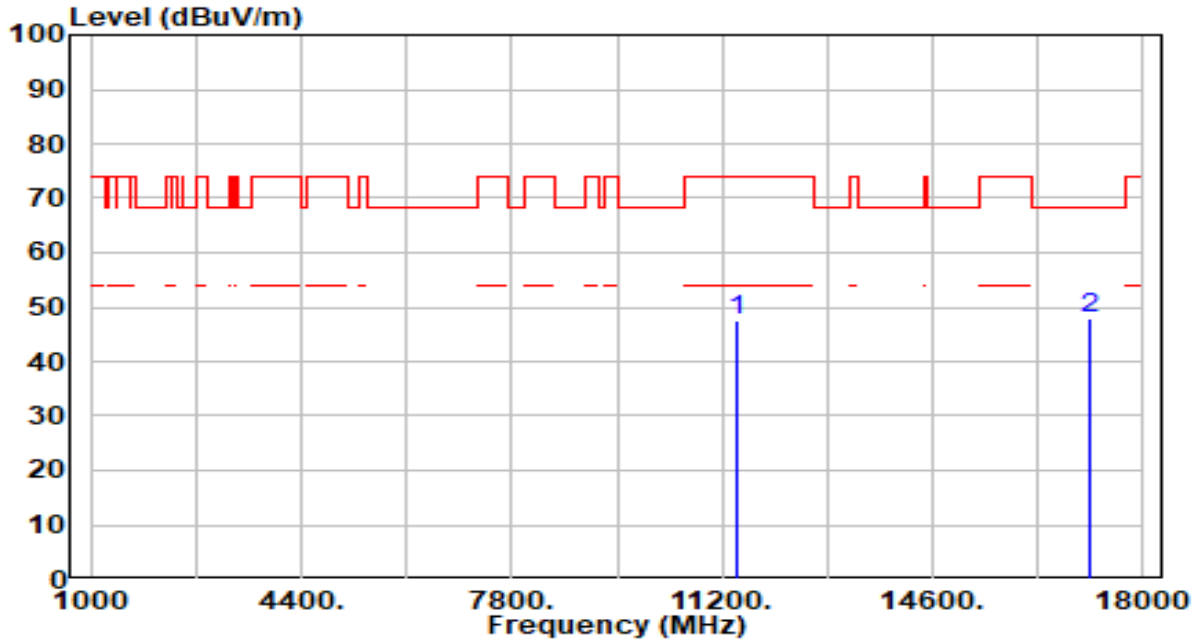


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.37	5.28	47.65	-26.35	74.00	300	213	Peak
2	* 17130.000	41.91	5.92	47.83	-20.37	68.20	300	66	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 151 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

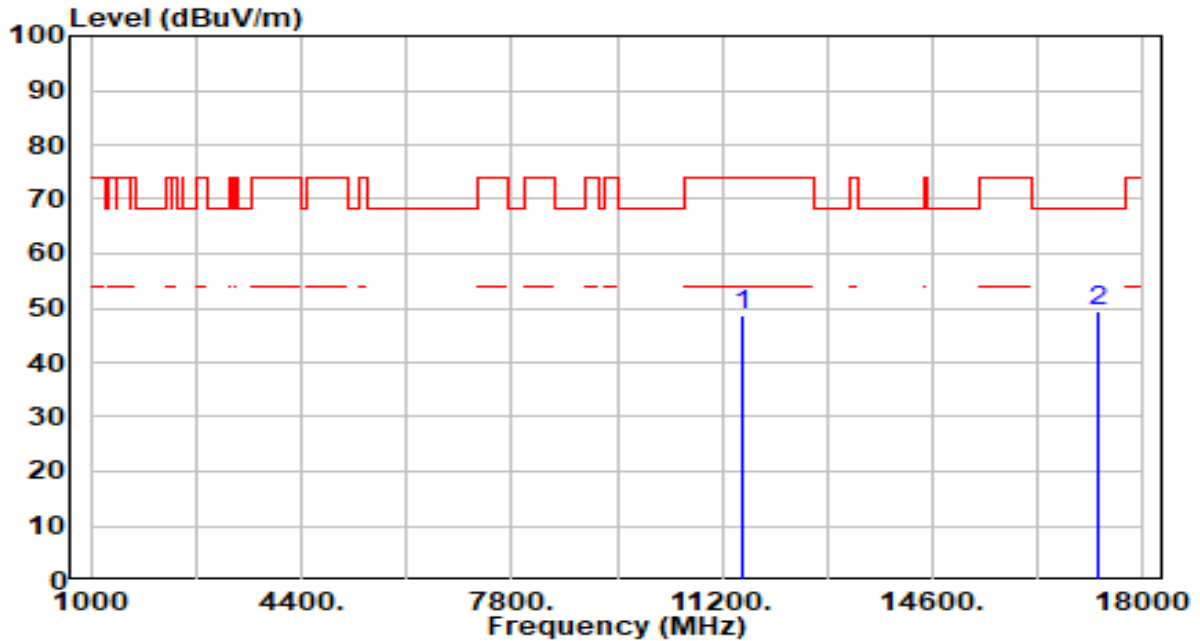


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.35	5.33	48.68	-25.32	74.00	300	281	Peak
2	* 17265.000	43.82	5.63	49.45	-18.75	68.20	300	99	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 151 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

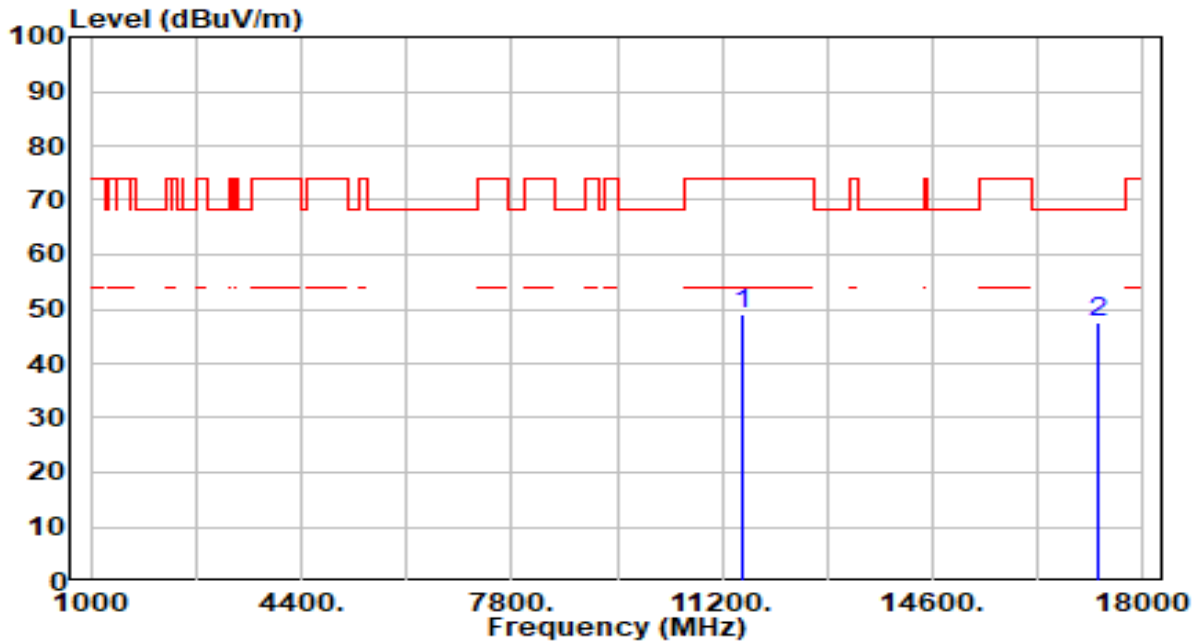


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.86	5.33	49.19	-24.81	74.00	300	221	Peak
2	* 17265.000	41.89	5.63	47.52	-20.68	68.20	300	110	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 159 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

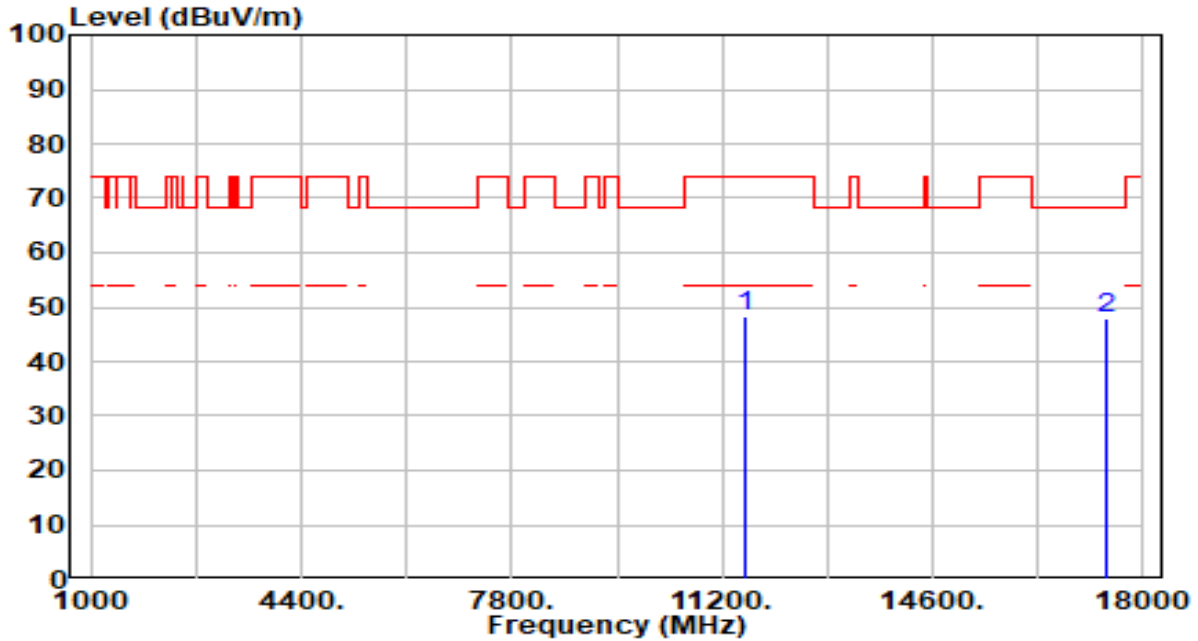


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.73	5.39	48.12	-25.88	74.00	300	294	Peak
2	* 17385.000	42.60	5.31	47.91	-20.29	68.20	300	238	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 159 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

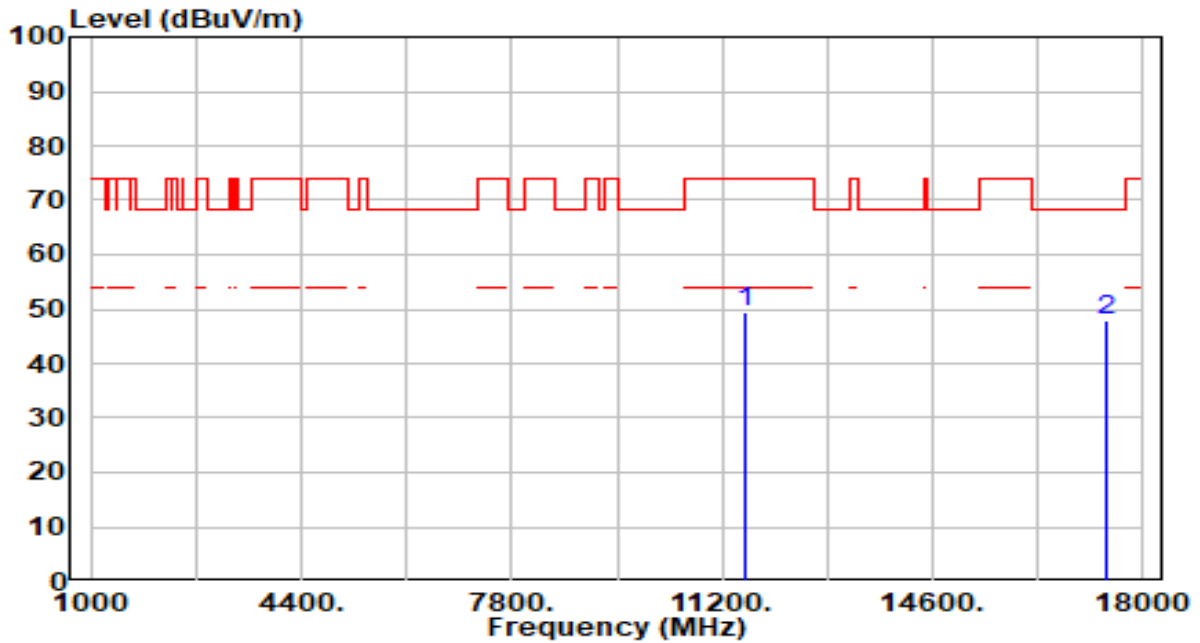


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	44.13	5.39	49.52	-24.48	74.00	300	39	Peak
2	* 17385.000	42.44	5.31	47.75	-20.45	68.20	300	202	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

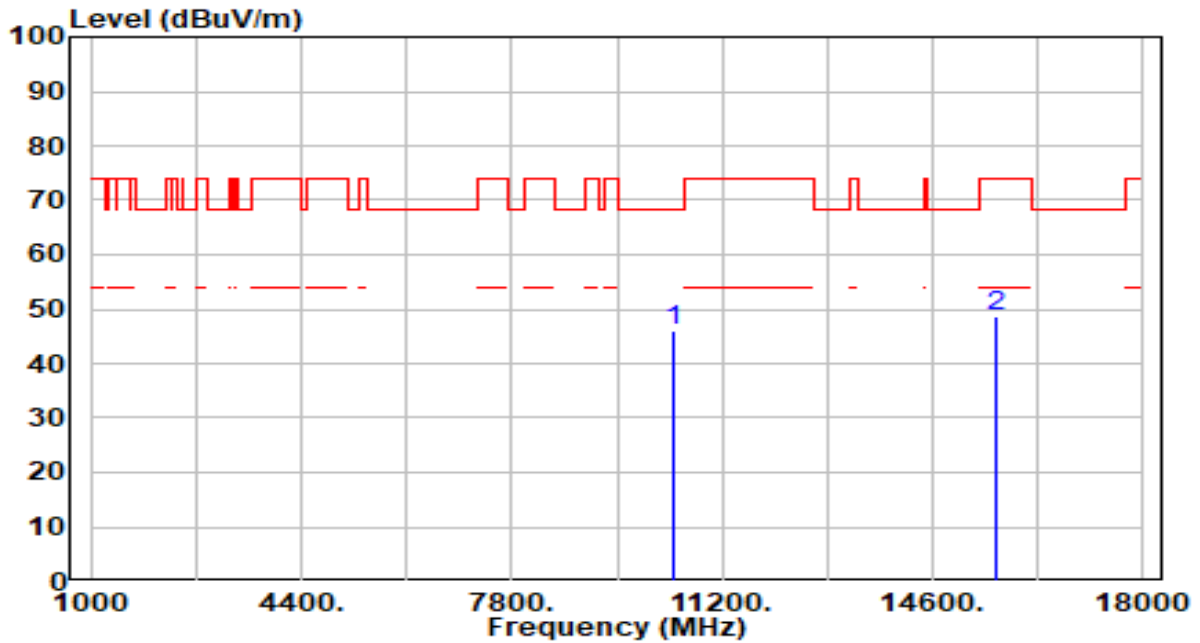


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	41.17	4.79	45.96	-22.24	68.20	300	359	Peak
2	15630.000	42.59	6.21	48.80	-25.20	74.00	300	253	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

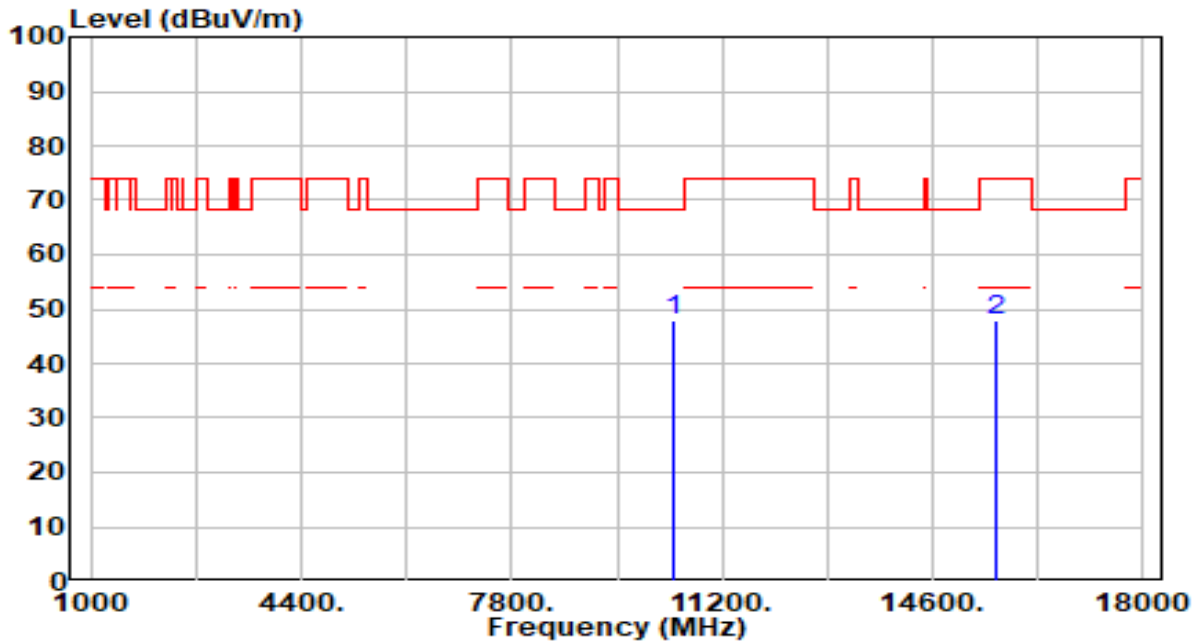


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	43.08	4.79	47.87	-20.33	68.20	300	14	Peak
2	15630.000	41.87	6.21	48.08	-25.92	74.00	300	349	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

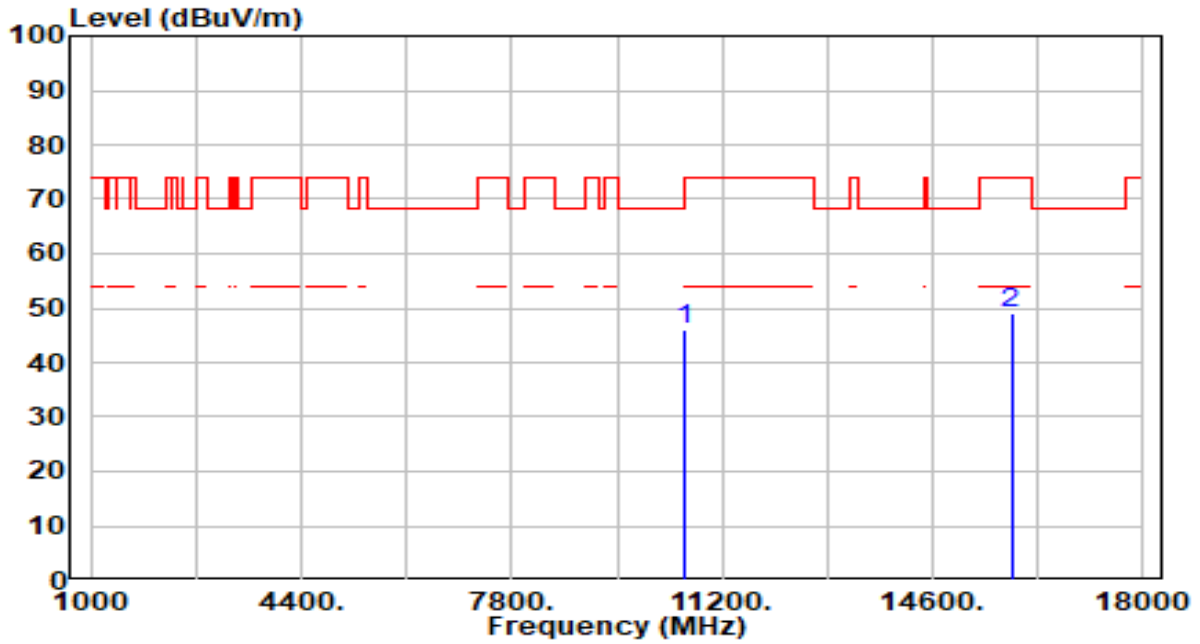


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.38	4.63	46.00	-22.20	68.20	300	323	Peak
2	15870.000	42.45	6.55	49.00	-25.00	74.00	300	93	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

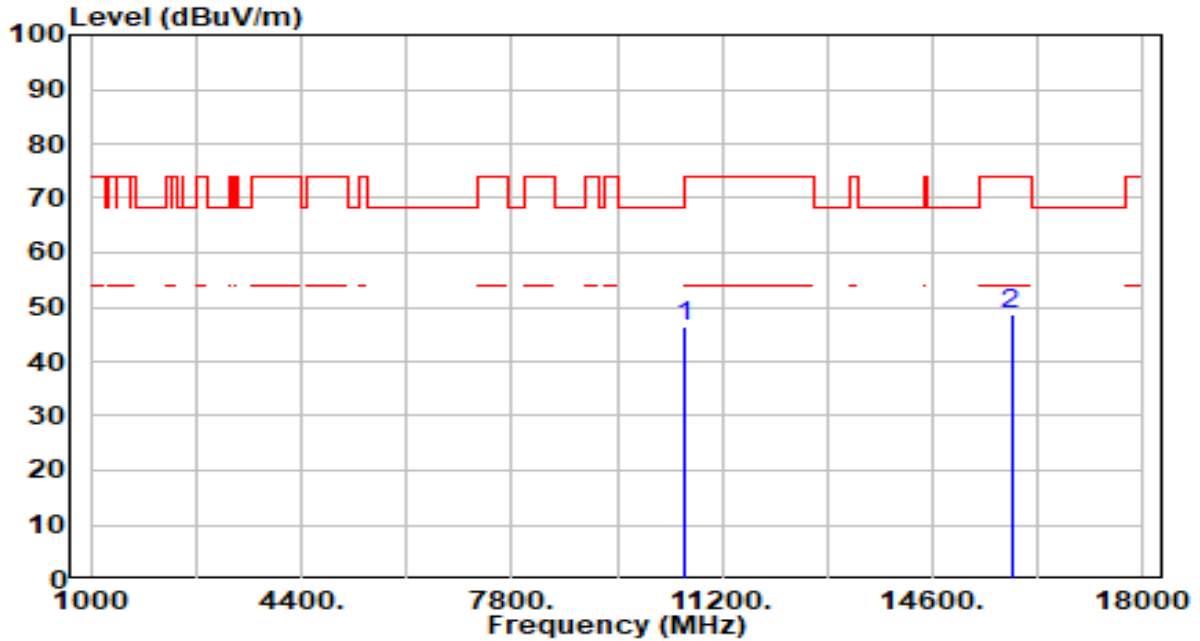


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.60	4.63	46.23	-21.97	68.20	300	360	Peak
2	15870.000	42.13	6.55	48.67	-25.33	74.00	300	36	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

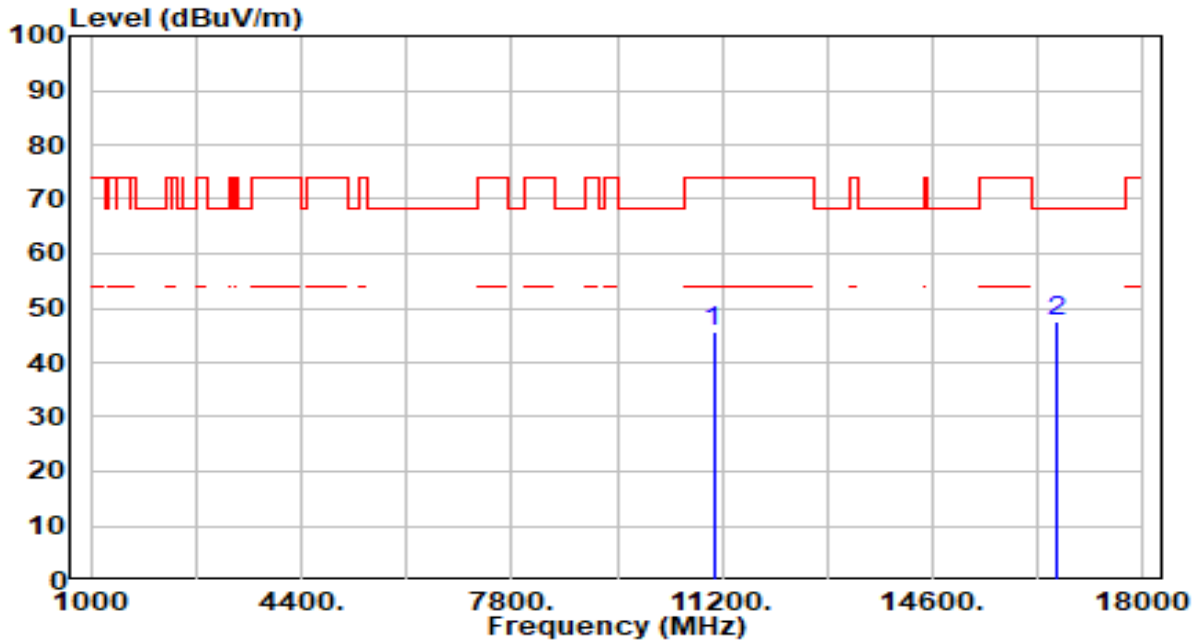


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.91	4.68	45.59	-28.41	74.00	300	80	Peak
2	* 16590.000	41.33	6.11	47.44	-20.76	68.20	300	58	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

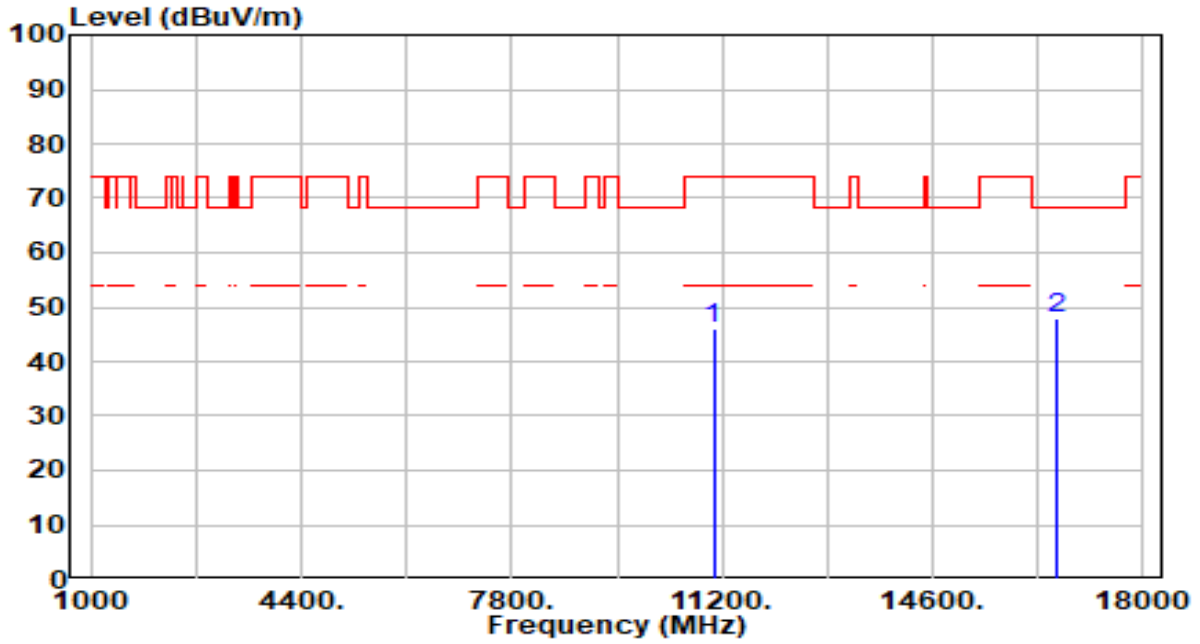


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.43	4.68	46.11	-27.89	74.00	300	264	Peak
2	* 16590.000	41.92	6.11	48.03	-20.17	68.20	300	136	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 122 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

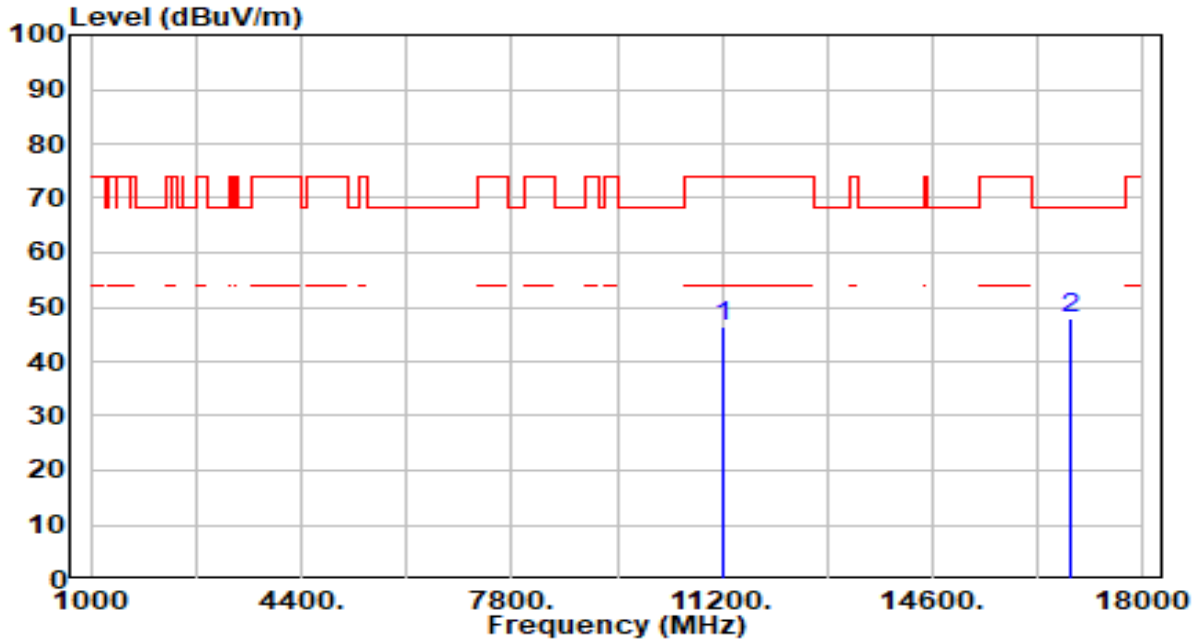


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.39	5.06	46.46	-27.54	74.00	300	360	Peak
2	* 16830.000	41.81	6.21	48.02	-20.18	68.20	300	279	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 122 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

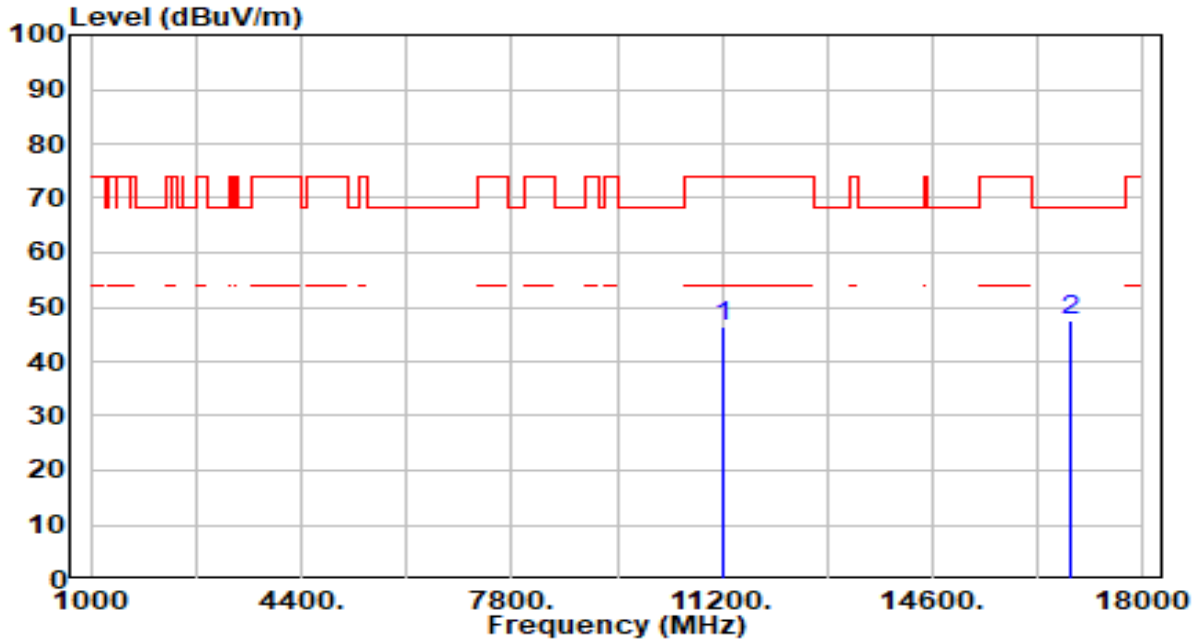


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.41	5.06	46.48	-27.52	74.00	300	312	Peak
2	* 16830.000	41.41	6.21	47.62	-20.58	68.20	300	99	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 138 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

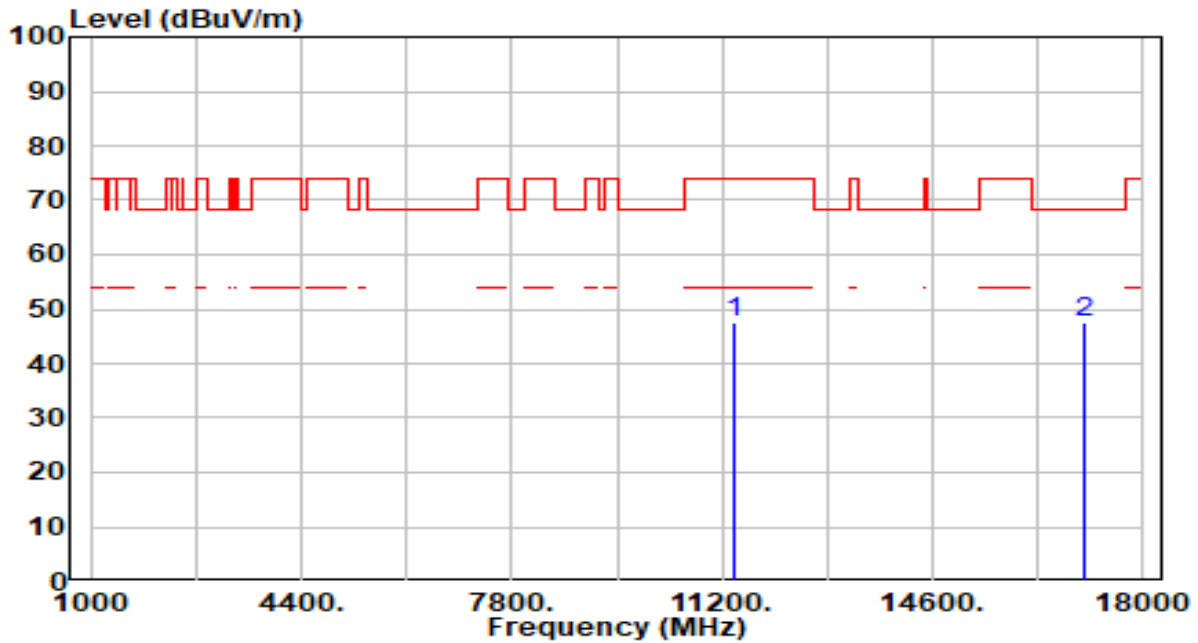


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.21	5.24	47.45	-26.55	74.00	300	190	Peak
2	* 17070.000	41.49	6.02	47.52	-20.68	68.20	300	117	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 138 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

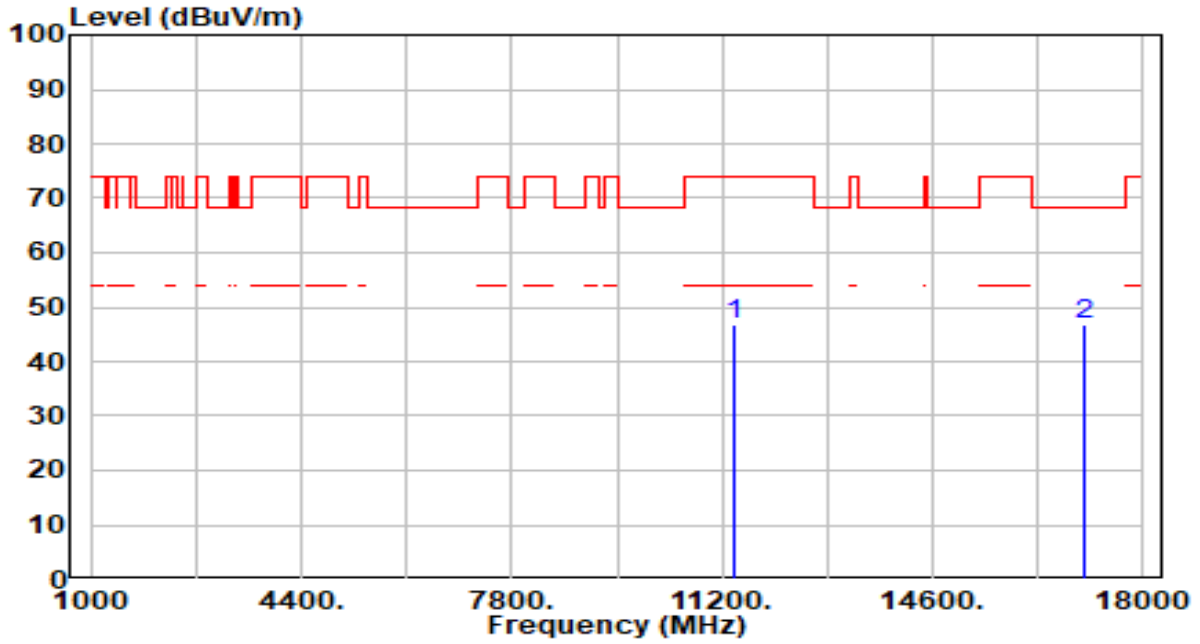


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.38	5.24	46.63	-27.37	74.00	300	346	Peak
2	* 17070.000	40.75	6.02	46.78	-21.42	68.20	300	25	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band4_TX_CH 155 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

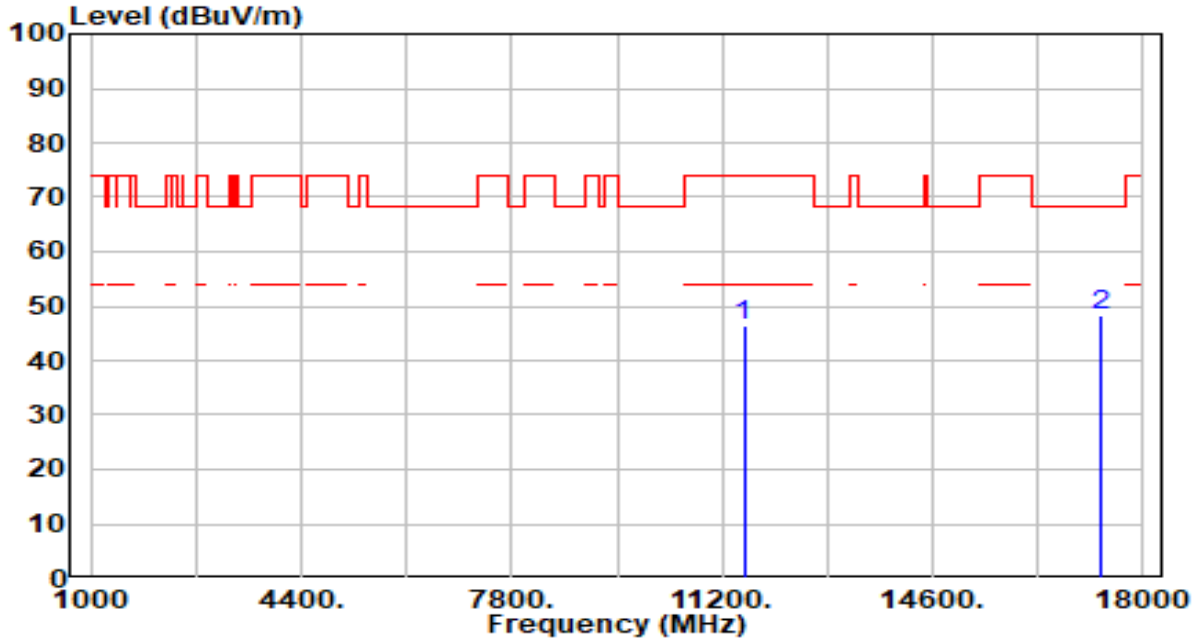


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	41.10	5.36	46.46	-27.54	74.00	300	42	Peak
2	* 17325.000	42.86	5.47	48.33	-19.87	68.20	300	300	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band4_TX_CH 155 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

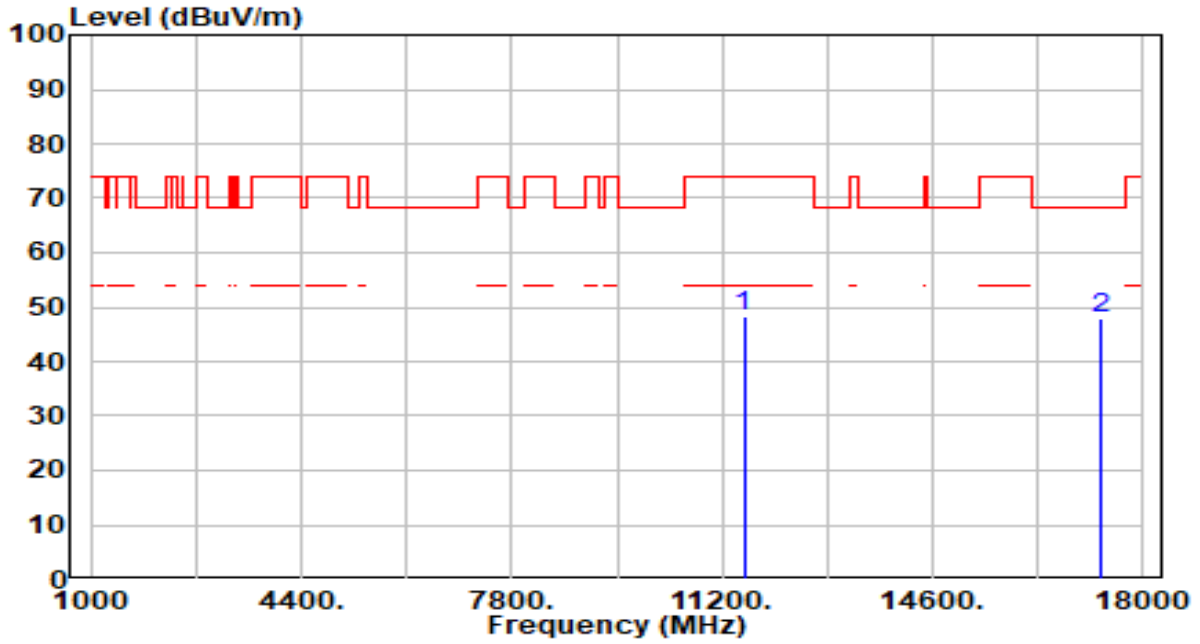


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.96	5.36	48.33	-25.67	74.00	300	232	Peak
2	* 17325.000	42.39	5.47	47.86	-20.34	68.20	300	360	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

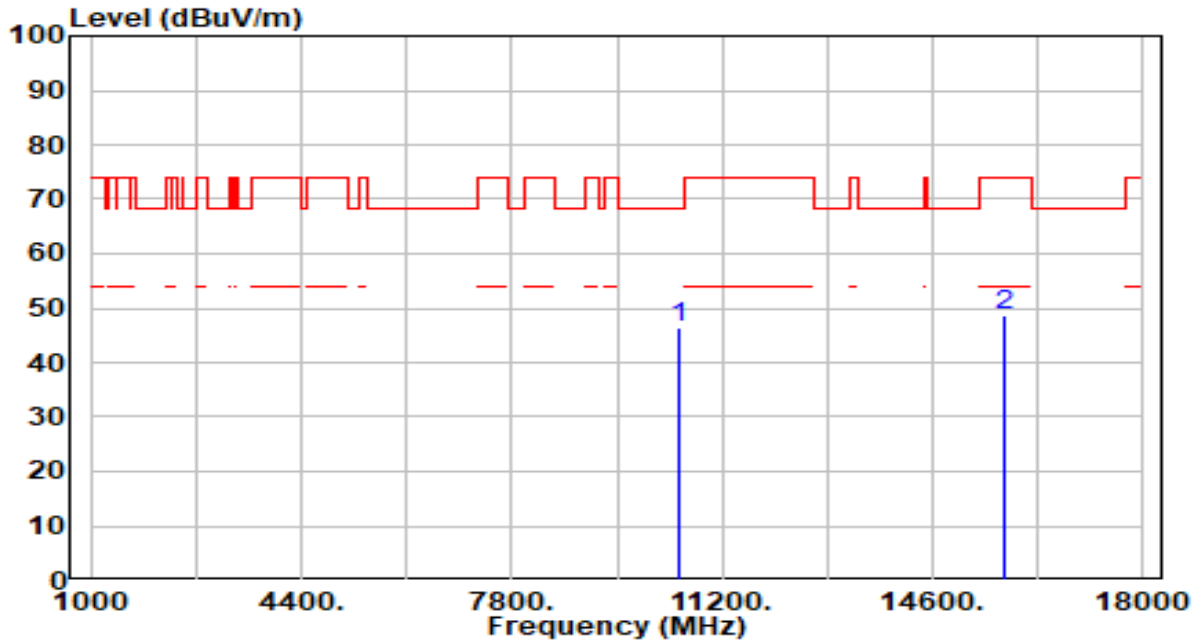


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	41.86	4.68	46.55	-21.65	68.20	300	360	Peak
2	15750.000	42.42	6.45	48.86	-25.14	74.00	300	43	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

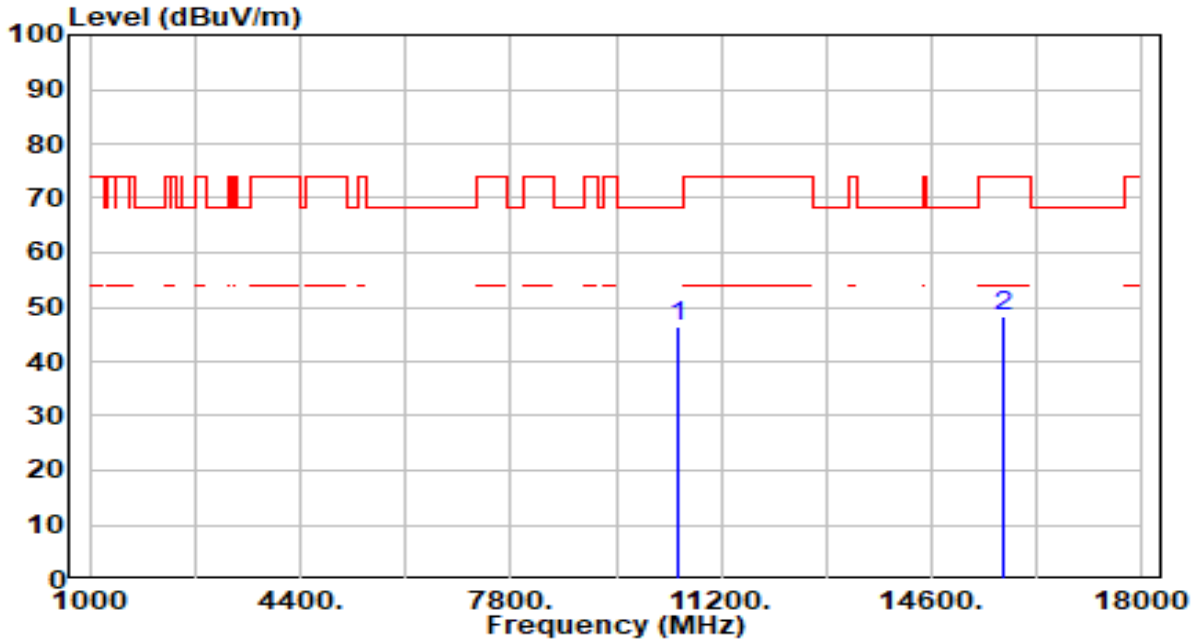


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	41.91	4.68	46.60	-21.60	68.20	300	246	Peak
2	15750.000	41.97	6.45	48.42	-25.58	74.00	300	215	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

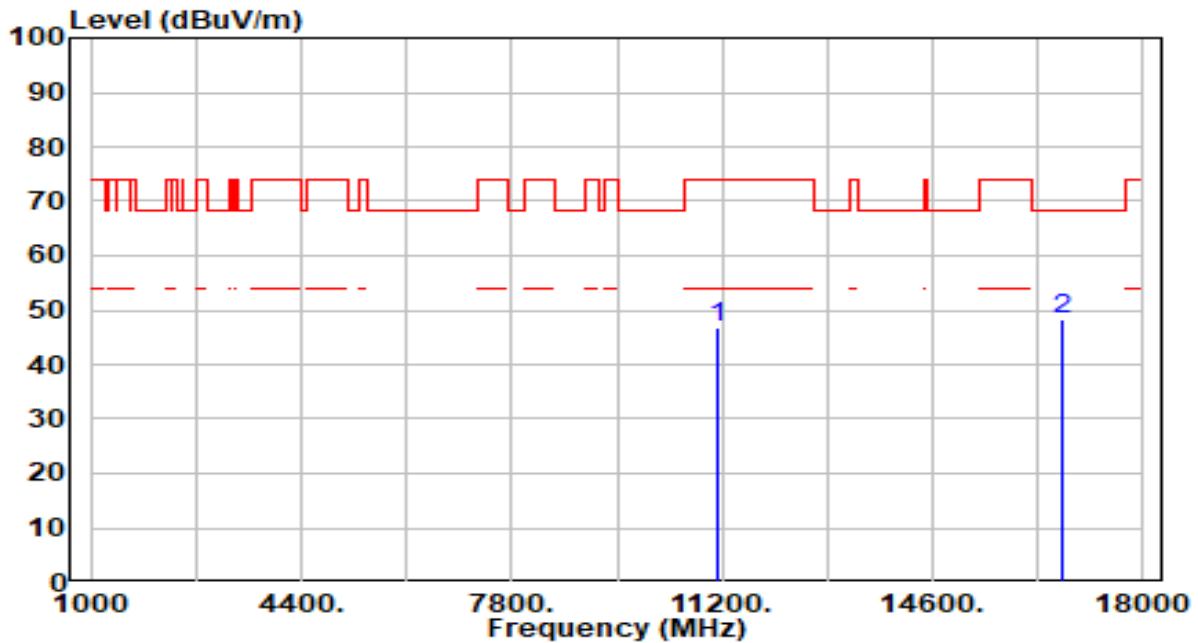


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.77	4.89	46.65	-27.35	74.00	300	48	Peak
2	* 16710.000	42.18	6.17	48.35	-19.85	68.20	300	349	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

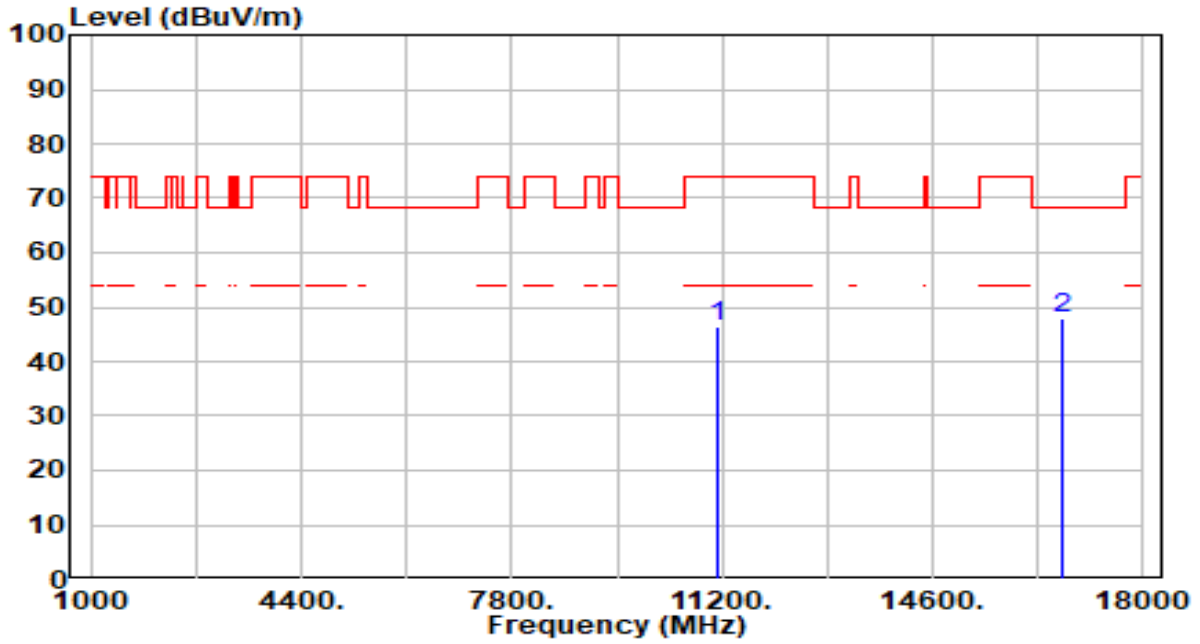


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.63	4.89	46.51	-27.49	74.00	300	150	Peak
2	* 16710.000	41.64	6.17	47.81	-20.39	68.20	300	213	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

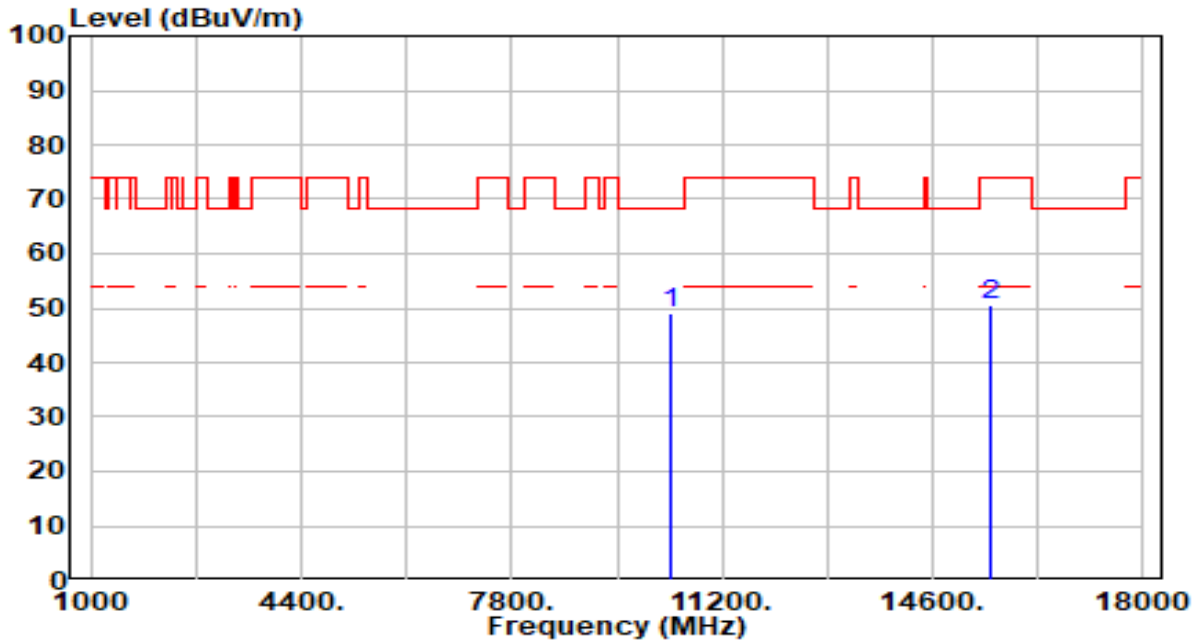


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	44.37	4.87	49.24	-18.96	68.20	300	206	Peak
2		44.52	6.21	50.73	-23.27	74.00	300	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

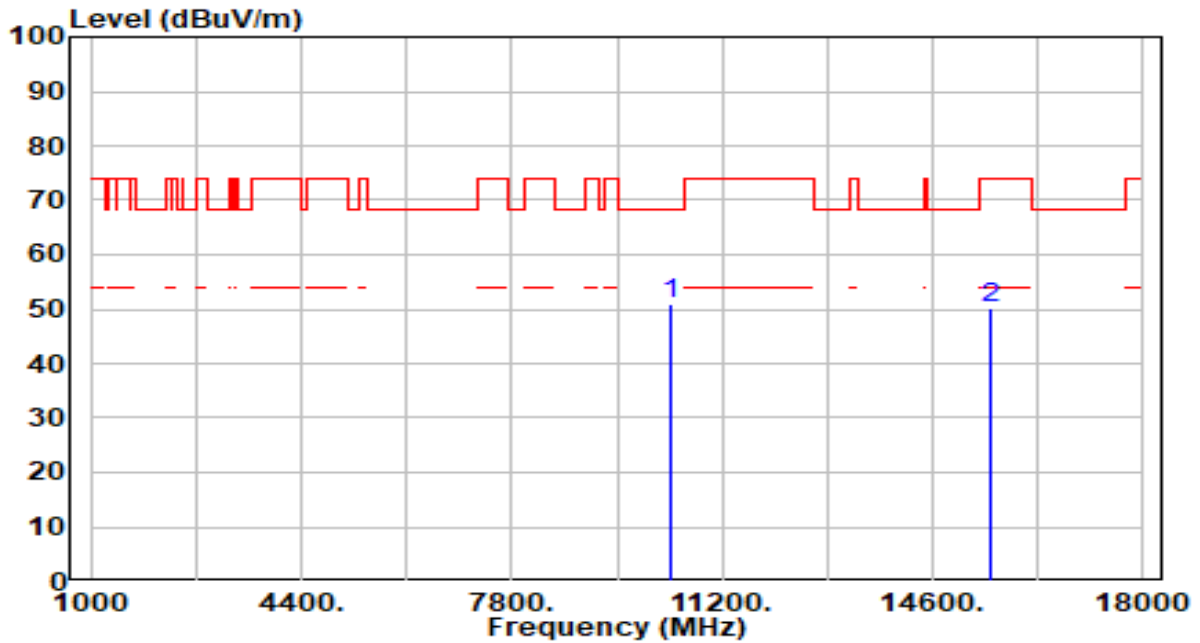


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	46.16	4.87	51.03	-17.17	68.20	300	40	Peak
2	15540.000	43.82	6.21	50.03	-23.97	74.00	300	263	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 40 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

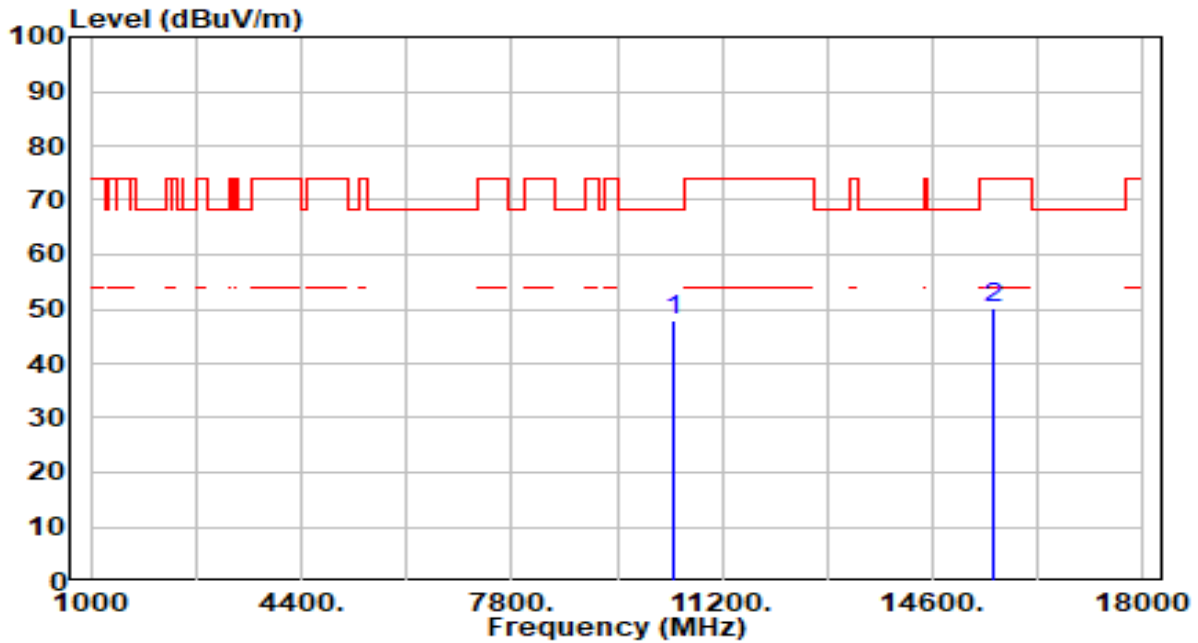


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10400.000	43.03	4.82	47.85	-20.35	68.20	300	104	Peak
2	15600.000	43.97	6.15	50.12	-23.88	74.00	300	357	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 40 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

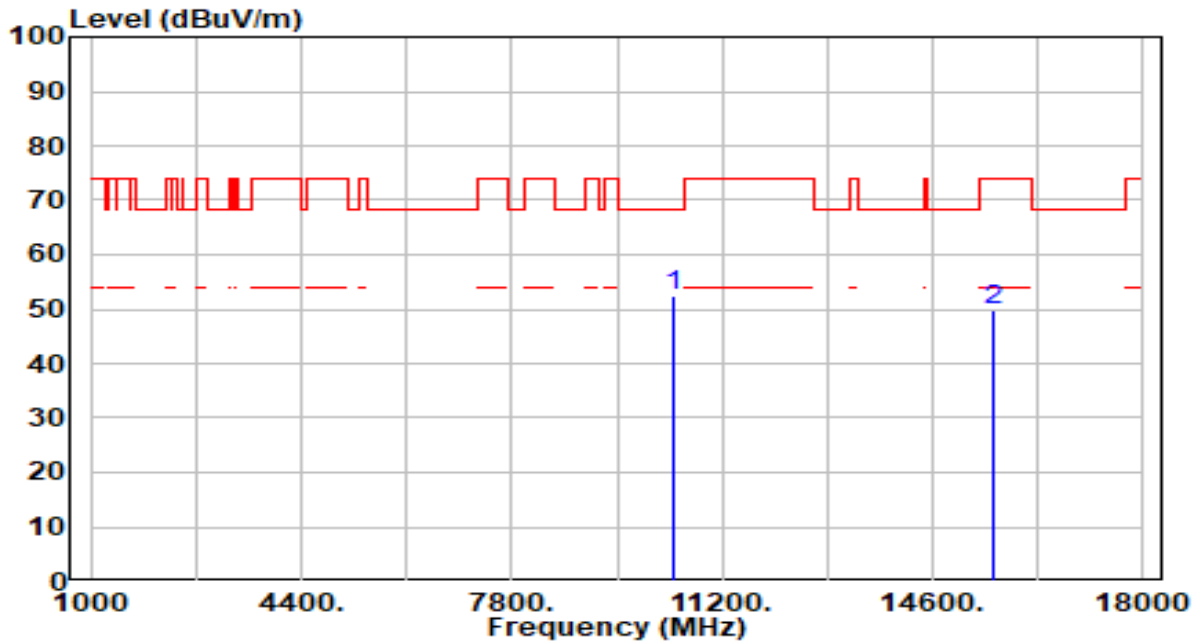


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10400.000	47.58	4.82	52.40	-15.80	68.20	300	23	Peak
2	15600.000	43.55	6.15	49.70	-24.30	74.00	300	52	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 48 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

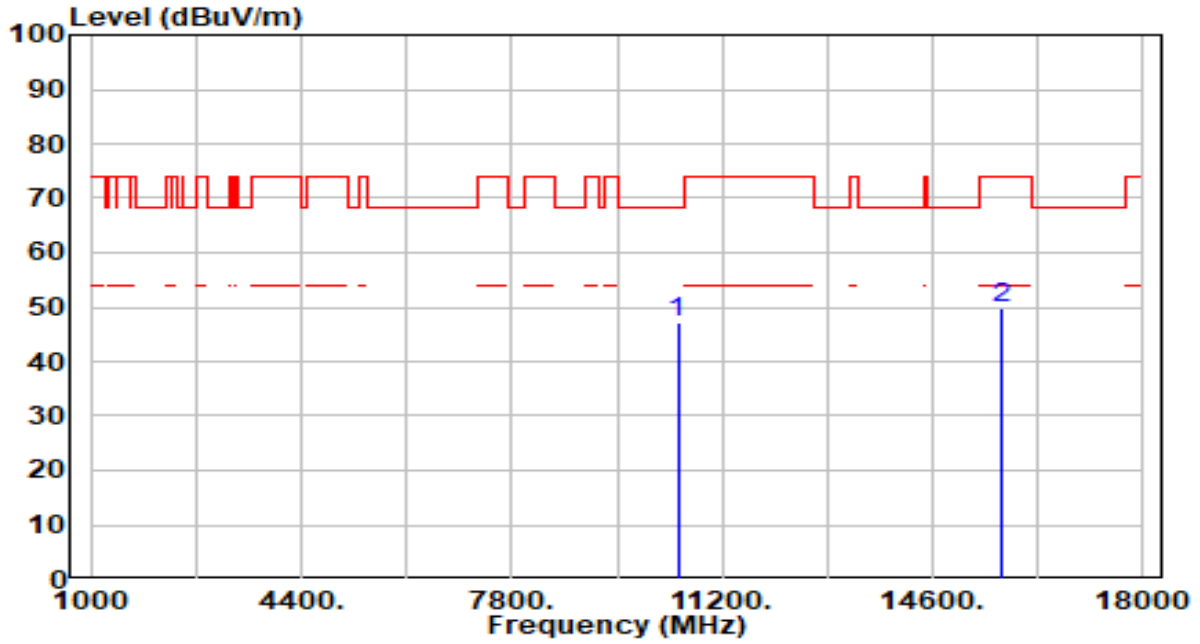


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	42.45	4.71	47.16	-21.04	68.20	300	254	Peak
2	15720.000	43.32	6.39	49.71	-24.29	74.00	300	97	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 48 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

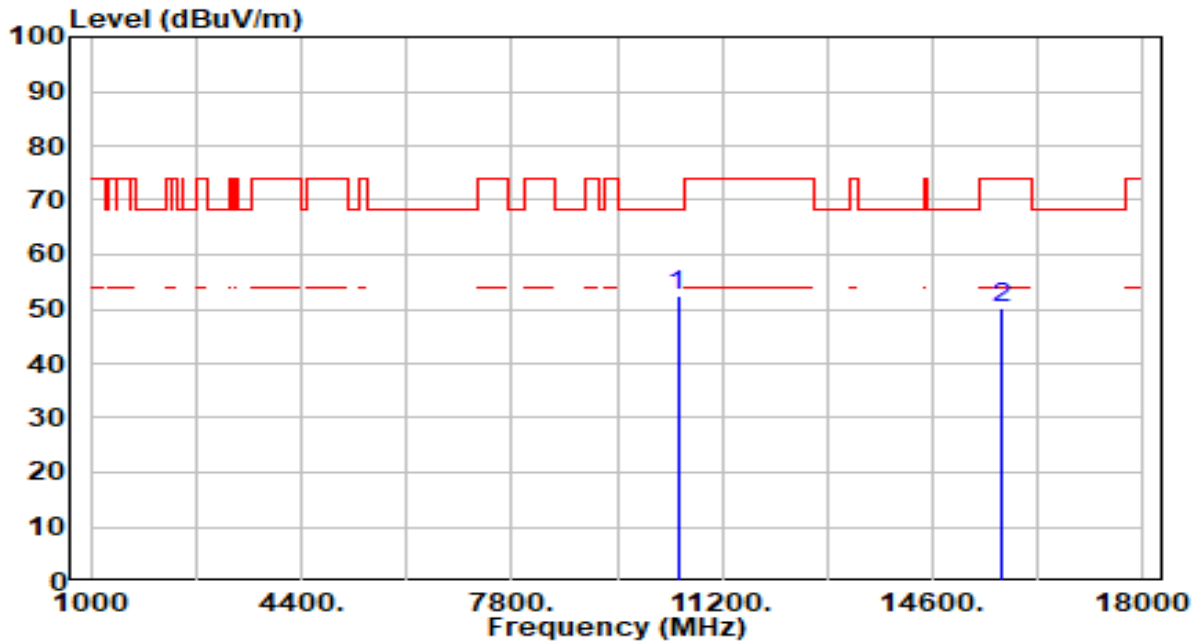


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	47.81	4.71	52.52	-15.68	68.20	300	0	Peak
2	15720.000	43.97	6.39	50.36	-23.64	74.00	300	183	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 52 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

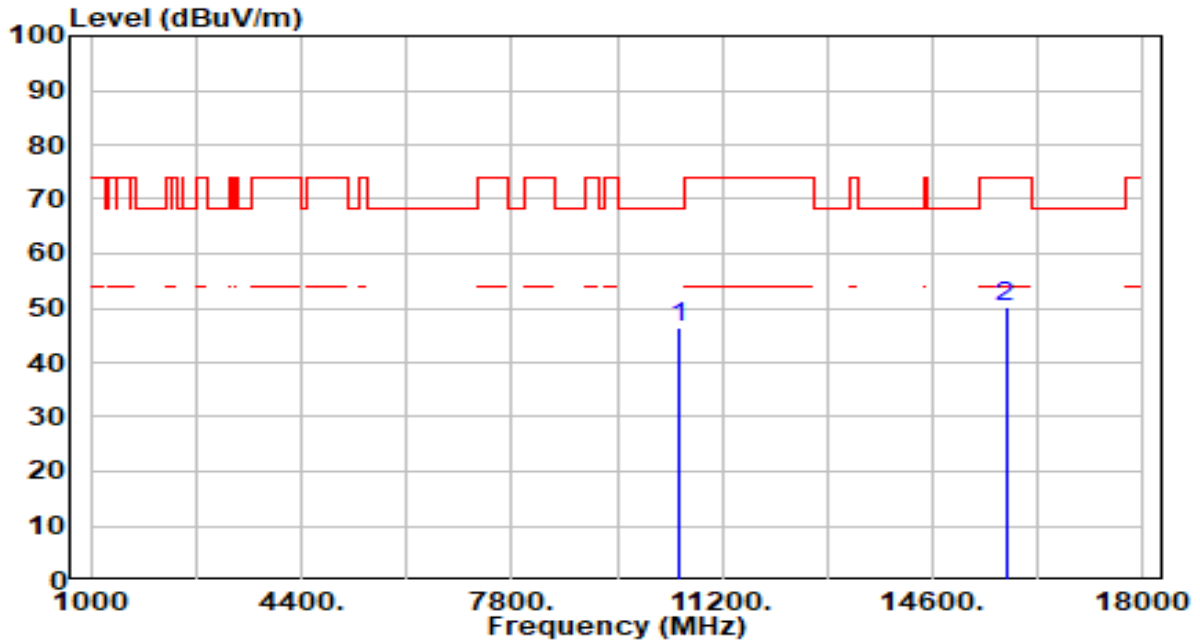


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.57	4.67	46.24	-21.96	68.20	300	34	Peak
2		43.55	6.51	50.06	-23.94	74.00	300	100	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 52 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

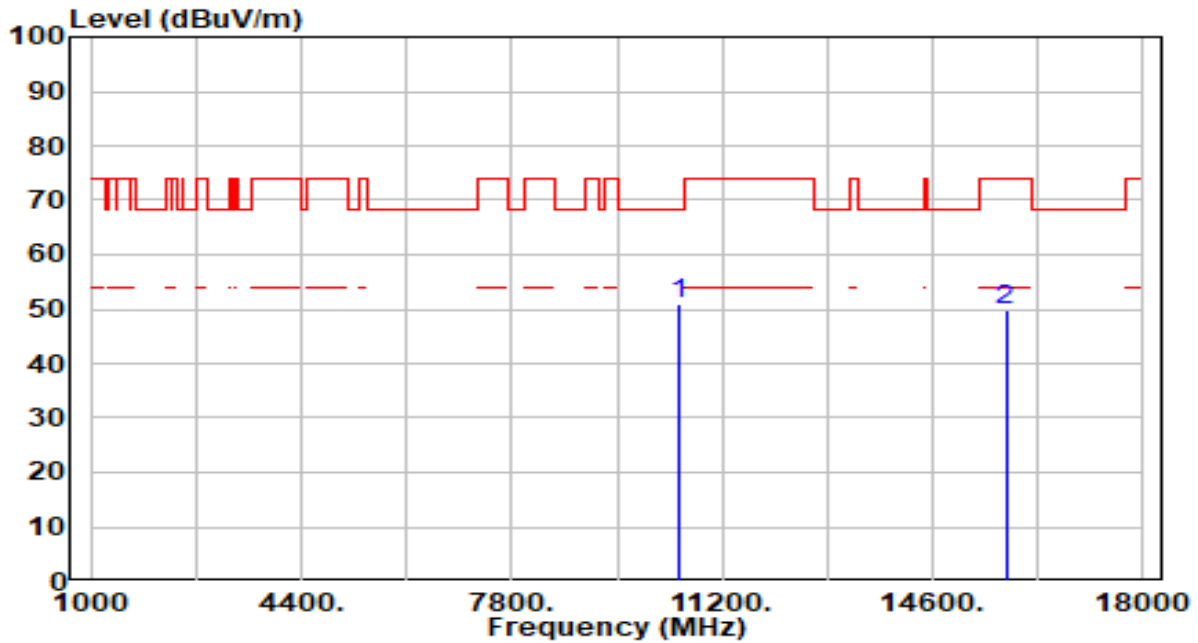


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	46.34	4.67	51.01	-17.19	68.20	300	49	Peak
2	15780.000	43.21	6.51	49.72	-24.28	74.00	300	292	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 60 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

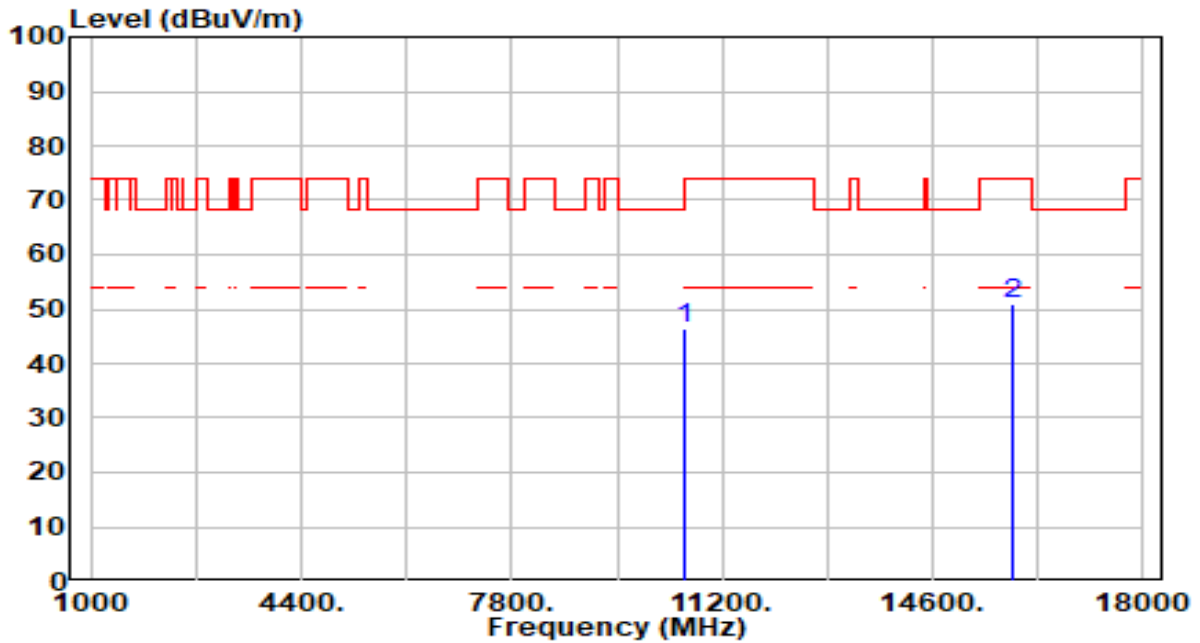


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	41.90	4.61	46.51	-21.69	68.20	300	11	Peak
2	15900.000	44.55	6.55	51.10	-22.90	74.00	300	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 60 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

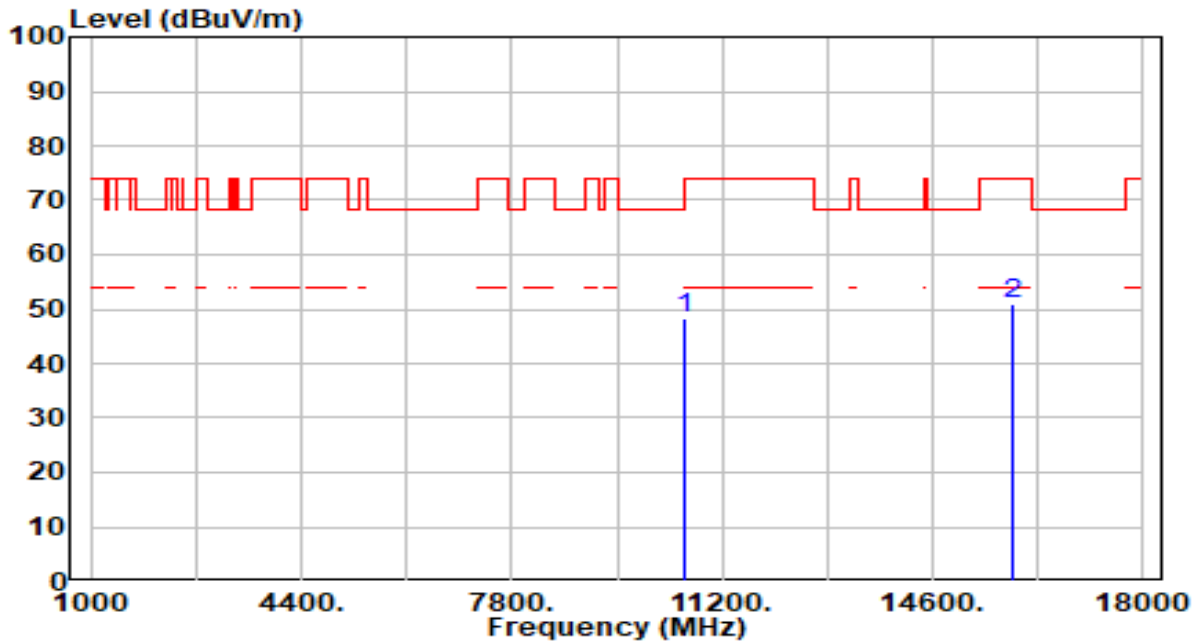


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	43.63	4.61	48.24	-19.96	68.20	300	284	Peak
2	15900.000	44.37	6.55	50.92	-23.08	74.00	300	312	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

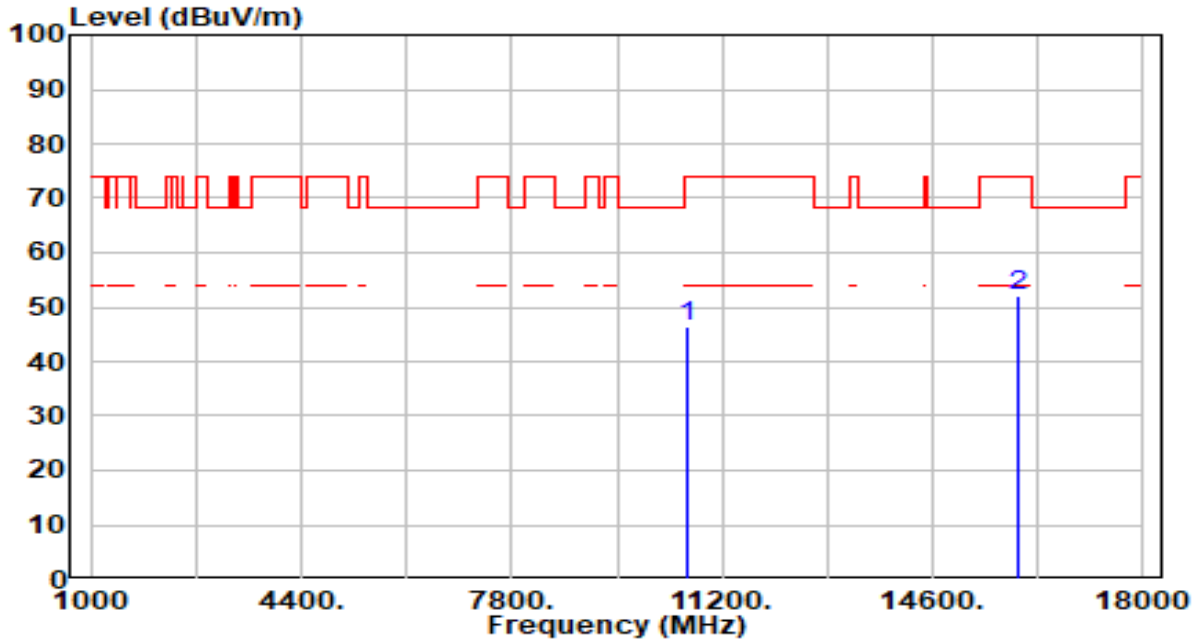


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.90	4.62	46.53	-27.47	74.00	300	255	Peak
2	* 15960.000	45.57	6.55	52.12	-21.88	74.00	300	331	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

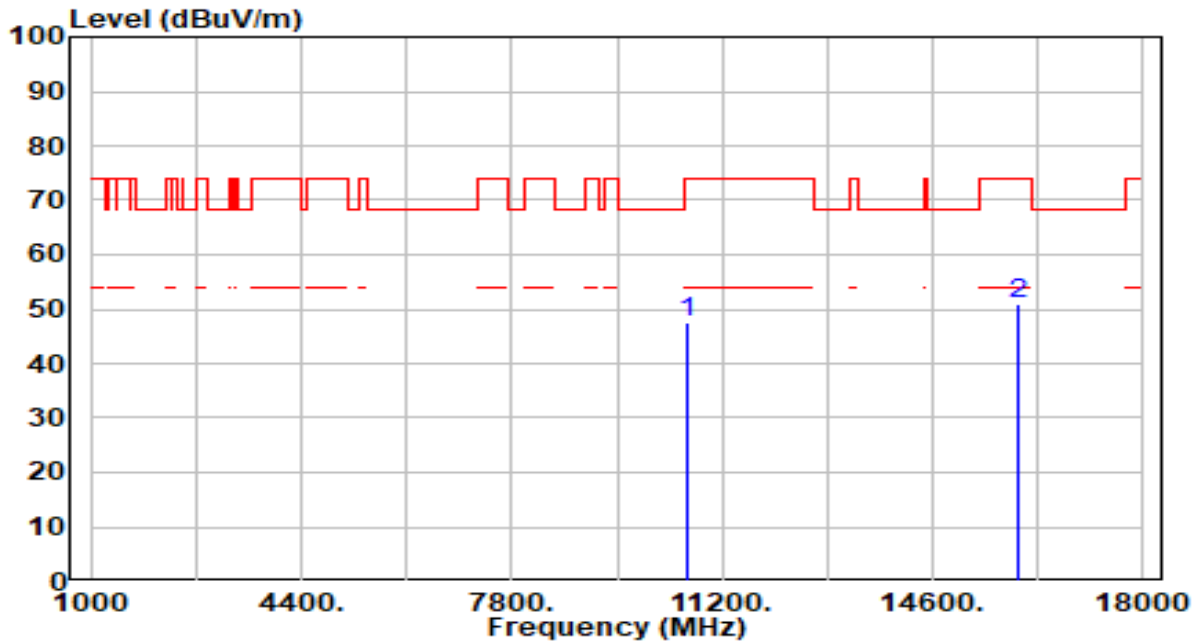


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.76	4.62	47.38	-26.62	74.00	300	179	Peak
2	* 15960.000	44.25	6.55	50.80	-23.20	74.00	300	108	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

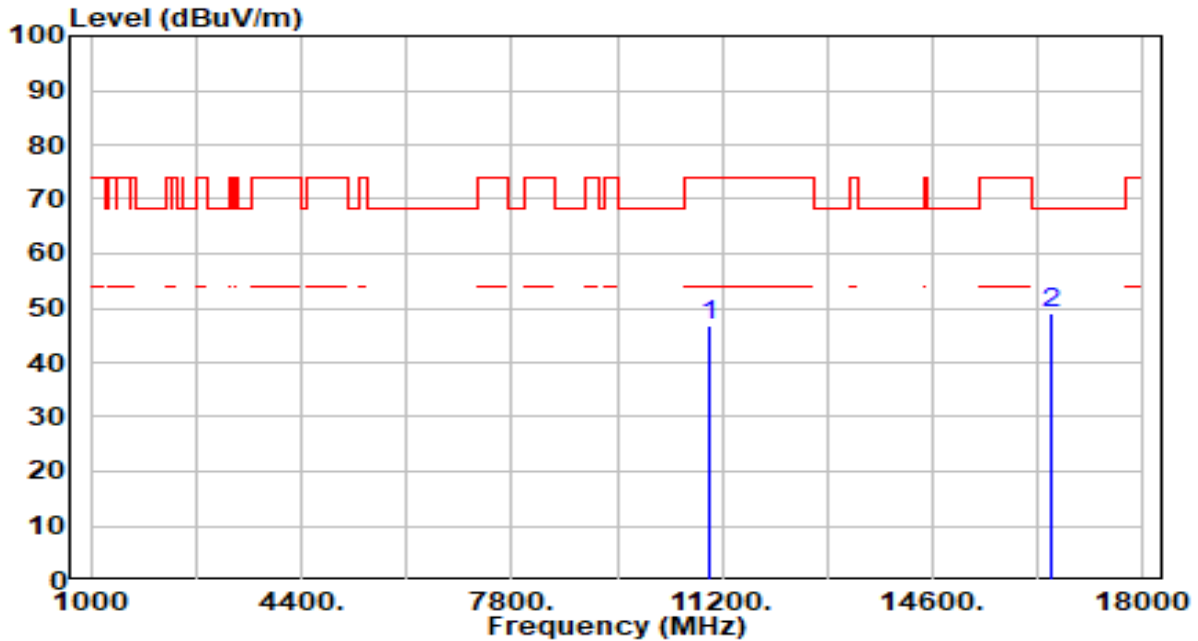


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.16	4.52	46.68	-27.32	74.00	300	360	Peak
2	* 16500.000	43.04	6.10	49.14	-19.06	68.20	300	312	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

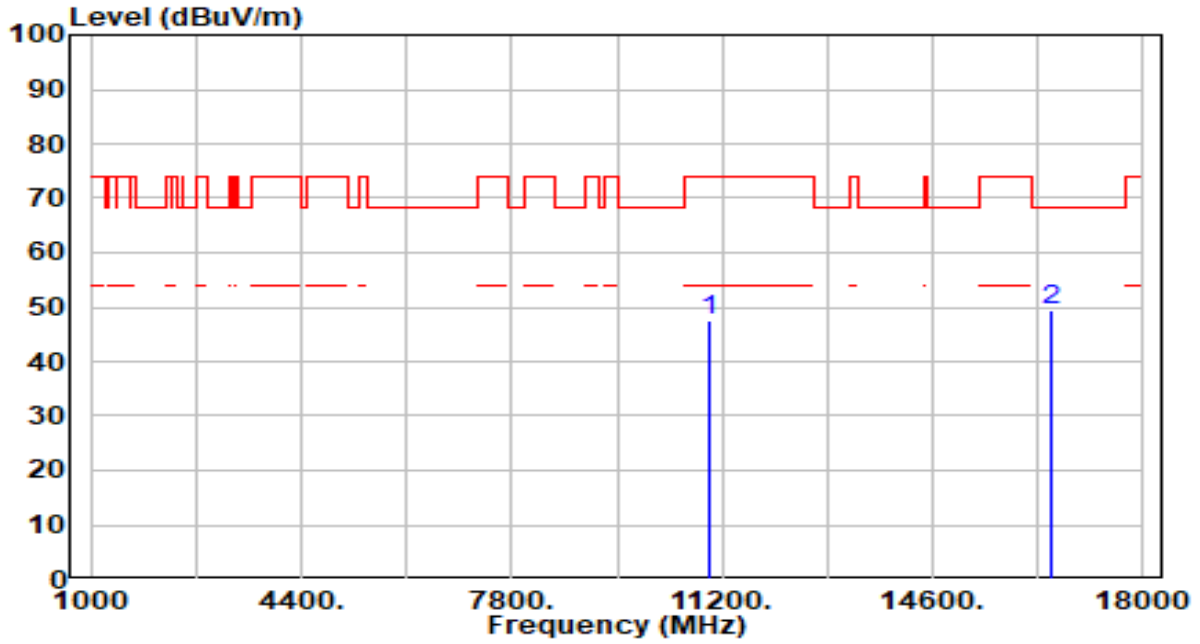


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	43.07	4.52	47.59	-26.41	74.00	300	343	Peak
2	* 16500.000	43.38	6.10	49.48	-18.72	68.20	300	334	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 116 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

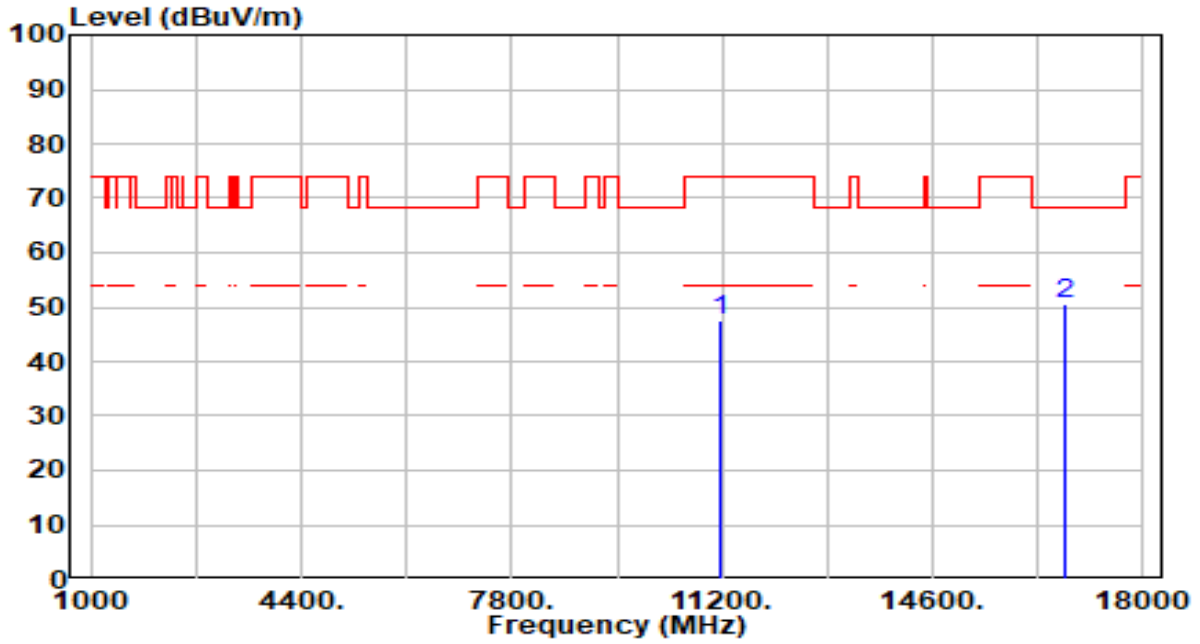


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.46	4.94	47.40	-26.60	74.00	300	343	Peak
2	* 16740.000	44.20	6.19	50.39	-17.81	68.20	300	1	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 116 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

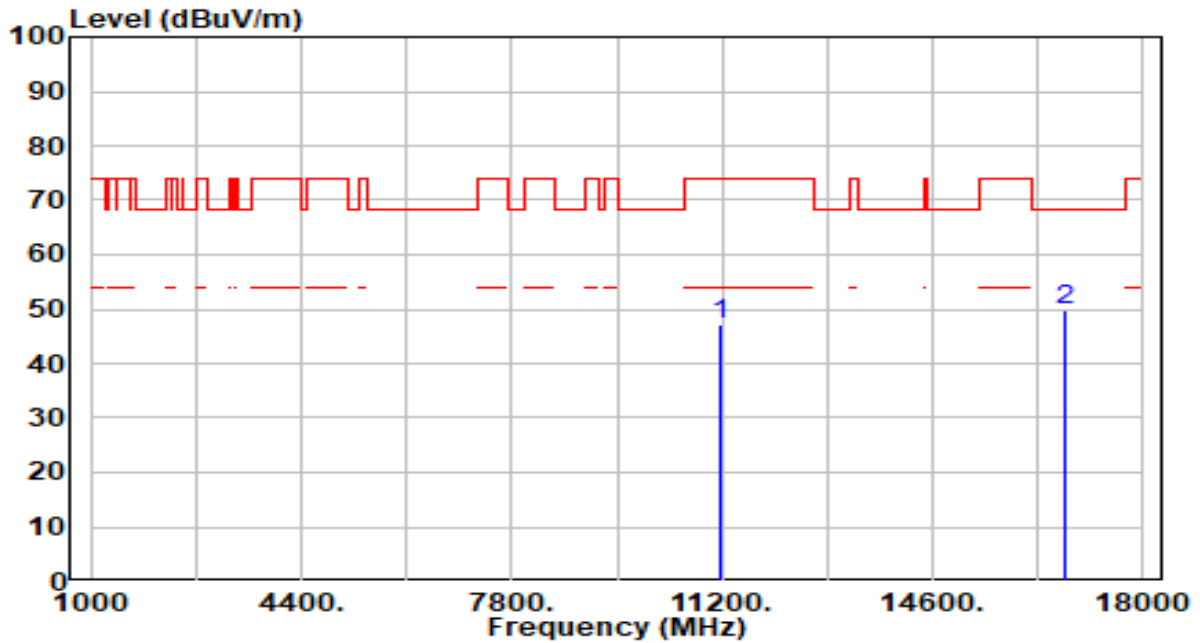


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.15	4.94	47.09	-26.91	74.00	300	104	Peak
2	* 16740.000	43.45	6.19	49.64	-18.56	68.20	300	30	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

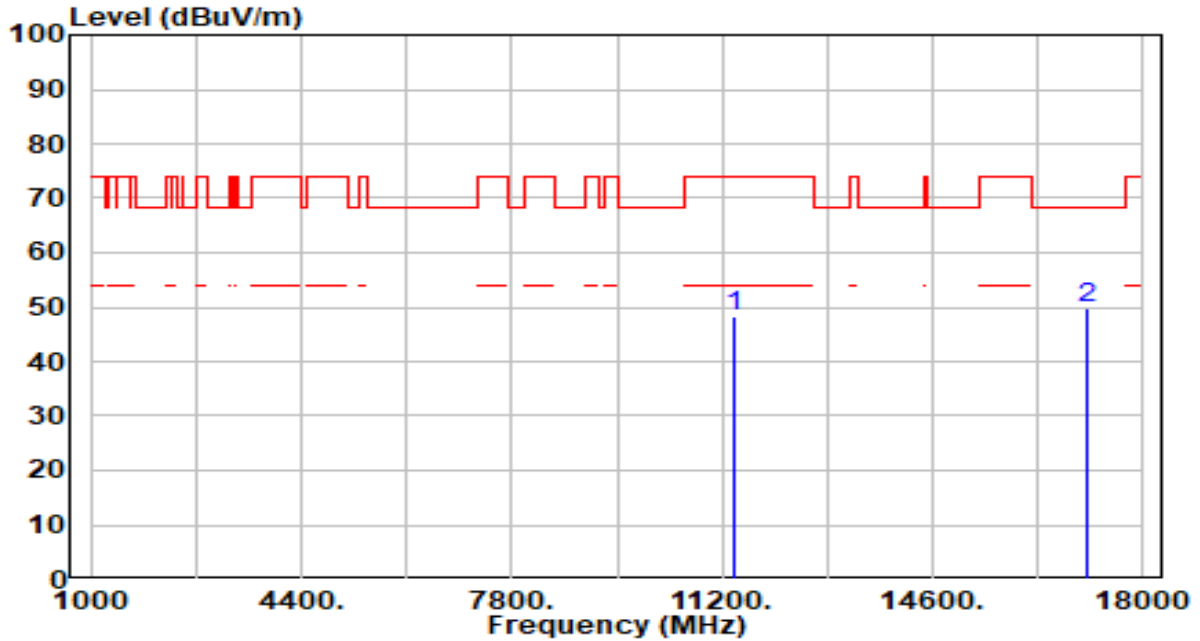


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.90	5.26	48.16	-25.84	74.00	300	105	Peak
2	* 17100.000	43.77	5.97	49.74	-18.46	68.20	300	213	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

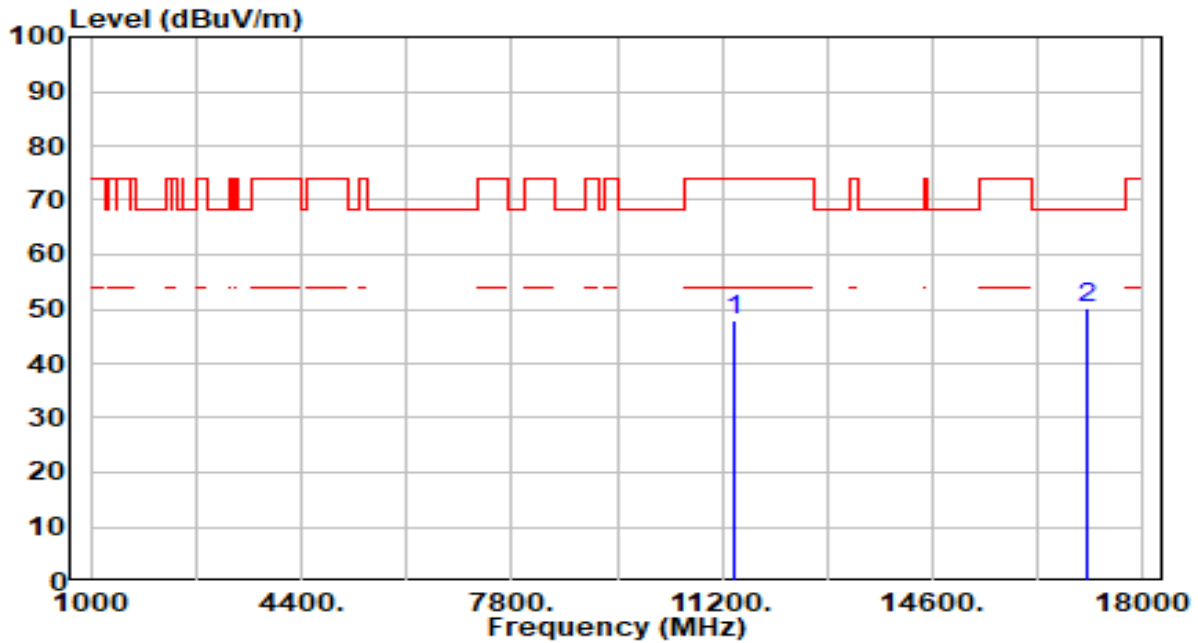


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.81	5.26	48.08	-25.92	74.00	300	51	Peak
2	* 17100.000	44.04	5.97	50.01	-18.19	68.20	300	250	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 144 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

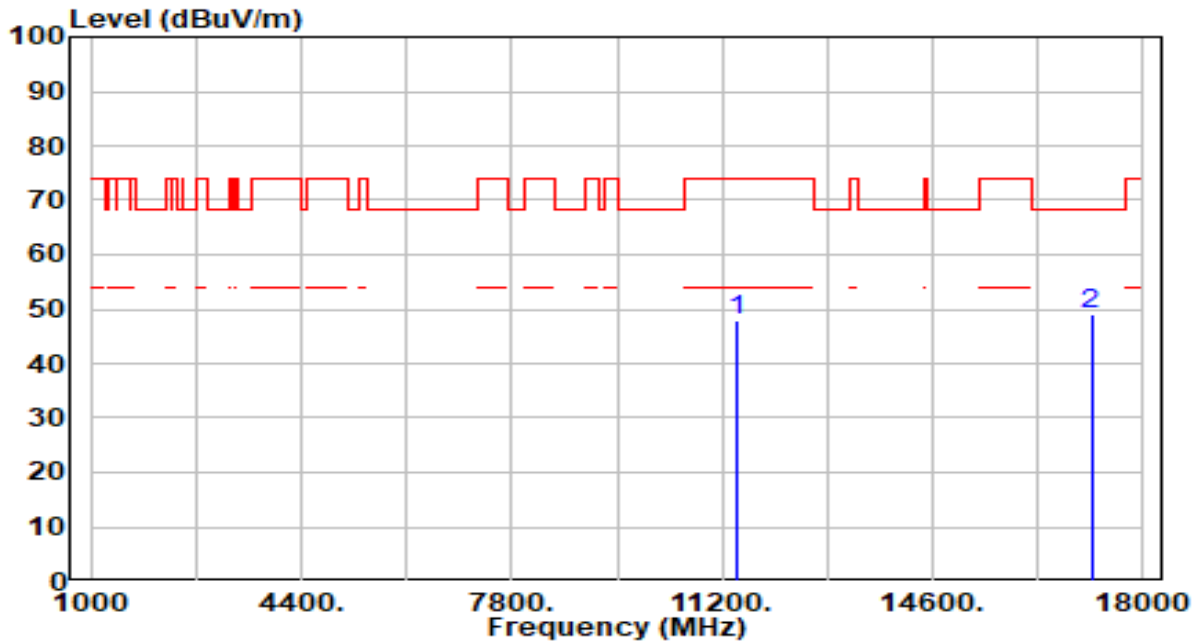


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.77	5.29	48.06	-25.94	74.00	300	25	Peak
2	* 17160.000	43.37	5.87	49.24	-18.96	68.20	300	307	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 144 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

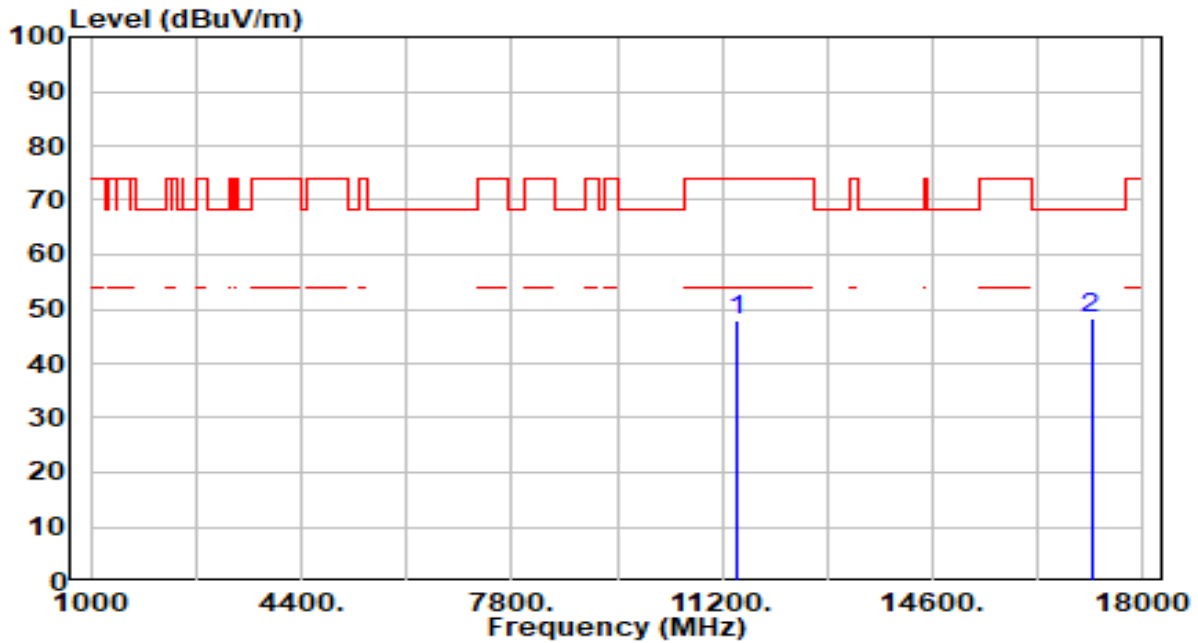


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.50	5.29	47.79	-26.21	74.00	300	222	Peak
2	* 17160.000	42.56	5.87	48.43	-19.77	68.20	300	141	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

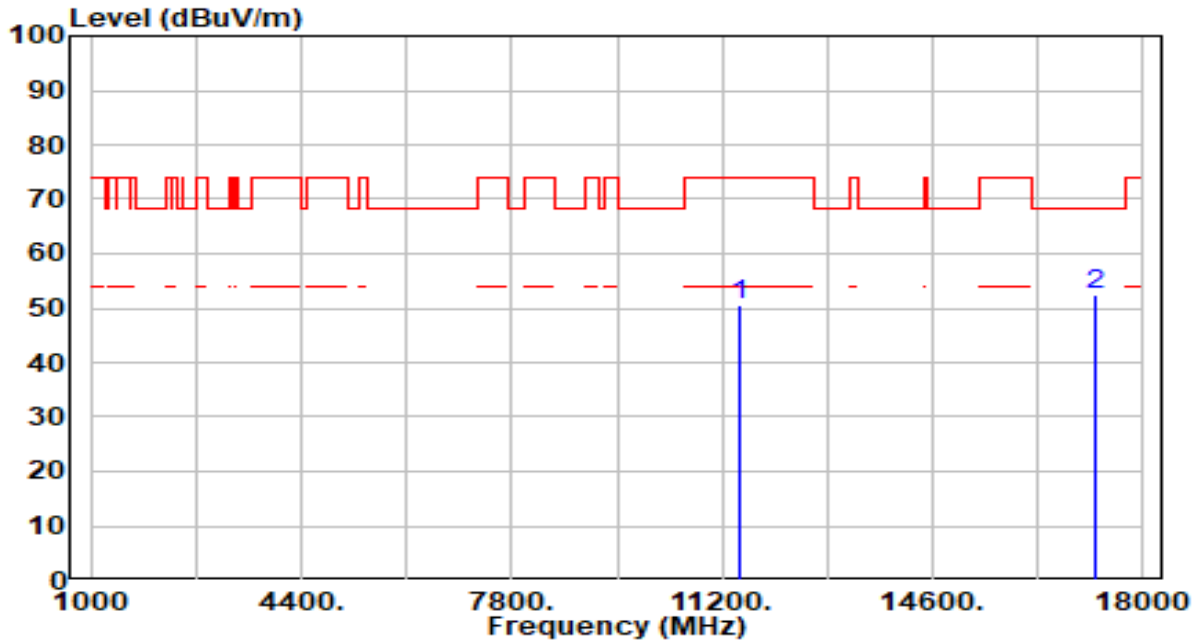


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	45.07	5.32	50.39	-23.61	74.00	300	282	Peak
2	* 17235.000	46.67	5.71	52.38	-15.82	68.20	300	88	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

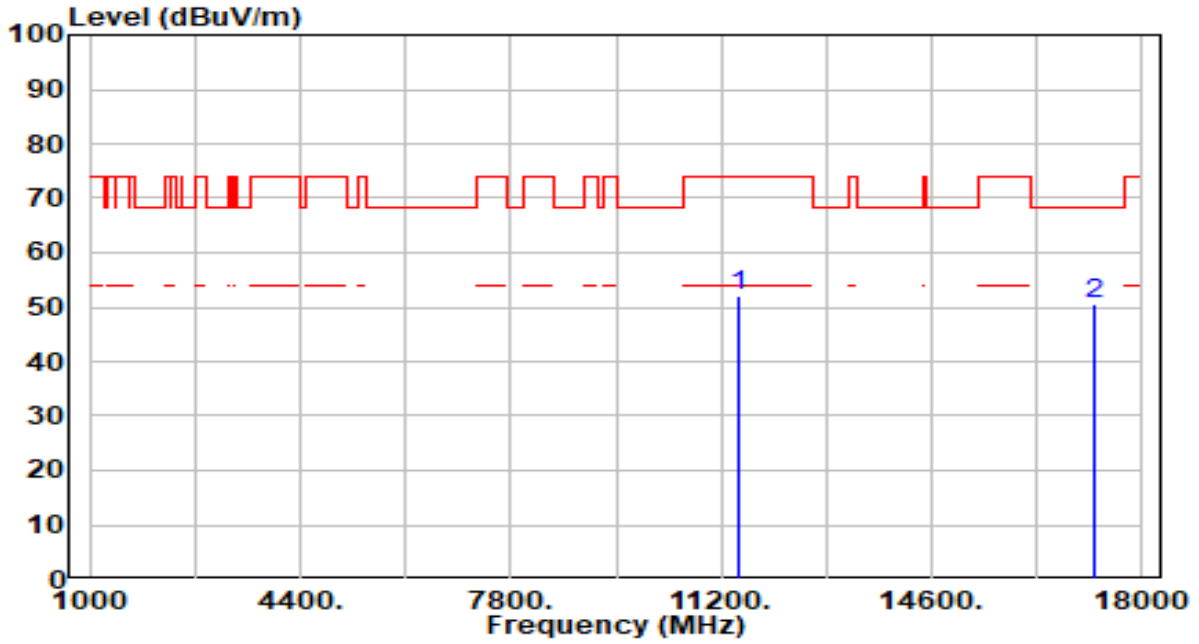


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	46.78	5.32	52.10	-21.90	74.00	300	238	Peak
2	* 17235.000	44.78	5.71	50.49	-17.71	68.20	300	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 157 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

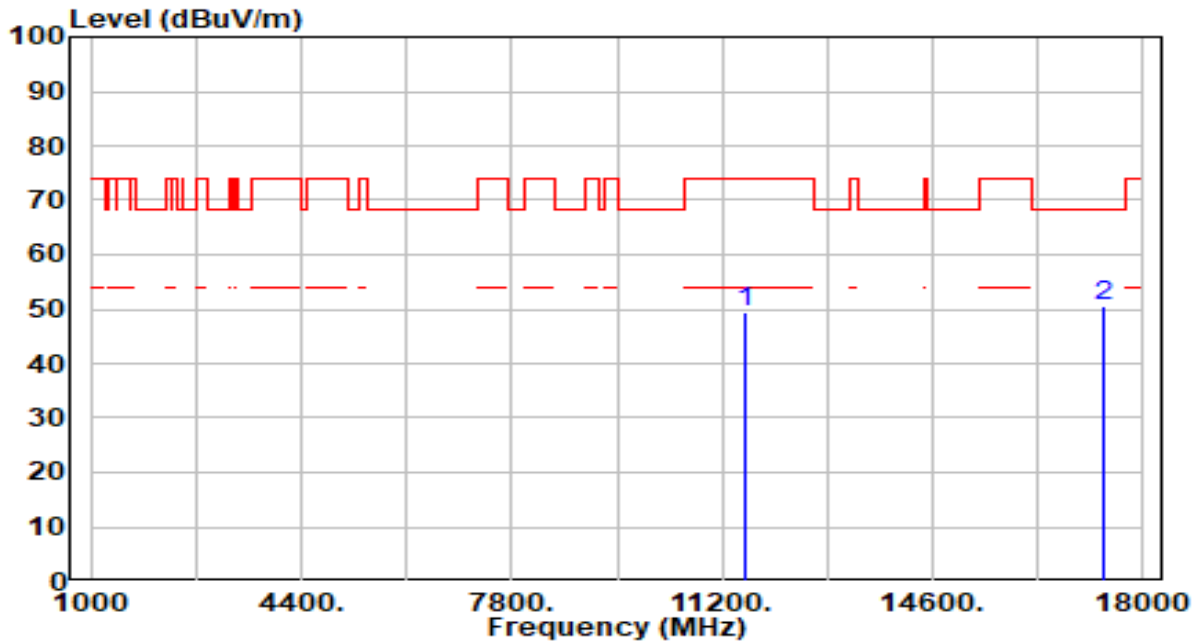


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	44.17	5.38	49.55	-24.45	74.00	300	279	Peak
2	* 17355.000	45.18	5.39	50.57	-17.63	68.20	300	68	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 157 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

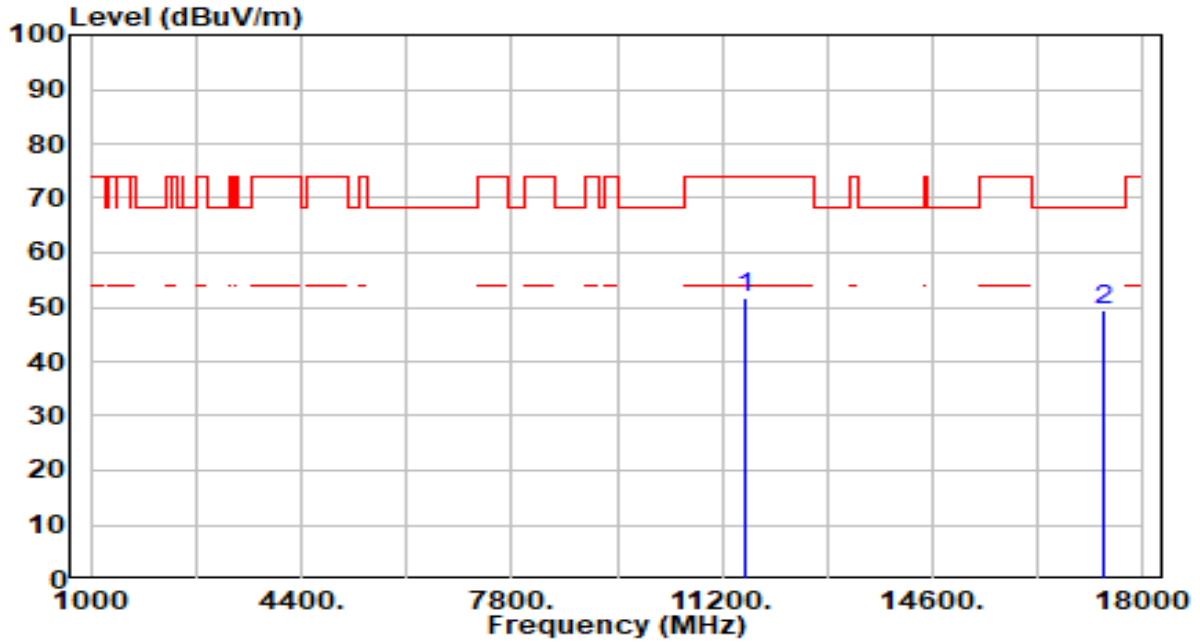


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	46.45	5.38	51.83	-22.17	74.00	300	41	Peak
2	* 17355.000	44.10	5.39	49.49	-18.71	68.20	300	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

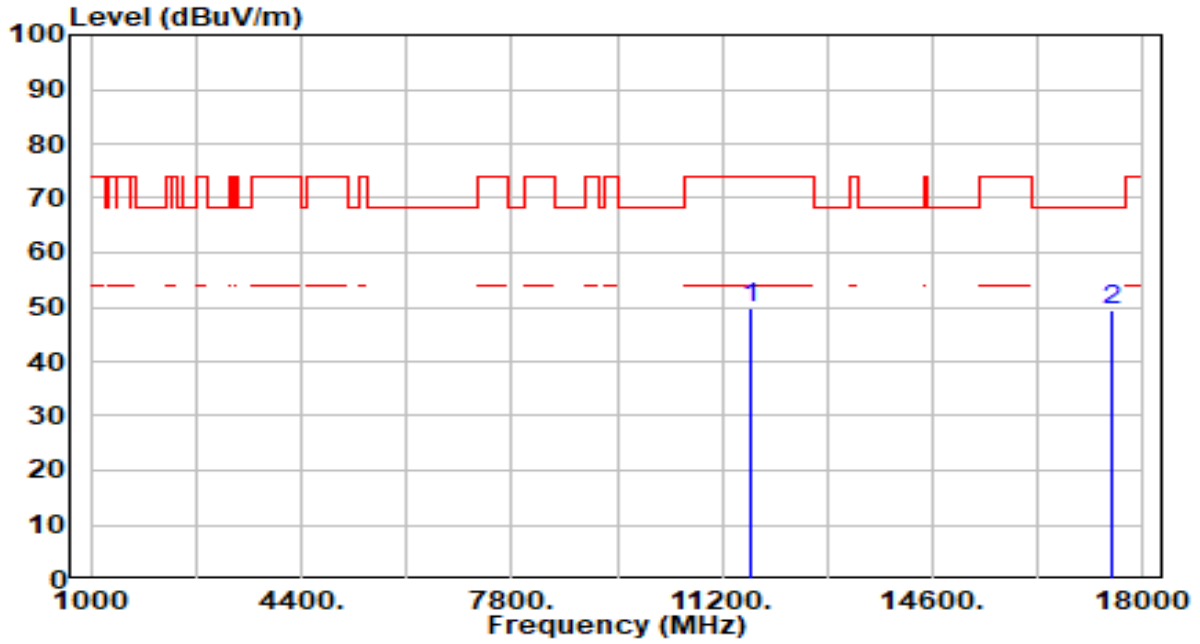


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	44.30	5.36	49.66	-24.34	74.00	300	299	Peak
2	* 17475.000	44.09	5.29	49.39	-18.81	68.20	300	128	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

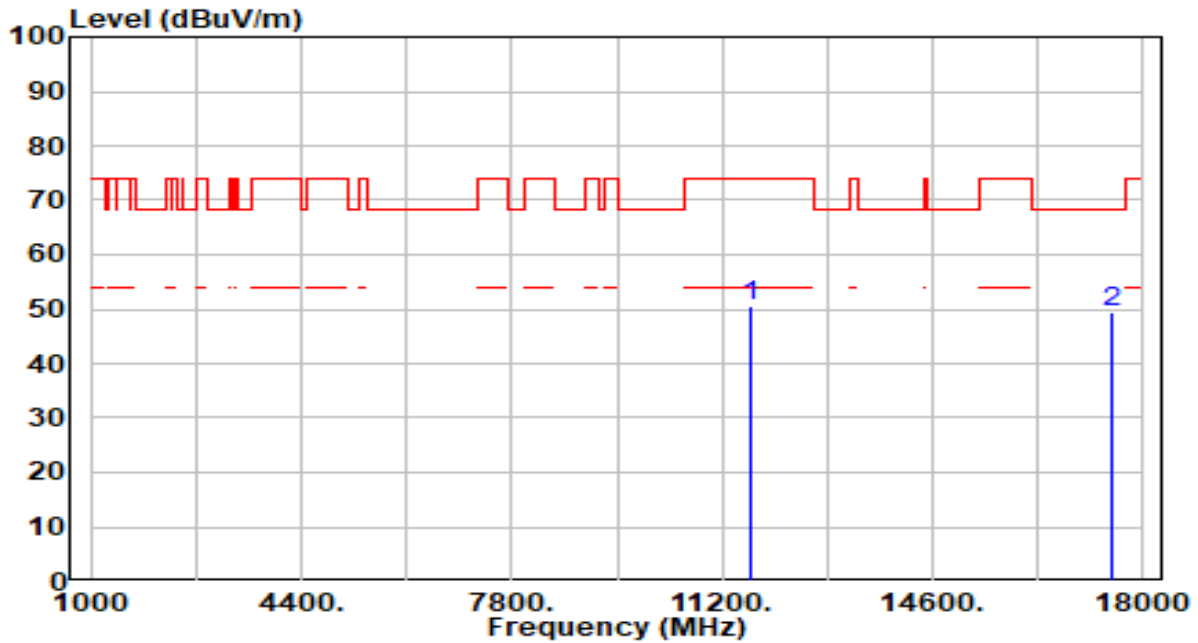


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.02	5.36	50.38	-23.62	74.00	300	10	Peak
2	* 17475.000	44.04	5.29	49.33	-18.87	68.20	300	187	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

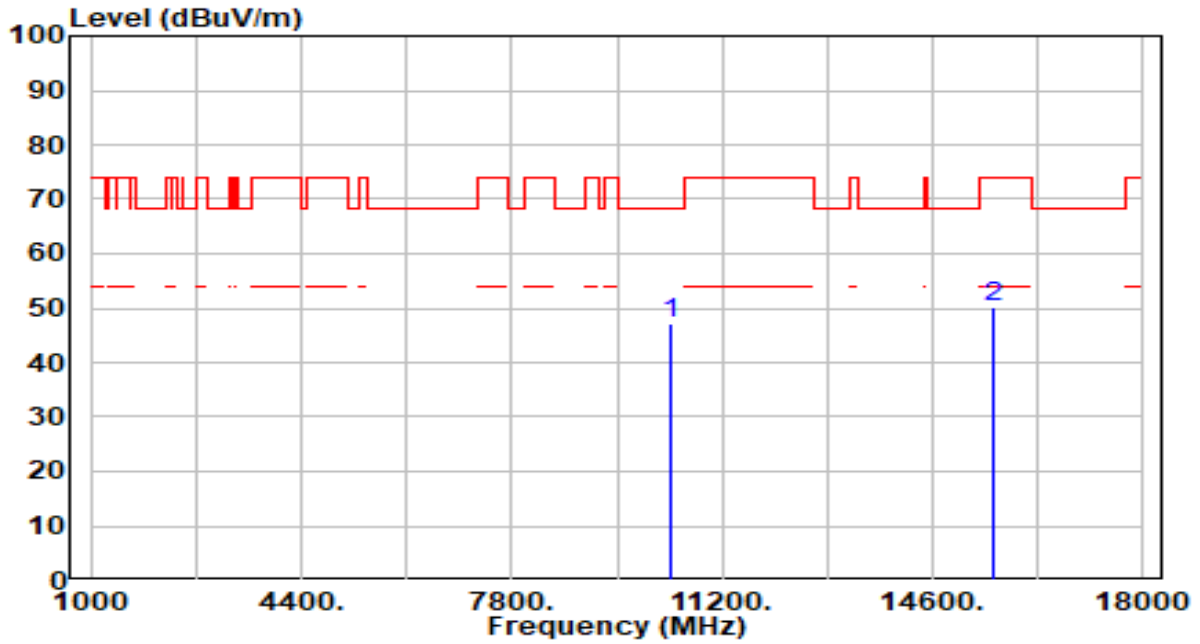


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	42.47	4.84	47.31	-20.89	68.20	300	32	Peak
2	15570.000	44.09	6.18	50.27	-23.73	74.00	300	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

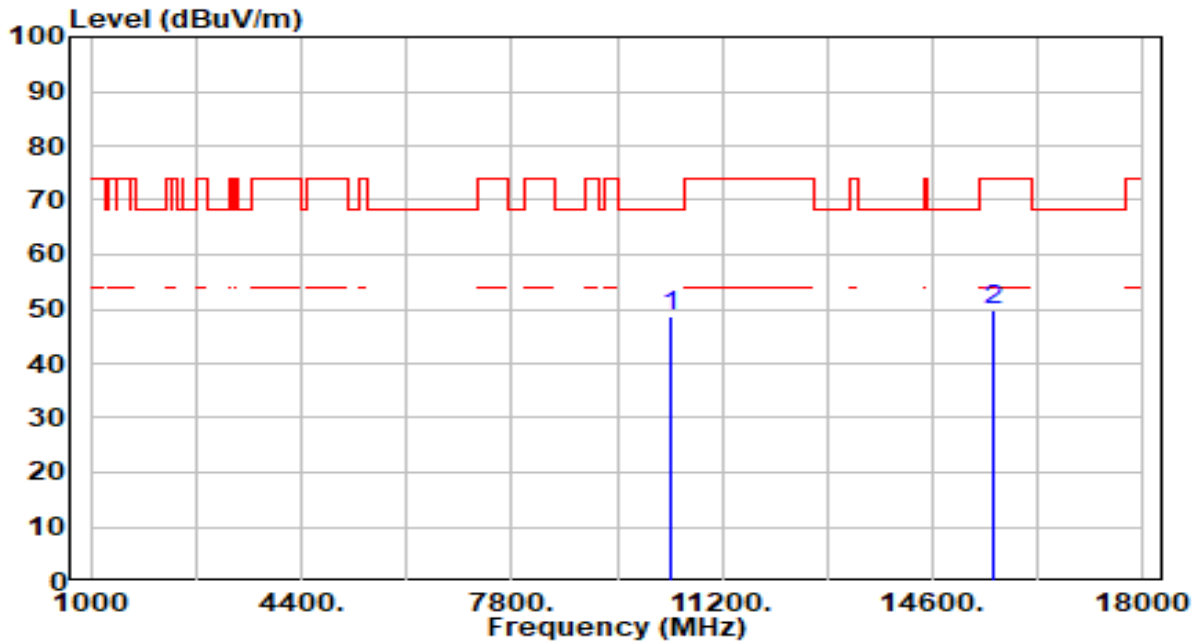


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	43.67	4.84	48.51	-19.69	68.20	300	50	Peak
2	15570.000	43.46	6.18	49.63	-24.37	74.00	300	21	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 46 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

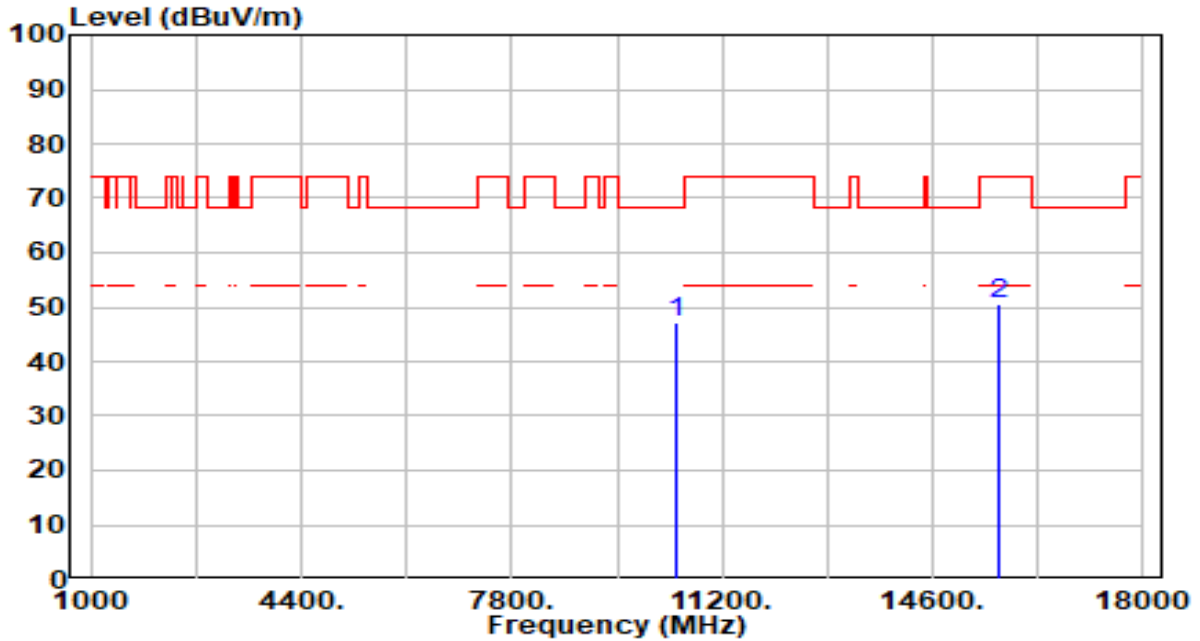


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	42.59	4.74	47.33	-20.87	68.20	300	173	Peak
2	15690.000	44.18	6.33	50.51	-23.49	74.00	300	357	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 46 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

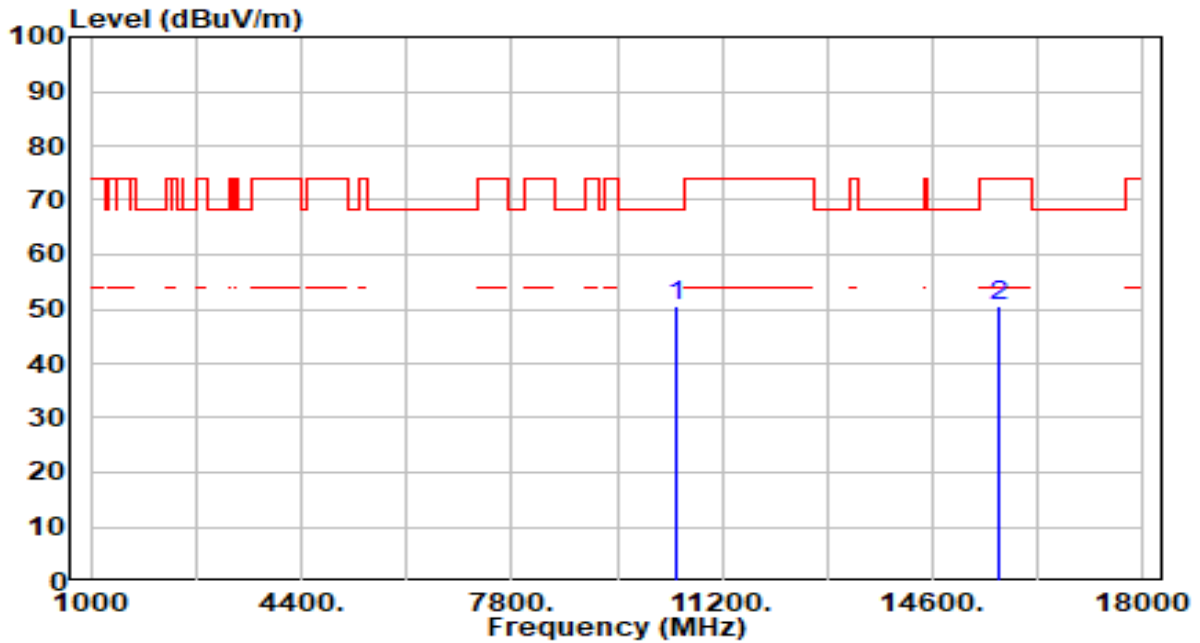


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	45.71	4.74	50.45	-17.75	68.20	300	23	Peak
2	15690.000	44.27	6.33	50.60	-23.40	74.00	300	222	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 54 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

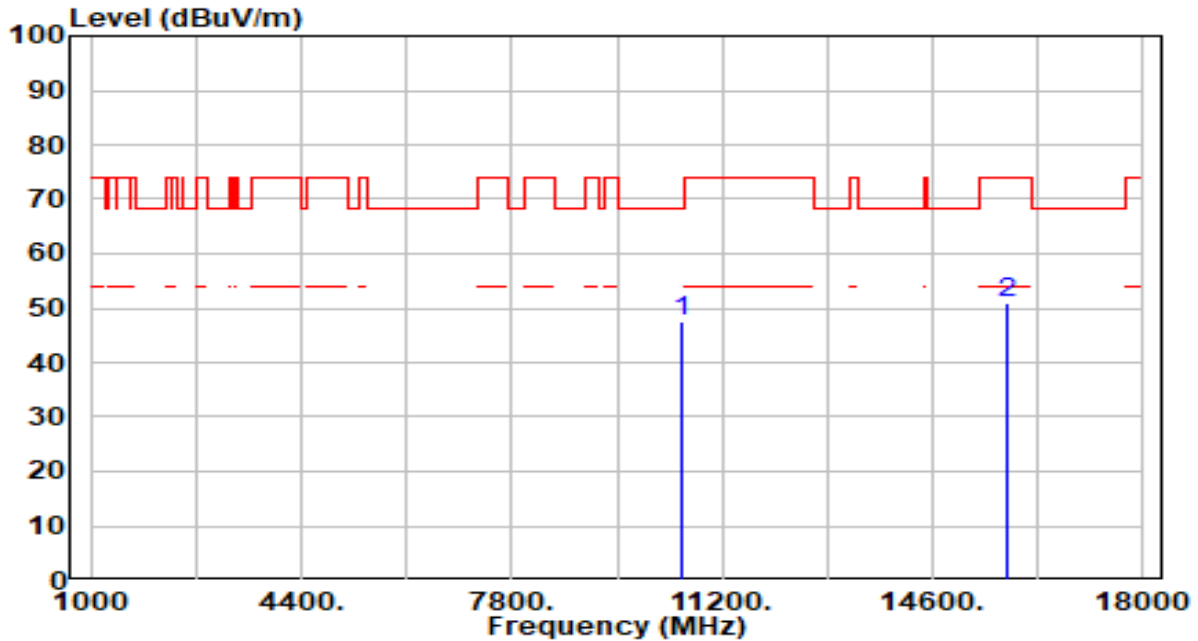


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	43.02	4.66	47.68	-20.52	68.20	300	40	Peak
2	15810.000	44.26	6.55	50.80	-23.20	74.00	300	275	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 54 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

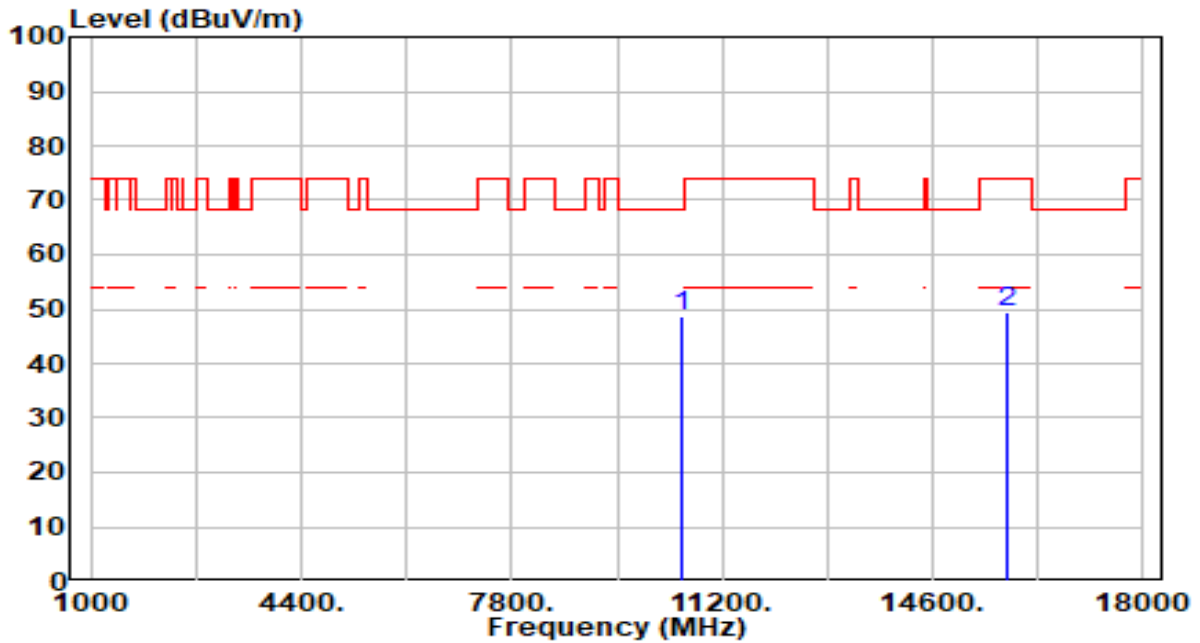


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	43.95	4.66	48.60	-19.60	68.20	300	360	Peak
2	15810.000	42.97	6.55	49.52	-24.48	74.00	300	331	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

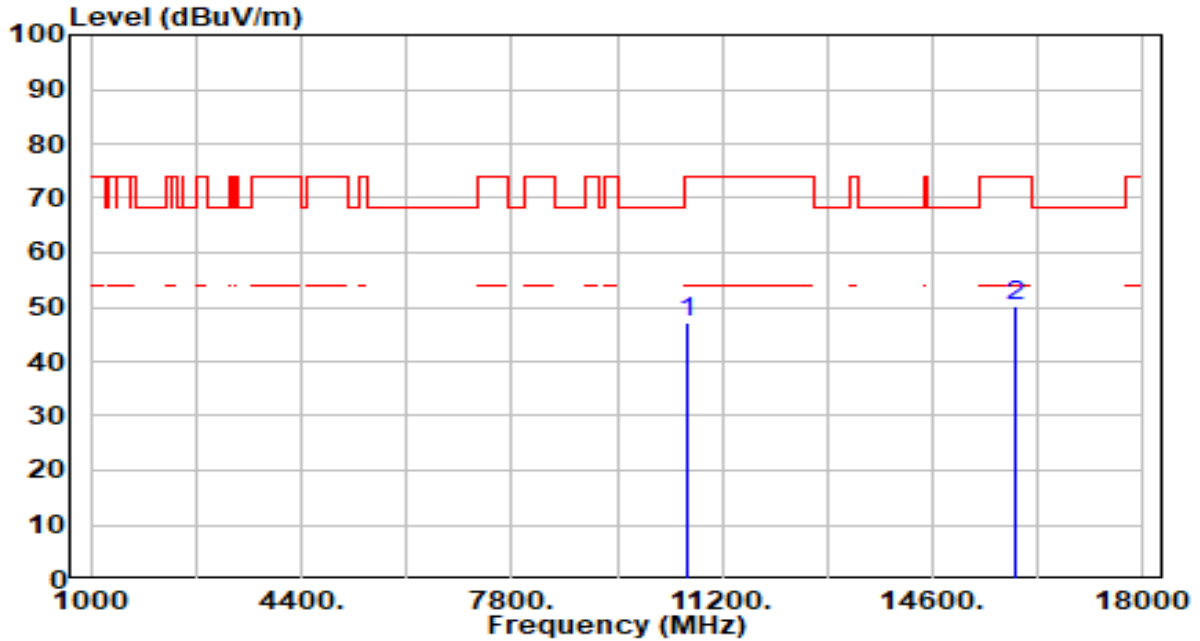


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.46	4.62	47.07	-26.93	74.00	300	309	Peak
2	* 15930.000	43.52	6.55	50.07	-23.93	74.00	300	69	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

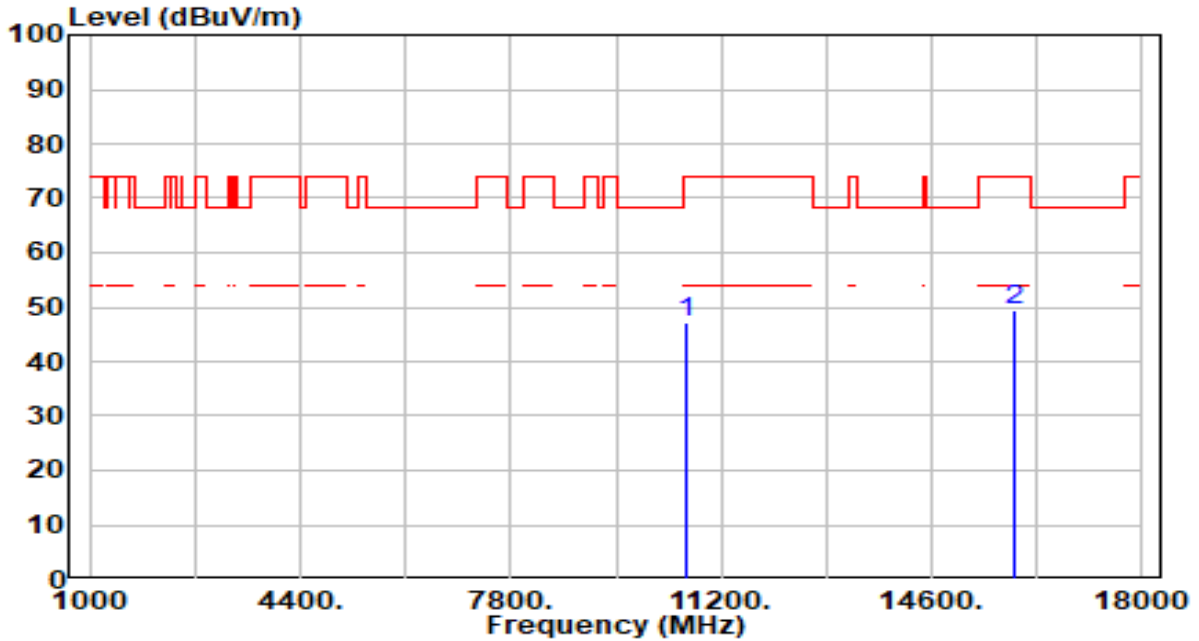


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.61	4.62	47.22	-26.78	74.00	0	0	Peak
2	* 15930.000	42.83	6.55	49.38	-24.62	74.00	300	308	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

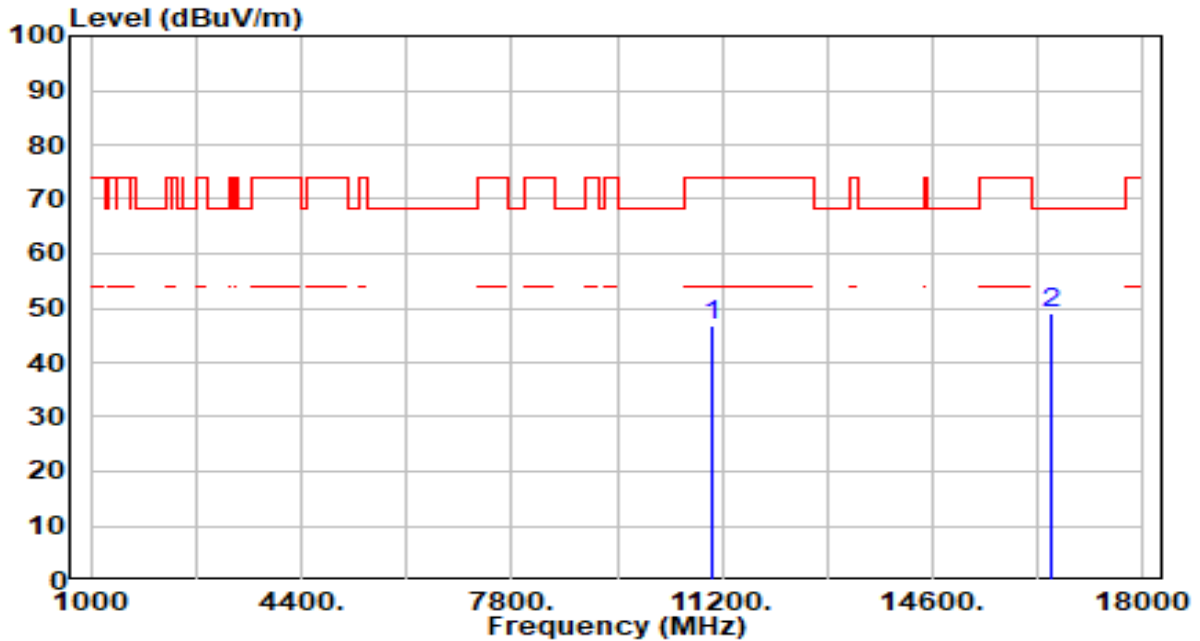


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.20	4.57	46.77	-27.23	74.00	300	219	Peak
2	* 16530.000	43.08	6.10	49.18	-19.02	68.20	300	257	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

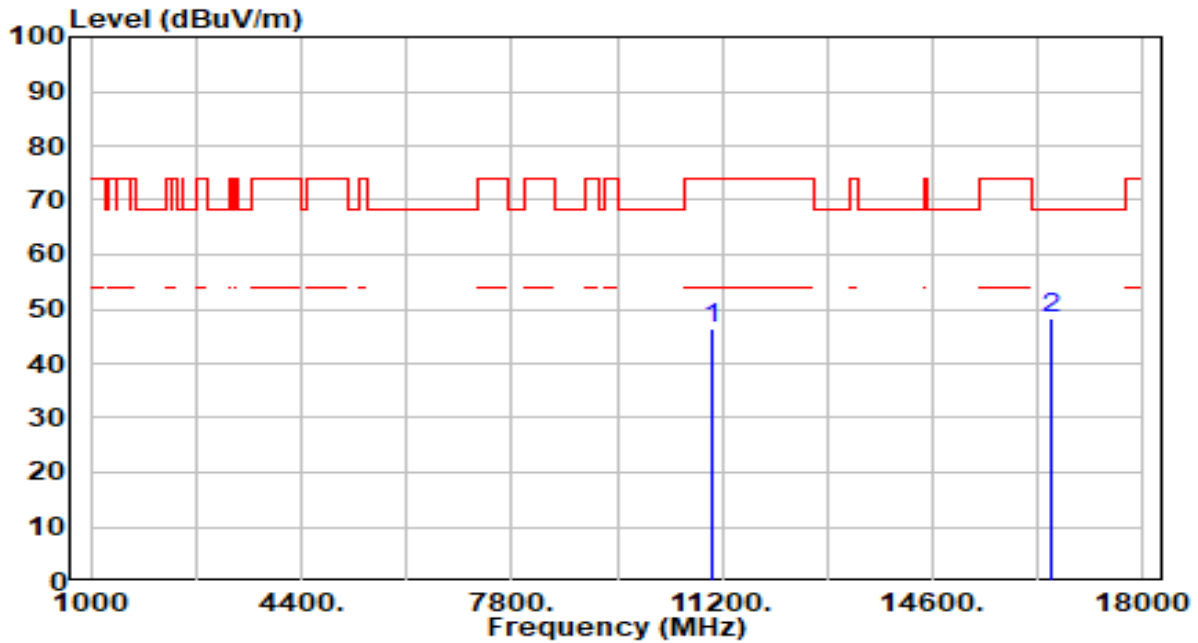


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.70	4.57	46.27	-27.73	74.00	300	360	Peak
2	* 16530.000	42.24	6.10	48.34	-19.86	68.20	300	360	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 110 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

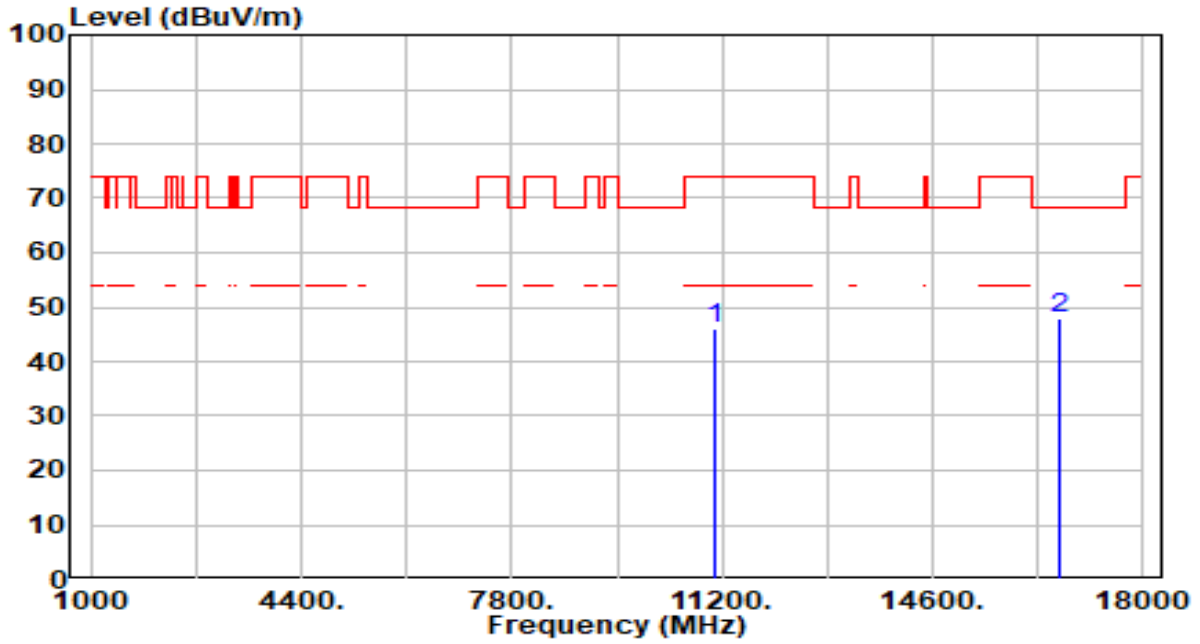


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.39	4.78	46.17	-27.83	74.00	300	309	Peak
2	* 16650.000	41.83	6.14	47.96	-20.24	68.20	0	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 110 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

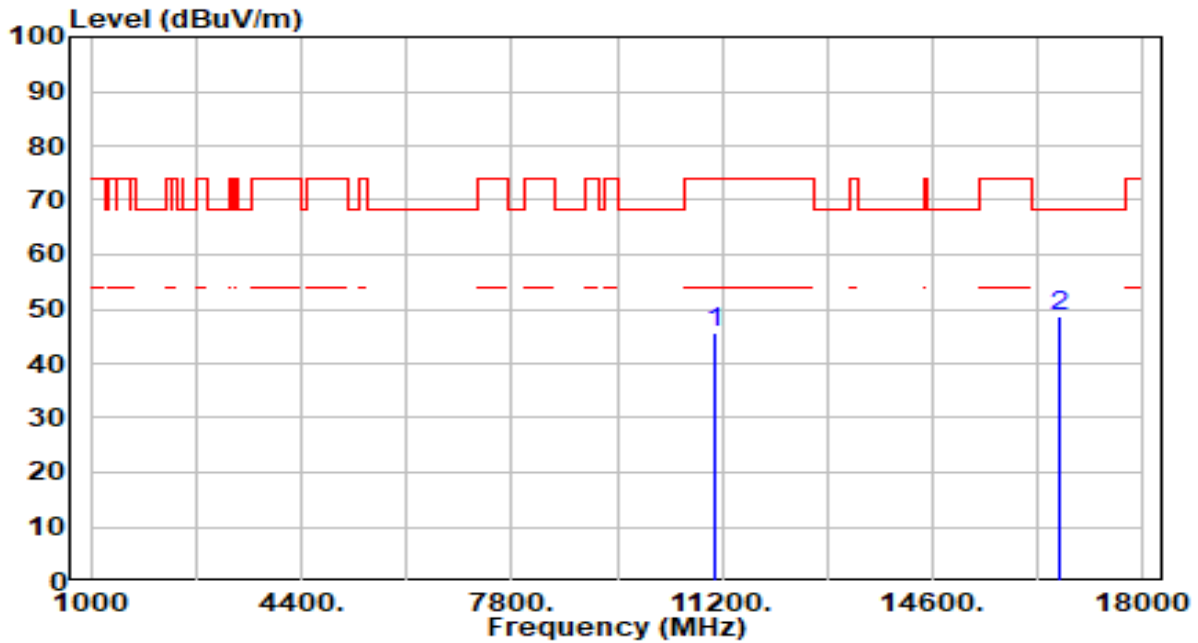


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	40.83	4.78	45.61	-28.39	74.00	300	216	Peak
2	* 16650.000	42.52	6.14	48.65	-19.55	68.20	300	285	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

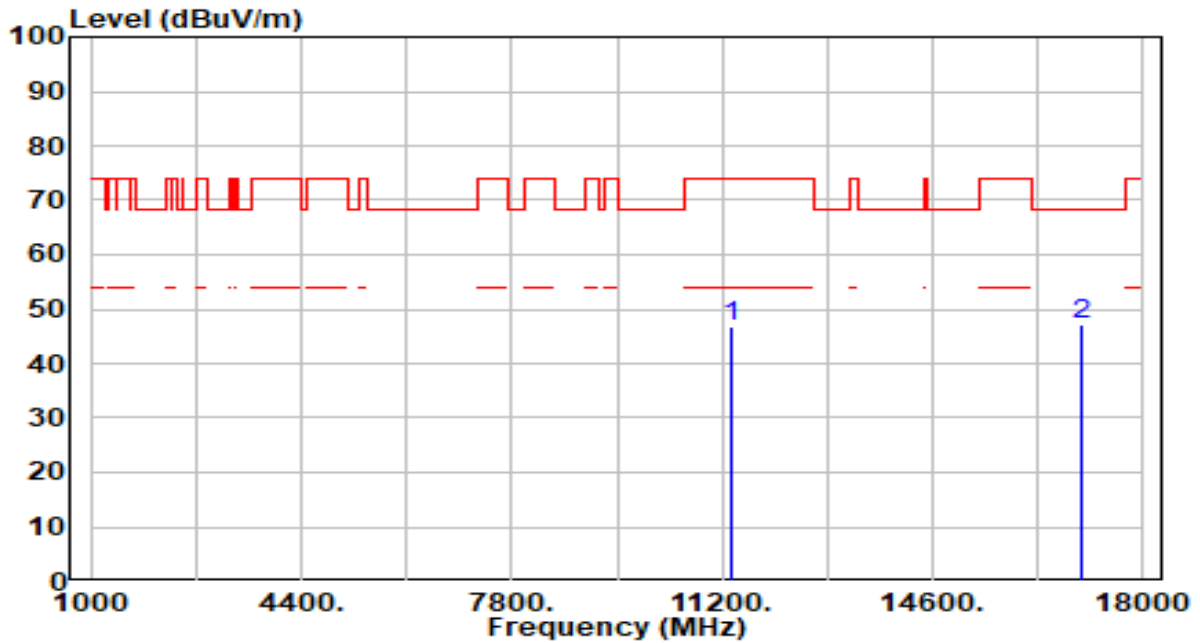


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.48	5.20	46.68	-27.32	74.00	300	330	Peak
2	* 17010.000	41.02	6.12	47.14	-21.06	68.20	300	200	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

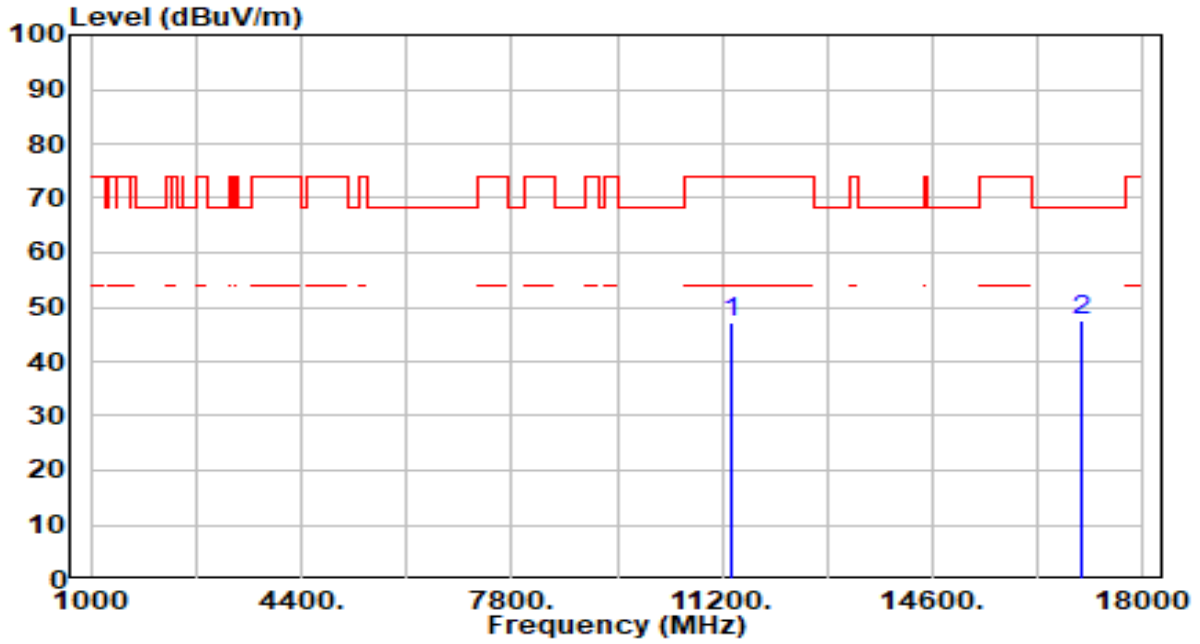


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.15	5.20	47.35	-26.65	74.00	300	319	Peak
2	* 17010.000	41.48	6.12	47.60	-20.60	68.20	300	50	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 142 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

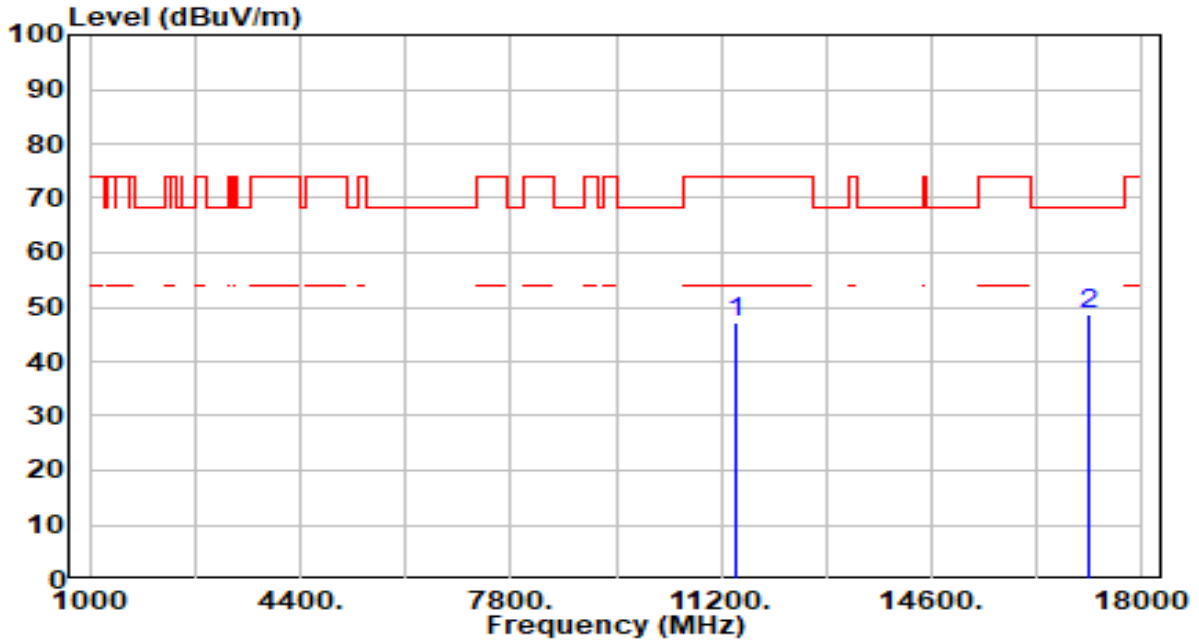


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.92	5.28	47.20	-26.80	74.00	300	248	Peak
2	* 17130.000	42.81	5.92	48.73	-19.47	68.20	300	139	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 142 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

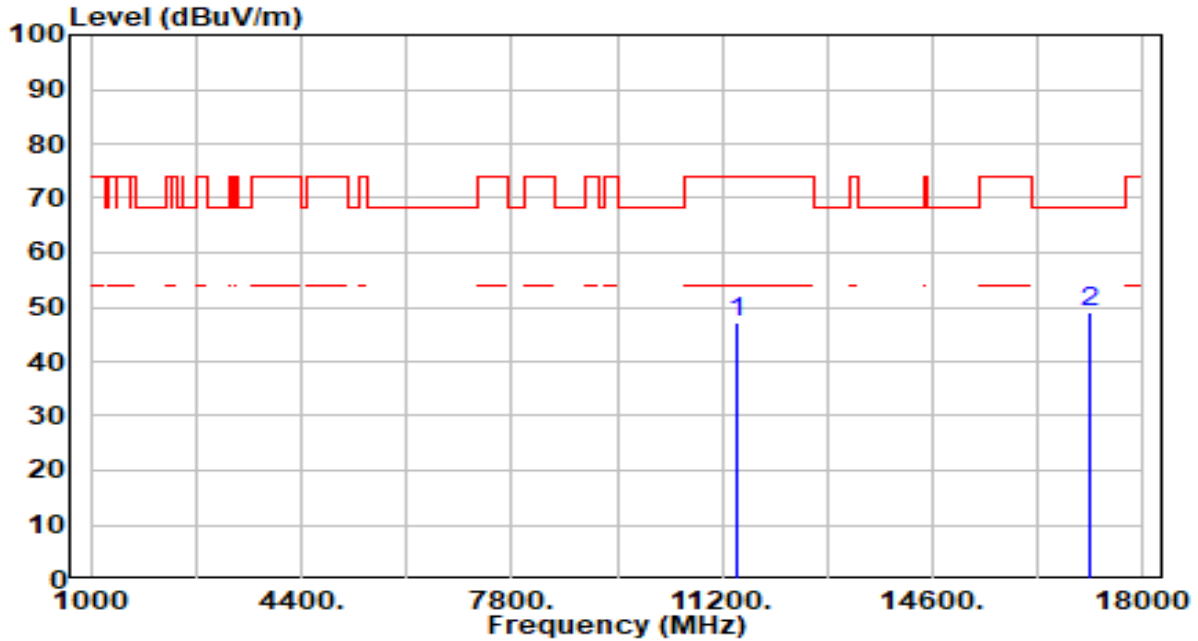


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.78	5.28	47.06	-26.94	74.00	300	150	Peak
2	* 17130.000	43.14	5.92	49.06	-19.14	68.20	300	60	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

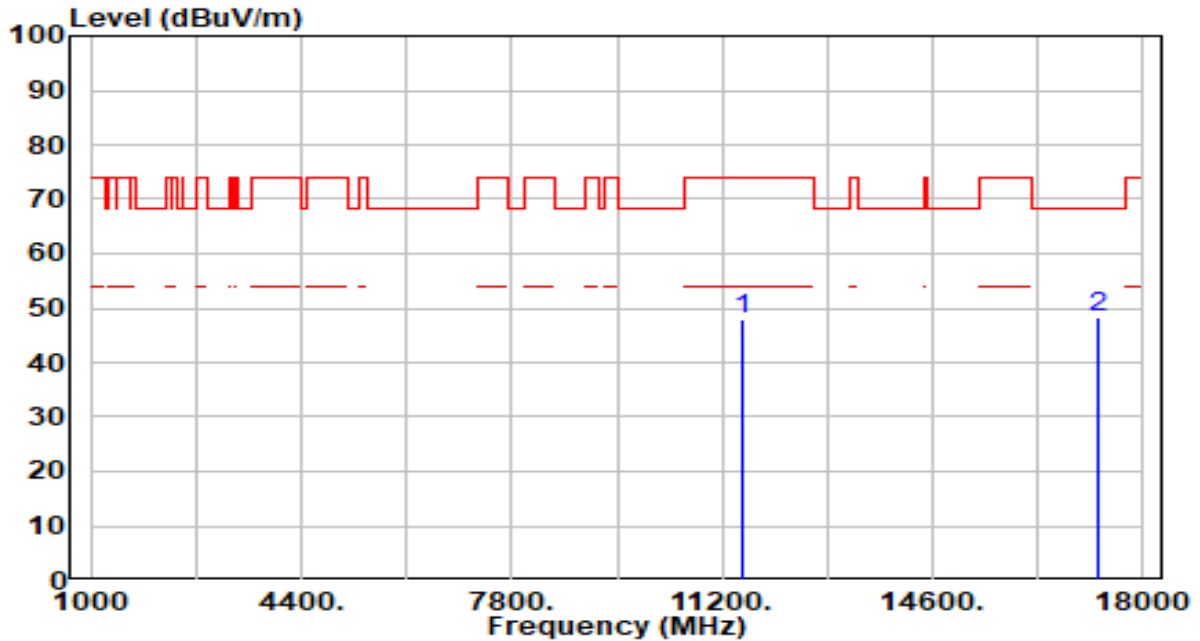


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	42.76	5.33	48.09	-25.91	74.00	300	344	Peak
2	* 17265.000	42.76	5.63	48.39	-19.81	68.20	300	173	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

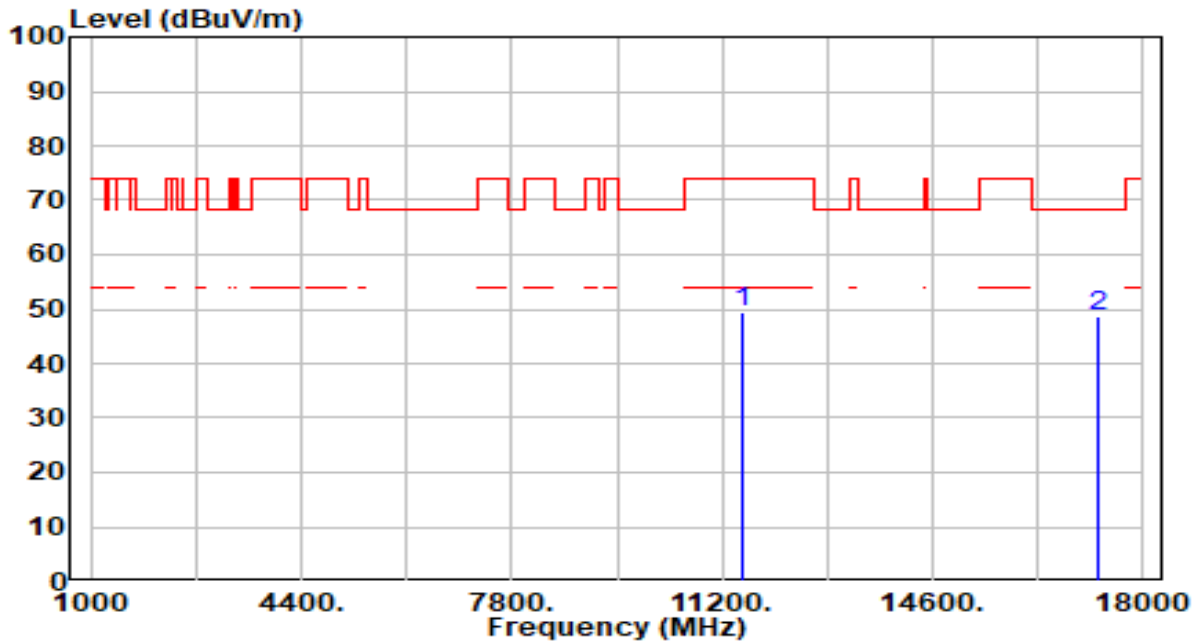


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	44.29	5.33	49.62	-24.38	74.00	300	0	Peak
2	* 17265.000	43.03	5.63	48.66	-19.54	68.20	300	184	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

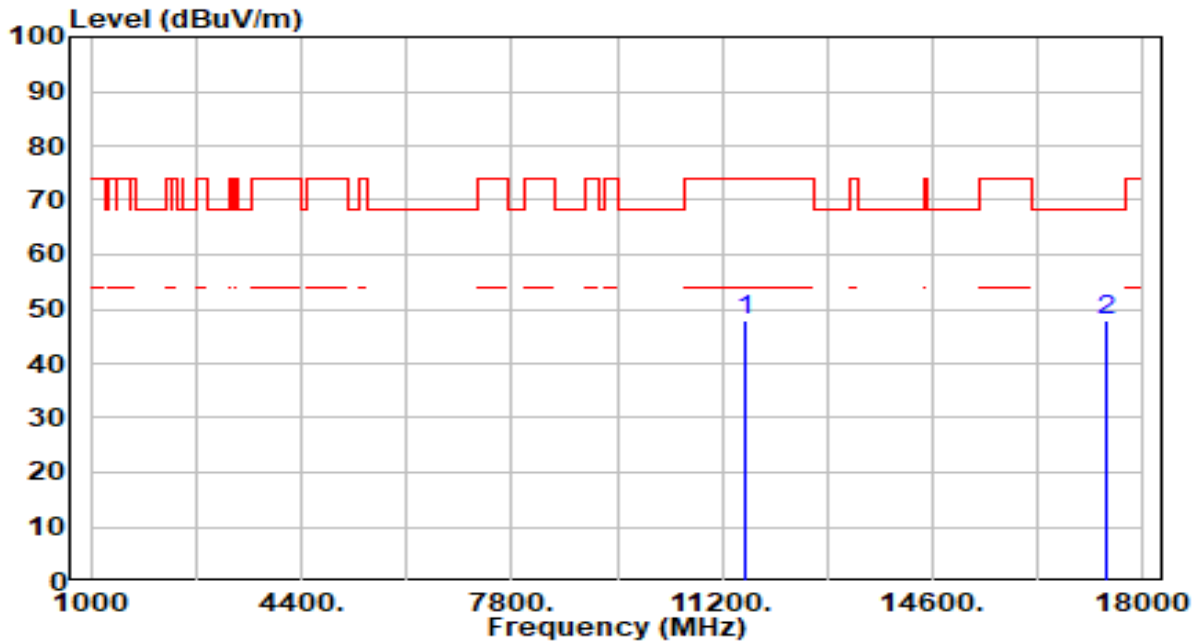


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.40	5.39	47.79	-26.21	74.00	300	280	Peak
2	* 17385.000	42.51	5.31	47.82	-20.38	68.20	300	110	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

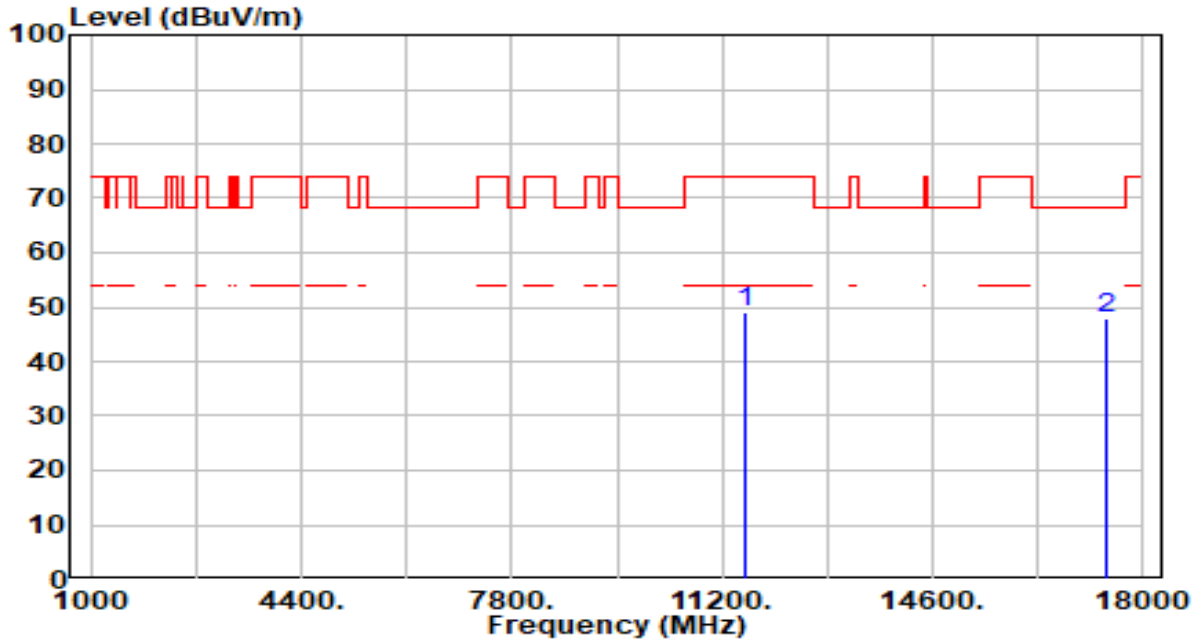


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	43.70	5.39	49.09	-24.91	74.00	300	117	Peak
2	* 17385.000	42.61	5.31	47.92	-20.28	68.20	300	123	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

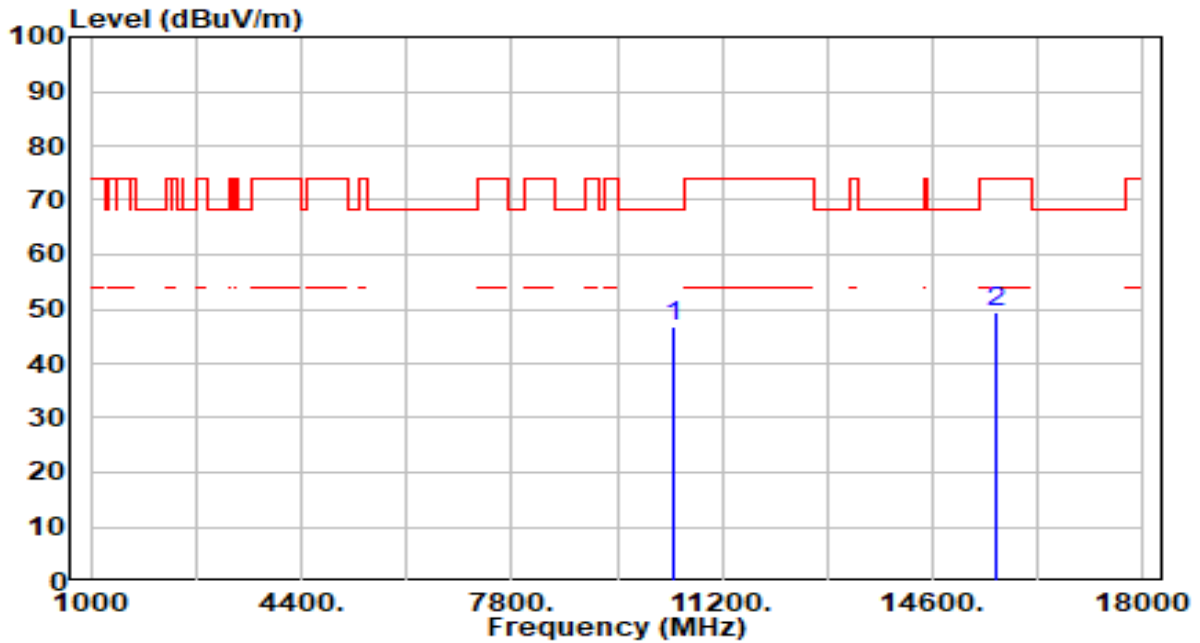


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	41.98	4.79	46.77	-21.43	68.20	0	0	Peak
2	15630.000	43.28	6.21	49.49	-24.51	74.00	300	352	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

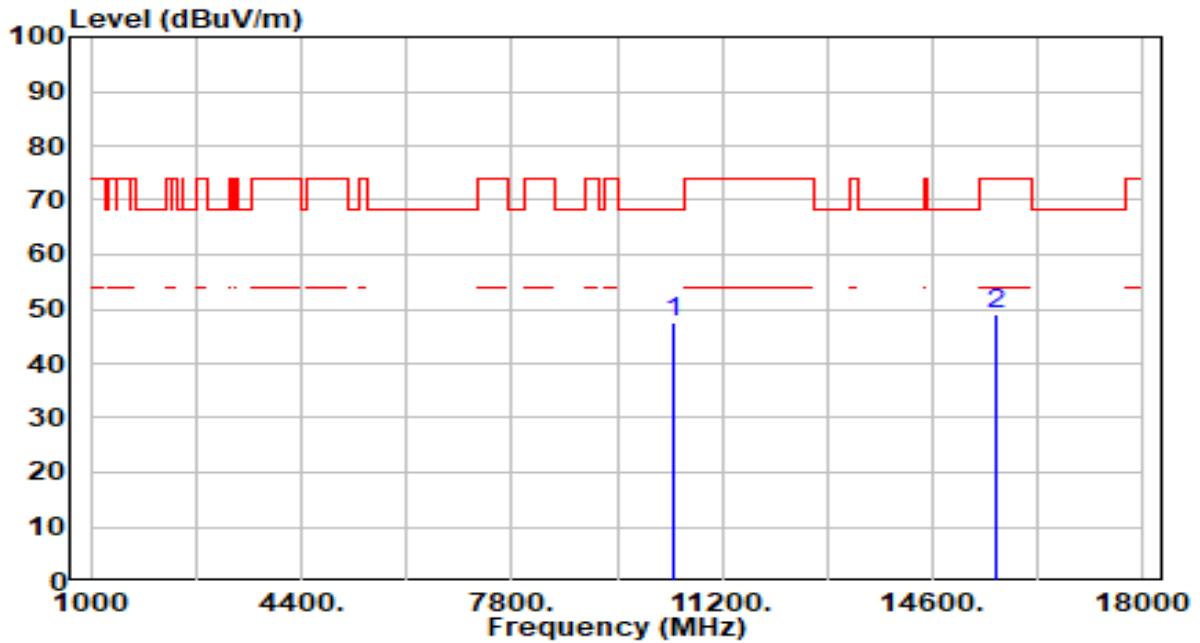


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	42.94	4.79	47.73	-20.47	68.20	300	31	Peak
2	15630.000	42.93	6.21	49.14	-24.86	74.00	300	280	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

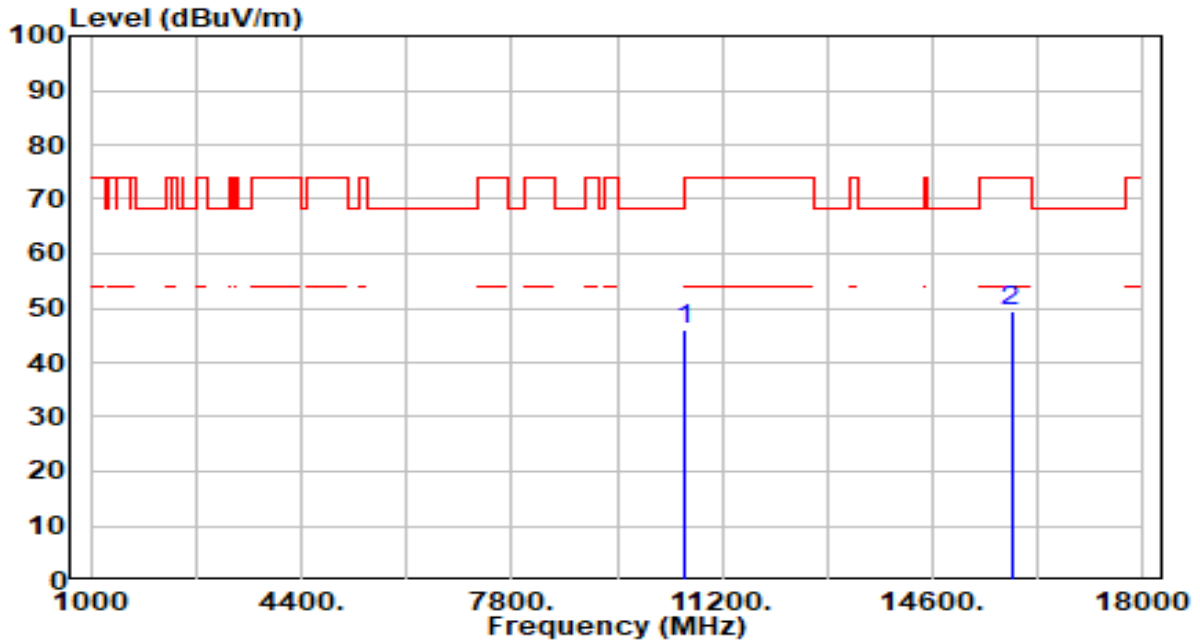


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.36	4.63	45.99	-22.21	68.20	300	317	Peak
2	15870.000	43.06	6.55	49.61	-24.39	74.00	300	106	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

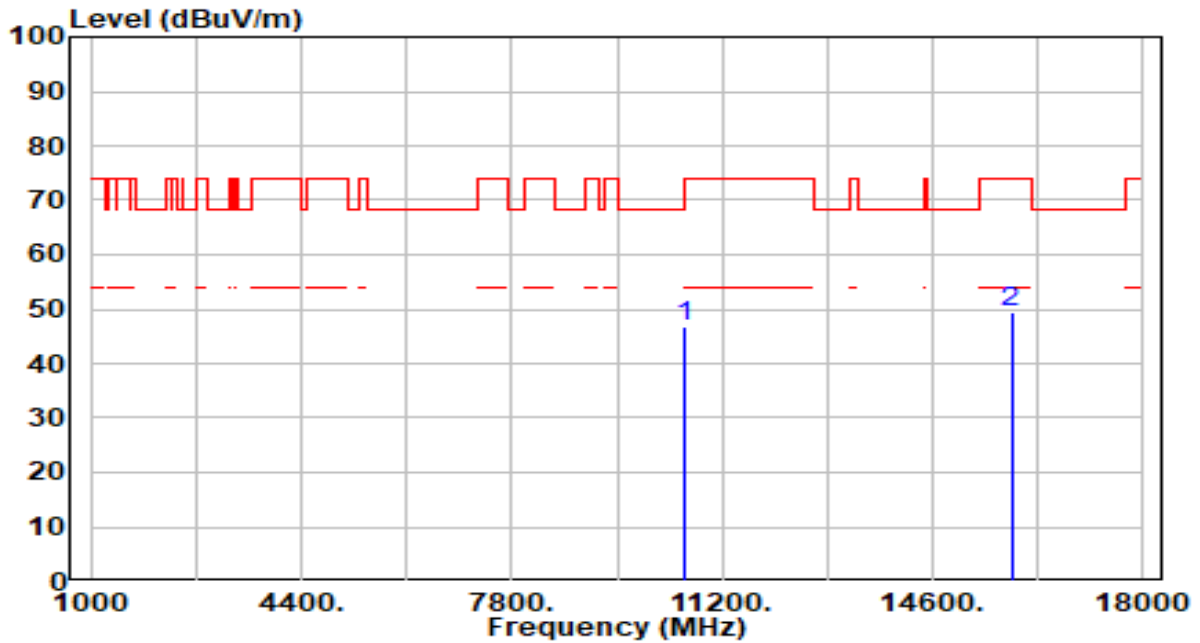


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.98	4.63	46.61	-21.59	68.20	300	225	Peak
2	15870.000	43.04	6.55	49.59	-24.41	74.00	300	103	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

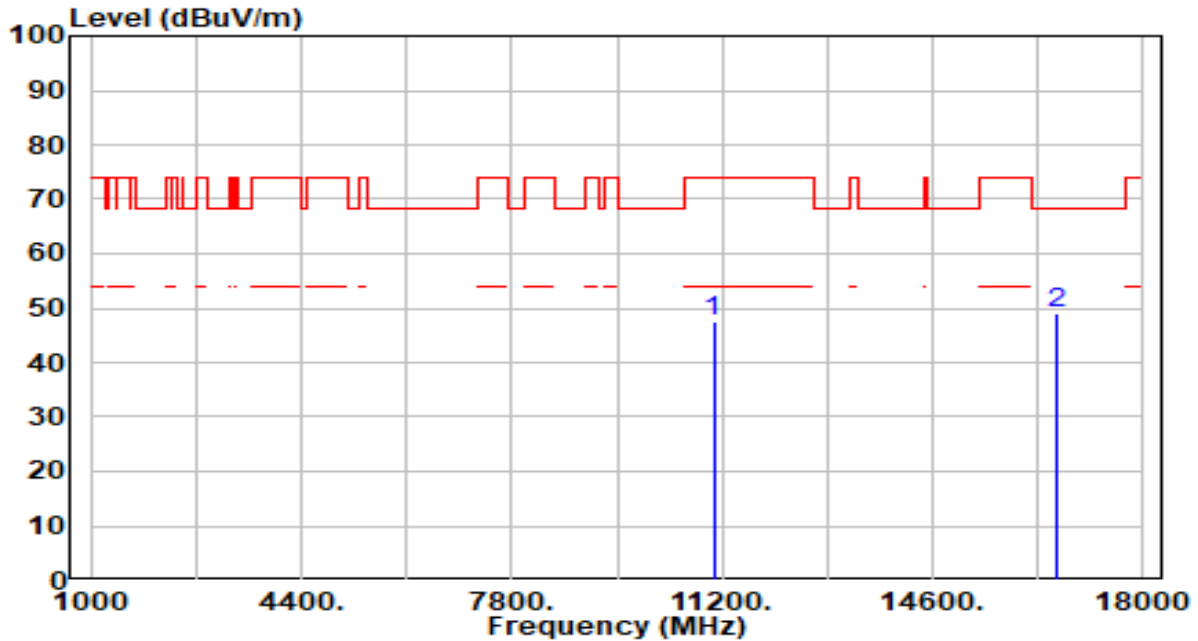


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	43.00	4.68	47.68	-26.32	74.00	300	3	Peak
2	* 16590.000	42.82	6.11	48.93	-19.27	68.20	300	66	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

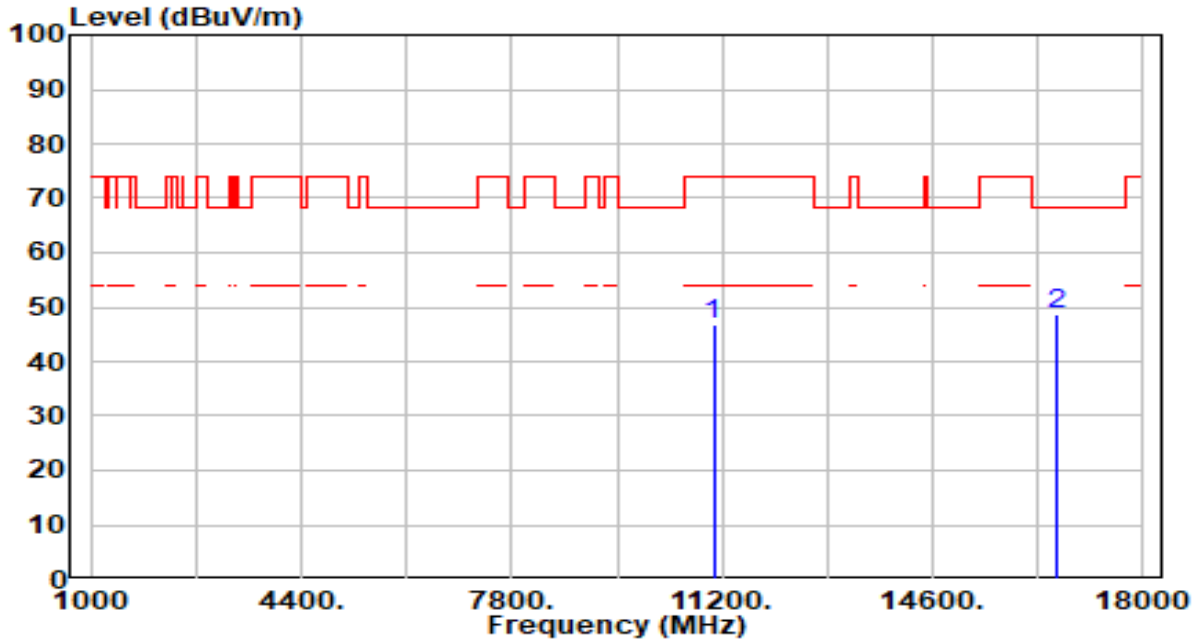


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.09	4.68	46.76	-27.24	74.00	300	314	Peak
2	* 16590.000	42.61	6.11	48.72	-19.48	68.20	300	196	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 122 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

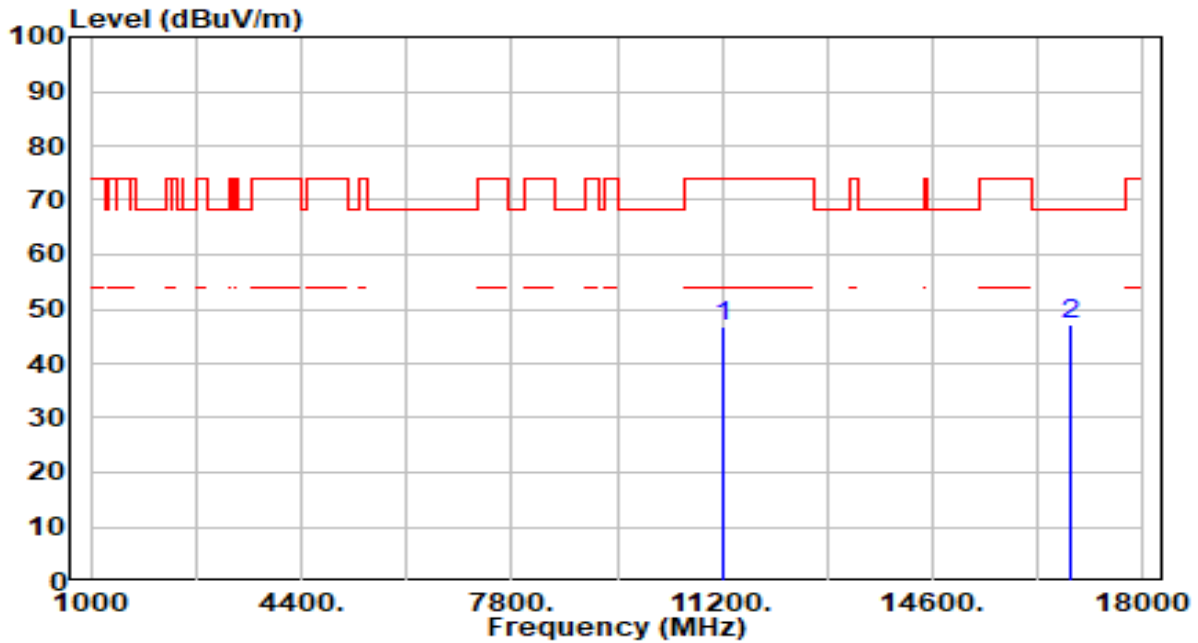


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.61	5.06	46.67	-27.33	74.00	300	130	Peak
2	* 16830.000	40.92	6.21	47.13	-21.07	68.20	300	104	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 122 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

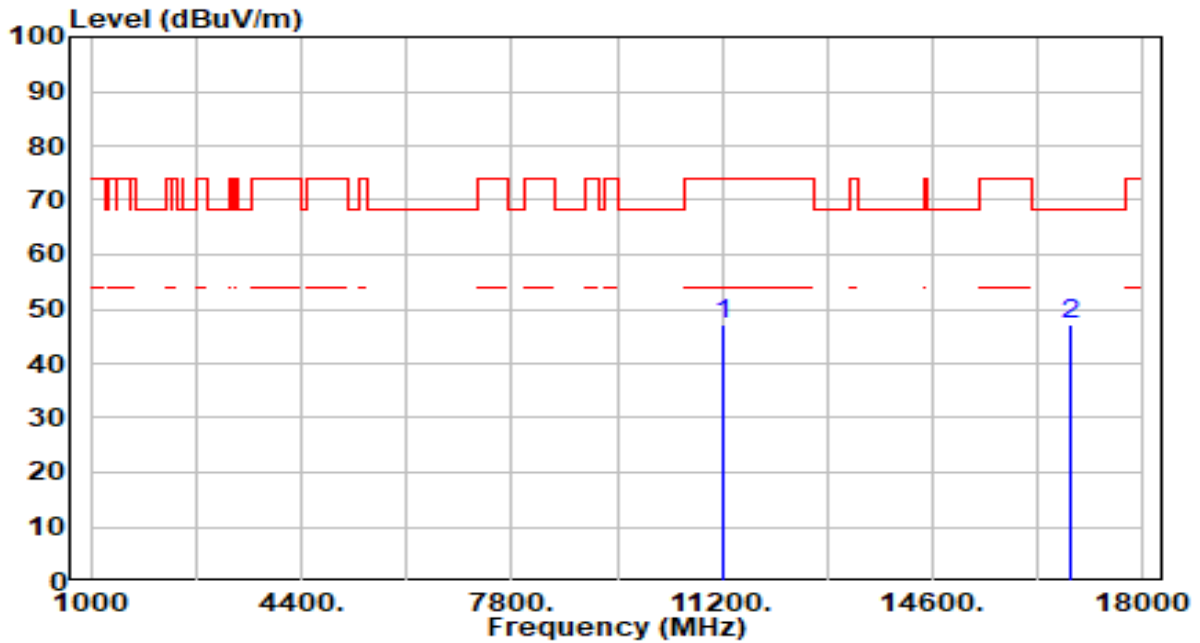


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.10	5.06	47.16	-26.84	74.00	300	360	Peak
2	* 16830.000	41.03	6.21	47.24	-20.96	68.20	300	123	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 138 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

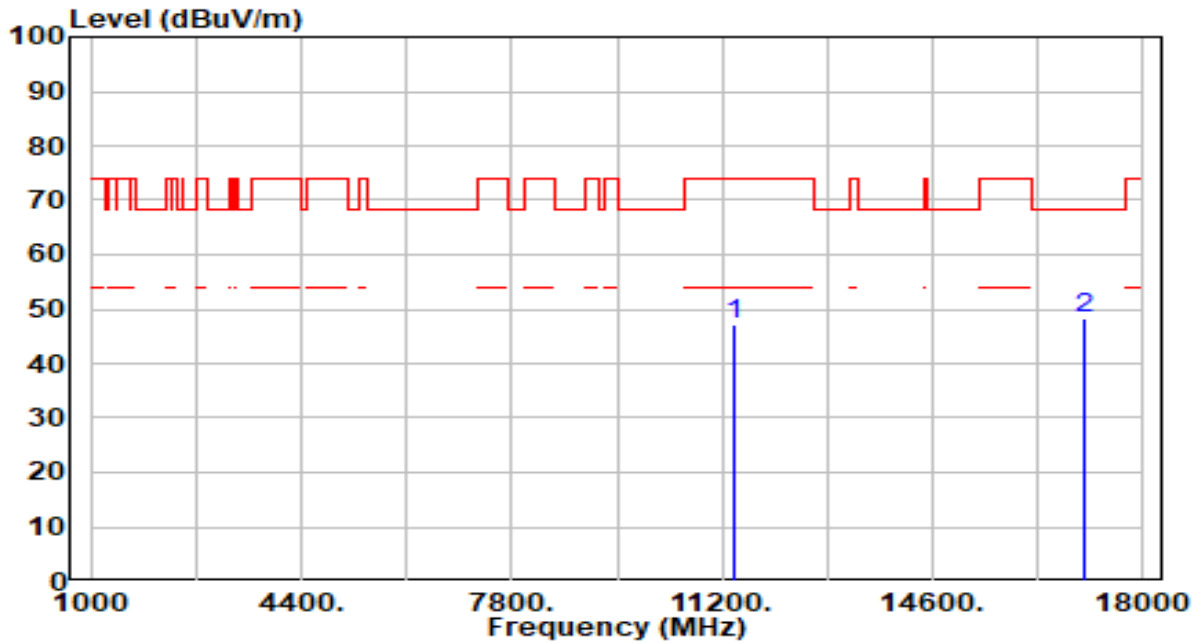


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.79	5.24	47.03	-26.97	74.00	300	251	Peak
2	* 17070.000	42.14	6.02	48.16	-20.04	68.20	300	104	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 138 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

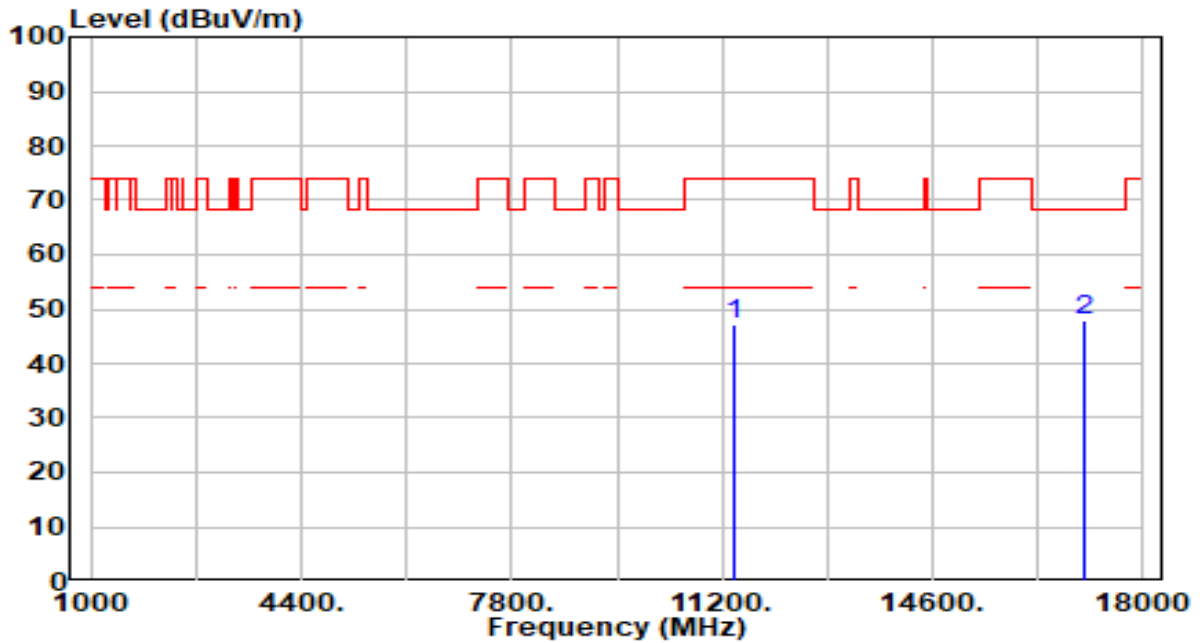


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.05	5.24	47.29	-26.71	74.00	300	62	Peak
2	* 17070.000	41.84	6.02	47.86	-20.34	68.20	300	229	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

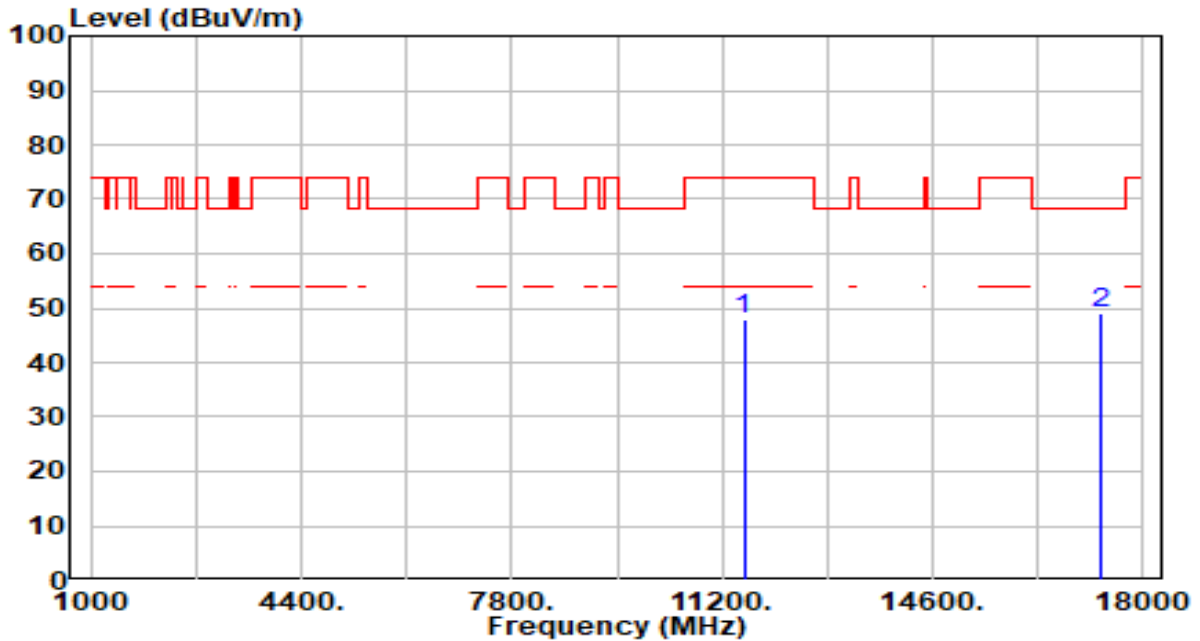


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.40	5.36	47.77	-26.23	74.00	300	170	Peak
2	* 17325.000	43.40	5.47	48.87	-19.33	68.20	300	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

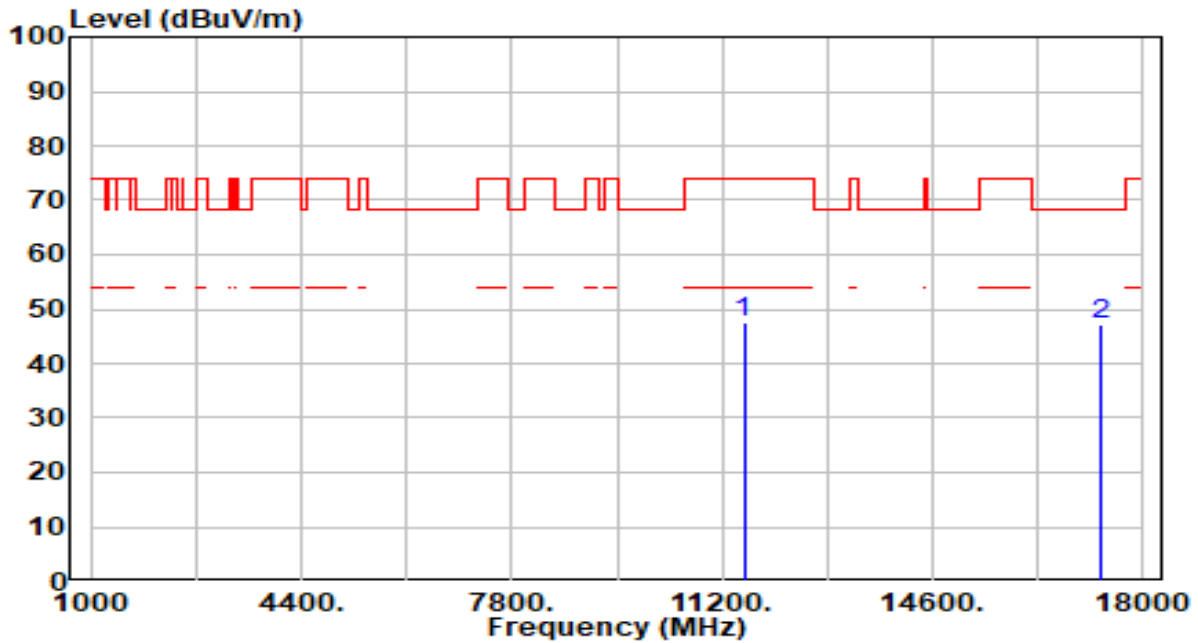


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.34	5.36	47.71	-26.29	74.00	300	172	Peak
2	* 17325.000	41.87	5.47	47.34	-20.86	68.20	300	257	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

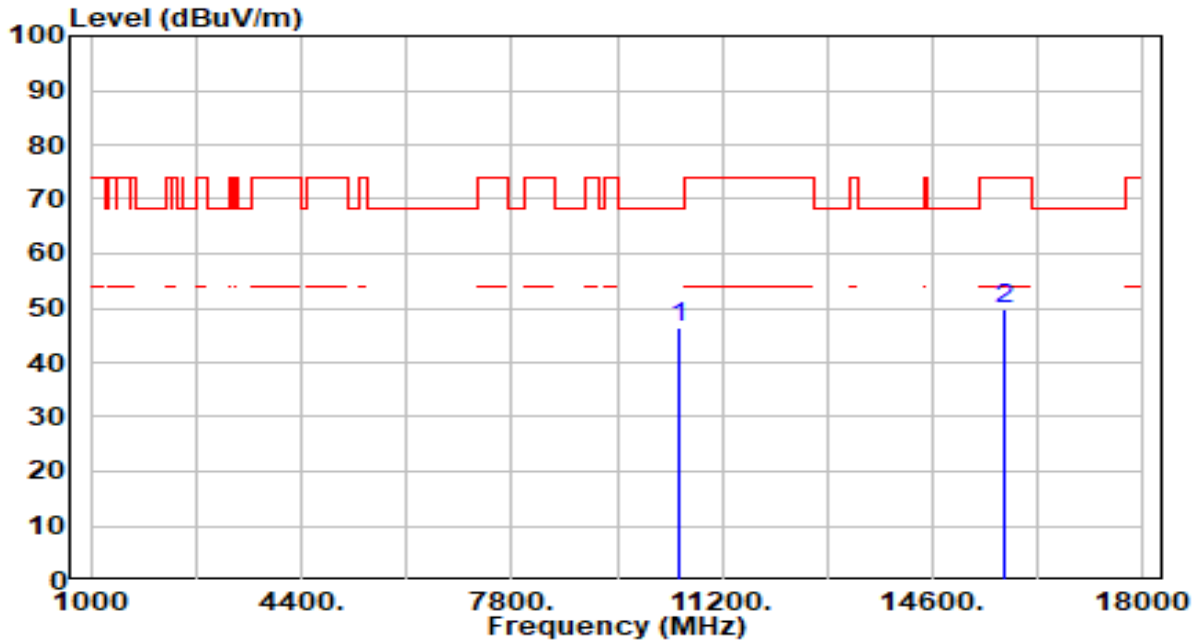


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	41.55	4.68	46.23	-21.97	68.20	300	266	Peak
2	15750.000	43.46	6.45	49.91	-24.09	74.00	300	214	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

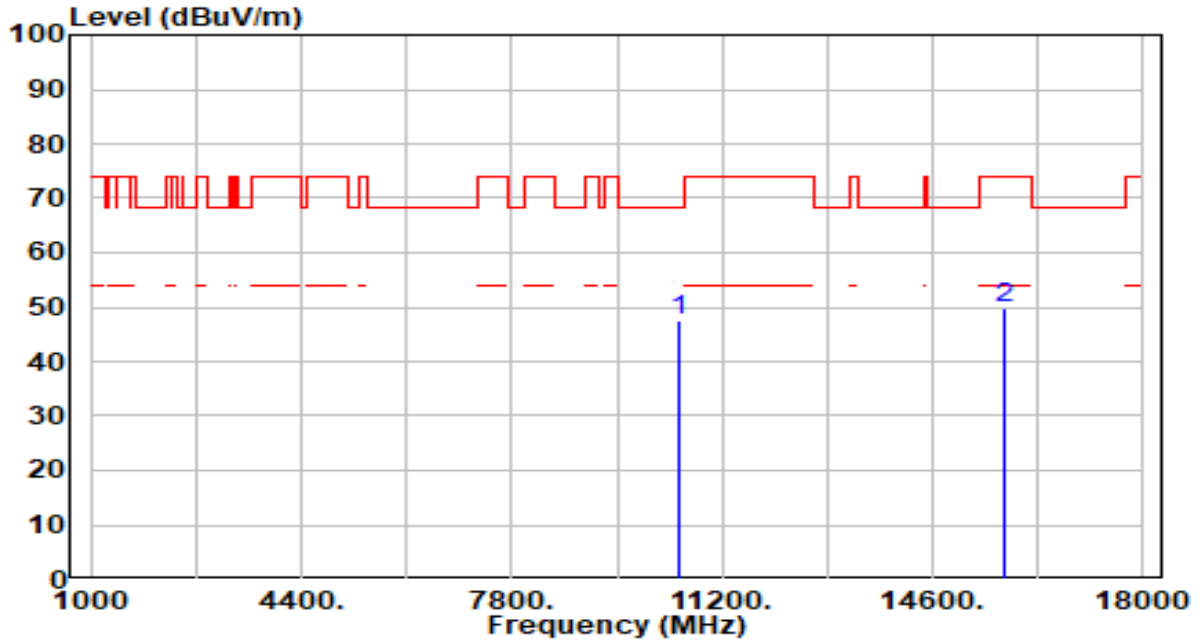


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	42.71	4.68	47.39	-20.81	68.20	300	230	Peak
2	15750.000	43.43	6.45	49.88	-24.12	74.00	300	132	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

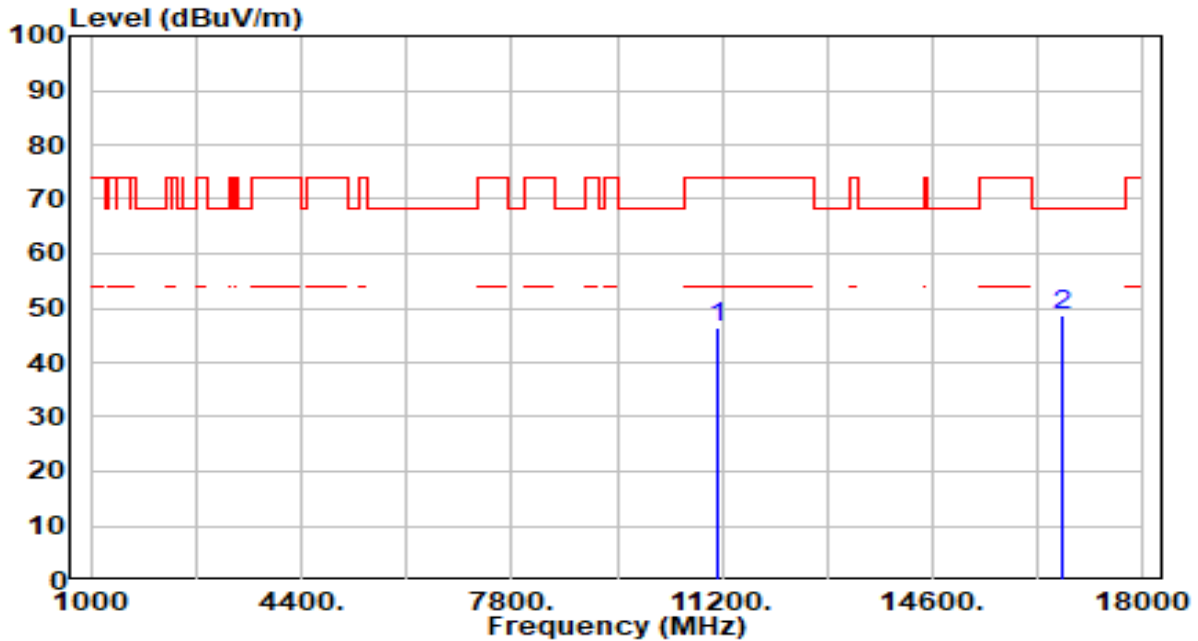


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.69	4.89	46.57	-27.43	74.00	300	341	Peak
2	* 16710.000	42.56	6.17	48.74	-19.46	68.20	300	335	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

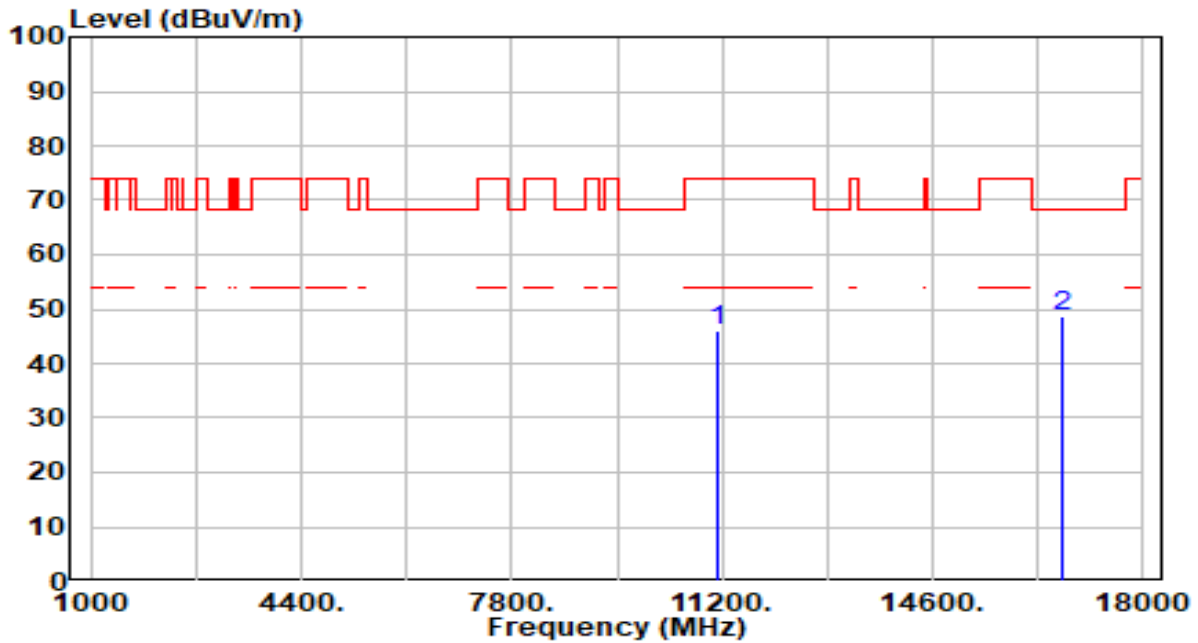


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.23	4.89	46.12	-27.88	74.00	300	282	Peak
2	* 16710.000	42.64	6.17	48.81	-19.39	68.20	300	120	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

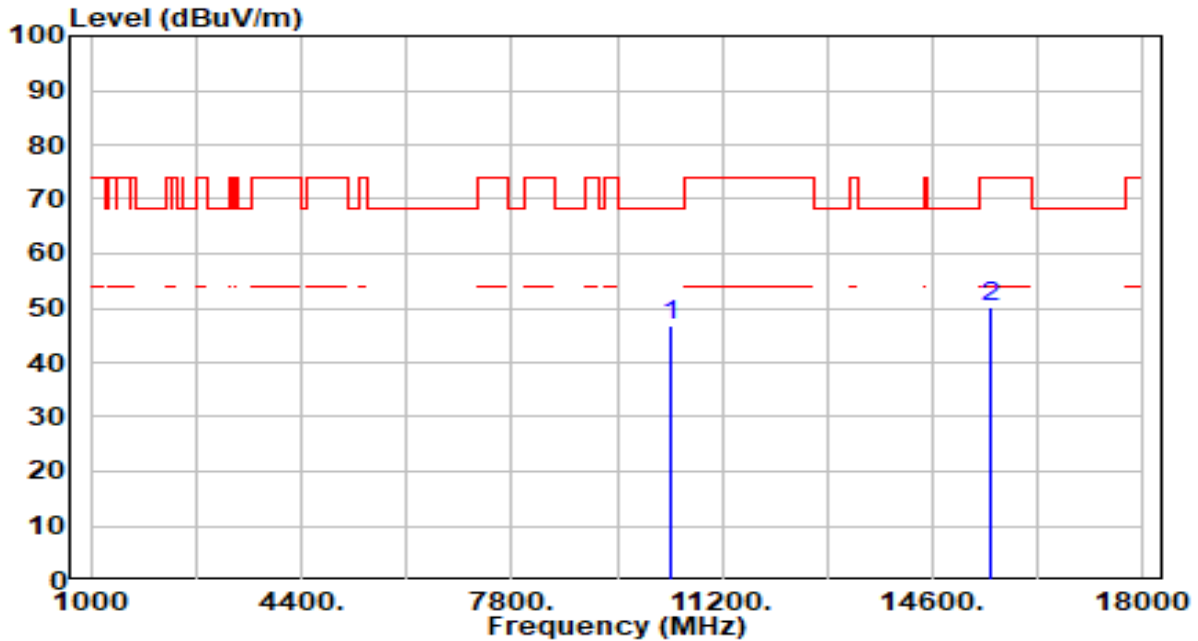


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.98	4.87	46.85	-21.35	68.20	300	228	Peak
2		44.17	6.21	50.37	-23.63	74.00	300	289	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

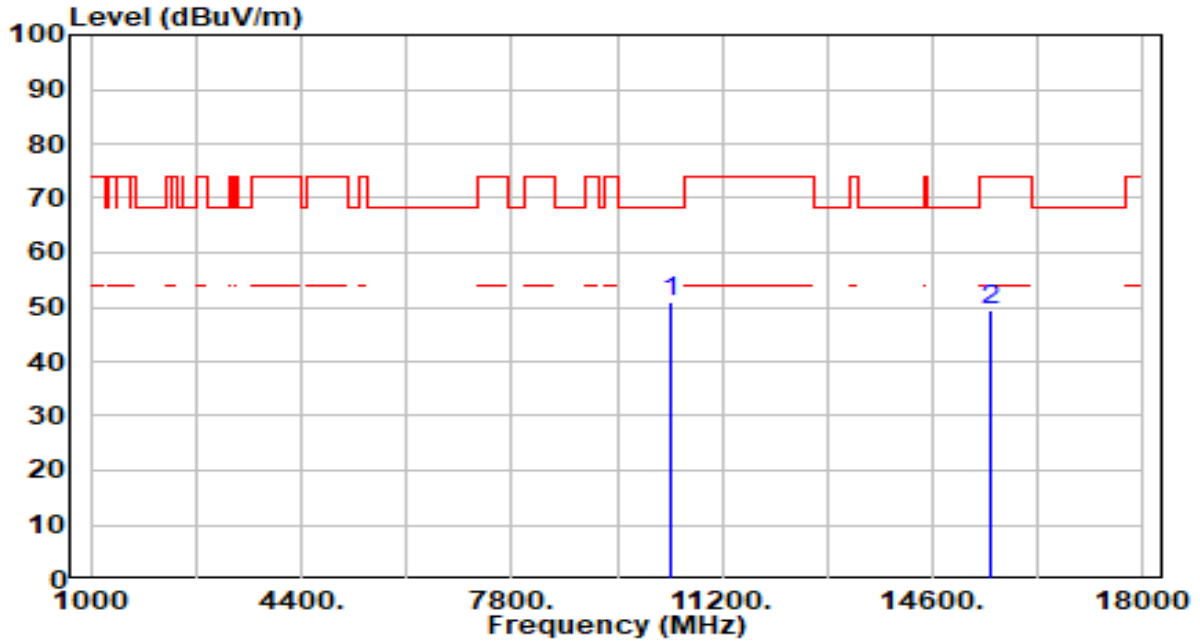


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	46.02	4.87	50.89	-17.31	68.20	300	2	Peak
2	15540.000	43.24	6.21	49.45	-24.55	74.00	300	282	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 40 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

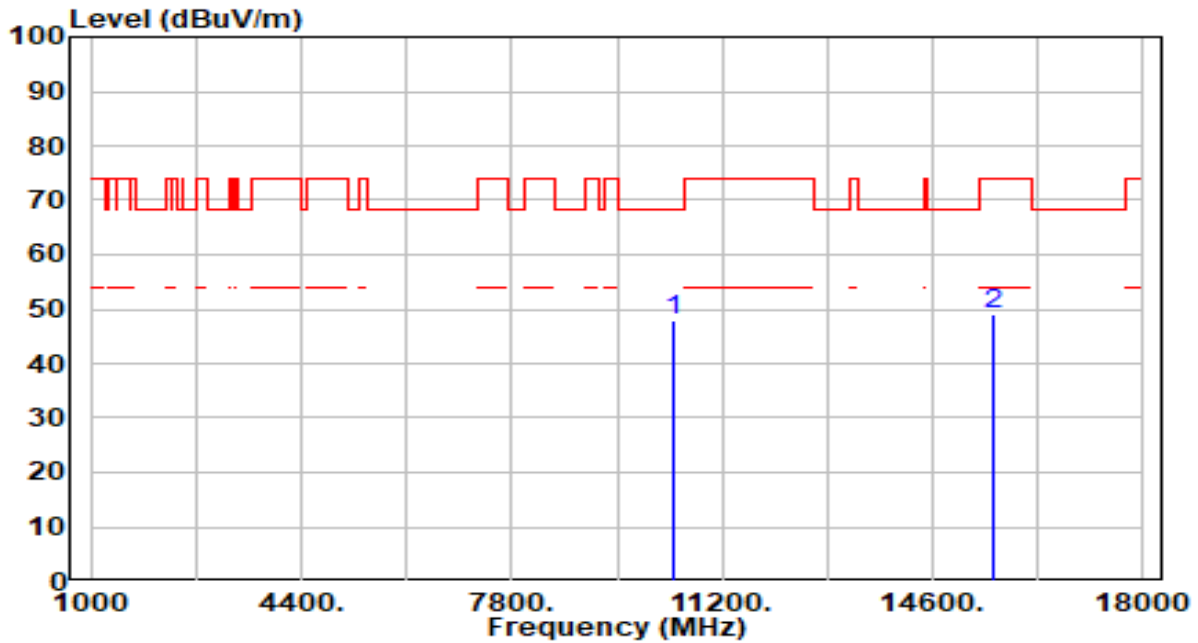


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10400.000	42.97	4.82	47.79	-20.41	68.20	300	306	Peak
2	15600.000	43.06	6.15	49.20	-24.80	74.00	300	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 40 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

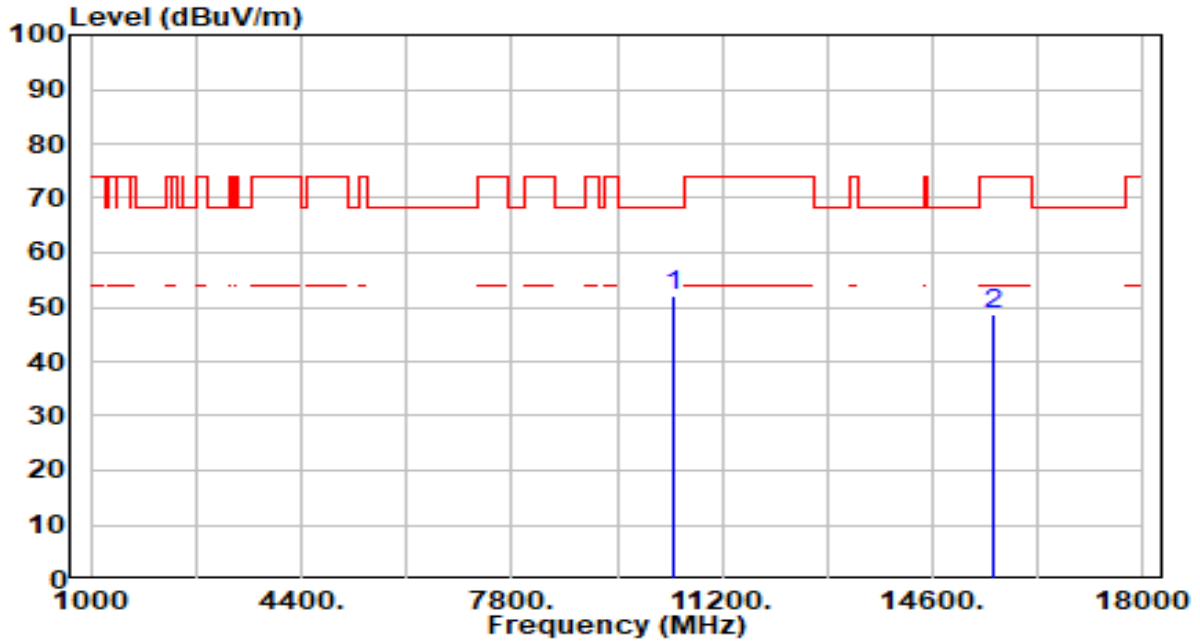


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10400.000	47.17	4.82	51.99	-16.21	68.20	300	179	Peak
2	15600.000	42.61	6.15	48.76	-25.24	74.00	300	297	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 48 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

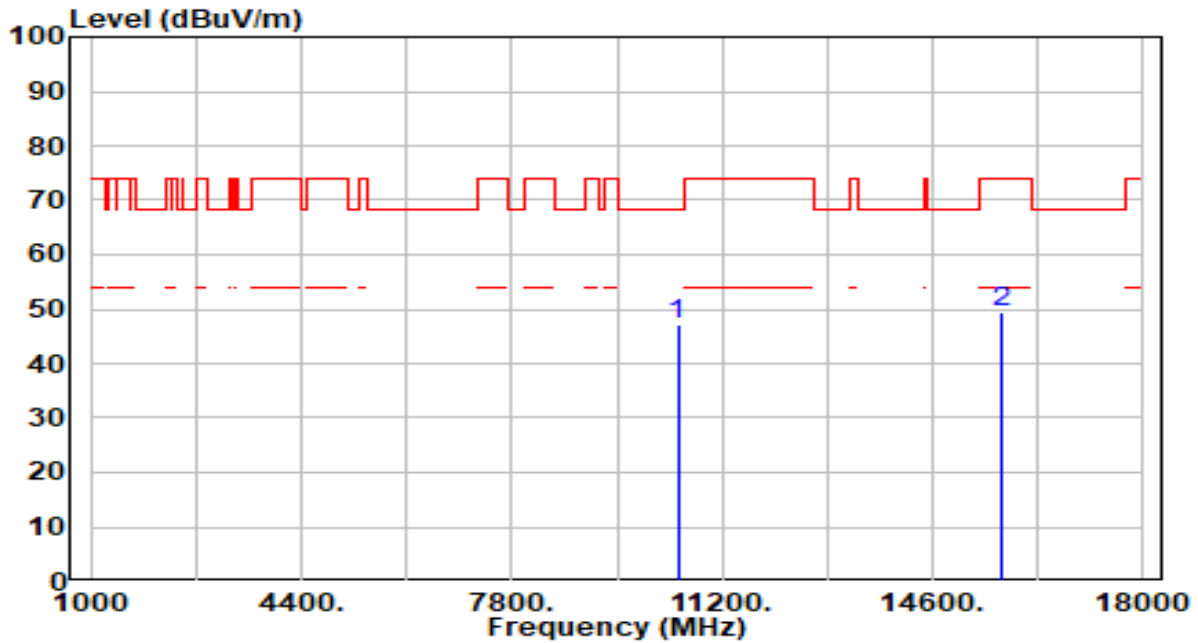


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	42.63	4.71	47.34	-20.86	68.20	300	211	Peak
2	15720.000	43.05	6.39	49.44	-24.56	74.00	300	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 48 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

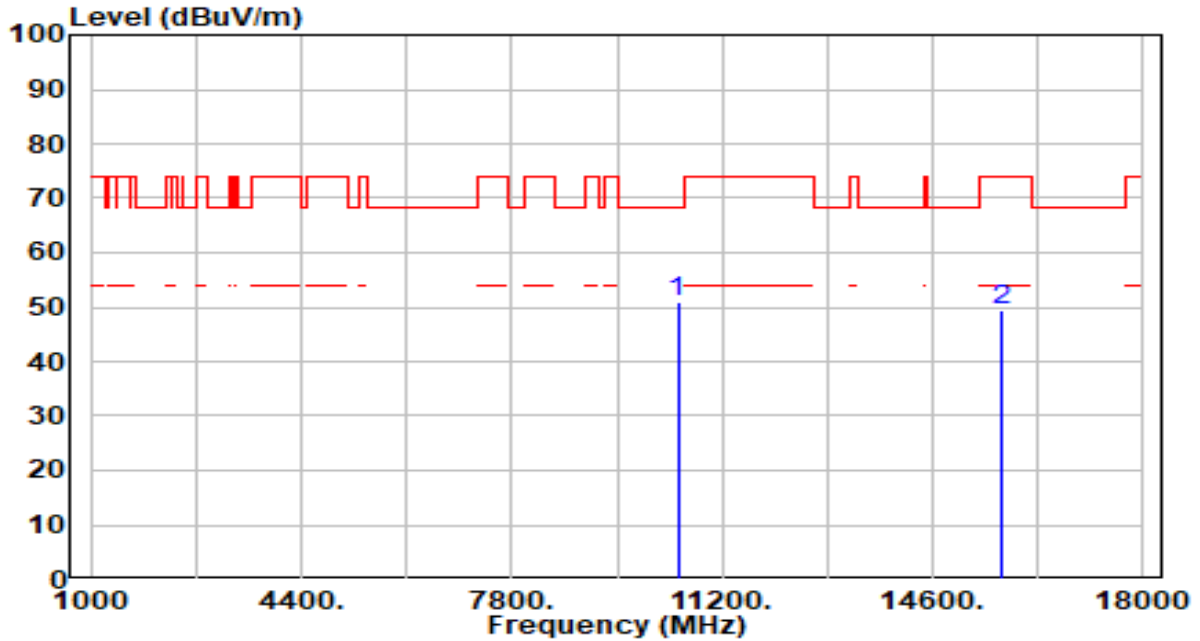


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	46.40	4.71	51.11	-17.09	68.20	300	225	Peak
2	15720.000	43.12	6.39	49.51	-24.49	74.00	300	201	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 52 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

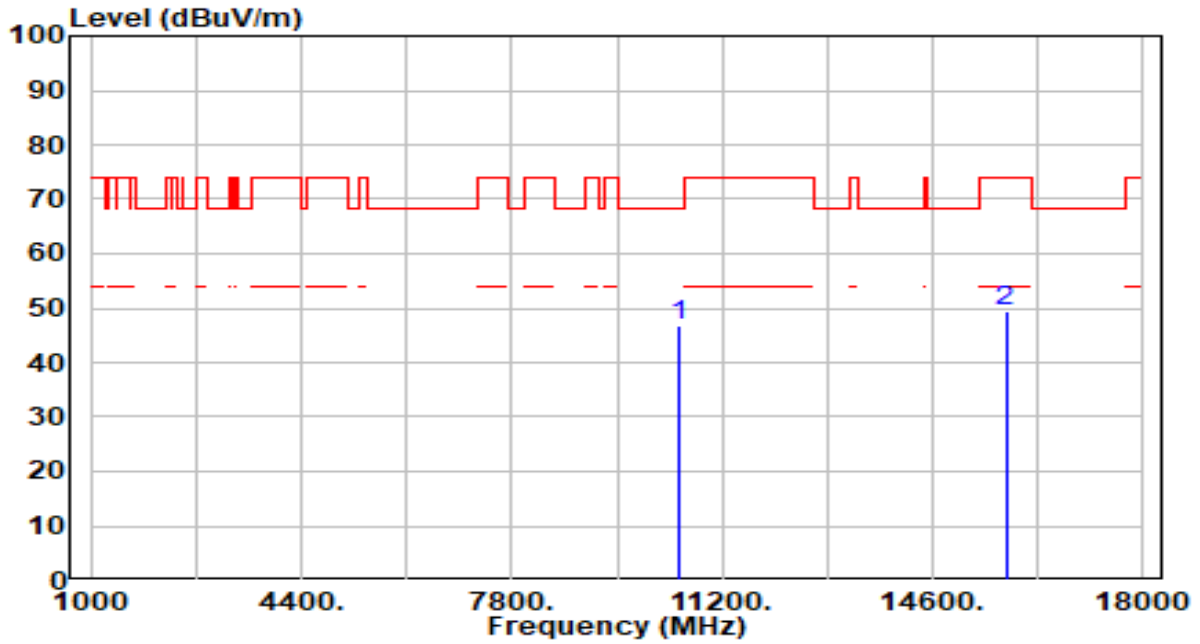


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	42.11	4.67	46.78	-21.42	68.20	300	0	Peak
2	15780.000	43.04	6.51	49.54	-24.46	74.00	300	120	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 52 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

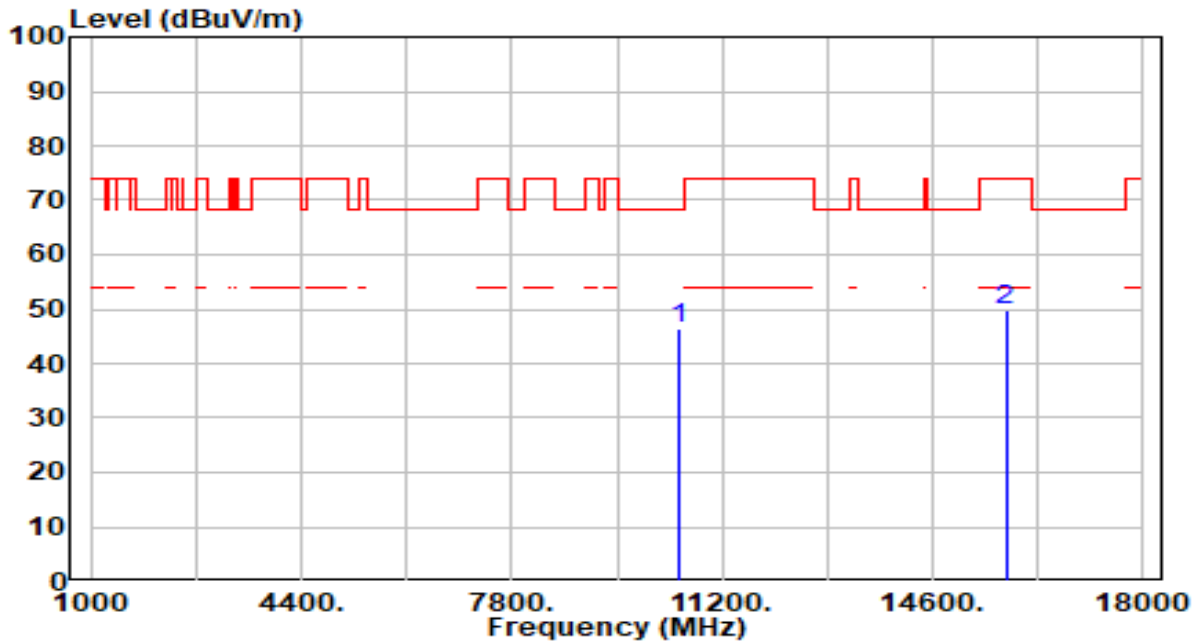


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	41.60	4.67	46.27	-21.93	68.20	300	105	Peak
2	15780.000	43.23	6.51	49.74	-24.26	74.00	300	68	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 60 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

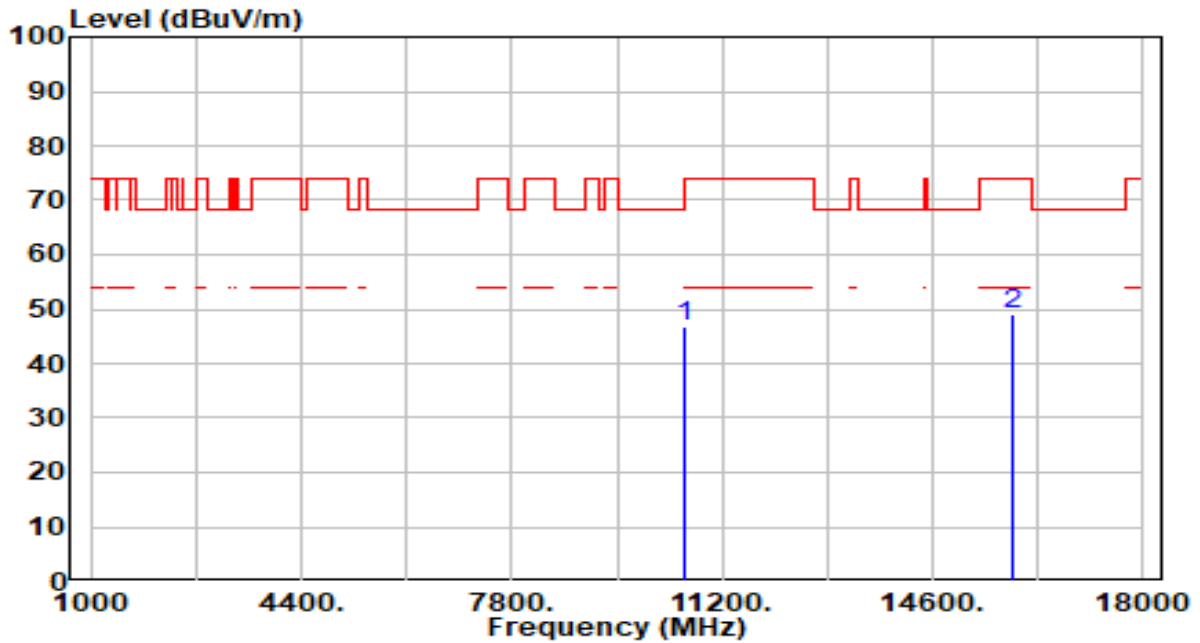


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	42.34	4.61	46.95	-21.25	68.20	300	351	Peak
2	15900.000	42.63	6.55	49.18	-24.82	74.00	300	328	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 60 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

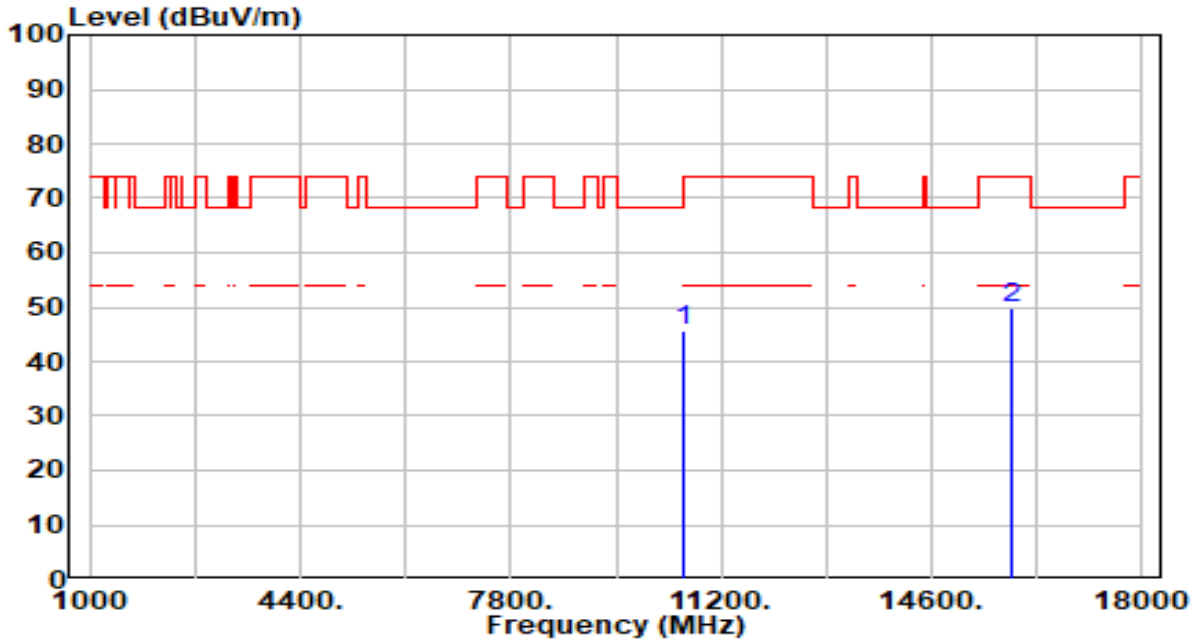


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	40.99	4.61	45.60	-22.60	68.20	300	239	Peak
2	15900.000	43.40	6.55	49.94	-24.06	74.00	300	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

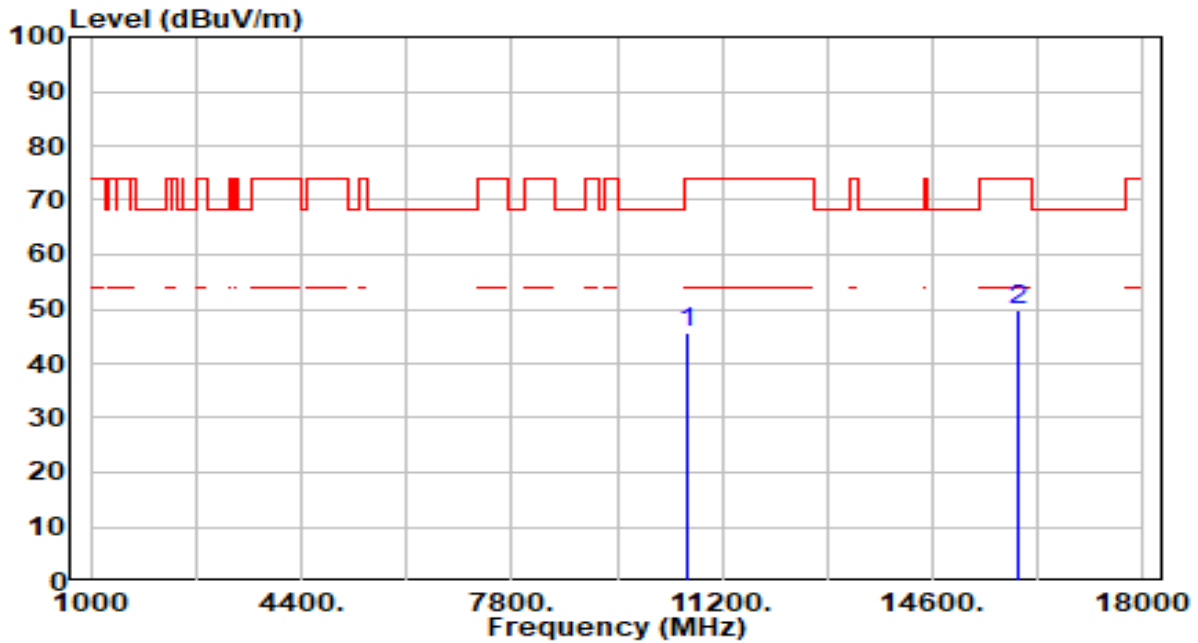


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.17	4.62	45.80	-28.20	74.00	300	229	Peak
2	* 15960.000	43.25	6.55	49.80	-24.20	74.00	300	14	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

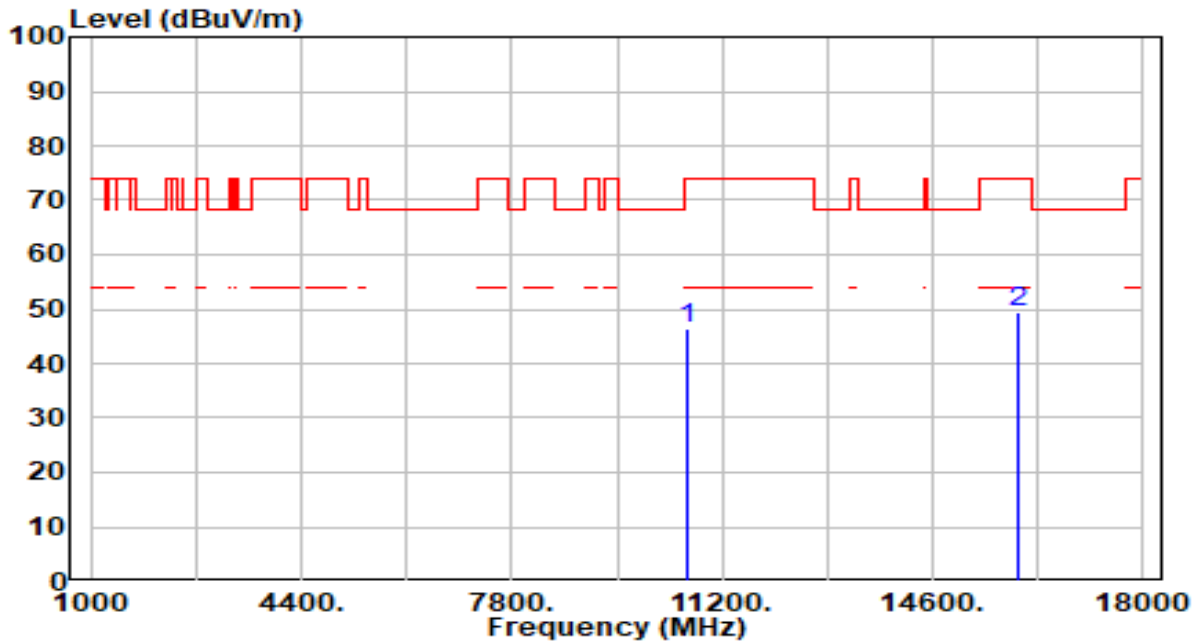


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.69	4.62	46.32	-27.68	74.00	300	244	Peak
2	* 15960.000	42.75	6.55	49.30	-24.70	74.00	300	0	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

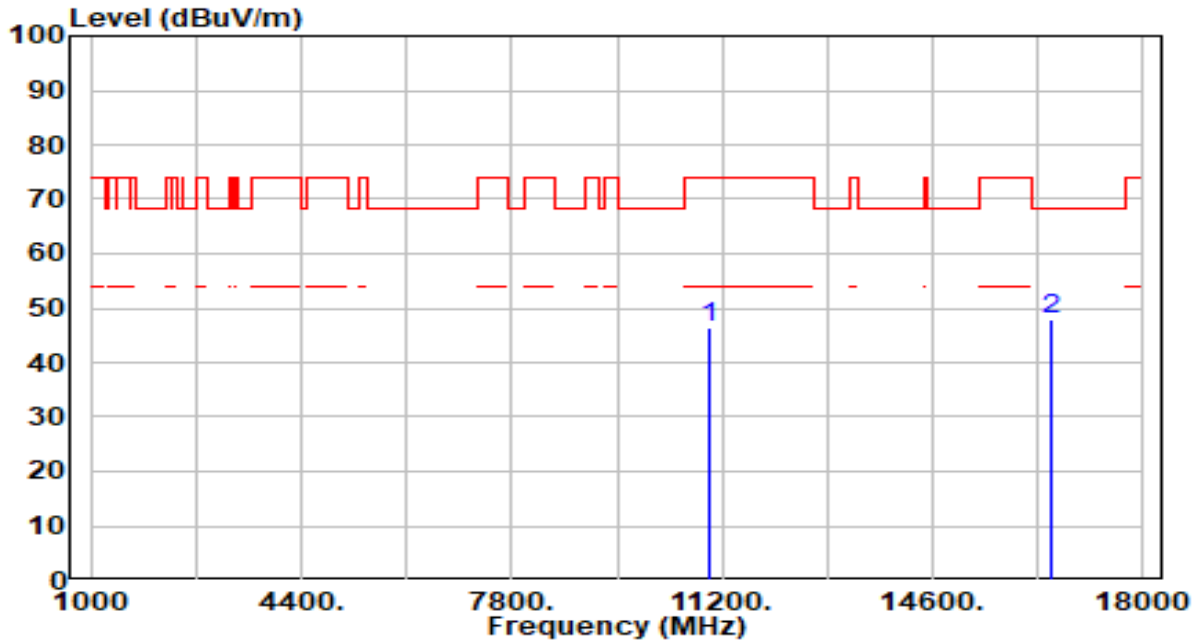


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.03	4.52	46.55	-27.45	74.00	300	216	Peak
2	* 16500.000	41.99	6.10	48.09	-20.11	68.20	300	121	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

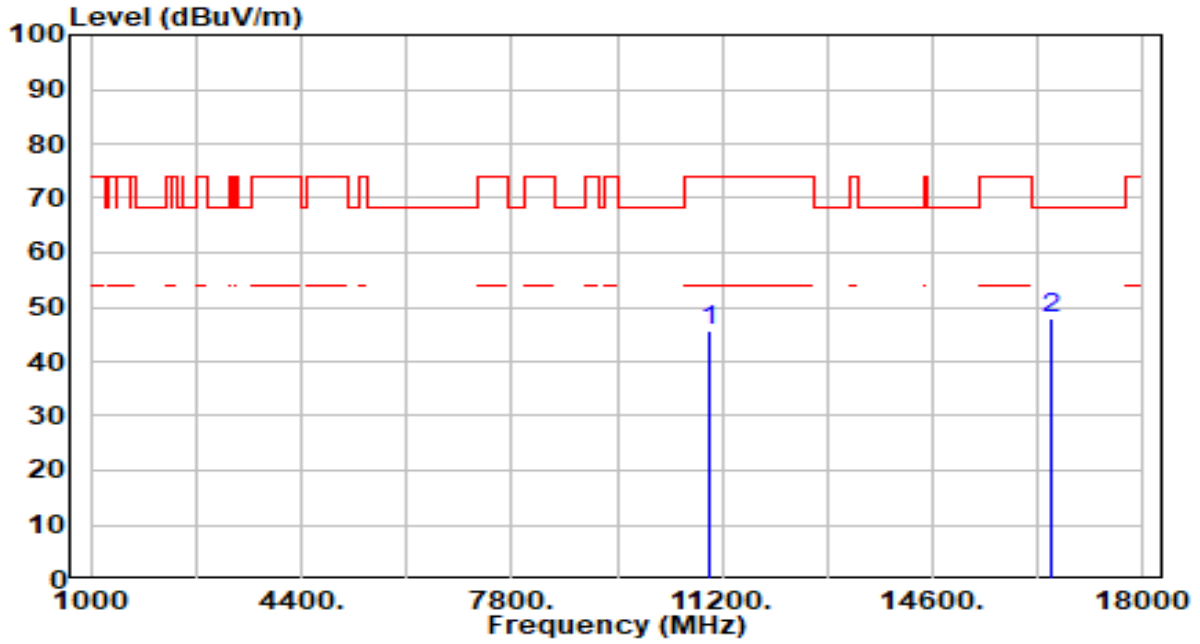


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.06	4.52	45.58	-28.42	74.00	300	103	Peak
2	* 16500.000	41.73	6.10	47.83	-20.37	68.20	300	22	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 116 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

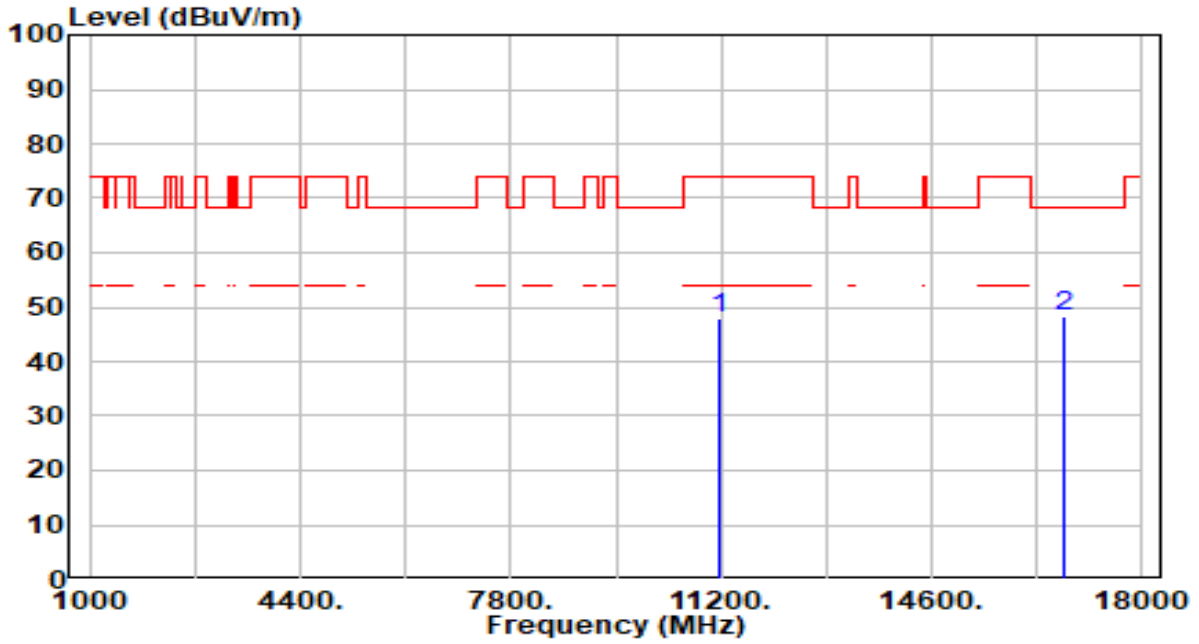


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.86	4.94	47.79	-26.21	74.00	300	83	Peak
2	* 16740.000	42.27	6.19	48.46	-19.74	68.20	300	302	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 116 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

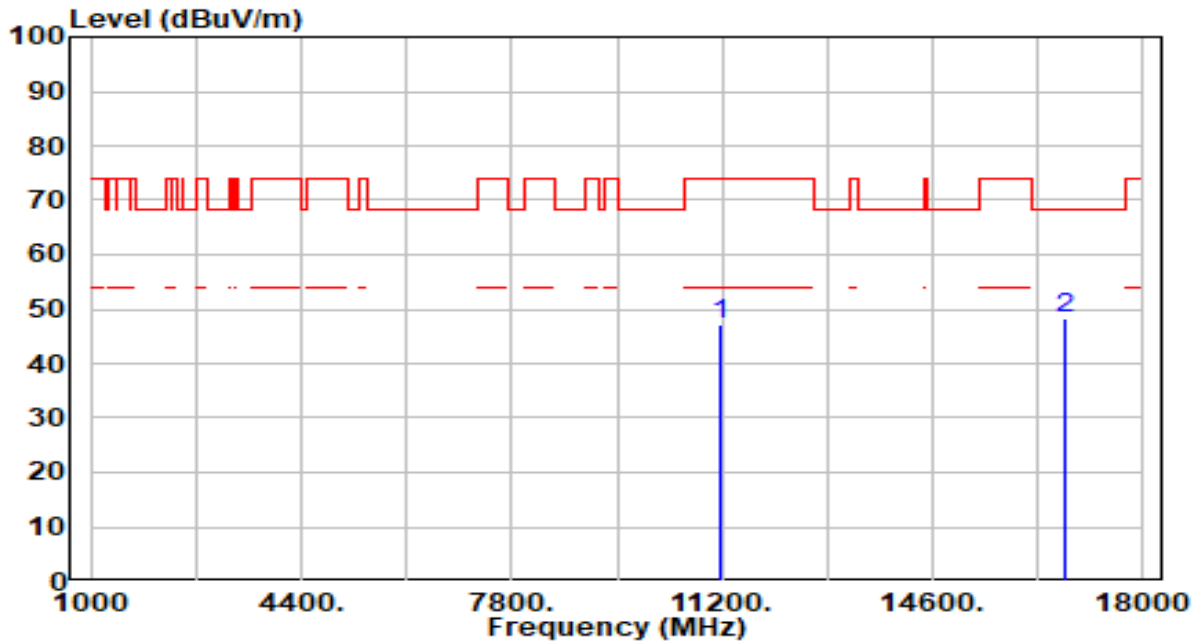


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.13	4.94	47.06	-26.94	74.00	300	360	Peak
2	* 16740.000	42.02	6.19	48.21	-19.99	68.20	300	124	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

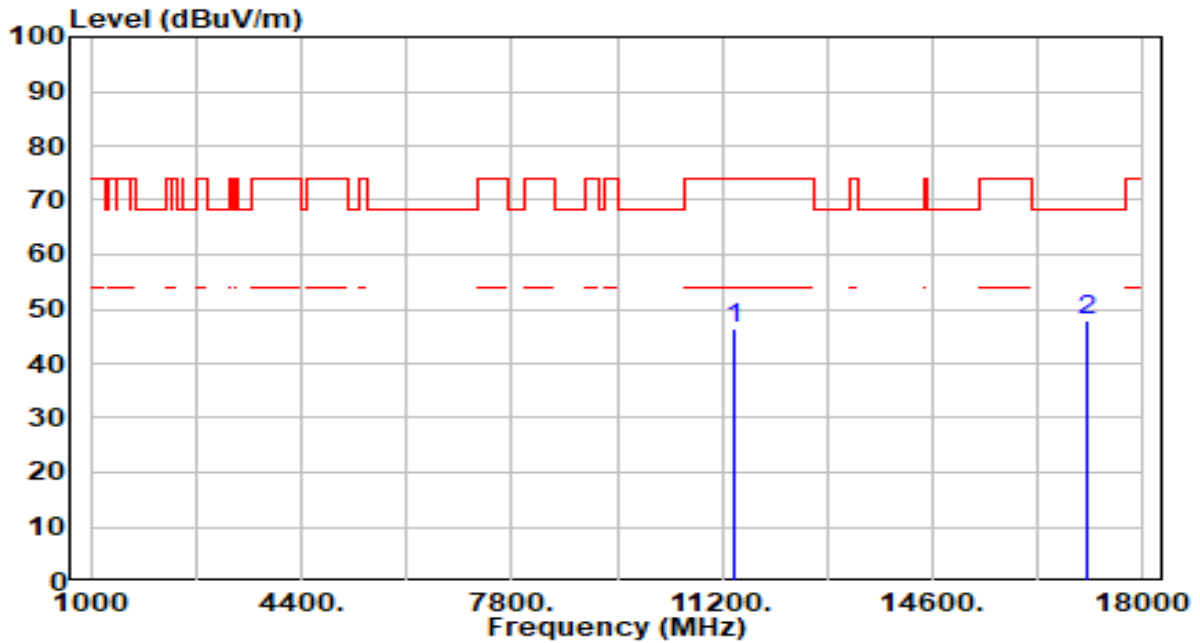


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.13	5.26	46.40	-27.60	74.00	300	360	Peak
2	* 17100.000	42.03	5.97	48.00	-20.20	68.20	300	228	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

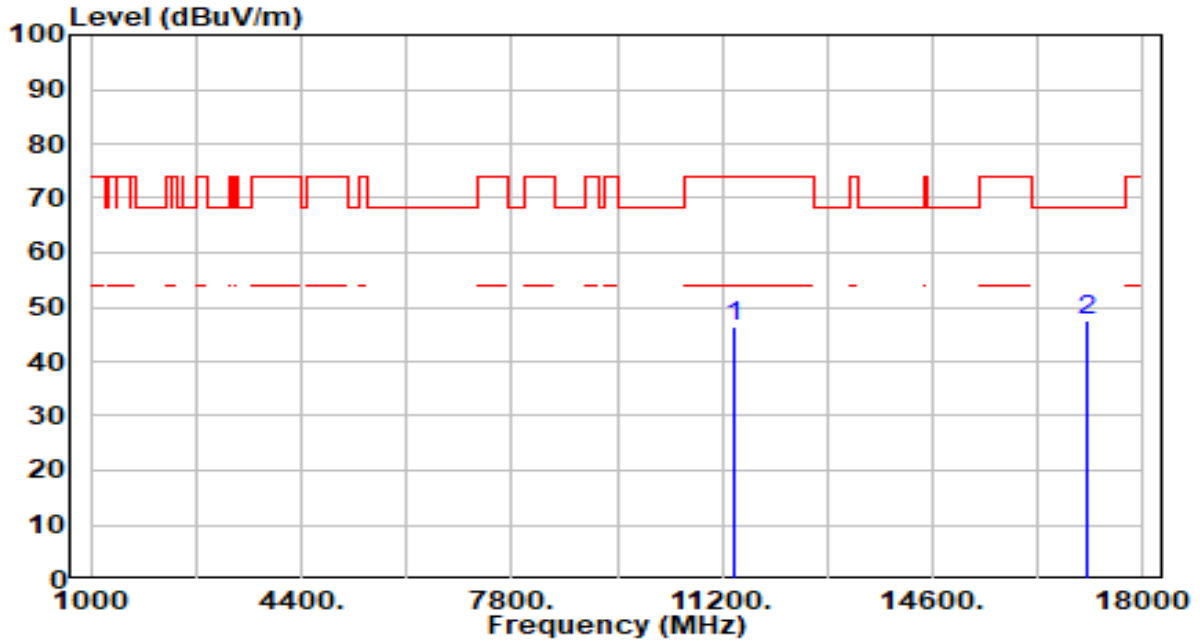


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.09	5.26	46.35	-27.65	74.00	300	285	Peak
2	* 17100.000	41.50	5.97	47.47	-20.73	68.20	300	340	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 144 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

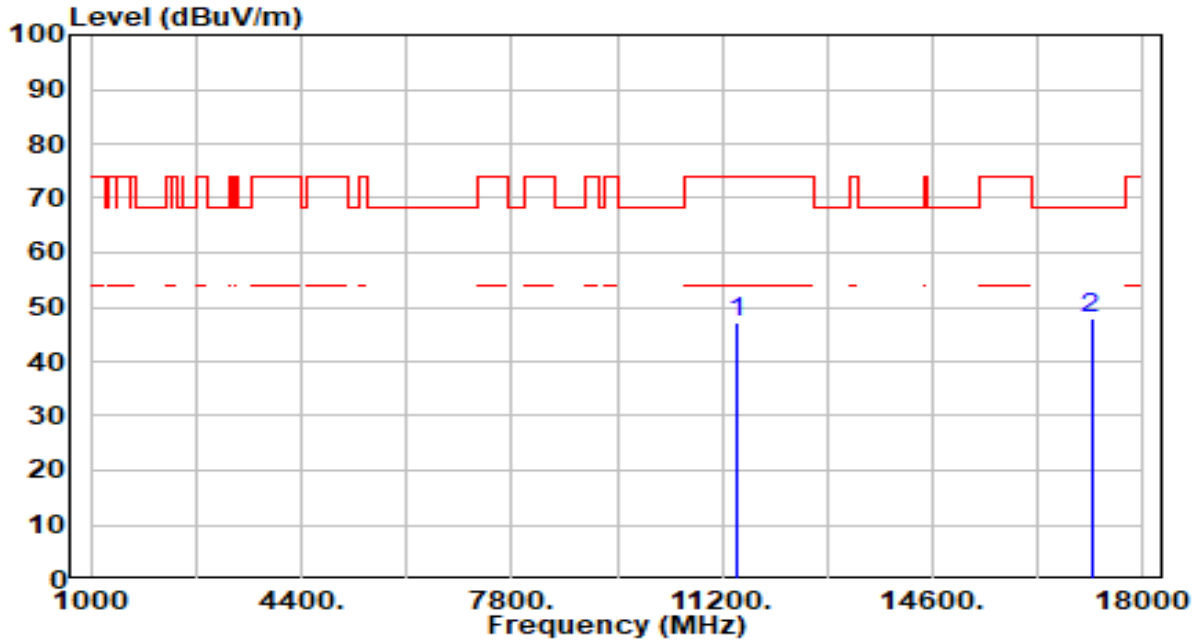


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.91	5.29	47.20	-26.80	74.00	300	43	Peak
2	* 17160.000	42.13	5.87	48.00	-20.20	68.20	300	336	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 144 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

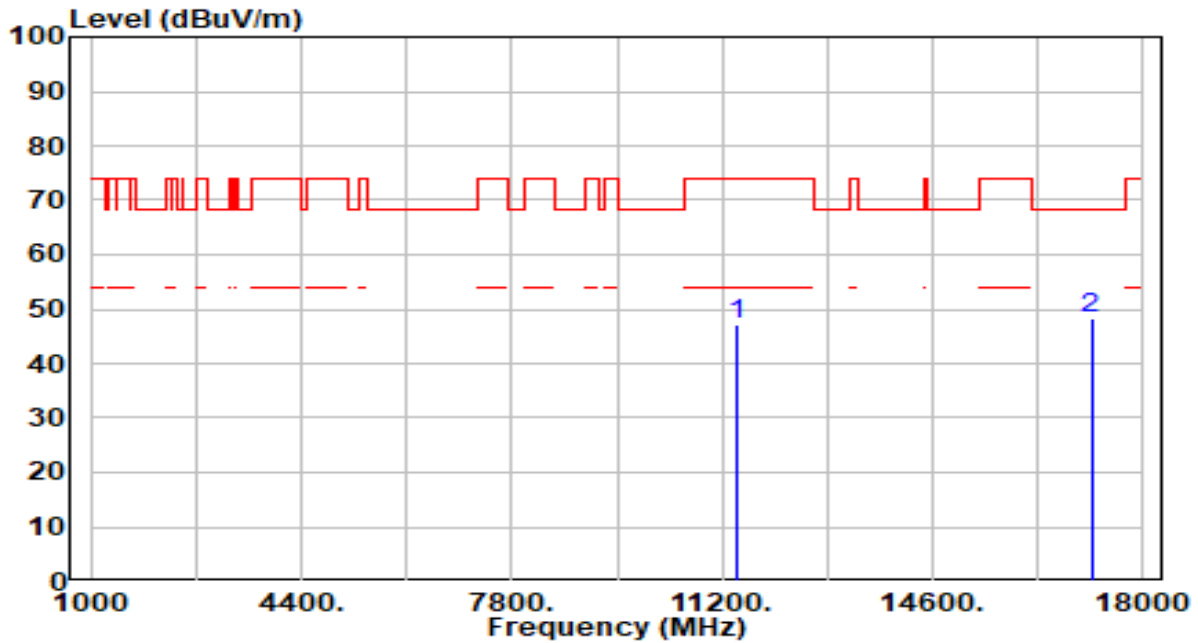


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.93	5.29	47.22	-26.78	74.00	300	328	Peak
2	* 17160.000	42.60	5.87	48.47	-19.73	68.20	300	0	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 149 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

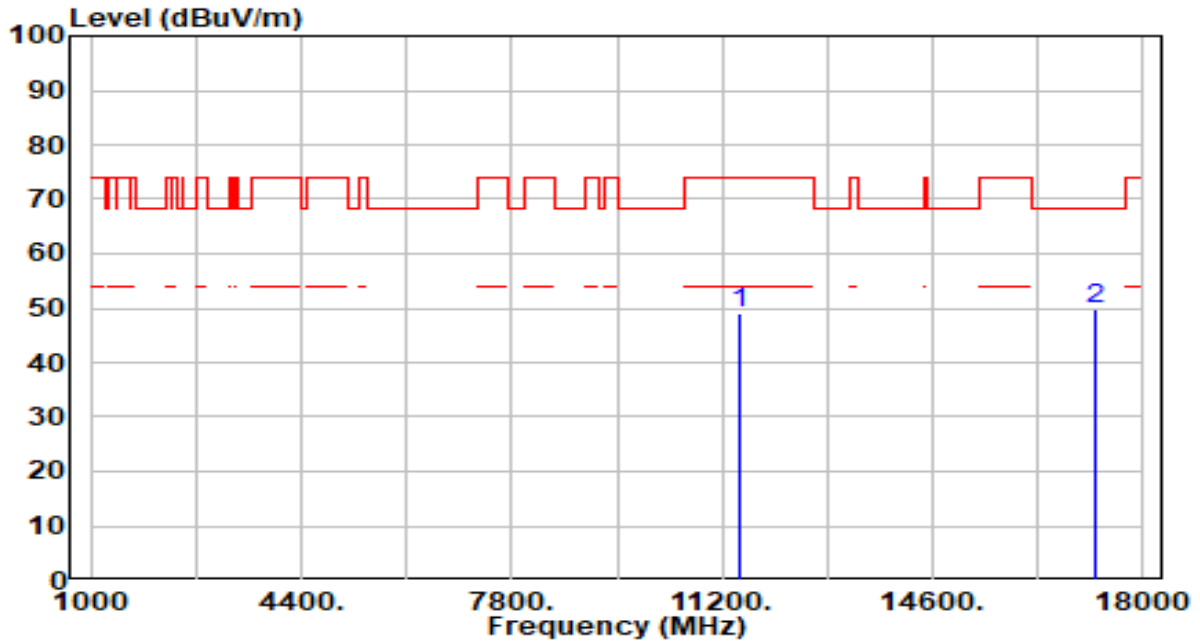


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	43.92	5.32	49.24	-24.76	74.00	300	142	Peak
2	* 17235.000	44.28	5.71	49.99	-18.21	68.20	300	107	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 149 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

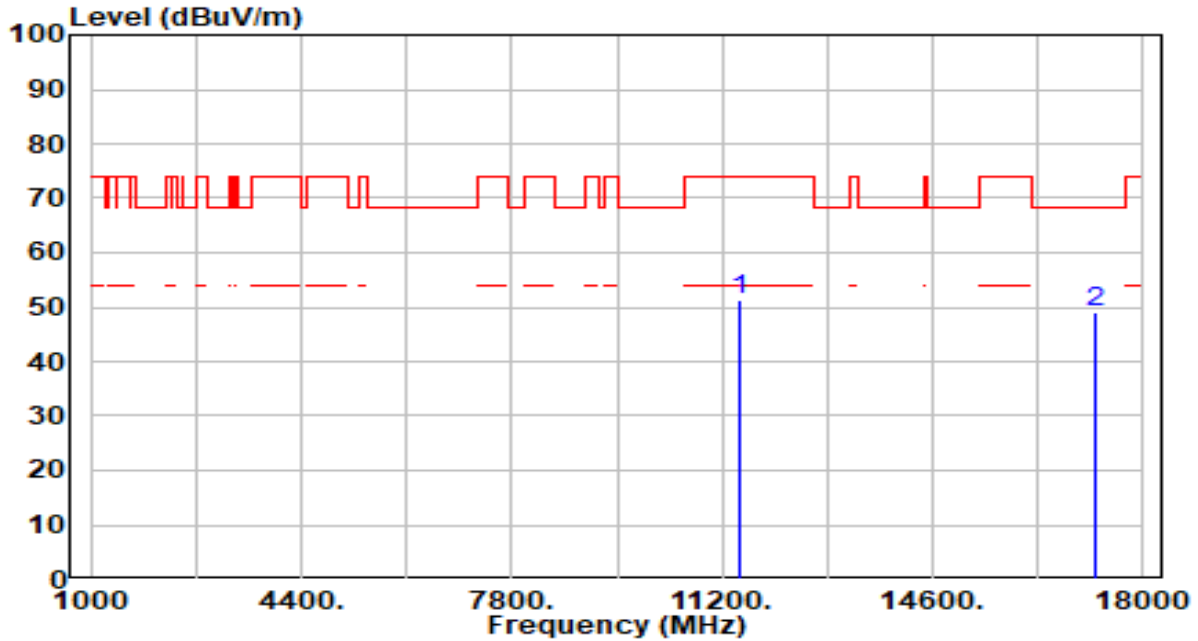


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	45.91	5.32	51.23	-22.77	74.00	300	236	Peak
2	* 17235.000	43.32	5.71	49.03	-19.17	68.20	300	51	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 157 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

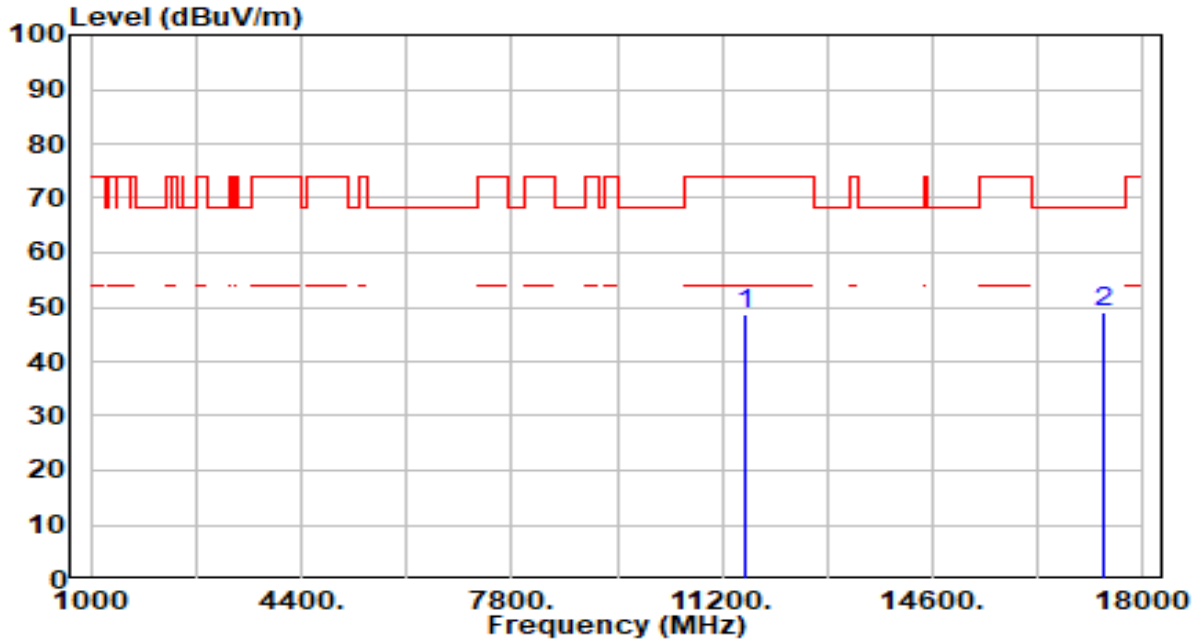


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	43.25	5.38	48.63	-25.37	74.00	300	274	Peak
2	* 17355.000	43.80	5.39	49.19	-19.01	68.20	300	277	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 157 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

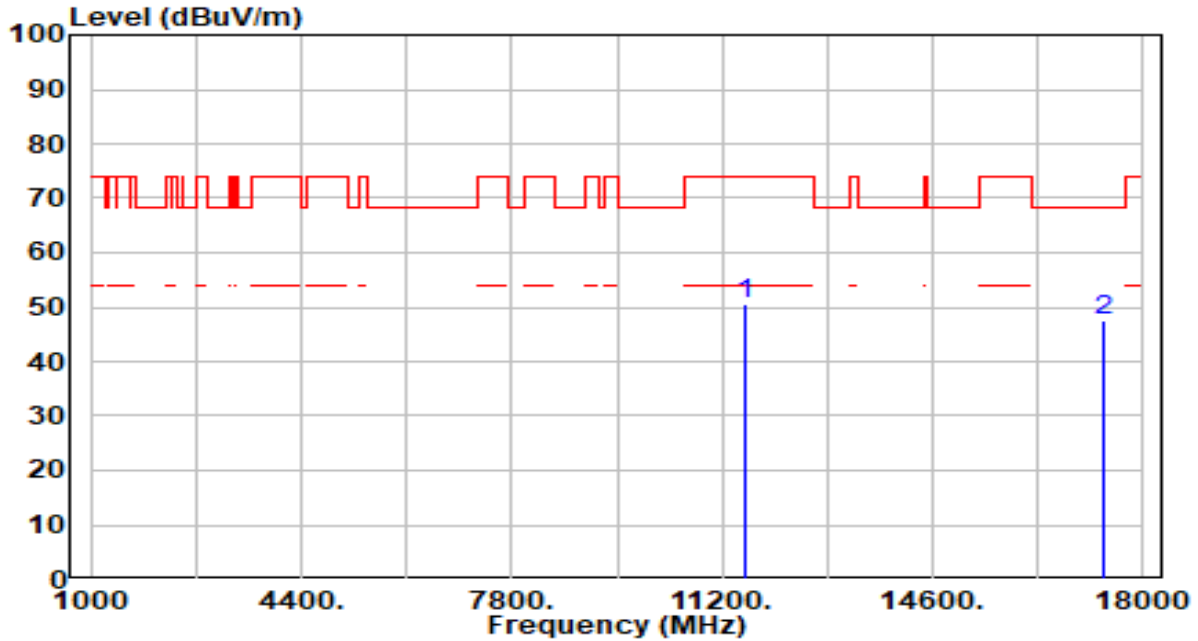


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	45.07	5.38	50.45	-23.55	74.00	300	39	Peak
2	* 17355.000	42.16	5.39	47.55	-20.65	68.20	300	114	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 165 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

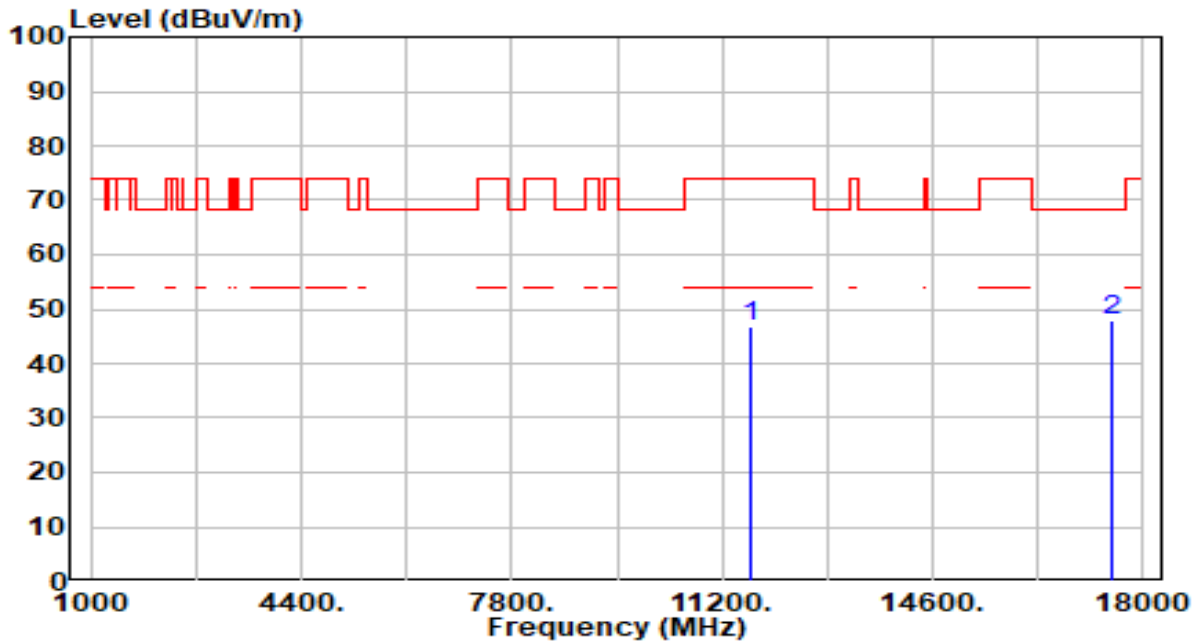


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.61	5.36	46.97	-27.03	74.00	300	38	Peak
2	* 17475.000	42.82	5.29	48.11	-20.09	68.20	300	165	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

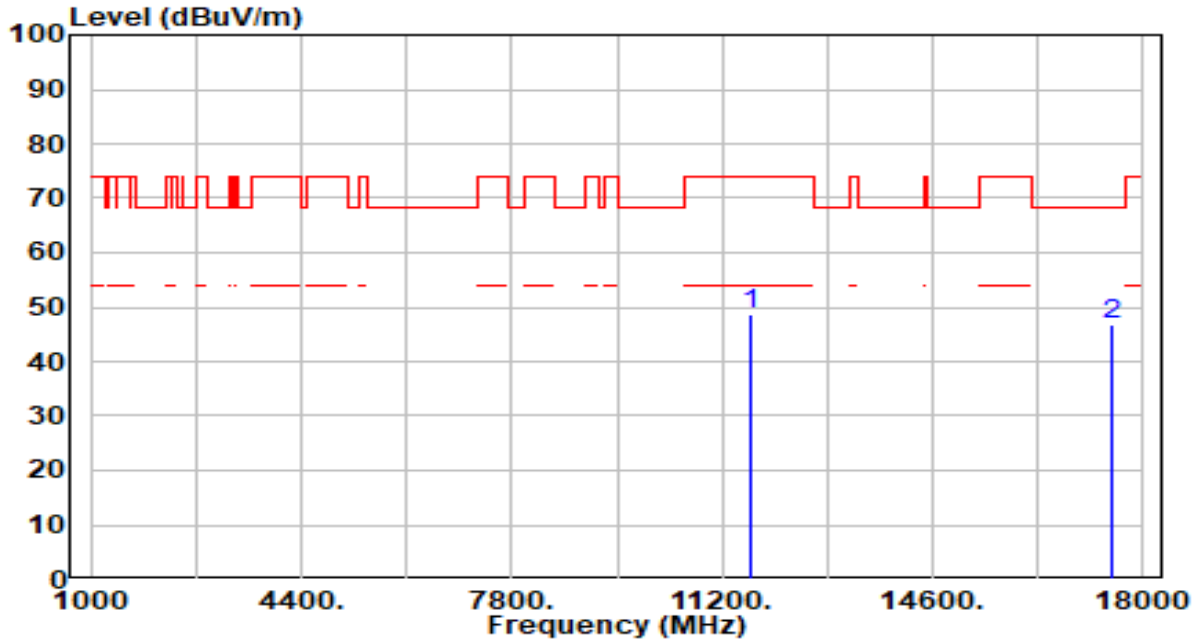


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	43.39	5.36	48.75	-25.25	74.00	300	3	Peak
2	* 17475.000	41.68	5.29	46.97	-21.23	68.20	300	85	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

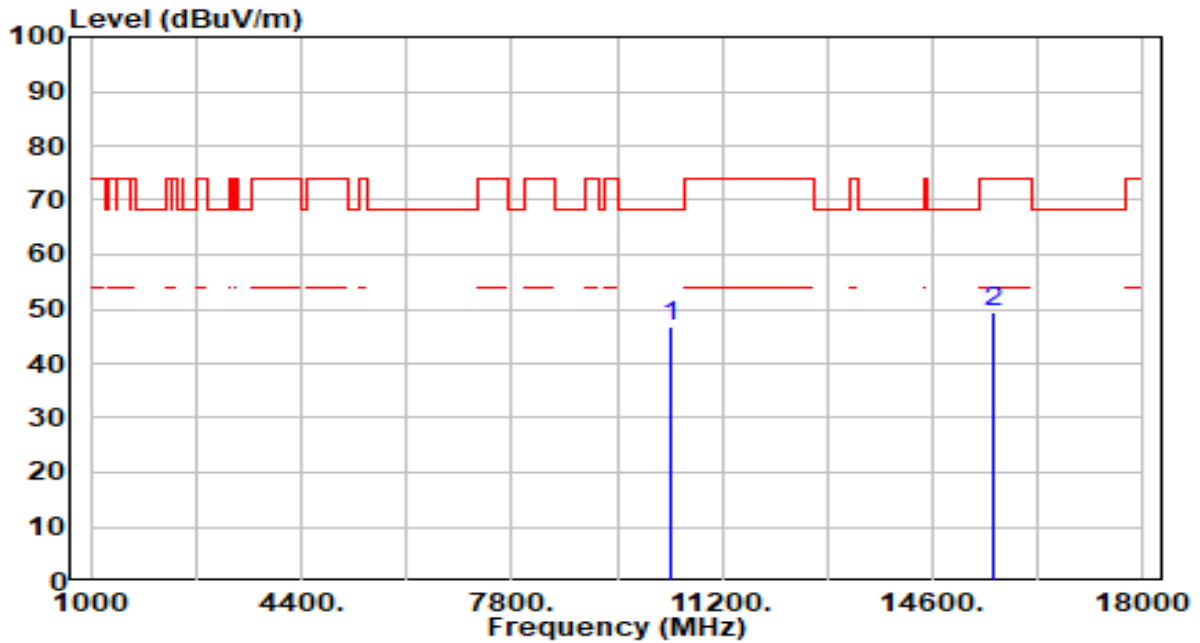


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	41.98	4.84	46.83	-21.37	68.20	300	0	Peak
2	15570.000	43.37	6.18	49.55	-24.45	74.00	300	11	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

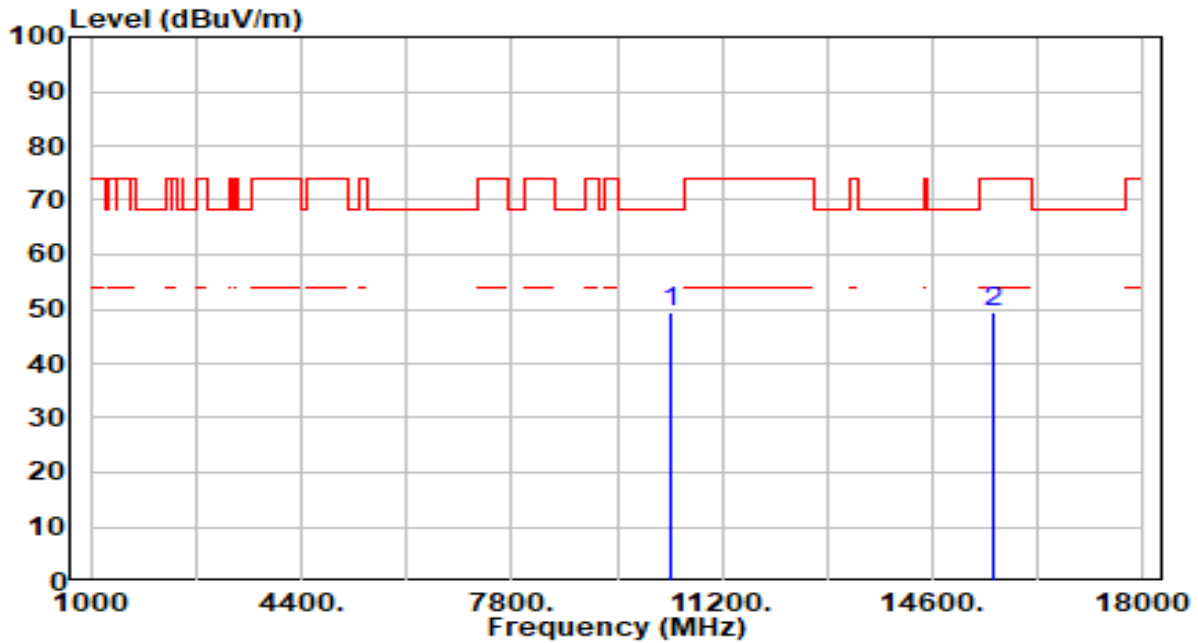


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	44.45	4.84	49.29	-18.91	68.20	300	238	Peak
2	15570.000	43.30	6.18	49.47	-24.53	74.00	300	329	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 46 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

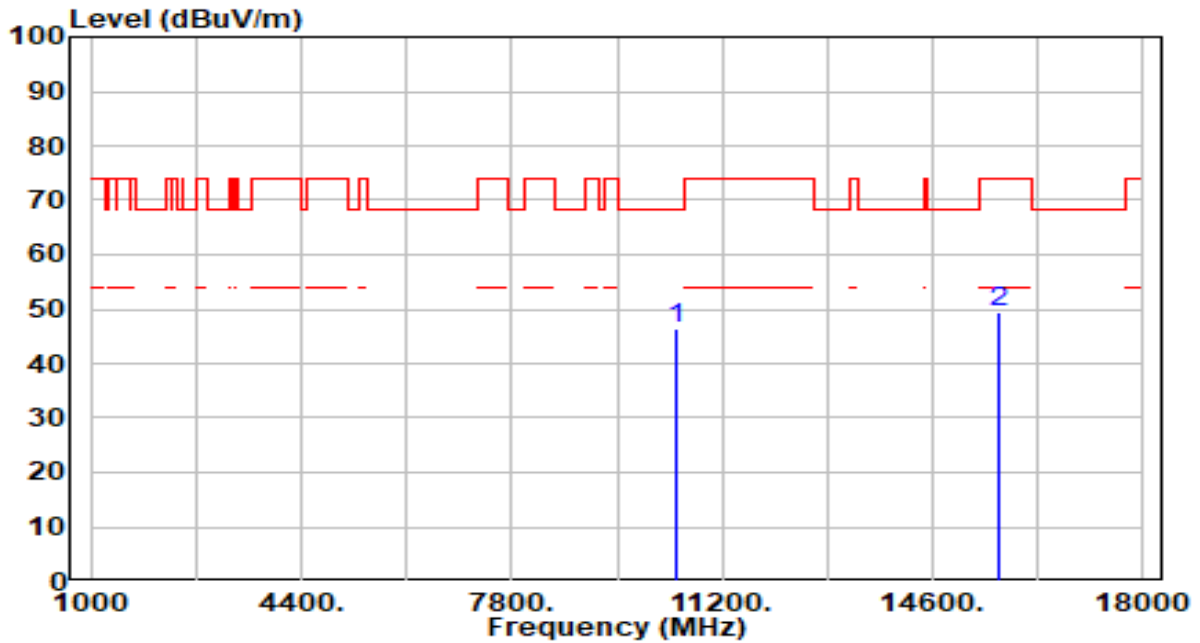


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	41.65	4.74	46.38	-21.82	68.20	300	318	Peak
2	15690.000	43.16	6.33	49.49	-24.51	74.00	300	247	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 46 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

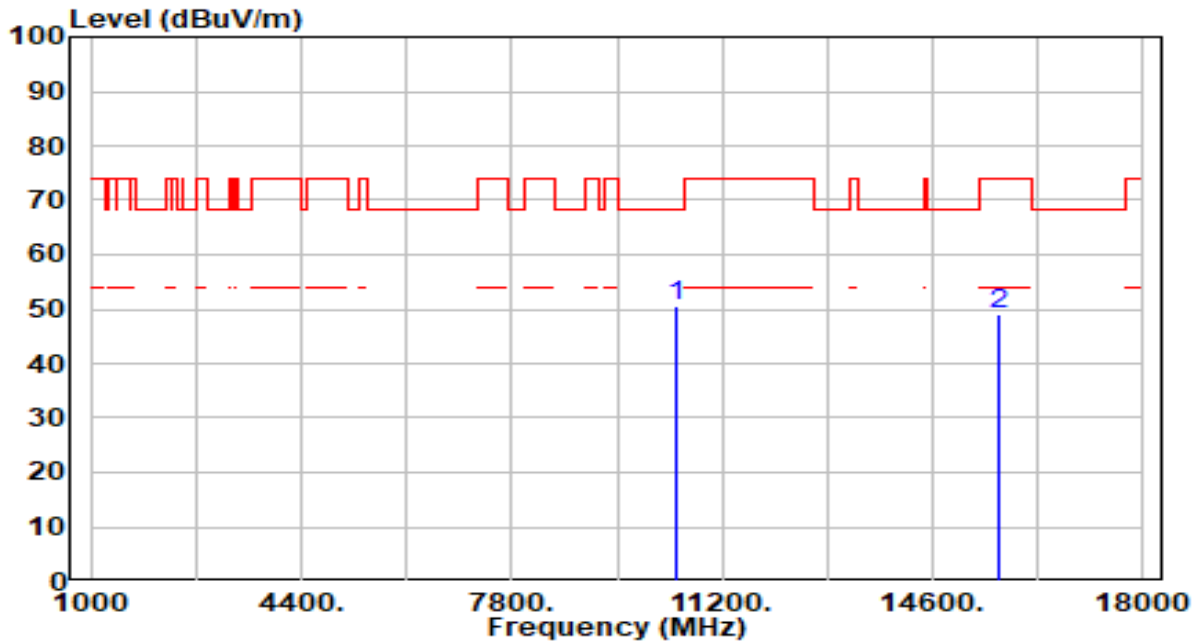


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	45.68	4.74	50.41	-17.79	68.20	300	190	Peak
2	15690.000	42.77	6.33	49.10	-24.90	74.00	300	238	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 54 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

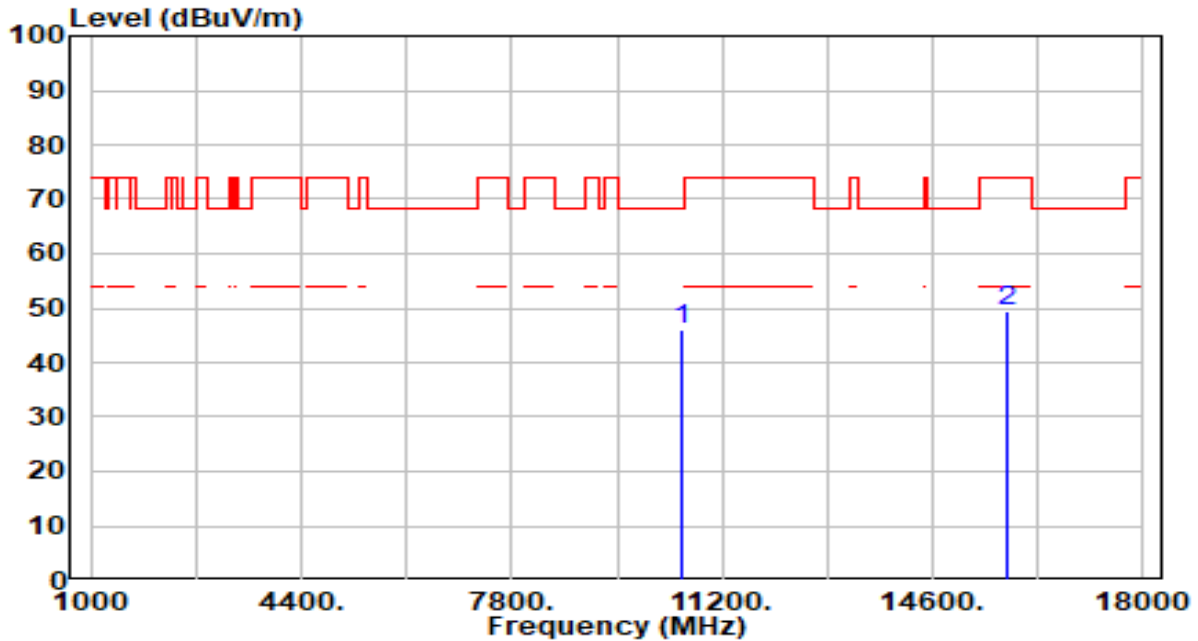


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.39	4.66	46.05	-22.15	68.20	300	276	Peak
2		43.04	6.55	49.59	-24.41	74.00	300	355	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 54 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

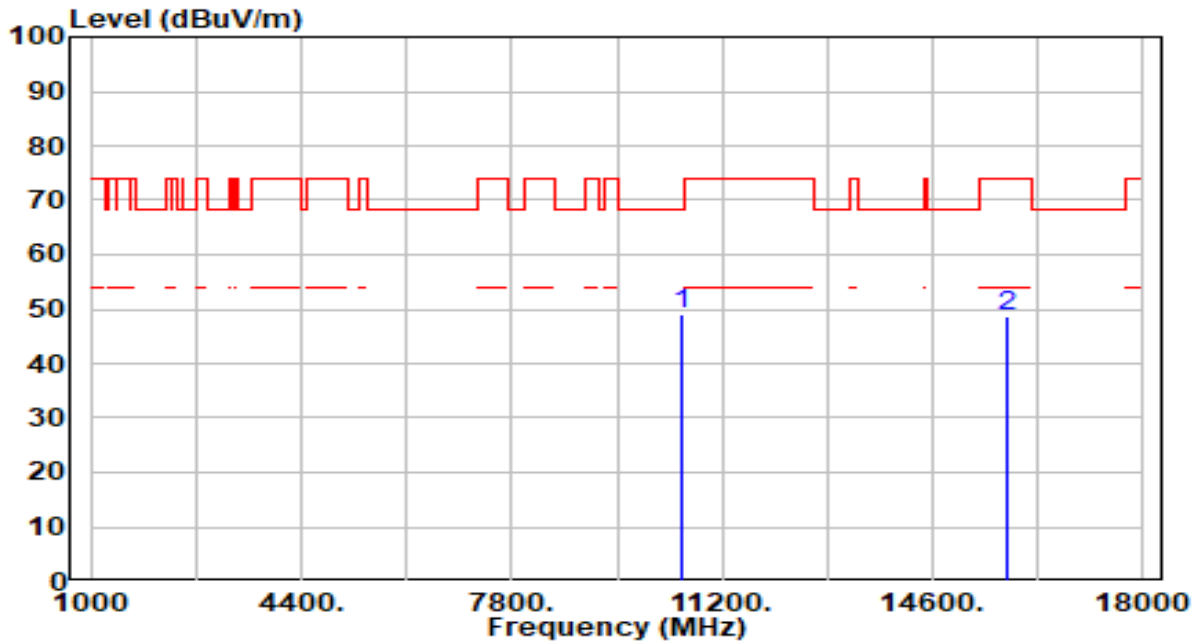


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	44.46	4.66	49.12	-19.08	68.20	300	179	Peak
2	15810.000	42.29	6.55	48.84	-25.16	74.00	300	247	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

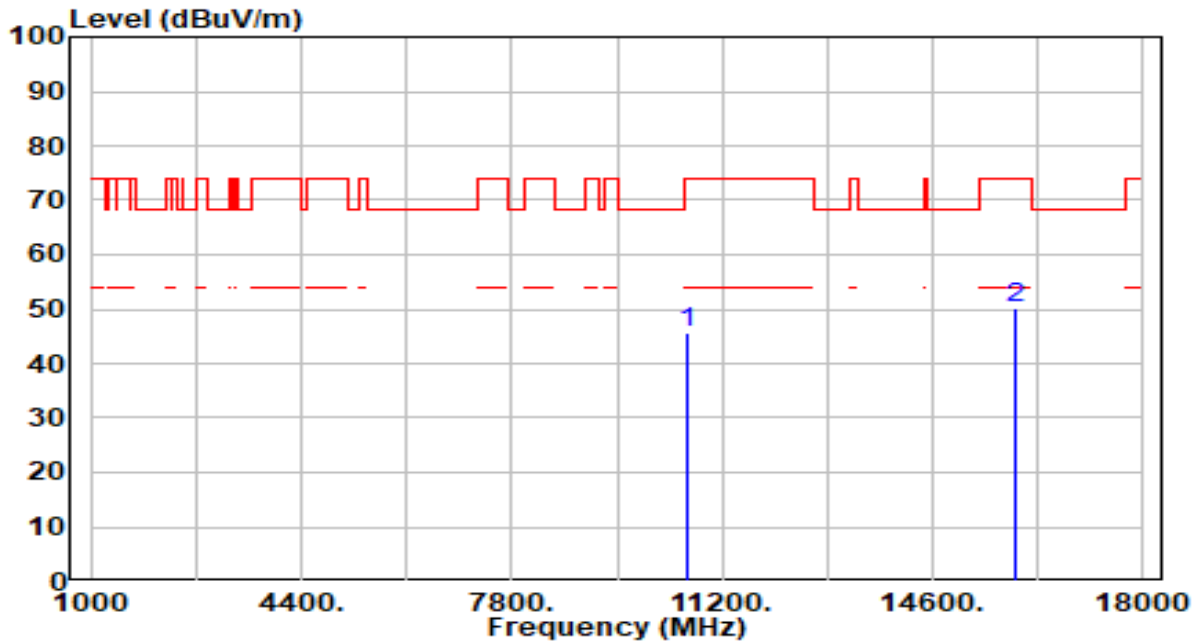


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.19	4.62	45.81	-28.19	74.00	300	0	Peak
2	* 15930.000	43.63	6.55	50.18	-23.82	74.00	300	90	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

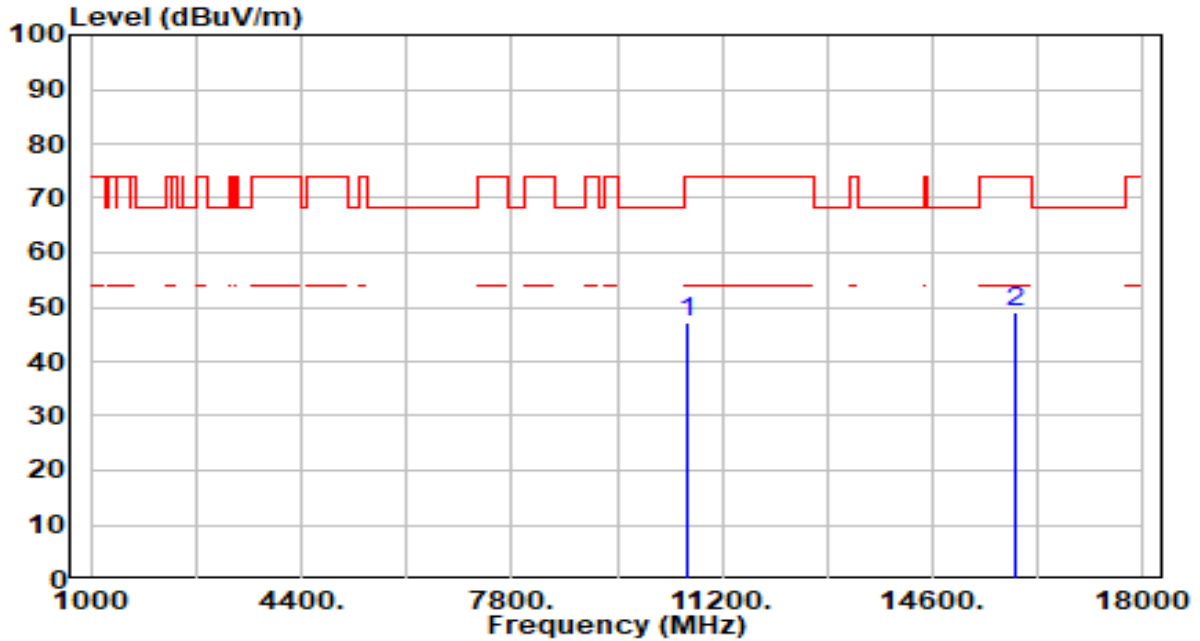


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.51	4.62	47.13	-26.87	74.00	300	360	Peak
2	* 15930.000	42.36	6.55	48.91	-25.09	74.00	300	119	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

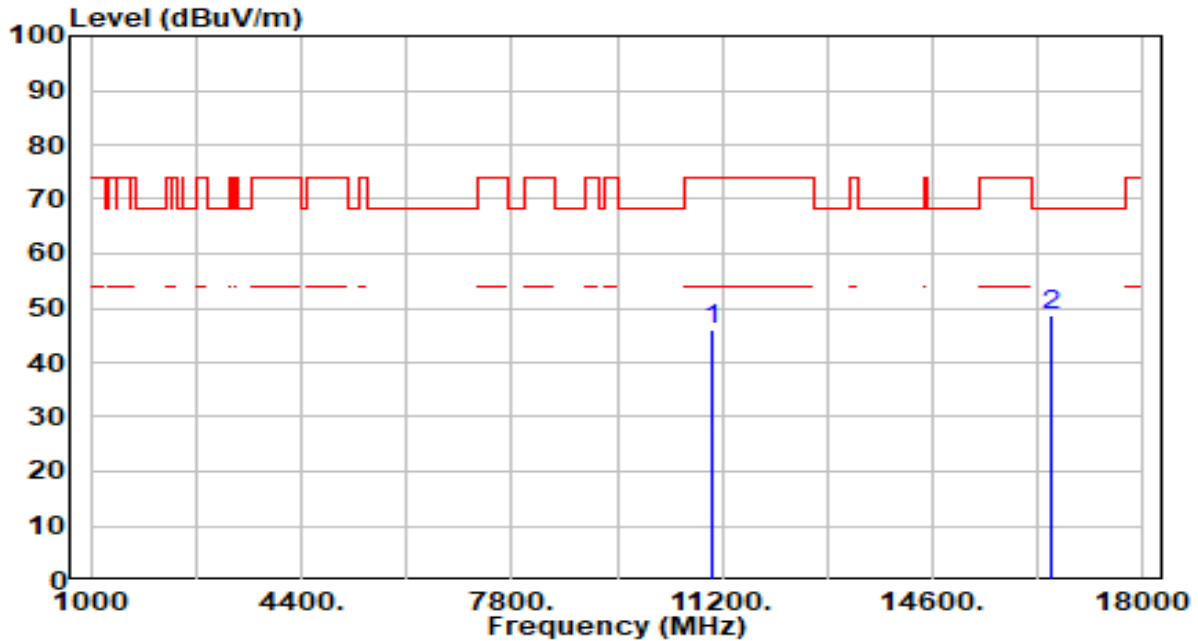


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.42	4.57	45.99	-28.01	74.00	300	198	Peak
2	* 16530.000	42.44	6.10	48.54	-19.66	68.20	300	357	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

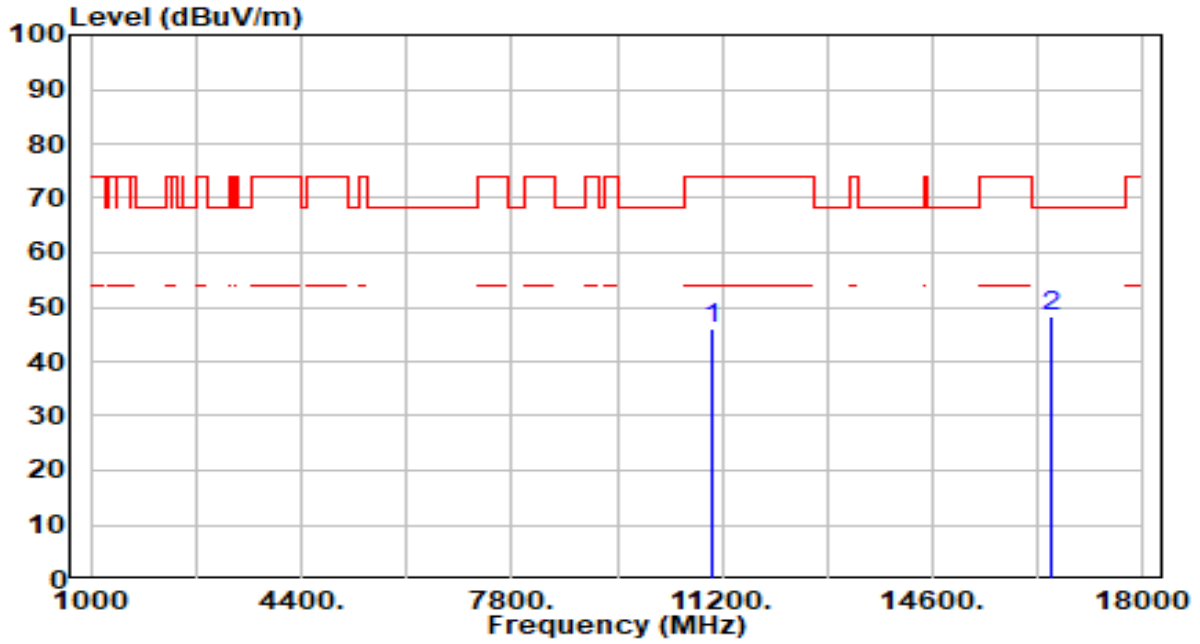


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.50	4.57	46.08	-27.92	74.00	300	85	Peak
2	* 16530.000	42.23	6.10	48.33	-19.87	68.20	300	93	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 110 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

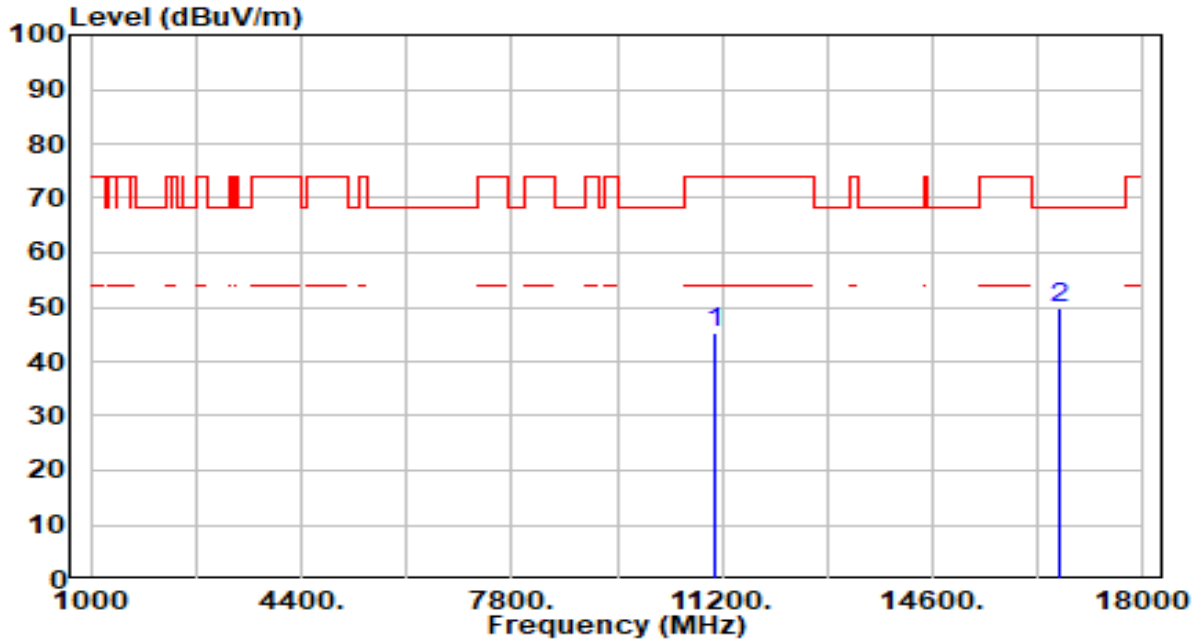


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	40.58	4.78	45.36	-28.64	74.00	300	360	Peak
2	* 16650.000	43.74	6.14	49.88	-18.32	68.20	300	266	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 110 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

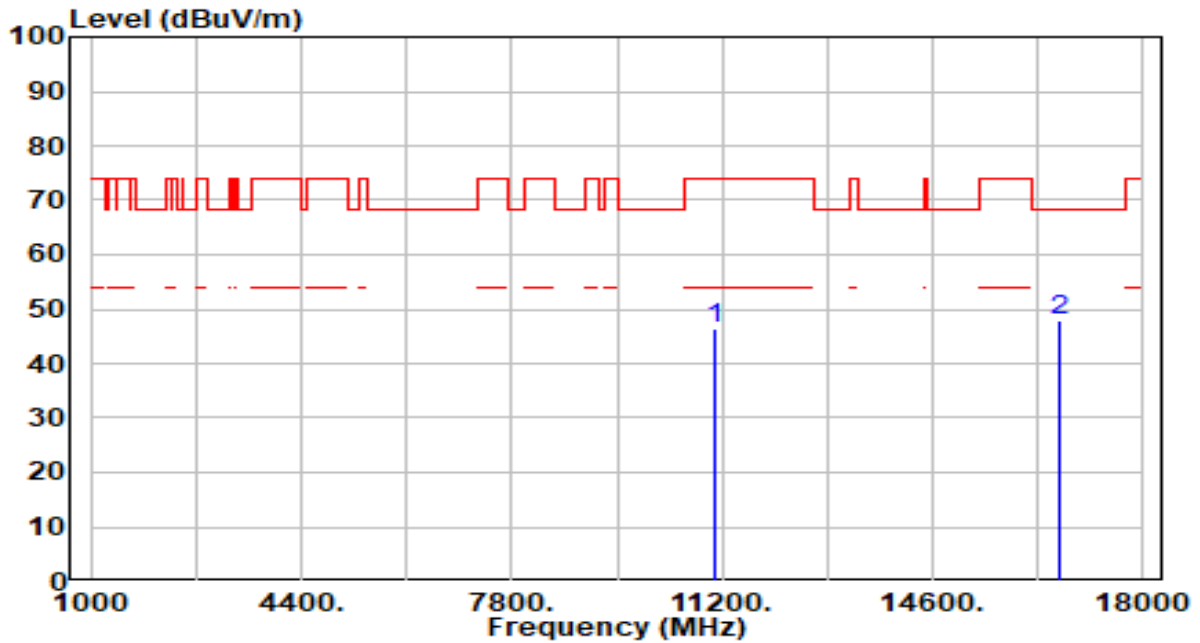


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.77	4.78	46.55	-27.45	74.00	300	137	Peak
2	* 16650.000	41.94	6.14	48.07	-20.13	68.20	300	21	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

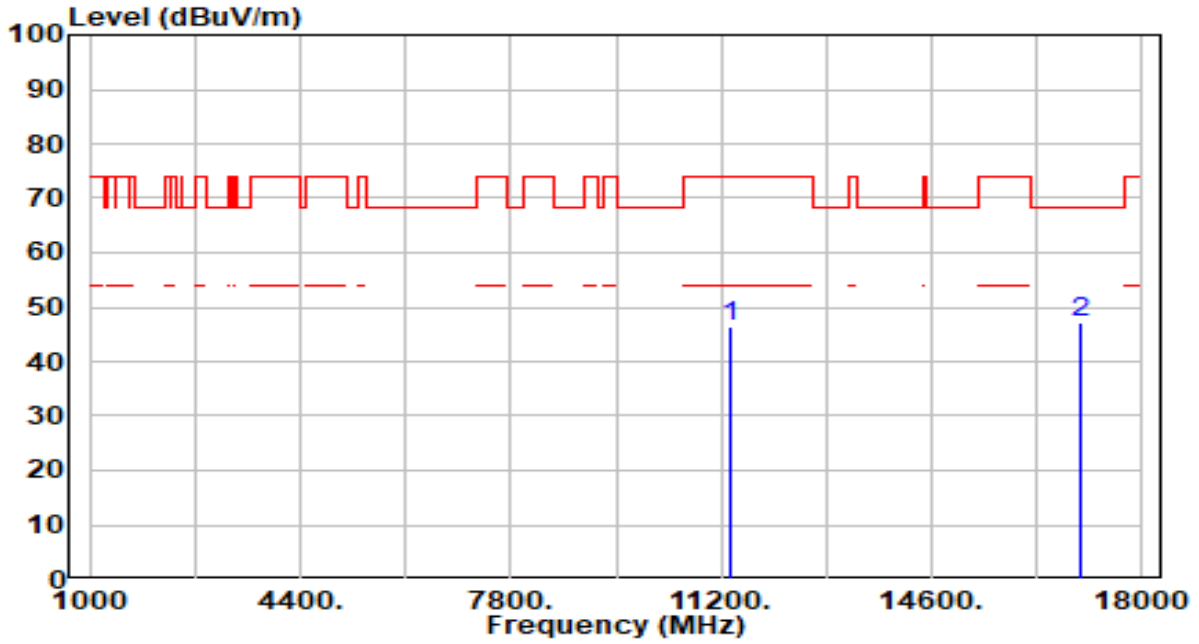


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.28	5.20	46.48	-27.52	74.00	300	0	Peak
2	* 17010.000	41.20	6.12	47.32	-20.88	68.20	300	186	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

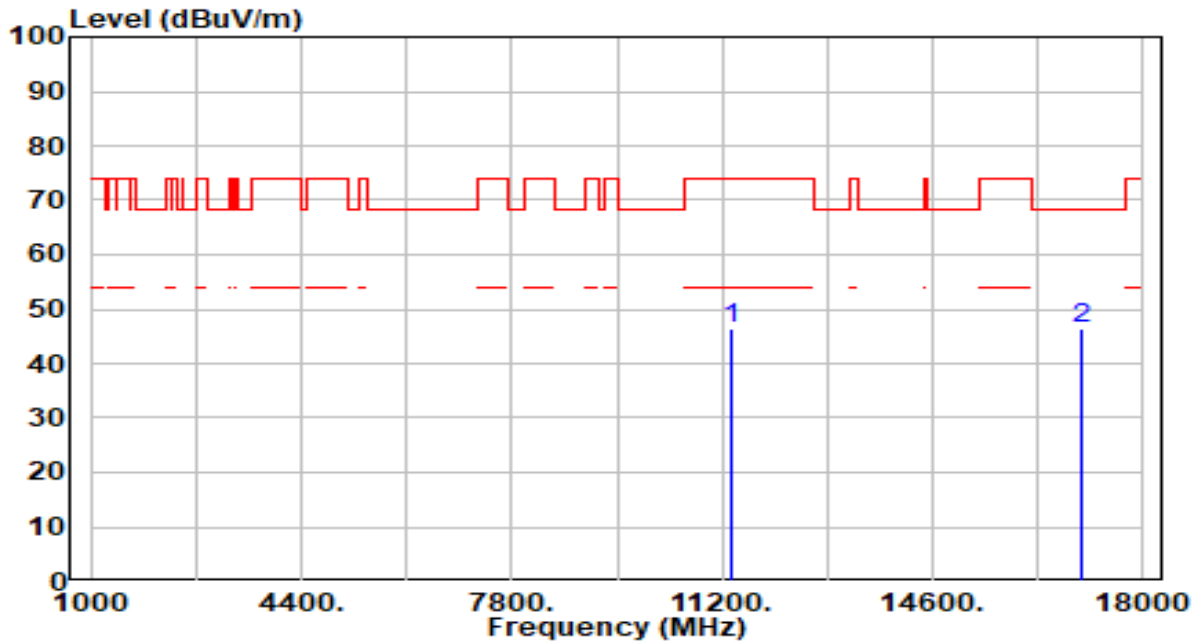


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.38	5.20	46.58	-27.42	74.00	300	106	Peak
2	* 17010.000	40.11	6.12	46.24	-21.96	68.20	300	111	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 142 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

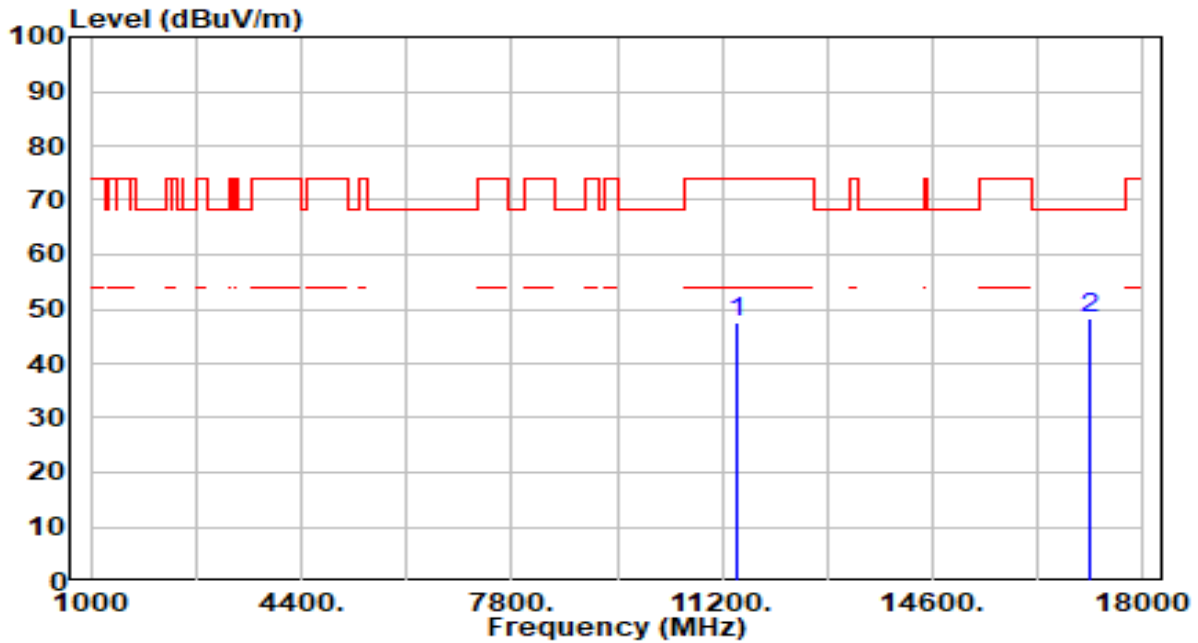


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.30	5.28	47.58	-26.42	74.00	300	22	Peak
2	* 17130.000	42.54	5.92	48.46	-19.74	68.20	300	8	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 142 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

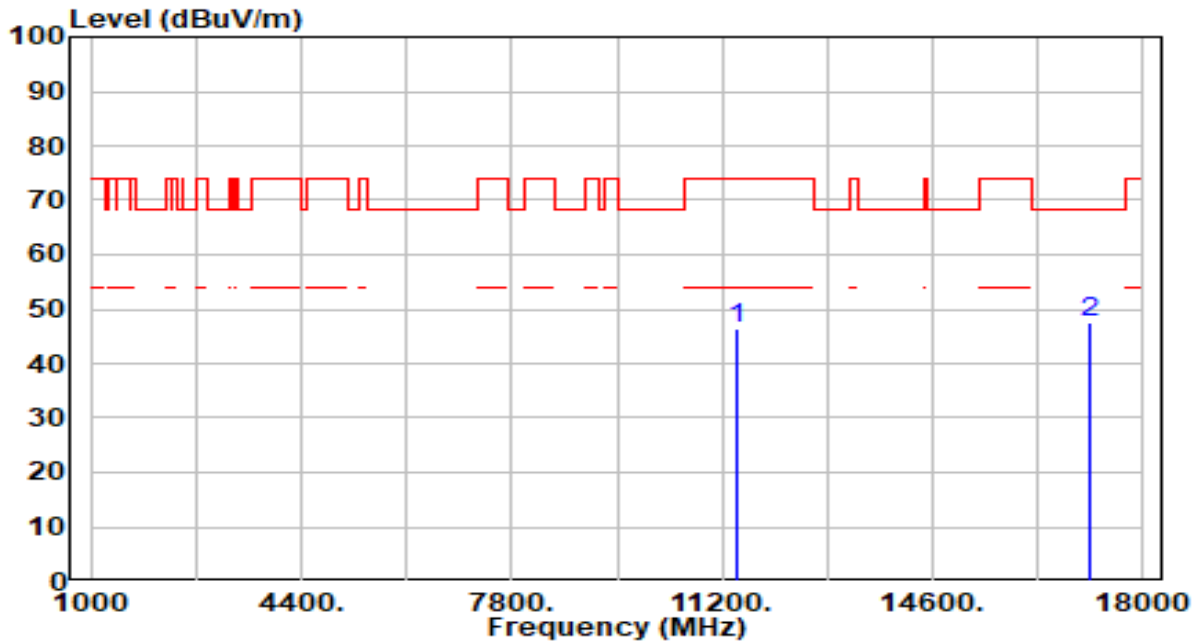


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.27	5.28	46.55	-27.45	74.00	300	140	Peak
2	* 17130.000	41.50	5.92	47.42	-20.78	68.20	300	2	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 151 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

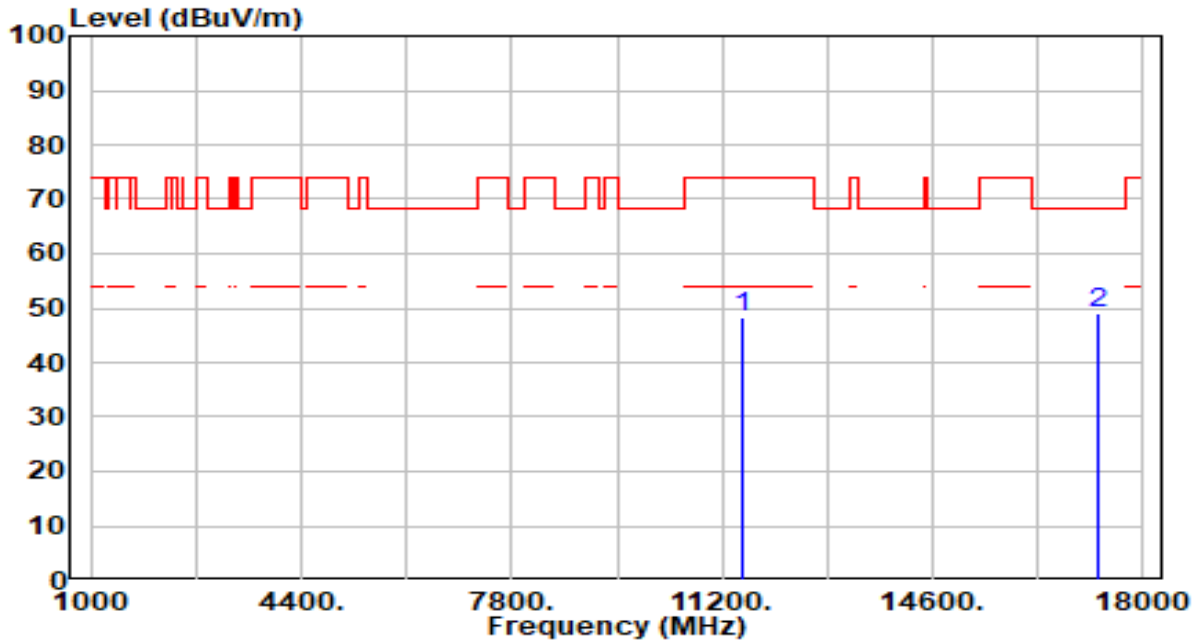


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.06	5.33	48.39	-25.61	74.00	300	152	Peak
2	* 17265.000	43.51	5.63	49.14	-19.06	68.20	300	99	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 151 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

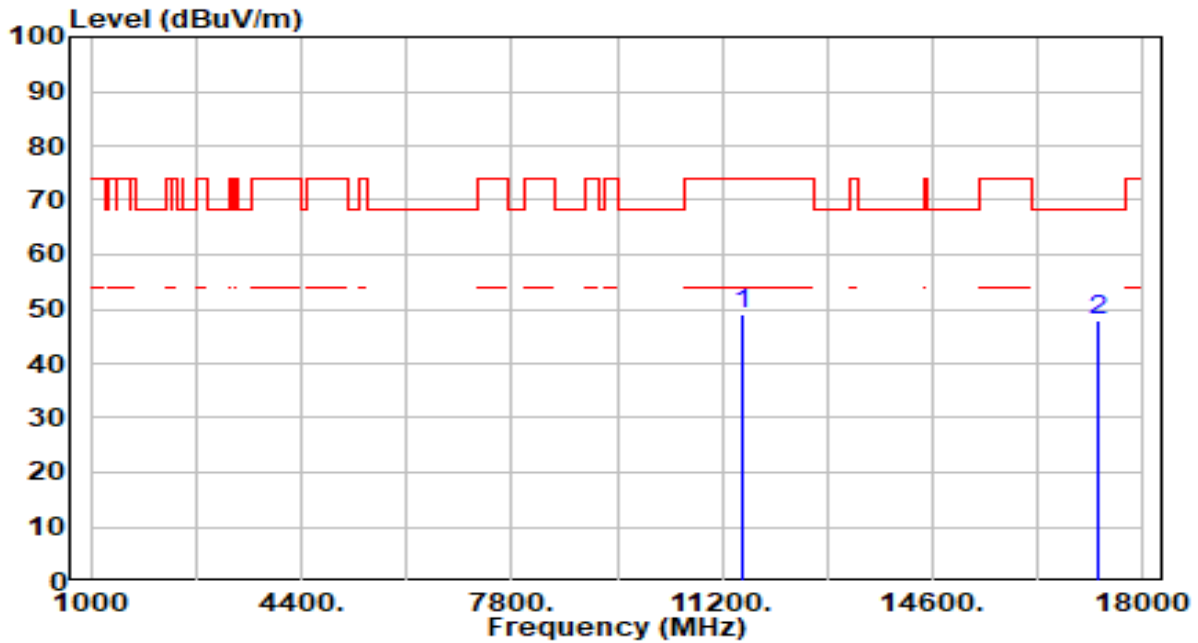


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.82	5.33	49.15	-24.85	74.00	300	38	Peak
2	* 17265.000	42.33	5.63	47.96	-20.24	68.20	300	128	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 159 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

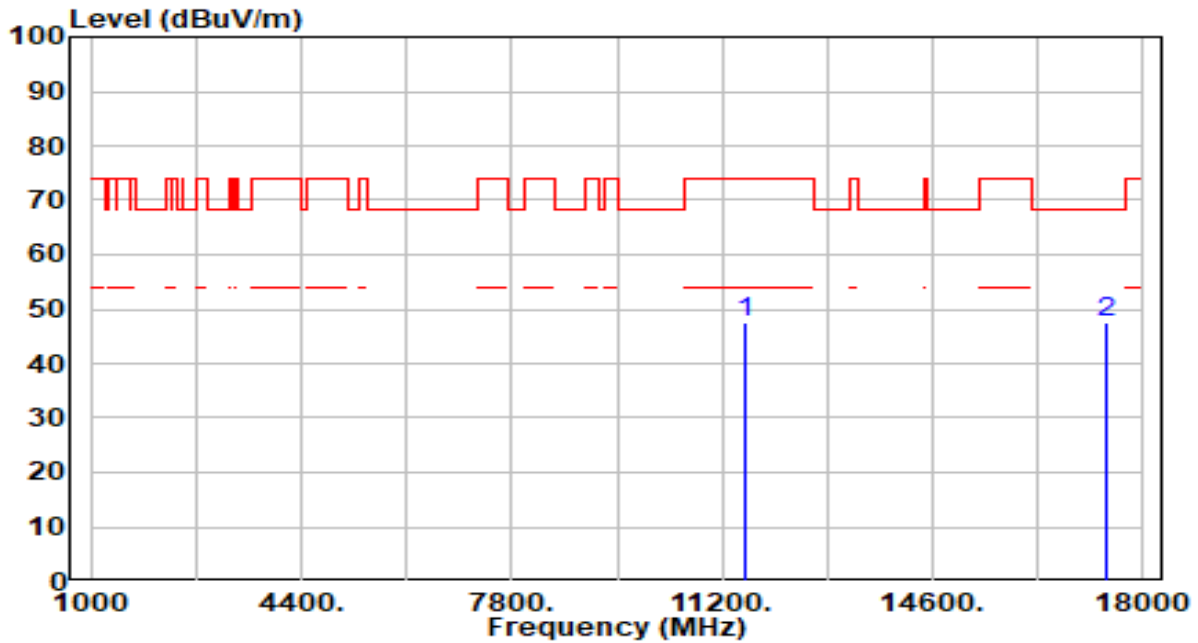


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.17	5.39	47.57	-26.43	74.00	300	118	Peak
2	* 17385.000	42.11	5.31	47.42	-20.78	68.20	300	0	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 159 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

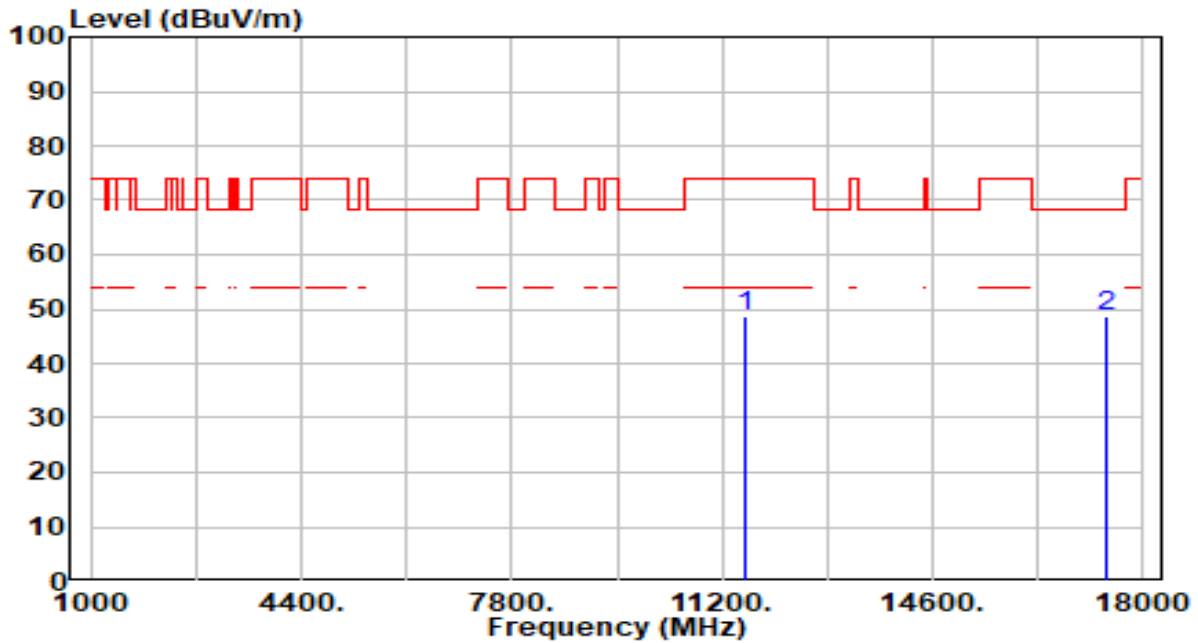


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	43.34	5.39	48.73	-25.27	74.00	300	37	Peak
2	* 17385.000	43.55	5.31	48.86	-19.34	68.20	300	9	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

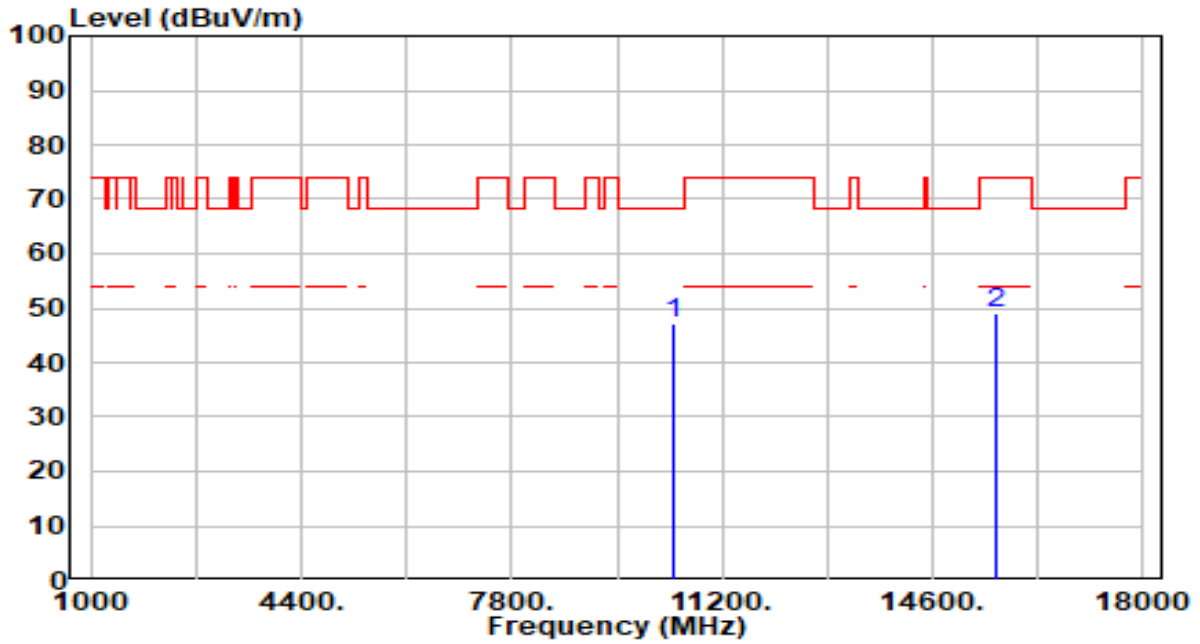


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	42.20	4.79	46.99	-21.21	68.20	300	71	Peak
2	15630.000	43.01	6.21	49.22	-24.78	74.00	300	68	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

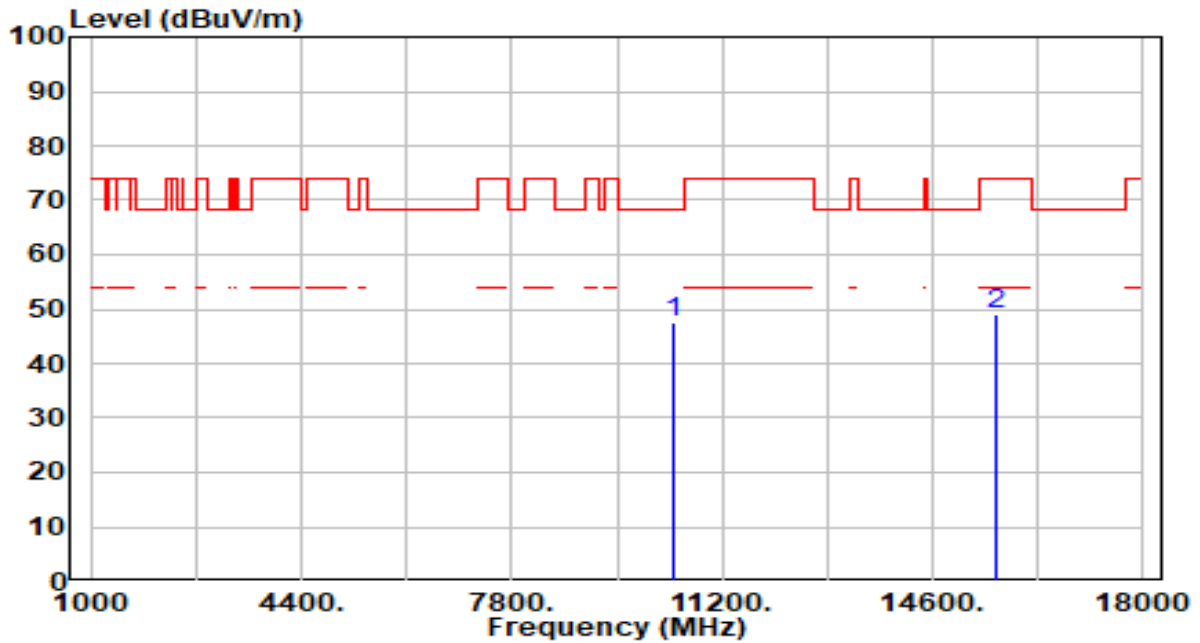


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	42.91	4.79	47.70	-20.50	68.20	300	0	Peak
2	15630.000	42.98	6.21	49.19	-24.81	74.00	300	148	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

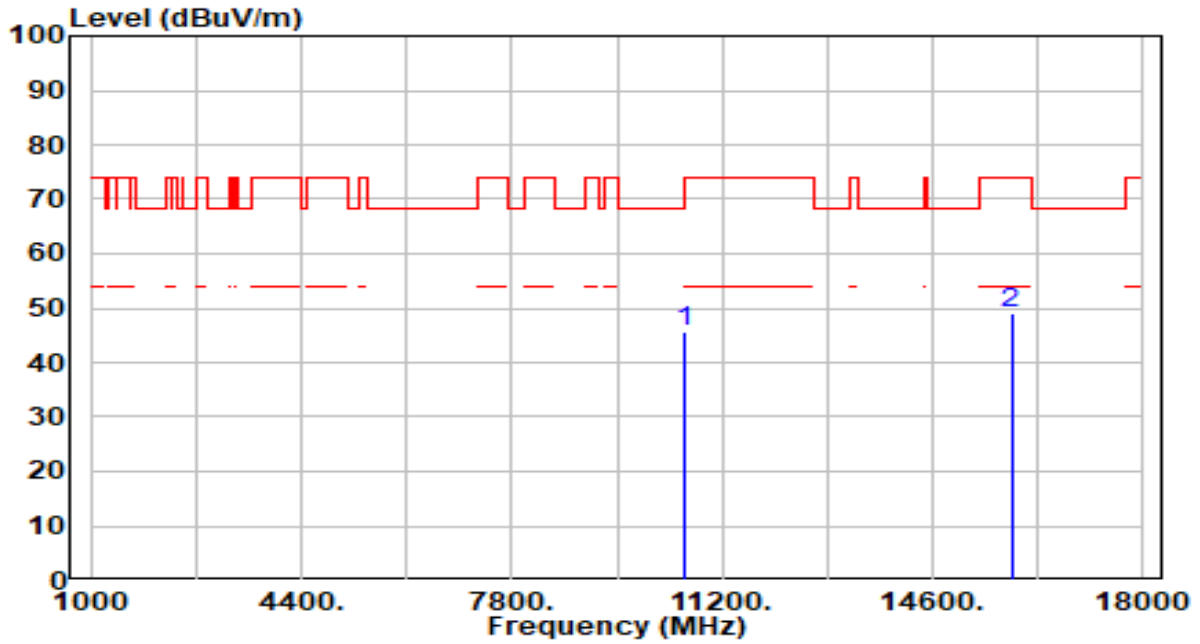


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	40.89	4.63	45.52	-22.68	68.20	300	360	Peak
2		42.34	6.55	48.89	-25.11	74.00	300	187	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

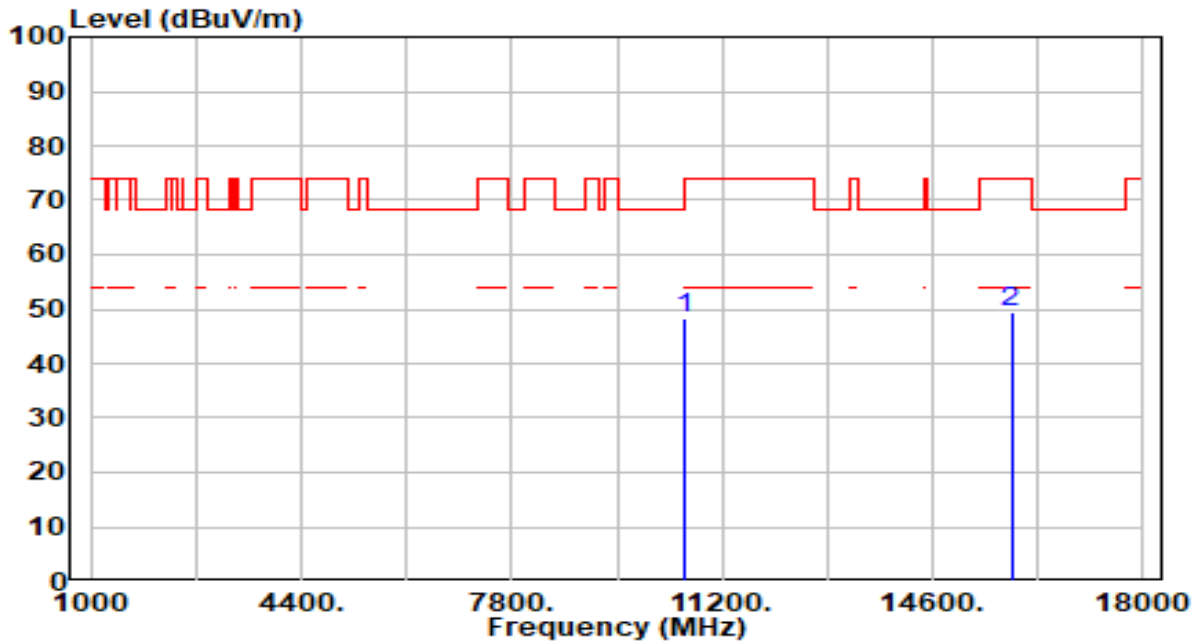


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	43.64	4.63	48.26	-19.94	68.20	0	0	Peak
2	15870.000	42.85	6.55	49.40	-24.60	74.00	300	136	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

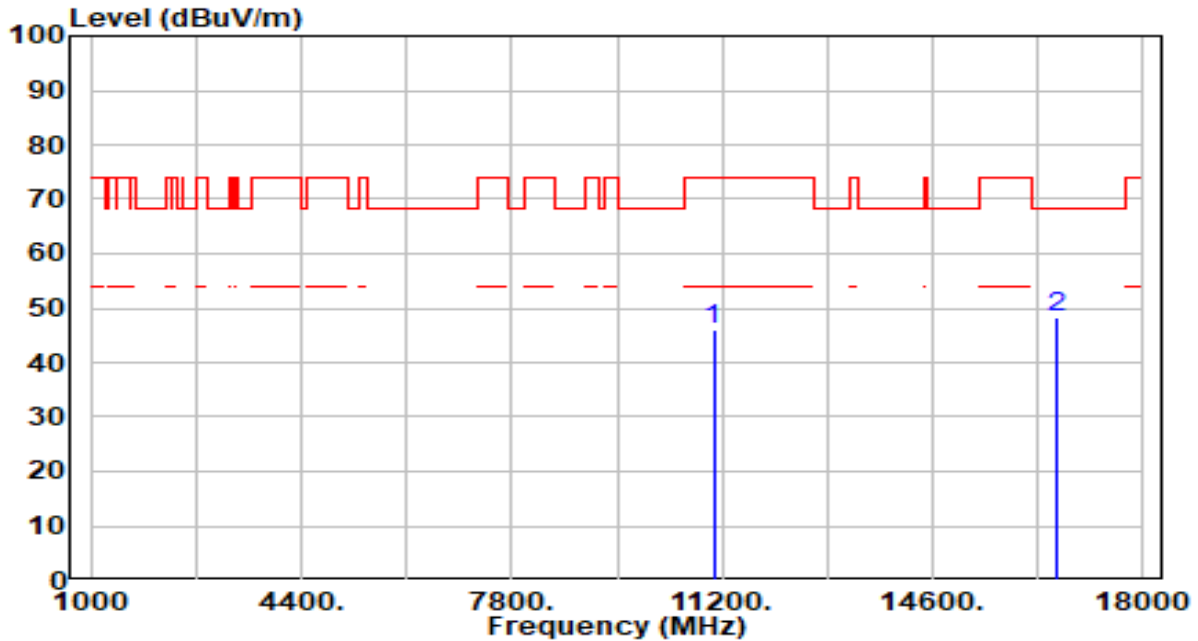


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.49	4.68	46.16	-27.84	74.00	300	235	Peak
2	* 16590.000	42.03	6.11	48.13	-20.07	68.20	300	87	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

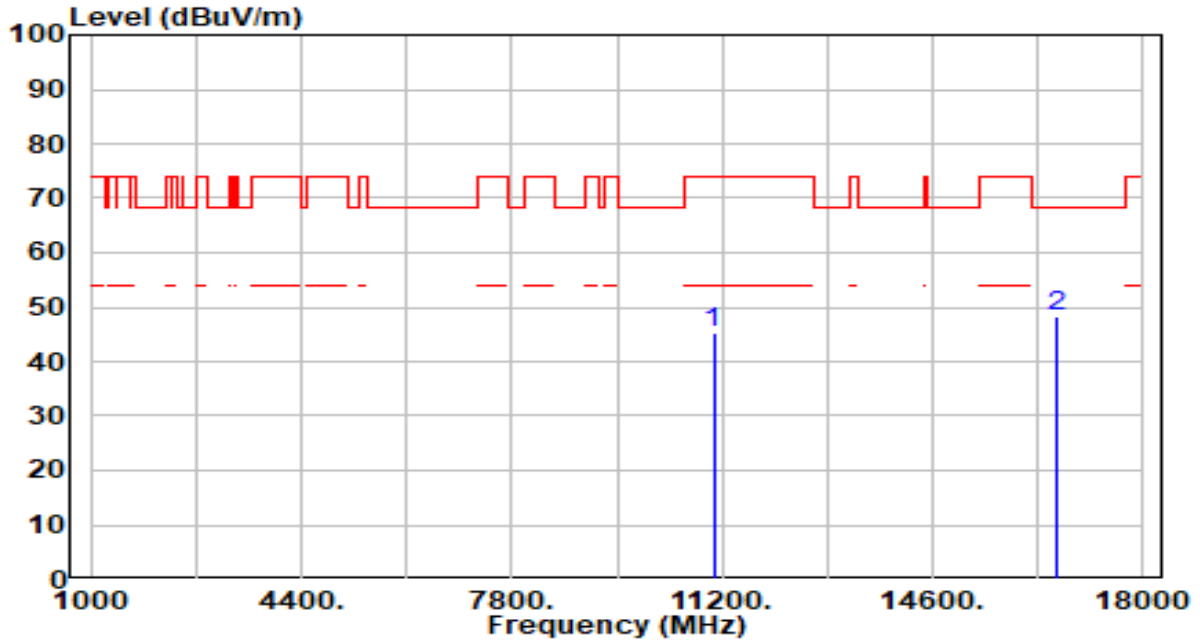

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.74	4.68	45.42	-28.58	74.00	300	320	Peak
2	* 16590.000	42.17	6.11	48.28	-19.92	68.20	300	54	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 122 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz




No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.61	5.06	46.67	-27.33	74.00	300	360	Peak
2	* 16830.000	43.49	6.21	49.70	-18.50	68.20	300	51	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 122 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

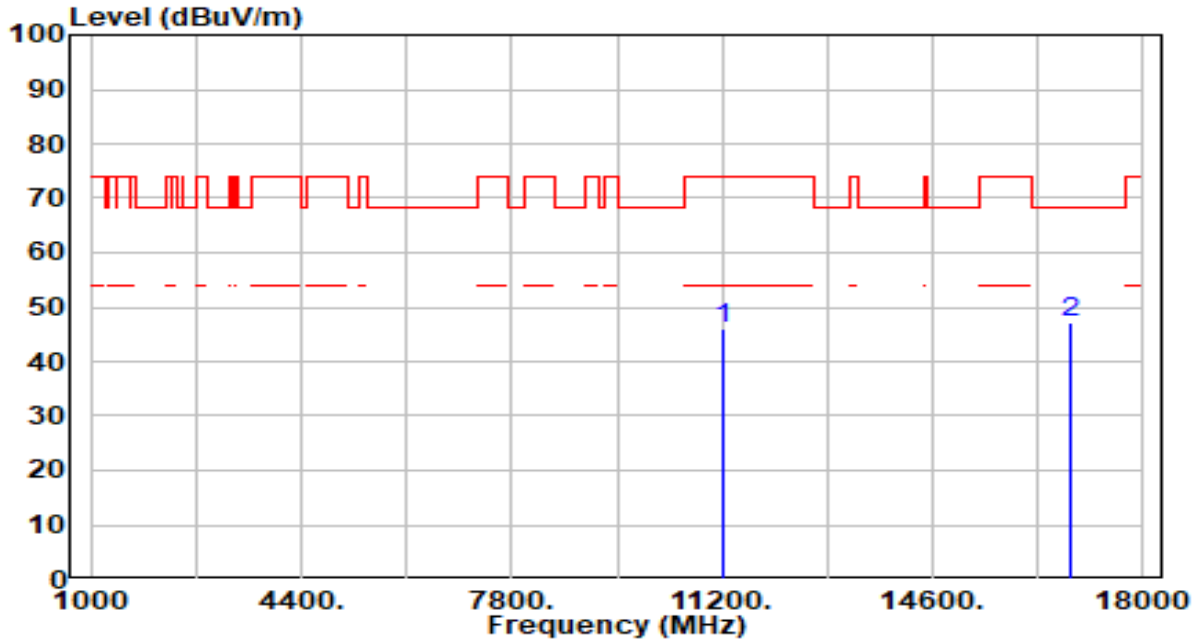


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	40.98	5.06	46.04	-27.96	74.00	300	264	Peak
2	* 16830.000	41.01	6.21	47.22	-20.98	68.20	300	360	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 138 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

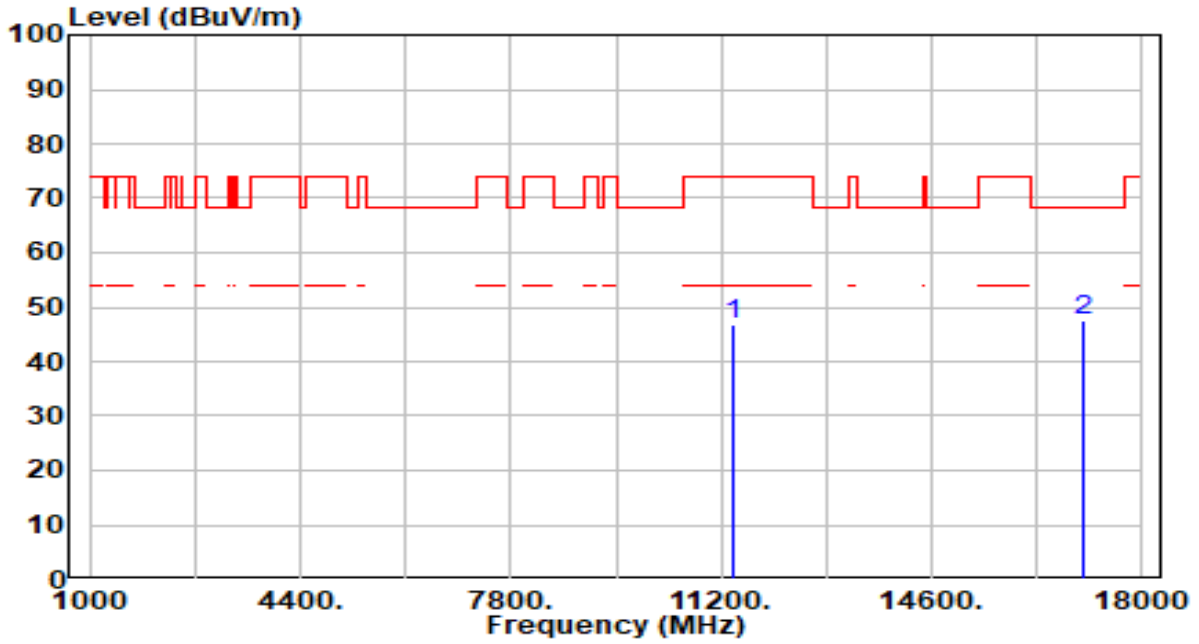


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.69	5.24	46.93	-27.07	74.00	300	0	Peak
2	* 17070.000	41.60	6.02	47.63	-20.57	68.20	300	188	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 138 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

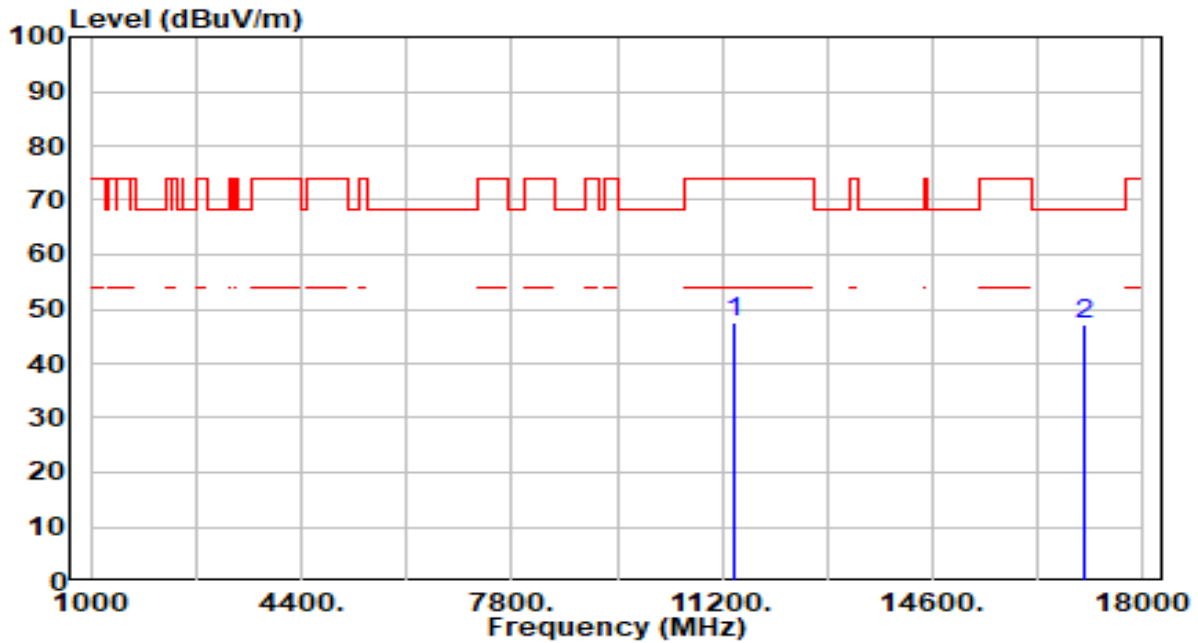

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.48	5.24	47.72	-26.28	74.00	300	0	Peak
2	* 17070.000	41.05	6.02	47.07	-21.13	68.20	300	320	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band4_TX_CH 155 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz




No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.20	5.36	47.57	-26.43	74.00	300	96	Peak
2	* 17325.000	42.04	5.47	47.51	-20.69	68.20	300	79	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band4_TX_CH 155 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

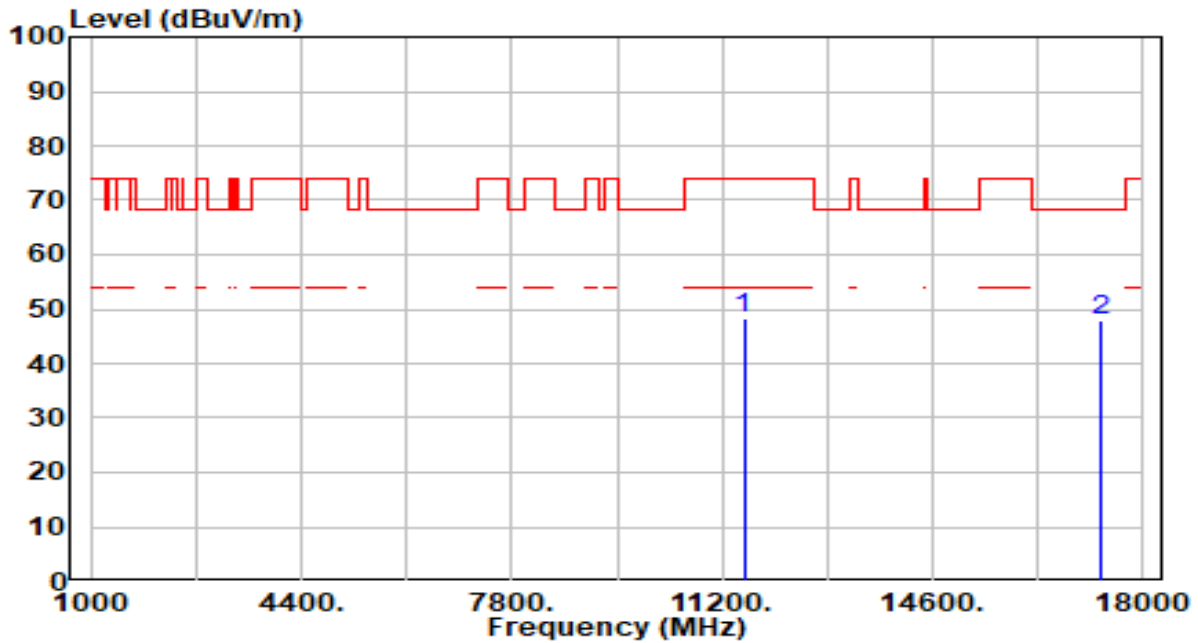


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.85	5.36	48.22	-25.78	74.00	300	238	Peak
2	* 17325.000	42.55	5.47	48.02	-20.18	68.20	300	204	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

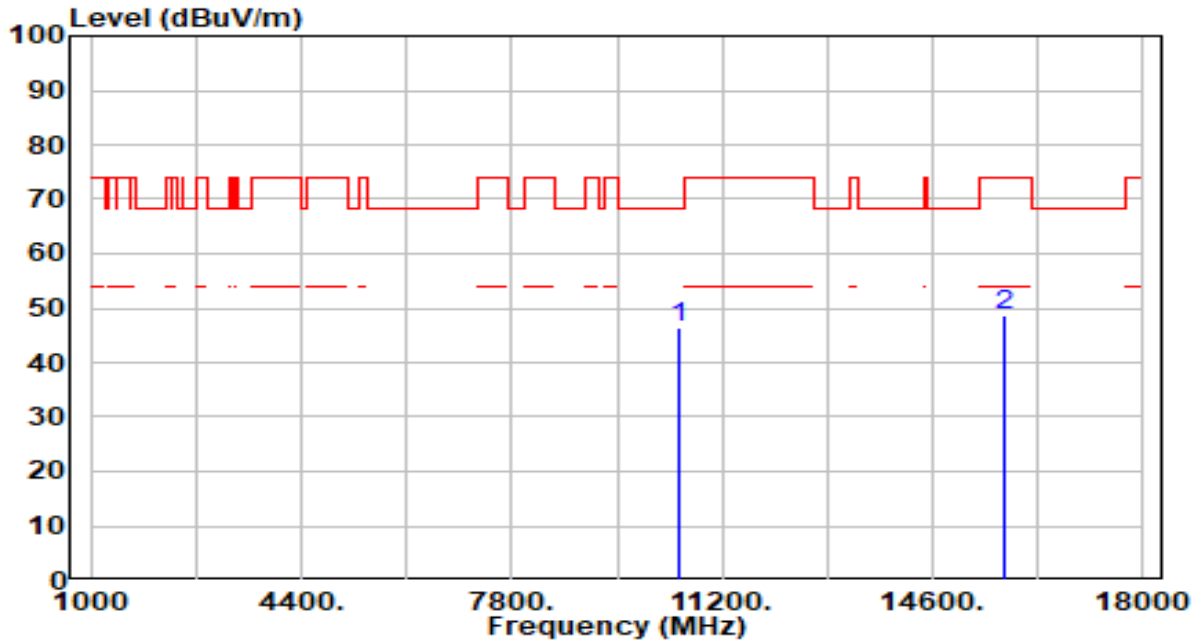


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	41.83	4.68	46.51	-21.69	68.20	300	144	Peak
2	15750.000	42.15	6.45	48.60	-25.40	74.00	300	332	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

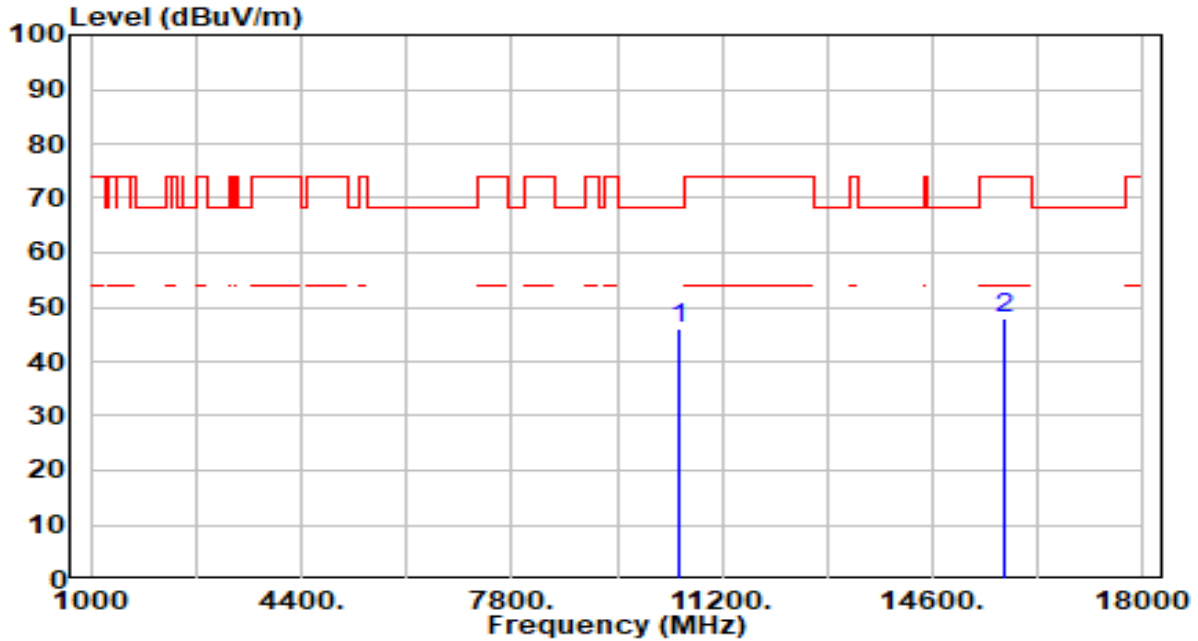


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	41.46	4.68	46.15	-22.05	68.20	300	19	Peak
2	15750.000	41.46	6.45	47.91	-26.09	74.00	300	50	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

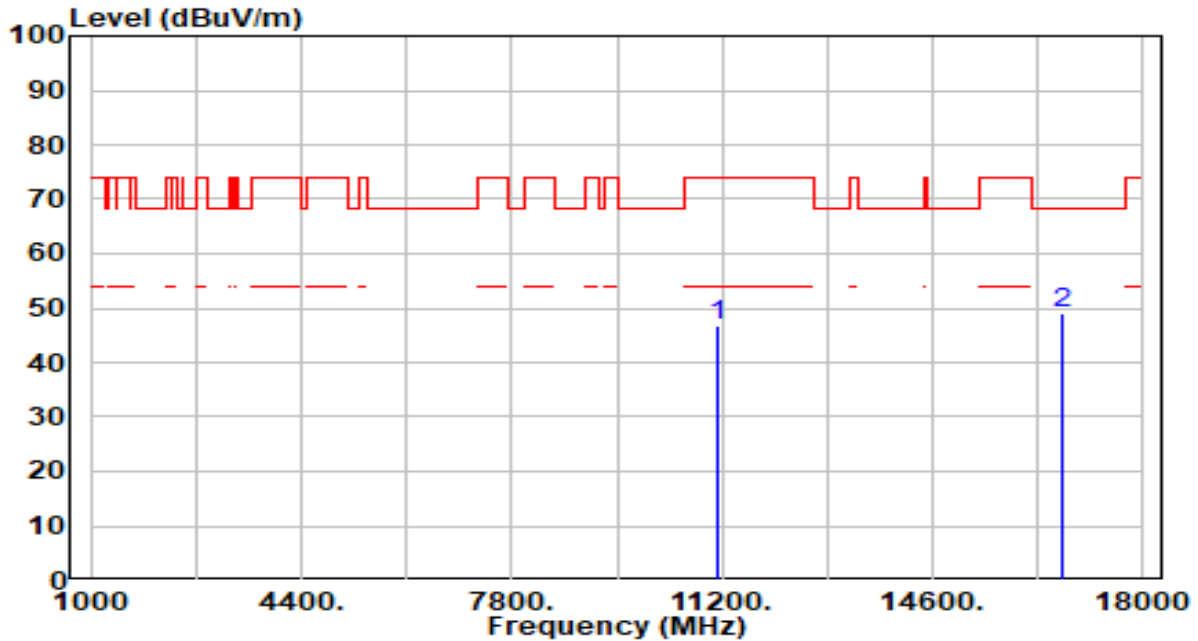


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.96	4.89	46.85	-27.15	74.00	300	269	Peak
2	* 16710.000	42.85	6.17	49.02	-19.18	68.20	300	346	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

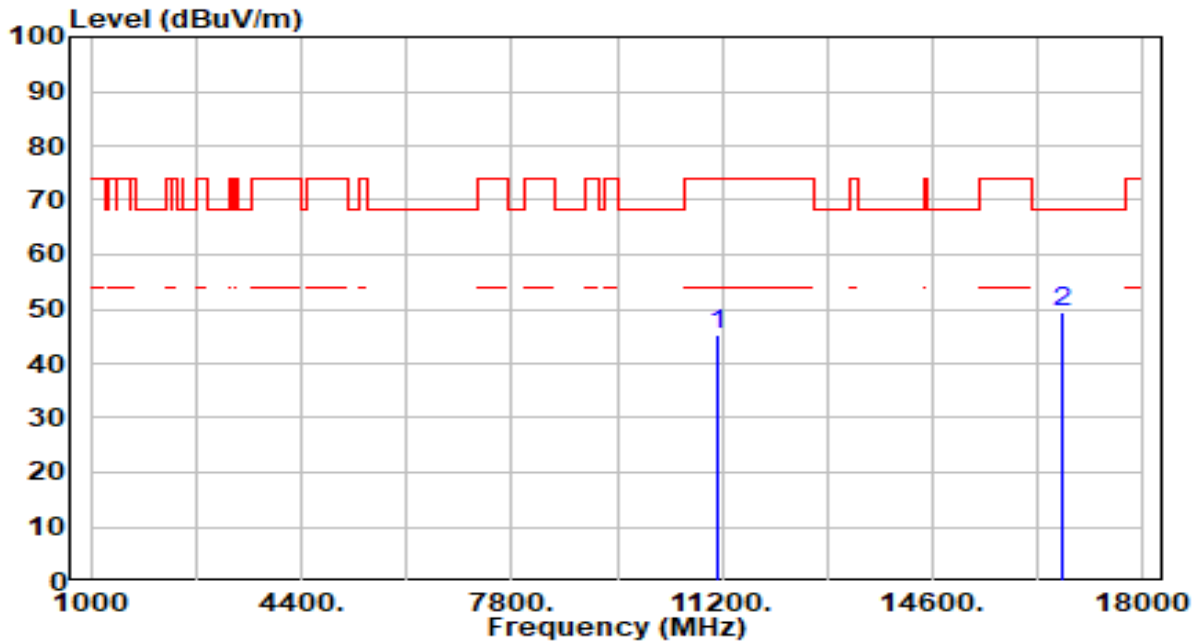


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.57	4.89	45.46	-28.54	74.00	300	7	Peak
2	* 16710.000	43.31	6.17	49.48	-18.72	68.20	300	300	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

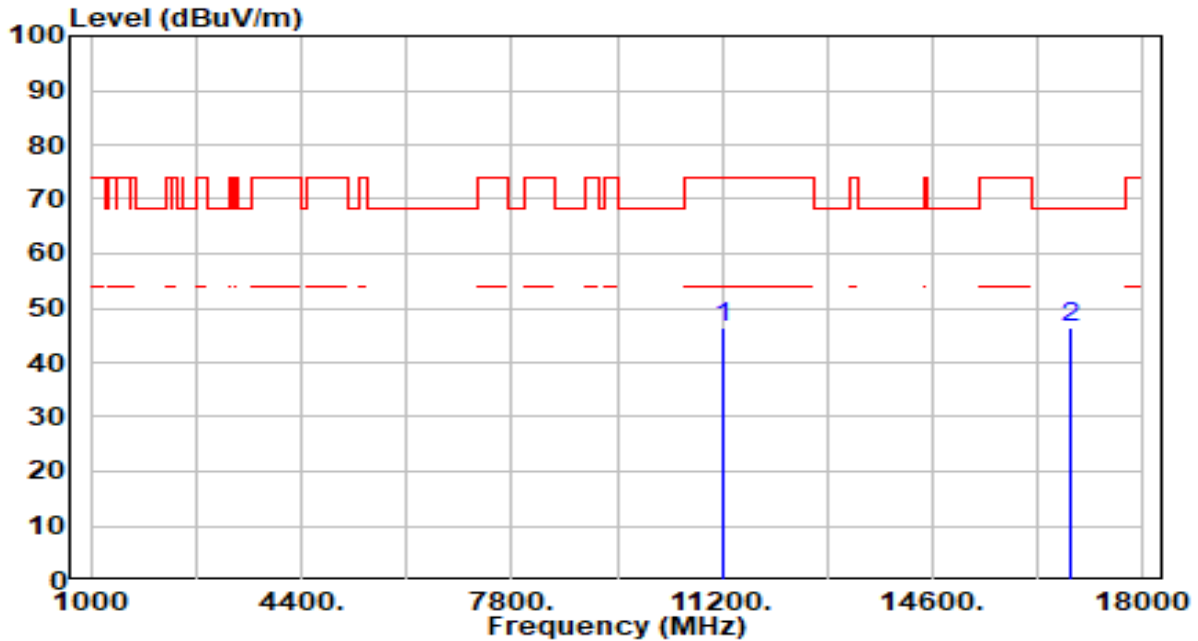


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.33	5.06	46.39	-27.61	74.00	300	224	Peak
2	* 16830.000	40.28	6.21	46.50	-21.70	68.20	300	153	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

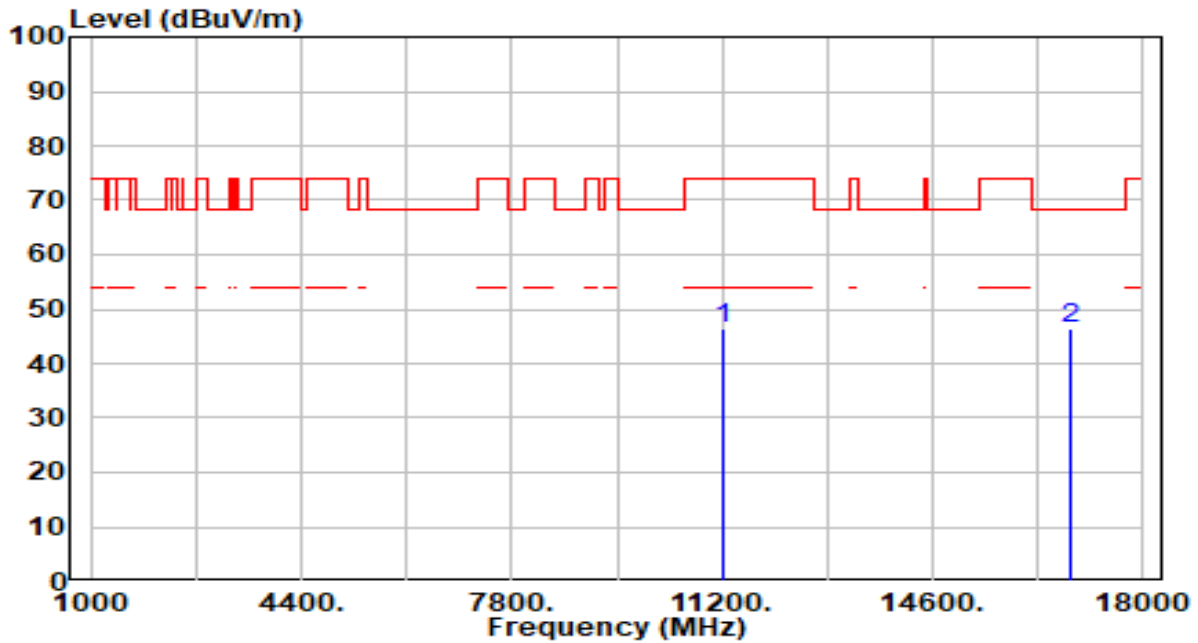


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.37	5.06	46.44	-27.56	74.00	300	84	Peak
2	* 16830.000	40.16	6.21	46.37	-21.83	68.20	300	298	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 40 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

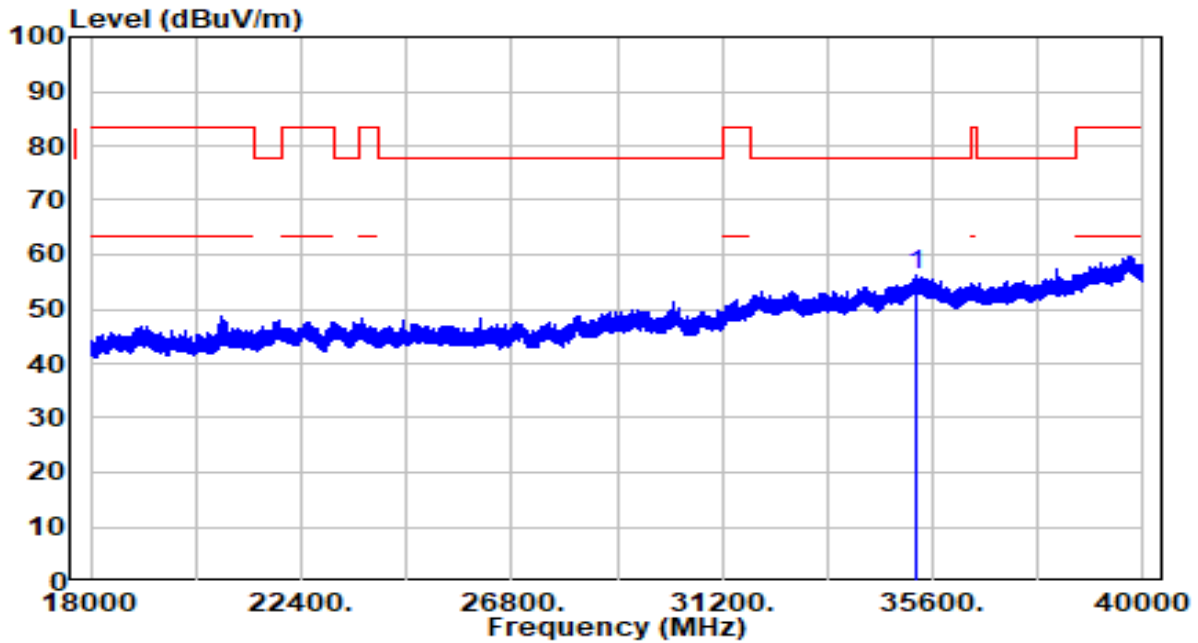


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	35281.690	33.03	23.17	56.19	-21.51	77.70	150	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 40 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

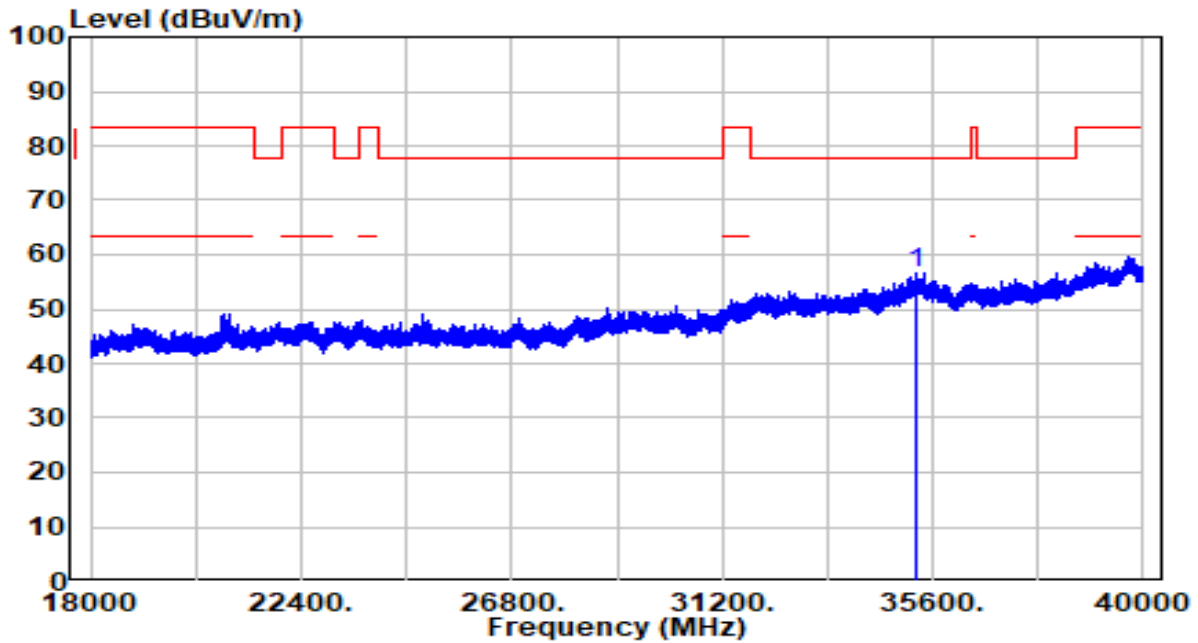

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	35274.130	33.62	23.16	56.79	-20.91	77.70	150	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9. Radiated Restricted Band Edge Measurement

### 7.9.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
<sup>1</sup> 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	( <sup>2</sup> )
13.36-13.41	--	--	--

#### **For 15.407(b) requirement:**

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**7.9.2. Test Procedure Used**

KDB 789033 D02v02r01- Section G

**7.9.3. Test Setting**

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

### **Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set  $VBW \leq RBW/100$  (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ .
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

#### **7.9.4. Test Setup**

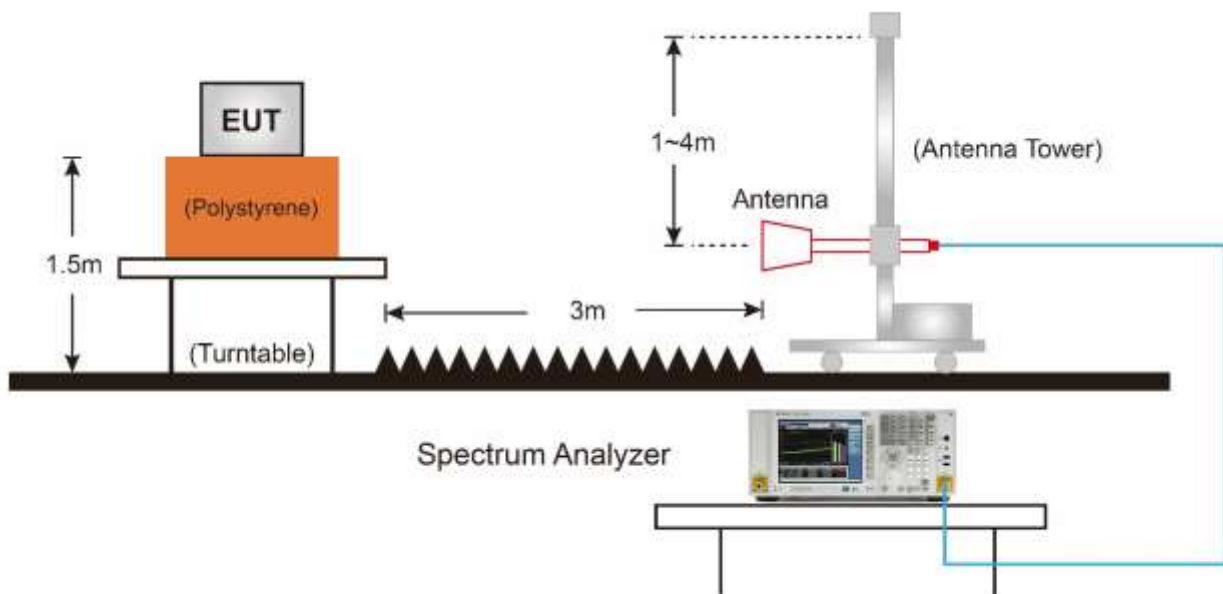

### 7.9.5. Test Result

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band1_TX_CH 36 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

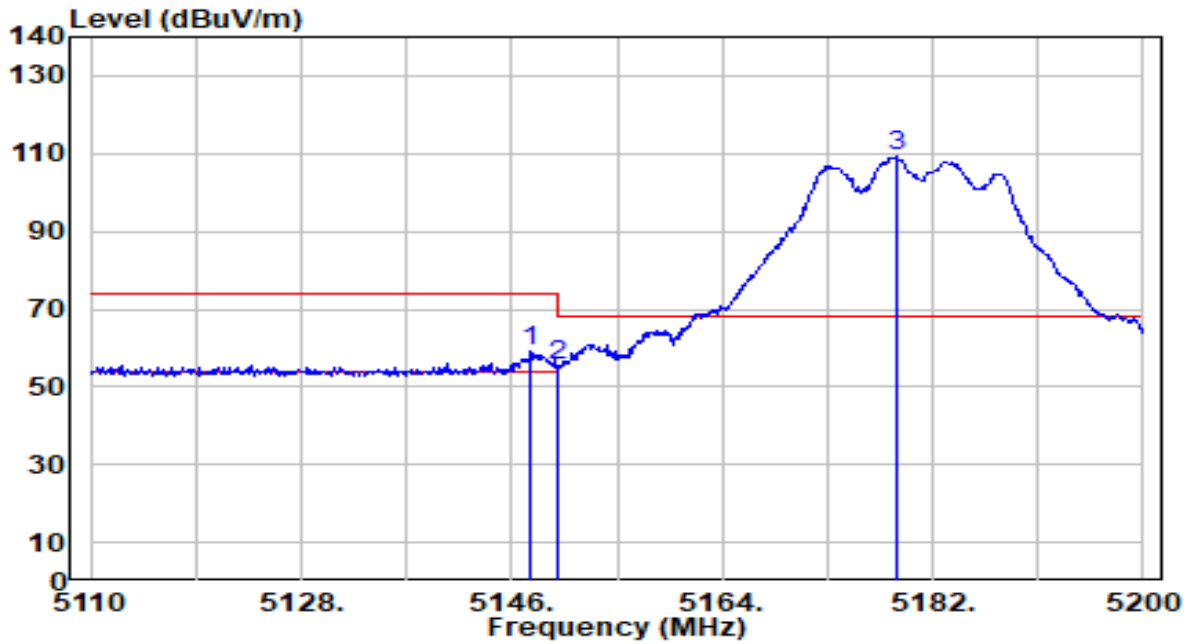


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.620	58.26	0.68	58.94	-15.06	74.00	306	205	Peak
2	5150.000	54.66	0.68	55.34	-18.66	74.00	306	205	Peak
3	5178.850	108.44	0.67	109.12	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band1_TX_CH 36 ANT 0+1_Vetical Ant	Test Voltage	AC 120V/60Hz

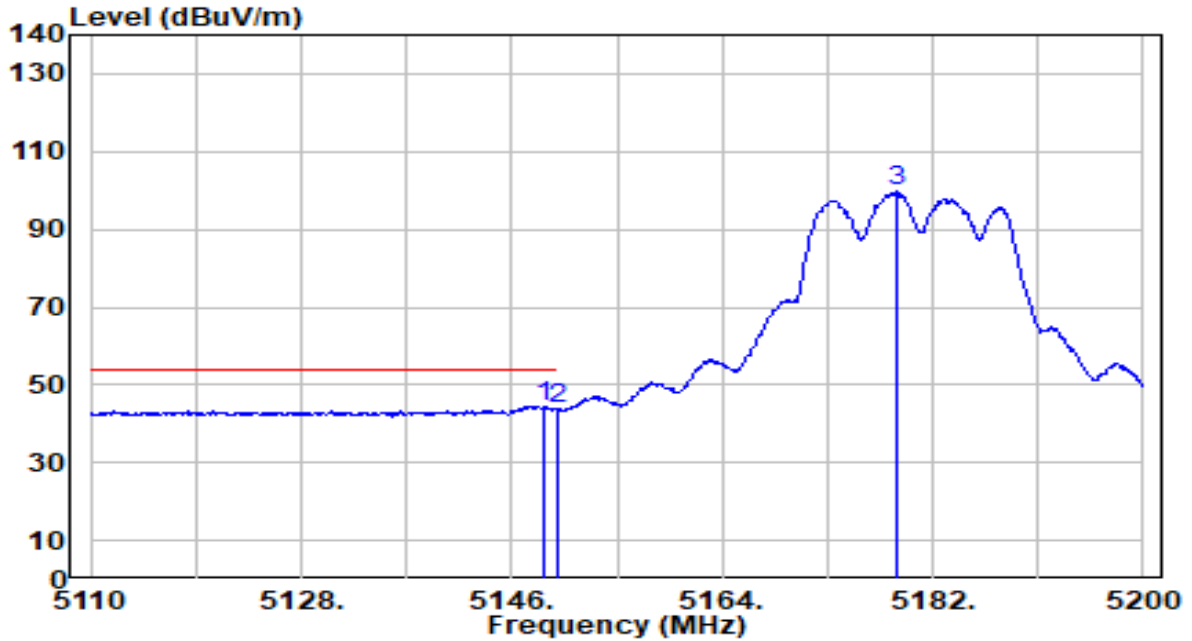


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.790	43.96	0.68	44.63	-9.37	54.00	306	205	Average
2		5150.000	43.18	0.68	43.85	-10.15	54.00	306	205	Average
3		5178.940	99.08	0.67	99.76	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

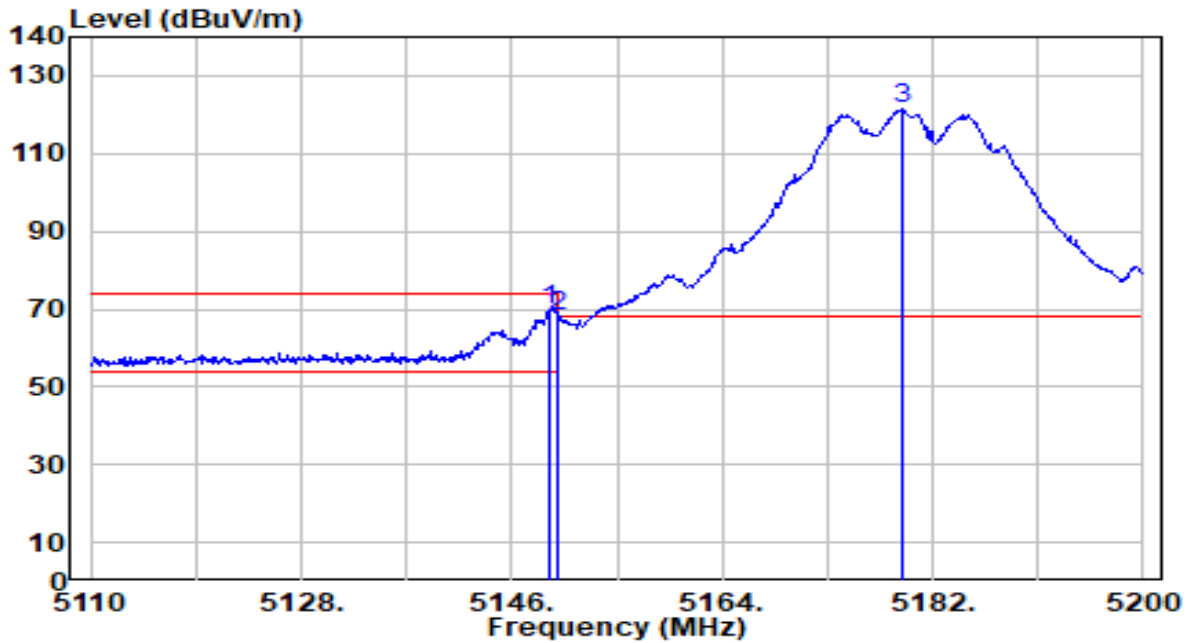


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.330	69.15	0.68	69.83	-4.17	74.00	168	76	Peak
2		5150.000	67.53	0.68	68.21	-5.79	74.00	168	76	Peak
3		5179.300	120.58	0.67	121.25	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

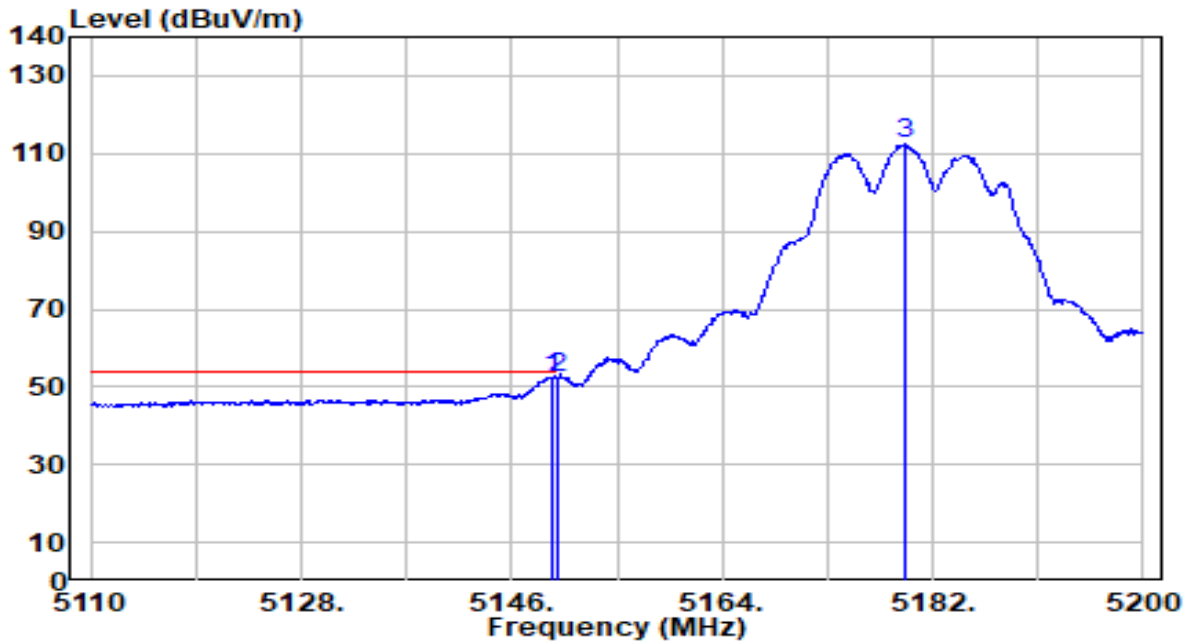


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	51.83	0.68	52.50	-1.50	54.00	168	76	Average
2	* 5150.000	51.87	0.68	52.54	-1.46	54.00	168	76	Average
3	5179.570	111.80	0.67	112.47	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band2_TX_CH 64 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

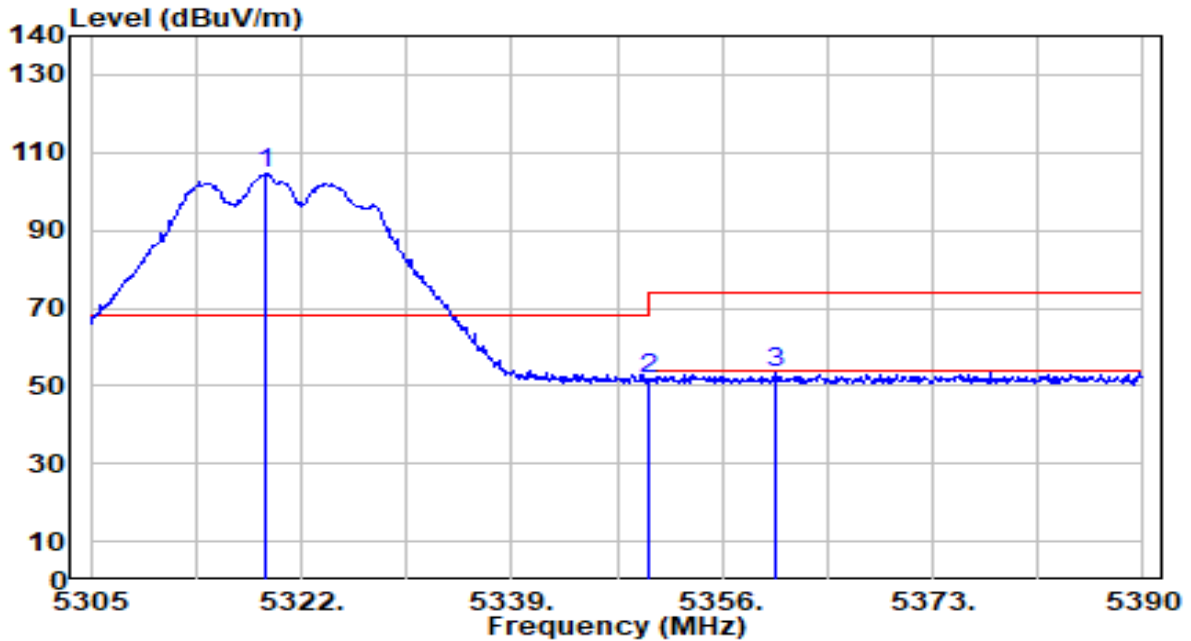


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.195	103.87	0.54	104.41	N/A	N/A	281	199	Peak
2	5350.000	51.46	0.51	51.96	-22.04	74.00	281	199	Peak
3	* 5360.250	53.06	0.49	53.55	-20.45	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band2_TX_CH 64 ANT 0+1_Vetical Ant	Test Voltage	AC 120V/60Hz

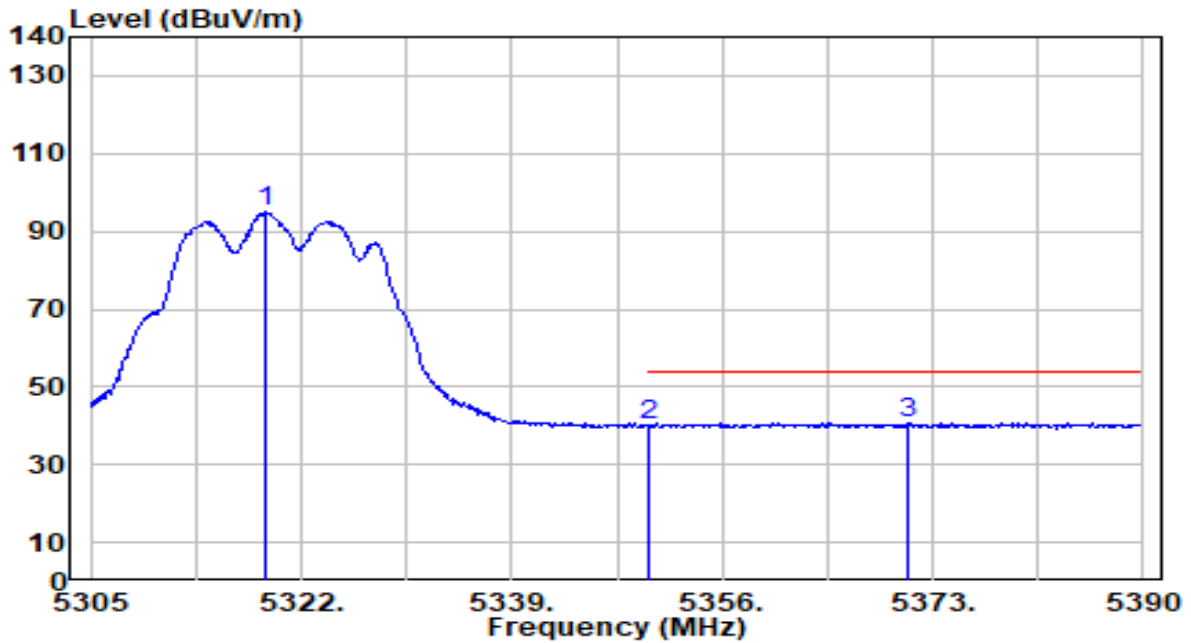


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.195	94.67	0.54	95.21	N/A	N/A	281	199	Average
2	5350.000	39.39	0.51	39.89	-14.11	54.00	281	199	Average
3	* 5371.045	40.28	0.48	40.76	-13.24	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

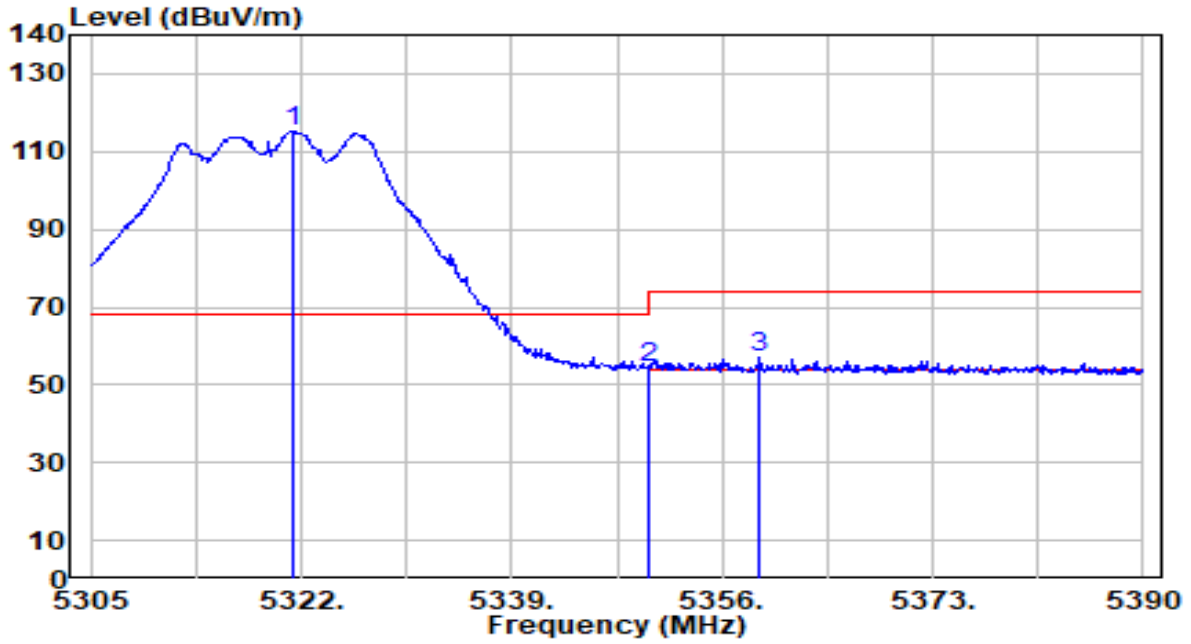


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.405	114.64	0.54	115.18	N/A	N/A	240	267	Peak
2	5350.000	53.65	0.51	54.16	-19.84	74.00	240	267	Peak
3	* 5359.060	56.40	0.50	56.89	-17.11	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

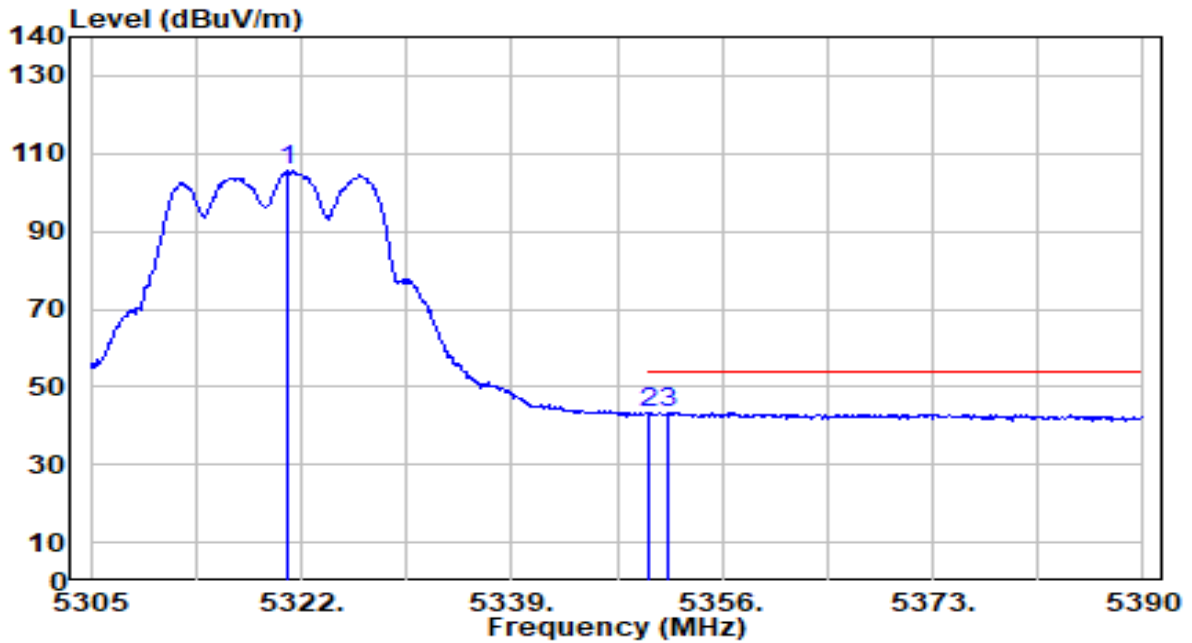


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.980	105.04	0.54	105.58	N/A	N/A	240	267	Average
2	* 5350.000	42.94	0.51	43.45	-10.55	54.00	240	267	Average
3	5351.580	42.75	0.50	43.25	-10.75	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band3_TX_CH 100 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

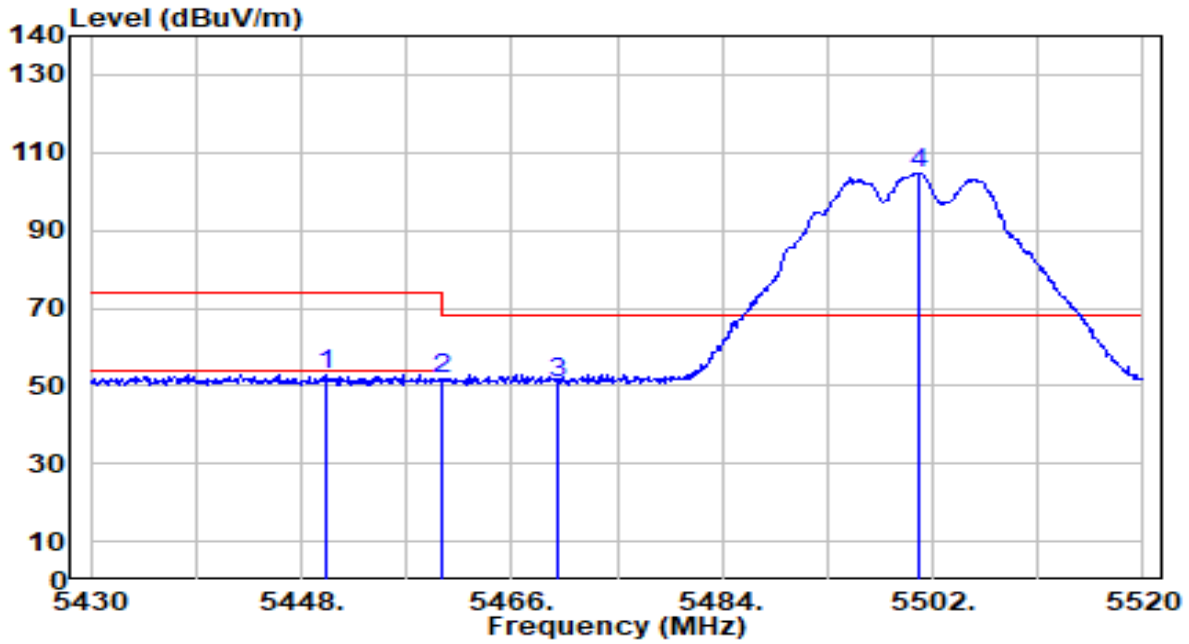


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.160	52.43	0.62	53.05	-20.95	74.00	213	38	Peak
2	5460.000	51.18	0.65	51.83	-22.17	74.00	213	38	Peak
3	* 5470.000	50.27	0.69	50.96	-17.24	68.20	213	38	Peak
4	5500.830	103.98	0.79	104.78	N/A	N/A	213	38	Peak

Note:

- "\*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

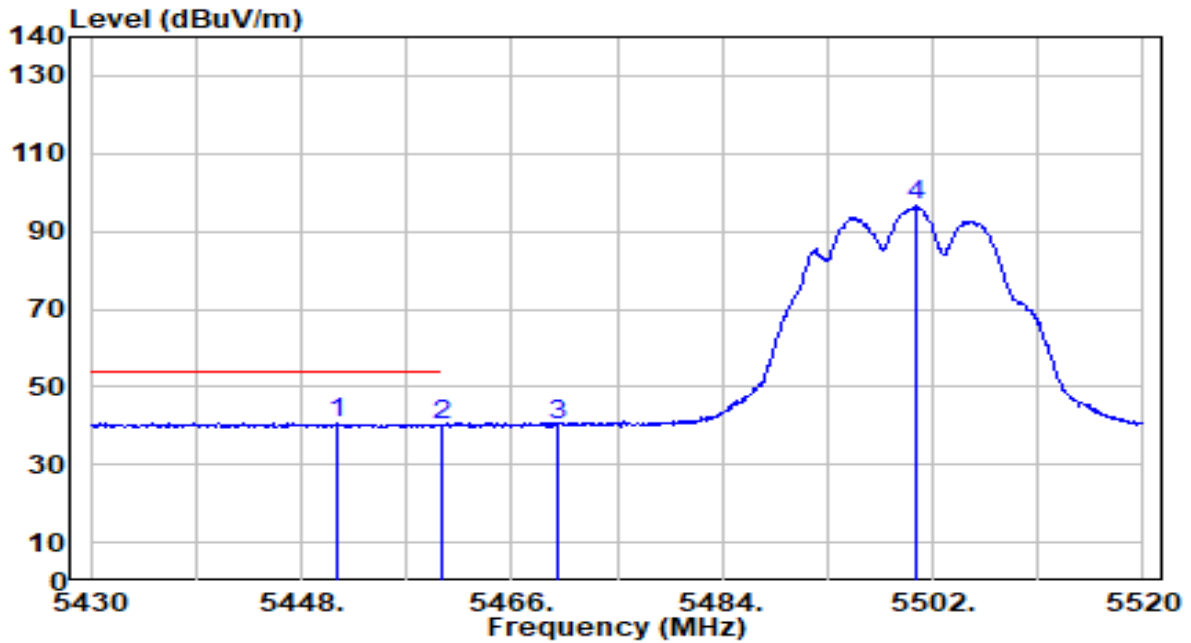


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5450.970	40.27	0.62	40.89	-13.11	54.00	213	38	Average
2	5460.000	39.48	0.65	40.14	-13.86	54.00	213	38	Average
3	5470.000	39.34	0.69	40.03	N/A	N/A	213	38	Average
4	5500.560	95.66	0.79	96.45	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

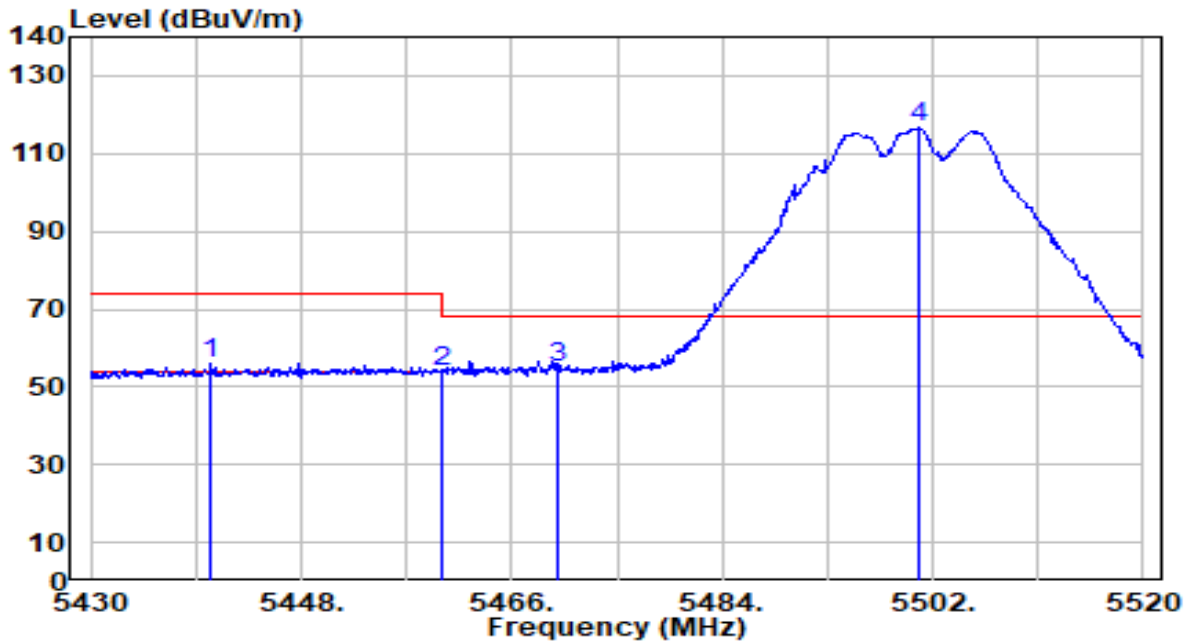


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.260	55.44	0.59	56.03	-17.97	74.00	196	82	Peak
2	5460.000	53.45	0.65	54.10	-19.90	74.00	196	82	Peak
3	* 5470.000	54.40	0.69	55.09	-13.11	68.20	196	82	Peak
4	5500.830	115.75	0.79	116.55	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

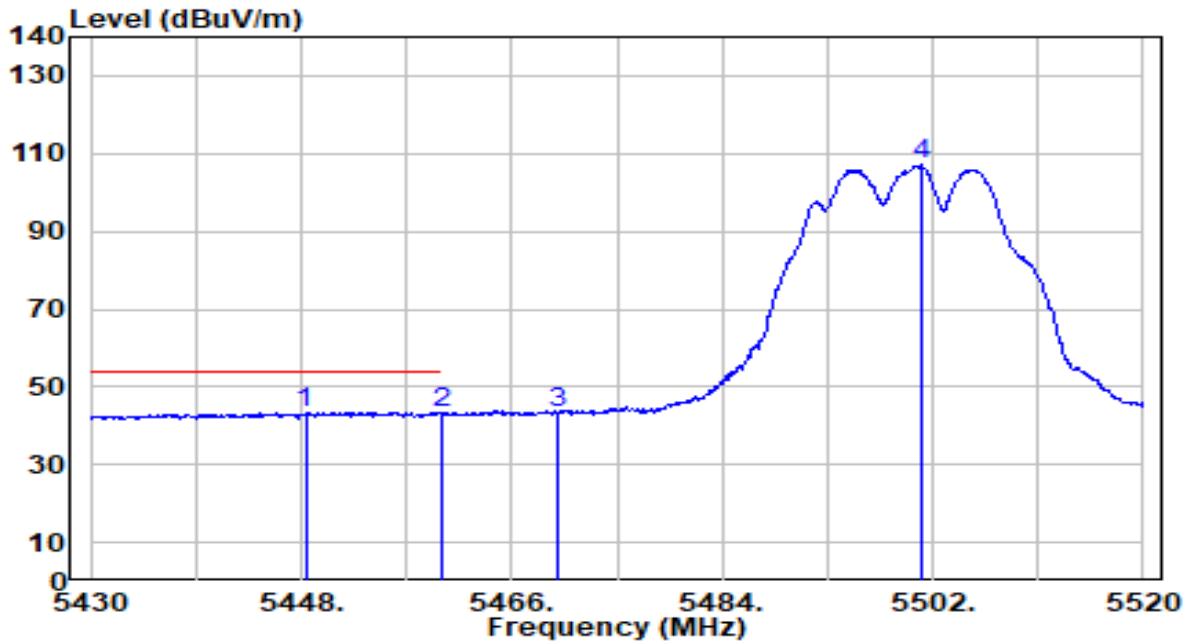


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5448.360	42.86	0.61	43.47	-10.53	54.00	196	82	Average
2	5460.000	42.43	0.65	43.08	-10.92	54.00	196	82	Average
3	5470.000	42.83	0.69	43.51	N/A	N/A	196	82	Average
4	5501.010	106.36	0.79	107.16	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

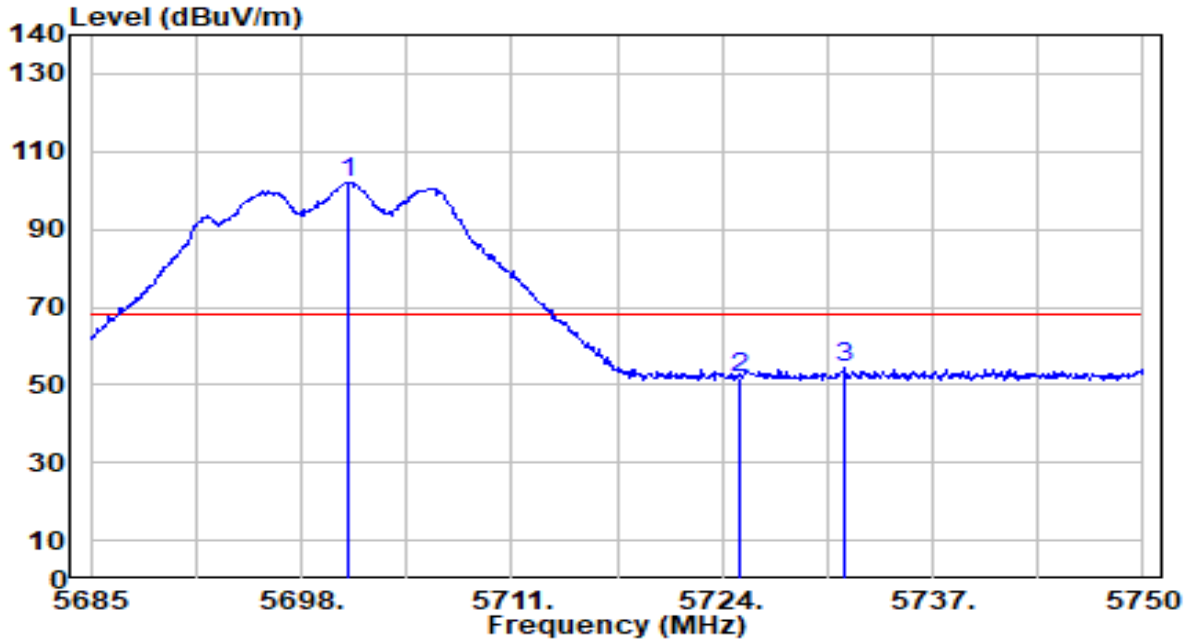


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.860	100.28	1.73	102.00	N/A	N/A	100	174	Peak
2	5725.000	50.09	1.86	51.95	-16.25	68.20	100	174	Peak
3	* 5731.540	52.37	1.90	54.27	-13.93	68.20	100	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band3_TX_CH 140 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

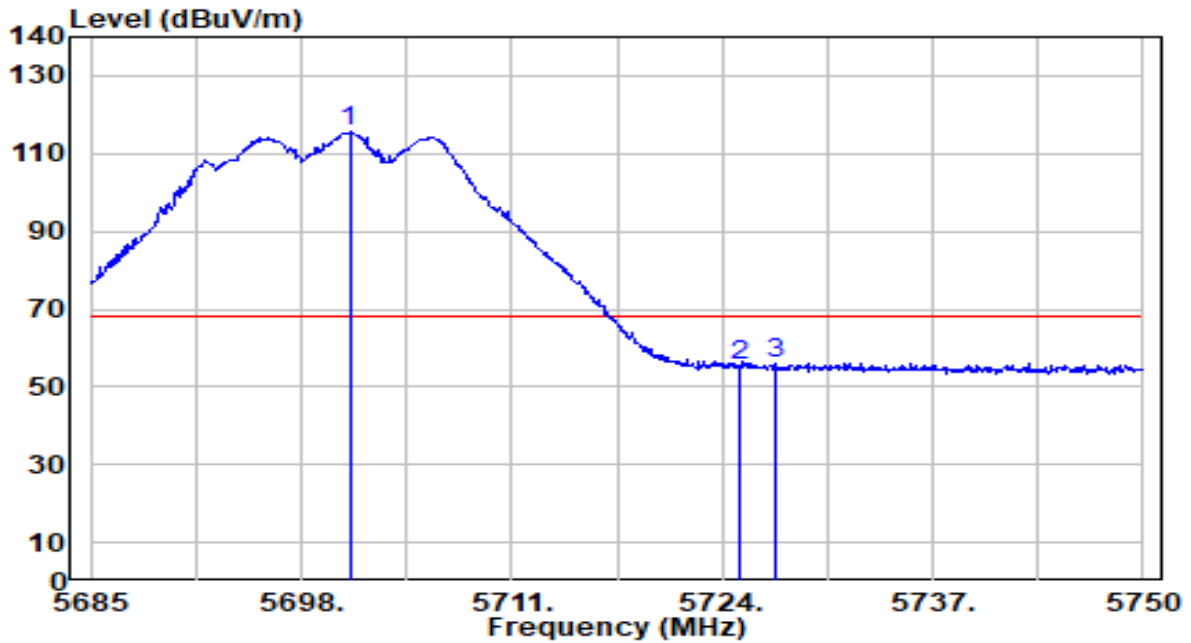


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.990	113.79	1.73	115.52	N/A	N/A	196	340	Peak
2	5725.000	53.73	1.86	55.59	-12.61	68.20	196	340	Peak
3	* 5727.250	54.33	1.88	56.20	-12.00	68.20	196	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band4_TX_CH 149 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

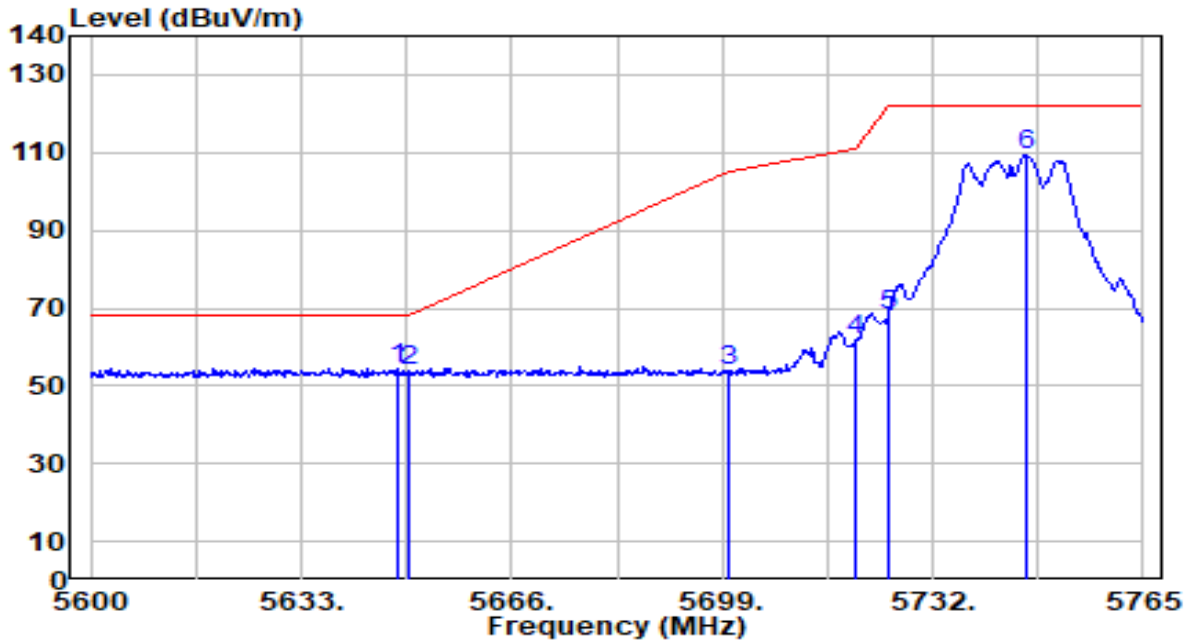


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.180	53.14	1.43	54.57	-13.63	68.20	289	176	Peak
2	5650.000	52.25	1.44	53.69	-14.51	68.20	289	176	Peak
3	5700.000	52.02	1.72	53.74	-51.46	105.20	289	176	Peak
4	5720.000	59.92	1.84	61.76	-49.04	110.80	289	176	Peak
5	5725.000	66.48	1.86	68.35	-53.85	122.20	289	176	Peak
6	5746.520	107.19	1.99	109.18	N/A	N/A	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band4_TX_CH 149 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

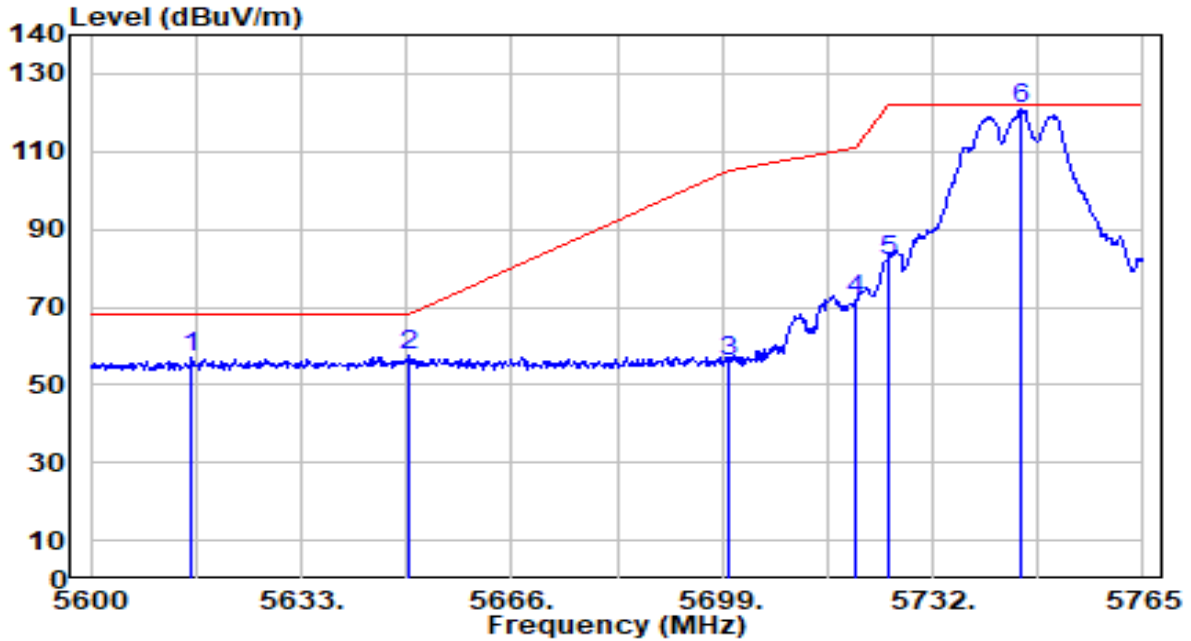


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5615.840	55.82	1.25	57.06	-11.14	68.20	200	343	Peak
2	* 5650.000	56.13	1.44	57.57	-10.63	68.20	200	343	Peak
3	5700.000	54.35	1.72	56.07	-49.13	105.20	200	343	Peak
4	5720.000	70.25	1.84	72.08	-38.72	110.80	200	343	Peak
5	5725.000	80.10	1.86	81.97	-40.23	122.20	200	343	Peak
6	5745.860	118.90	1.98	120.89	N/A	N/A	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

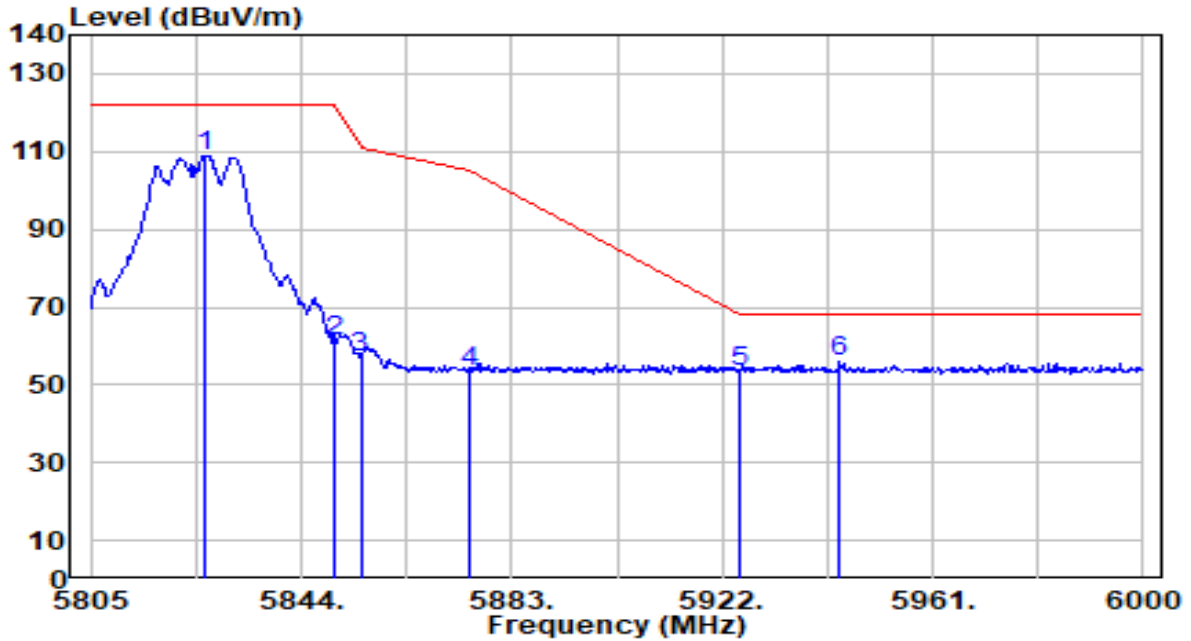


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.255	106.81	2.28	109.09	N/A	N/A	296	174	Peak
2	5850.000	59.18	2.27	61.45	-60.75	122.20	296	174	Peak
3	5855.000	54.91	2.27	57.18	-53.62	110.80	296	174	Peak
4	5875.000	51.04	2.26	53.31	-51.89	105.20	296	174	Peak
5	5925.000	51.09	2.25	53.33	-14.87	68.20	296	174	Peak
6	* 5943.840	54.01	2.24	56.25	-11.95	68.20	296	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

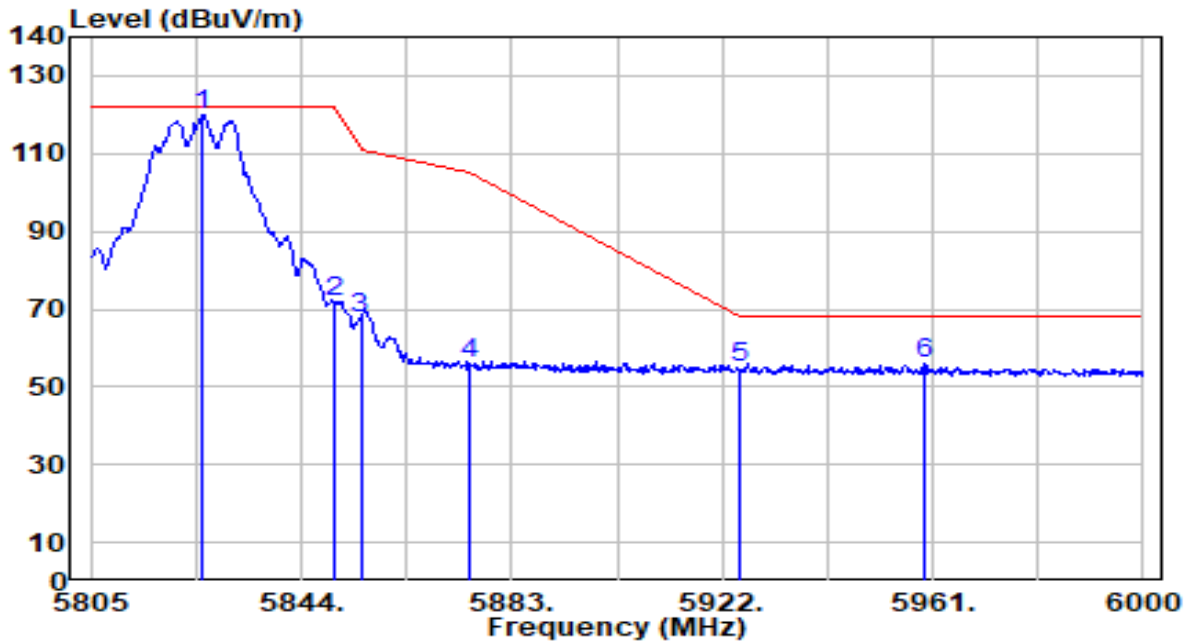


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.670	117.56	2.28	119.84	N/A	N/A	181	342	Peak
2	5850.000	69.46	2.27	71.73	-50.47	122.20	181	342	Peak
3	5855.000	65.58	2.27	67.85	-42.95	110.80	181	342	Peak
4	5875.000	53.71	2.26	55.97	-49.23	105.20	181	342	Peak
5	5925.000	52.84	2.25	55.09	-13.11	68.20	181	342	Peak
6	* 5959.635	53.91	2.23	56.15	-12.05	68.20	181	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

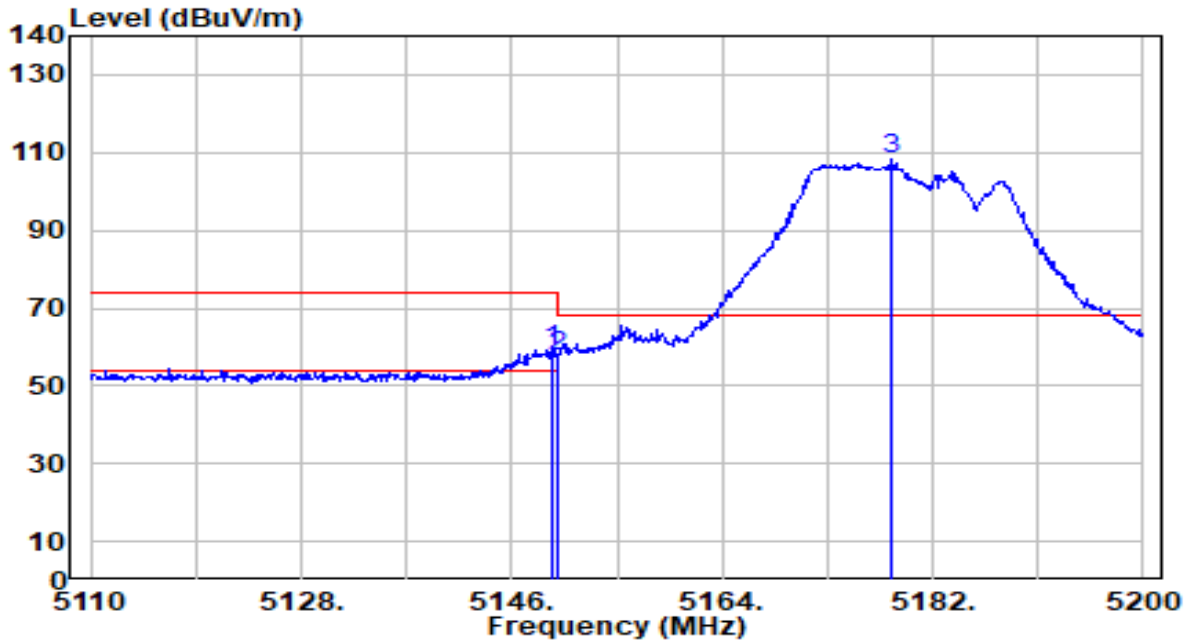


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.420	58.47	0.68	59.14	-14.86	74.00	306	205	Peak
2	5150.000	57.17	0.68	57.84	-16.16	74.00	306	205	Peak
3	5178.490	107.48	0.67	108.16	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

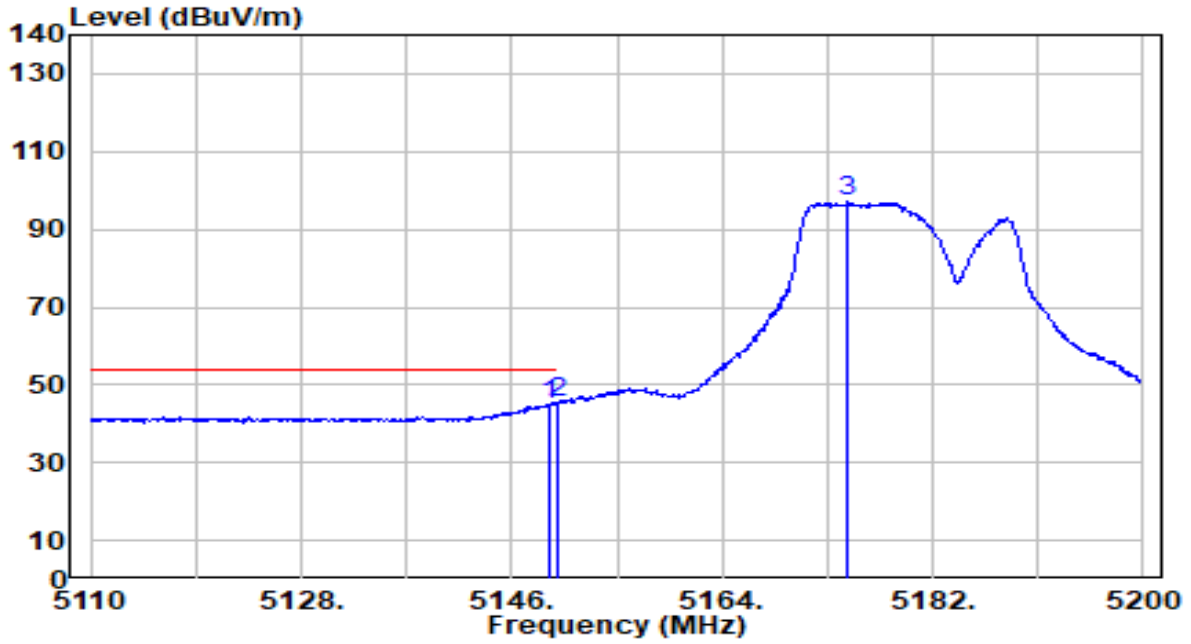


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.240	44.10	0.68	44.77	-9.23	54.00	306	205	Average
2	* 5150.000	44.52	0.68	45.19	-8.81	54.00	306	205	Average
3	5174.710	96.32	0.67	96.99	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

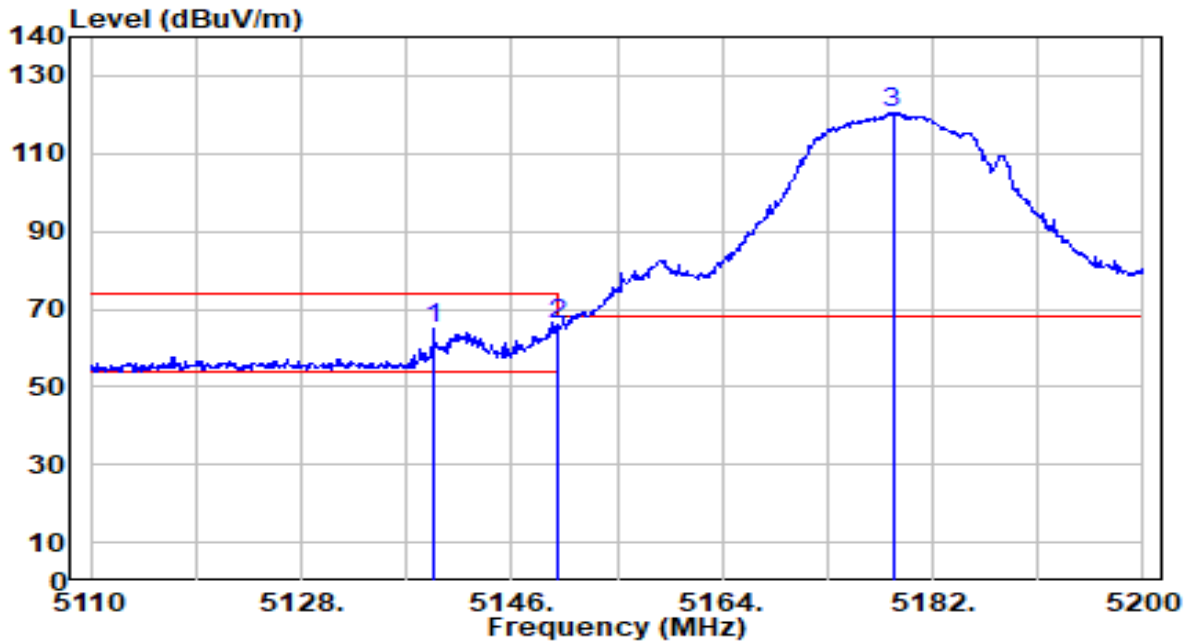


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5139.340	64.23	0.68	64.90	-9.10	74.00	168	76	Peak
2	* 5150.000	65.40	0.68	66.08	-7.92	74.00	168	76	Peak
3	5178.580	119.99	0.67	120.66	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

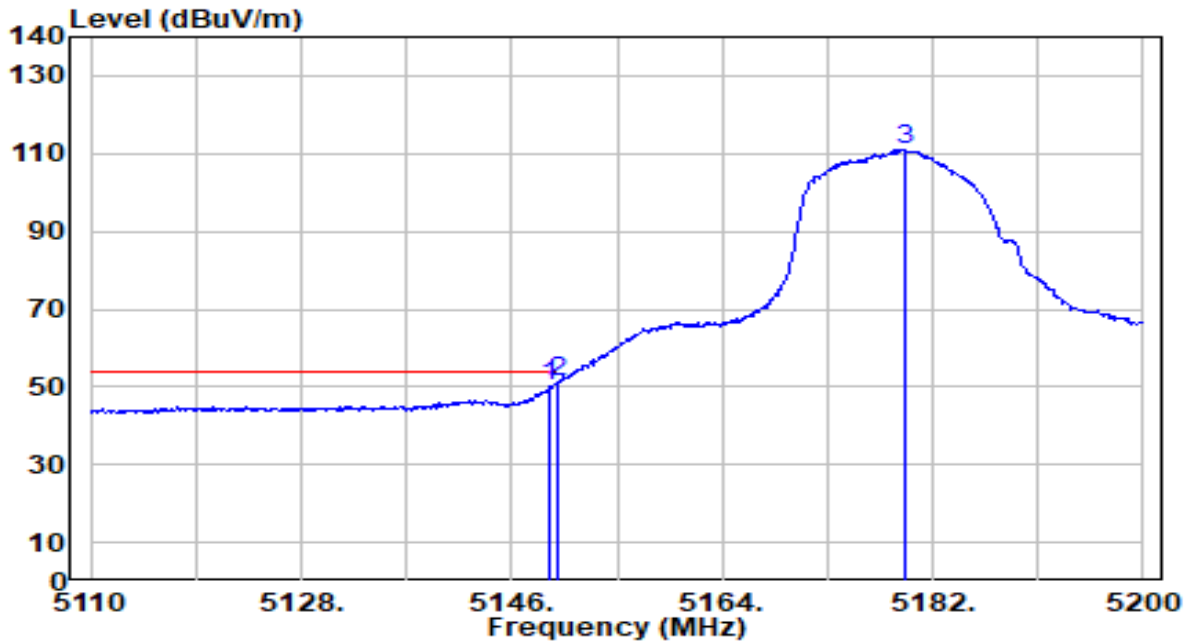


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.240	49.45	0.68	50.12	-3.88	54.00	168	76	Average
2	* 5150.000	50.50	0.68	51.17	-2.83	54.00	168	76	Average
3	5179.570	110.40	0.67	111.08	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band2_TX_CH 64 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

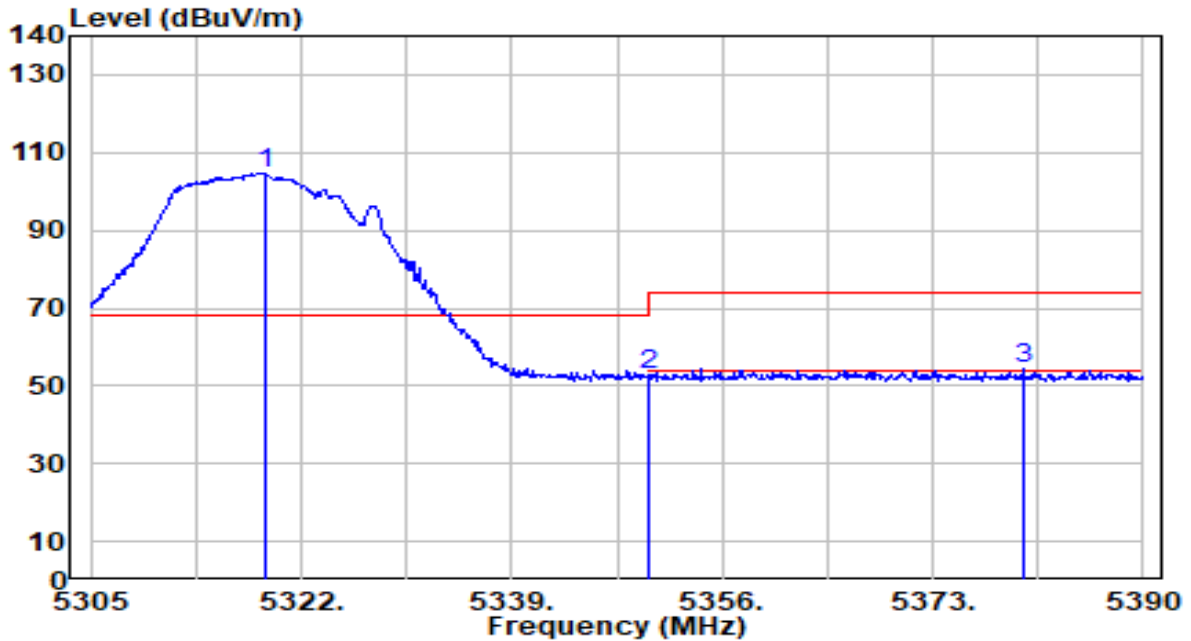


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.025	104.29	0.54	104.83	N/A	N/A	281	199	Peak
2	5350.000	52.07	0.51	52.58	-21.42	74.00	281	199	Peak
3	* 5380.310	53.86	0.47	54.33	-19.67	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

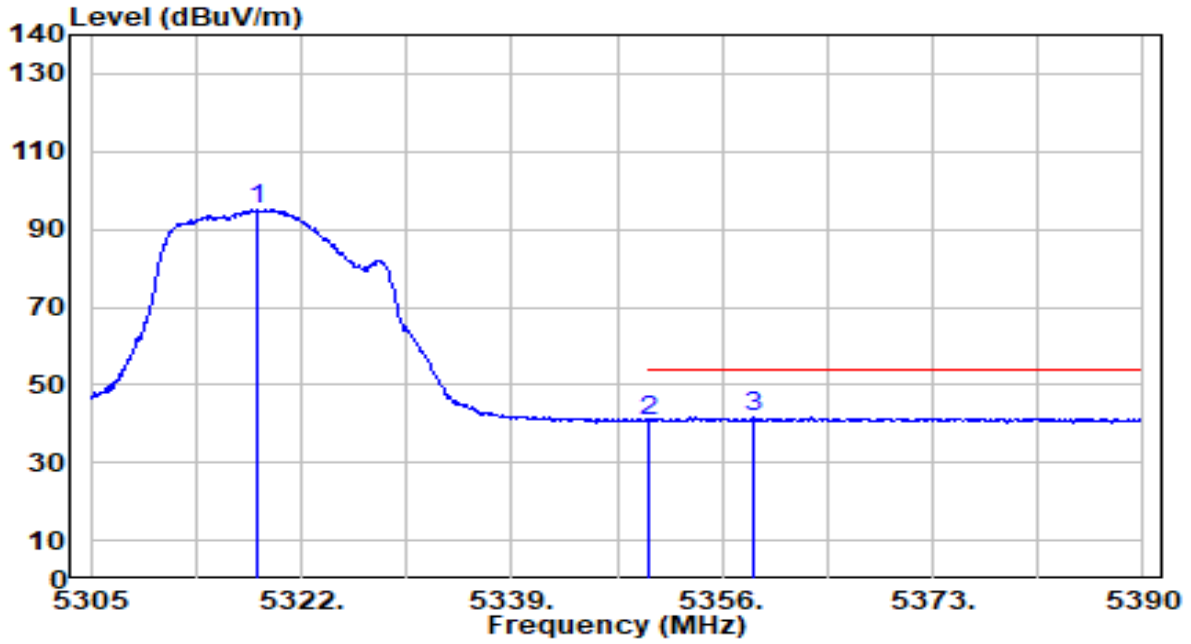


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.430	94.55	0.54	95.09	N/A	N/A	281	199	Average
2	5350.000	40.23	0.51	40.74	-13.26	54.00	281	199	Average
3	* 5358.465	41.02	0.50	41.52	-12.48	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

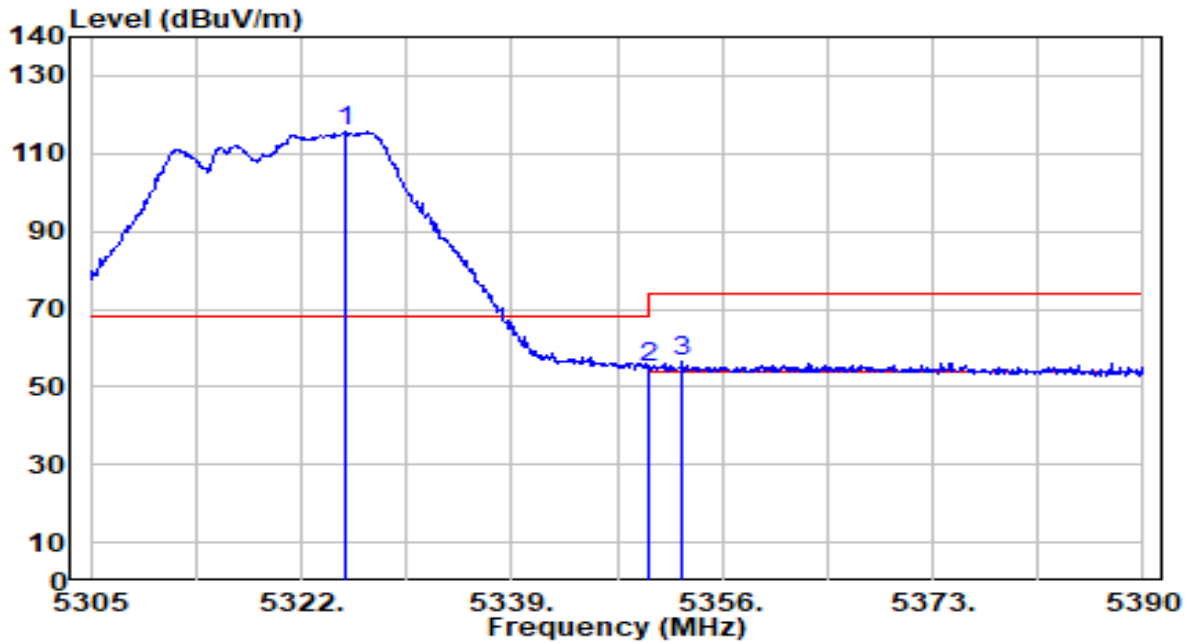


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.485	115.30	0.53	115.84	N/A	N/A	240	267	Peak
2	5350.000	54.34	0.51	54.84	-19.16	74.00	240	267	Peak
3	* 5352.770	56.15	0.50	56.66	-17.34	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

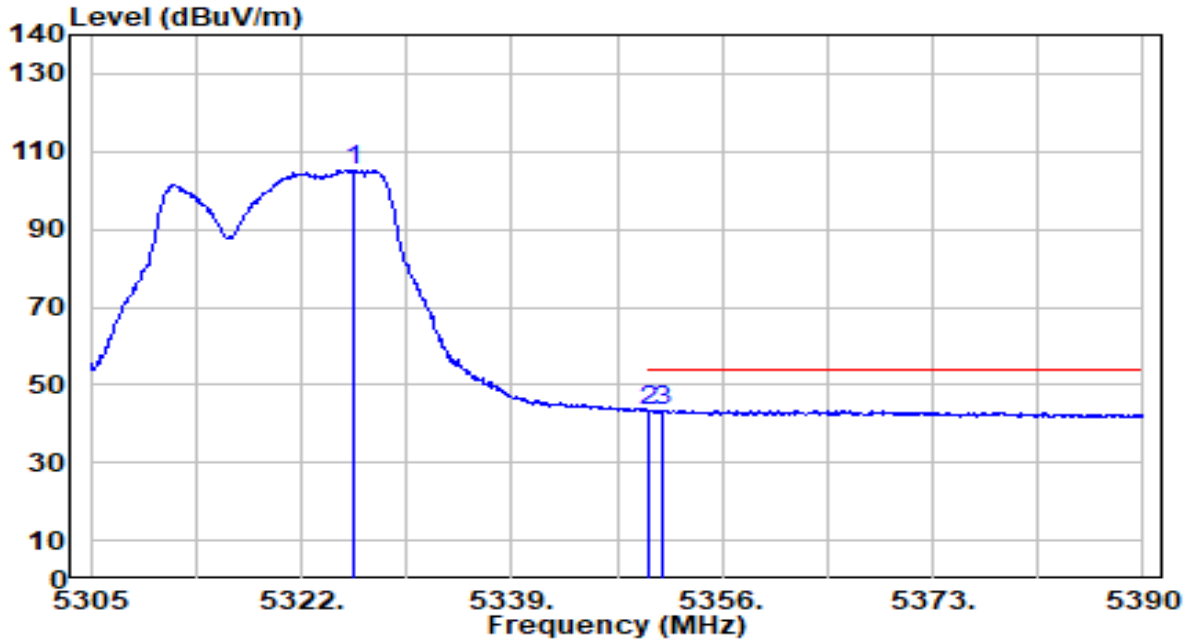


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.250	104.81	0.53	105.34	N/A	N/A	240	267	Average
2	5350.000	42.88	0.51	43.39	-10.61	54.00	240	267	Average
3	* 5351.155	42.89	0.50	43.40	-10.60	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band3_TX_CH 100 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

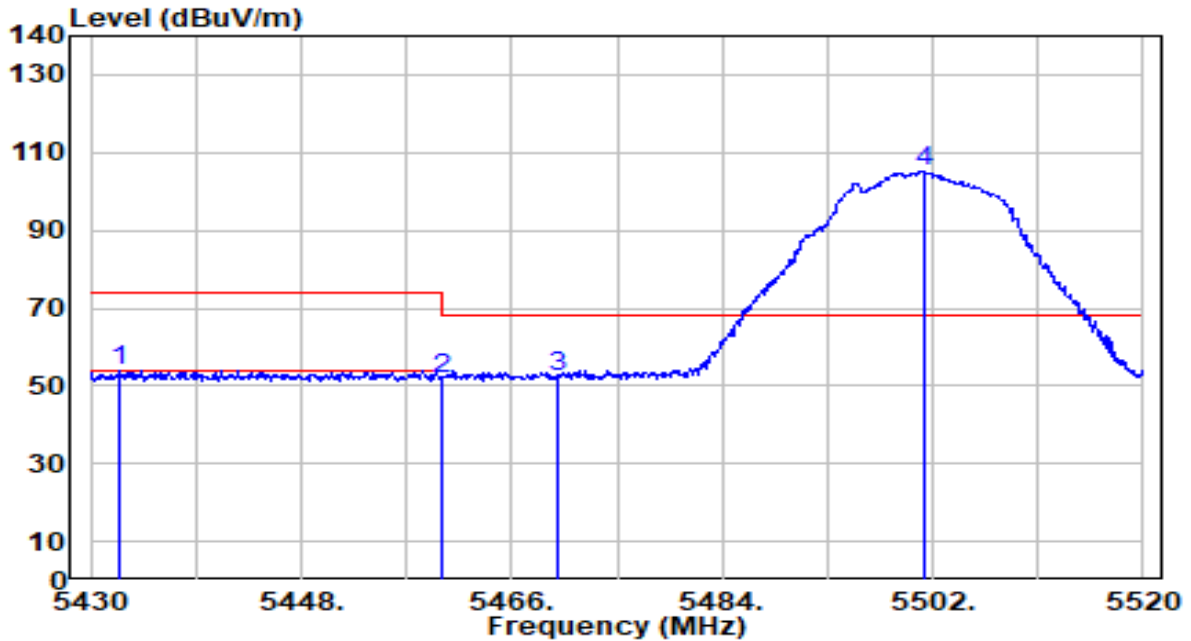


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5432.340	53.46	0.56	54.02	-19.98	74.00	213	38	Peak
2	5460.000	51.18	0.65	51.83	-22.17	74.00	213	38	Peak
3	* 5470.000	51.55	0.69	52.24	-15.96	68.20	213	38	Peak
4	5501.190	104.50	0.79	105.30	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

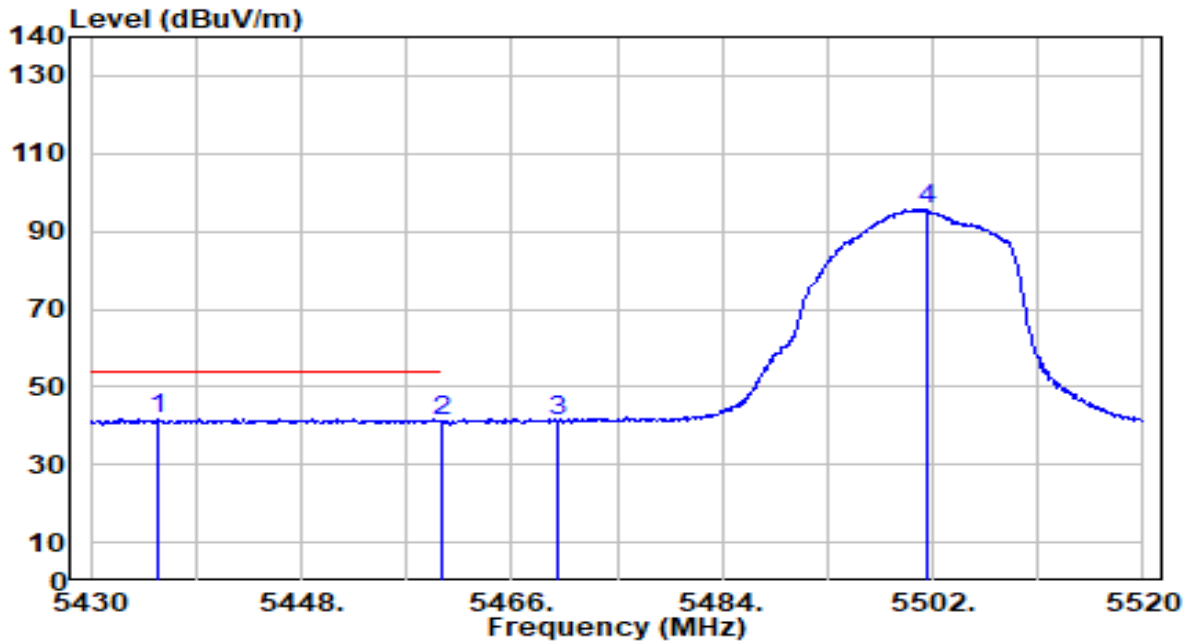


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5435.850	41.05	0.57	41.62	-12.38	54.00	213	38	Average
2	5460.000	40.49	0.65	41.15	-12.85	54.00	213	38	Average
3	5470.000	40.63	0.69	41.32	N/A	N/A	213	38	Average
4	5501.550	94.89	0.80	95.69	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

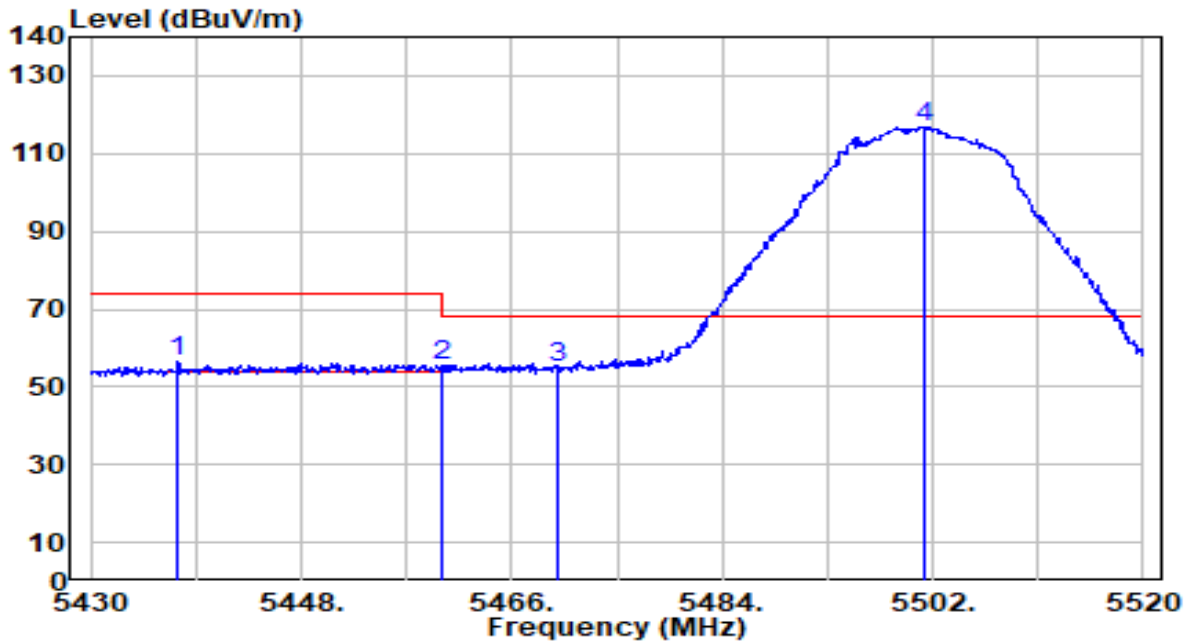


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.470	56.11	0.58	56.69	-17.31	74.00	196	82	Peak
2	5460.000	54.86	0.65	55.51	-18.49	74.00	196	82	Peak
3	* 5470.000	54.38	0.69	55.07	-13.13	68.20	196	82	Peak
4	5501.370	116.07	0.80	116.86	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

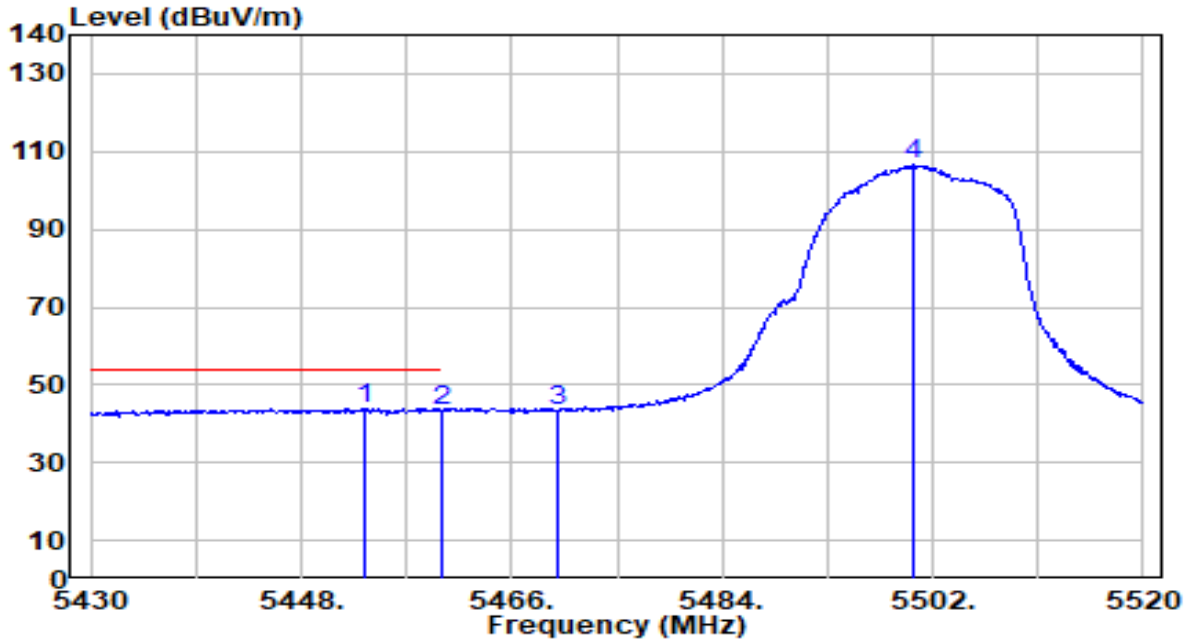


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5453.490	43.24	0.63	43.88	-10.12	54.00	196	82	Average
2	5460.000	42.66	0.65	43.31	-10.69	54.00	196	82	Average
3	5470.000	42.49	0.69	43.18	N/A	N/A	196	82	Average
4	5500.380	105.70	0.79	106.49	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

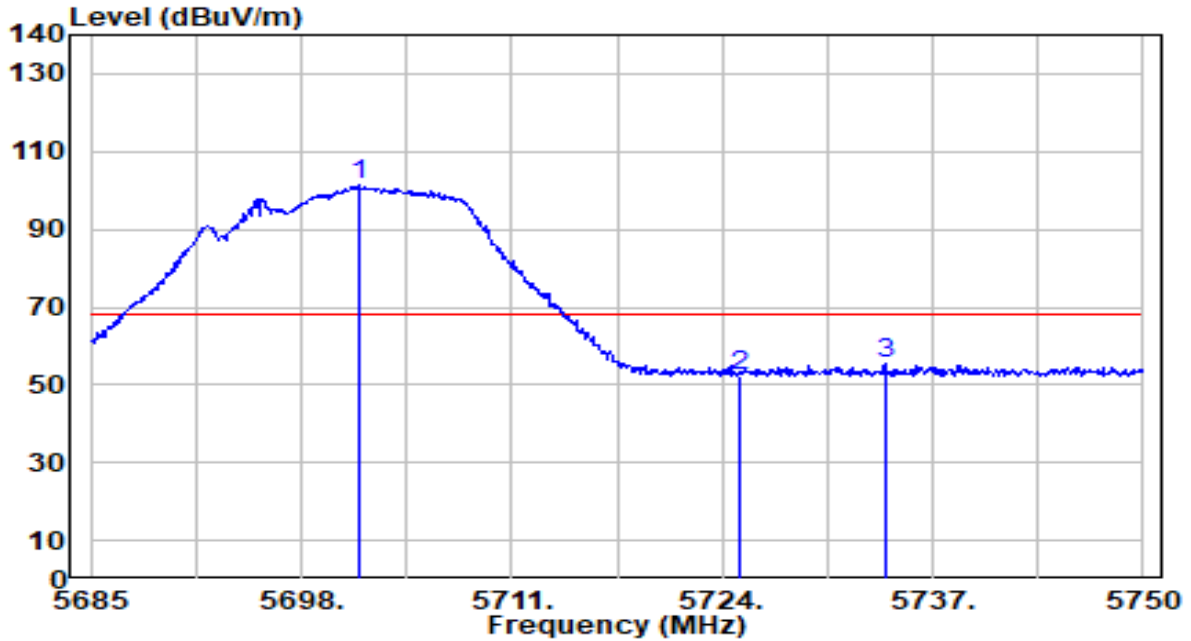


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.510	99.46	1.73	101.19	N/A	N/A	100	174	Peak
2	5725.000	50.68	1.86	52.55	-15.65	68.20	100	174	Peak
3	* 5734.075	53.38	1.91	55.29	-12.91	68.20	100	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

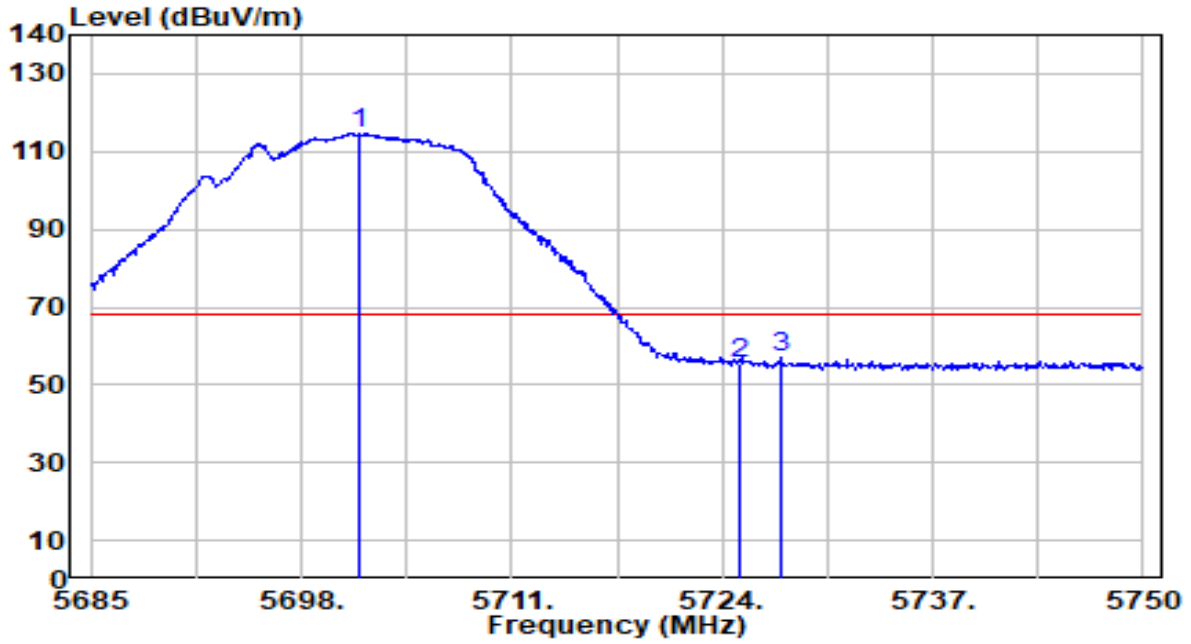


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.575	113.10	1.73	114.83	N/A	N/A	196	340	Peak
2	5725.000	53.44	1.86	55.31	-12.89	68.20	196	340	Peak
3	* 5727.640	55.04	1.88	56.91	-11.29	68.20	196	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band4_TX_CH 149 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

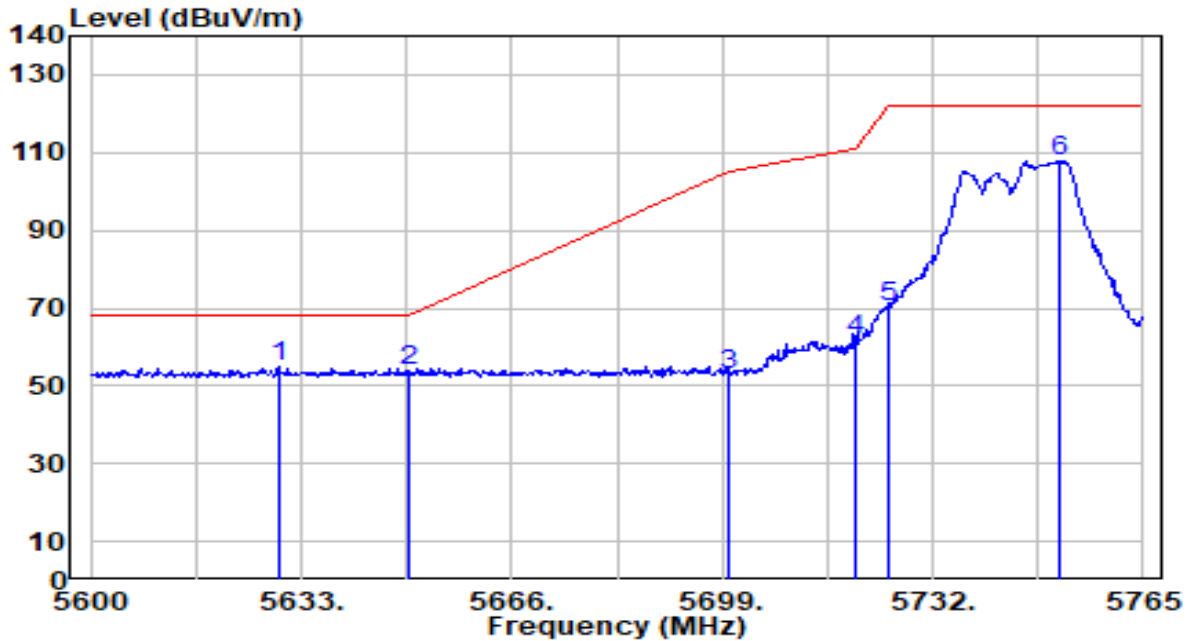


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5629.370	53.48	1.32	54.80	-13.40	68.20	289	176	Peak
2	5650.000	52.21	1.44	53.65	-14.55	68.20	289	176	Peak
3	5700.000	51.32	1.72	53.04	-52.16	105.20	289	176	Peak
4	5720.000	60.06	1.84	61.89	-48.91	110.80	289	176	Peak
5	5725.000	68.58	1.86	70.45	-51.75	122.20	289	176	Peak
6	5751.965	105.73	2.02	107.75	N/A	N/A	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band4_TX_CH 149 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

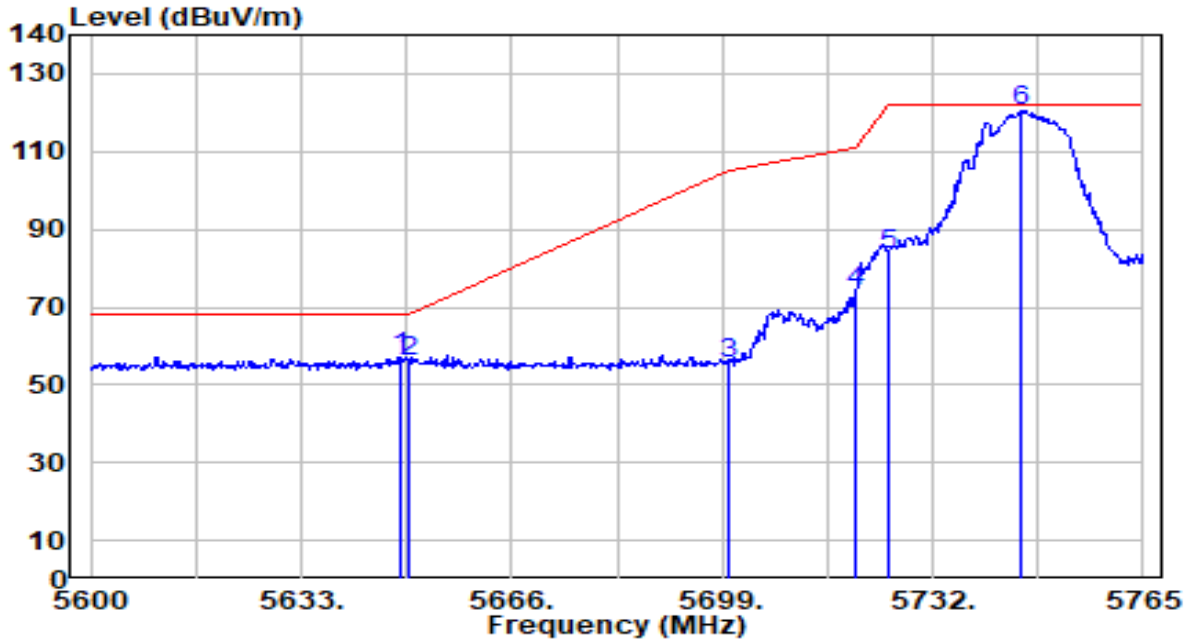


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5648.510	55.72	1.43	57.15	-11.05	68.20	200	343	Peak
2		5650.000	54.45	1.44	55.89	-12.31	68.20	200	343	Peak
3		5700.000	53.93	1.72	55.65	-49.55	105.20	200	343	Peak
4		5720.000	72.15	1.84	73.99	-36.81	110.80	200	343	Peak
5		5725.000	81.66	1.86	83.52	-38.68	122.20	200	343	Peak
6		5745.695	118.47	1.98	120.45	N/A	N/A	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

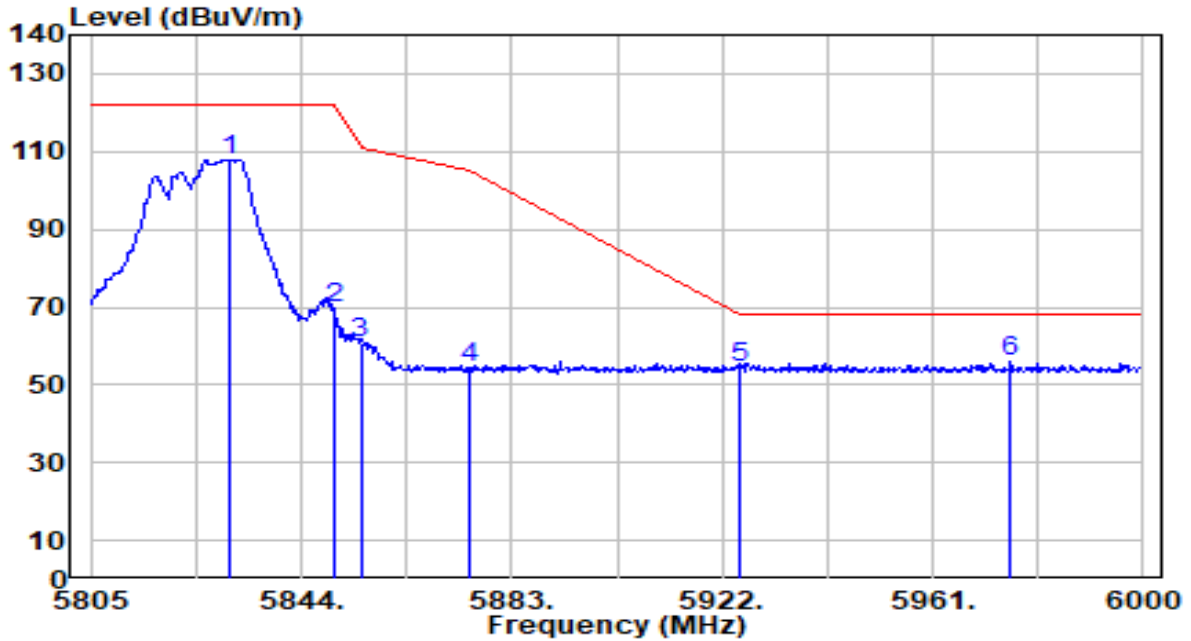


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.935	105.76	2.28	108.04	N/A	N/A	296	174	Peak
2	5850.000	67.43	2.27	69.70	-52.50	122.20	296	174	Peak
3	5855.000	58.49	2.27	60.76	-50.04	110.80	296	174	Peak
4	5875.000	52.01	2.26	54.27	-50.93	105.20	296	174	Peak
5	5925.000	52.25	2.25	54.49	-13.71	68.20	296	174	Peak
6	* 5975.430	53.84	2.23	56.07	-12.13	68.20	296	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

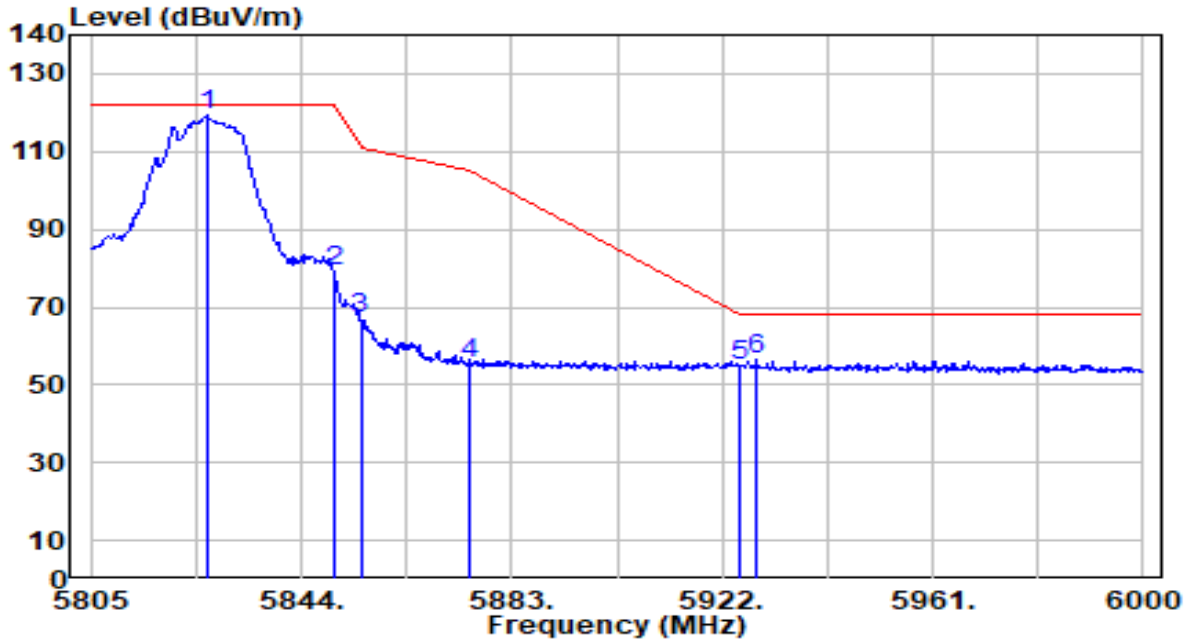


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	117.23	2.28	119.51	N/A	N/A	181	342	Peak
2	5850.000	77.04	2.27	79.31	-42.89	122.20	181	342	Peak
3	5855.000	64.72	2.27	66.99	-43.81	110.80	181	342	Peak
4	5875.000	53.39	2.26	55.65	-49.55	105.20	181	342	Peak
5	5925.000	52.73	2.25	54.98	-13.22	68.20	181	342	Peak
6	* 5928.435	54.33	2.24	56.58	-11.62	68.20	181	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band1_TX_CH 38 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

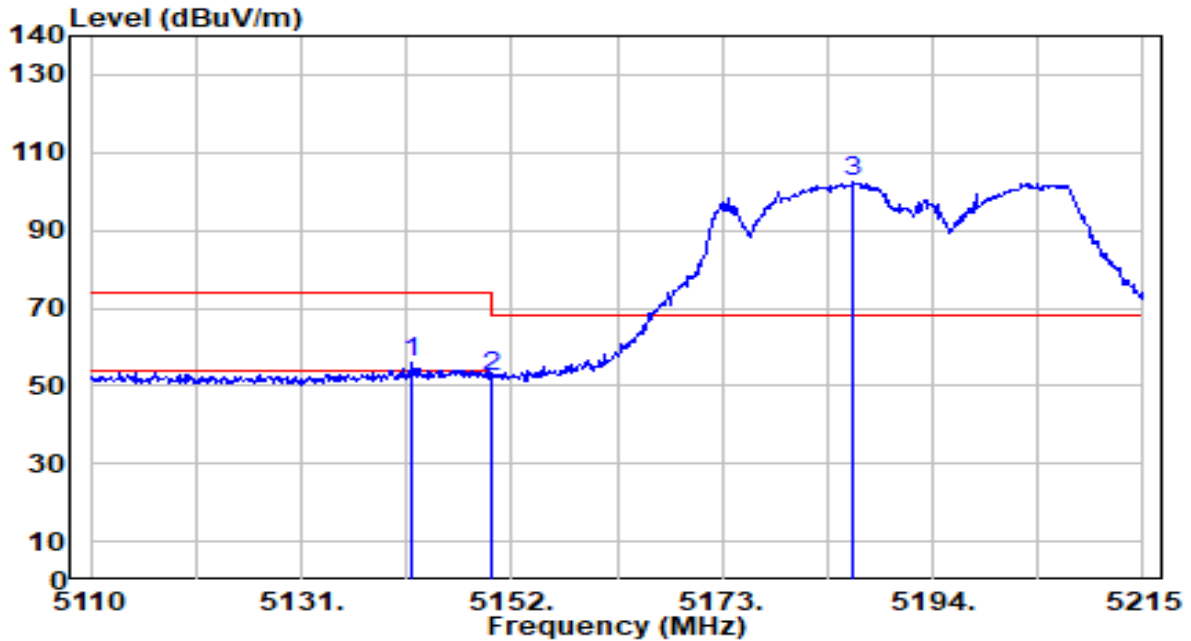


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5142.130	55.15	0.68	55.83	-18.17	74.00	306	205	Peak
2	5150.000	51.57	0.68	52.24	-21.76	74.00	306	205	Peak
3	5186.020	101.58	0.67	102.26	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

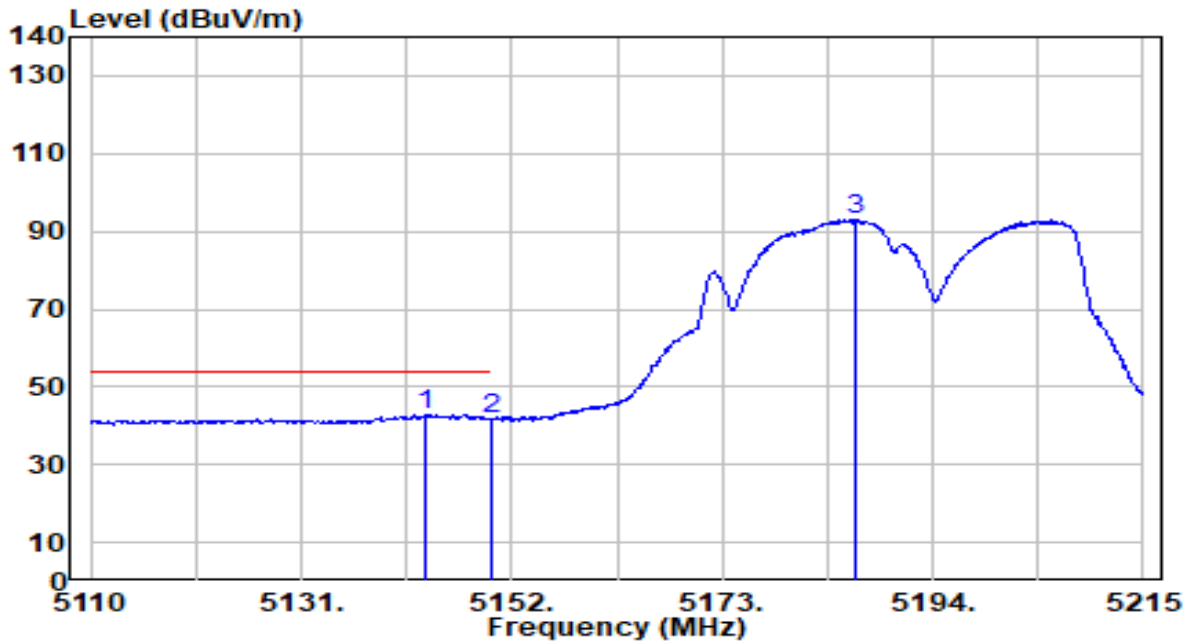


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.390	42.18	0.68	42.86	-11.14	54.00	306	205	Average
2		5150.000	41.12	0.68	41.79	-12.21	54.00	306	205	Average
3		5186.230	92.33	0.67	93.00	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

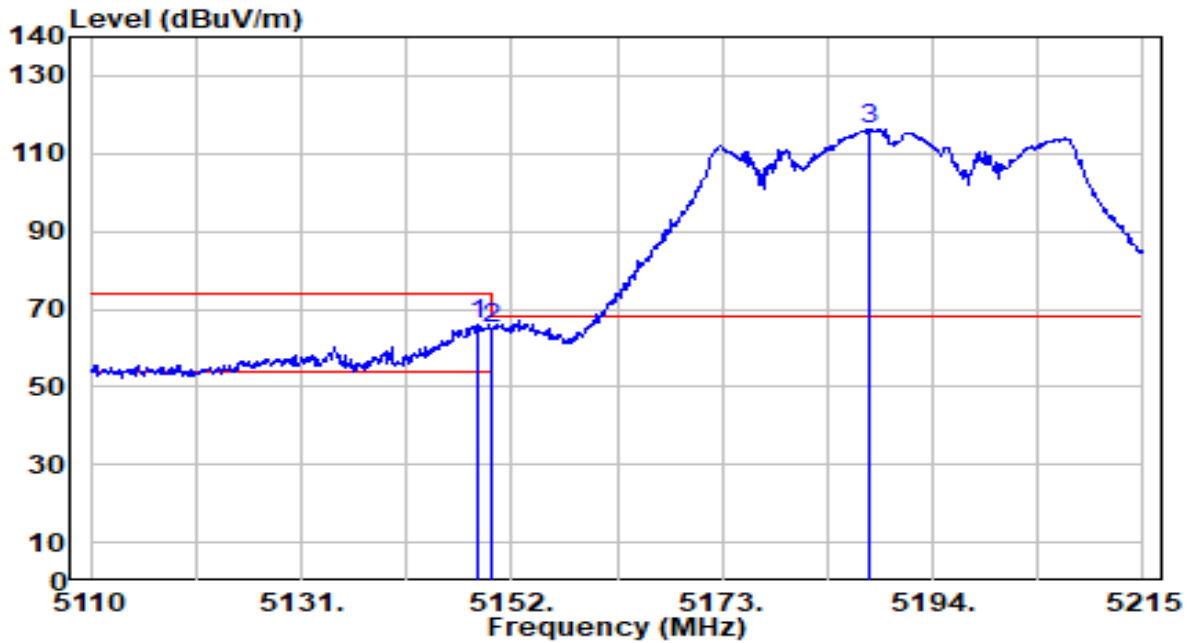


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.745	65.47	0.68	66.14	-7.86	74.00	168	76	Peak
2		5150.000	64.18	0.68	64.86	-9.14	74.00	168	76	Peak
3		5187.595	115.67	0.67	116.34	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

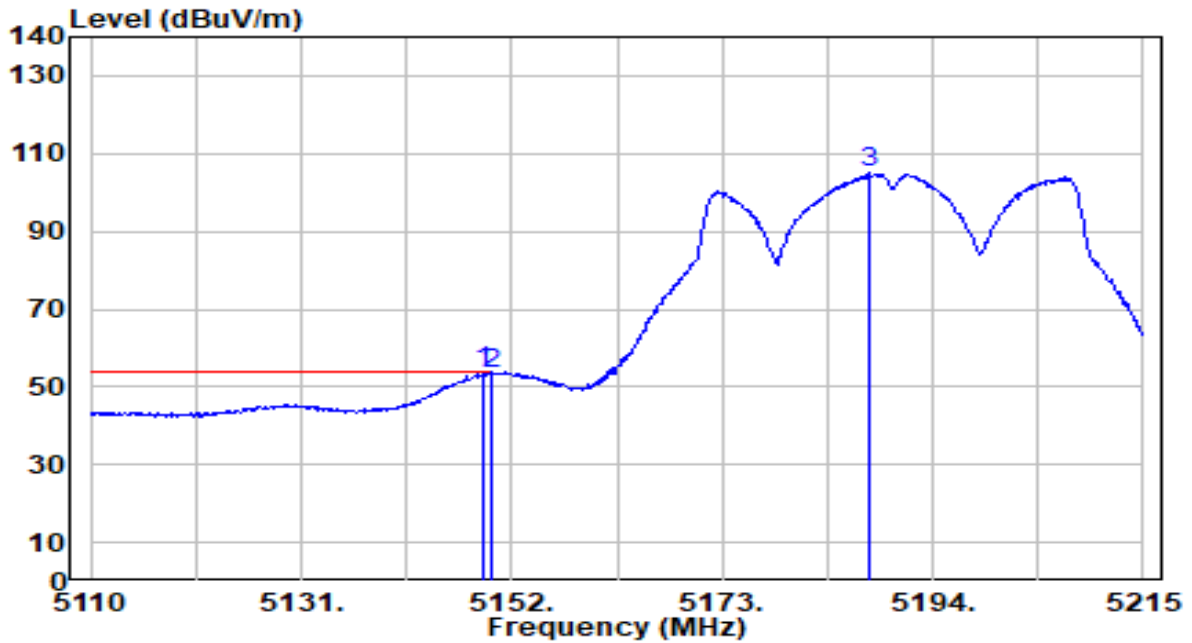


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.270	53.10	0.68	53.77	-0.23	54.00	168	76	Average
2		5150.000	52.89	0.68	53.56	-0.44	54.00	168	76	Average
3		5187.805	104.20	0.67	104.87	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

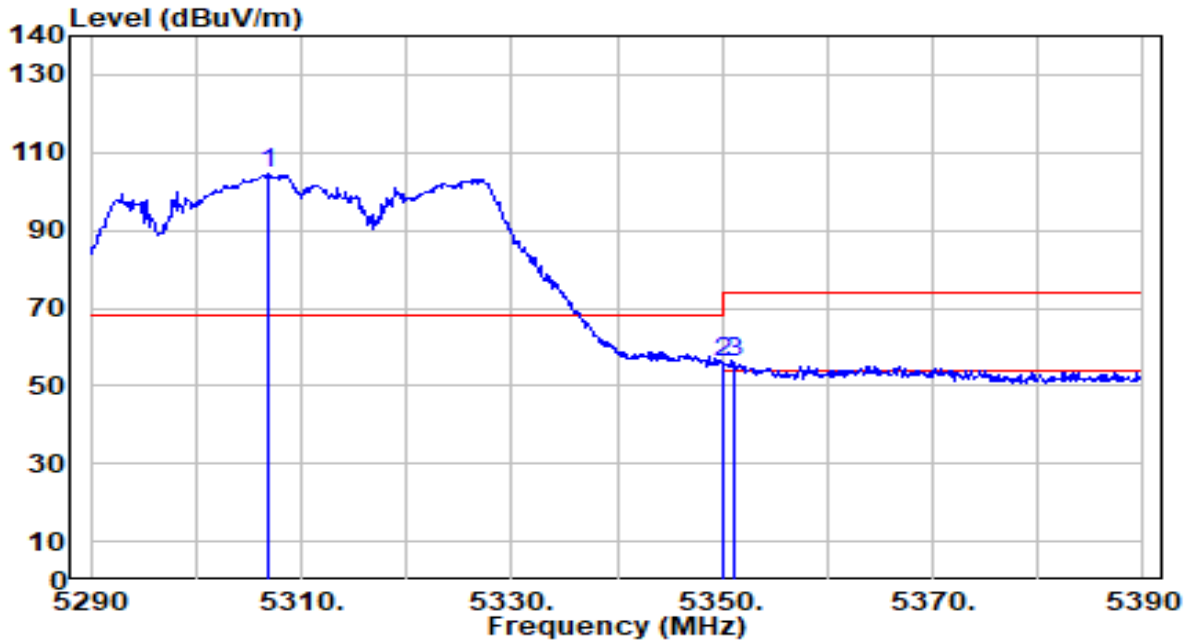


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.800	103.79	0.55	104.34	N/A	N/A	281	199	Peak
2	5350.000	55.28	0.51	55.79	-18.21	74.00	281	199	Peak
3	* 5351.100	55.41	0.50	55.92	-18.08	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

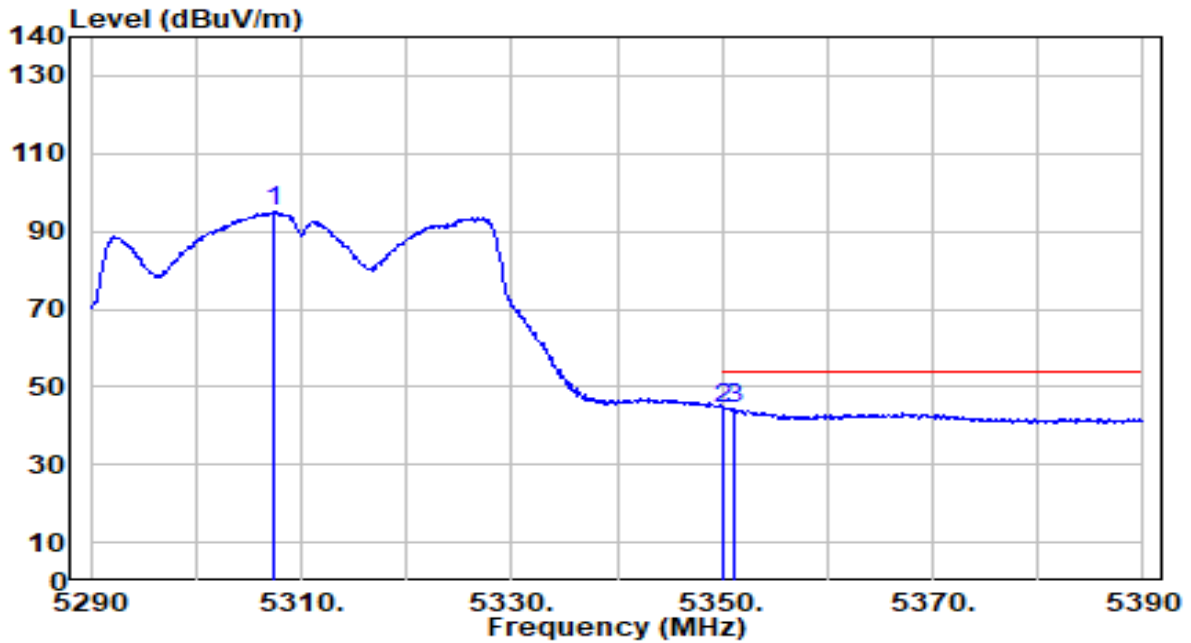


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.400	94.40	0.55	94.95	N/A	N/A	281	199	Average
2 *	5350.000	44.12	0.51	44.62	-9.38	54.00	281	199	Average
3	5351.200	43.64	0.50	44.14	-9.86	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

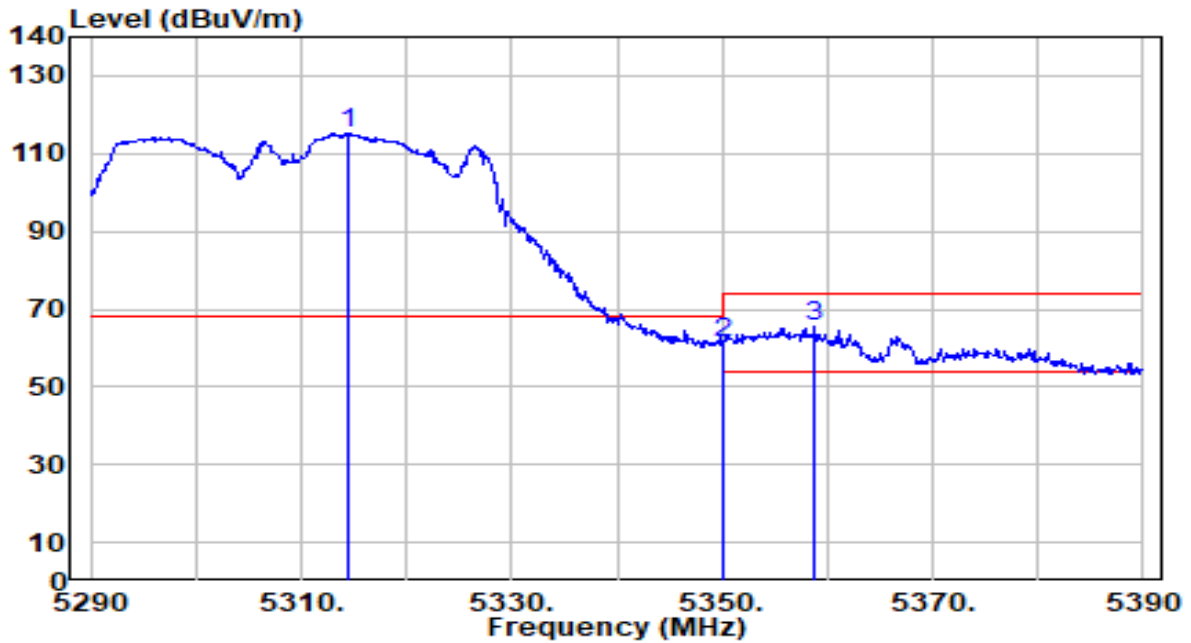


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.400	114.58	0.54	115.13	N/A	N/A	240	267	Peak
2	5350.000	60.97	0.51	61.48	-12.52	74.00	240	267	Peak
3	* 5358.800	64.94	0.50	65.43	-8.57	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

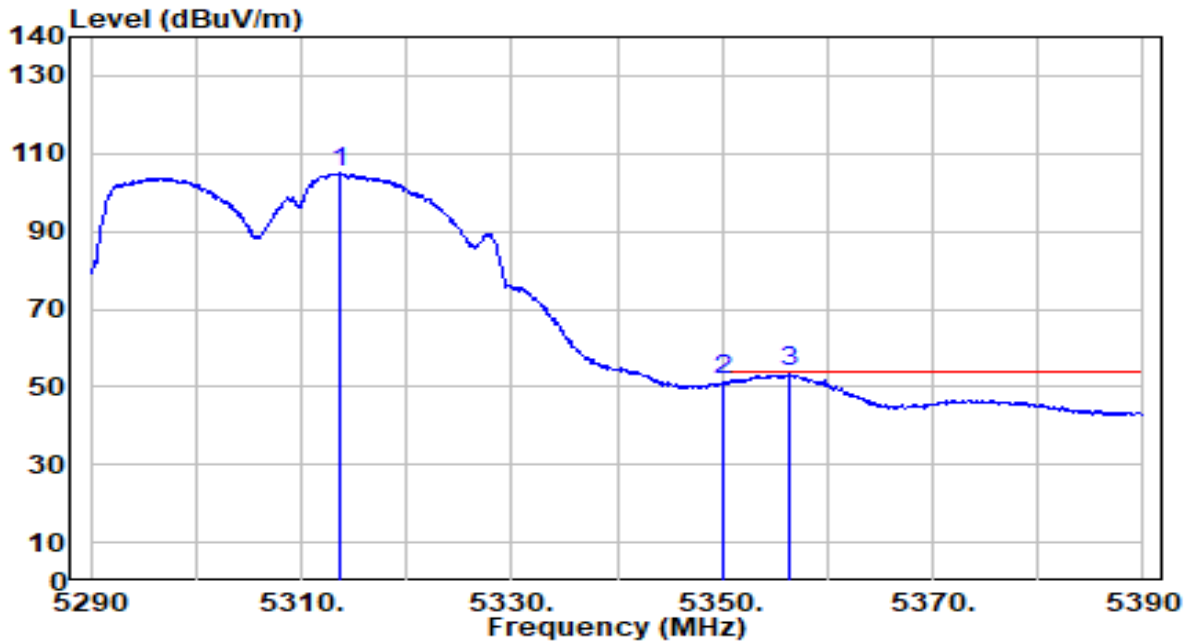


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.600	104.35	0.55	104.89	N/A	N/A	240	267	Average
2	5350.000	51.14	0.51	51.64	-2.36	54.00	240	267	Average
3	* 5356.300	53.27	0.50	53.76	-0.24	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

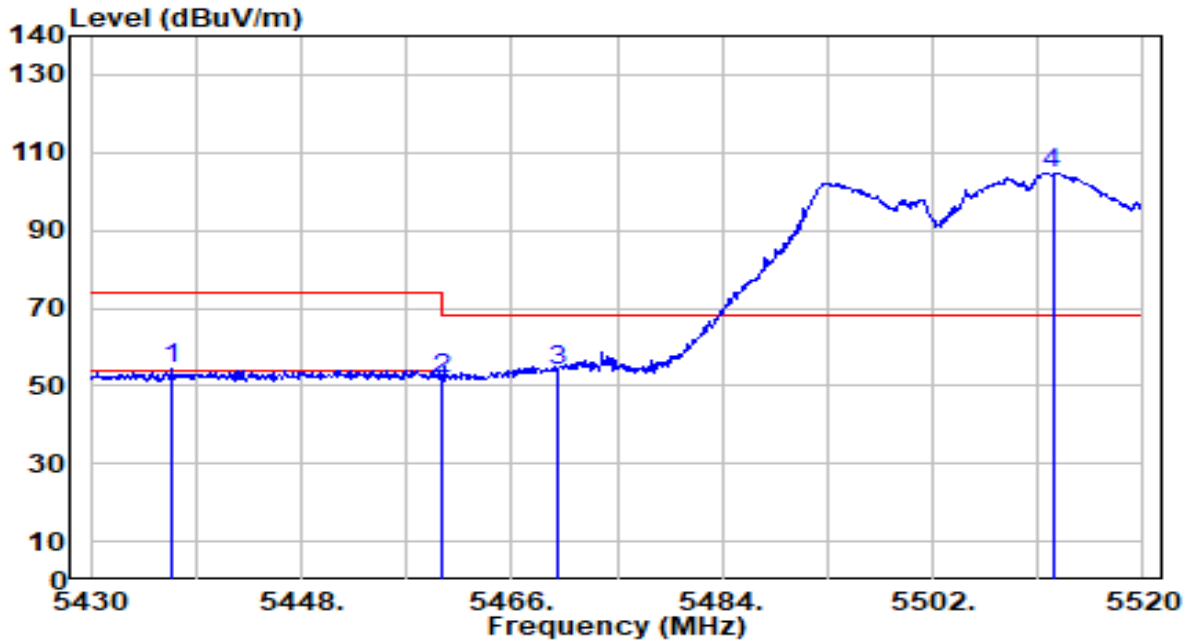


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5436.840	53.75	0.58	54.33	-19.67	74.00	213	38	Peak
2	5460.000	51.13	0.65	51.79	-22.21	74.00	213	38	Peak
3	* 5470.000	53.24	0.69	53.93	-14.27	68.20	213	38	Peak
4	5512.260	103.91	0.83	104.74	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

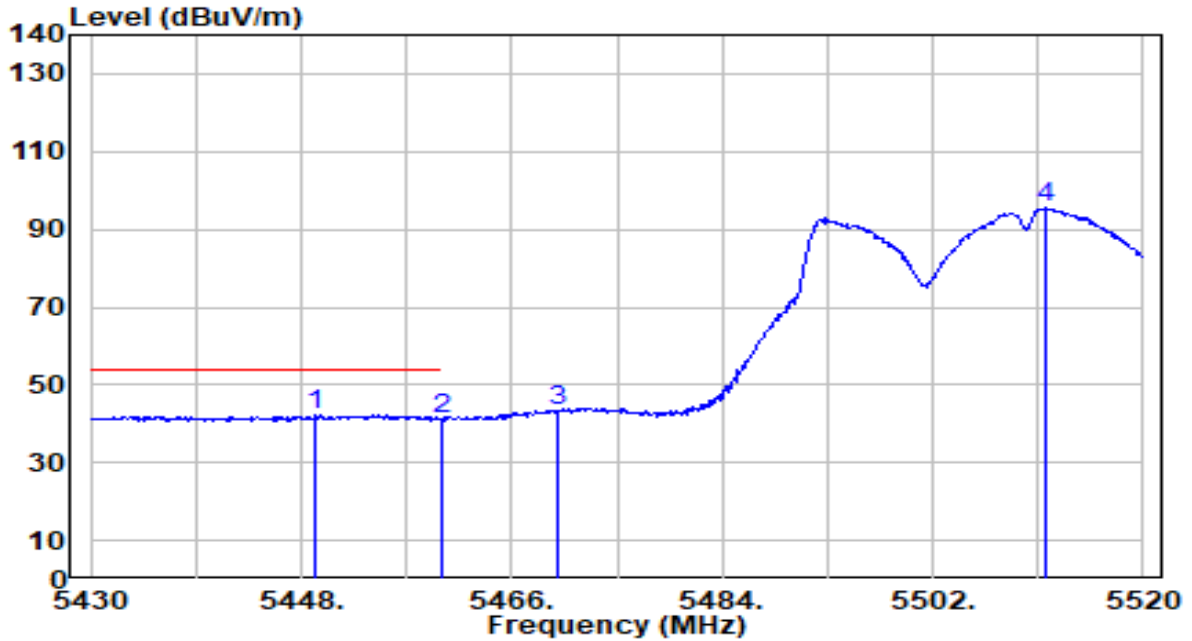


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5449.170	41.47	0.62	42.09	-11.91	54.00	213	38	Average
2	5460.000	40.45	0.65	41.10	-12.90	54.00	213	38	Average
3	5470.000	42.64	0.69	43.33	N/A	N/A	213	38	Average
4	5511.630	94.78	0.83	95.62	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

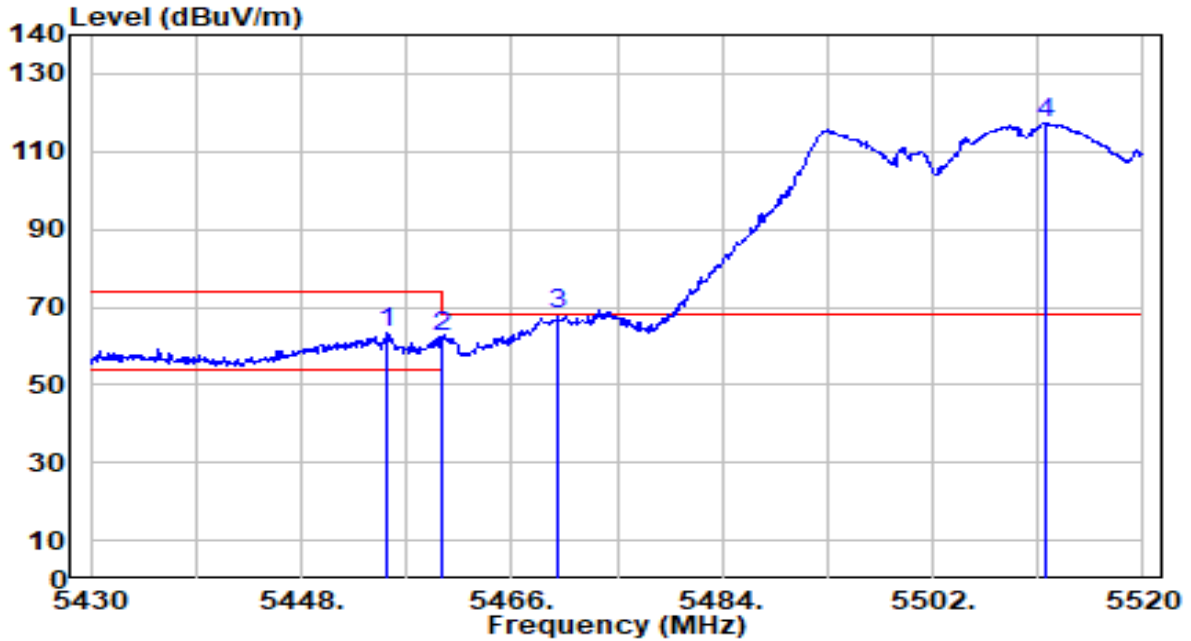


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.290	62.53	0.64	63.16	-10.84	74.00	196	82	Peak
2	5460.000	61.49	0.65	62.14	-11.86	74.00	196	82	Peak
3	* 5470.000	67.29	0.69	67.98	-0.22	68.20	196	82	Peak
4	5511.630	116.42	0.83	117.25	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

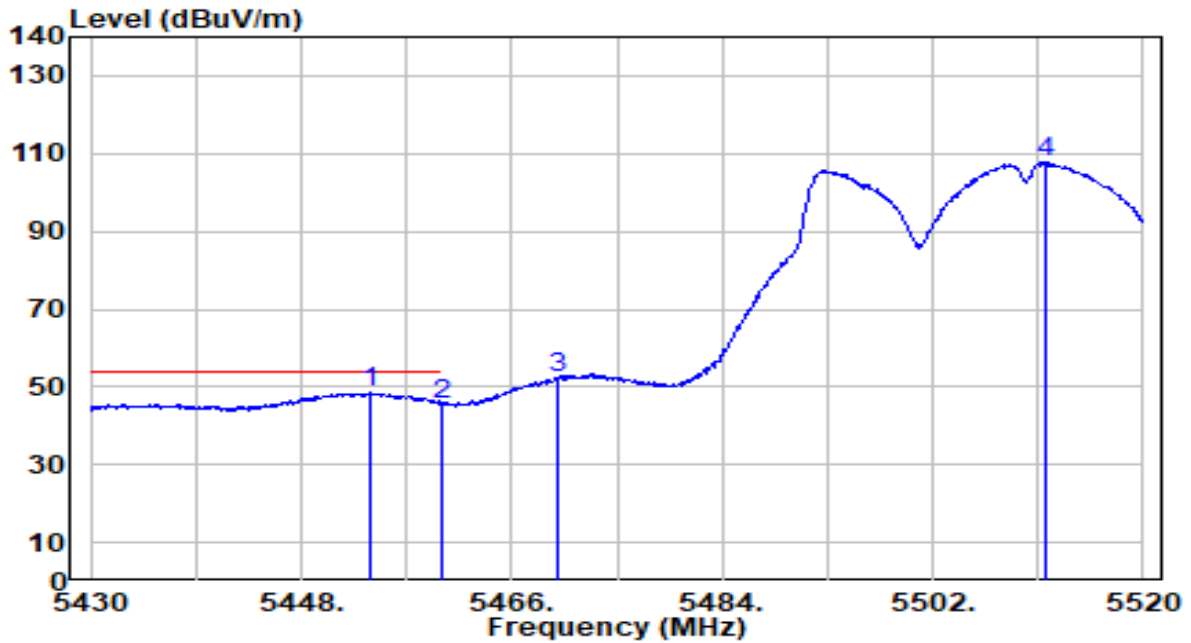


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5453.940	47.81	0.63	48.44	-5.56	54.00	196	82	Average
2	5460.000	44.98	0.65	45.63	-8.37	54.00	196	82	Average
3	5470.000	51.35	0.69	52.04	N/A	N/A	196	82	Average
4	5511.630	107.01	0.83	107.84	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

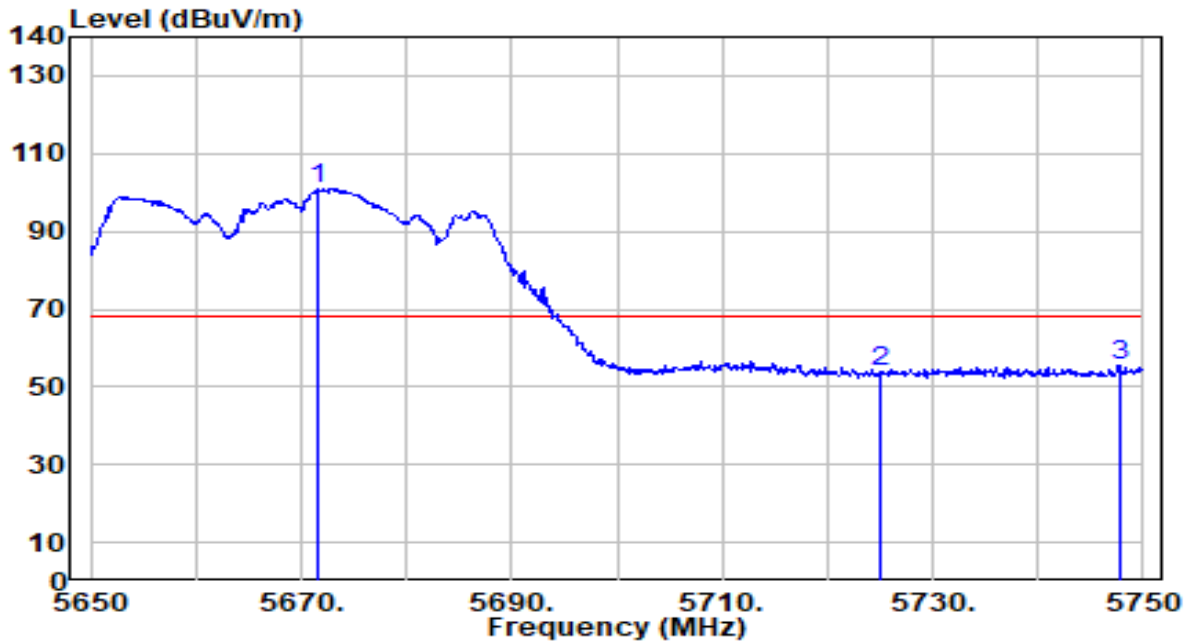


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.700	99.38	1.56	100.94	N/A	N/A	100	174	Peak
2	5725.000	51.78	1.86	53.65	-14.55	68.20	100	174	Peak
3	* 5747.700	53.51	1.99	55.50	-12.70	68.20	100	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

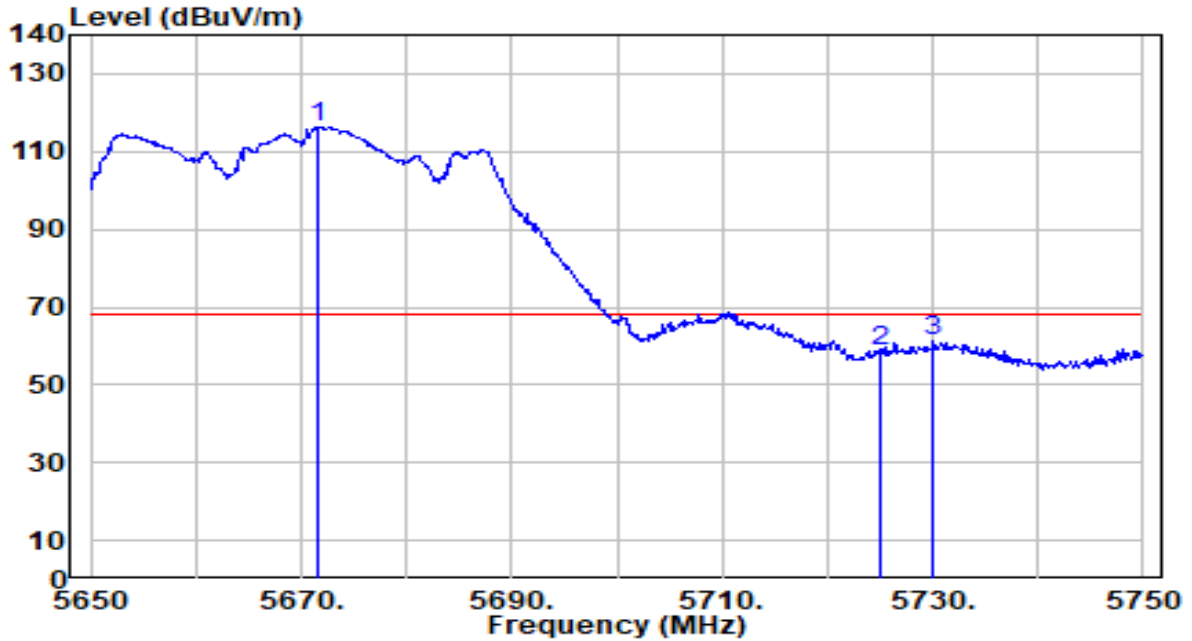


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.600	114.60	1.56	116.16	N/A	N/A	196	340	Peak
2	5725.000	56.56	1.86	58.42	-9.78	68.20	196	340	Peak
3	* 5730.000	59.46	1.89	61.35	-6.85	68.20	196	340	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 151 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

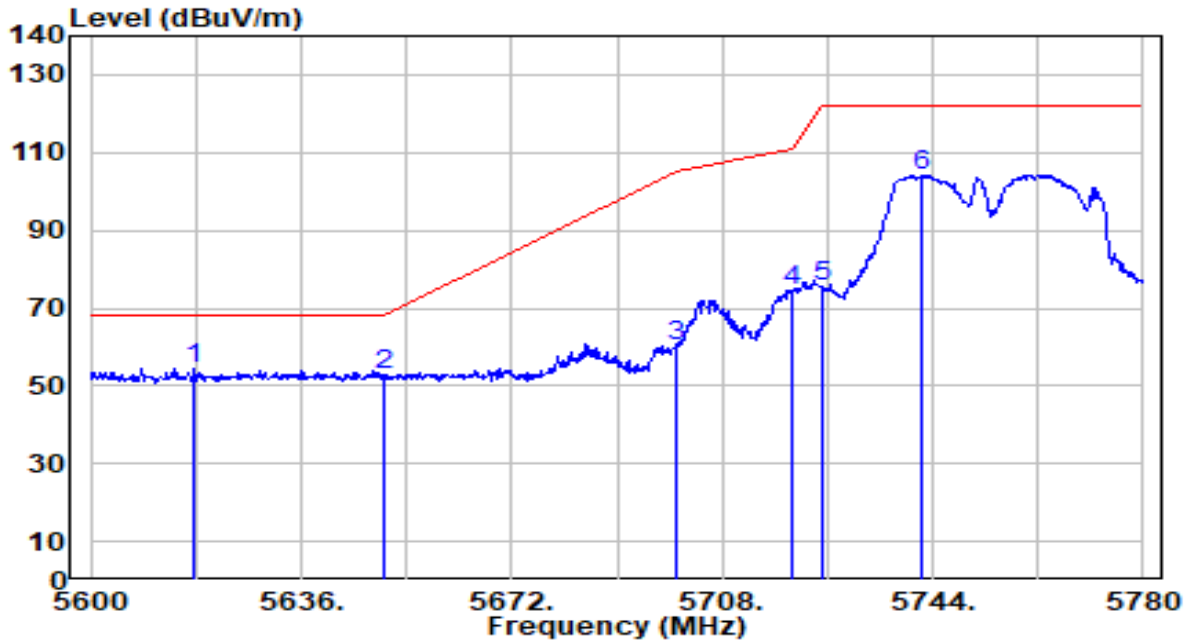


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5617.820	53.17	1.26	54.42	-13.78	68.20	289	176	Peak
2	5650.000	51.49	1.44	52.93	-15.27	68.20	289	176	Peak
3	5700.000	58.64	1.72	60.37	-44.83	105.20	289	176	Peak
4	5720.000	72.74	1.84	74.58	-36.22	110.80	289	176	Peak
5	5725.000	73.72	1.86	75.58	-46.62	122.20	289	176	Peak
6	5742.200	102.18	1.96	104.14	N/A	N/A	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 151 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

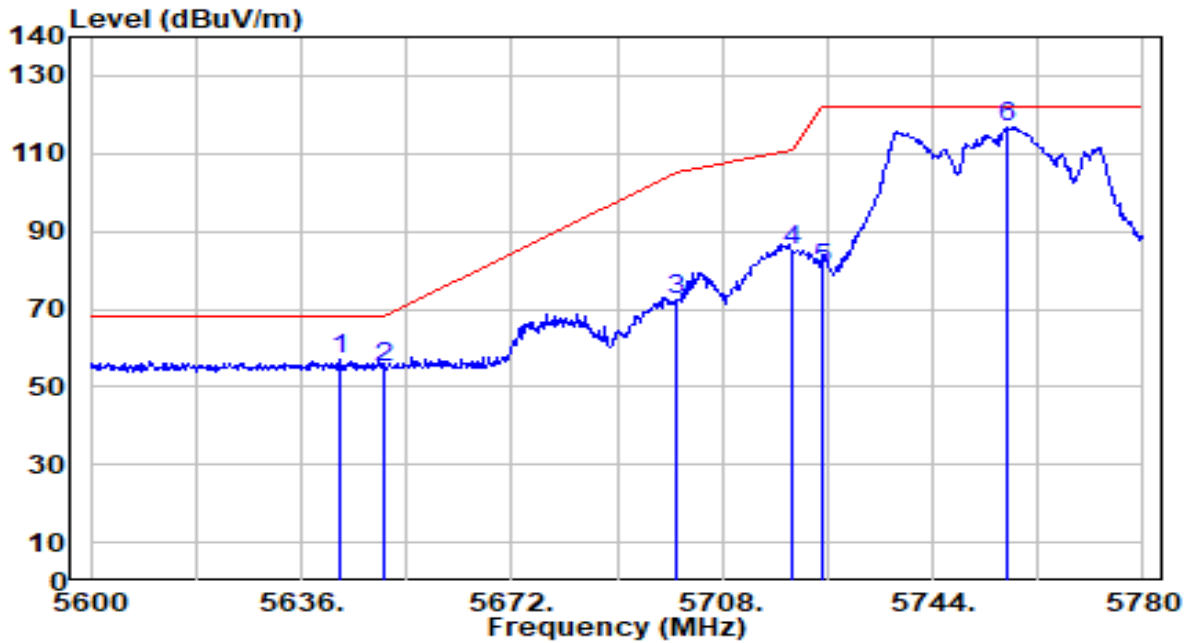


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5642.840	55.51	1.40	56.91	-11.29	68.20	200	343	Peak
2	5650.000	53.48	1.44	54.92	-13.28	68.20	200	343	Peak
3	5700.000	70.44	1.72	72.16	-33.04	105.20	200	343	Peak
4	5720.000	83.18	1.84	85.02	-25.78	110.80	200	343	Peak
5	5725.000	78.51	1.86	80.37	-41.83	122.20	200	343	Peak
6	5756.780	114.58	2.04	116.62	N/A	N/A	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 159 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

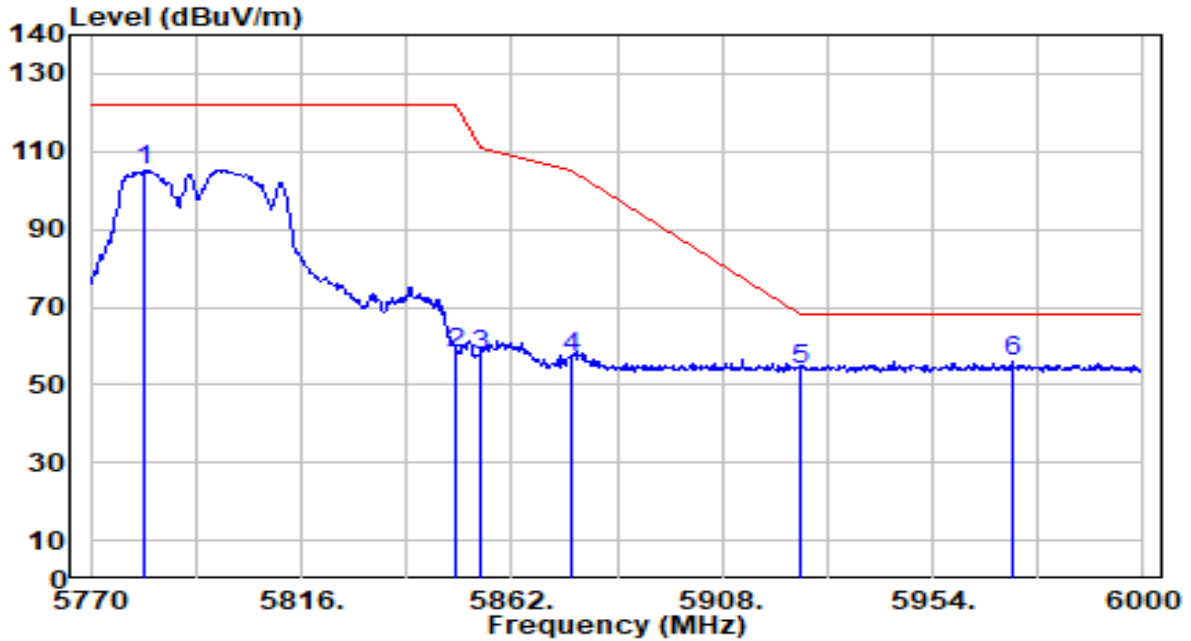


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5781.960	102.96	2.19	105.14	N/A	N/A	296	174	Peak
2	5850.000	55.85	2.27	58.12	-64.08	122.20	296	174	Peak
3	5855.000	55.43	2.27	57.69	-53.11	110.80	296	174	Peak
4	5875.000	55.05	2.26	57.31	-47.89	105.20	296	174	Peak
5	5925.000	51.55	2.25	53.79	-14.41	68.20	296	174	Peak
6	* 5971.480	53.64	2.23	55.87	-12.33	68.20	296	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_Band4_TX_CH 159 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

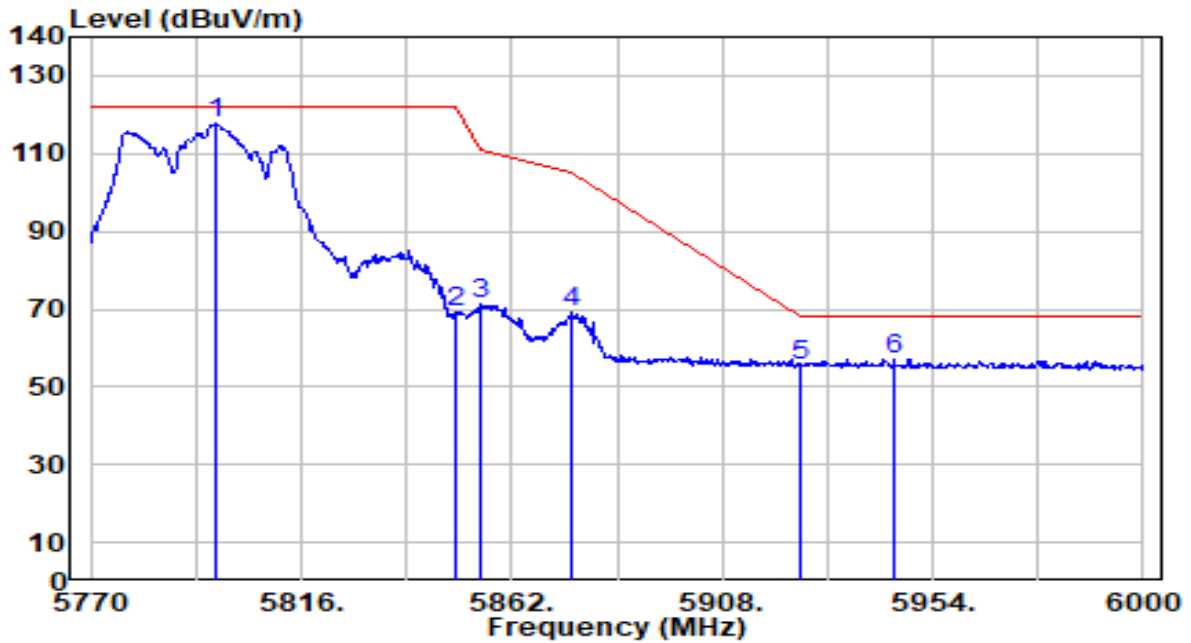


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5797.370	115.45	2.27	117.72	N/A	N/A	181	342	Peak
2	5850.000	66.87	2.27	69.14	-53.06	122.20	181	342	Peak
3	5855.000	68.91	2.27	71.18	-39.62	110.80	181	342	Peak
4	5875.000	66.71	2.26	68.97	-36.23	105.20	181	342	Peak
5	5925.000	53.43	2.25	55.68	-12.52	68.20	181	342	Peak
6	* 5945.490	54.90	2.24	57.14	-11.06	68.20	181	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

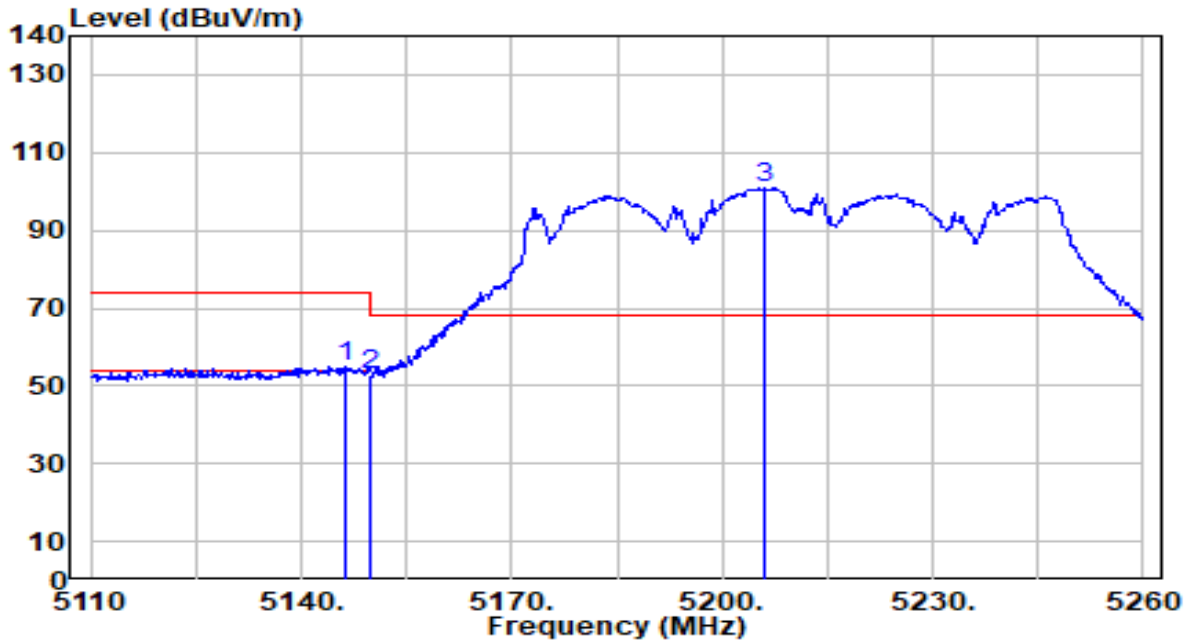


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5146.450	54.40	0.68	55.07	-18.93	74.00	306	205	Peak
2	5150.000	51.93	0.68	52.61	-21.39	74.00	306	205	Peak
3	5205.850	100.31	0.66	100.97	N/A	N/A	306	205	Peak

Note:

1. "\*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

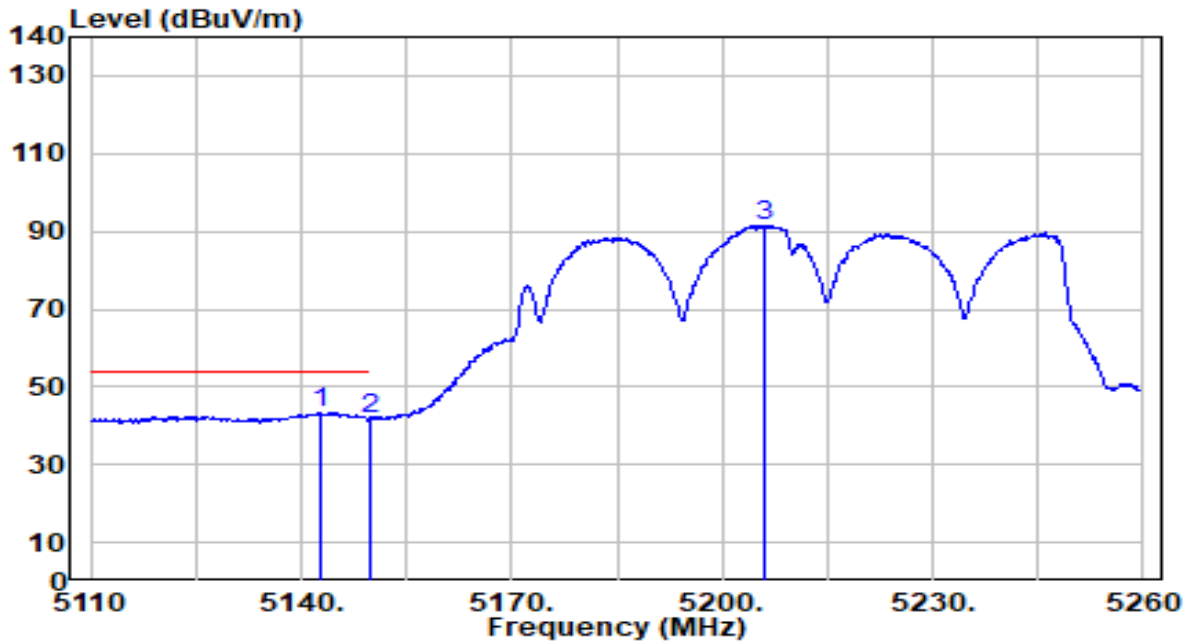


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5142.850	42.67	0.68	43.34	-10.66	54.00	306	205	Average
2		5150.000	41.09	0.68	41.76	-12.24	54.00	306	205	Average
3		5206.150	90.83	0.66	91.49	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

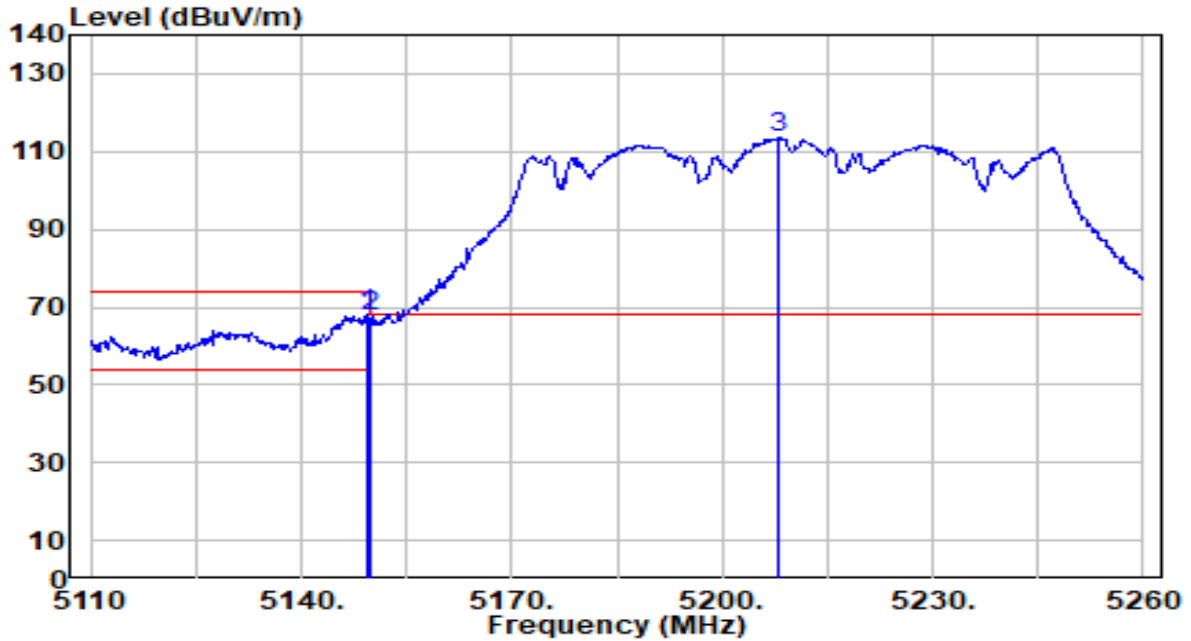


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.450	67.34	0.68	68.01	-5.99	74.00	168	76	Peak
2		5150.000	67.15	0.68	67.83	-6.17	74.00	168	76	Peak
3		5207.950	112.94	0.66	113.60	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

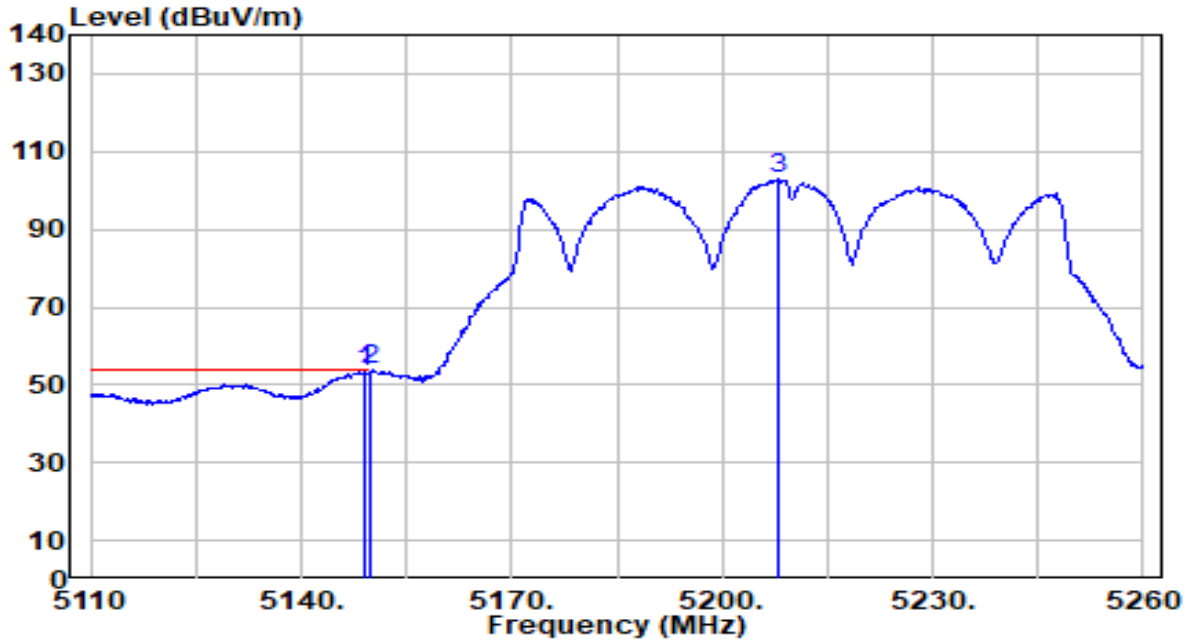


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.000	52.69	0.68	53.37	-0.63	54.00	168	76	Average
2	* 5150.000	53.04	0.68	53.72	-0.28	54.00	168	76	Average
3	5208.100	102.24	0.66	102.90	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

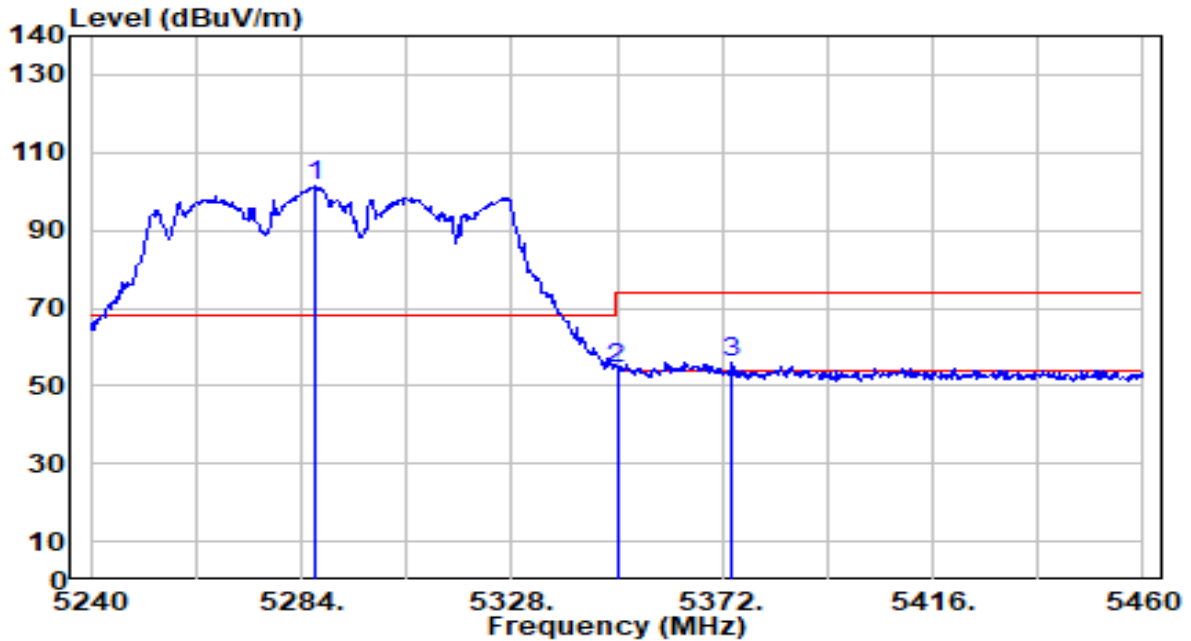


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.860	100.74	0.57	101.31	N/A	N/A	281	199	Peak
2	5350.000	54.03	0.51	54.54	-19.46	74.00	281	199	Peak
3	* 5374.200	55.60	0.48	56.08	-17.92	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

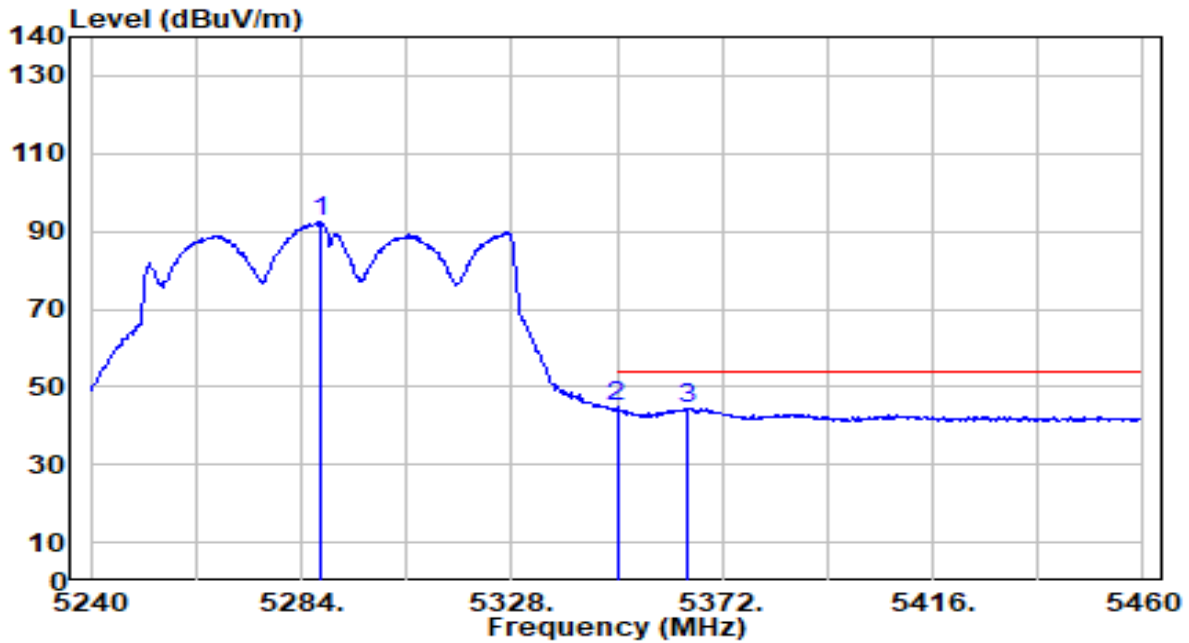


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.960	91.88	0.57	92.45	N/A	N/A	281	199	Average
2	* 5350.000	44.23	0.51	44.74	-9.26	54.00	281	199	Average
3	5364.960	44.02	0.49	44.51	-9.49	54.00	281	199	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

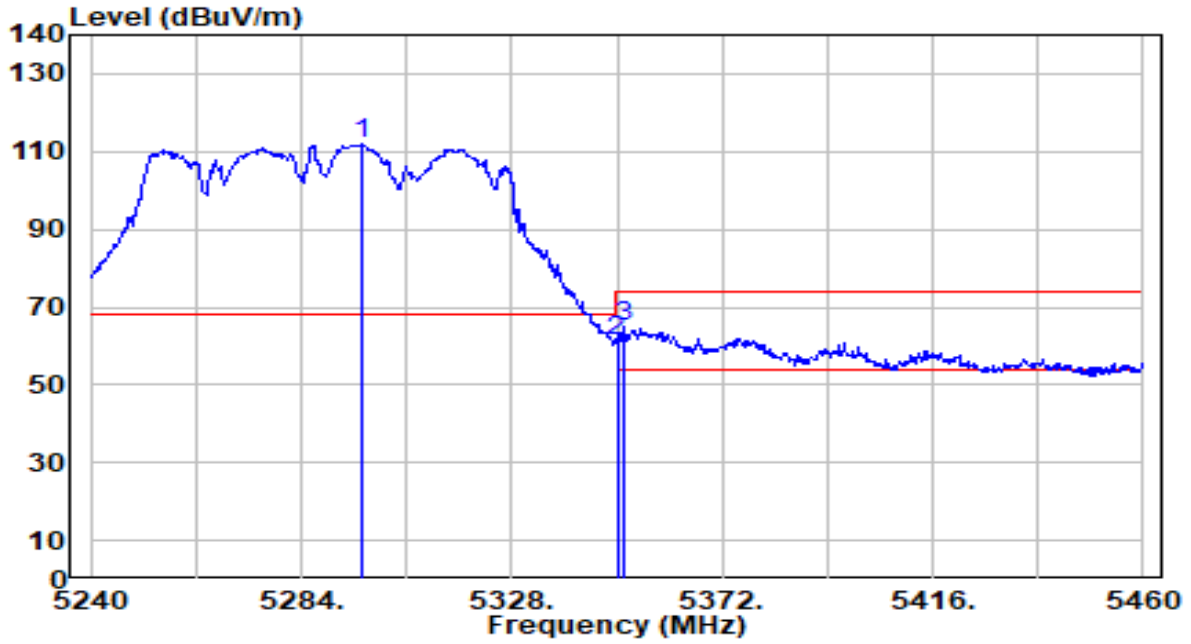


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.760	111.21	0.56	111.77	N/A	N/A	240	267	Peak
2	5350.000	60.73	0.51	61.23	-12.77	74.00	240	267	Peak
3	* 5351.540	64.50	0.50	65.00	-9.00	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

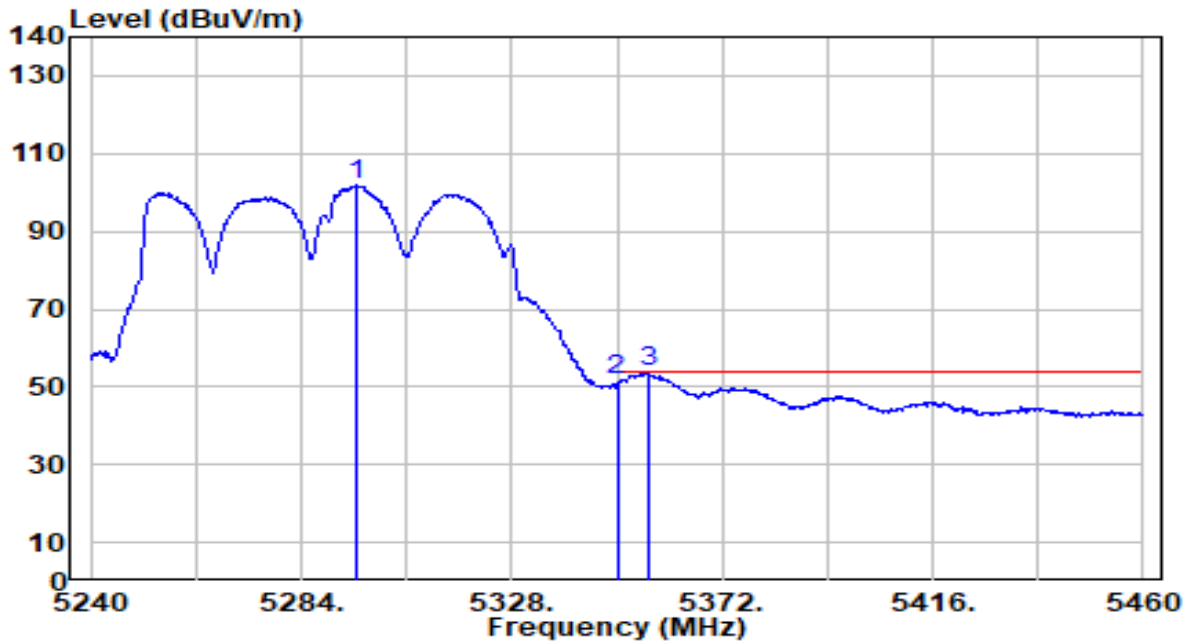


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.660	101.16	0.56	101.72	N/A	N/A	240	267	Average
2	5350.000	51.28	0.51	51.79	-2.21	54.00	240	267	Average
3	* 5356.380	53.30	0.50	53.80	-0.20	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

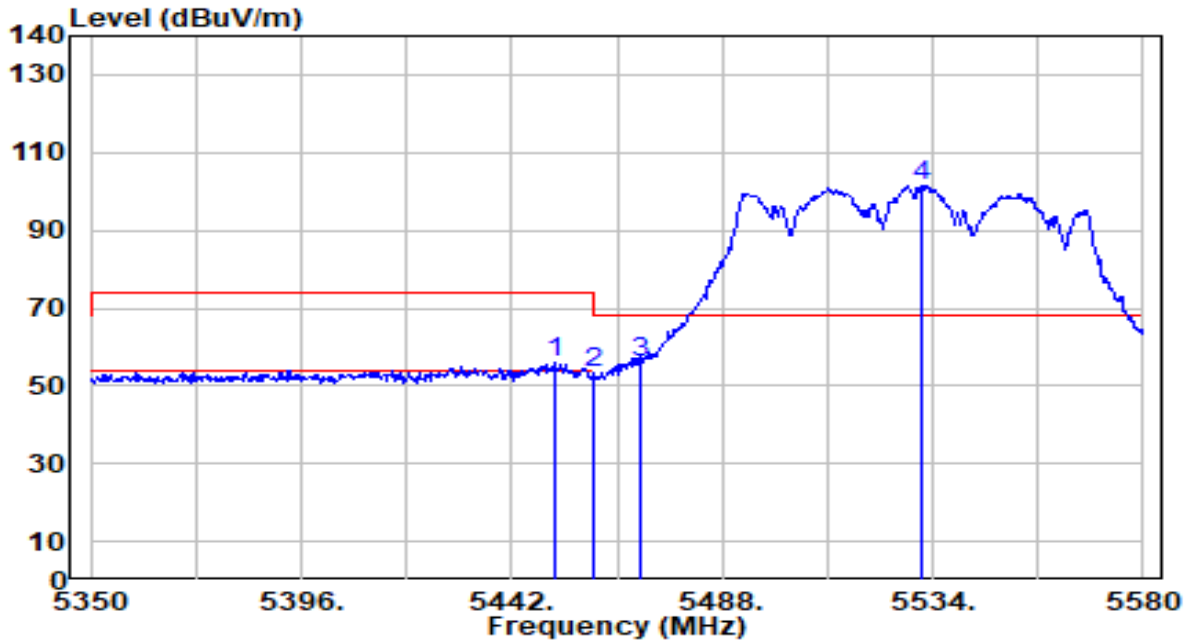


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.200	55.32	0.62	55.94	-18.06	74.00	213	38	Peak
2	5460.000	52.91	0.65	53.56	-20.44	74.00	213	38	Peak
3	* 5470.000	55.34	0.69	56.03	-12.17	68.20	213	38	Peak
4	5531.700	100.77	0.91	101.68	N/A	N/A	213	38	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

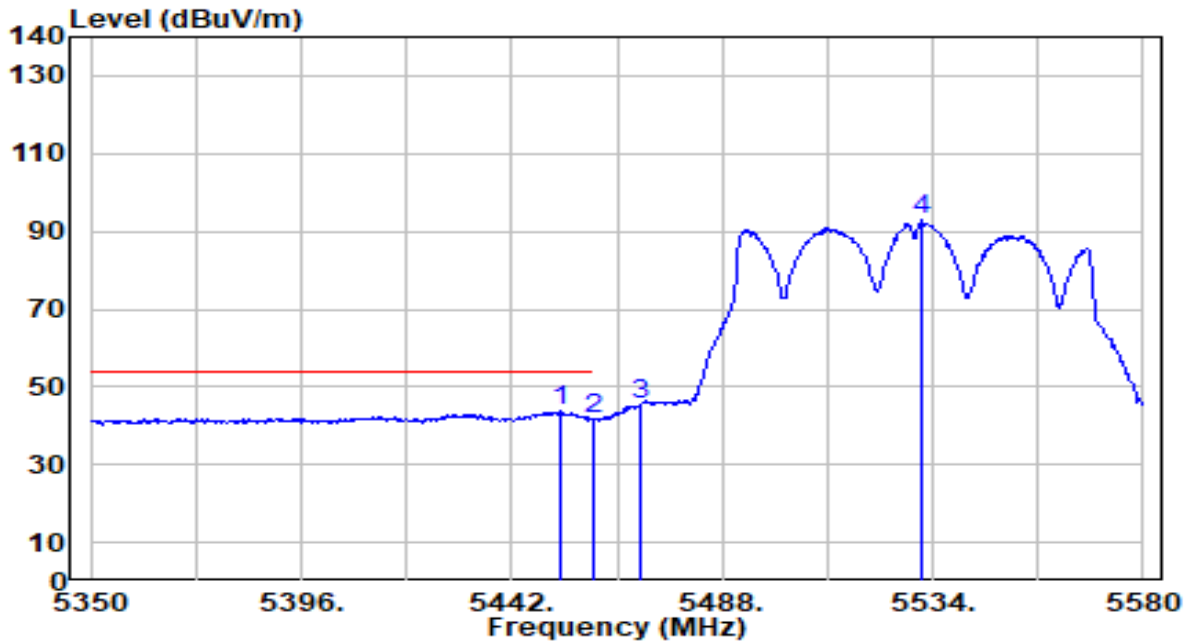


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5452.810	43.00	0.63	43.63	-10.37	54.00	213	38	Average
2		5460.000	40.83	0.65	41.49	-12.51	54.00	213	38	Average
3		5470.000	44.81	0.69	45.50	N/A	N/A	213	38	Average
4		5531.700	91.85	0.91	92.76	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

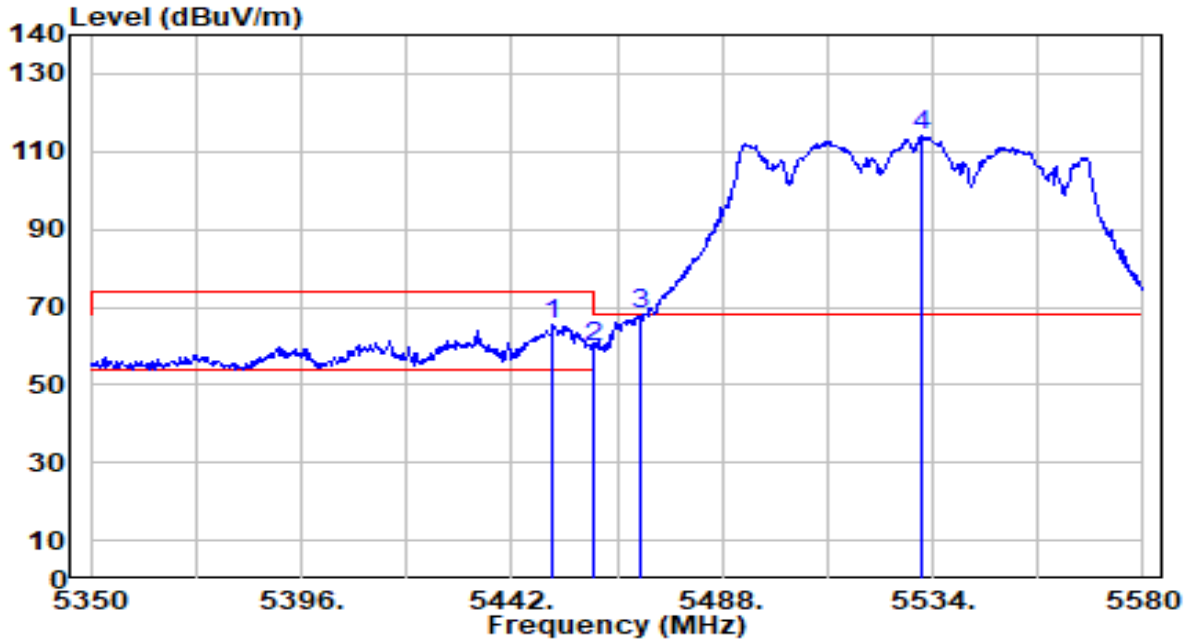


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.970	64.91	0.62	65.53	-8.47	74.00	192	82	Peak
2	5460.000	58.93	0.65	59.58	-14.42	74.00	192	82	Peak
3	* 5470.000	67.25	0.69	67.94	-0.26	68.20	192	82	Peak
4	5531.700	113.43	0.91	114.34	N/A	N/A	192	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

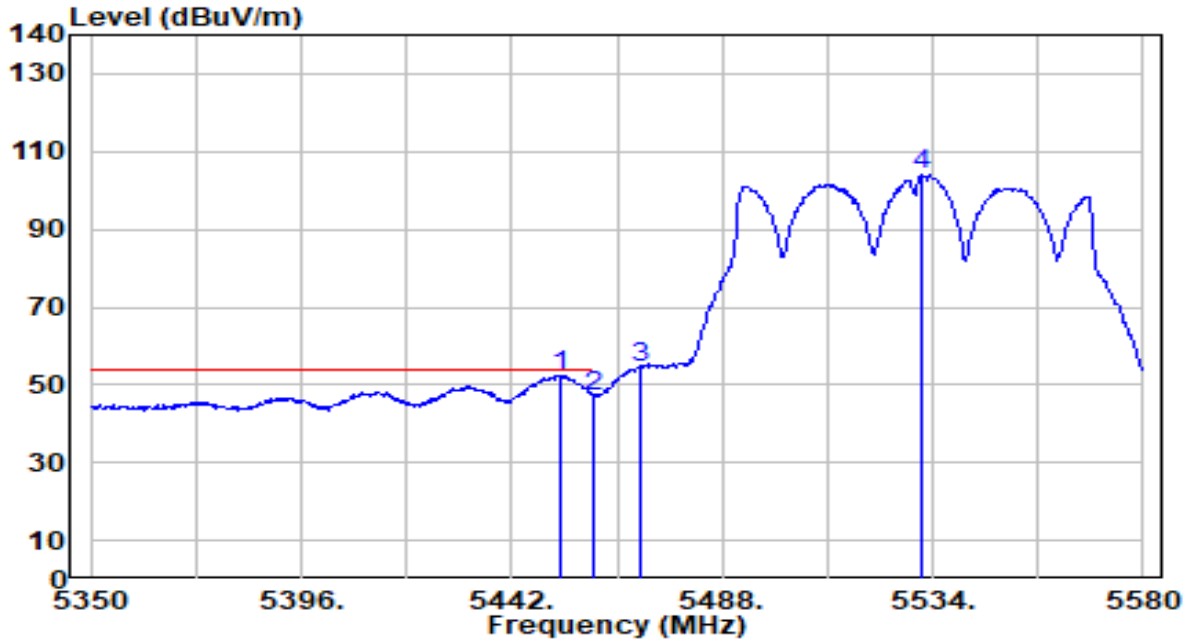


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	51.78	0.63	52.41	-1.59	54.00	192	82	Average
2		46.51	0.65	47.16	-6.84	54.00	192	82	Average
3		53.74	0.69	54.43	N/A	N/A	192	82	Average
4		103.18	0.91	104.09	N/A	N/A	192	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band4_TX_CH 155 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

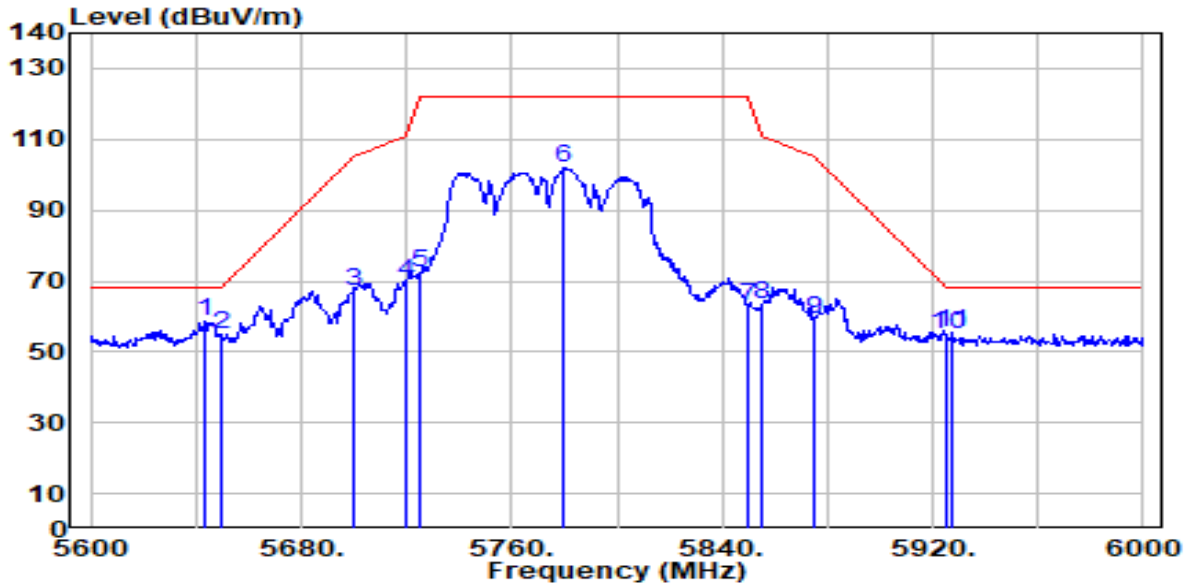


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5643.600	57.37	1.40	58.78	-9.42	68.20	289	176	Peak
2		5650.000	53.62	1.44	55.06	-13.14	68.20	289	176	Peak
3		5700.000	65.55	1.72	67.27	-37.93	105.20	289	176	Peak
4		5720.000	68.05	1.84	69.89	-40.91	110.80	289	176	Peak
5		5725.000	70.28	1.86	72.14	-50.06	122.20	289	176	Peak
6		5779.600	99.81	2.17	101.98	N/A	N/A	289	176	Peak
7		5850.000	60.50	2.27	62.77	-59.43	122.20	289	176	Peak
8		5855.000	60.92	2.27	63.19	-47.61	110.80	289	176	Peak
9		5875.000	57.07	2.26	59.33	-45.87	105.20	289	176	Peak
10		5925.000	52.83	2.25	55.08	-13.12	68.20	289	176	Peak
11		5927.200	53.21	2.24	55.45	-12.75	68.20	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_Band4_TX_CH 155 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

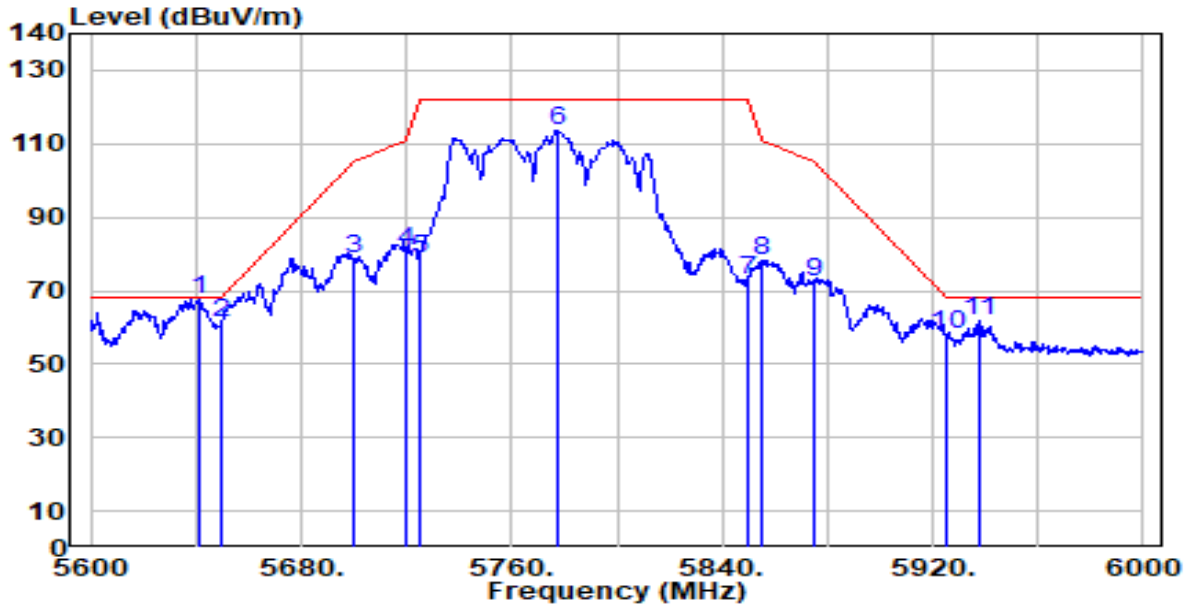


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5641.200	66.27	1.39	67.66	-0.54	68.20	200	343	Peak
2	5650.000	60.01	1.44	61.45	-6.75	68.20	200	343	Peak
3	5700.000	76.96	1.72	78.68	-26.52	105.20	200	343	Peak
4	5720.000	78.86	1.84	80.69	-30.11	110.80	200	343	Peak
5	5725.000	77.05	1.86	78.92	-43.28	122.20	200	343	Peak
6	5777.600	111.61	2.16	113.77	N/A	N/A	200	343	Peak
7	5850.000	70.69	2.27	72.96	-49.24	122.20	200	343	Peak
8	5855.000	75.81	2.27	78.08	-32.72	110.80	200	343	Peak
9	5875.000	70.27	2.26	72.53	-32.67	105.20	200	343	Peak
10	5925.000	56.05	2.25	58.30	-9.90	68.20	200	343	Peak
11	5937.600	59.78	2.24	62.02	-6.18	68.20	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

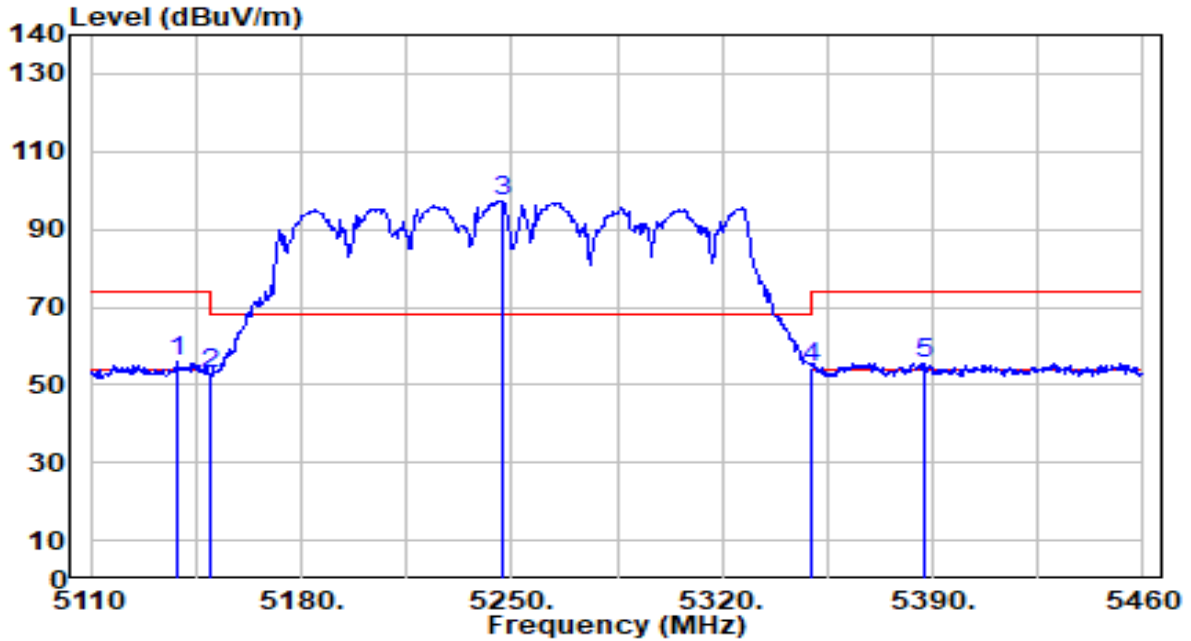


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.700	0.68	55.91	-18.09	74.00	306	205	Peak
2		5150.000	0.68	52.65	-21.35	74.00	306	205	Peak
3		5247.200	0.62	97.30	N/A	N/A	306	205	Peak
4		5350.000	0.51	54.58	-19.42	74.00	306	205	Peak
5		5386.850	0.46	55.71	-18.29	74.00	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

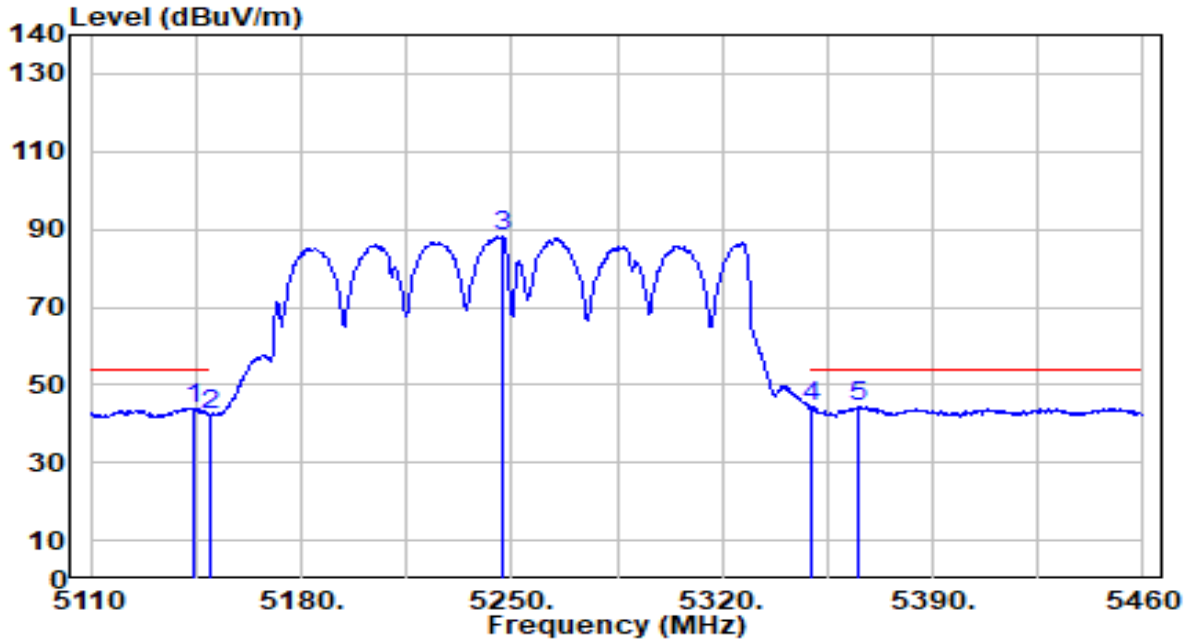


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.950	43.41	0.68	44.08	-9.92	54.00	306	205	Average
2	5150.000	41.73	0.68	42.41	-11.59	54.00	306	205	Average
3	5246.850	87.48	0.62	88.09	N/A	N/A	306	205	Average
4	5350.000	43.69	0.51	44.19	-9.81	54.00	306	205	Average
5	* 5365.500	43.85	0.49	44.34	-9.66	54.00	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

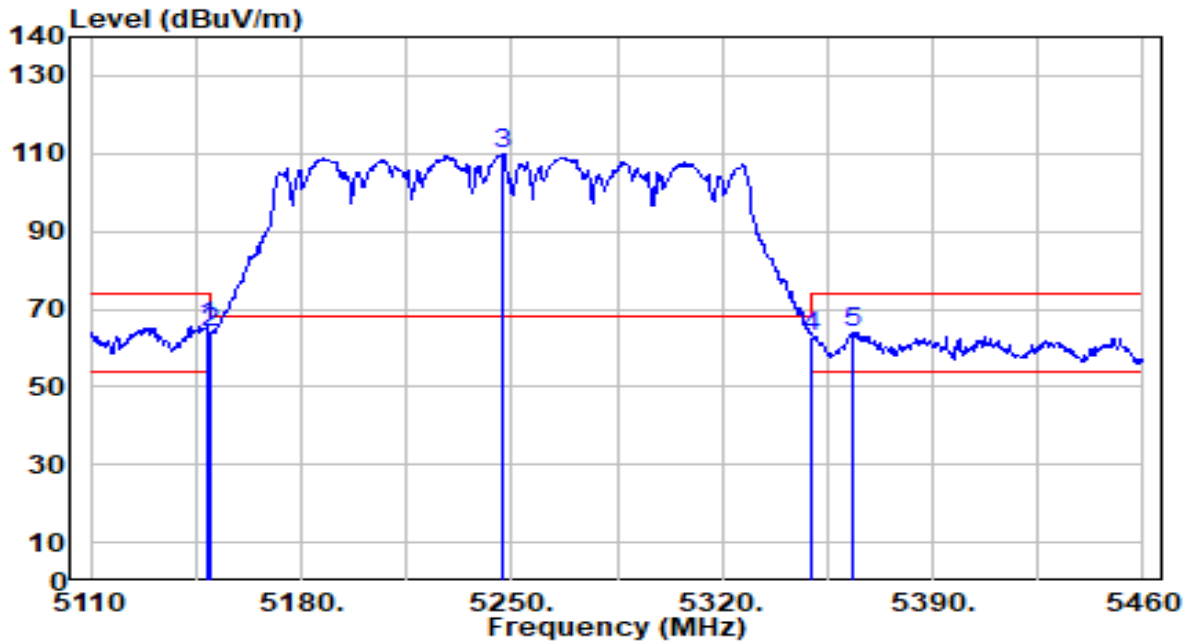


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	64.98	0.68	65.65	-8.35	74.00	168	76	Peak
2		63.13	0.68	63.81	-10.19	74.00	168	76	Peak
3		109.39	0.62	110.00	N/A	N/A	168	76	Peak
4		62.44	0.51	62.94	-11.06	74.00	168	76	Peak
5		63.43	0.49	63.92	-10.08	74.00	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

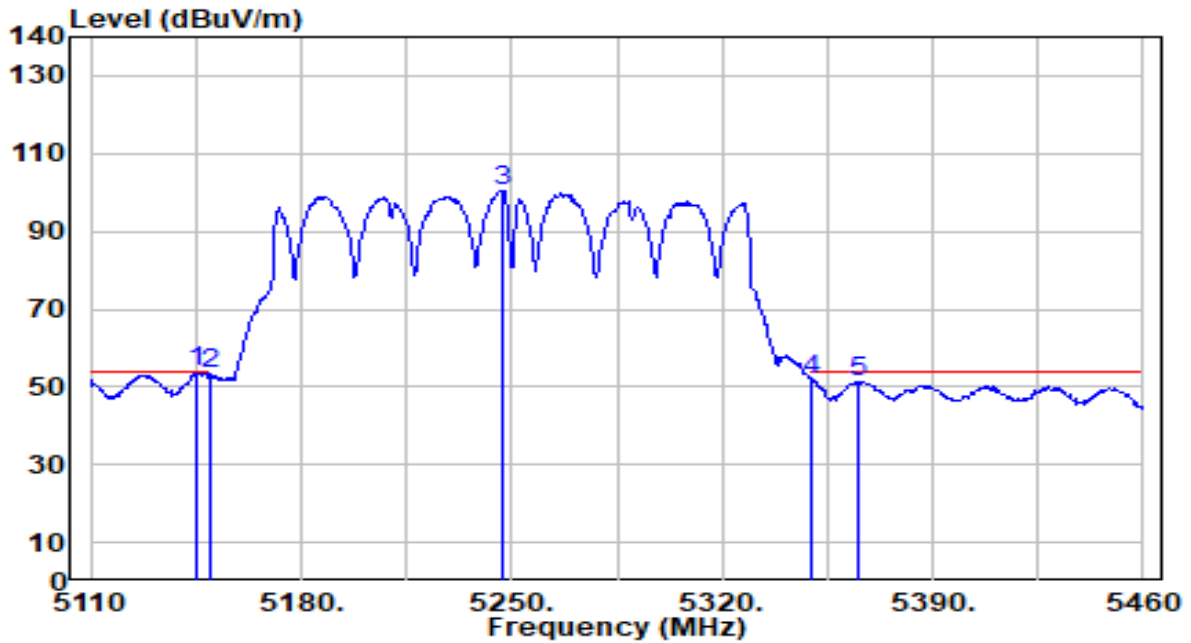


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5145.350	53.07	0.68	53.75	-0.25	54.00	168	76	Average
2		5150.000	52.75	0.68	53.42	-0.58	54.00	168	76	Average
3		5246.850	99.99	0.62	100.61	N/A	N/A	168	76	Average
4		5350.000	51.25	0.51	51.75	-2.25	54.00	168	76	Average
5		5365.500	50.98	0.49	51.47	-2.53	54.00	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

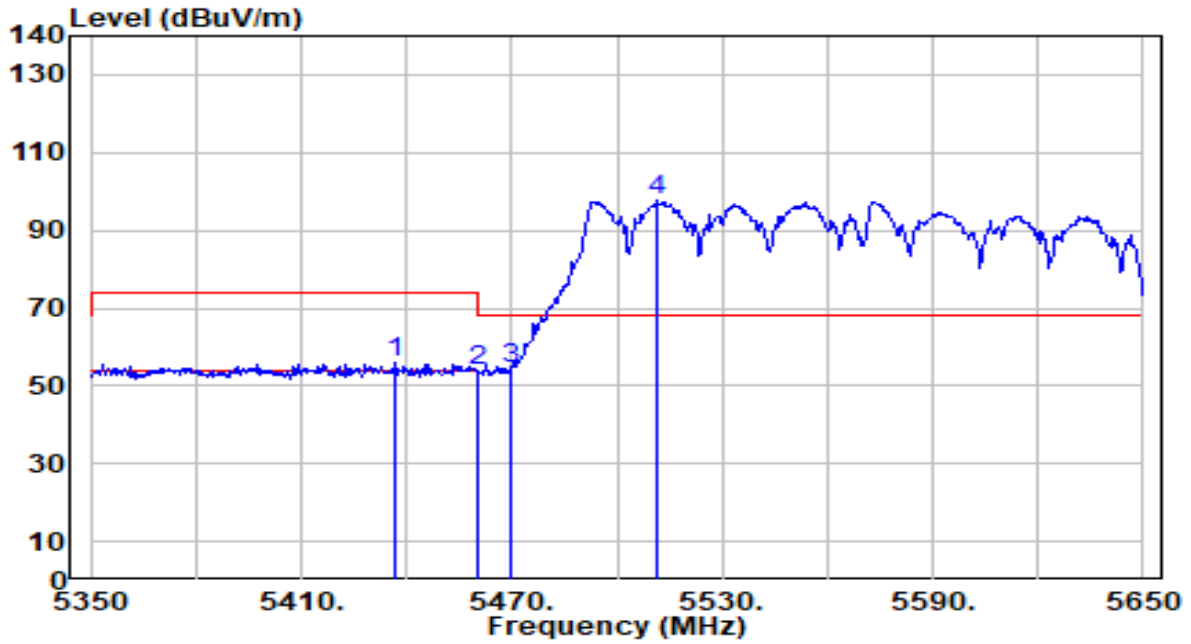


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5436.400	55.39	0.57	55.96	-18.04	74.00	213	38	Peak
2	5460.000	53.05	0.65	53.70	-20.30	74.00	213	38	Peak
3	* 5470.000	53.66	0.69	54.35	-13.85	68.20	213	38	Peak
4	5511.700	96.74	0.83	97.57	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

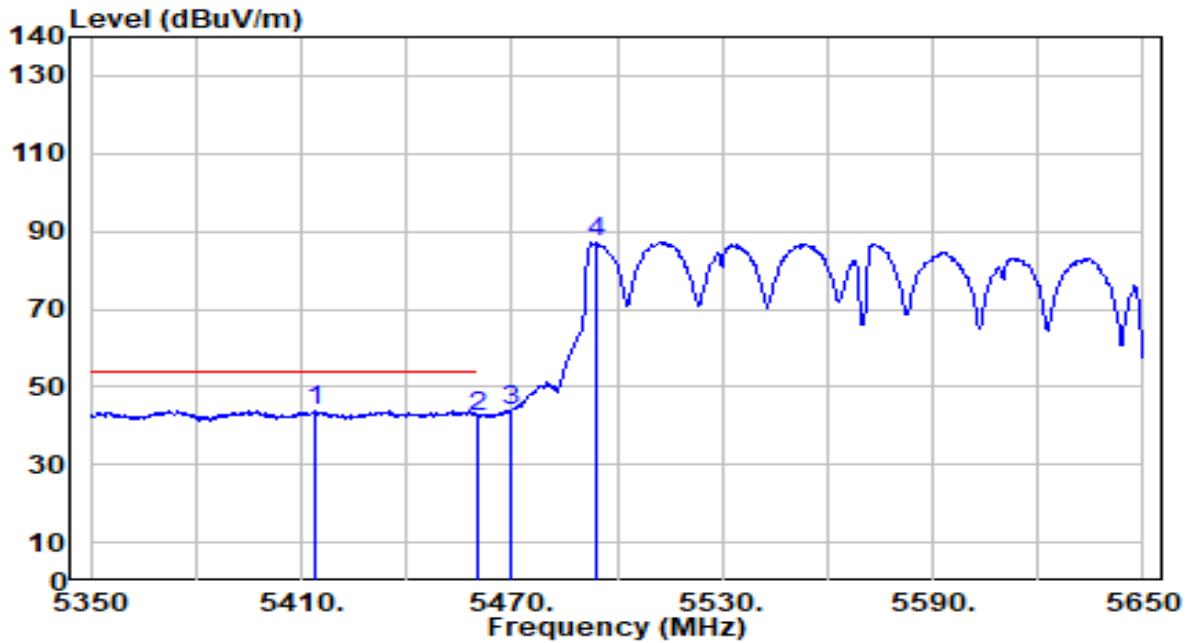


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5413.900	43.24	0.50	43.74	-10.26	54.00	213	38	Average
2		5460.000	41.51	0.65	42.16	-11.84	54.00	213	38	Average
3		5470.000	43.39	0.69	44.07	N/A	N/A	213	38	Average
4		5494.300	86.56	0.77	87.33	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

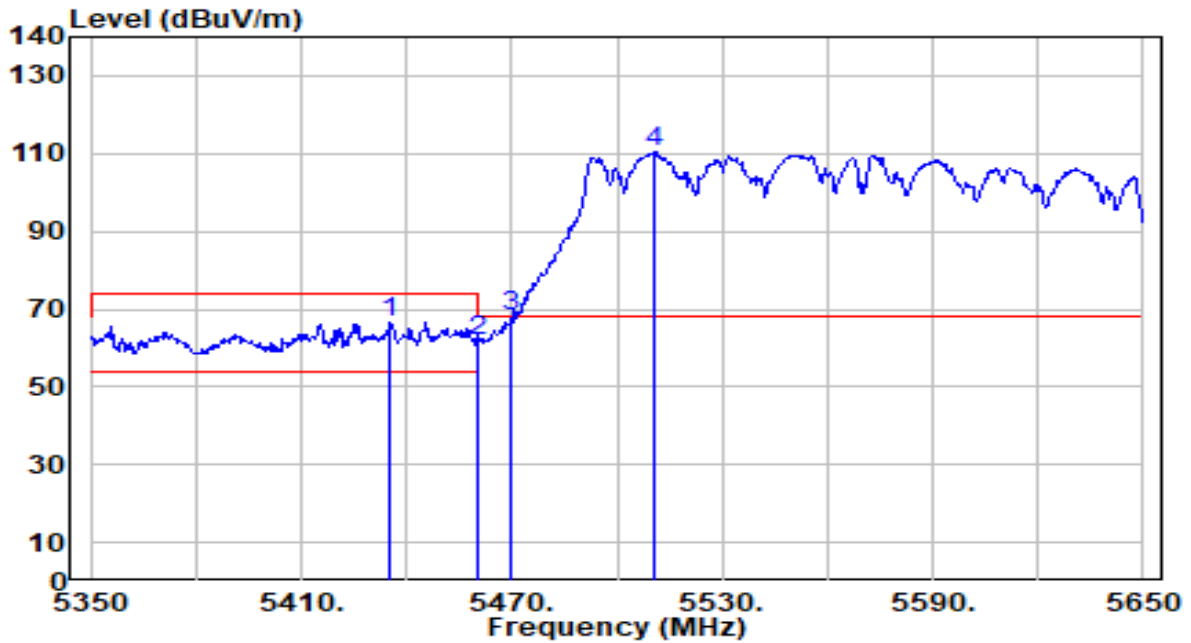


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5435.500	66.21	0.57	66.78	-7.22	74.00	196	82	Peak
2	5460.000	60.93	0.65	61.59	-12.41	74.00	196	82	Peak
3	* 5470.000	67.27	0.69	67.96	-0.24	68.20	196	82	Peak
4	5510.500	109.46	0.83	110.29	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

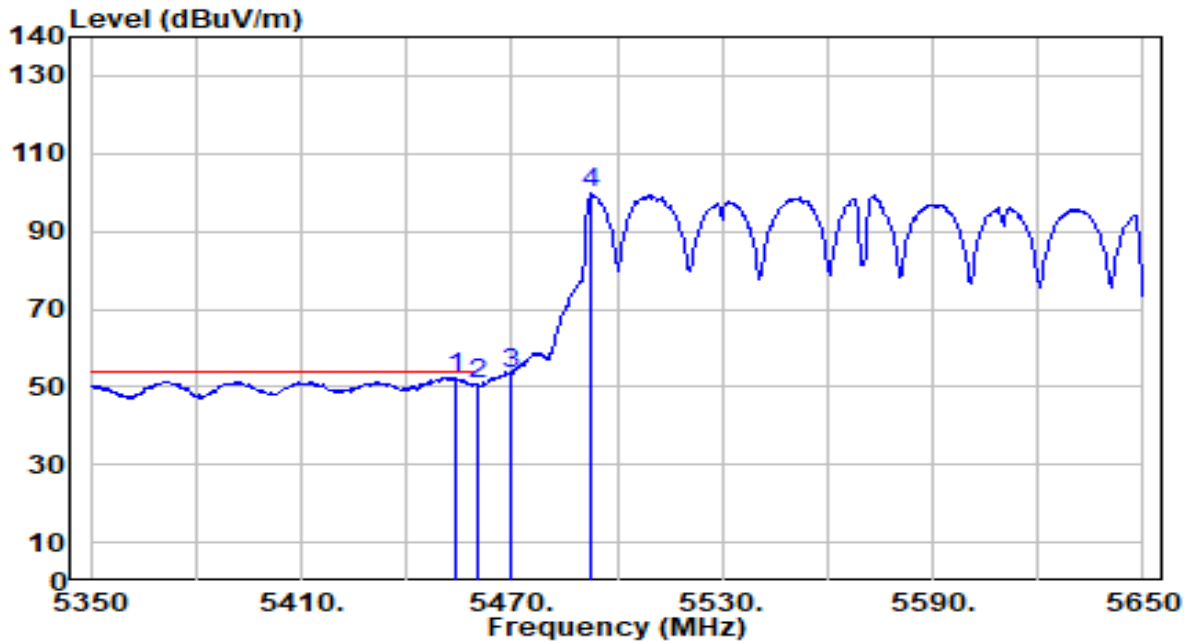


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5454.400	51.79	0.63	52.42	-1.58	54.00	196	82	Average
2		5460.000	50.30	0.65	50.95	-3.05	54.00	196	82	Average
3		5470.000	52.71	0.69	53.40	N/A	N/A	196	82	Average
4		5492.500	98.87	0.76	99.64	N/A	N/A	196	82	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

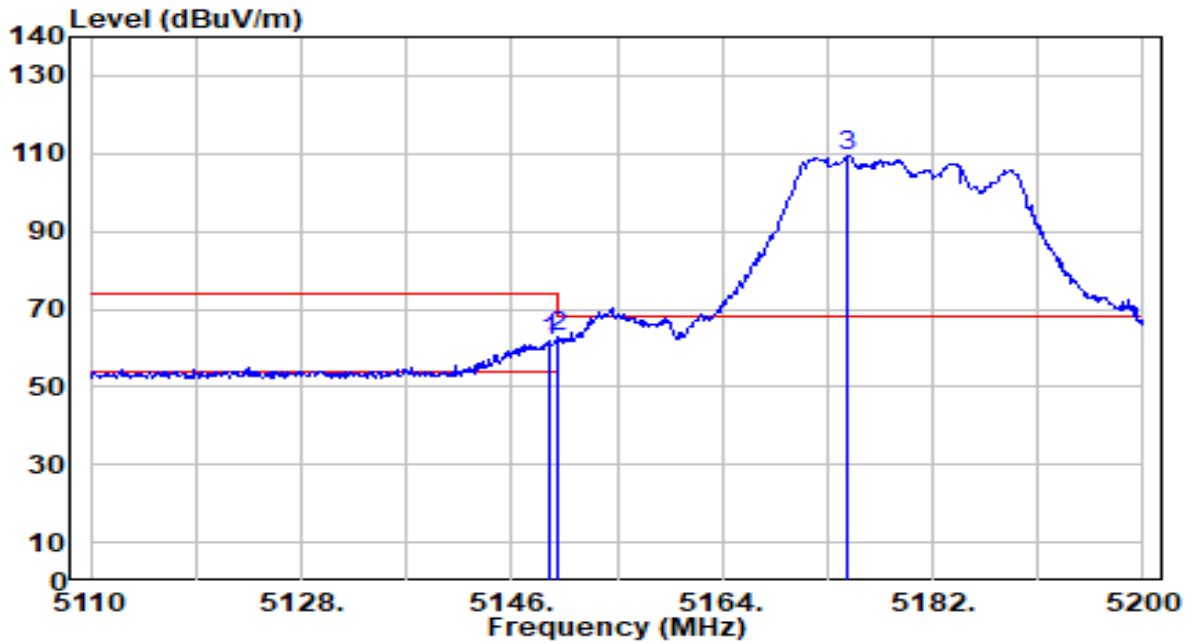


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.150	61.32	0.68	61.99	-12.01	74.00	306	205	Peak
2	* 5150.000	61.95	0.68	62.63	-11.37	74.00	306	205	Peak
3	5174.800	108.72	0.67	109.39	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

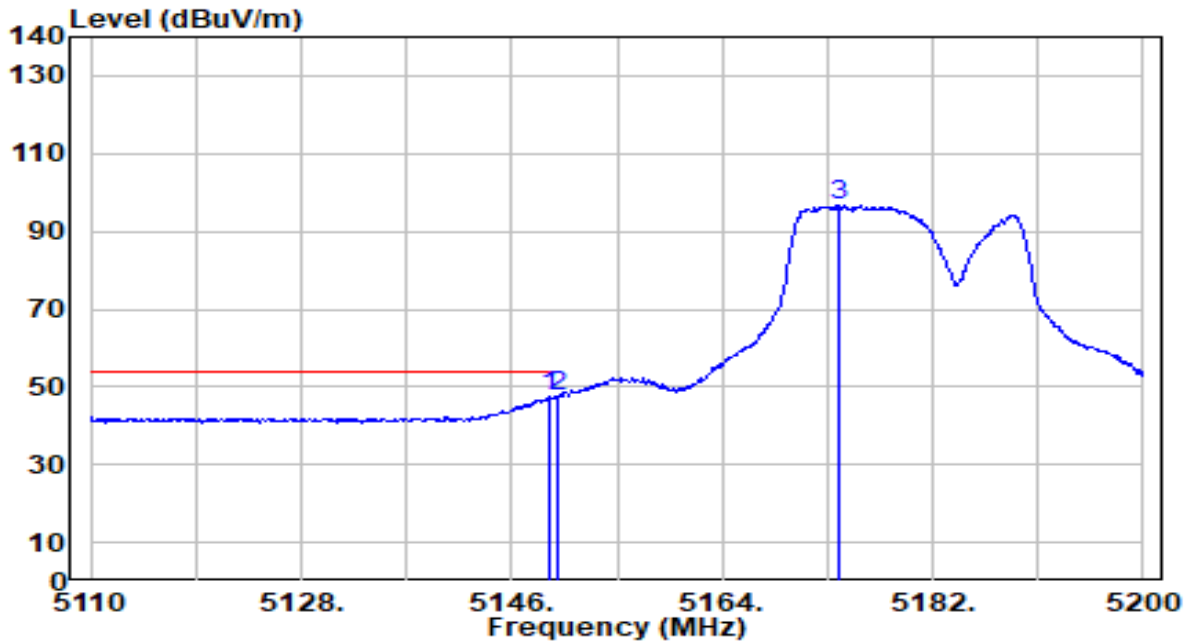


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.330	46.66	0.68	47.34	-6.66	54.00	306	205	Average
2		5150.000	46.62	0.68	47.30	-6.70	54.00	306	205	Average
3		5174.080	96.06	0.67	96.74	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

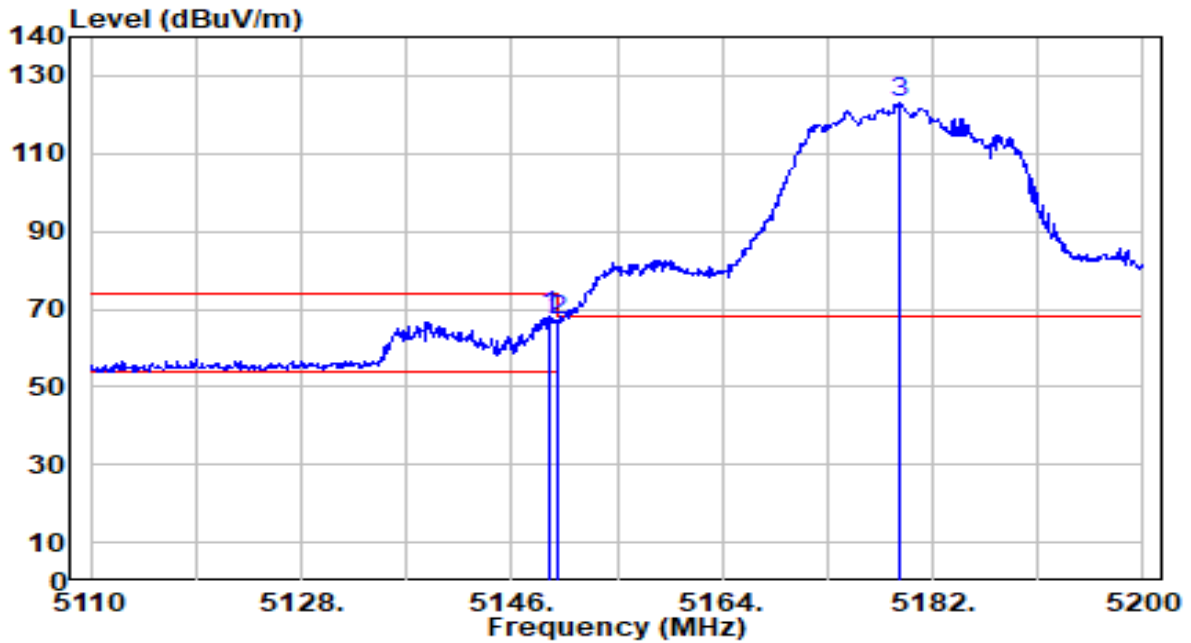


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.330	67.49	0.68	68.16	-5.84	74.00	168	76	Peak
2		5150.000	66.68	0.68	67.36	-6.64	74.00	168	76	Peak
3		5179.120	122.33	0.67	123.00	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

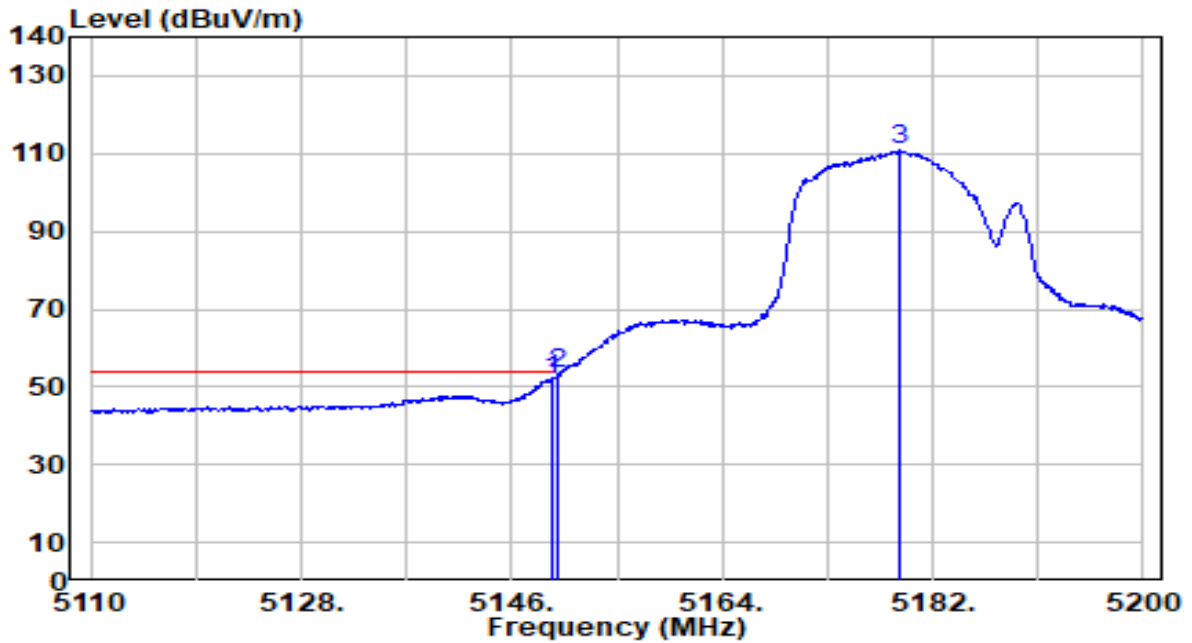


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	51.33	0.68	52.01	-1.99	54.00	168	76	Average
2	* 5150.000	52.50	0.68	53.18	-0.82	54.00	168	76	Average
3	5179.120	110.05	0.67	110.72	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

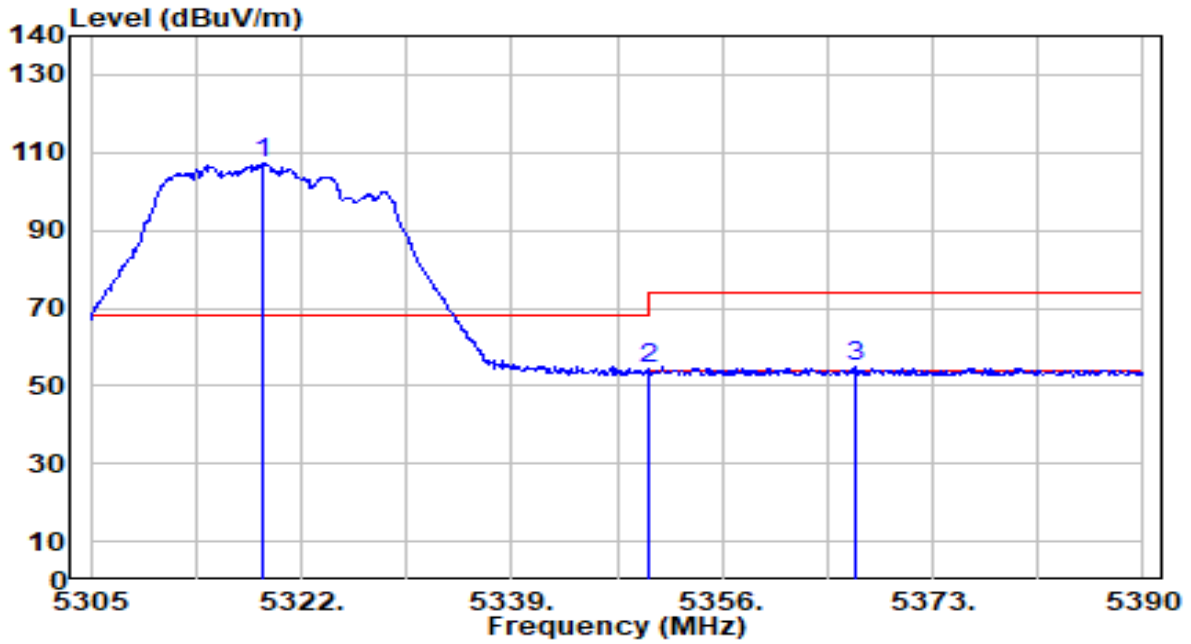


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.940	106.74	0.54	107.28	N/A	N/A	281	199	Peak
2	5350.000	53.82	0.51	54.33	-19.67	74.00	281	199	Peak
3	* 5366.795	54.33	0.49	54.82	-19.18	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

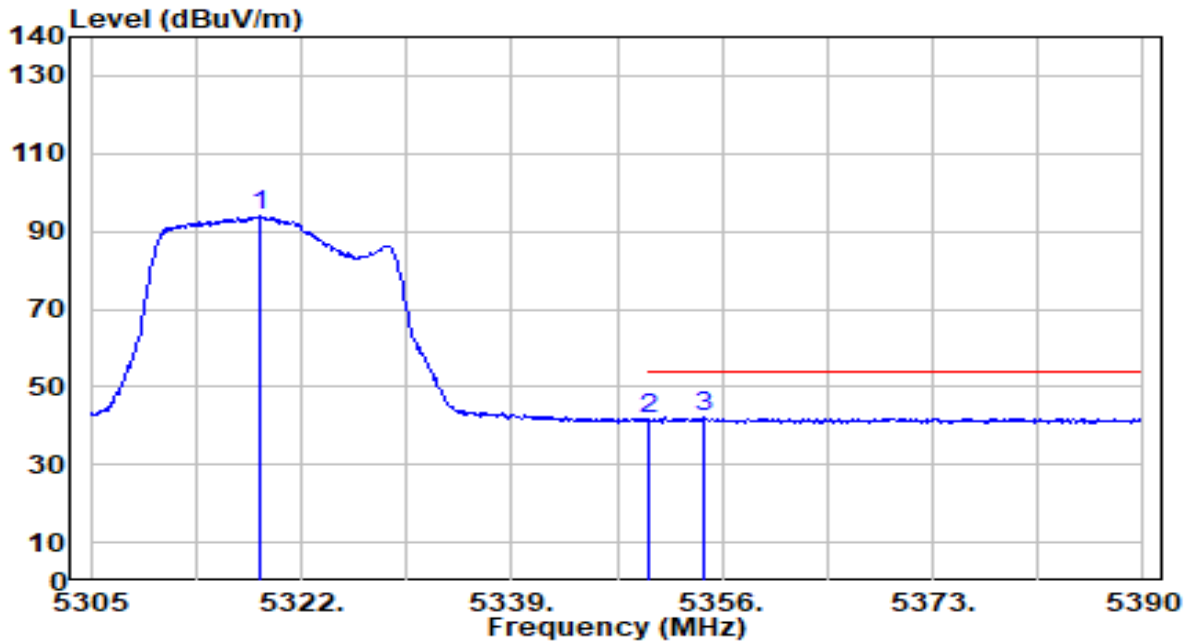


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.770	93.39	0.54	93.93	N/A	N/A	281	199	Average
2	5350.000	40.99	0.51	41.50	-12.50	54.00	281	199	Average
3	* 5354.470	41.62	0.50	42.12	-11.88	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

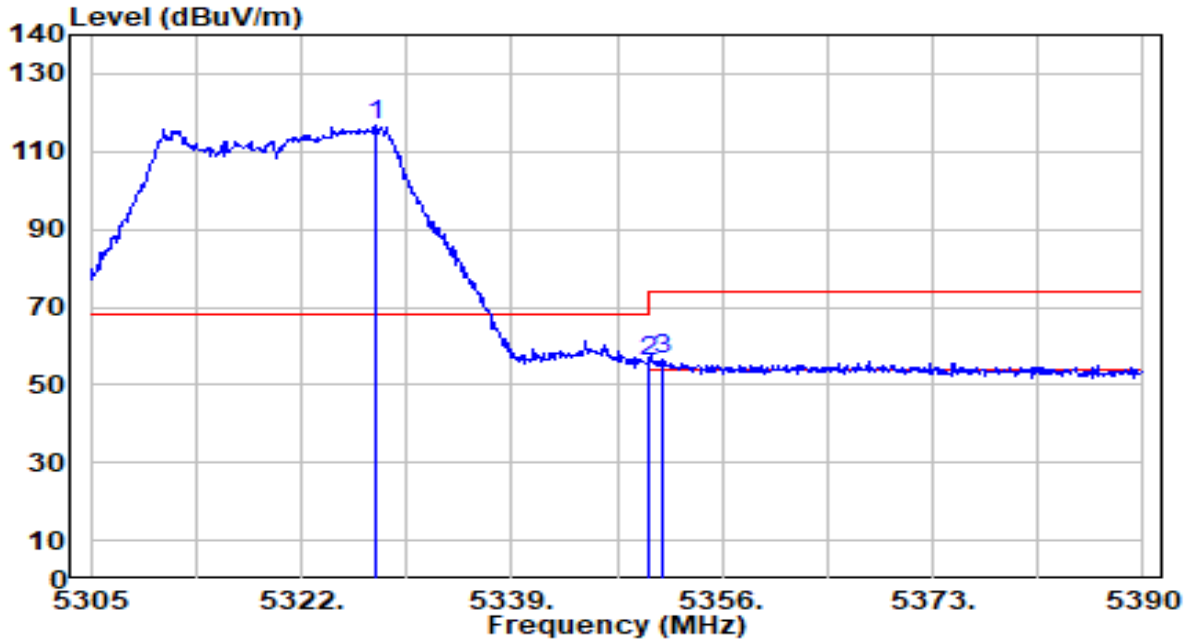


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.035	116.29	0.53	116.82	N/A	N/A	240	267	Peak
2	5350.000	55.28	0.51	55.79	-18.21	74.00	240	267	Peak
3	* 5351.155	56.25	0.50	56.75	-17.25	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

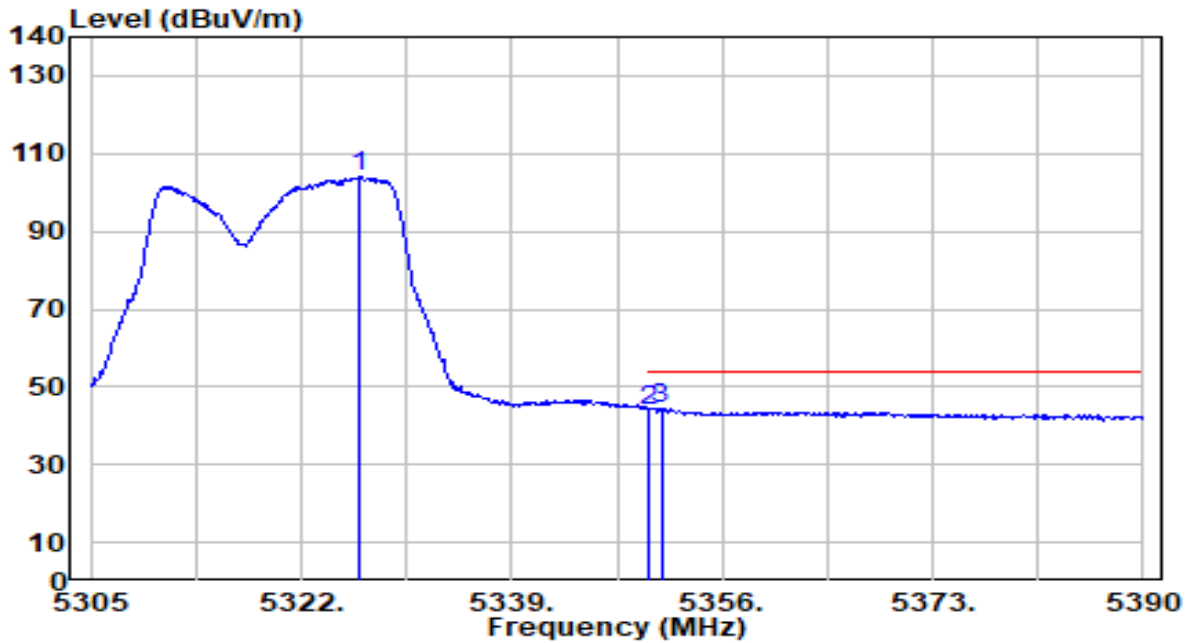


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.760	103.40	0.53	103.93	N/A	N/A	240	267	Average
2	5350.000	43.41	0.51	43.92	-10.08	54.00	240	267	Average
3	* 5351.070	43.82	0.50	44.32	-9.68	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

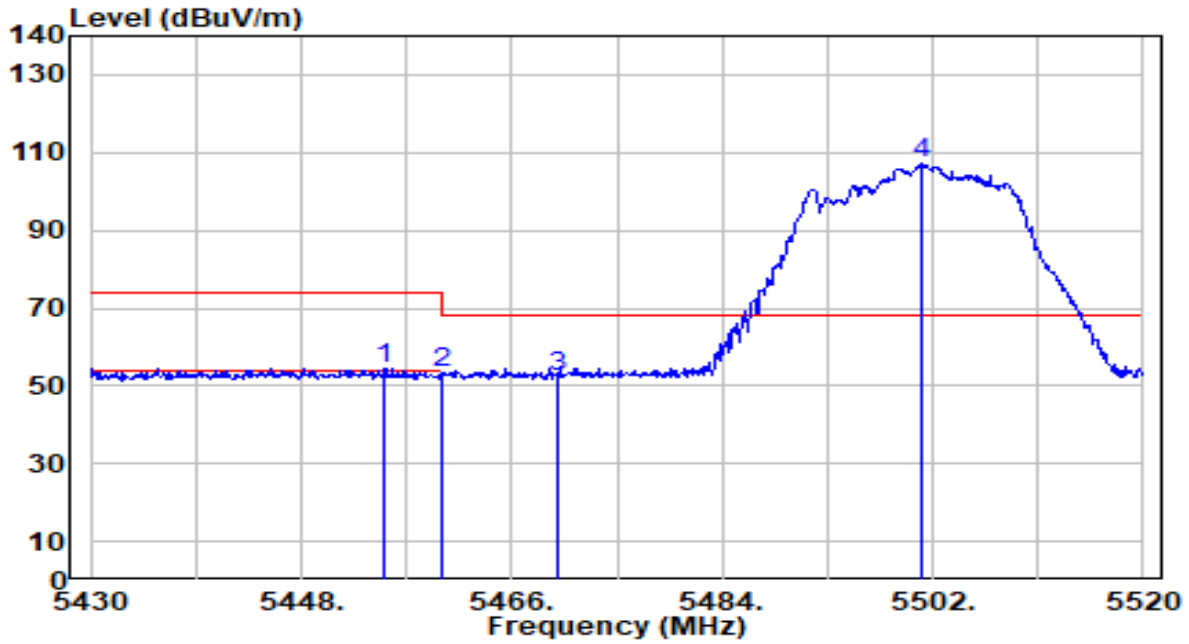


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.110	53.97	0.64	54.61	-19.39	74.00	213	38	Peak
2	5460.000	52.69	0.65	53.35	-20.65	74.00	213	38	Peak
3	* 5470.000	51.58	0.69	52.27	-15.93	68.20	213	38	Peak
4	5501.100	106.56	0.79	107.35	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

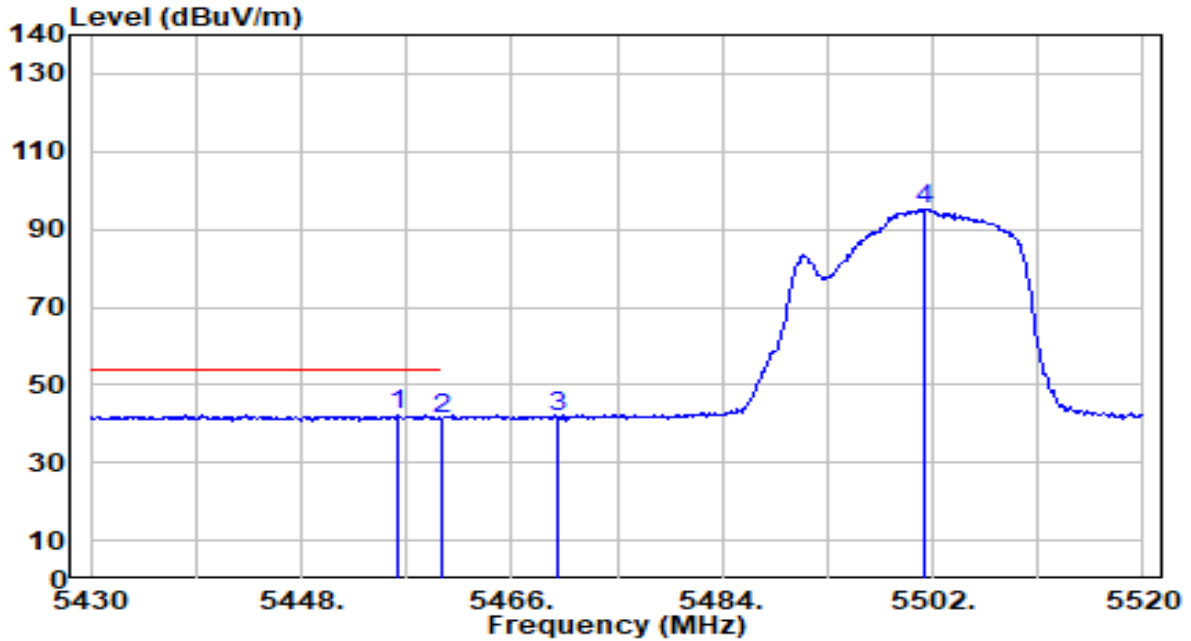


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5456.280	41.49	0.64	42.13	-11.87	54.00	213	38	Average
2	5460.000	40.64	0.65	41.29	-12.71	54.00	213	38	Average
3	5470.000	40.81	0.69	41.49	N/A	N/A	213	38	Average
4	5501.190	94.51	0.79	95.30	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

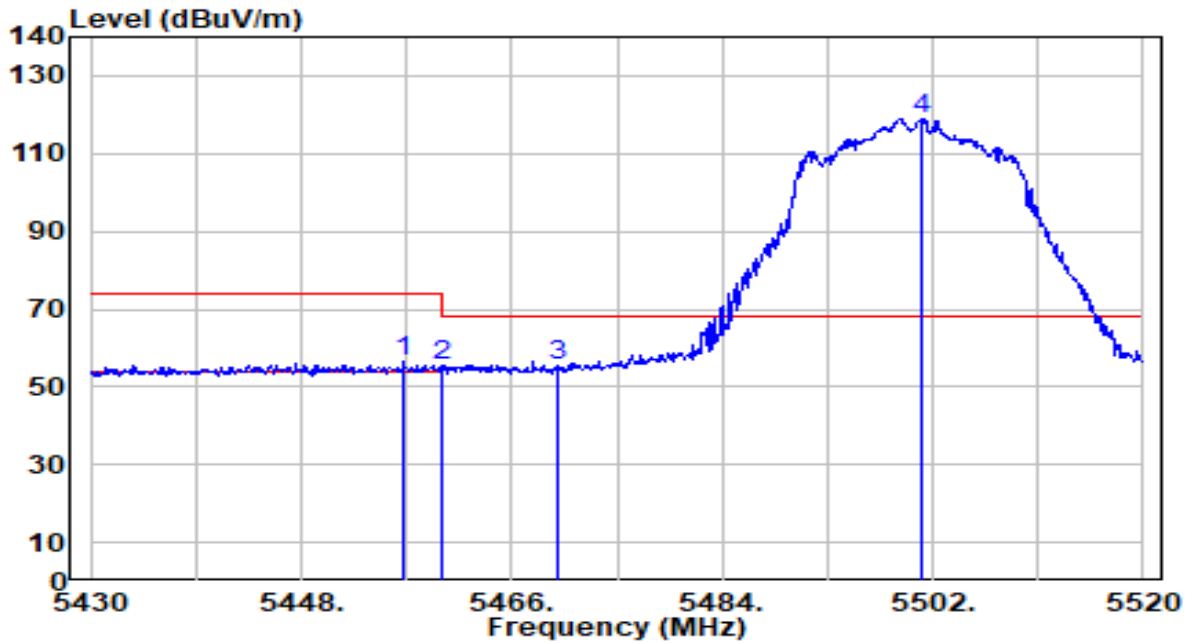


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.730	55.62	0.64	56.26	-17.74	74.00	196	82	Peak
2	5460.000	54.83	0.65	55.48	-18.52	74.00	196	82	Peak
3	* 5470.000	54.77	0.69	55.46	-12.74	68.20	196	82	Peak
4	5501.100	118.13	0.79	118.92	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

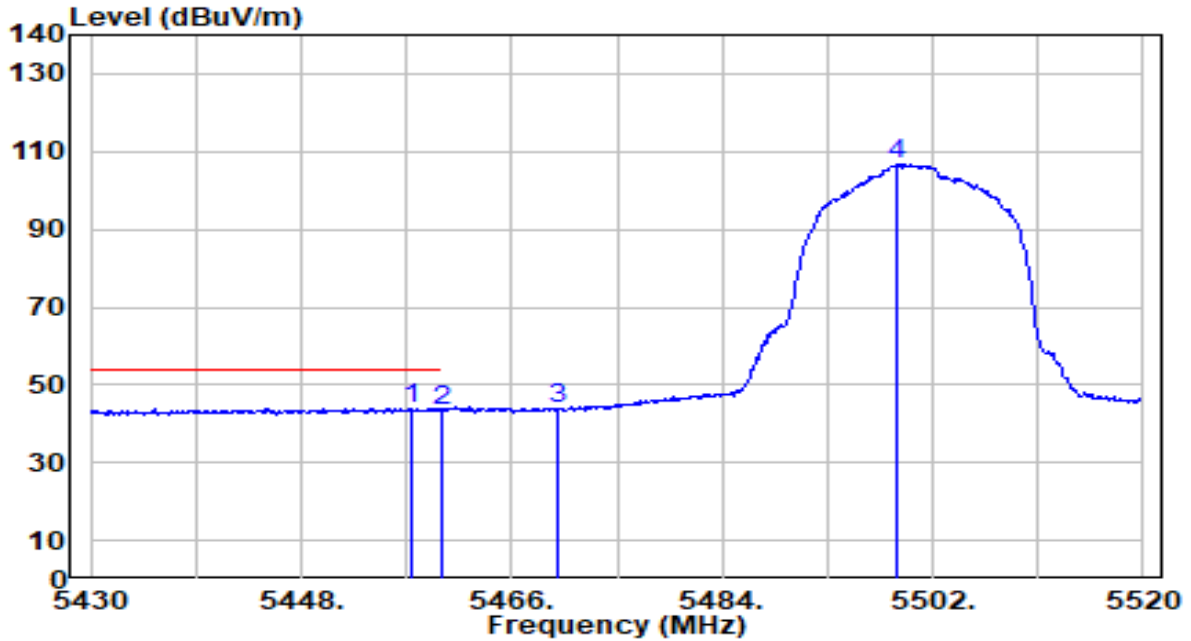


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5457.450	43.18	0.65	43.82	-10.18	54.00	196	82	Average
2		5460.000	42.74	0.65	43.40	-10.60	54.00	196	82	Average
3		5470.000	43.33	0.69	44.01	N/A	N/A	196	82	Average
4		5498.850	105.82	0.79	106.61	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

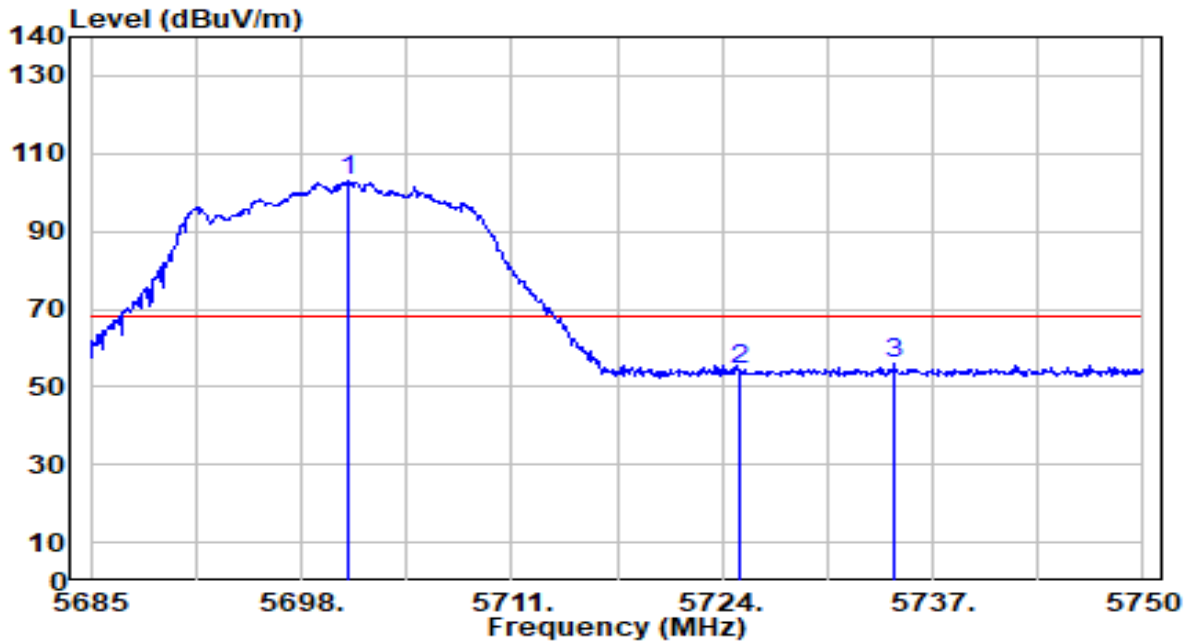


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.860	101.07	1.73	102.80	N/A	N/A	100	174	Peak
2	5725.000	52.61	1.86	54.48	-13.72	68.20	100	174	Peak
3	* 5734.595	53.83	1.92	55.75	-12.45	68.20	100	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

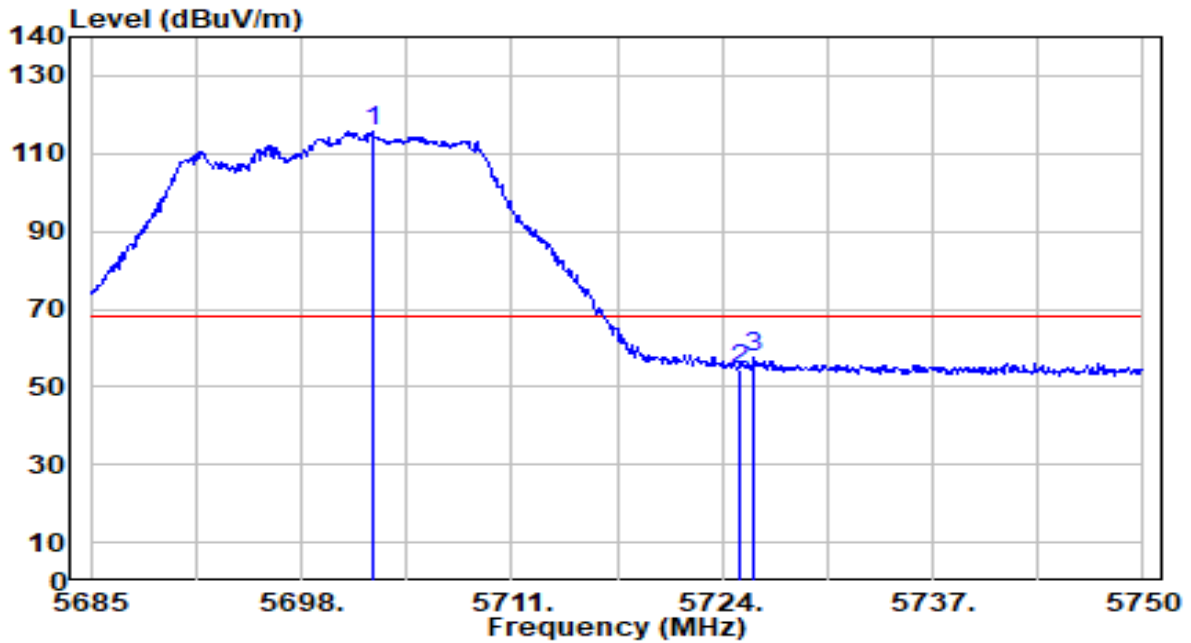


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.355	114.20	1.74	115.94	N/A	N/A	196	340	Peak
2	5725.000	52.80	1.86	54.67	-13.53	68.20	196	340	Peak
3	* 5725.950	55.66	1.87	57.53	-10.67	68.20	196	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

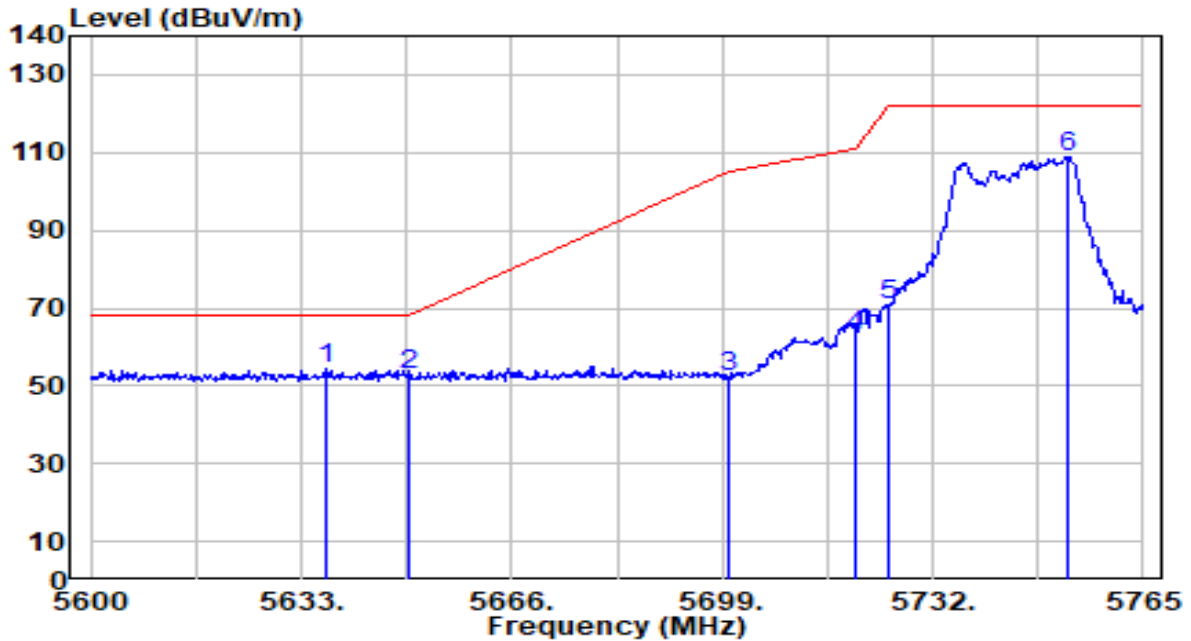


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5636.795	52.94	1.36	54.30	-13.90	68.20	289	176	Peak
2	5650.000	51.19	1.44	52.63	-15.57	68.20	289	176	Peak
3	5700.000	50.83	1.72	52.55	-52.65	105.20	289	176	Peak
4	5720.000	61.12	1.84	62.96	-47.84	110.80	289	176	Peak
5	5725.000	69.16	1.86	71.03	-51.17	122.20	289	176	Peak
6	5753.120	106.64	2.02	108.66	N/A	N/A	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

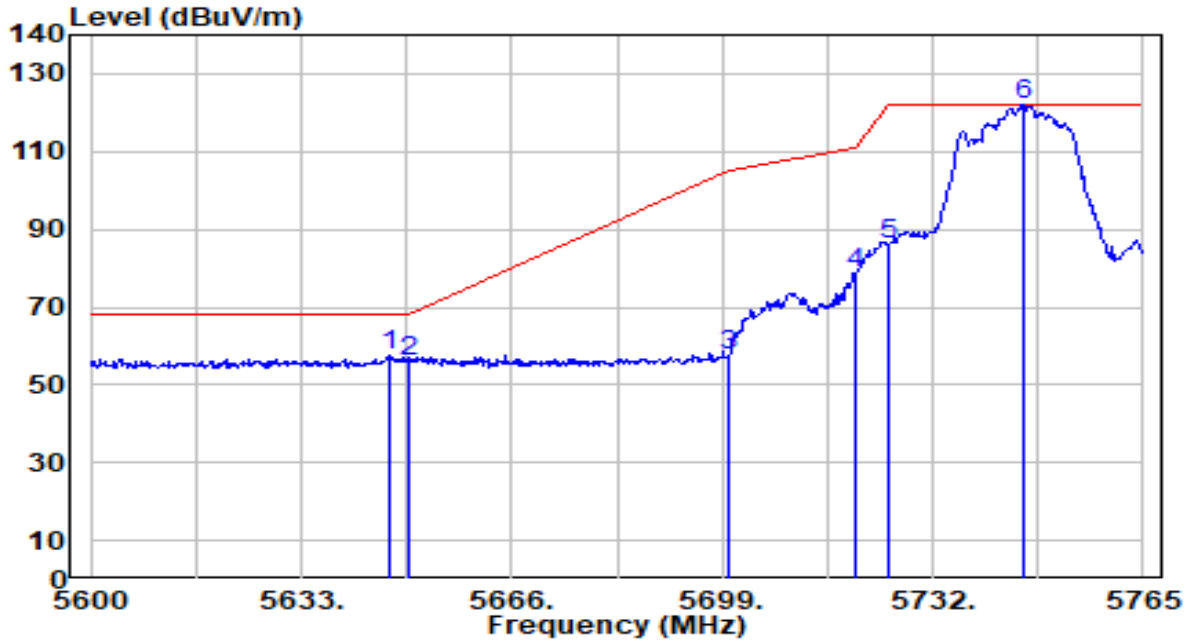


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	56.13	1.42	57.55	-10.65	68.20	200	343	Peak
2		54.82	1.44	56.25	-11.95	68.20	200	343	Peak
3		55.91	1.72	57.63	-47.57	105.20	200	343	Peak
4		76.78	1.84	78.62	-32.18	110.80	200	343	Peak
5		84.45	1.86	86.32	-35.88	122.20	200	343	Peak
6		120.00	1.98	121.99	N/A	N/A	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

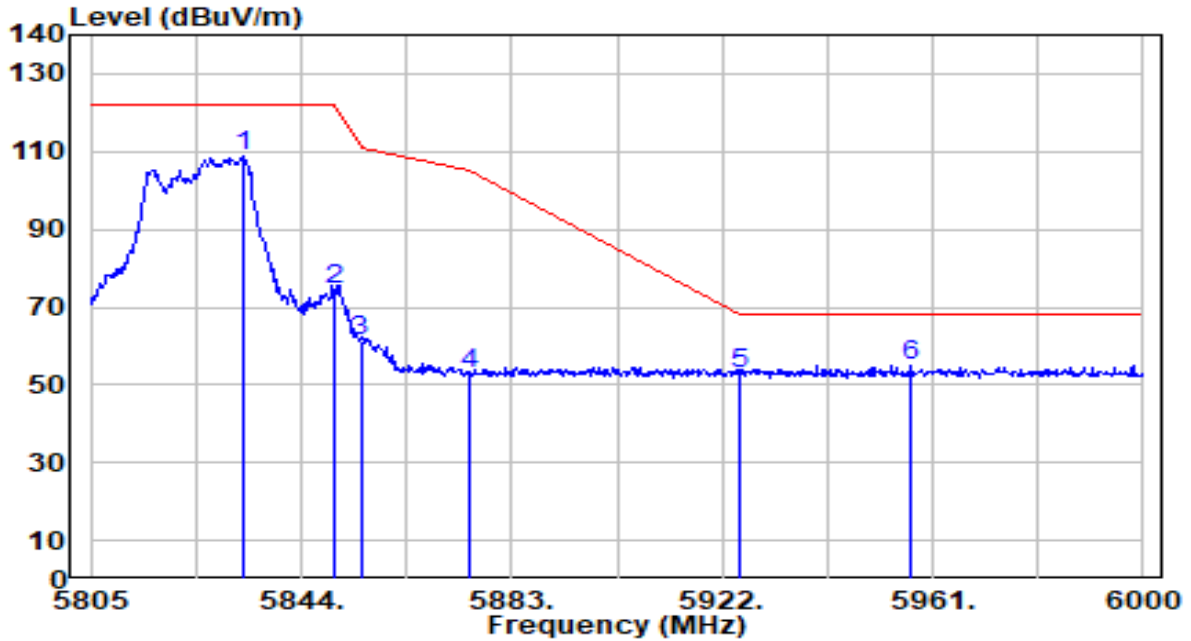


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.275	106.41	2.28	108.69	N/A	N/A	296	174	Peak
2	5850.000	72.39	2.27	74.66	-47.54	122.20	296	174	Peak
3	5855.000	59.02	2.27	61.29	-49.51	110.80	296	174	Peak
4	5875.000	50.53	2.26	52.79	-52.41	105.20	296	174	Peak
5	5925.000	50.59	2.25	52.83	-15.37	68.20	296	174	Peak
6	* 5956.905	52.89	2.23	55.13	-13.07	68.20	296	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

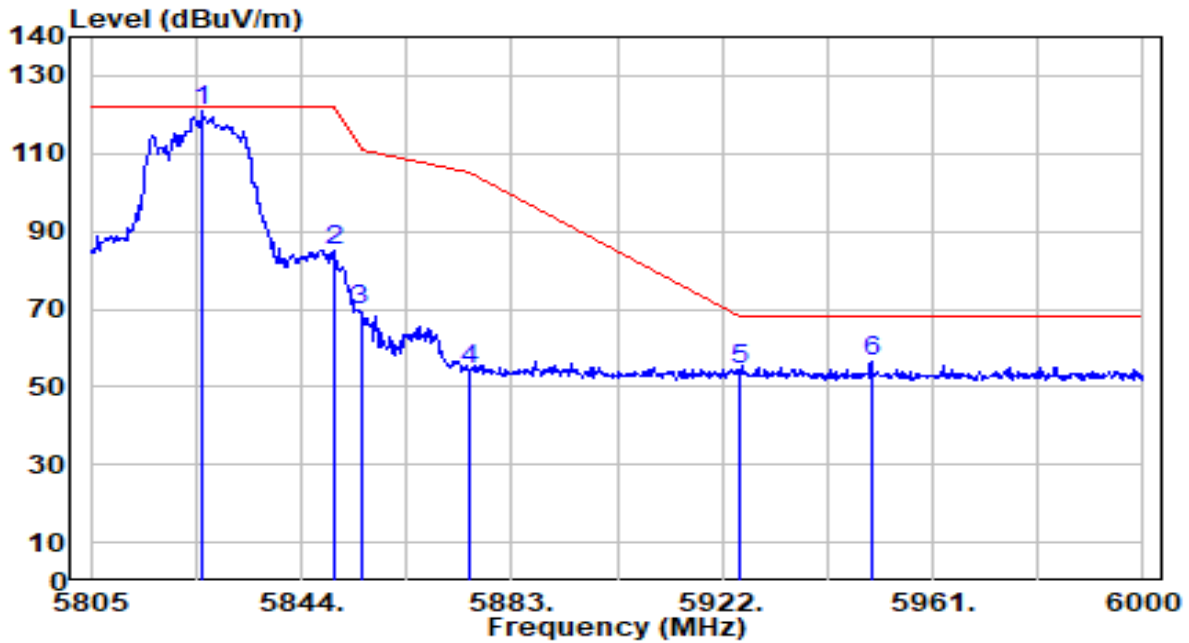


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.865	118.49	2.28	120.77	N/A	N/A	181	342	Peak
2	5850.000	82.79	2.27	85.06	-37.14	122.20	181	342	Peak
3	5855.000	67.34	2.27	69.61	-41.19	110.80	181	342	Peak
4	5875.000	52.11	2.26	54.37	-50.83	105.20	181	342	Peak
5	5925.000	52.03	2.25	54.28	-13.92	68.20	181	342	Peak
6	* 5949.690	54.18	2.24	56.42	-11.78	68.20	181	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

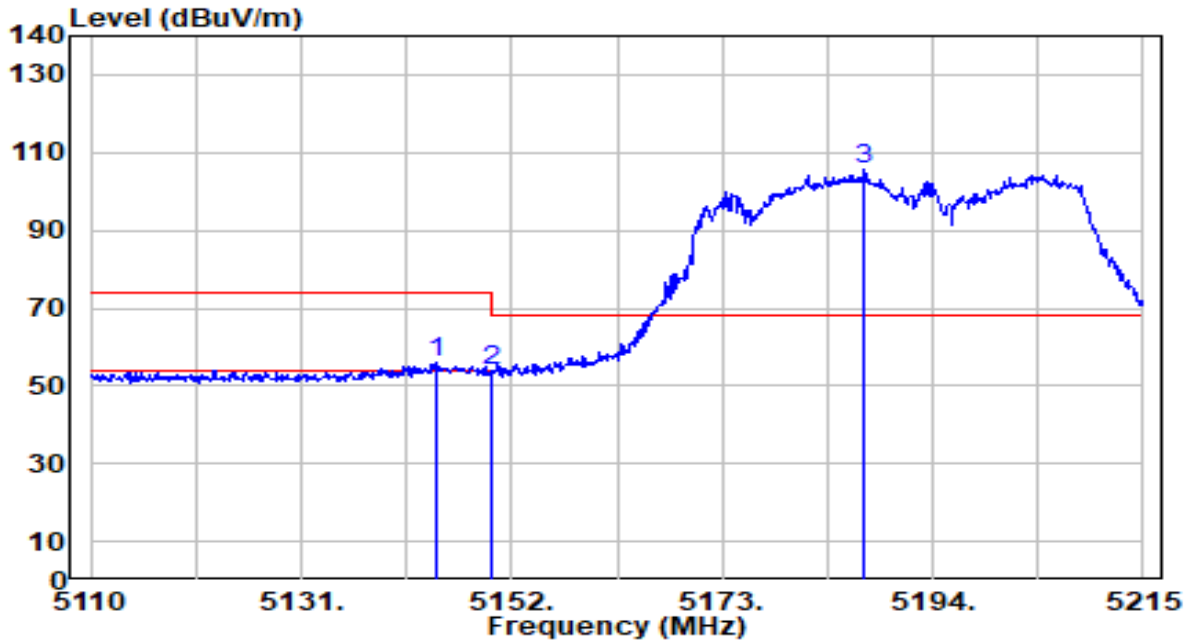


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5144.440	55.20	0.68	55.87	-18.13	74.00	306	205	Peak
2	5150.000	53.40	0.68	54.08	-19.92	74.00	306	205	Peak
3	5187.175	104.97	0.67	105.64	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

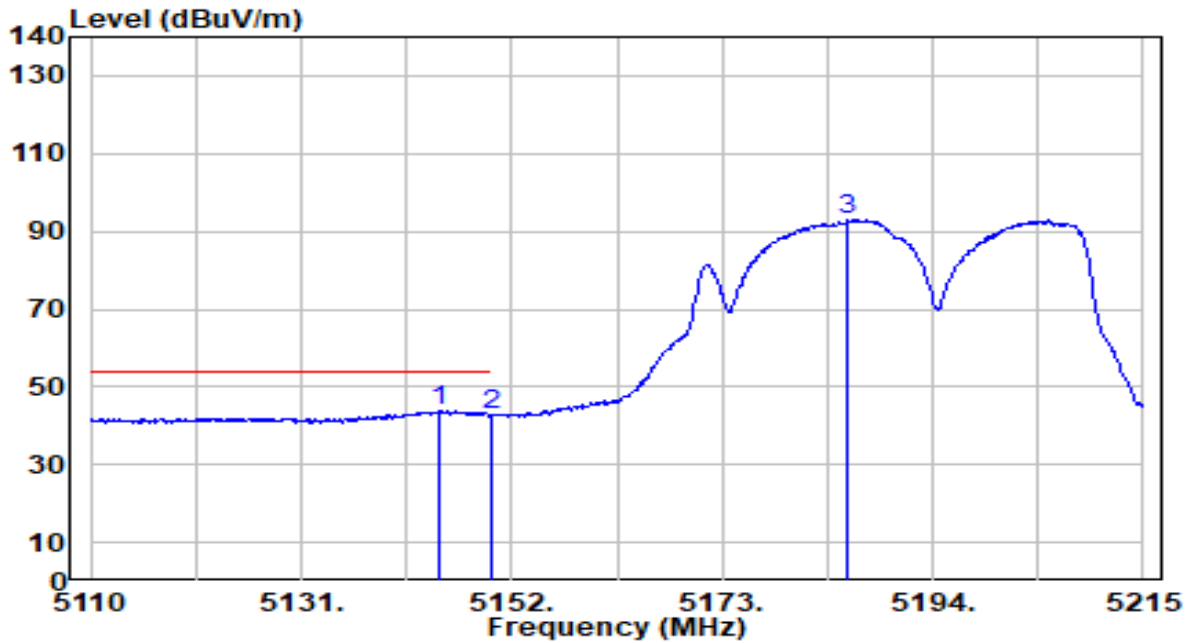


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5144.860	43.25	0.68	43.93	-10.07	54.00	306	205	Average
2		5150.000	41.97	0.68	42.64	-11.36	54.00	306	205	Average
3		5185.600	92.28	0.67	92.95	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

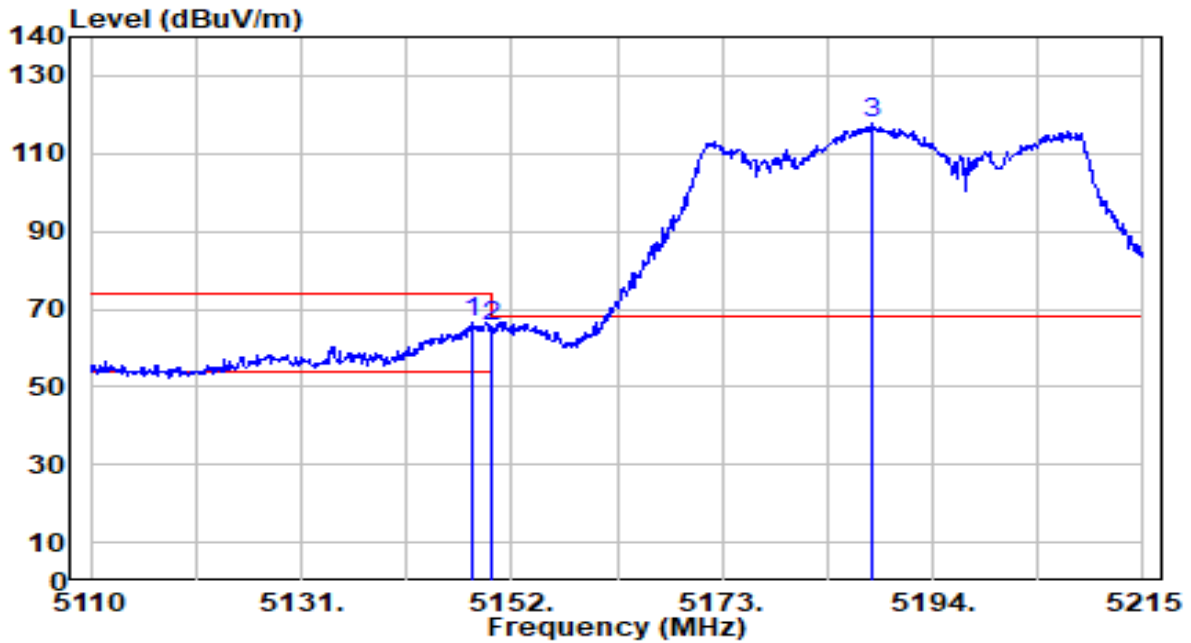


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.115	66.09	0.68	66.76	-7.24	74.00	168	76	Peak
2		5150.000	64.71	0.68	65.39	-8.61	74.00	168	76	Peak
3		5188.015	117.14	0.67	117.81	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

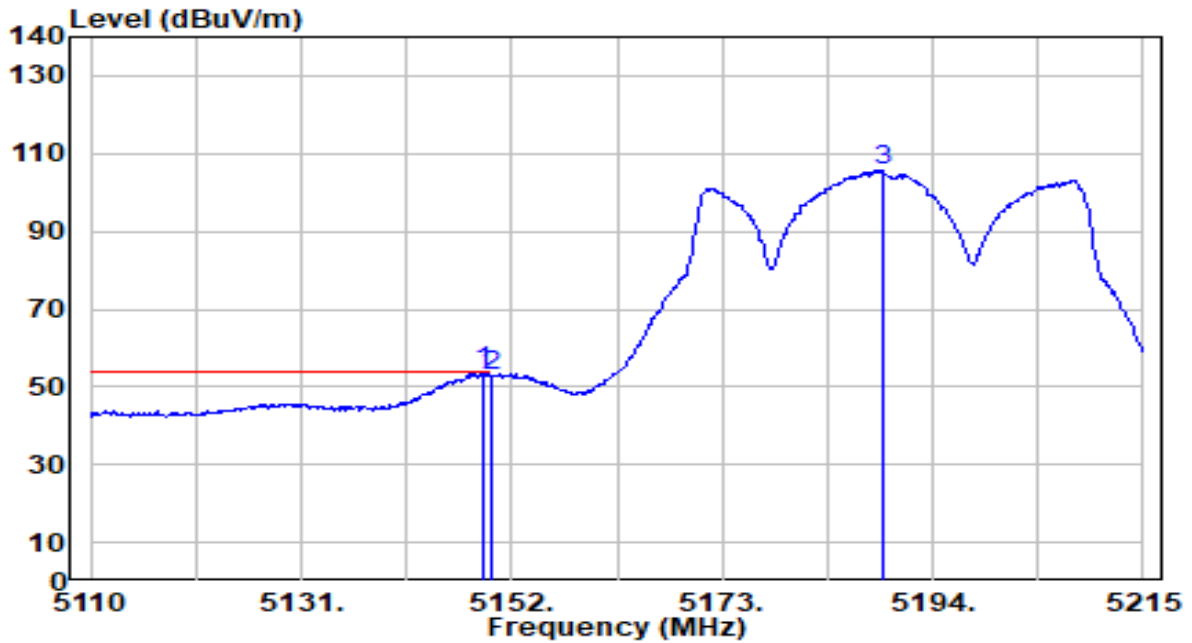


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.270	53.05	0.68	53.73	-0.27	54.00	168	76	Average
2		5150.000	52.21	0.68	52.88	-1.12	54.00	168	76	Average
3		5189.065	104.92	0.67	105.59	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

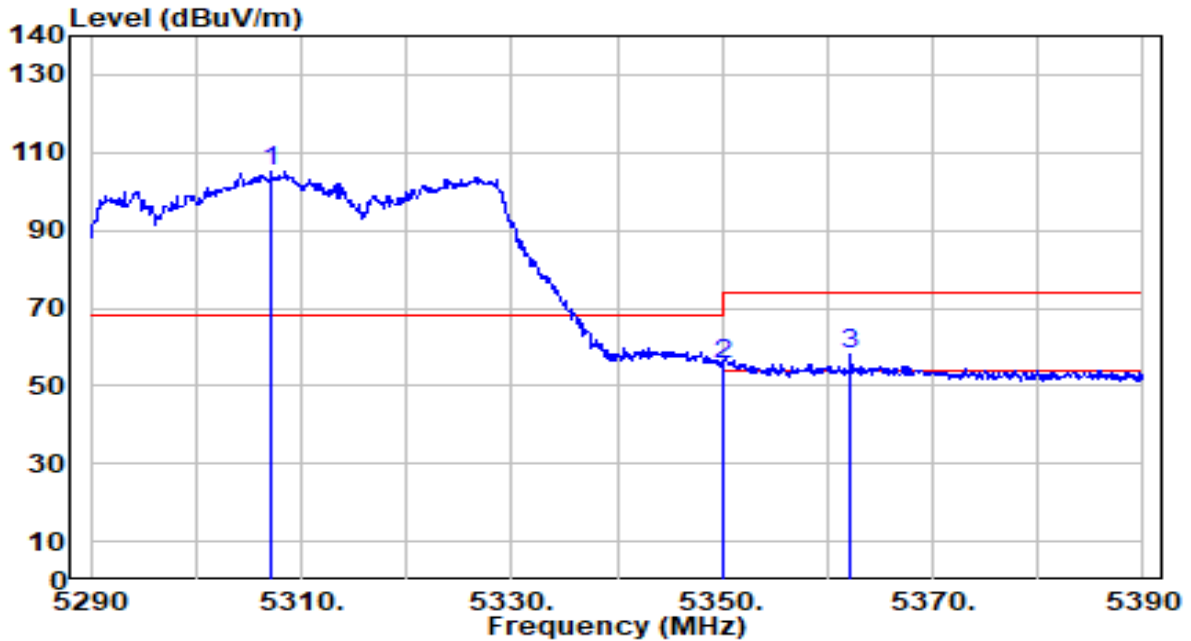


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.200	104.78	0.55	105.34	N/A	N/A	281	199	Peak
2	5350.000	54.79	0.51	55.30	-18.70	74.00	281	199	Peak
3	* 5362.200	57.58	0.49	58.07	-15.93	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

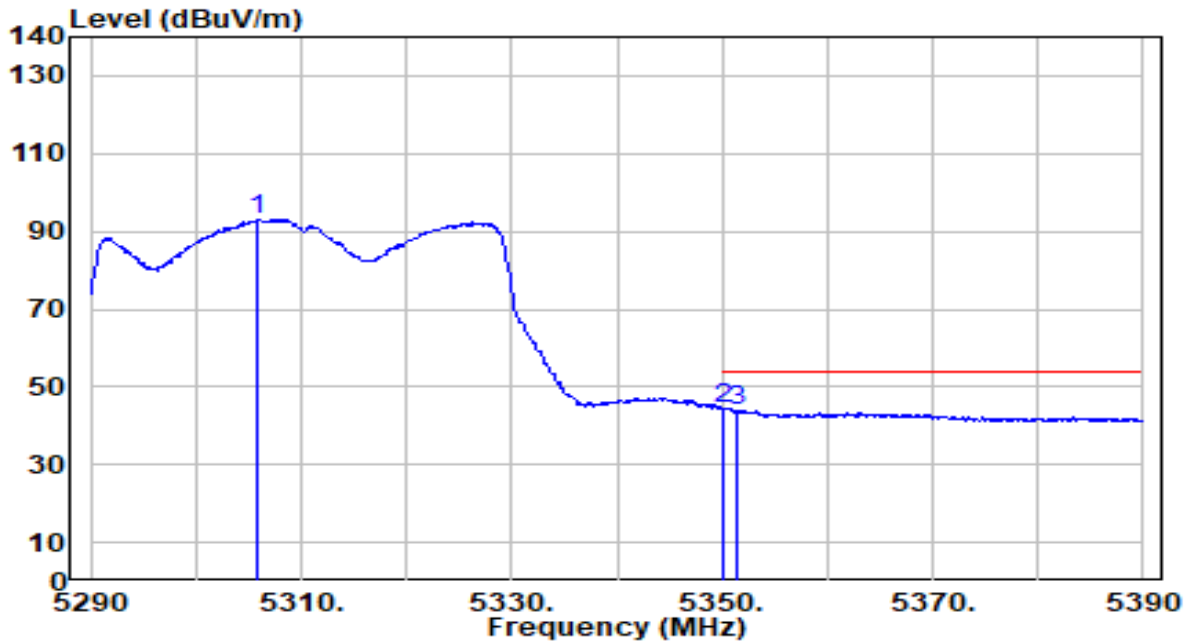


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5305.900	92.49	0.55	93.04	N/A	N/A	281	199	Average
2 *	5350.000	43.68	0.51	44.19	-9.81	54.00	281	199	Average
3	5351.500	43.60	0.50	44.10	-9.90	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

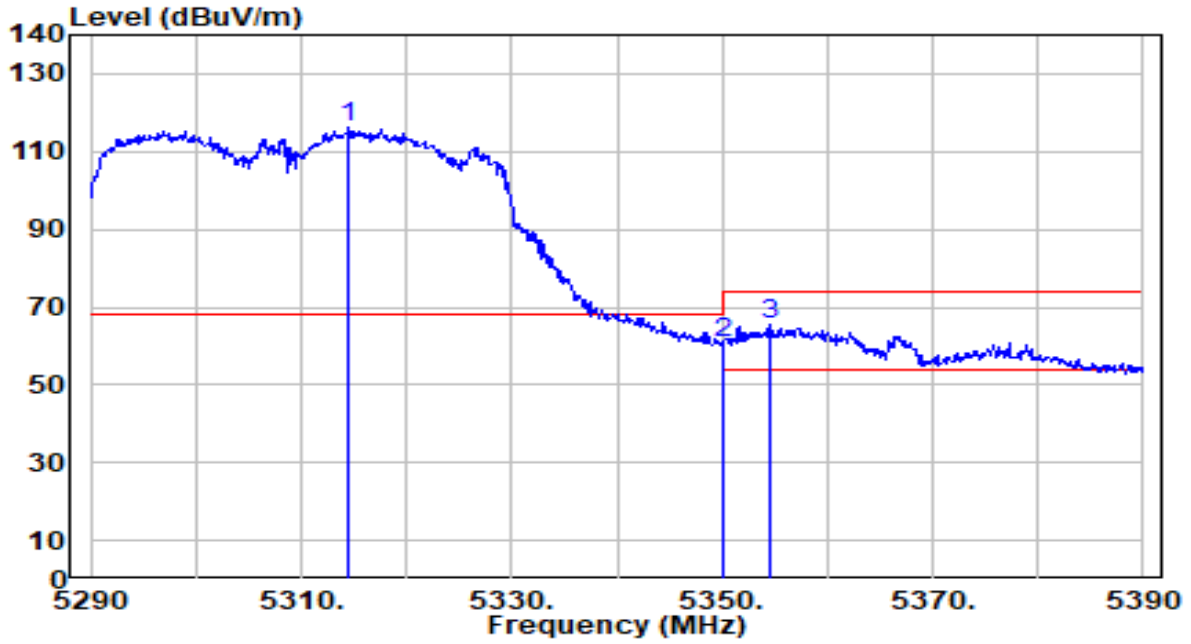


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.500	115.56	0.54	116.10	N/A	N/A	240	267	Peak
2	5350.000	60.45	0.51	60.95	-13.05	74.00	240	267	Peak
3	* 5354.600	64.79	0.50	65.29	-8.71	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

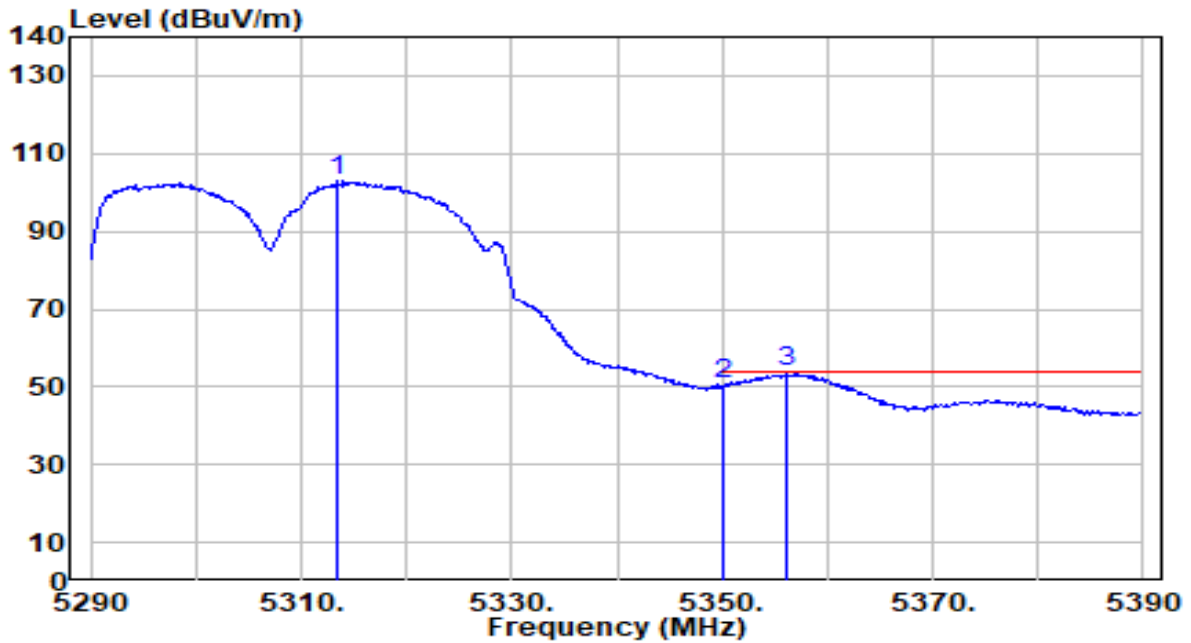


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.500	102.34	0.55	102.89	N/A	N/A	240	267	Average
2	5350.000	50.02	0.51	50.53	-3.47	54.00	240	267	Average
3	* 5356.000	53.30	0.50	53.79	-0.21	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

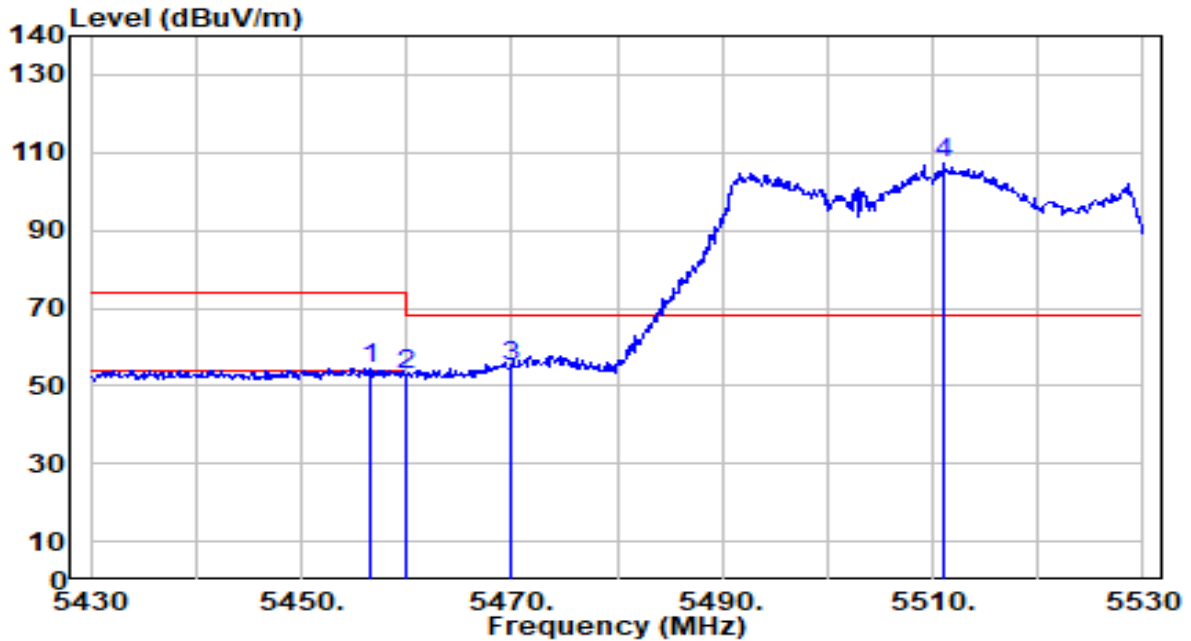


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.600	54.00	0.64	54.65	-19.35	74.00	213	38	Peak
2	5460.000	52.24	0.65	52.90	-21.10	74.00	213	38	Peak
3	* 5470.000	54.32	0.69	55.01	-13.19	68.20	213	38	Peak
4	5511.100	106.59	0.83	107.42	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

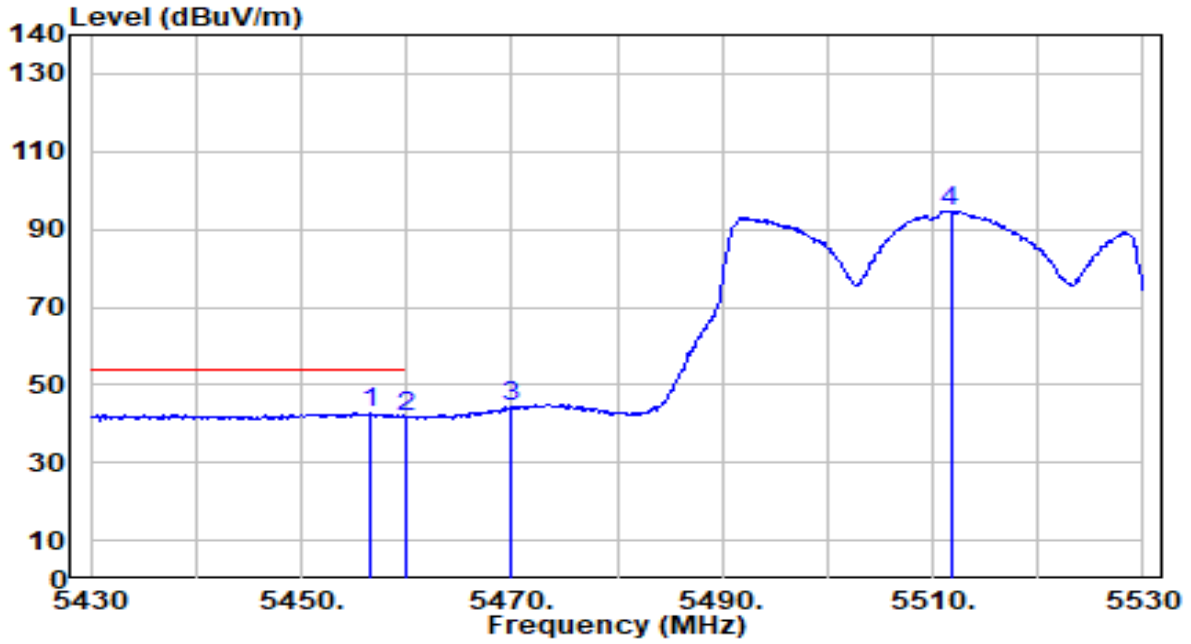


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5456.600	42.02	0.64	42.66	-11.34	54.00	213	38	Average
2	5460.000	41.11	0.65	41.76	-12.24	54.00	213	38	Average
3	5470.000	43.44	0.69	44.13	N/A	N/A	213	38	Average
4	5511.700	93.83	0.83	94.67	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

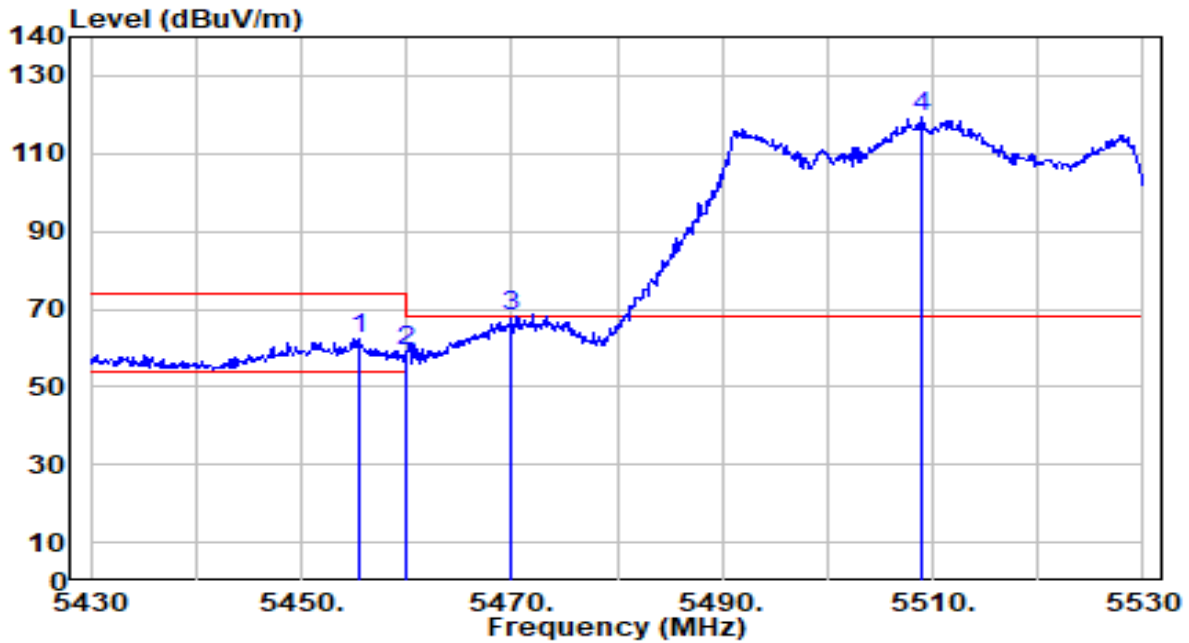


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.500	61.63	0.64	62.27	-11.73	74.00	196	82	Peak
2	5460.000	58.55	0.65	59.21	-14.79	74.00	196	82	Peak
3	* 5470.000	67.23	0.69	67.92	-0.28	68.20	196	82	Peak
4	5509.000	118.67	0.82	119.49	N/A	N/A	196	82	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

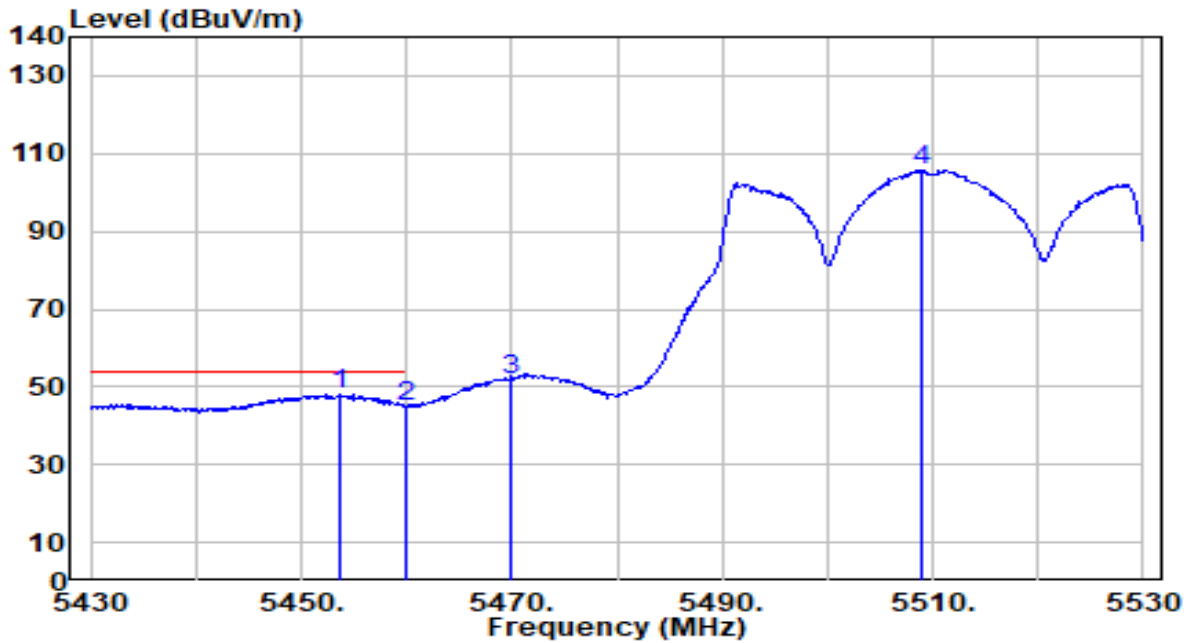


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5453.700	47.23	0.63	47.86	-6.14	54.00	196	82	Average
2	5460.000	44.39	0.65	45.05	-8.95	54.00	196	82	Average
3	5470.000	51.26	0.69	51.95	N/A	N/A	196	82	Average
4	5508.900	105.03	0.82	105.85	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

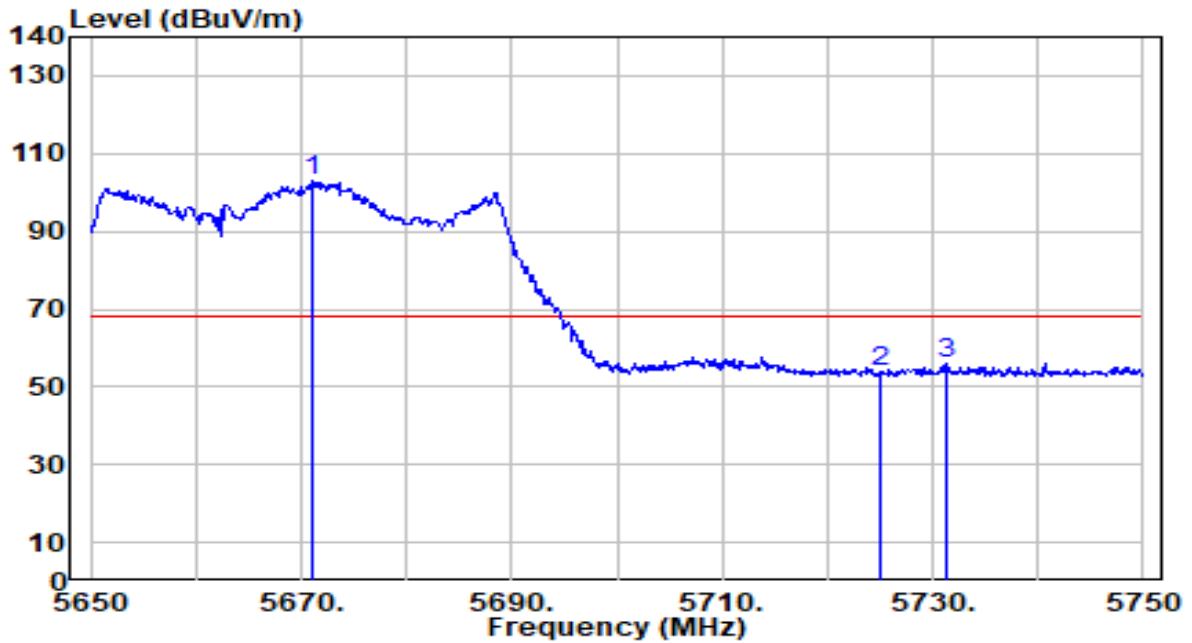


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.100	101.46	1.56	103.02	N/A	N/A	100	174	Peak
2	5725.000	52.28	1.86	54.14	-14.06	68.20	100	174	Peak
3	* 5731.400	53.92	1.90	55.82	-12.38	68.20	100	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

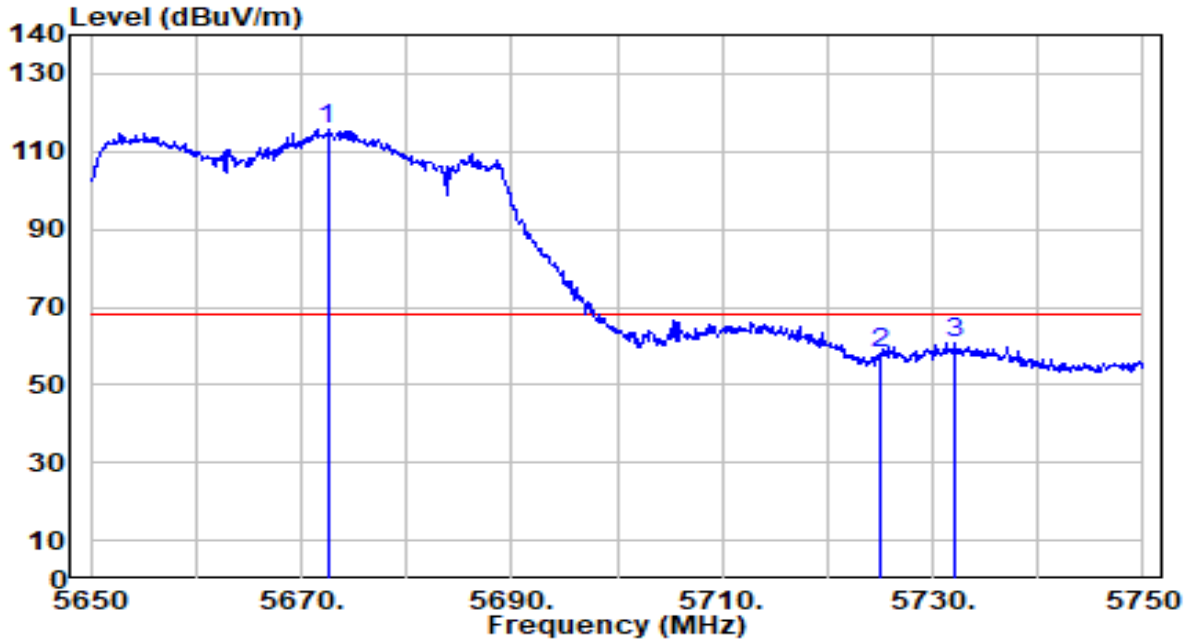


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5672.500	114.00	1.57	115.57	N/A	N/A	196	340	Peak
2	5725.000	56.36	1.86	58.23	-9.97	68.20	196	340	Peak
3	* 5732.100	58.84	1.90	60.74	-7.46	68.20	196	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

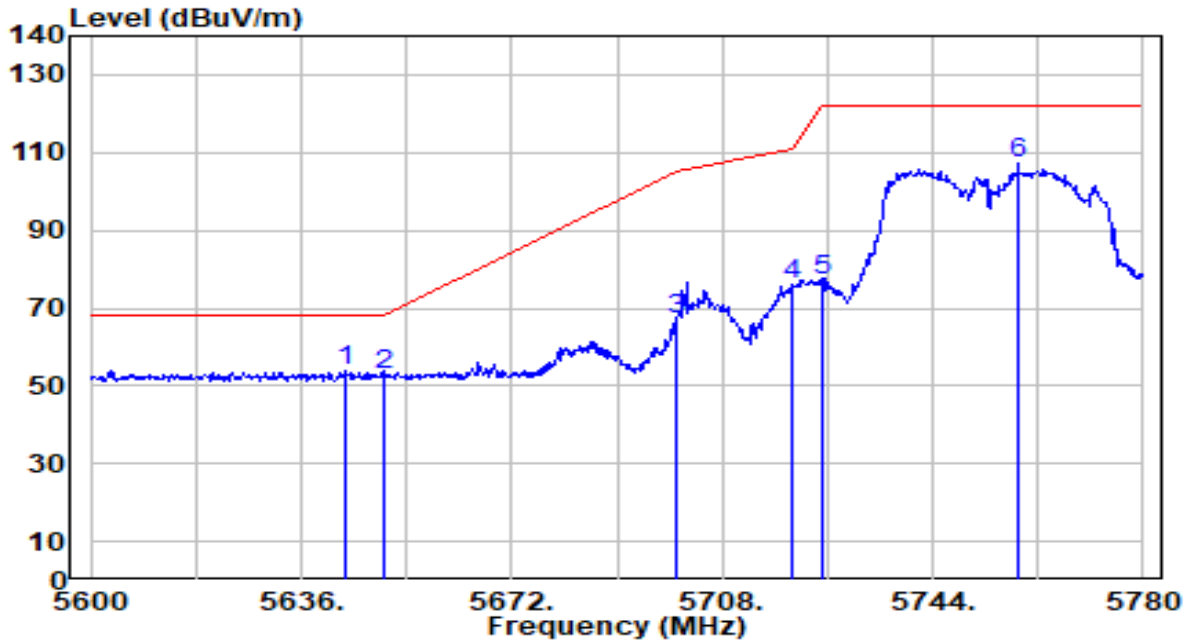


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5643.560	52.60	1.40	54.00	-14.20	68.20	289	176	Peak
2	5650.000	51.37	1.44	52.81	-15.39	68.20	289	176	Peak
3	5700.000	65.56	1.72	67.28	-37.92	105.20	289	176	Peak
4	5720.000	74.36	1.84	76.20	-34.60	110.80	289	176	Peak
5	5725.000	75.25	1.86	77.12	-45.08	122.20	289	176	Peak
6	5758.580	104.95	2.05	107.01	N/A	N/A	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

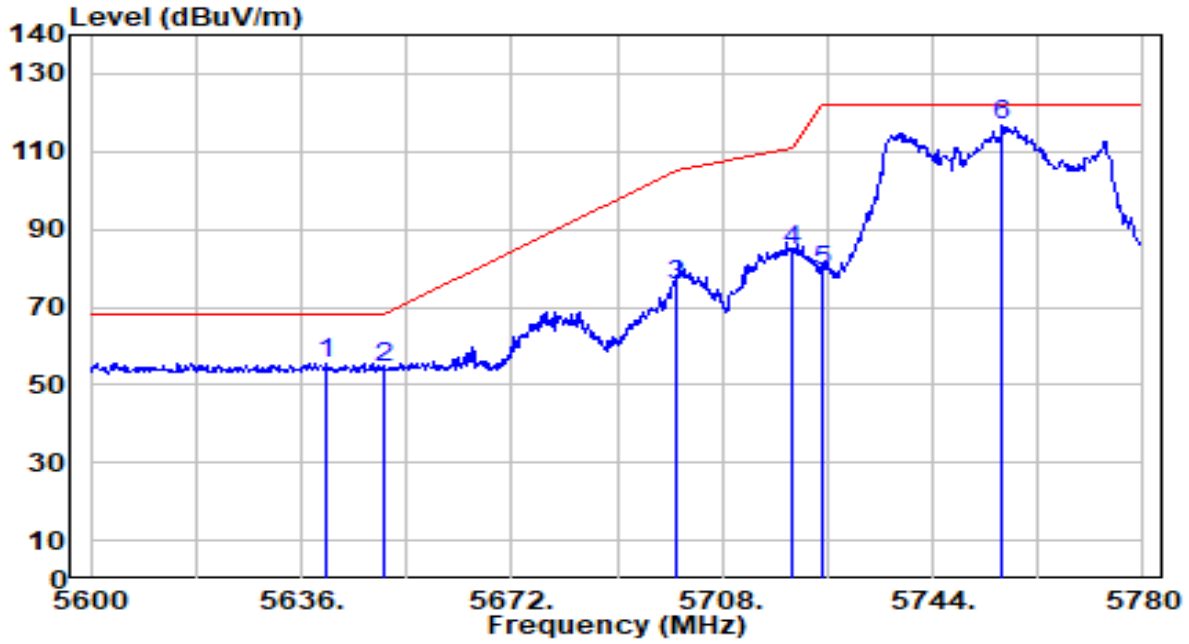


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	54.31	1.38	55.69	-12.51	68.20	200	343	Peak
2		53.23	1.44	54.67	-13.53	68.20	200	343	Peak
3		73.68	1.72	75.40	-29.80	105.20	200	343	Peak
4		82.67	1.84	84.50	-26.30	110.80	200	343	Peak
5		77.56	1.86	79.42	-42.78	122.20	200	343	Peak
6		114.68	2.04	116.71	N/A	N/A	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

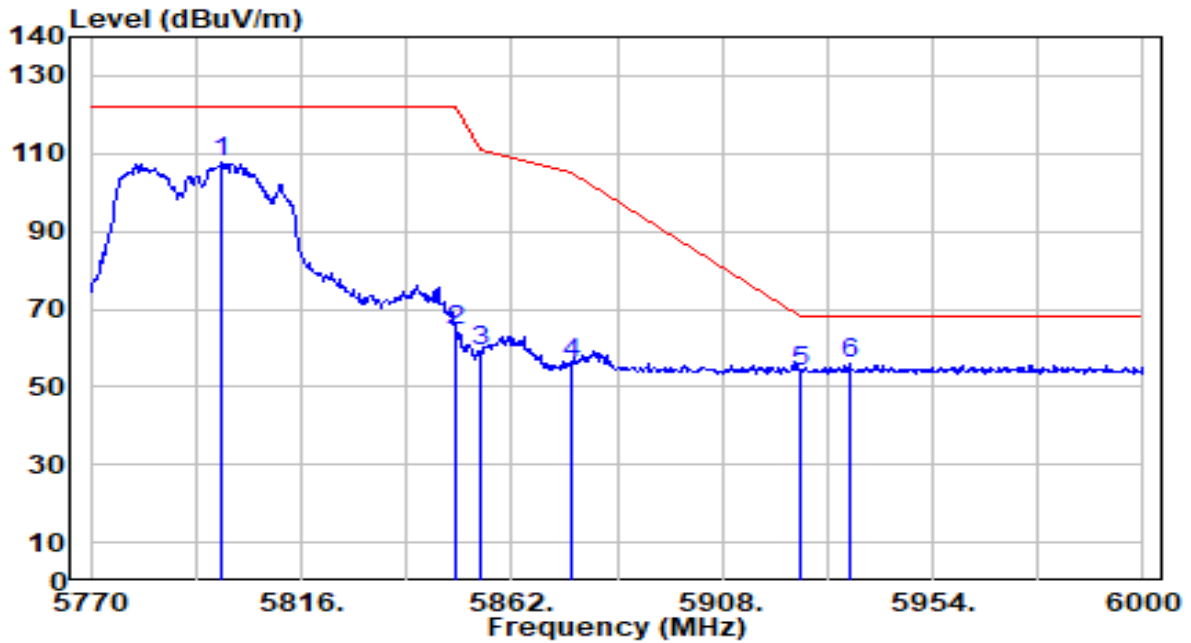


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5798.750	105.24	2.28	107.52	N/A	N/A	296	174	Peak
2	5850.000	62.02	2.27	64.29	-57.91	122.20	296	174	Peak
3	5855.000	57.07	2.27	59.33	-51.47	110.80	296	174	Peak
4	5875.000	53.80	2.26	56.07	-49.13	105.20	296	174	Peak
5	5925.000	51.75	2.25	53.99	-14.21	68.20	296	174	Peak
6	* 5935.830	53.58	2.24	55.82	-12.38	68.20	296	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

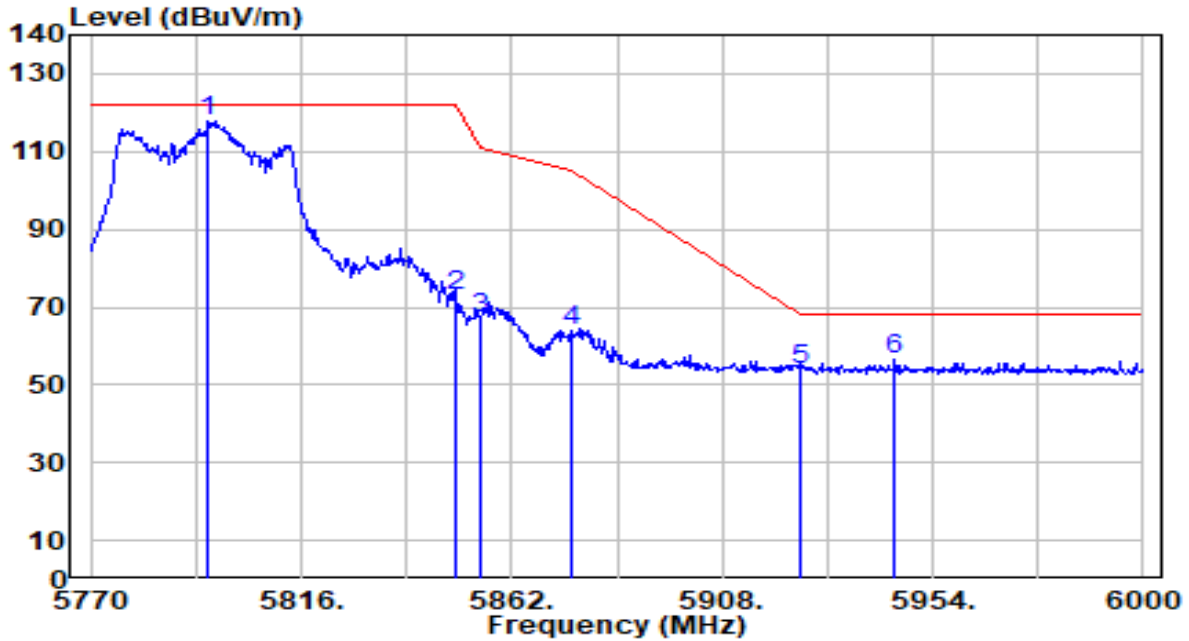


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5795.760	115.47	2.26	117.73	N/A	N/A	181	342	Peak
2	5850.000	70.44	2.27	72.72	-49.48	122.20	181	342	Peak
3	5855.000	64.92	2.27	67.19	-43.61	110.80	181	342	Peak
4	5875.000	61.56	2.26	63.82	-41.38	105.20	181	342	Peak
5	5925.000	51.72	2.25	53.96	-14.24	68.20	181	342	Peak
6	* 5945.720	54.03	2.24	56.27	-11.93	68.20	181	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

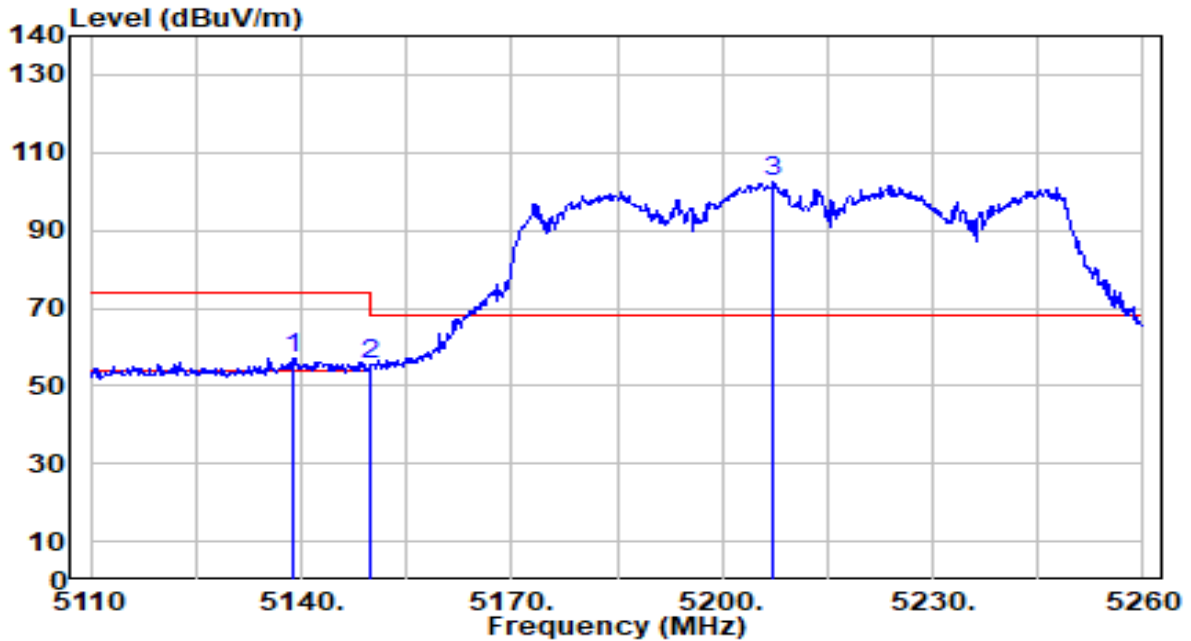


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5138.950	56.57	0.68	57.25	-16.75	74.00	306	205	Peak
2	5150.000	54.67	0.68	55.34	-18.66	74.00	306	205	Peak
3	5207.200	101.66	0.66	102.32	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

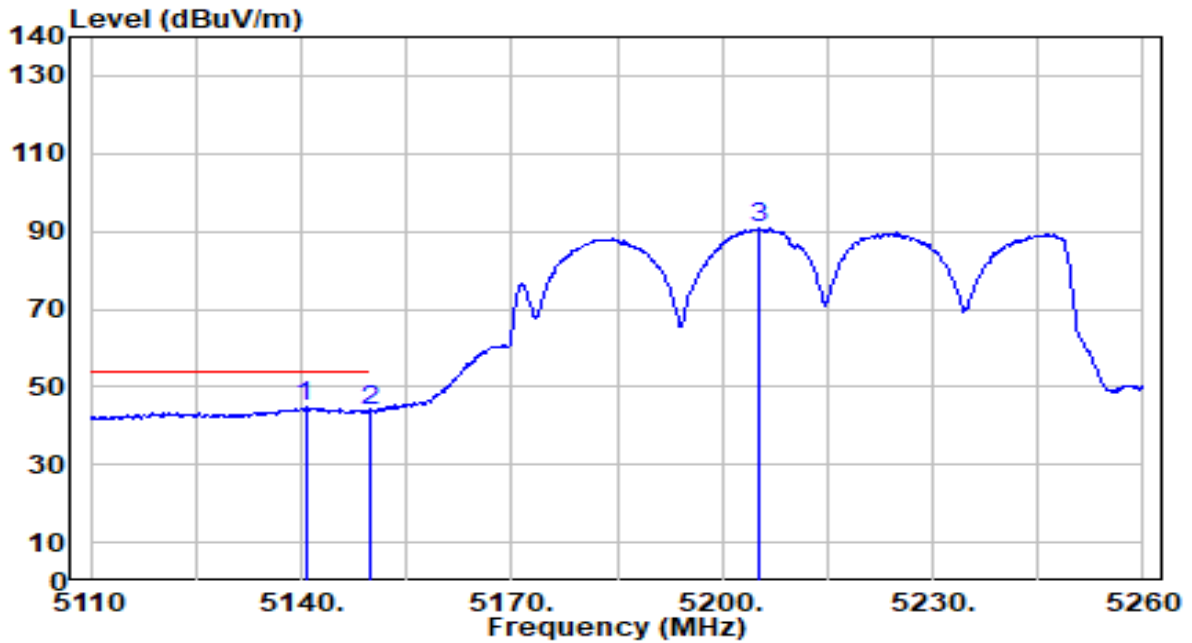


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5140.600	43.98	0.68	44.65	-9.35	54.00	306	205	Average
2	5150.000	42.97	0.68	43.64	-10.36	54.00	306	205	Average
3	5205.250	90.03	0.66	90.70	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

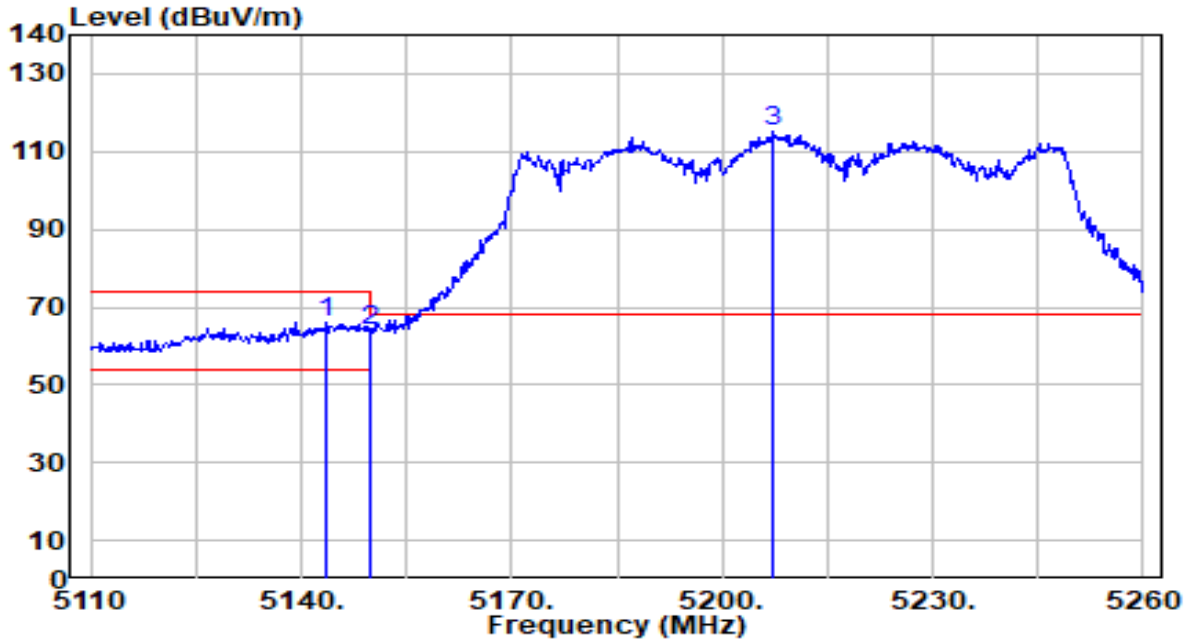


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.600	65.51	0.68	66.18	-7.82	74.00	168	76	Peak
2		5150.000	63.12	0.68	63.80	-10.20	74.00	168	76	Peak
3		5207.050	114.68	0.66	115.34	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

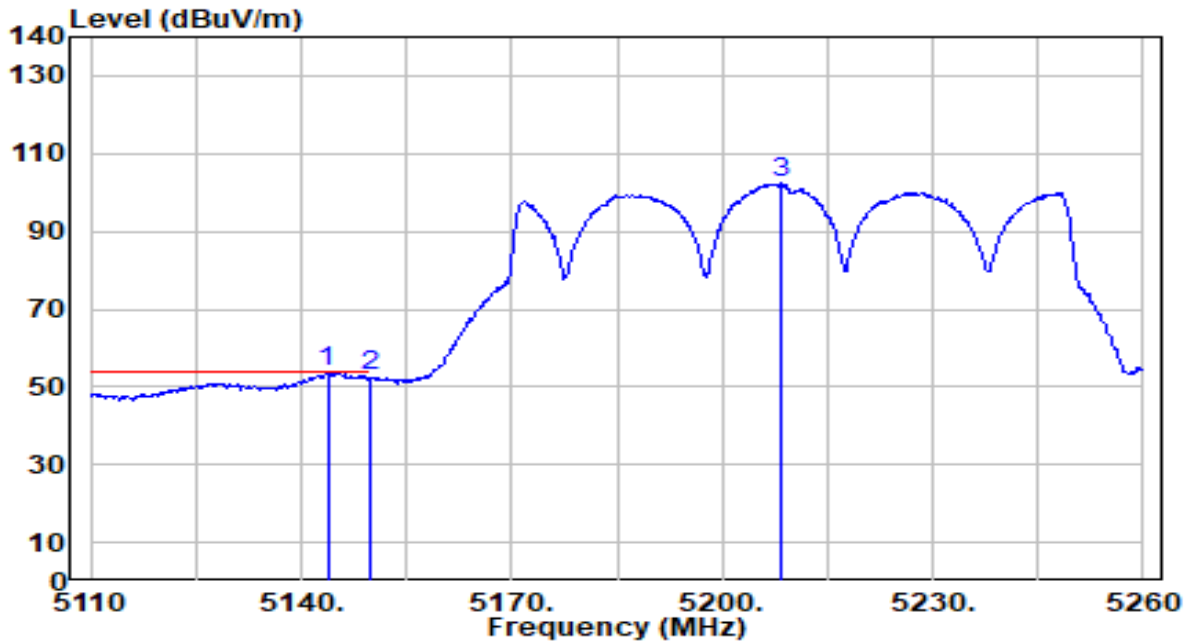


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.750	53.11	0.68	53.79	-0.21	54.00	168	76	Average
2		5150.000	52.16	0.68	52.84	-1.16	54.00	168	76	Average
3		5208.550	101.60	0.66	102.26	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

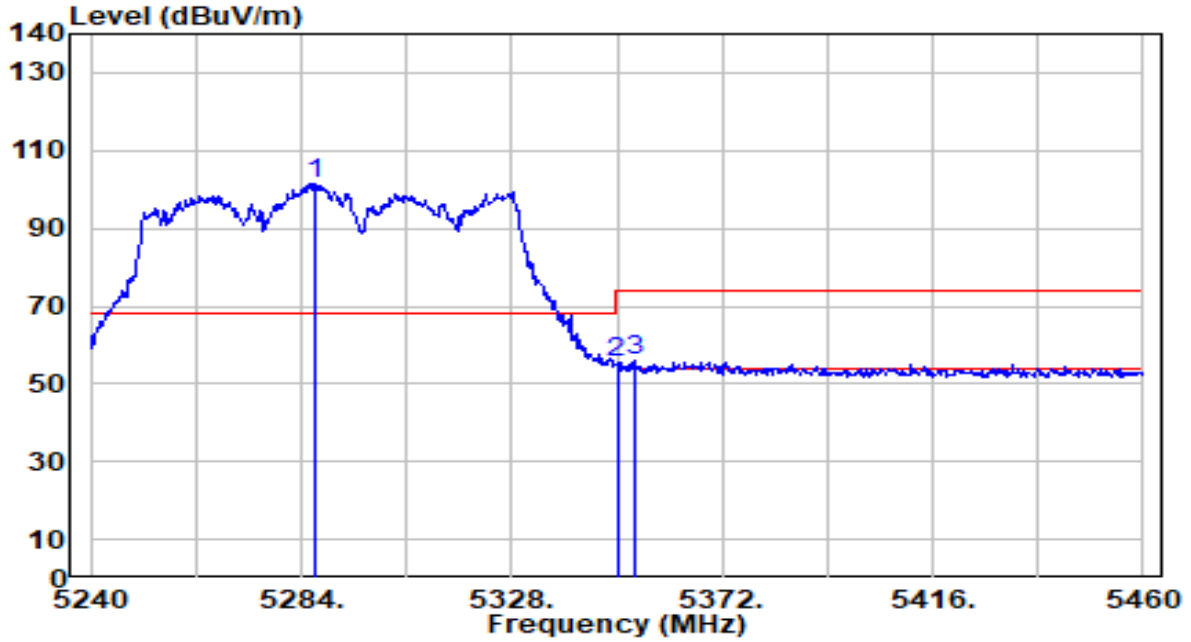


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.640	100.88	0.57	101.45	N/A	N/A	281	199	Peak
2	5350.000	54.76	0.51	55.26	-18.74	74.00	281	199	Peak
3	* 5353.740	55.30	0.50	55.80	-18.20	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

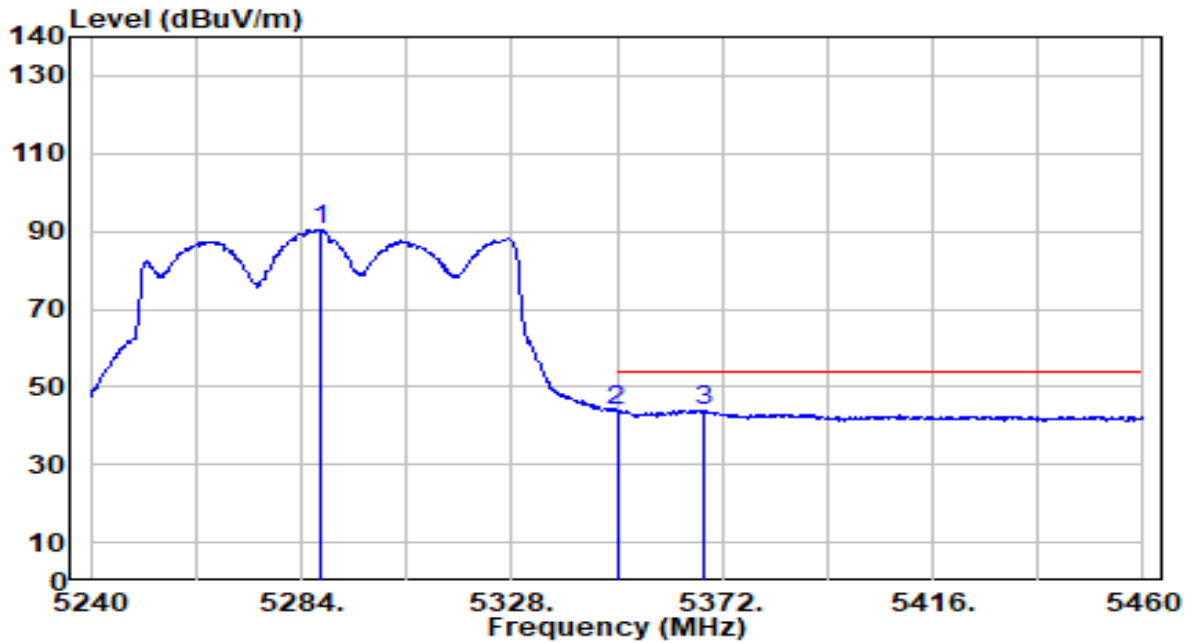


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.960	89.79	0.57	90.36	N/A	N/A	281	199	Average
2	* 5350.000	43.50	0.51	44.01	-9.99	54.00	281	199	Average
3	5368.260	43.51	0.48	43.99	-10.01	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

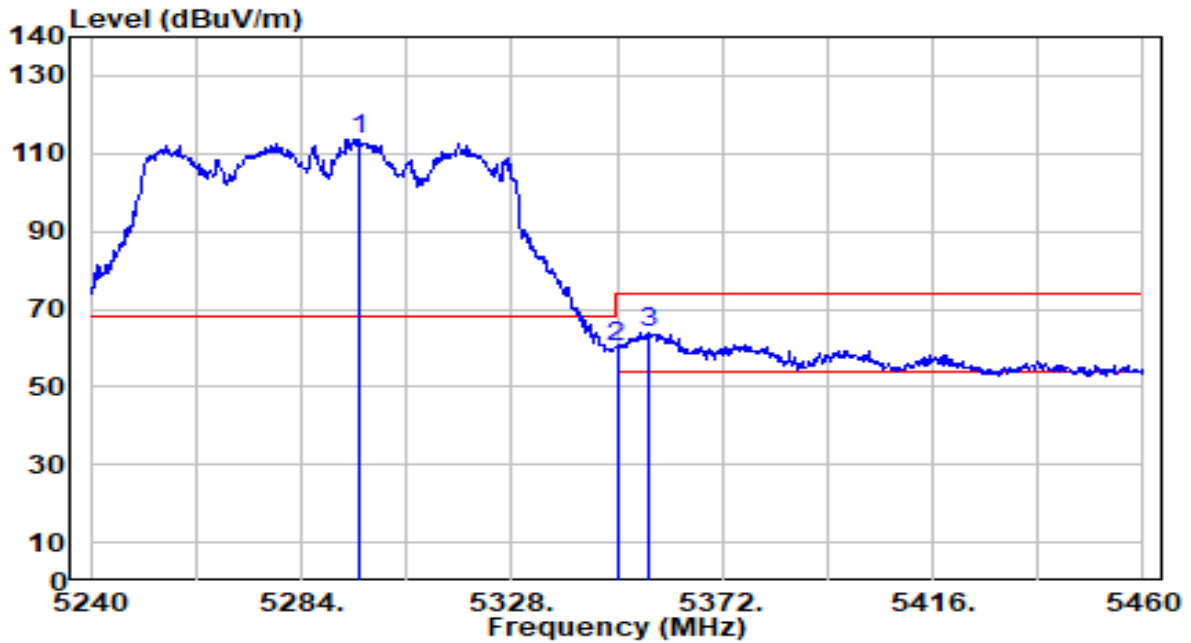


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.100	113.21	0.56	113.77	N/A	N/A	240	267	Peak
2	5350.000	59.85	0.51	60.36	-13.64	74.00	240	267	Peak
3	* 5356.600	63.66	0.50	64.16	-9.84	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

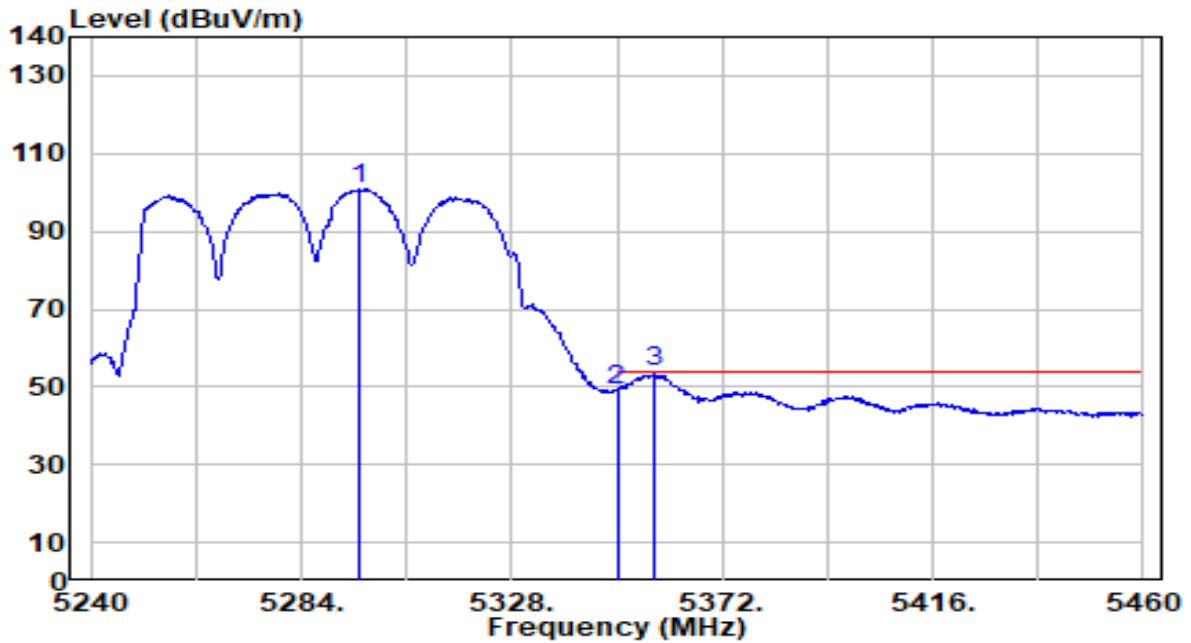


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.100	100.33	0.56	100.89	N/A	N/A	240	267	Average
2	5350.000	48.63	0.51	49.14	-4.86	54.00	240	267	Average
3	* 5357.700	53.30	0.50	53.79	-0.21	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

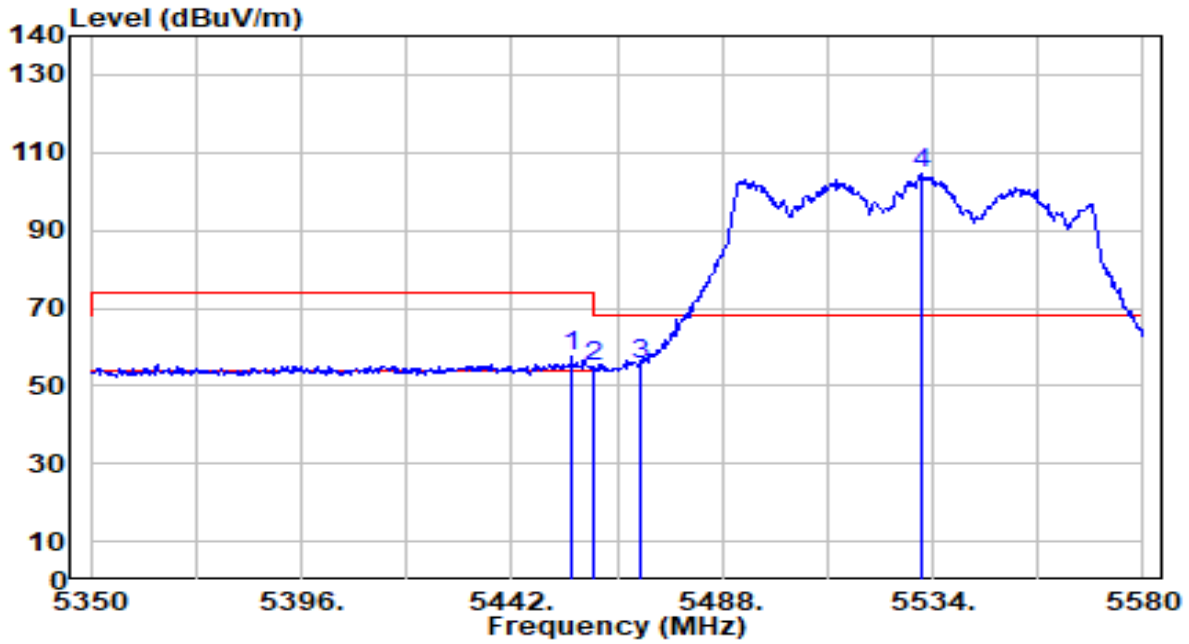


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.110	56.92	0.64	57.56	-16.44	74.00	213	38	Peak
2	5460.000	54.51	0.65	55.17	-18.83	74.00	213	38	Peak
3	* 5470.000	54.62	0.69	55.30	-12.90	68.20	213	38	Peak
4	5531.470	103.88	0.91	104.79	N/A	N/A	213	38	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

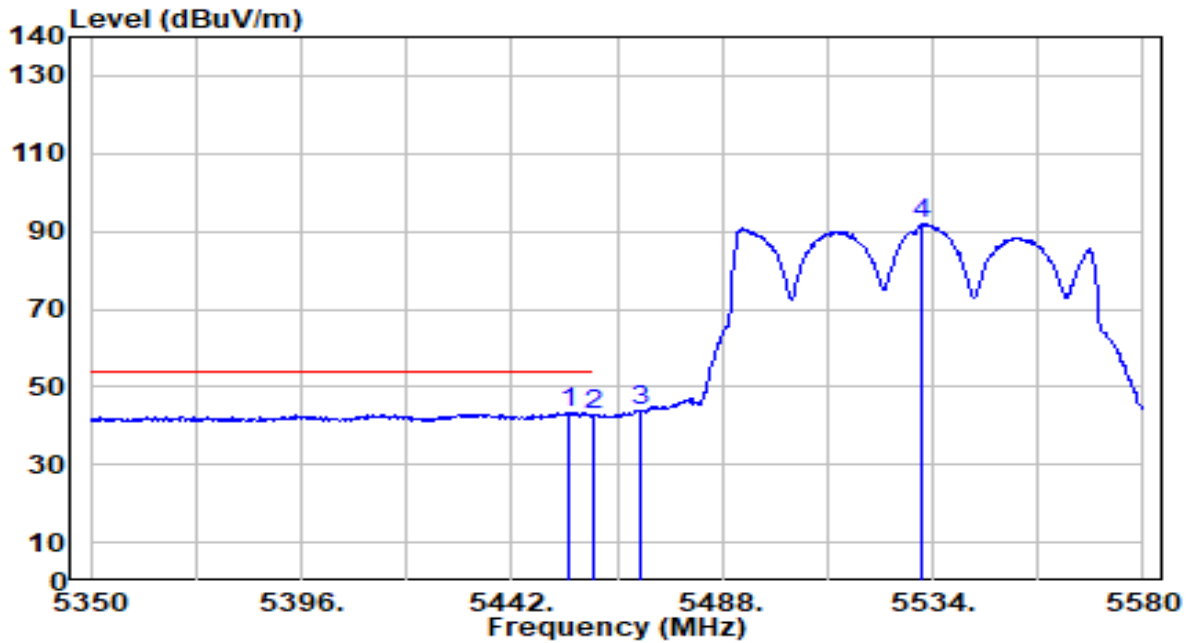


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5454.650	42.73	0.64	43.37	-10.63	54.00	213	38	Average
2		5460.000	41.93	0.65	42.59	-11.41	54.00	213	38	Average
3		5470.000	42.93	0.69	43.62	N/A	N/A	213	38	Average
4		5531.470	90.86	0.91	91.76	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

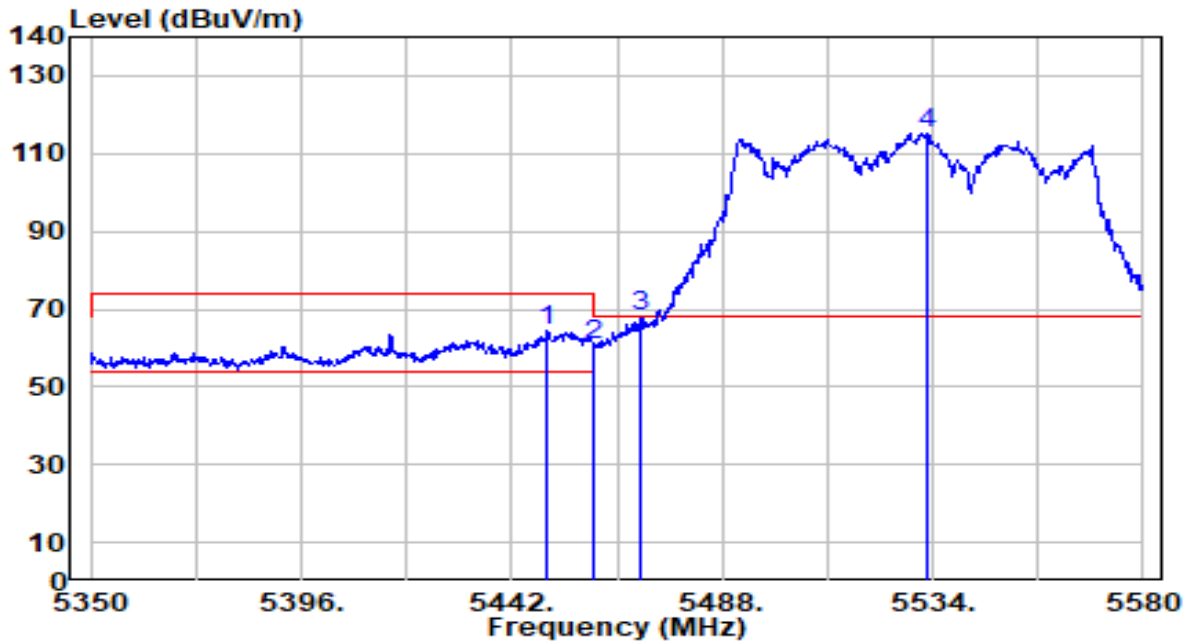


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5449.590	63.69	0.62	64.31	-9.69	74.00	196	82	Peak
2	5460.000	60.12	0.65	60.77	-13.23	74.00	196	82	Peak
3	* 5470.000	67.29	0.69	67.98	-0.22	68.20	196	82	Peak
4	5532.850	114.50	0.91	115.41	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

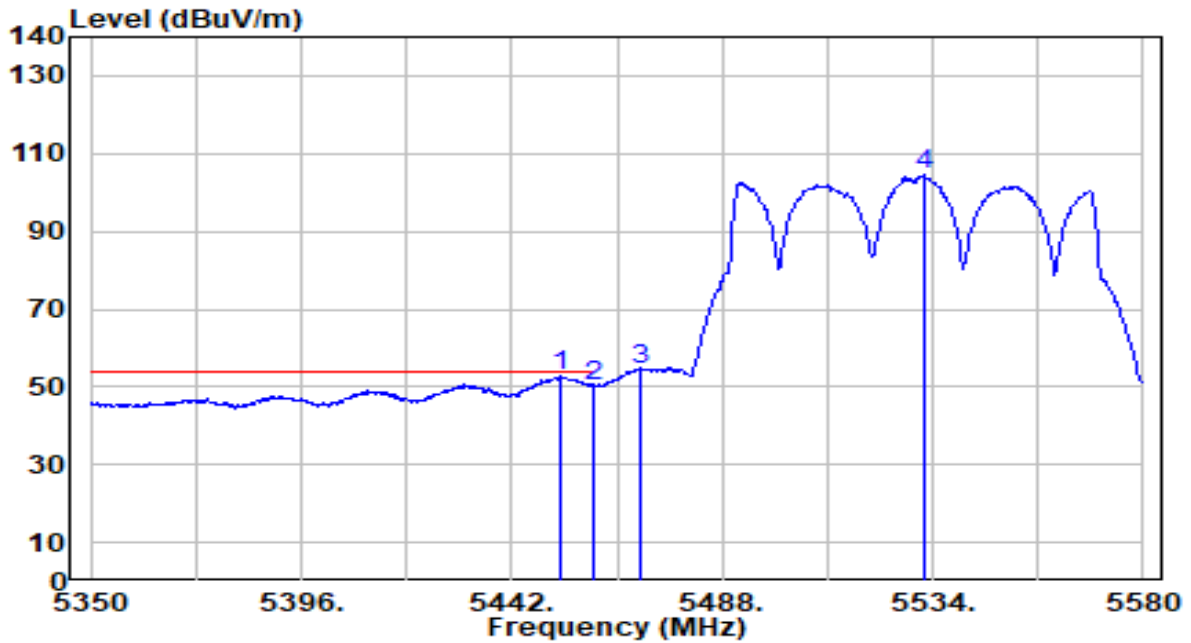


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5452.810	51.98	0.63	52.61	-1.39	54.00	196	82	Average
2		5460.000	49.70	0.65	50.35	-3.65	54.00	196	82	Average
3		5470.000	53.80	0.69	54.49	N/A	N/A	196	82	Average
4		5532.160	103.50	0.91	104.41	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

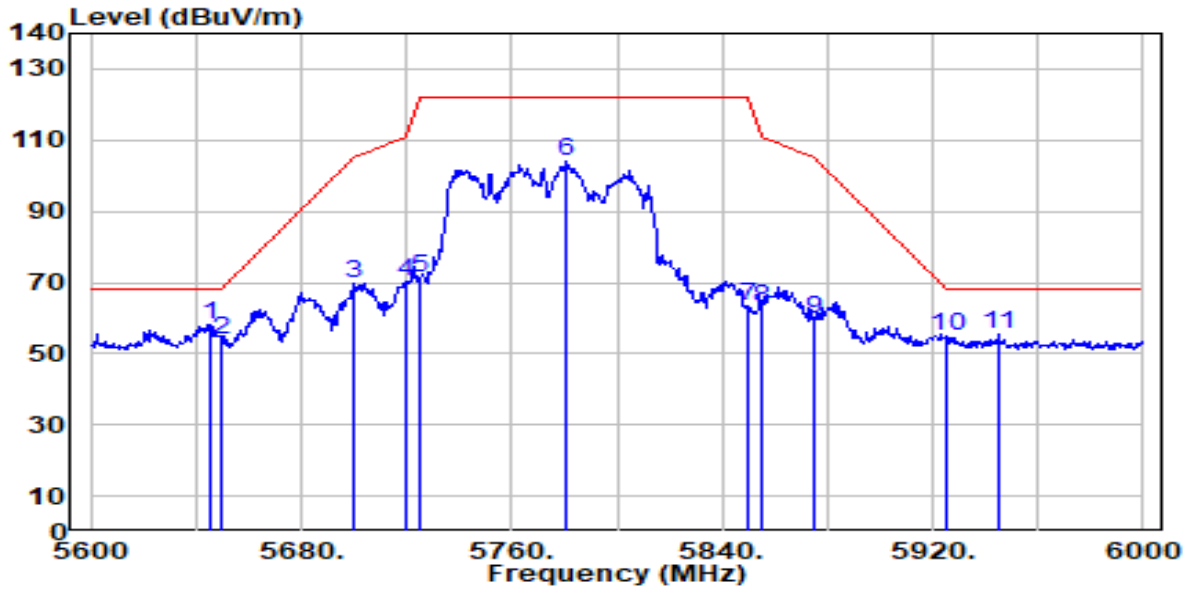


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.200	56.65	1.41	58.07	-10.13	68.20	289	176	Peak
2	5650.000	52.39	1.44	53.83	-14.37	68.20	289	176	Peak
3	5700.000	67.99	1.72	69.71	-35.49	105.20	289	176	Peak
4	5720.000	68.31	1.84	70.14	-40.66	110.80	289	176	Peak
5	5725.000	69.33	1.86	71.20	-51.00	122.20	289	176	Peak
6	5780.800	102.14	2.18	104.32	N/A	N/A	289	176	Peak
7	5850.000	61.08	2.27	63.35	-58.85	122.20	289	176	Peak
8	5855.000	60.48	2.27	62.75	-48.05	110.80	289	176	Peak
9	5875.000	57.24	2.26	59.50	-45.70	105.20	289	176	Peak
10	5925.000	52.85	2.25	55.10	-13.10	68.20	289	176	Peak
11	5945.200	53.33	2.24	55.56	-12.64	68.20	289	176	Peak

Note:

1. "\*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

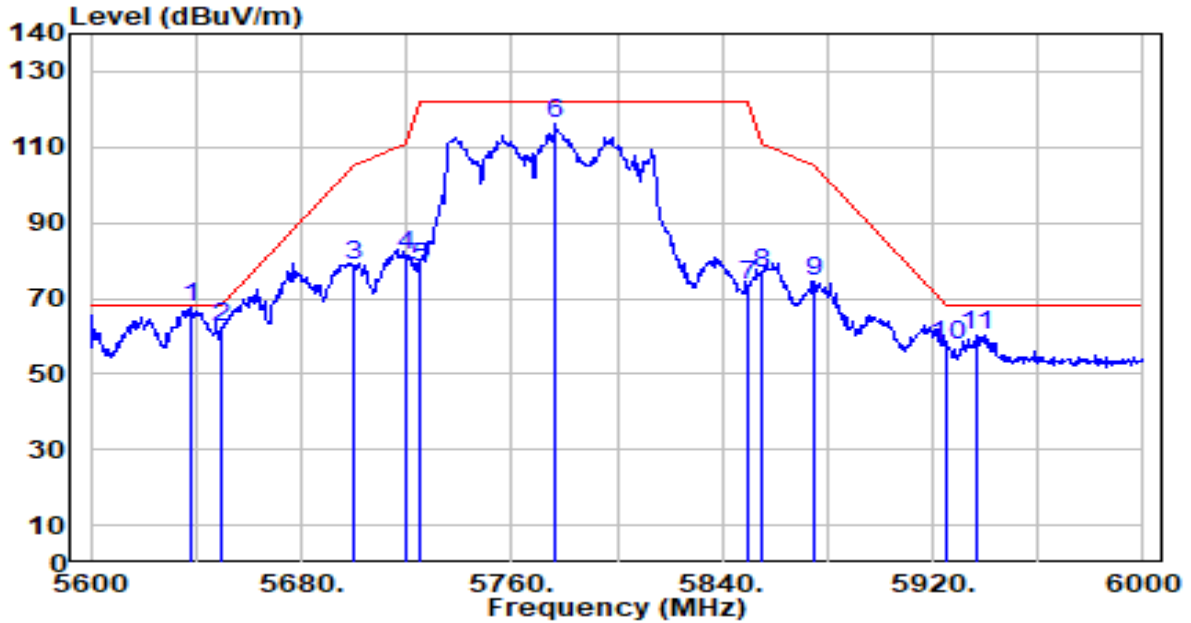


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5638.400	66.23	1.37	67.61	-0.59	68.20	200	343	Peak
2	5650.000	60.69	1.44	62.13	-6.07	68.20	200	343	Peak
3	5700.000	77.07	1.72	78.79	-26.41	105.20	200	343	Peak
4	5720.000	79.30	1.84	81.14	-29.66	110.80	200	343	Peak
5	5725.000	76.10	1.86	77.96	-44.24	122.20	200	343	Peak
6	5776.400	114.03	2.15	116.19	N/A	N/A	200	343	Peak
7	5850.000	71.34	2.27	73.61	-48.59	122.20	200	343	Peak
8	5855.000	74.09	2.27	76.36	-34.44	110.80	200	343	Peak
9	5875.000	72.15	2.26	74.41	-30.79	105.20	200	343	Peak
10	5925.000	55.57	2.25	57.81	-10.39	68.20	200	343	Peak
11	5936.800	58.20	2.24	60.44	-7.76	68.20	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

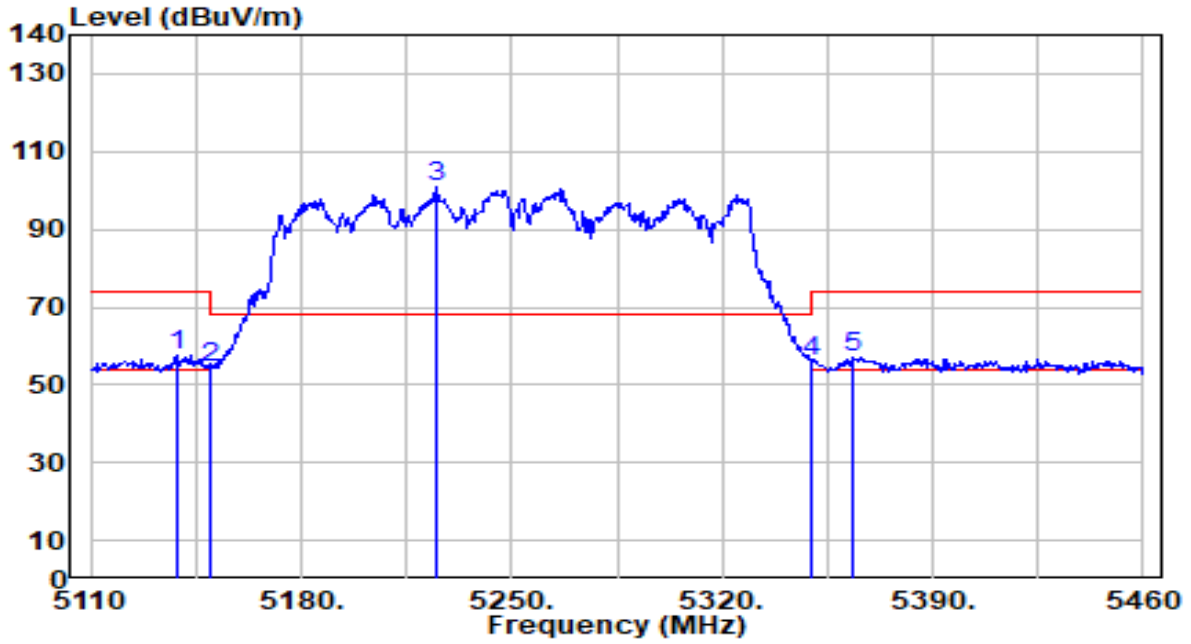


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.350	0.68	57.68	-16.32	74.00	306	205	Peak
2		5150.000	0.68	54.33	-19.67	74.00	306	205	Peak
3		5224.800	0.64	100.70	N/A	N/A	306	205	Peak
4		5350.000	0.51	56.16	-17.84	74.00	306	205	Peak
5		5363.050	0.49	57.11	-16.89	74.00	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

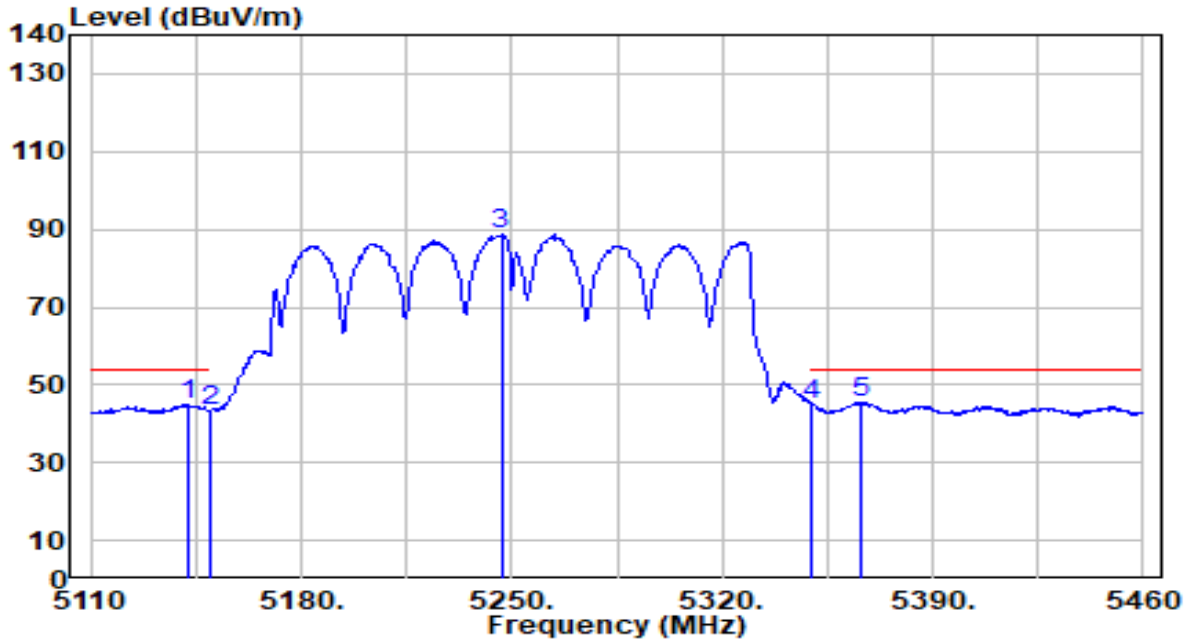


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.550	44.26	0.68	44.94	-9.06	54.00	306	205	Average
2	5150.000	42.75	0.68	43.43	-10.57	54.00	306	205	Average
3	5246.500	87.99	0.62	88.61	N/A	N/A	306	205	Average
4	5350.000	44.27	0.51	44.77	-9.23	54.00	306	205	Average
5	* 5365.850	45.09	0.49	45.57	-8.43	54.00	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

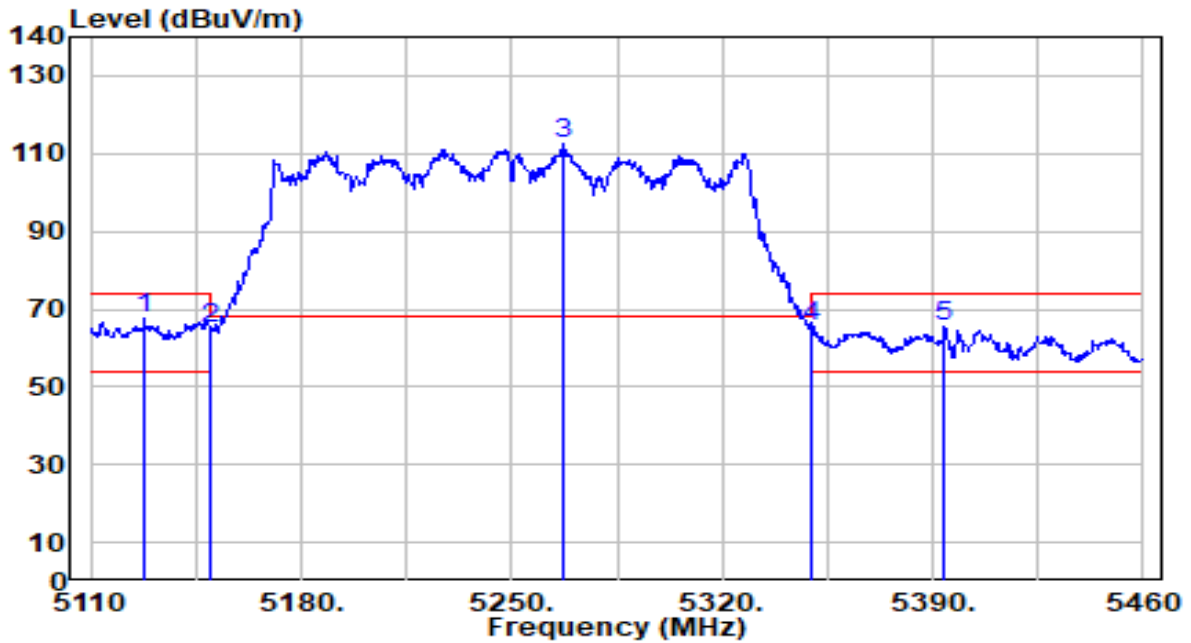


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5127.850	67.15	0.68	67.83	-6.17	74.00	168	76	Peak
2		5150.000	64.47	0.68	65.14	-8.86	74.00	168	76	Peak
3		5266.800	111.78	0.60	112.38	N/A	N/A	168	76	Peak
4		5350.000	64.87	0.51	65.37	-8.63	74.00	168	76	Peak
5		5393.850	65.03	0.46	65.49	-8.51	74.00	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

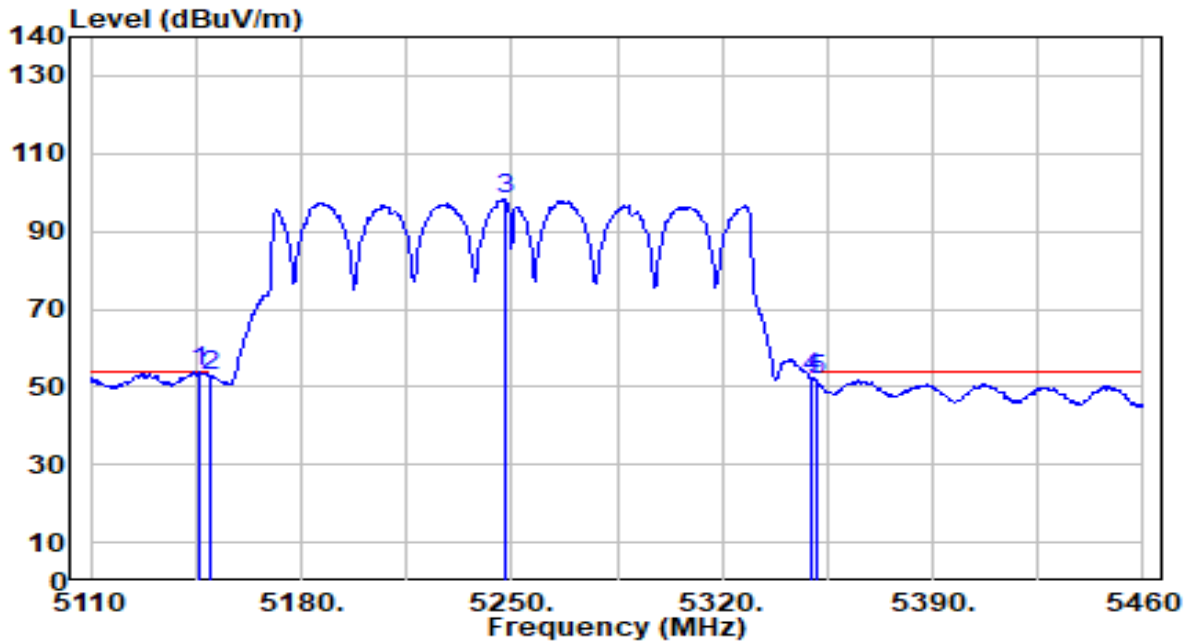


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.11	0.68	53.79	-0.21	54.00	168	76	Average
2		52.20	0.68	52.88	-1.12	54.00	168	76	Average
3		97.71	0.62	98.33	N/A	N/A	168	76	Average
4		51.87	0.51	52.38	-1.62	54.00	168	76	Average
5		51.28	0.50	51.78	-2.22	54.00	168	76	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

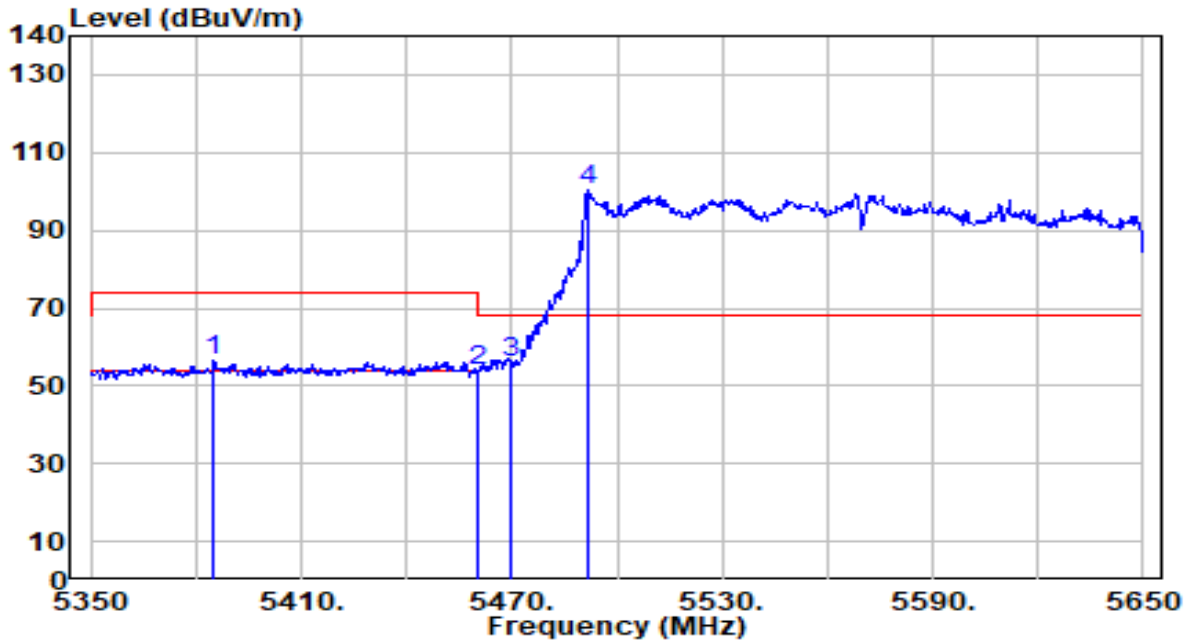


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5385.100	55.90	0.47	56.37	-17.63	74.00	281	199	Peak
2	5460.000	53.34	0.65	53.99	-20.01	74.00	281	199	Peak
3	* 5470.000	55.06	0.69	55.74	-12.46	68.20	281	199	Peak
4	5491.600	99.39	0.76	100.15	N/A	N/A	281	199	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

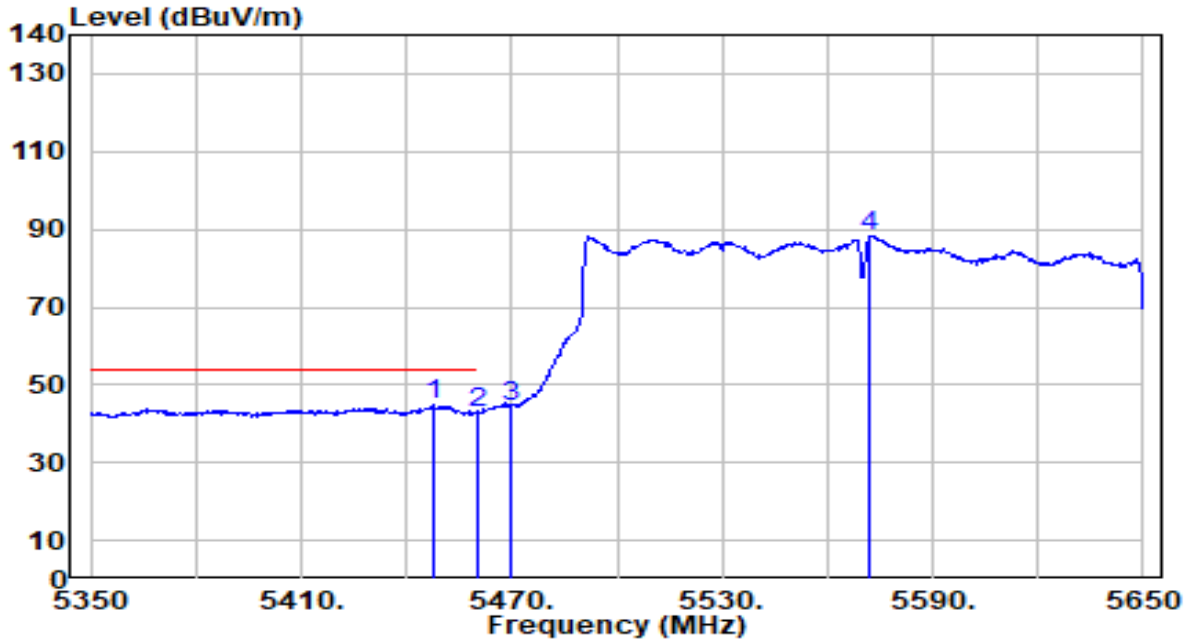


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5447.800	44.14	0.61	44.75	-9.25	54.00	281	199	Average
2	5460.000	42.32	0.65	42.98	-11.02	54.00	281	199	Average
3	5470.000	43.80	0.69	44.49	N/A	N/A	281	199	Average
4	5572.000	87.11	1.05	88.17	N/A	N/A	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

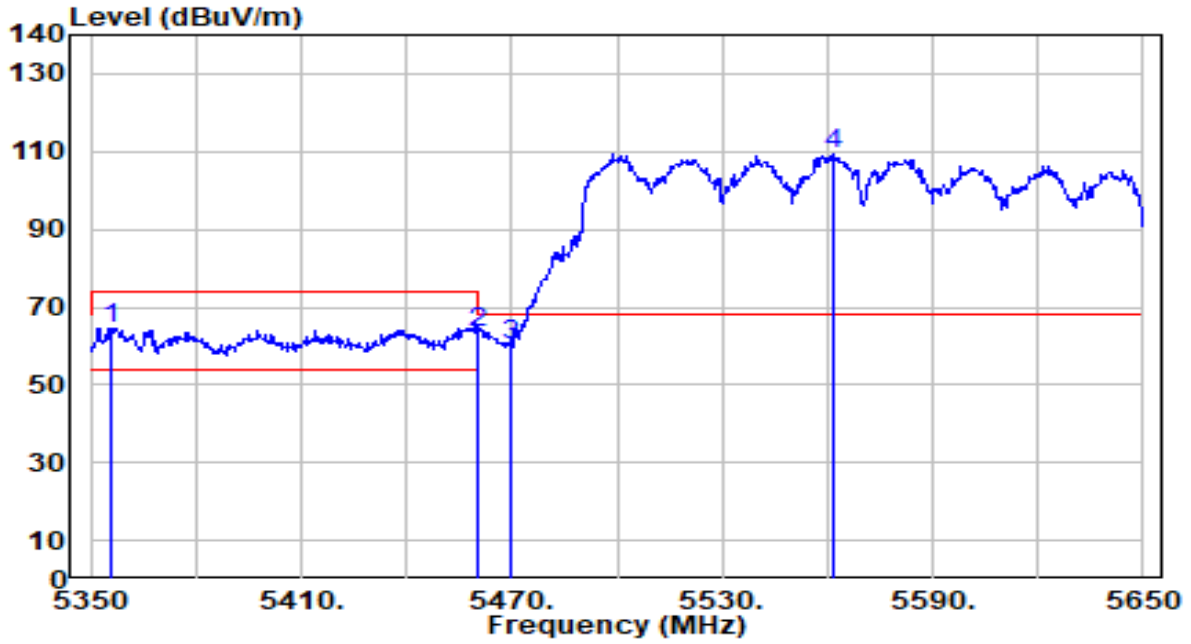


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5355.700	64.19	0.50	64.69	-9.31	74.00	240	267	Peak
2	5460.000	62.63	0.65	63.29	-10.71	74.00	240	267	Peak
3	* 5470.000	59.35	0.69	60.04	-8.16	68.20	240	267	Peak
4	5561.500	108.29	1.02	109.31	N/A	N/A	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

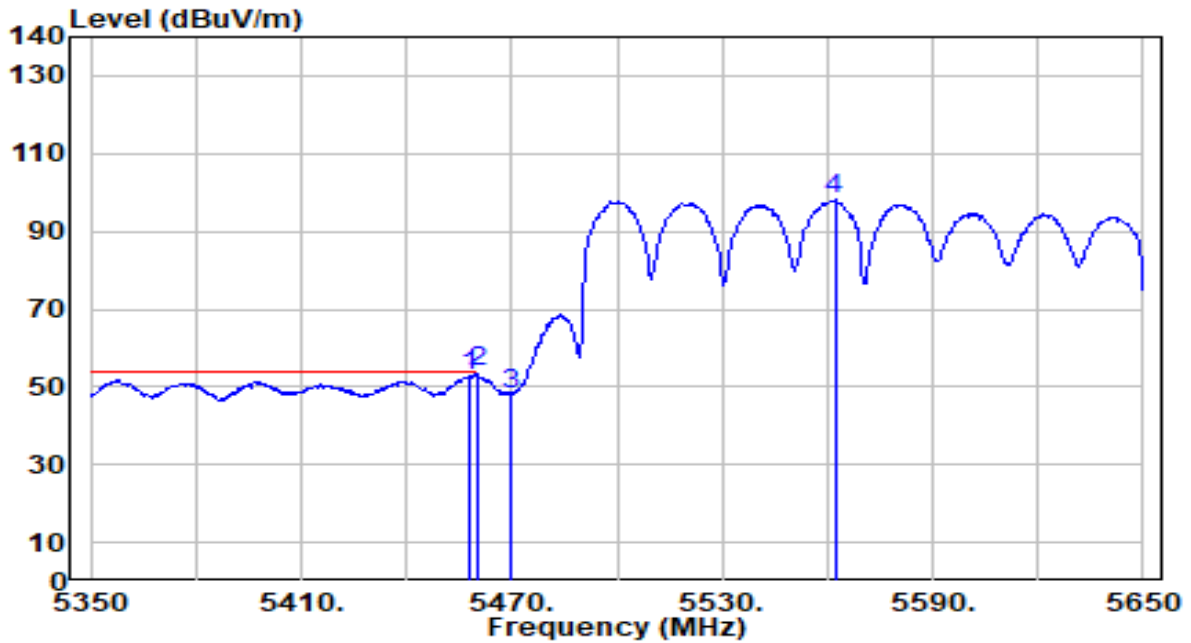


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.300	52.37	0.65	53.02	-0.98	54.00	240	267	Average
2	* 5460.000	53.05	0.65	53.71	-0.29	54.00	240	267	Average
3	5470.000	47.29	0.69	47.98	N/A	N/A	240	267	Average
4	5562.100	97.02	1.02	98.04	N/A	N/A	240	267	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

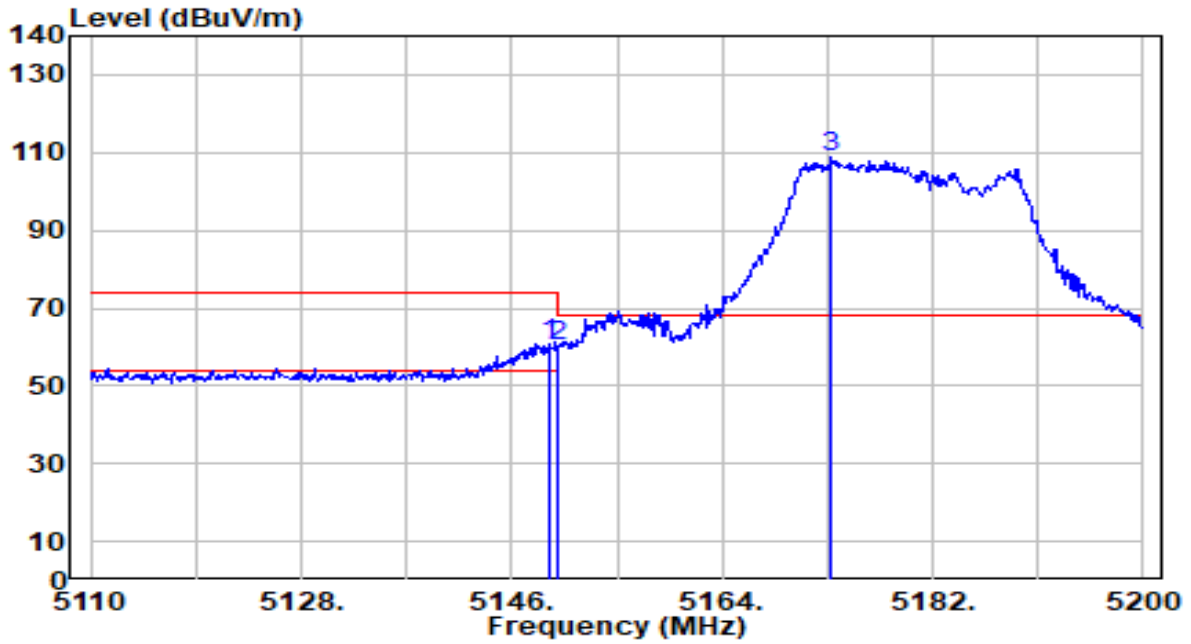


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.150	60.14	0.68	60.81	-13.19	74.00	306	205	Peak
2	5150.000	59.38	0.68	60.05	-13.95	74.00	306	205	Peak
3	5173.360	107.90	0.67	108.57	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

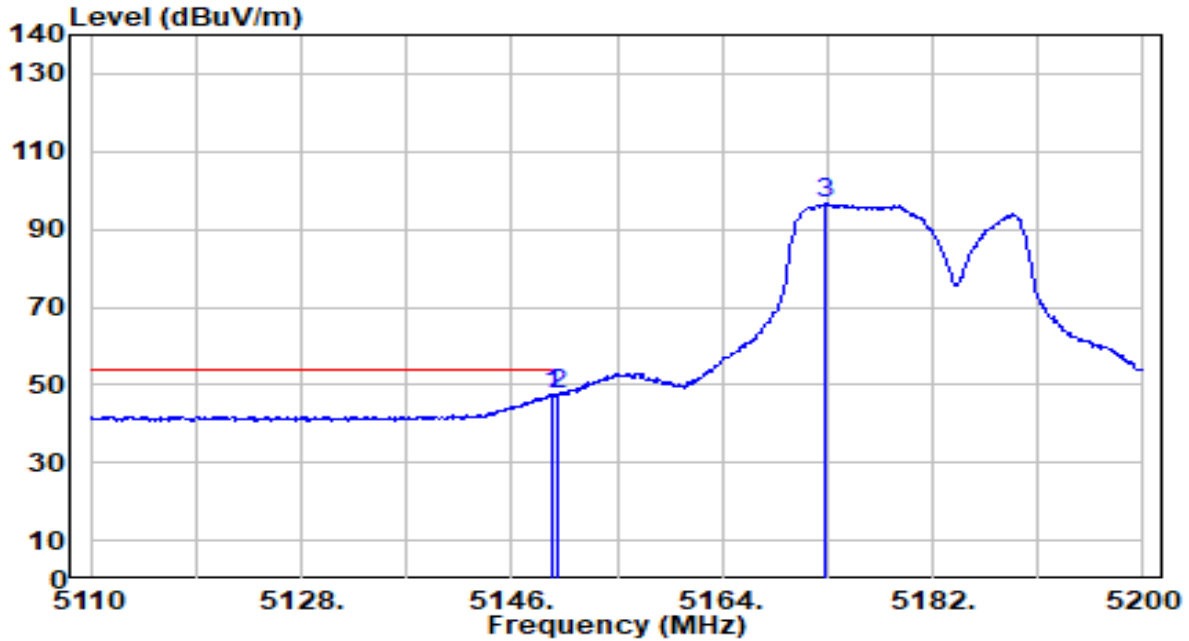


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.420	46.91	0.68	47.58	-6.42	54.00	306	205	Average
2		5150.000	46.81	0.68	47.49	-6.51	54.00	306	205	Average
3		5172.910	96.07	0.67	96.75	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

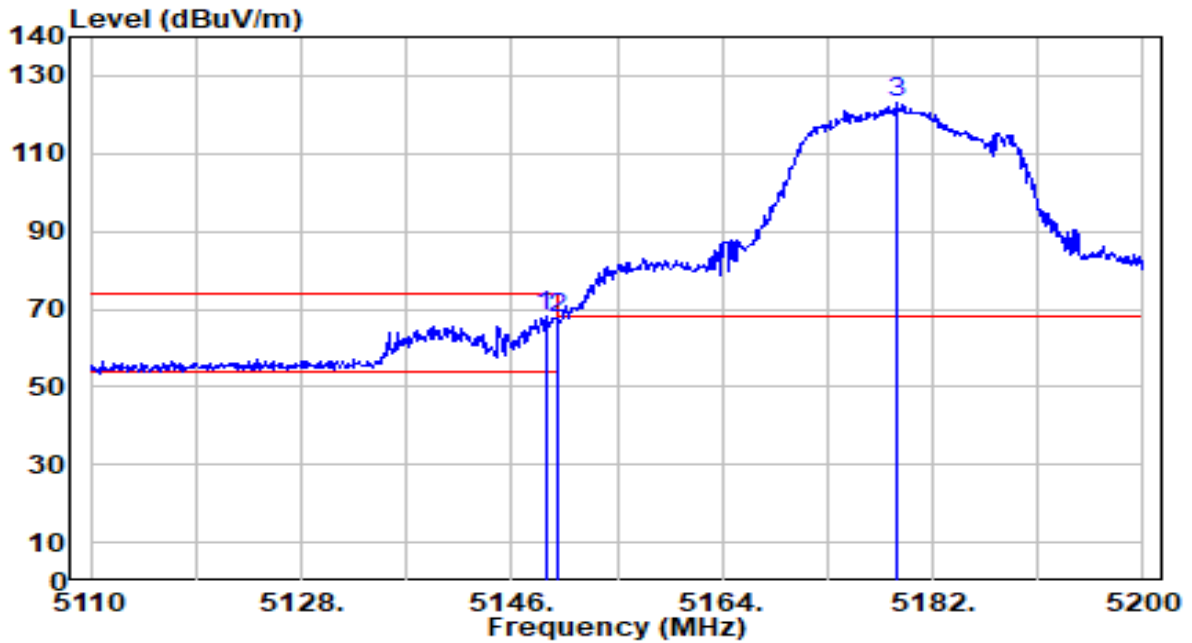


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.880	67.24	0.68	67.91	-6.09	74.00	168	76	Peak
2		5150.000	66.73	0.68	67.41	-6.59	74.00	168	76	Peak
3		5178.940	122.64	0.67	123.31	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

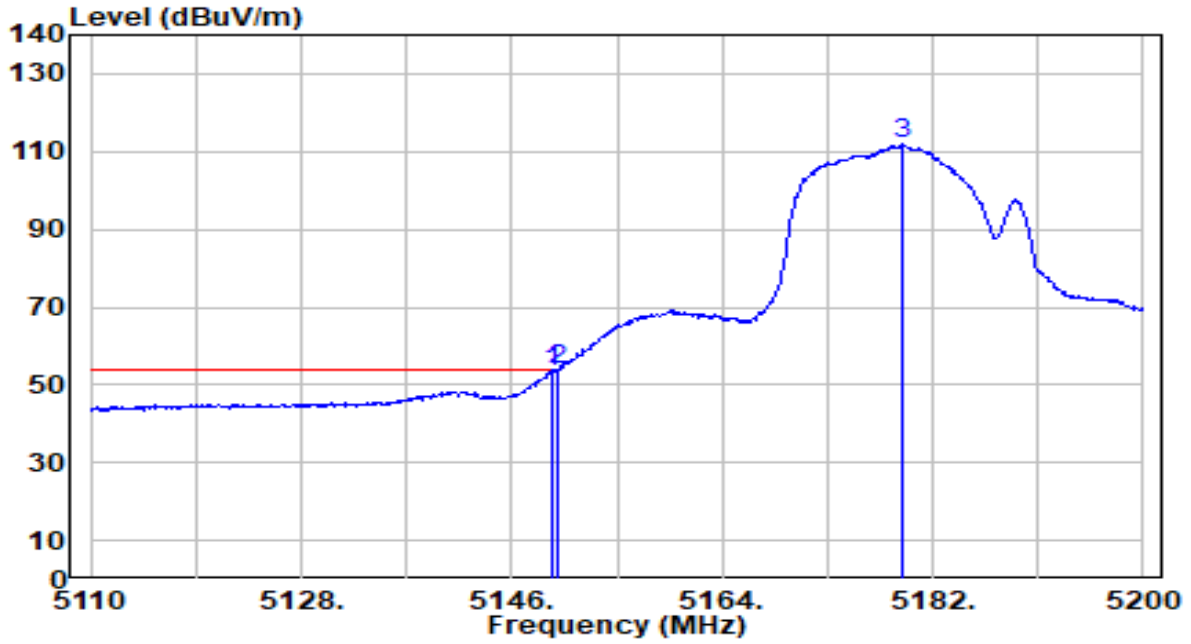


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	52.70	0.68	53.38	-0.62	54.00	168	76	Average
2	* 5150.000	53.08	0.68	53.76	-0.24	54.00	168	76	Average
3	5179.300	111.31	0.67	111.99	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

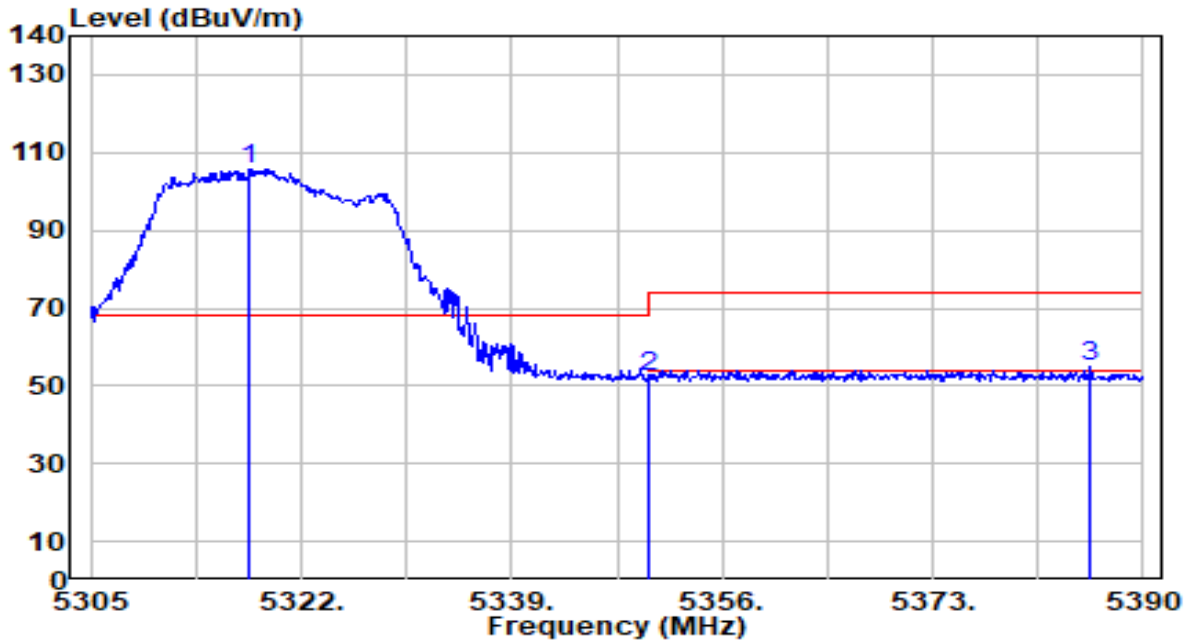


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.835	105.15	0.54	105.69	N/A	N/A	281	199	Peak
2	5350.000	51.67	0.51	52.18	-21.82	74.00	281	199	Peak
3	* 5385.750	54.24	0.47	54.70	-19.30	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

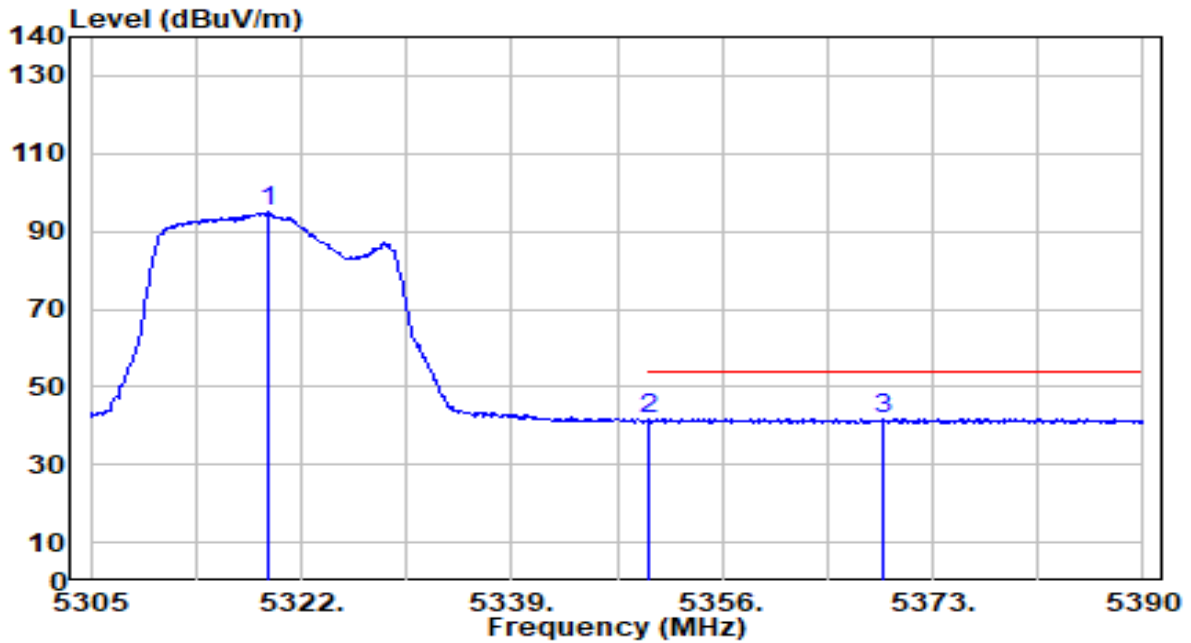


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.280	94.35	0.54	94.89	N/A	N/A	281	199	Average
2	5350.000	40.97	0.51	41.48	-12.52	54.00	281	199	Average
3	* 5369.090	41.39	0.48	41.87	-12.13	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

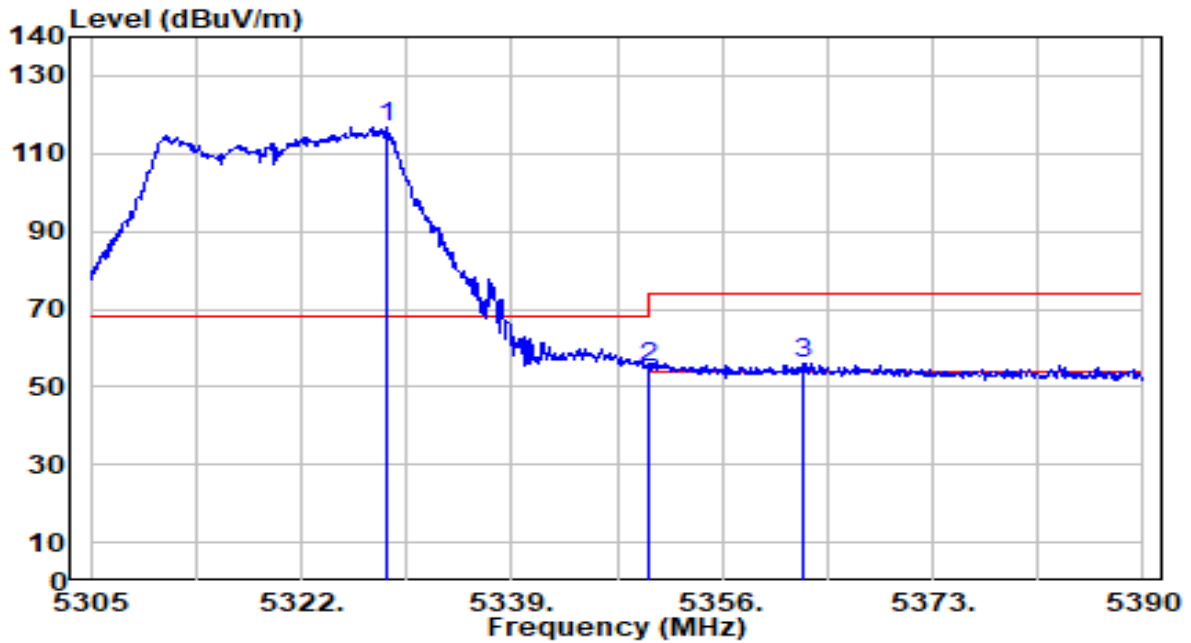


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.970	116.44	0.53	116.96	N/A	N/A	240	267	Peak
2	5350.000	54.54	0.51	55.05	-18.95	74.00	240	267	Peak
3	* 5362.630	55.43	0.49	55.92	-18.08	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

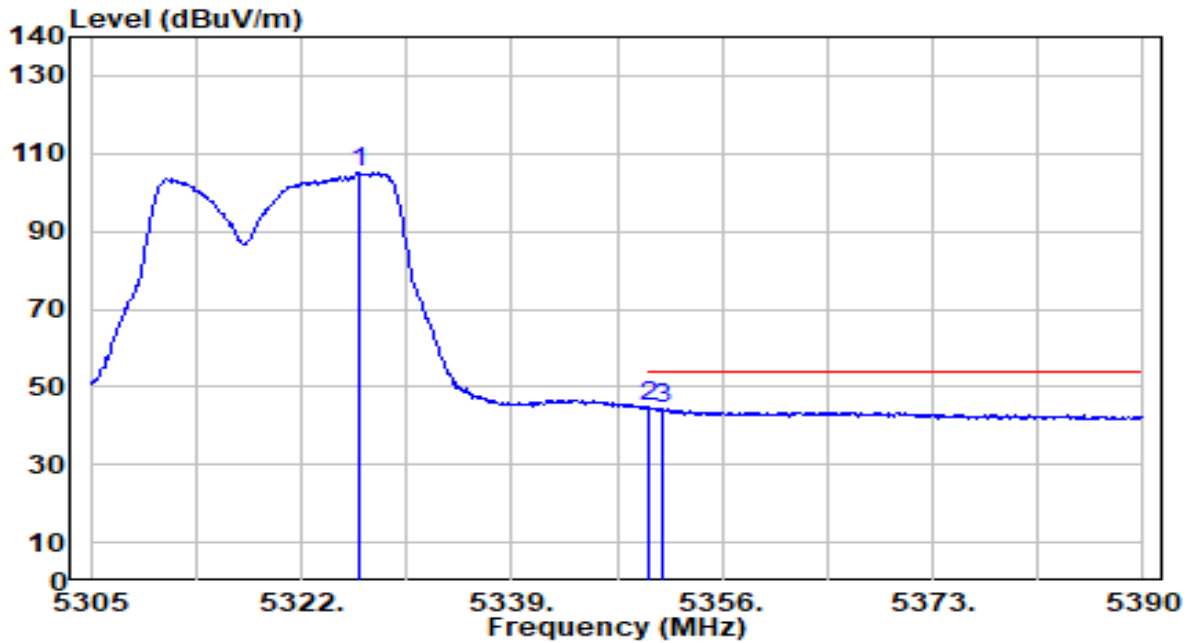


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.590	104.68	0.53	105.21	N/A	N/A	240	267	Average
2	* 5350.000	44.20	0.51	44.71	-9.29	54.00	240	267	Average
3	5351.155	43.70	0.50	44.20	-9.80	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

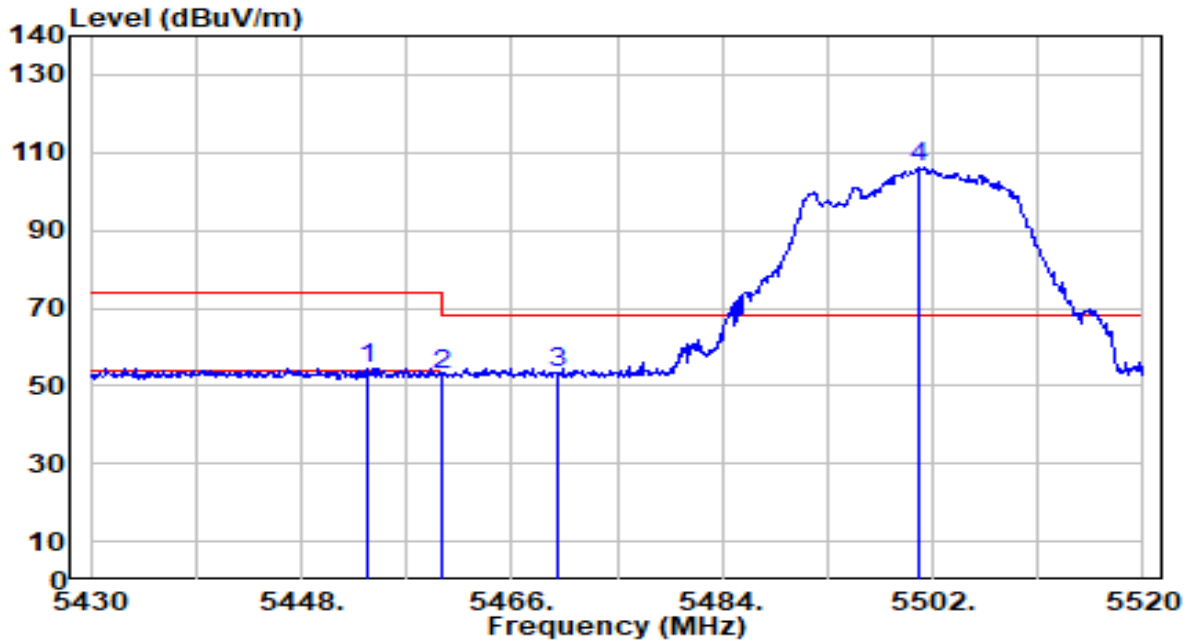


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.580	53.92	0.63	54.55	-19.45	74.00	213	38	Peak
2	5460.000	52.37	0.65	53.02	-20.98	74.00	213	38	Peak
3	* 5470.000	52.85	0.69	53.54	-14.66	68.20	213	38	Peak
4	5500.830	105.49	0.79	106.28	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

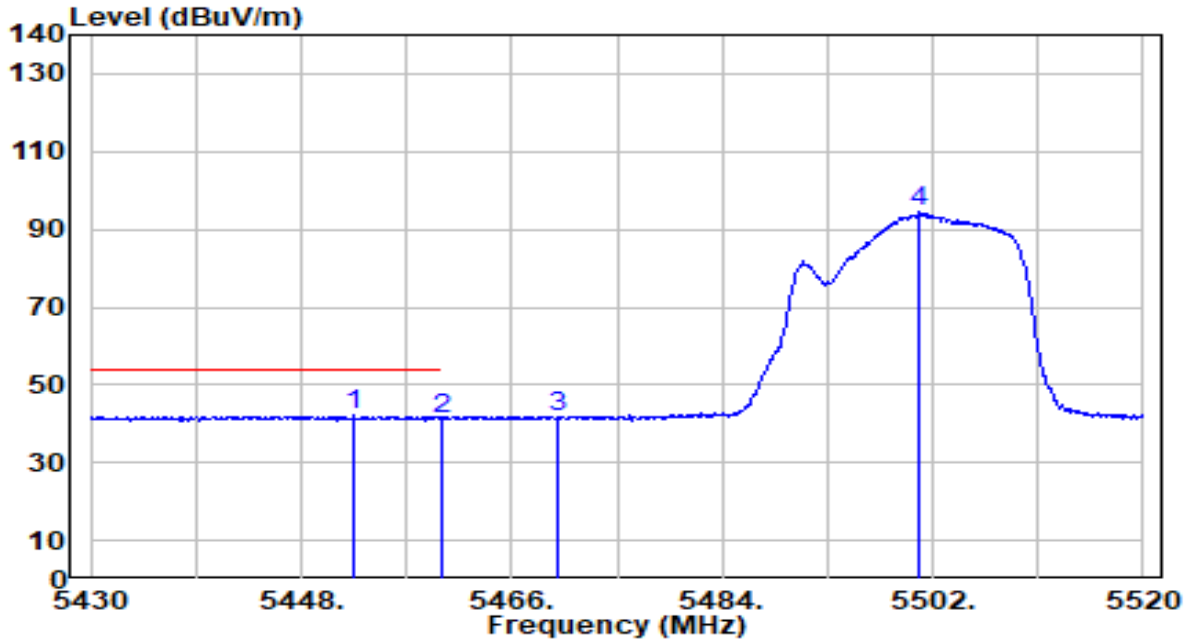


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5452.500	41.49	0.63	42.12	-11.88	54.00	213	38	Average
2	5460.000	40.76	0.65	41.41	-12.59	54.00	213	38	Average
3	5470.000	40.98	0.69	41.66	N/A	N/A	213	38	Average
4	5500.920	93.56	0.79	94.35	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

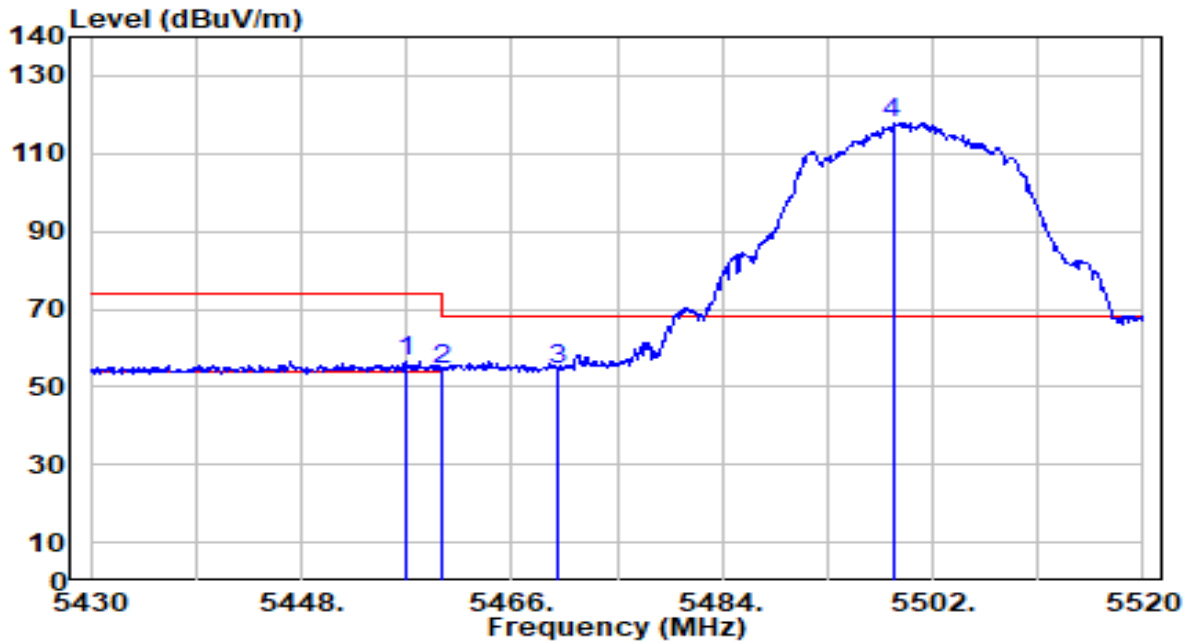


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.910	55.89	0.64	56.54	-17.46	74.00	196	82	Peak
2	5460.000	53.52	0.65	54.18	-19.82	74.00	196	82	Peak
3	* 5470.000	53.64	0.69	54.33	-13.87	68.20	196	82	Peak
4	5498.580	117.20	0.79	117.98	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

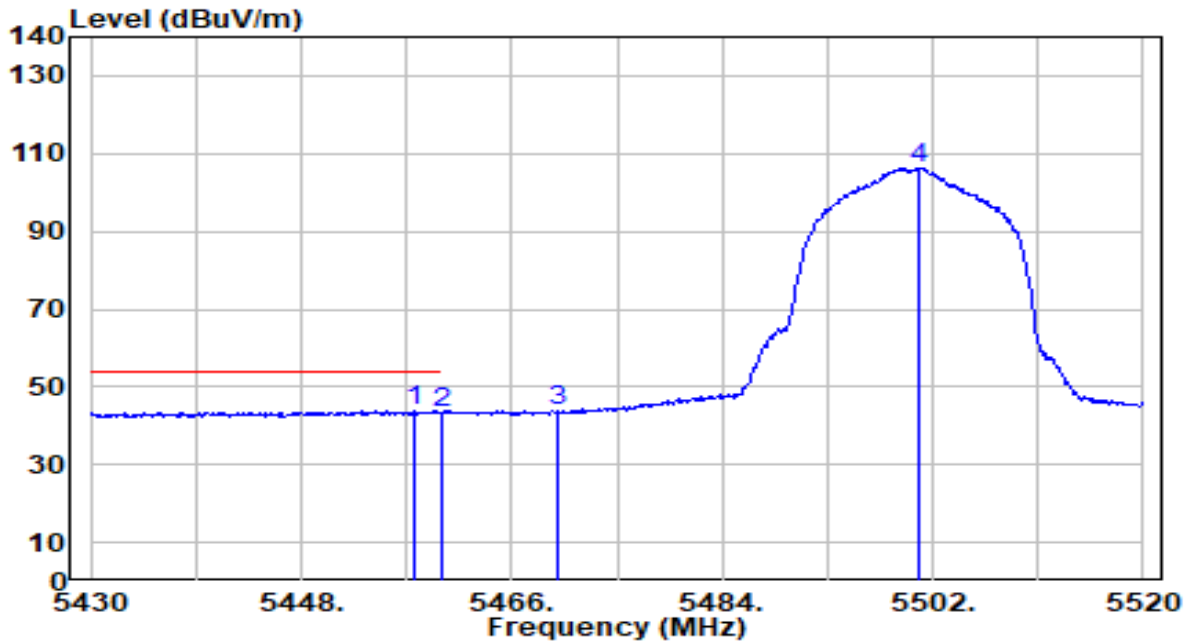


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5457.630	43.17	0.65	43.82	-10.18	54.00	196	82	Average
2	5460.000	42.62	0.65	43.27	-10.73	54.00	196	82	Average
3	5470.000	43.08	0.69	43.77	N/A	N/A	196	82	Average
4	5500.740	105.50	0.79	106.29	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

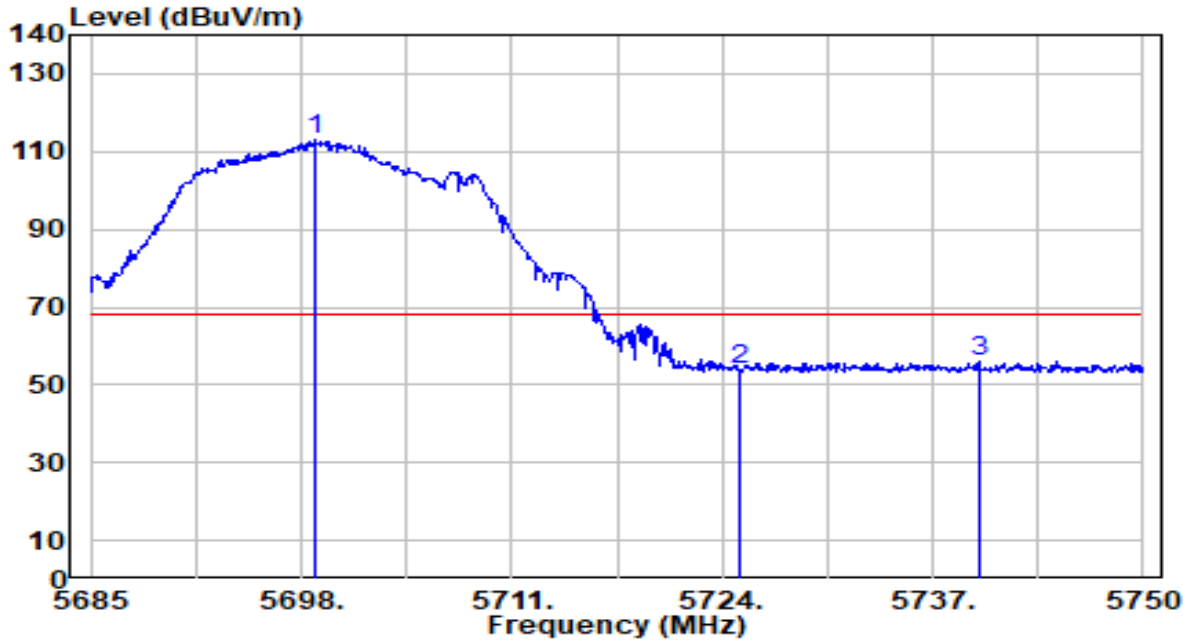


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.910	111.49	1.72	113.21	N/A	N/A	100	174	Peak
2	5725.000	52.09	1.86	53.95	-14.25	68.20	100	174	Peak
3	* 5739.860	54.14	1.95	56.09	-12.11	68.20	100	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

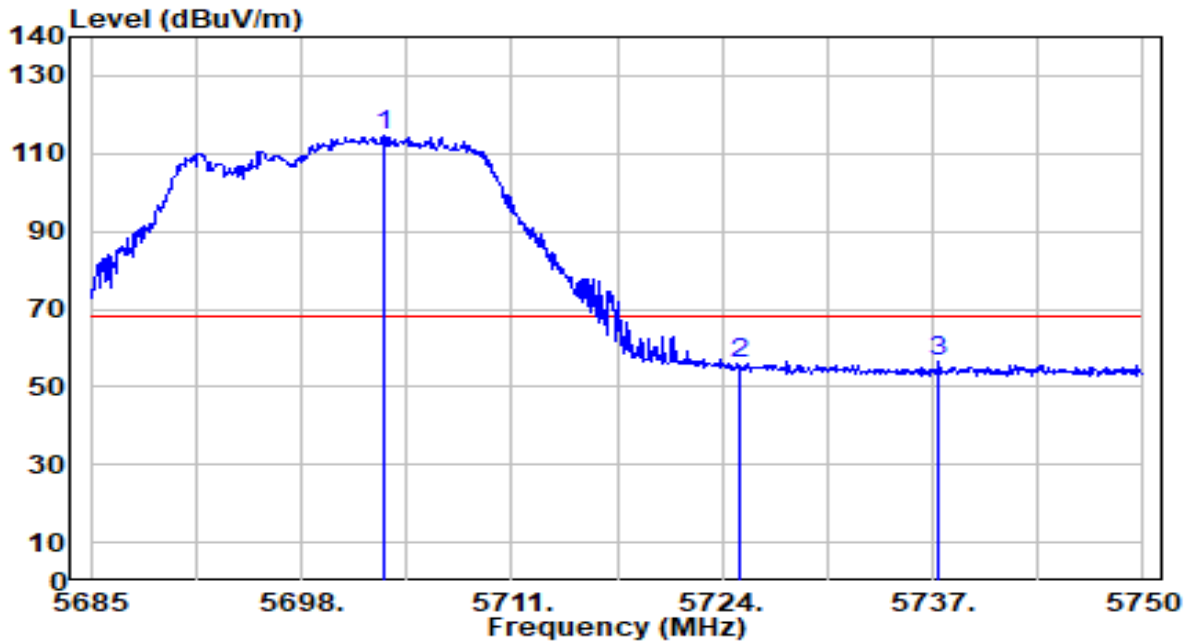


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.070	112.87	1.74	114.61	N/A	N/A	196	340	Peak
2	5725.000	54.31	1.86	56.17	-12.03	68.20	196	340	Peak
3	* 5737.390	54.54	1.93	56.48	-11.72	68.20	196	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 149 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

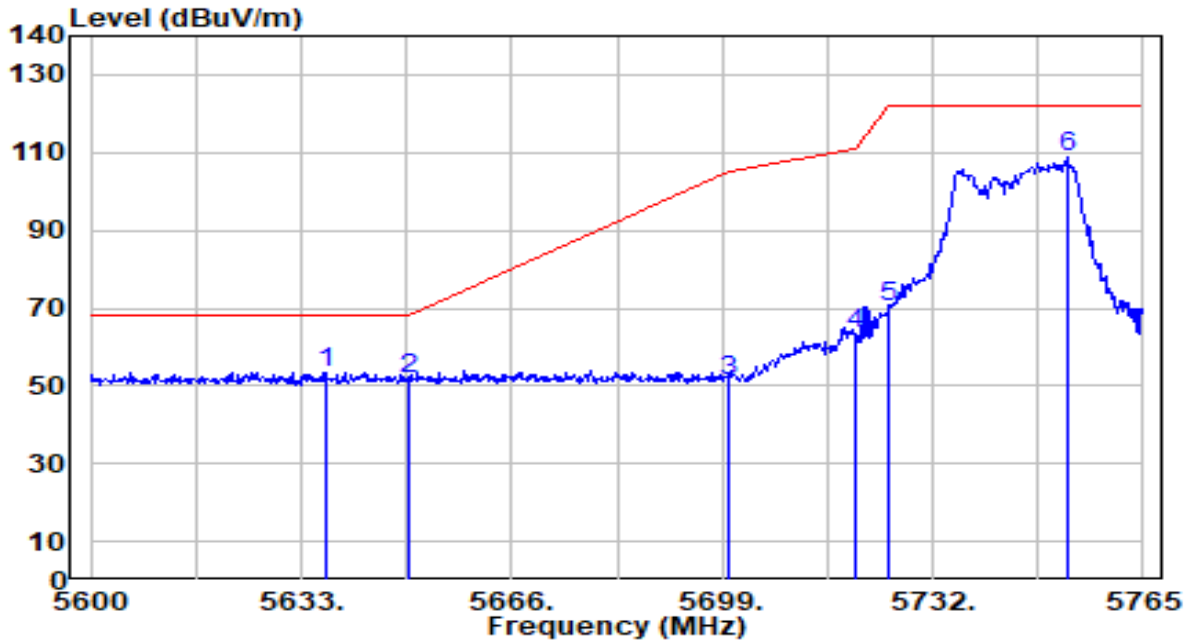


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5636.795	52.24	1.36	53.61	-14.59	68.20	289	176	Peak
2	5650.000	50.44	1.44	51.88	-16.32	68.20	289	176	Peak
3	5700.000	49.48	1.72	51.20	-54.00	105.20	289	176	Peak
4	5720.000	61.65	1.84	63.48	-47.32	110.80	289	176	Peak
5	5725.000	68.42	1.86	70.28	-51.92	122.20	289	176	Peak
6	5753.120	106.82	2.02	108.84	N/A	N/A	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 149 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

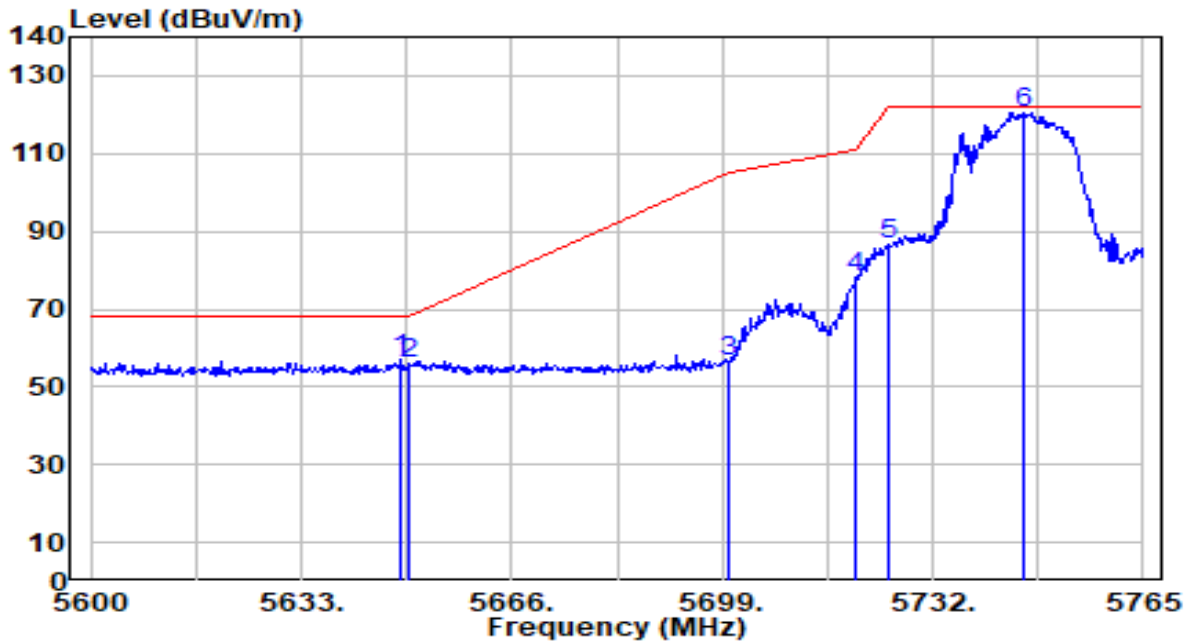


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5648.675	55.86	1.43	57.29	-10.91	68.20	200	343	Peak
2		5650.000	54.63	1.44	56.07	-12.13	68.20	200	343	Peak
3		5700.000	54.95	1.72	56.67	-48.53	105.20	200	343	Peak
4		5720.000	76.49	1.84	78.33	-32.47	110.80	200	343	Peak
5		5725.000	84.86	1.86	86.72	-35.48	122.20	200	343	Peak
6		5746.355	118.63	1.98	120.62	N/A	N/A	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 165 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

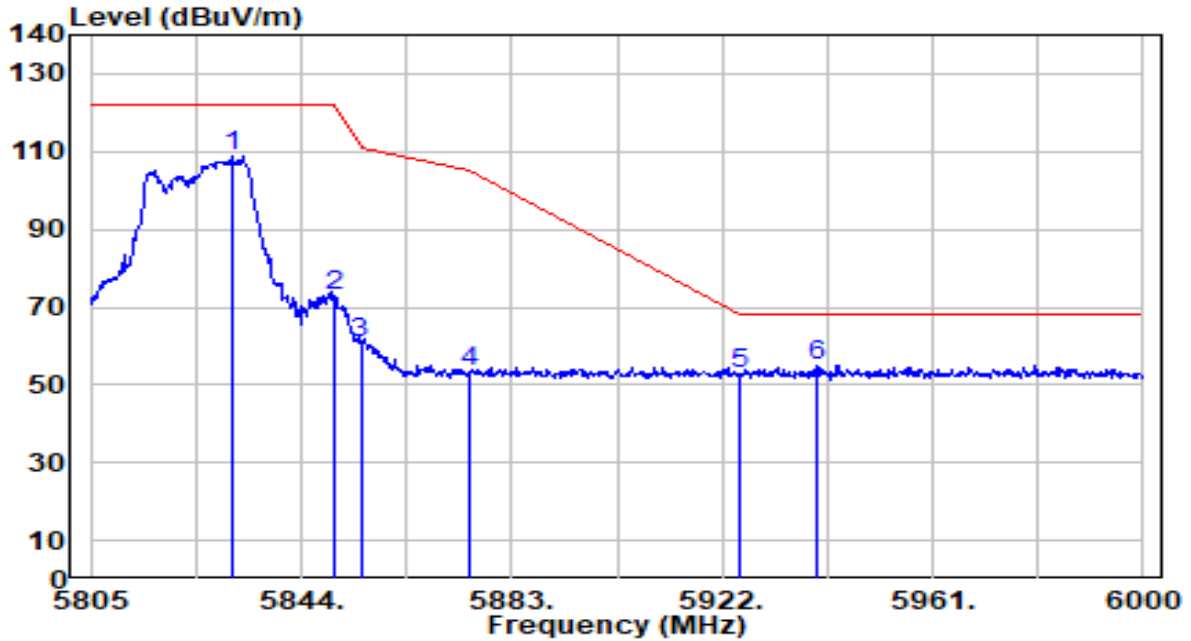


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5831.130	106.57	2.28	108.85	N/A	N/A	296	174	Peak
2	5850.000	70.67	2.27	72.95	-49.25	122.20	296	174	Peak
3	5855.000	58.70	2.27	60.97	-49.83	110.80	296	174	Peak
4	5875.000	51.20	2.26	53.46	-51.74	105.20	296	174	Peak
5	5925.000	50.57	2.25	52.81	-15.39	68.20	296	174	Peak
6	* 5939.355	52.79	2.24	55.03	-13.17	68.20	296	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 165 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

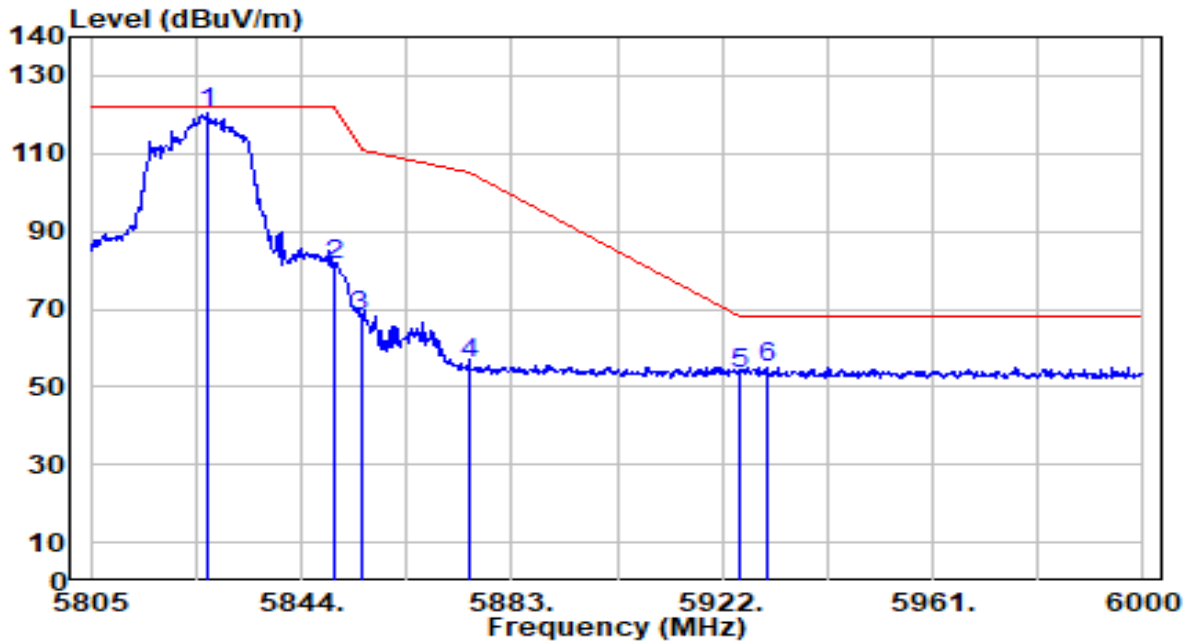


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.840	117.95	2.28	120.23	N/A	N/A	181	342	Peak
2	5850.000	79.07	2.27	81.34	-40.86	122.20	181	342	Peak
3	5855.000	66.12	2.27	68.39	-42.41	110.80	181	342	Peak
4	5875.000	53.69	2.26	55.95	-49.25	105.20	181	342	Peak
5	5925.000	51.06	2.25	53.30	-14.90	68.20	181	342	Peak
6	* 5930.190	52.78	2.24	55.03	-13.17	68.20	181	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

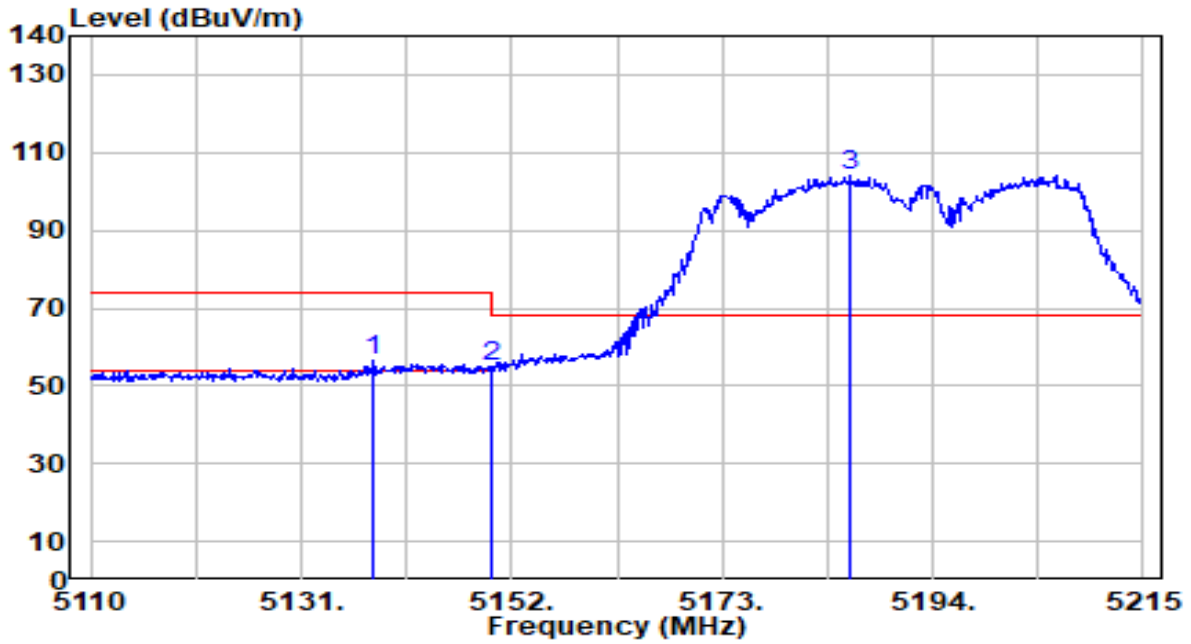


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5138.245	55.75	0.68	56.43	-17.57	74.00	306	205	Peak
2	5150.000	54.15	0.68	54.83	-19.17	74.00	306	205	Peak
3	5185.810	103.43	0.67	104.10	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

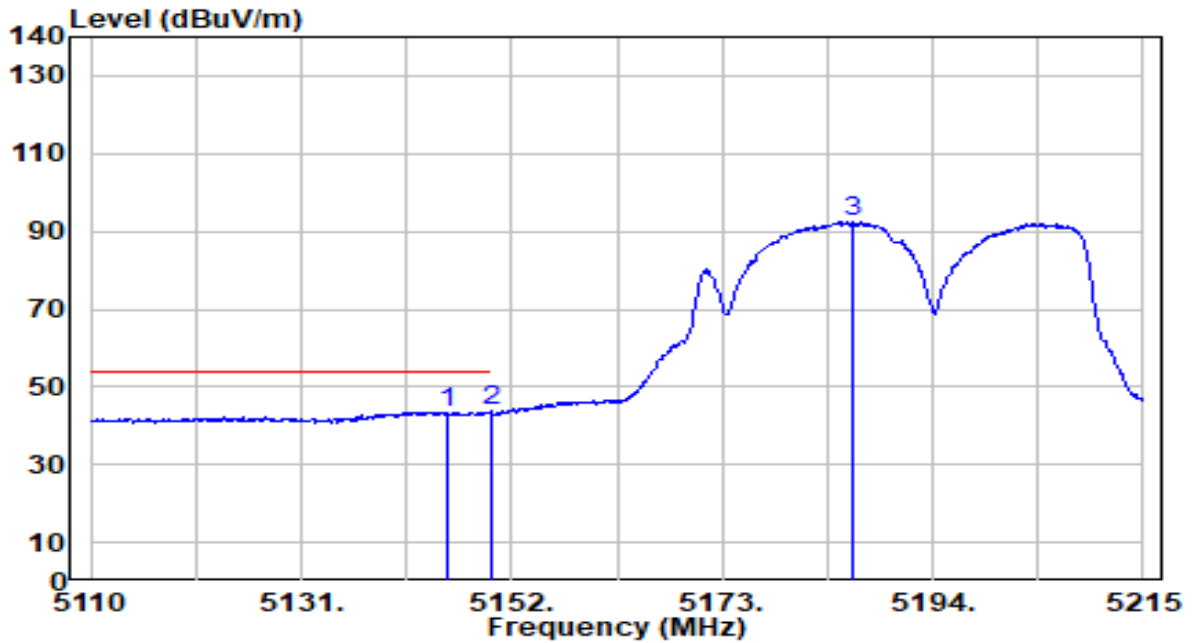


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.700	42.81	0.68	43.48	-10.52	54.00	306	205	Average
2	* 5150.000	42.93	0.68	43.60	-10.40	54.00	306	205	Average
3	5186.020	91.78	0.67	92.45	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

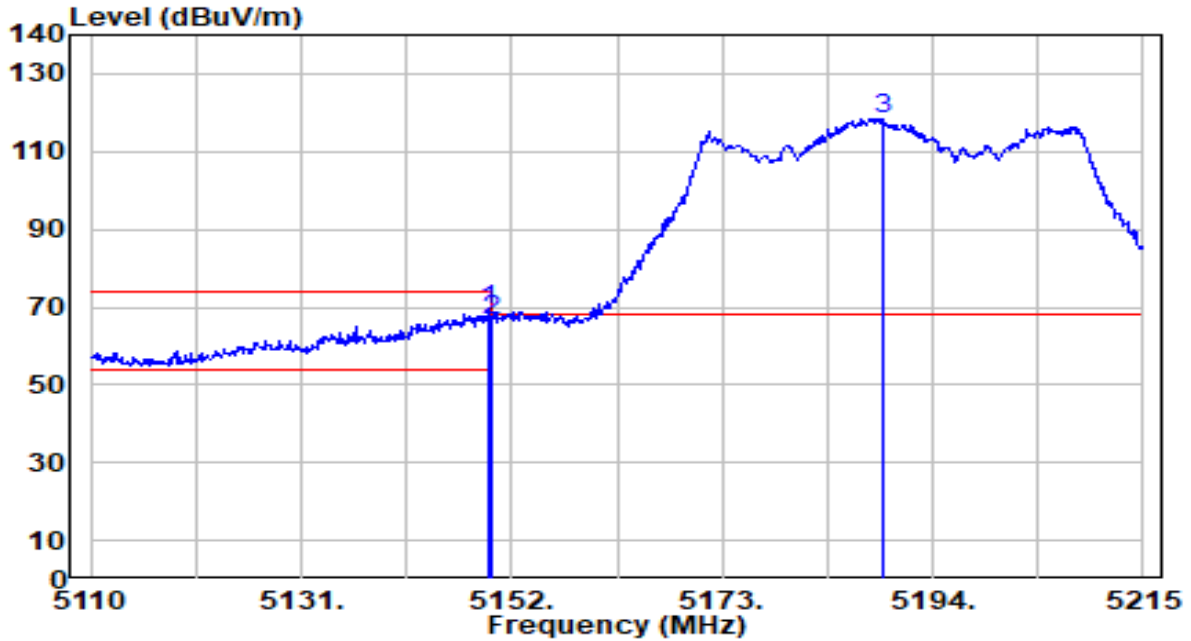


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.795	68.60	0.68	69.28	-4.72	74.00	168	76	Peak
2		5150.000	65.89	0.68	66.56	-7.44	74.00	168	76	Peak
3		5188.960	117.79	0.67	118.46	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

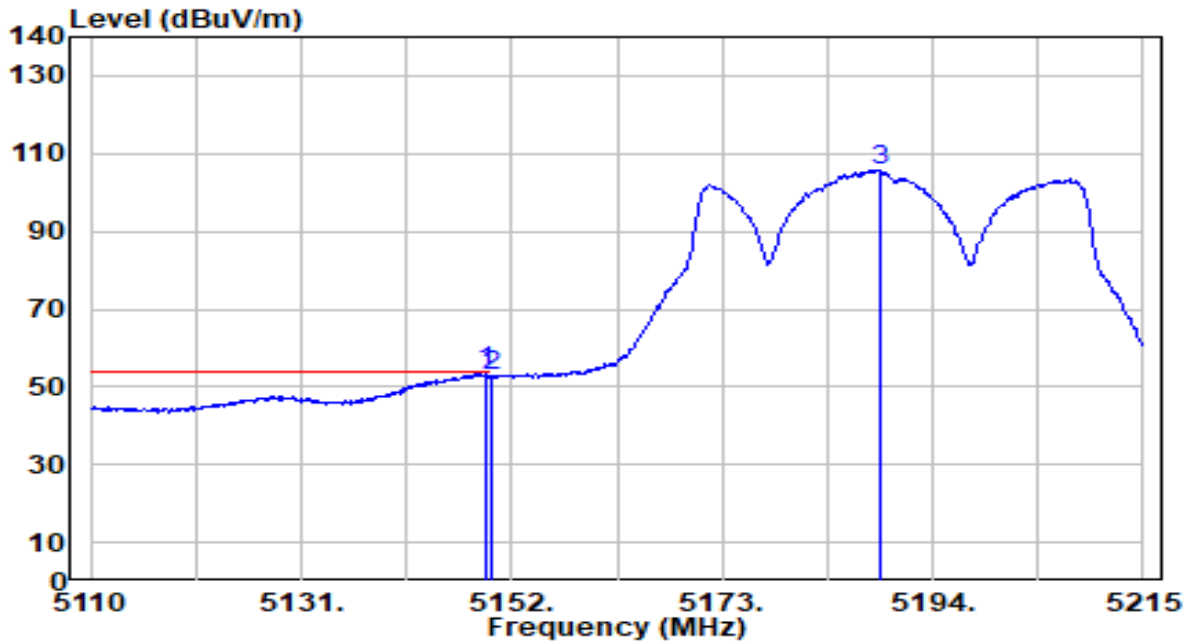


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.480	53.06	0.68	53.73	-0.27	54.00	168	76	Average
2		5150.000	52.16	0.68	52.83	-1.17	54.00	168	76	Average
3		5188.750	105.13	0.67	105.80	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

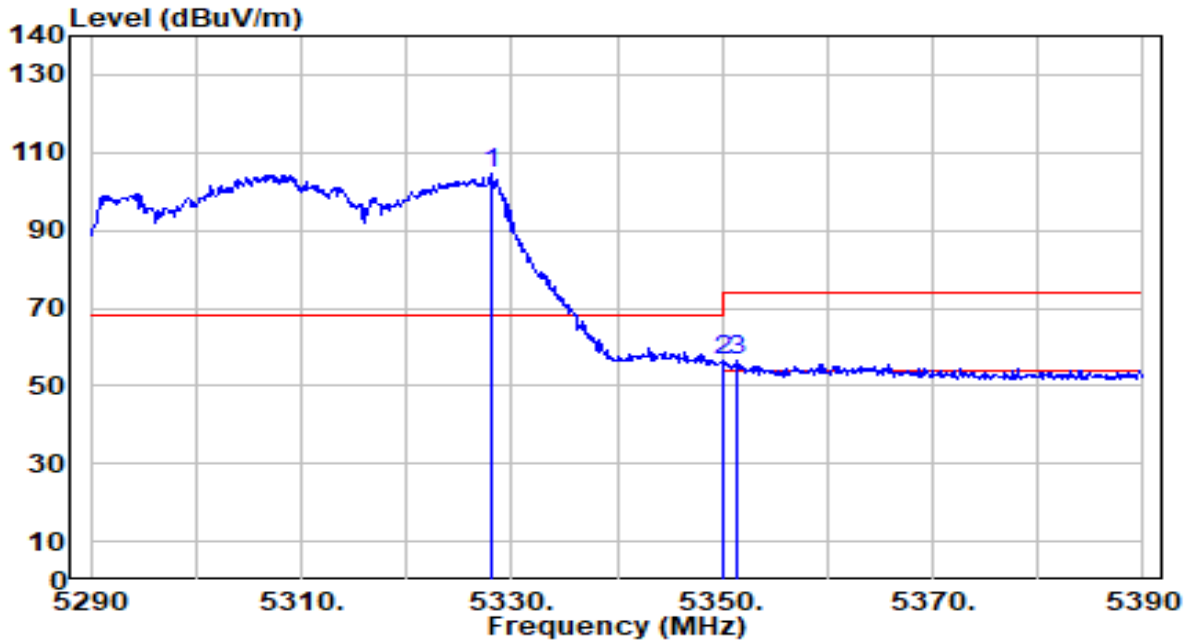


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.100	103.90	0.53	104.43	N/A	N/A	281	199	Peak
2	* 5350.000	56.18	0.51	56.68	-17.32	74.00	281	199	Peak
3	5351.400	55.80	0.50	56.30	-17.70	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

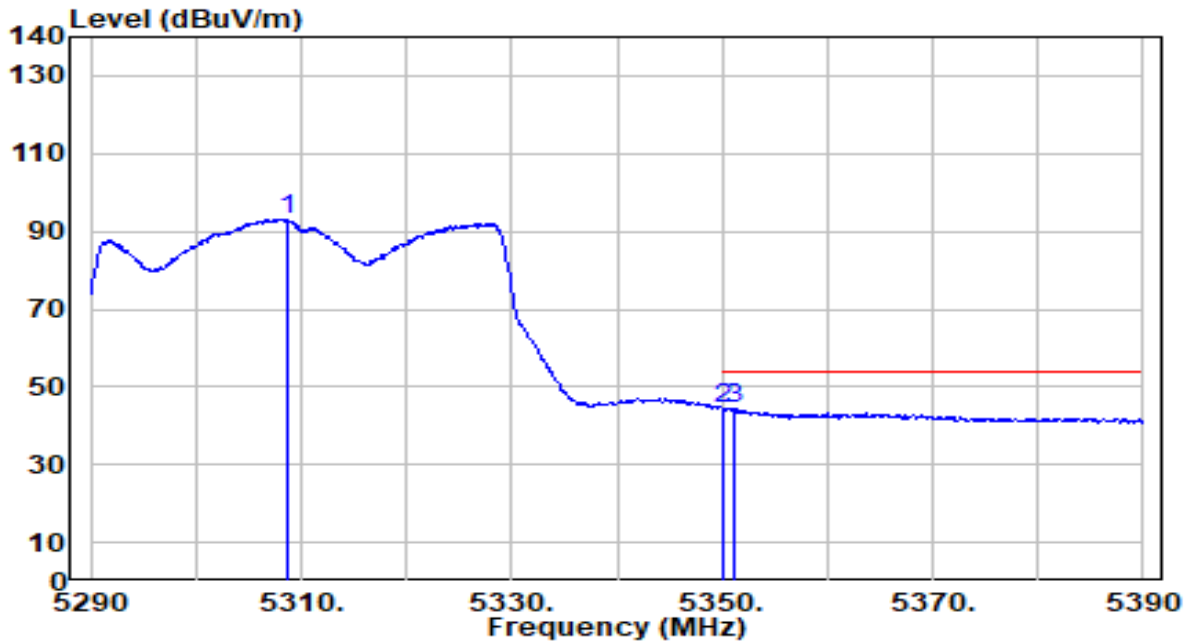


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.800	92.64	0.55	93.19	N/A	N/A	281	199	Average
2 *	5350.000	43.97	0.51	44.47	-9.53	54.00	281	199	Average
3	5351.100	43.81	0.50	44.31	-9.69	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

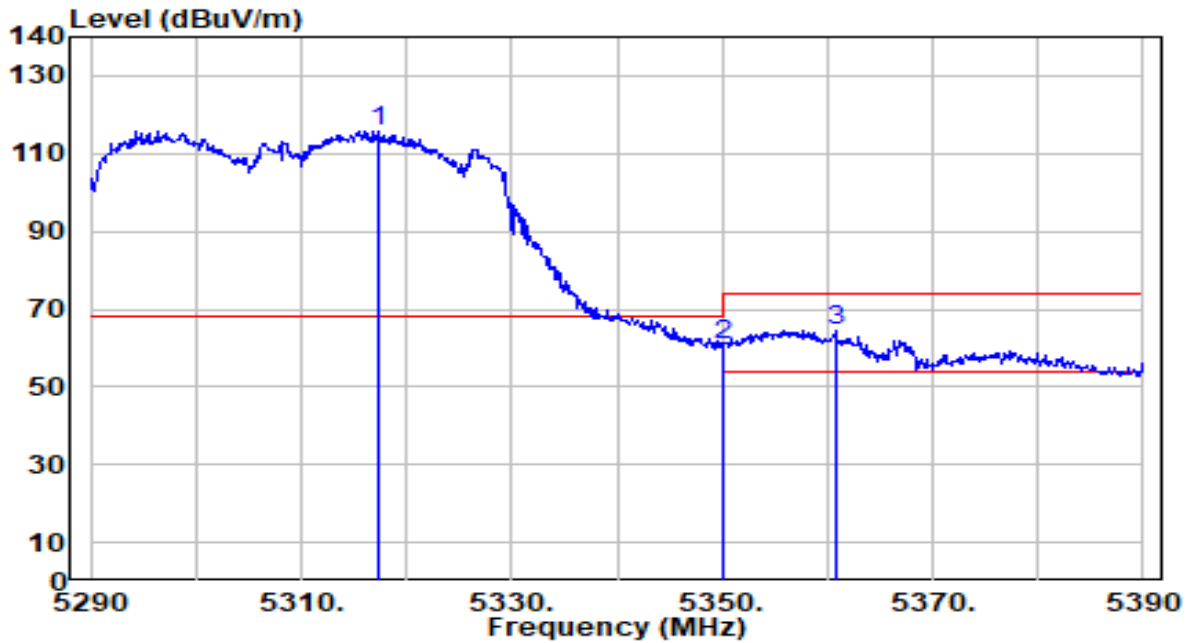


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.400	115.42	0.54	115.96	N/A	N/A	240	267	Peak
2	5350.000	60.46	0.51	60.97	-13.03	74.00	240	267	Peak
3	* 5360.800	63.96	0.49	64.45	-9.55	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

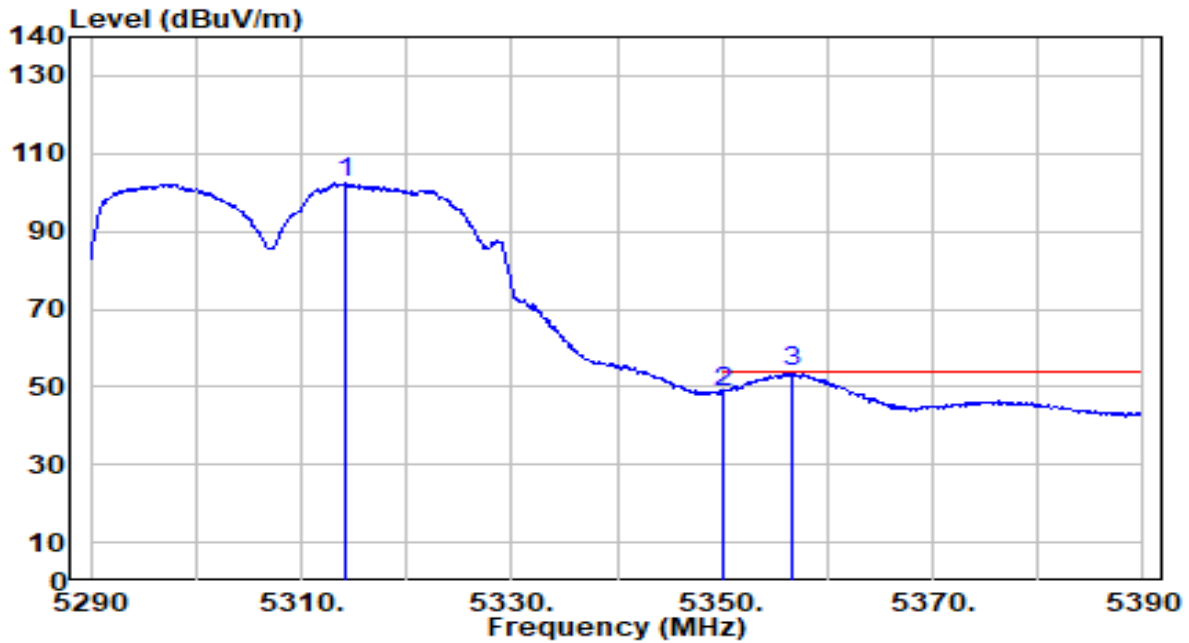


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.200	101.95	0.54	102.50	N/A	N/A	240	267	Average
2	5350.000	48.19	0.51	48.70	-5.30	54.00	240	267	Average
3	* 5356.600	53.31	0.50	53.80	-0.20	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

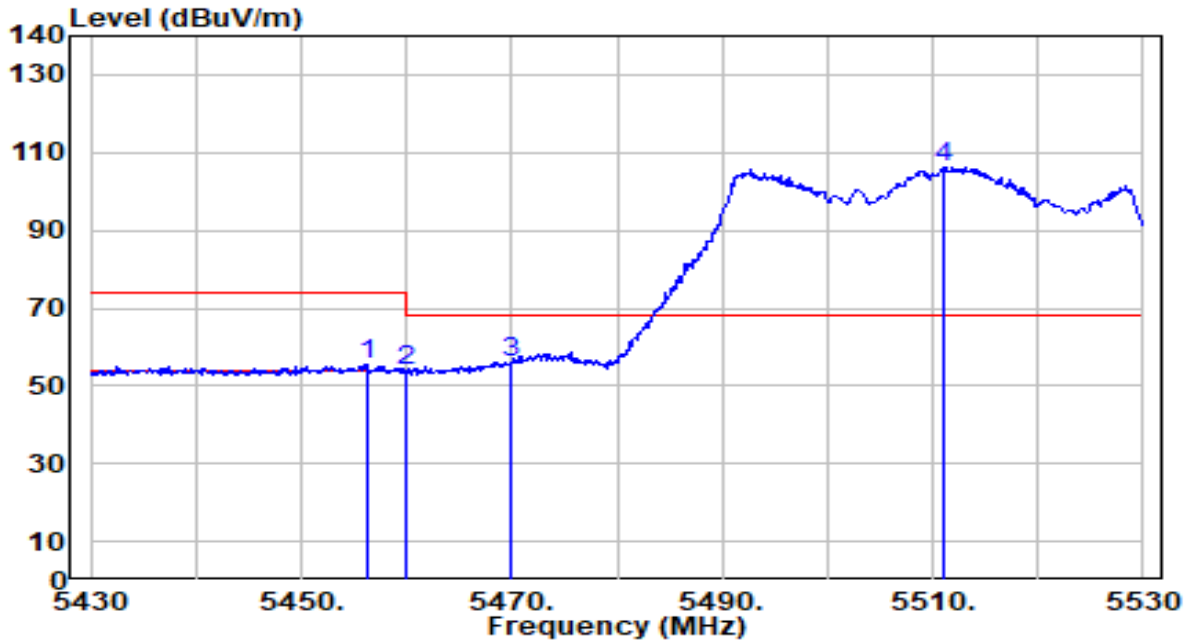


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.400	55.03	0.64	55.67	-18.33	74.00	213	38	Peak
2	5460.000	53.09	0.65	53.74	-20.26	74.00	213	38	Peak
3	* 5470.000	55.44	0.69	56.12	-12.08	68.20	213	38	Peak
4	5511.000	105.61	0.83	106.44	N/A	N/A	213	38	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

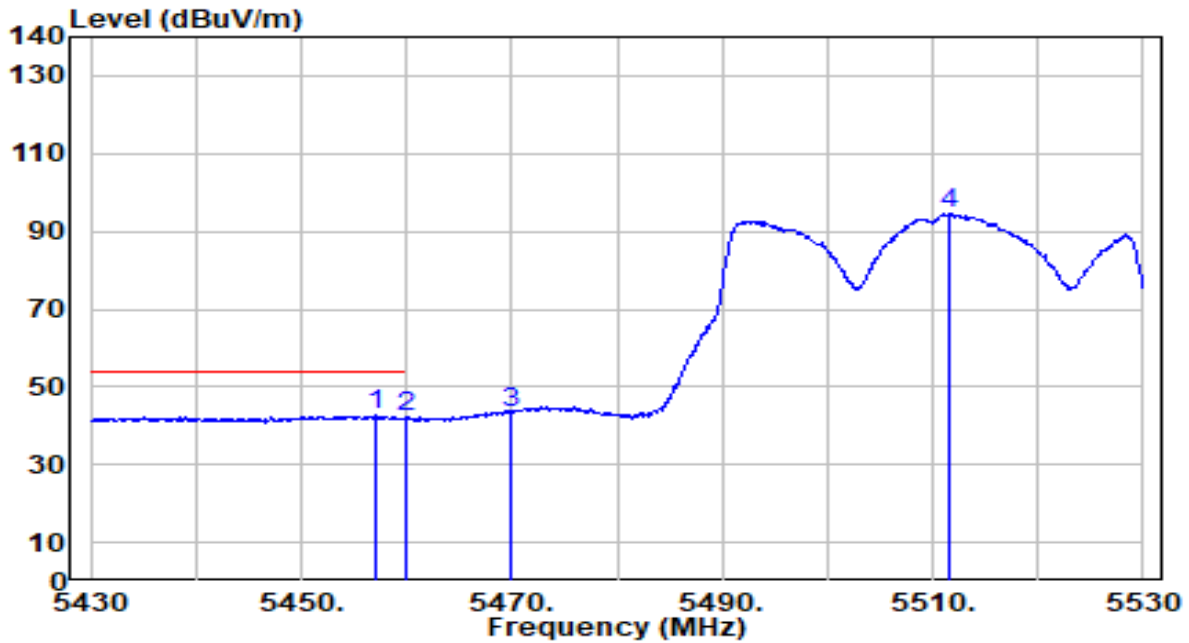


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5457.100	42.09	0.64	42.74	-11.26	54.00	213	38	Average
2	5460.000	41.58	0.65	42.24	-11.76	54.00	213	38	Average
3	5470.000	42.41	0.69	43.10	N/A	N/A	213	38	Average
4	5511.500	93.84	0.83	94.68	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

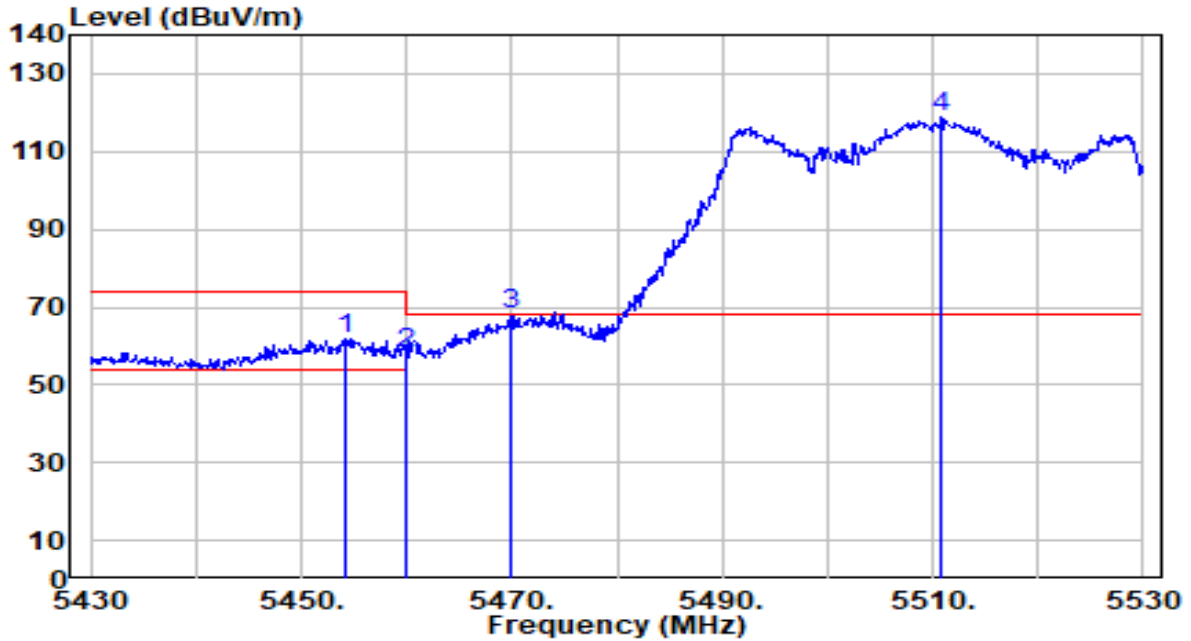


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.100	61.27	0.63	61.91	-12.09	74.00	196	82	Peak
2	5460.000	57.54	0.65	58.19	-15.81	74.00	196	82	Peak
3	* 5470.000	67.30	0.69	67.99	-0.21	68.20	196	82	Peak
4	5510.900	118.06	0.83	118.89	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

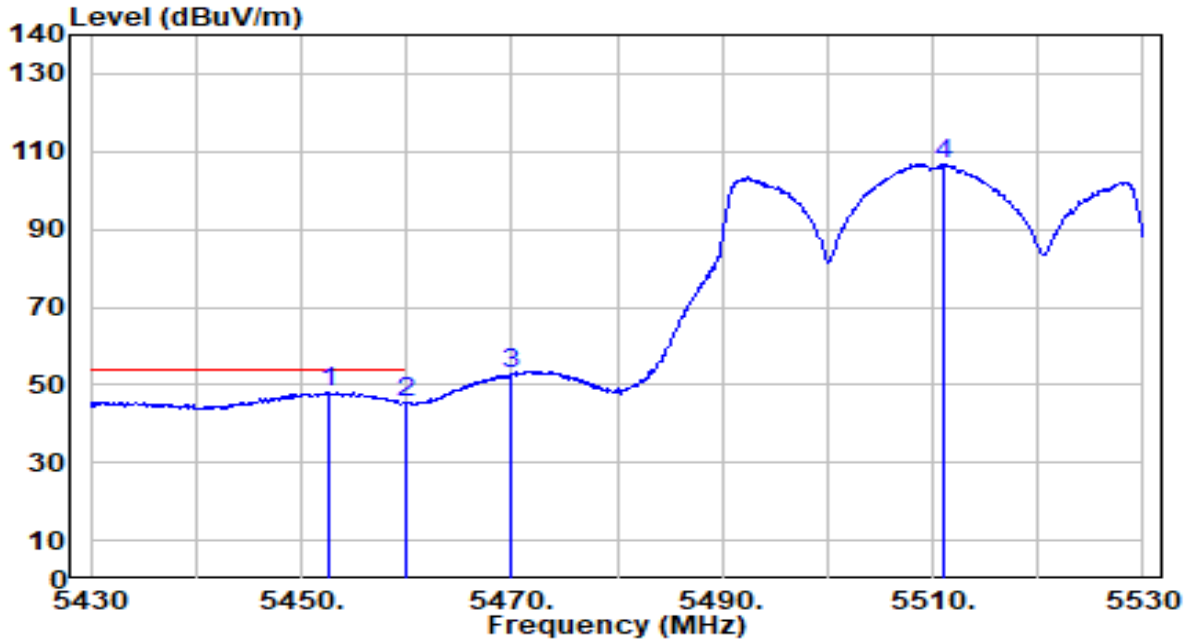


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5452.700	47.31	0.63	47.94	-6.06	54.00	196	82	Average
2	5460.000	44.85	0.65	45.50	-8.50	54.00	196	82	Average
3	5470.000	52.12	0.69	52.80	N/A	N/A	196	82	Average
4	5511.000	106.15	0.83	106.98	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

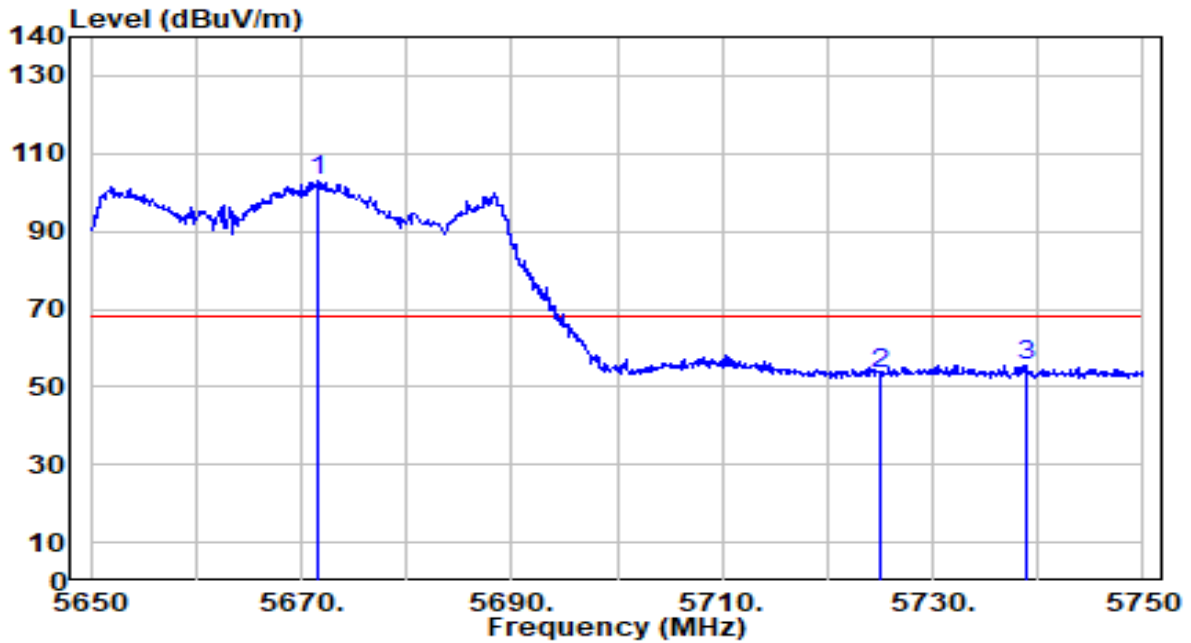


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.700	101.39	1.56	102.95	N/A	N/A	100	174	Peak
2	5725.000	51.48	1.86	53.35	-14.85	68.20	100	174	Peak
3	* 5738.800	53.51	1.94	55.45	-12.75	68.20	100	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

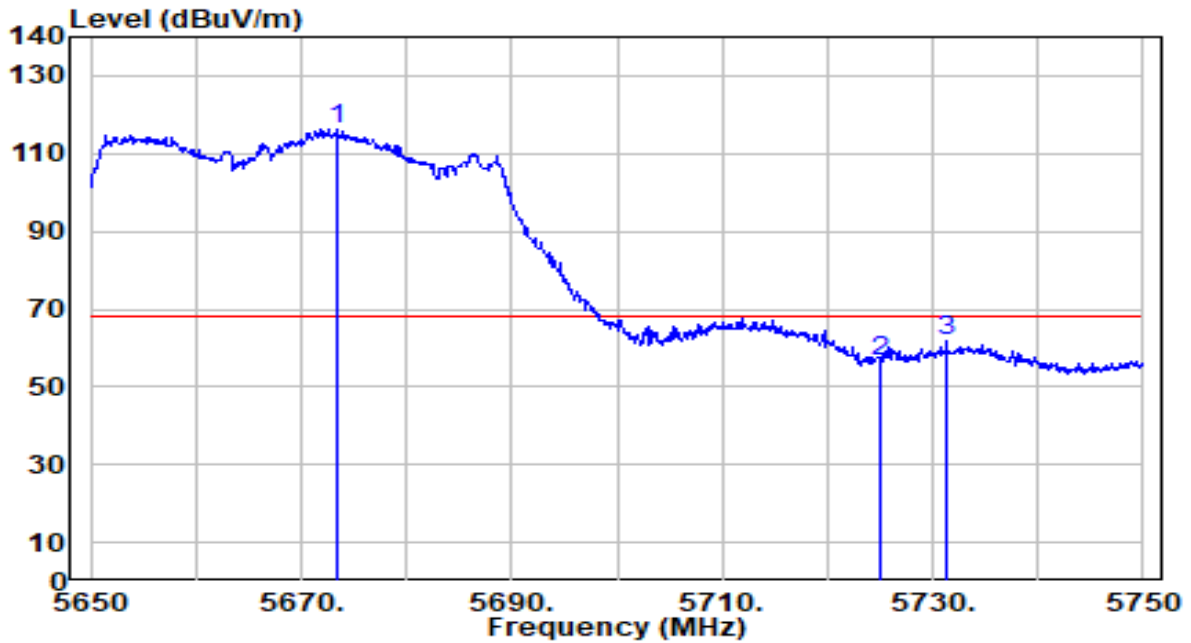


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5673.400	114.61	1.57	116.18	N/A	N/A	196	340	Peak
2	5725.000	54.73	1.86	56.59	-11.61	68.20	196	340	Peak
3	* 5731.300	59.84	1.90	61.74	-6.46	68.20	196	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 151 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

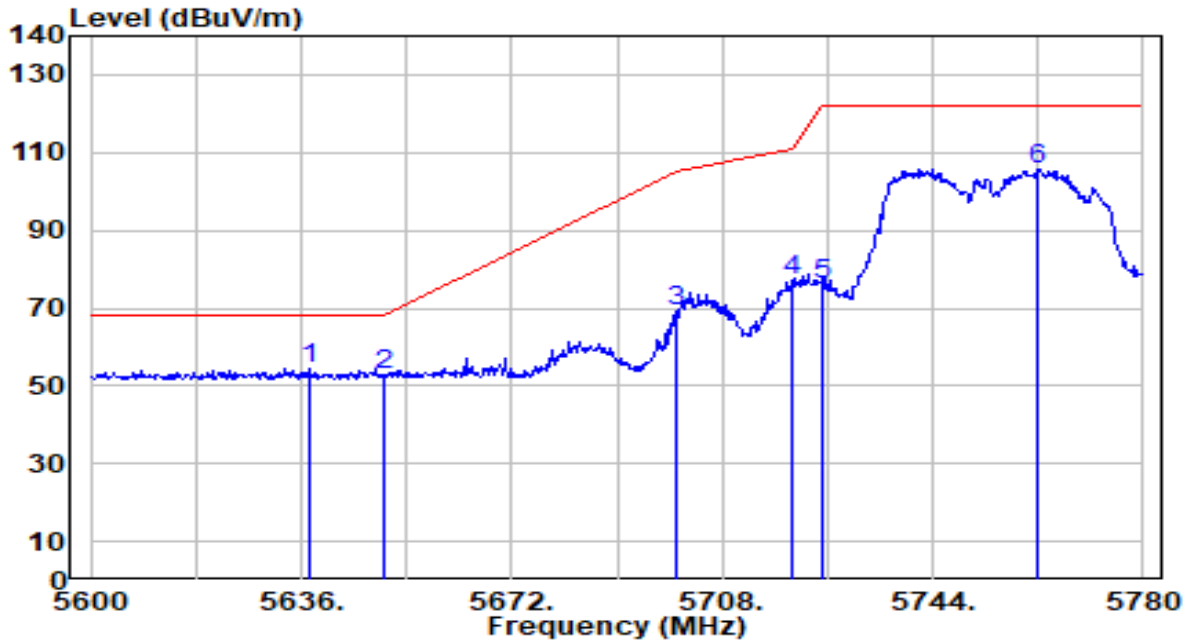


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5637.620	52.96	1.37	54.33	-13.87	68.20	289	176	Peak
2	5655.000	51.56	1.44	53.00	-15.20	68.20	289	176	Peak
3	5700.000	67.27	1.72	69.00	-36.20	105.20	289	176	Peak
4	5720.000	75.10	1.84	76.94	-33.86	110.80	289	176	Peak
5	5725.000	73.95	1.86	75.81	-46.39	122.20	289	176	Peak
6	5761.820	103.75	2.07	105.82	N/A	N/A	289	176	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 151 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

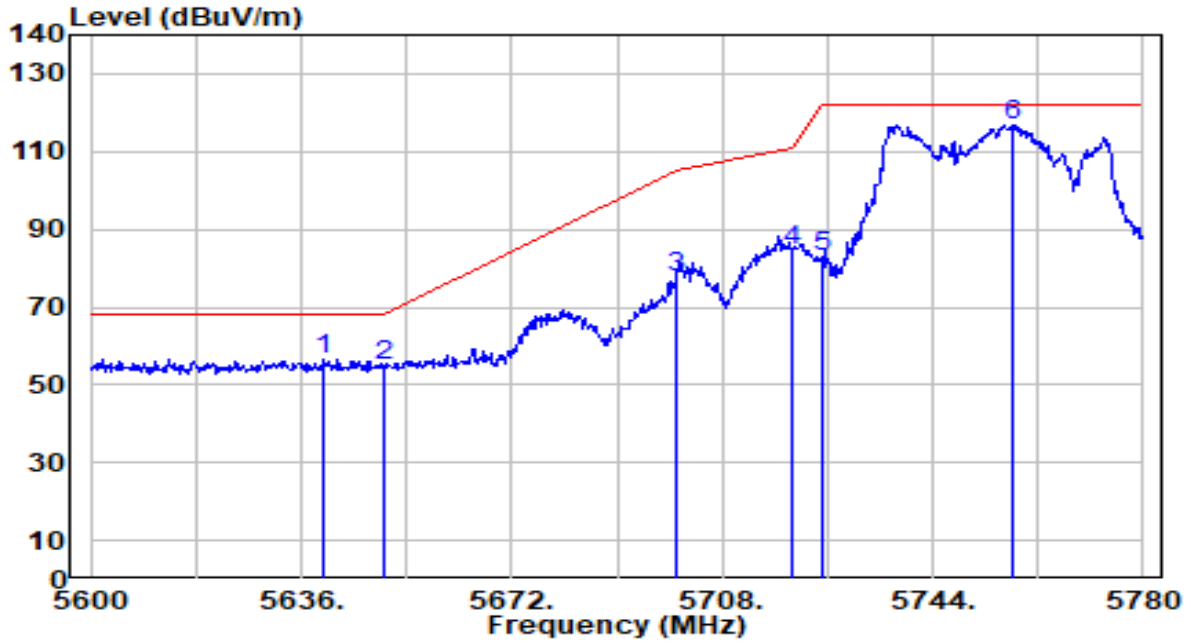


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5639.780	55.15	1.38	56.53	-11.67	68.20	200	343	Peak
2		5650.000	53.34	1.44	54.78	-13.42	68.20	200	343	Peak
3		5700.000	76.01	1.72	77.73	-27.47	105.20	200	343	Peak
4		5720.000	82.94	1.84	84.77	-26.03	110.80	200	343	Peak
5		5725.000	80.96	1.86	82.82	-39.38	122.20	200	343	Peak
6		5757.500	114.95	2.05	117.00	N/A	N/A	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 159 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

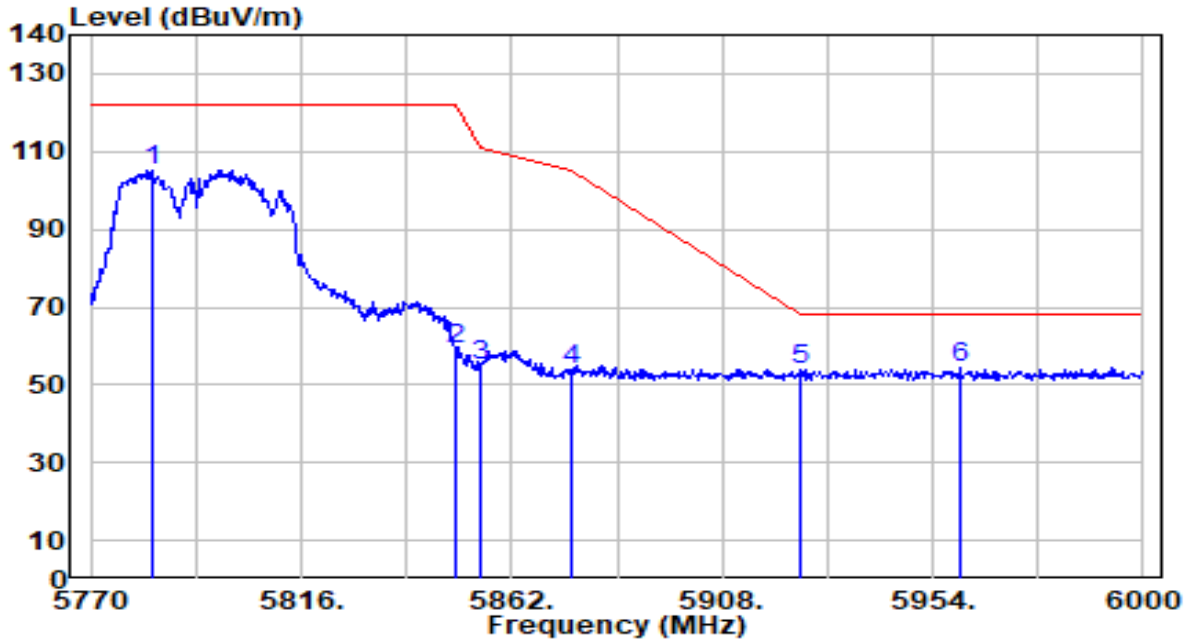


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5783.340	103.18	2.19	105.37	N/A	N/A	296	174	Peak
2	5850.000	56.88	2.27	59.16	-63.04	122.20	296	174	Peak
3	5855.000	52.88	2.27	55.15	-55.65	110.80	296	174	Peak
4	5875.000	51.62	2.26	53.89	-51.31	105.20	296	174	Peak
5	5925.000	51.52	2.25	53.77	-14.43	68.20	296	174	Peak
6	* 5959.750	52.43	2.23	54.67	-13.53	68.20	296	174	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 159 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

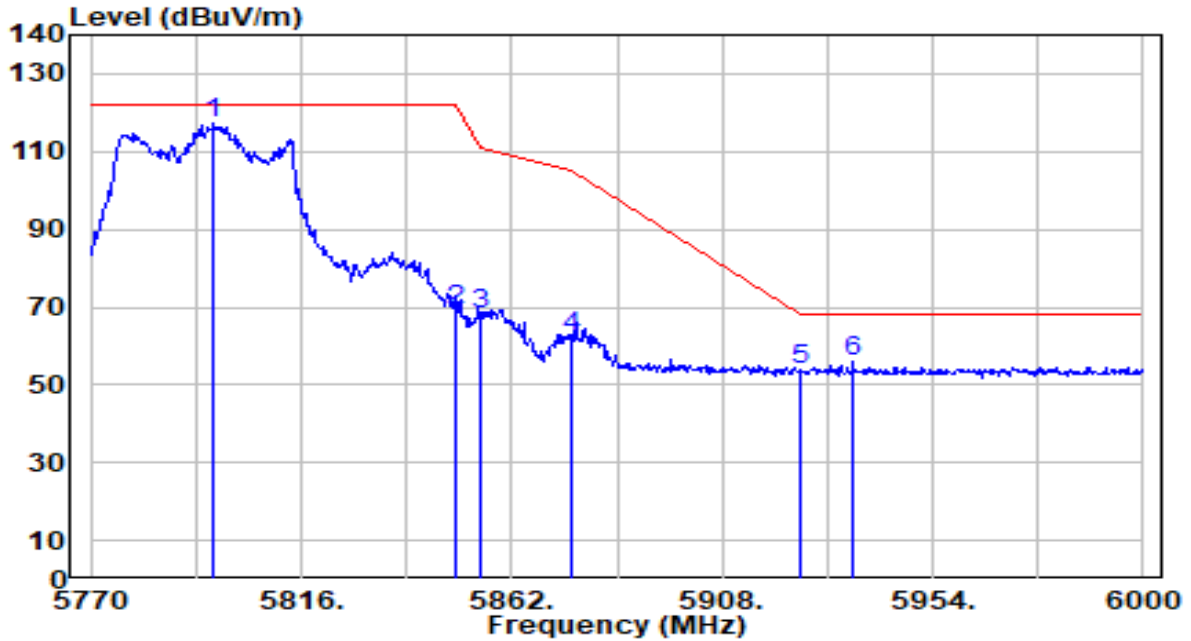


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.680	115.11	2.27	117.38	N/A	N/A	181	342	Peak
2	5850.000	67.16	2.27	69.43	-52.77	122.20	181	342	Peak
3	5855.000	65.97	2.27	68.24	-42.56	110.80	181	342	Peak
4	5875.000	60.14	2.26	62.41	-42.79	105.20	181	342	Peak
5	5925.000	51.66	2.25	53.90	-14.30	68.20	181	342	Peak
6	* 5936.520	53.61	2.24	55.86	-12.34	68.20	181	342	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

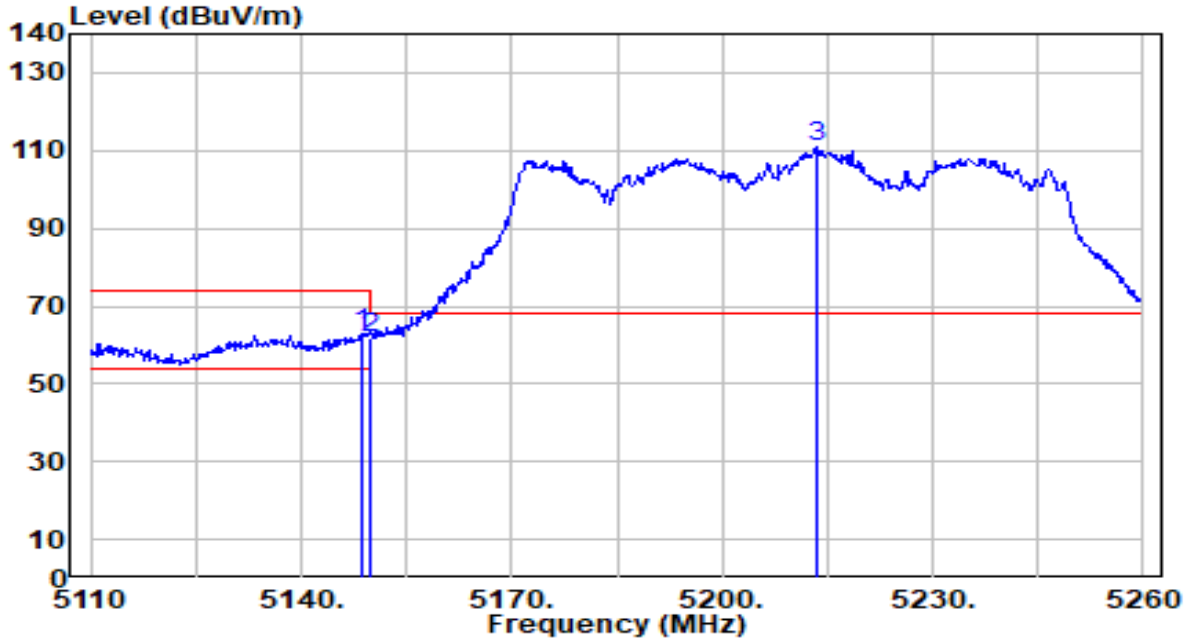


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.550	62.36	0.68	63.03	-10.97	74.00	306	205	Peak
2	5150.000	61.20	0.68	61.87	-12.13	74.00	306	205	Peak
3	5213.650	110.49	0.65	111.15	N/A	N/A	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

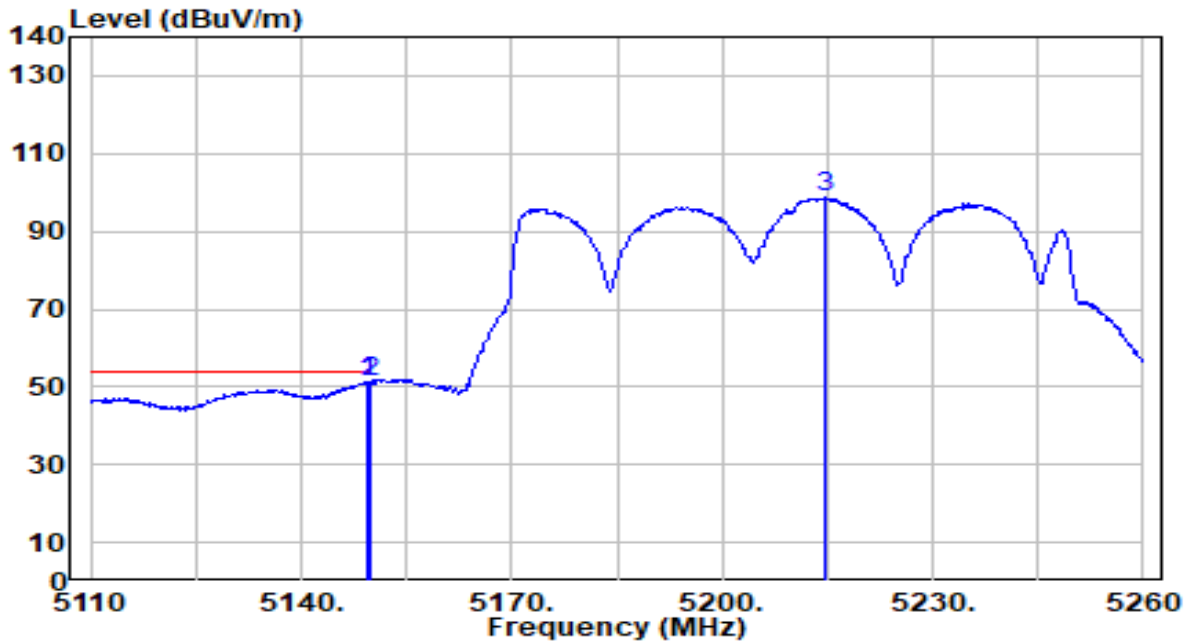


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.300	50.57	0.68	51.25	-2.75	54.00	306	205	Average
2	* 5150.000	50.61	0.68	51.28	-2.72	54.00	306	205	Average
3	5214.550	97.97	0.65	98.63	N/A	N/A	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

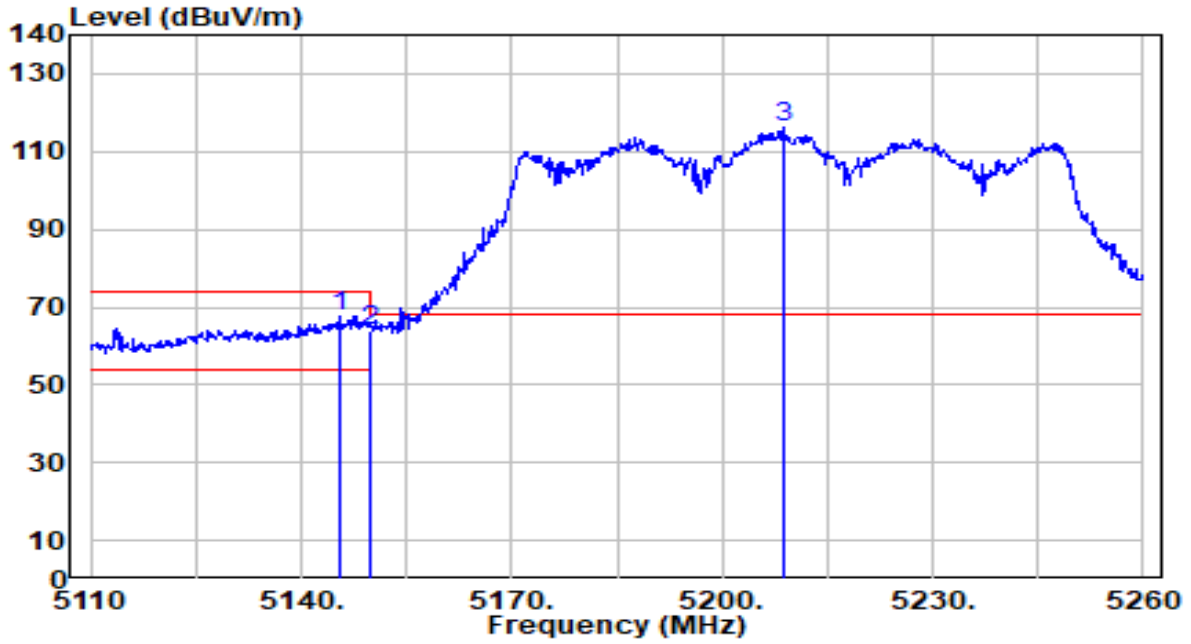


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5145.550	66.93	0.68	67.61	-6.39	74.00	168	76	Peak
2		5150.000	63.46	0.68	64.13	-9.87	74.00	168	76	Peak
3		5208.850	115.63	0.66	116.29	N/A	N/A	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

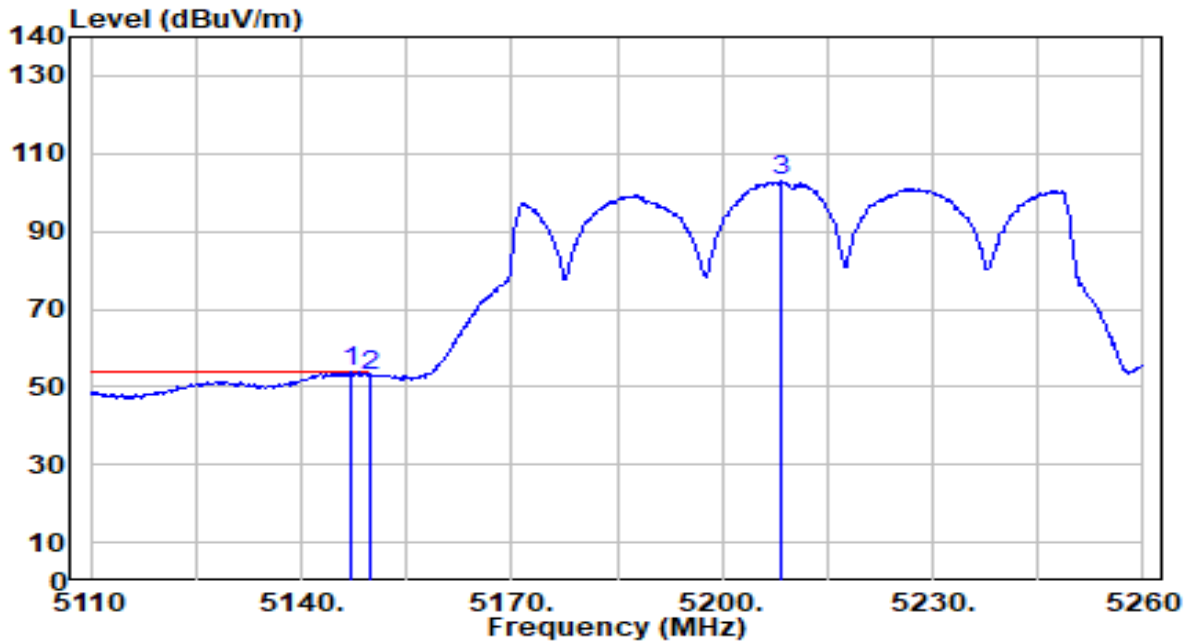


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5147.050	53.02	0.68	53.69	-0.31	54.00	168	76	Average
2		5150.000	52.13	0.68	52.80	-1.20	54.00	168	76	Average
3		5208.250	102.16	0.66	102.82	N/A	N/A	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

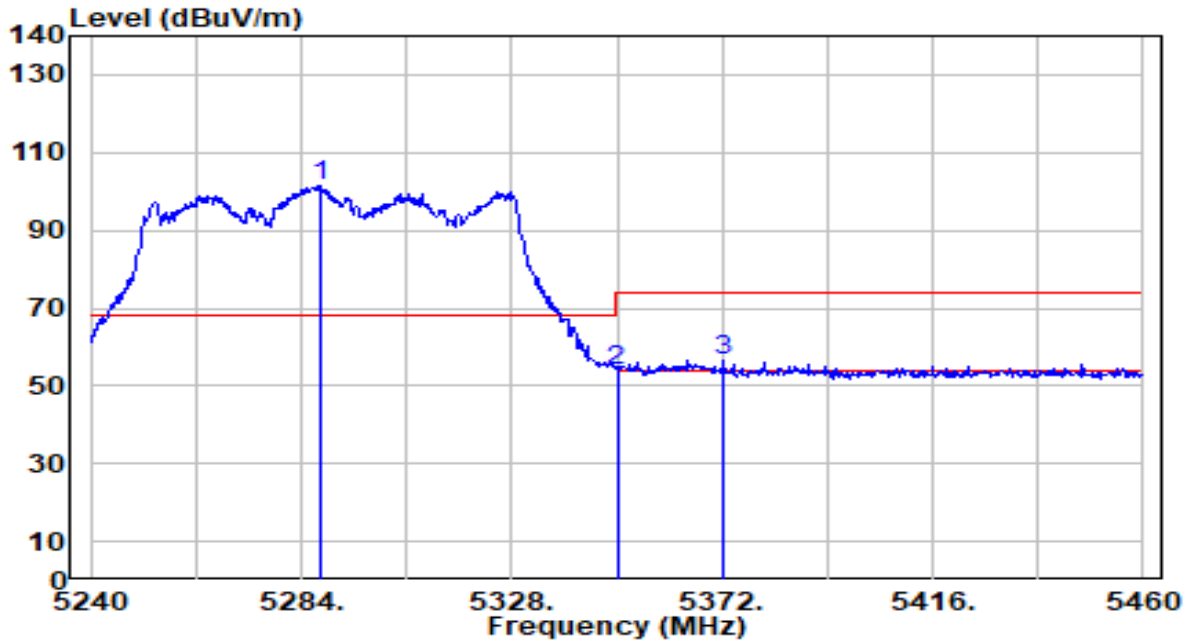


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.960	101.06	0.57	101.64	N/A	N/A	281	199	Peak
2	5350.000	53.58	0.51	54.08	-19.92	74.00	281	199	Peak
3	* 5372.440	56.11	0.48	56.59	-17.41	74.00	281	199	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

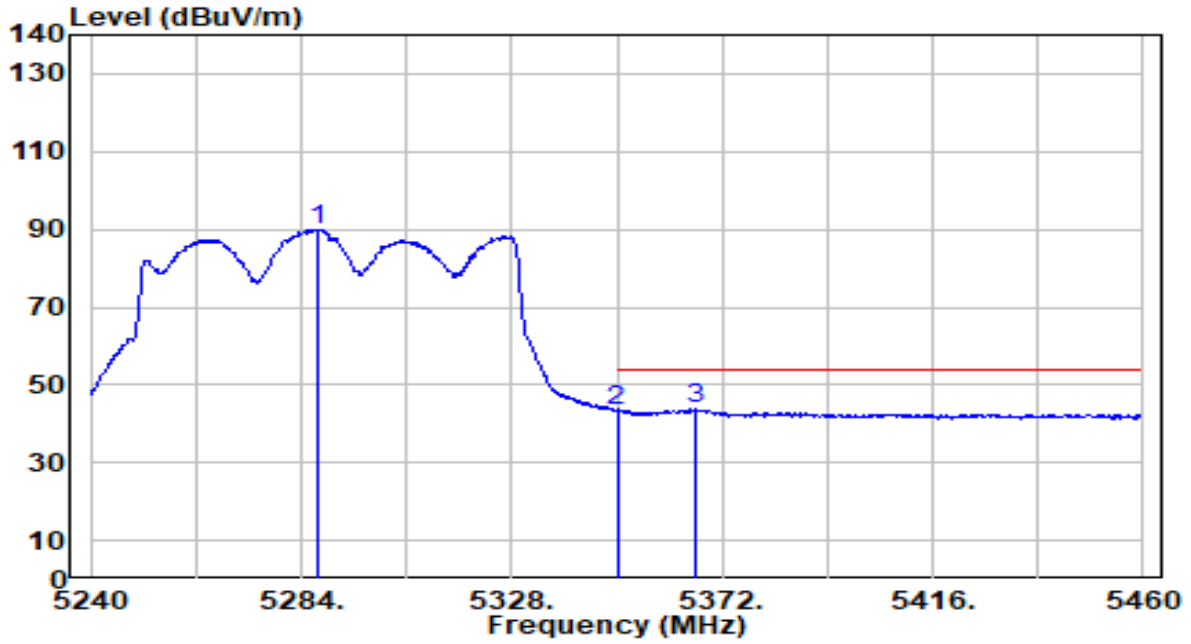


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.740	89.49	0.57	90.07	N/A	N/A	281	199	Average
2	5350.000	43.06	0.51	43.56	-10.44	54.00	281	199	Average
3	* 5366.500	43.18	0.49	43.67	-10.33	54.00	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

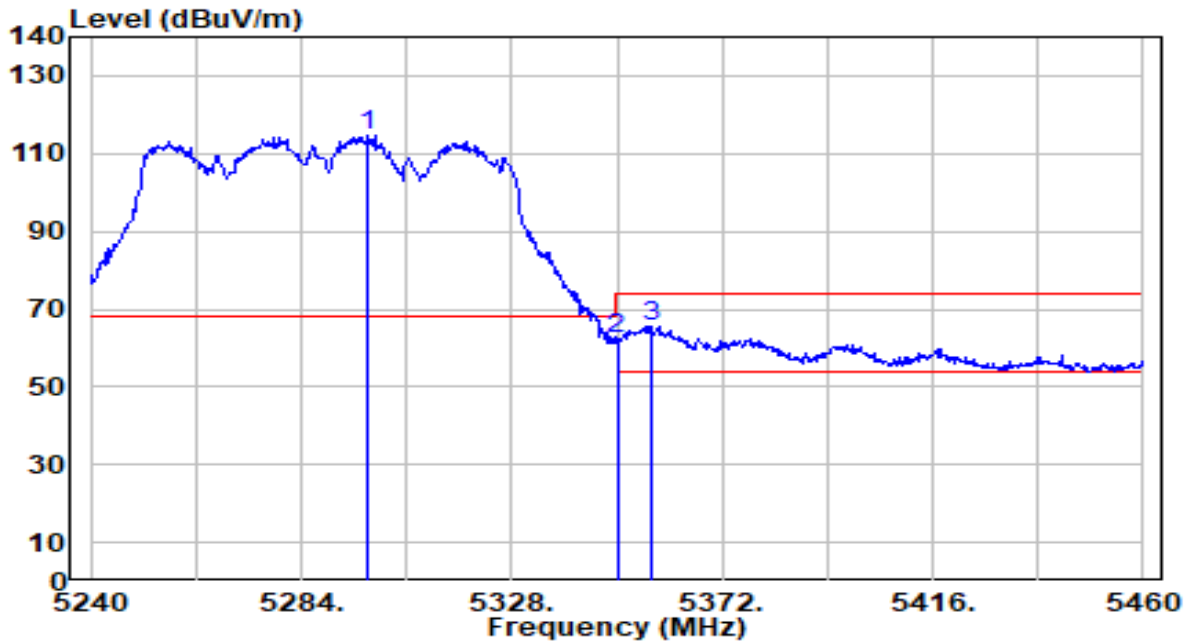


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.080	114.27	0.56	114.83	N/A	N/A	240	267	Peak
2	5350.000	61.72	0.51	62.23	-11.77	74.00	240	267	Peak
3	* 5357.040	65.07	0.50	65.57	-8.43	74.00	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

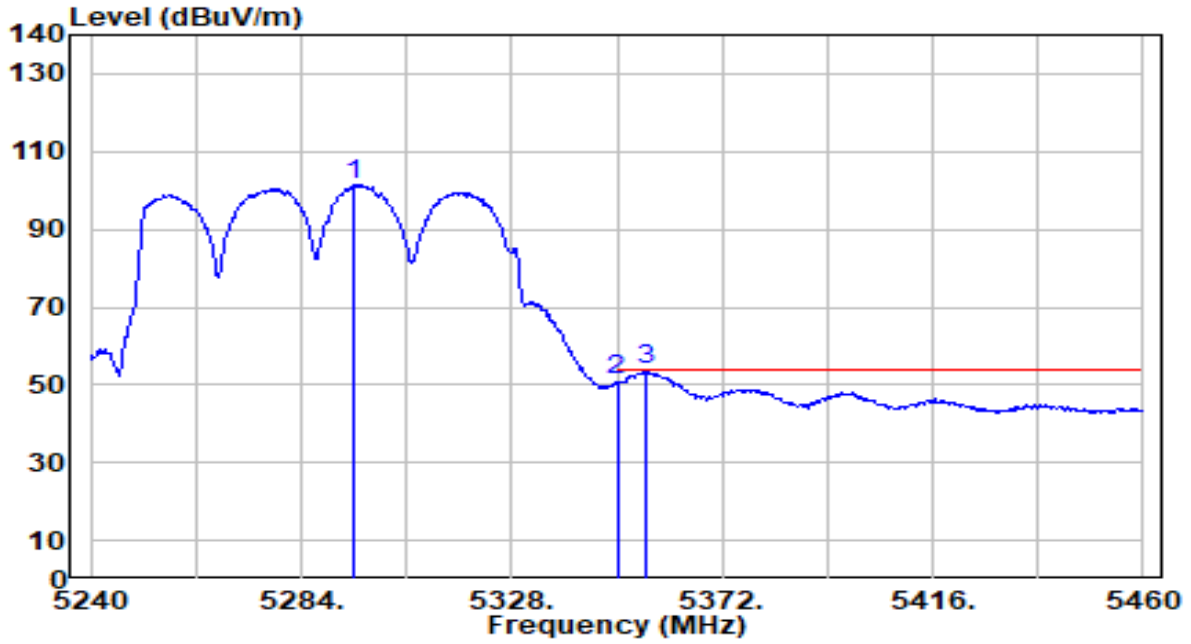


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.220	100.96	0.57	101.53	N/A	N/A	240	267	Average
2	5350.000	50.89	0.51	51.40	-2.60	54.00	240	267	Average
3	* 5356.160	53.22	0.50	53.72	-0.28	54.00	240	267	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-30
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

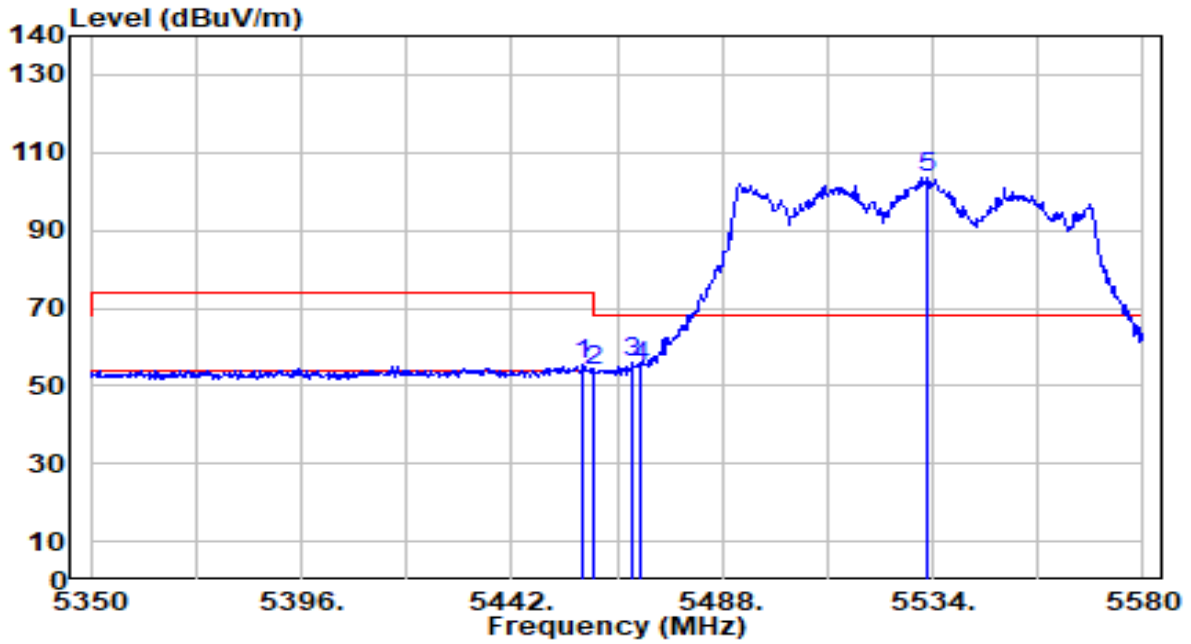


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.640	54.84	0.65	55.49	-18.51	74.00	213	38	Peak
2	5460.000	53.39	0.65	54.04	-19.96	74.00	213	38	Peak
3	5468.450	55.15	0.68	55.84	-12.36	68.20	213	38	Peak
4	5470.000	54.02	0.69	54.70	-13.50	68.20	213	38	Peak
5 *	5532.850	102.67	0.91	103.58	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-30
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

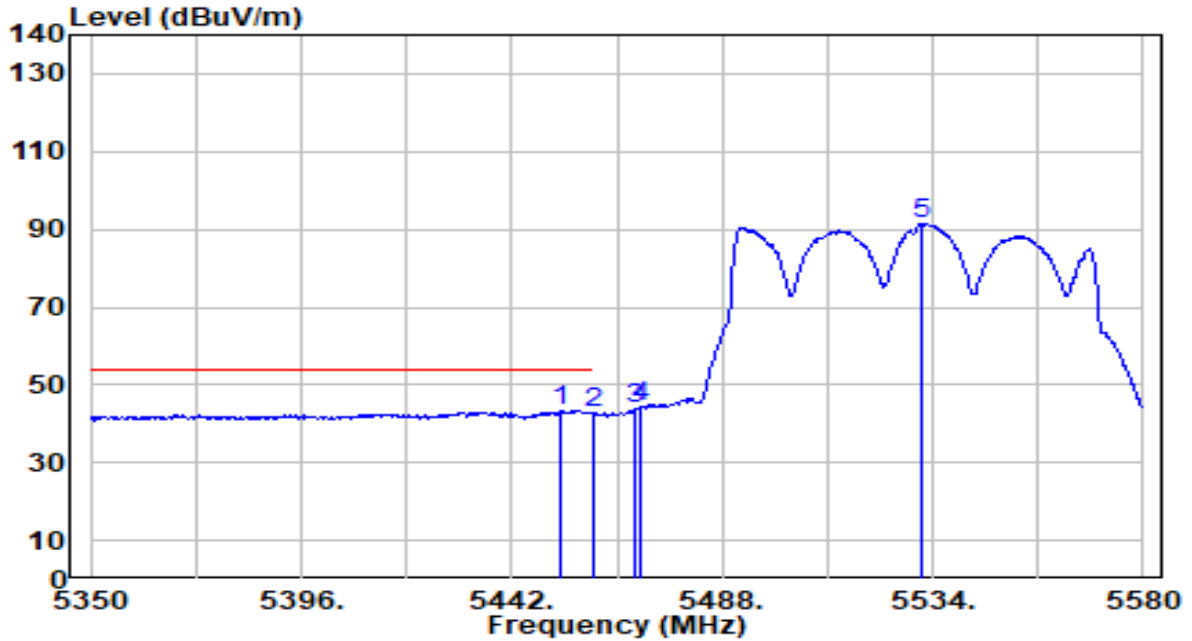


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5452.580	42.86	0.63	43.49	-10.51	54.00	213	38	Average
2		5460.000	42.09	0.65	42.74	-11.26	54.00	213	38	Average
3		5468.910	43.09	0.68	43.78	N/A	N/A	213	38	Average
4		5470.000	43.65	0.69	44.34	N/A	N/A	213	38	Average
5		5531.700	90.46	0.91	91.36	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-30
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

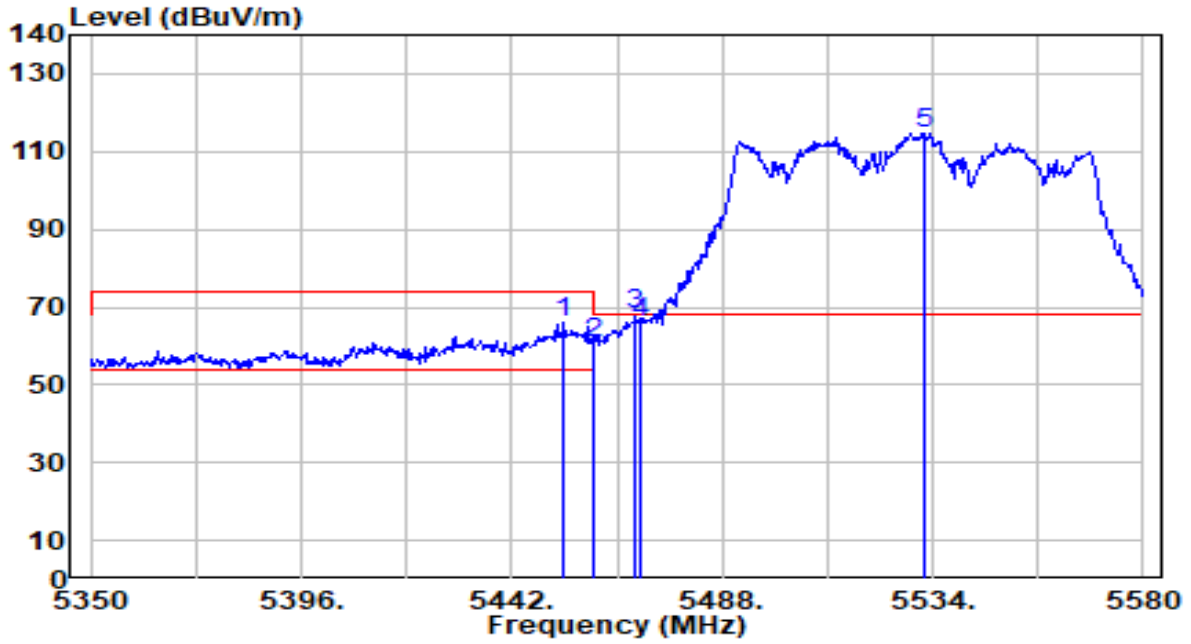


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.500	65.17	0.63	65.80	-8.20	74.00	196	82	Peak
2	5460.000	59.89	0.65	60.54	-13.46	74.00	196	82	Peak
3	5469.140	67.37	0.69	68.06	-0.14	68.20	196	82	Peak
4	5470.000	65.25	0.69	65.94	-2.26	68.20	196	82	Peak
5	* 5532.160	113.77	0.91	114.68	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-30
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

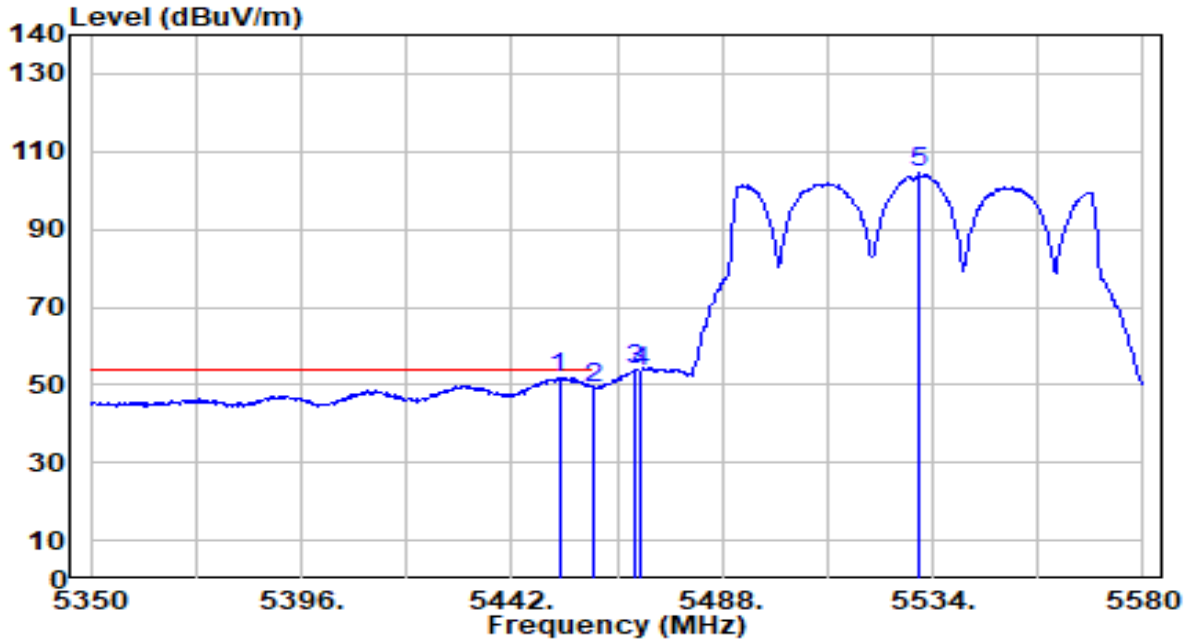


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5452.350	51.34	0.63	51.97	-2.03	54.00	196	82	Average
2	5460.000	48.56	0.65	49.21	-4.79	54.00	196	82	Average
3	5469.140	52.94	0.69	53.62	N/A	N/A	196	82	Average
4	5470.000	52.70	0.69	53.39	N/A	N/A	196	82	Average
5	5531.240	103.49	0.90	104.40	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band4_TX_CH 155 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

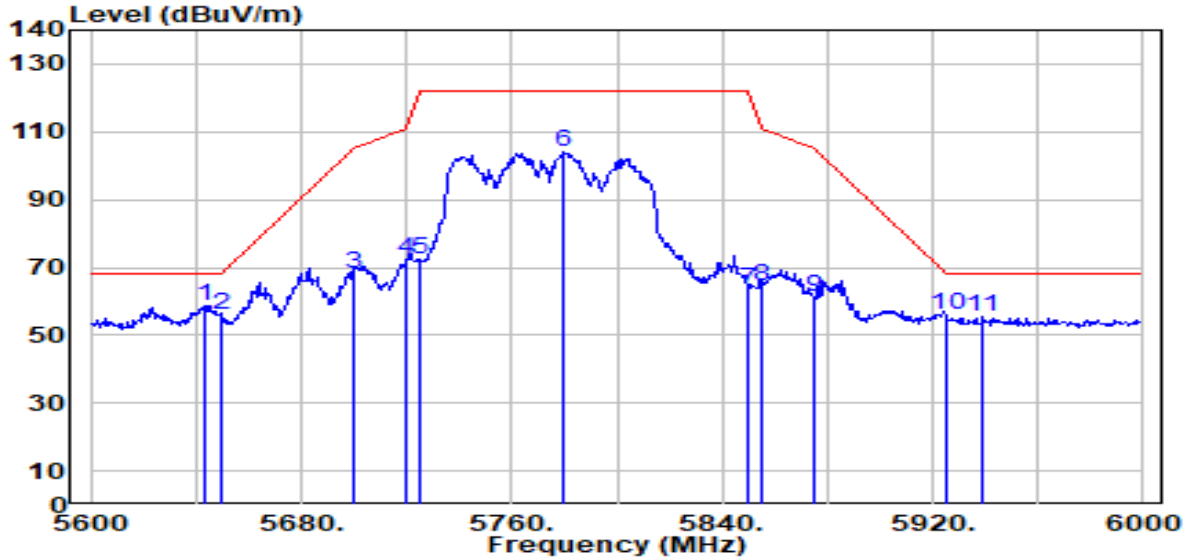


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5643.200	57.38	1.40	58.78	-9.42	68.20	289	176	Peak
2	5650.000	54.61	1.44	56.05	-12.15	68.20	289	176	Peak
3	5700.000	66.66	1.72	68.38	-36.82	105.20	289	176	Peak
4	5720.000	70.57	1.84	72.41	-38.39	110.80	289	176	Peak
5	5725.000	70.58	1.86	72.45	-49.75	122.20	289	176	Peak
6	5779.600	102.05	2.17	104.22	N/A	N/A	289	176	Peak
7	5850.000	61.21	2.27	63.48	-58.72	122.20	289	176	Peak
8	5855.000	62.19	2.27	64.46	-46.34	110.80	289	176	Peak
9	5875.000	58.79	2.26	61.05	-44.15	105.20	289	176	Peak
10	5925.000	53.69	2.25	55.94	-12.26	68.20	289	176	Peak
11	5938.800	52.98	2.24	55.22	-12.98	68.20	289	176	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band4_TX_CH 155 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

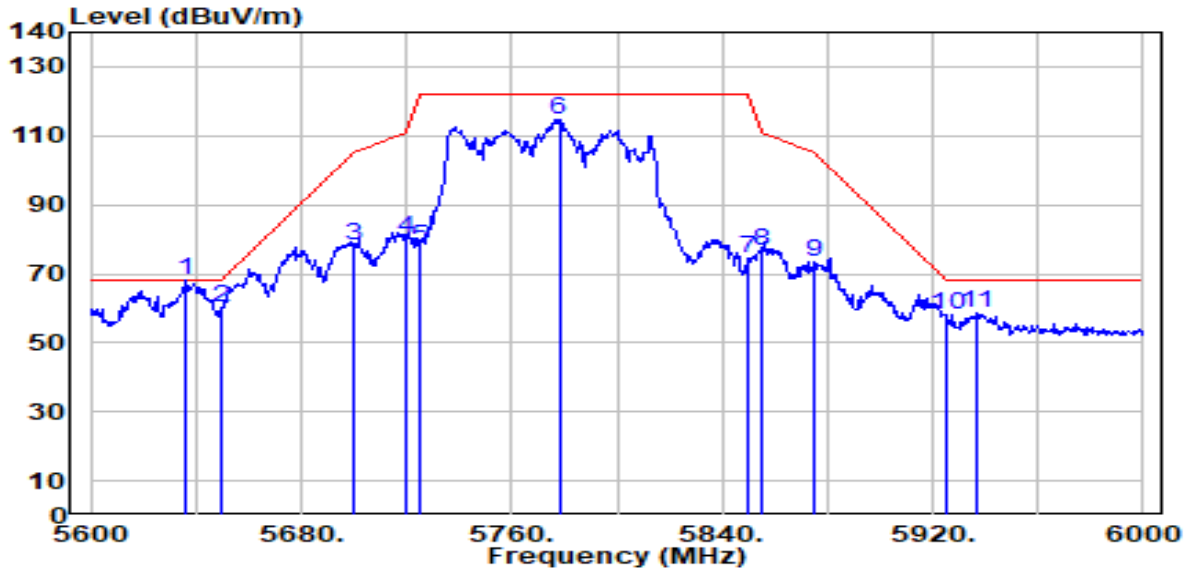


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5636.400	66.68	1.36	68.04	-0.16	68.20	200	343	Peak
2	5650.000	58.98	1.44	60.42	-7.78	68.20	200	343	Peak
3	5700.000	76.23	1.72	77.95	-27.25	105.20	200	343	Peak
4	5720.000	78.65	1.84	80.48	-30.32	110.80	200	343	Peak
5	5725.000	75.85	1.86	77.72	-44.48	122.20	200	343	Peak
6	5778.000	112.63	2.16	114.80	N/A	N/A	200	343	Peak
7	5850.000	72.00	2.27	74.27	-47.93	122.20	200	343	Peak
8	5855.000	74.41	2.27	76.68	-34.12	110.80	200	343	Peak
9	5875.000	71.01	2.26	73.27	-31.93	105.20	200	343	Peak
10	5925.000	55.98	2.25	58.22	-9.98	68.20	200	343	Peak
11	5936.800	56.54	2.24	58.78	-9.42	68.20	200	343	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

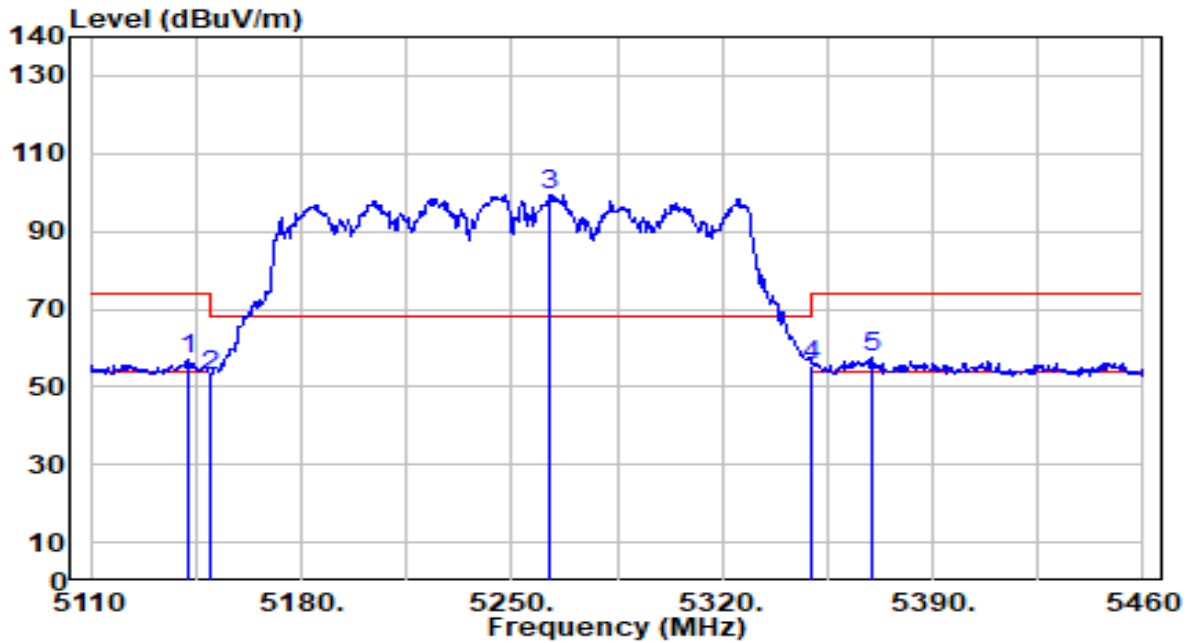


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.200	56.24	0.68	56.92	-17.08	74.00	306	205	Peak
2	5150.000	52.28	0.68	52.95	-21.05	74.00	306	205	Peak
3	5262.950	98.73	0.60	99.33	N/A	N/A	306	205	Peak
4	5350.000	54.87	0.51	55.38	-18.62	74.00	306	205	Peak
5	* 5370.050	57.18	0.48	57.67	-16.33	74.00	306	205	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

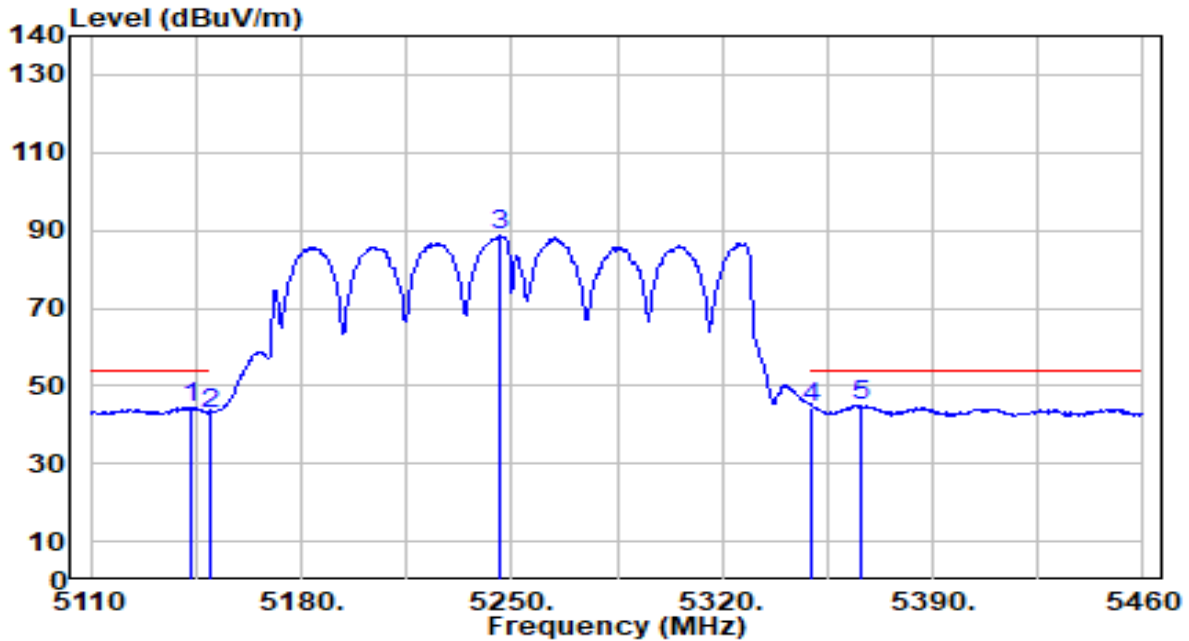


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.600	43.90	0.68	44.58	-9.42	54.00	306	205	Average
2	5150.000	42.24	0.68	42.92	-11.08	54.00	306	205	Average
3	5245.800	88.04	0.62	88.66	N/A	N/A	306	205	Average
4	5350.000	43.98	0.51	44.49	-9.51	54.00	306	205	Average
5	* 5366.200	44.62	0.49	45.11	-8.89	54.00	306	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

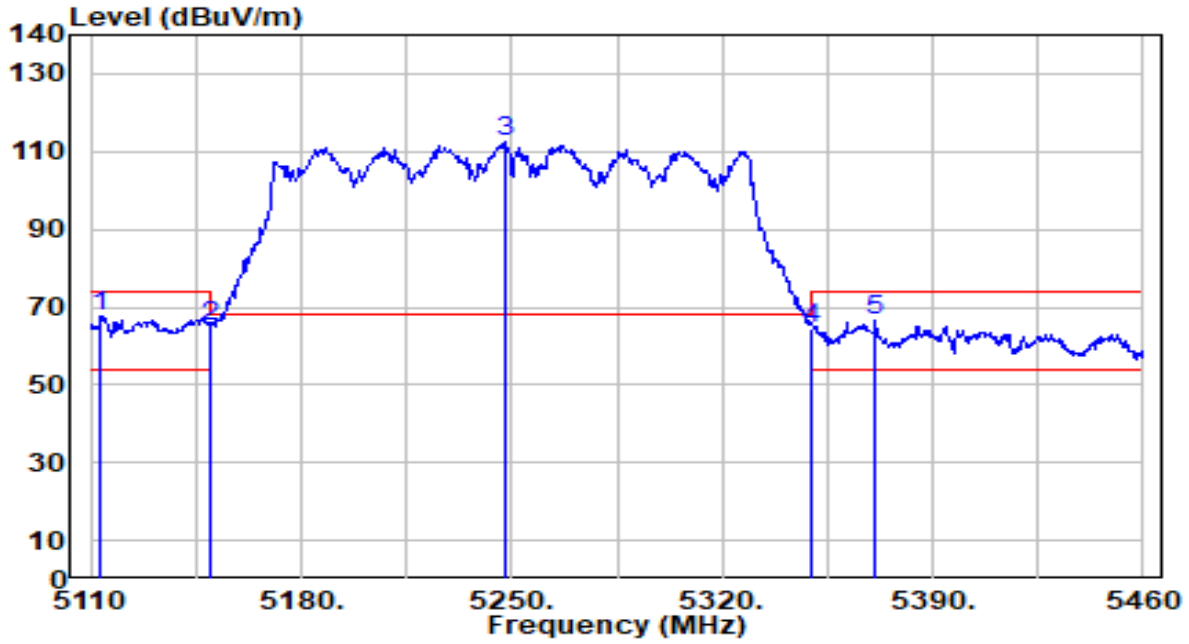


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5113.500	66.96	0.68	67.63	-6.37	74.00	168	76	Peak
2	5150.000	64.50	0.68	65.18	-8.82	74.00	168	76	Peak
3	5247.550	111.66	0.62	112.28	N/A	N/A	168	76	Peak
4	5350.000	64.19	0.51	64.70	-9.30	74.00	168	76	Peak
5	5371.100	65.91	0.48	66.39	-7.61	74.00	168	76	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

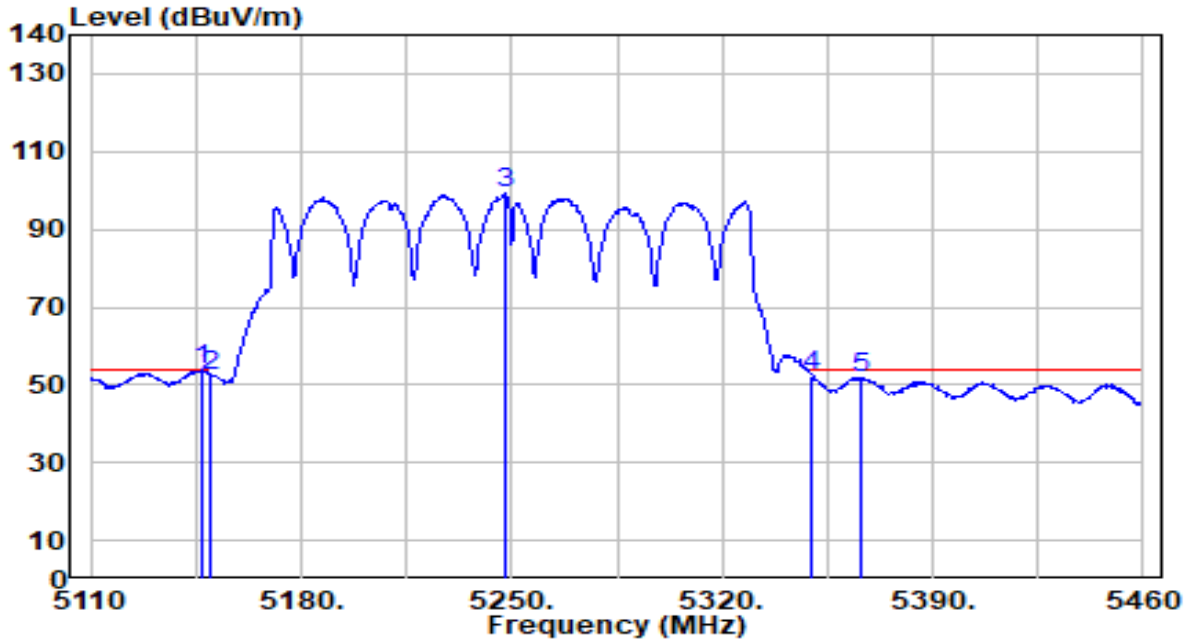


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.06	0.68	53.74	-0.26	54.00	168	76	Average
2		51.87	0.68	52.54	-1.46	54.00	168	76	Average
3		98.84	0.62	99.46	N/A	N/A	168	76	Average
4		51.77	0.51	52.28	-1.72	54.00	168	76	Average
5		51.40	0.49	51.88	-2.12	54.00	168	76	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

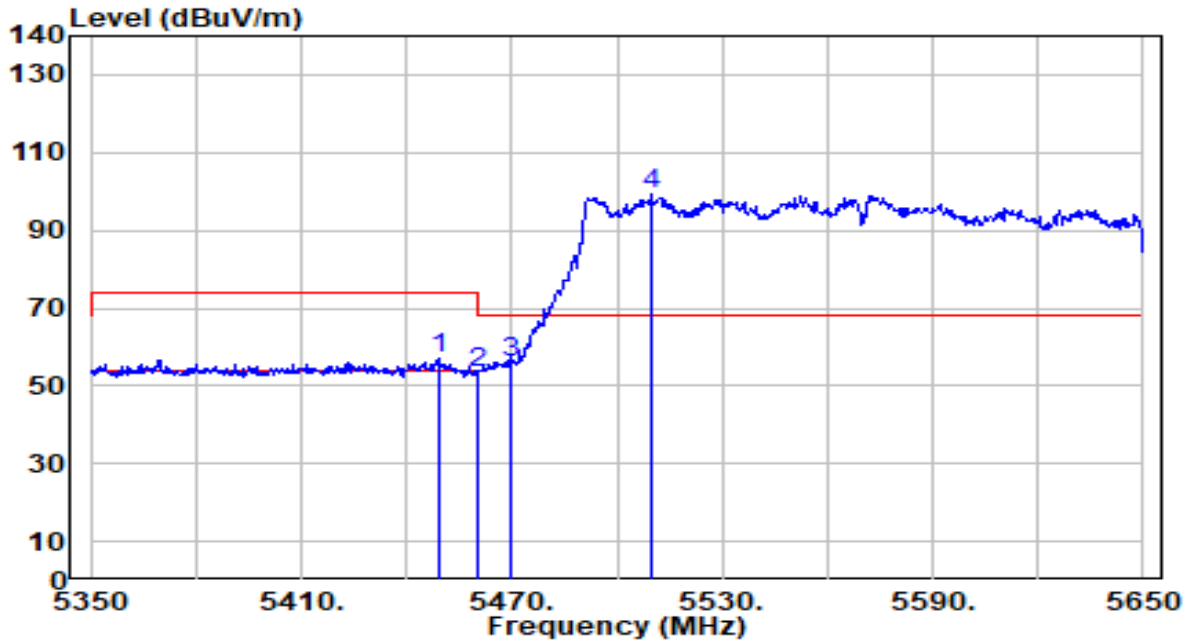


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5449.600	56.53	0.62	57.14	-16.86	74.00	281	199	Peak
2	5460.000	52.60	0.65	53.25	-20.75	74.00	281	199	Peak
3	* 5470.000	55.09	0.69	55.77	-12.43	68.20	281	199	Peak
4	5509.900	98.37	0.83	99.20	N/A	N/A	281	199	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

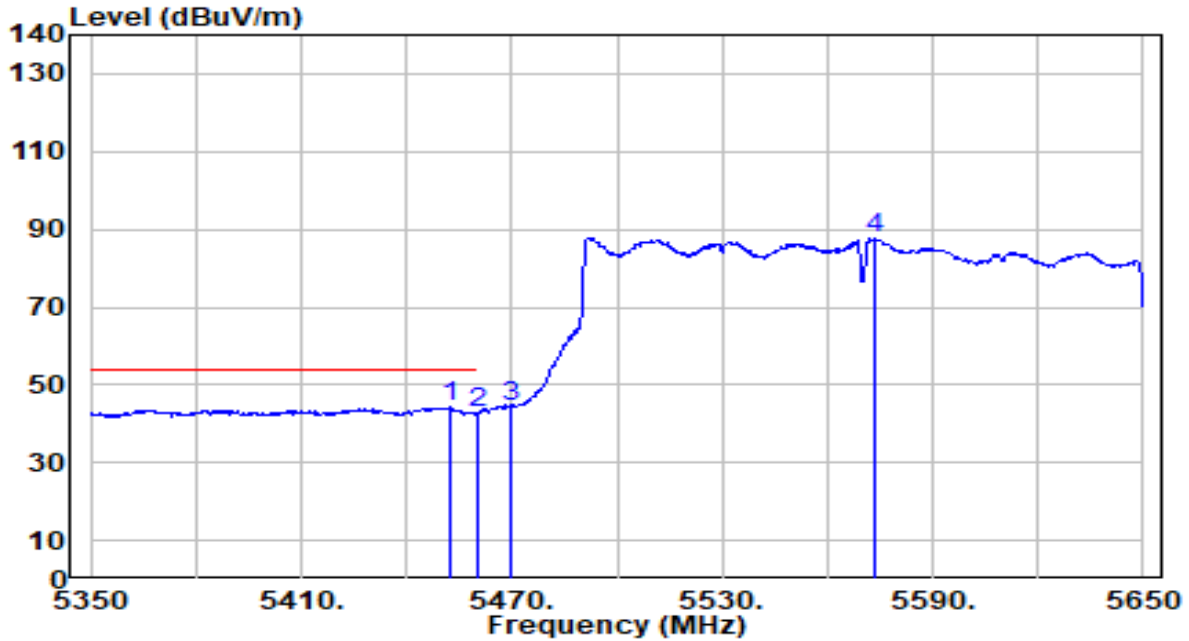


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5452.600	43.56	0.63	44.19	-9.81	54.00	281	199	Average
2	5460.000	42.23	0.65	42.89	-11.11	54.00	281	199	Average
3	5470.000	43.58	0.69	44.27	N/A	N/A	281	199	Average
4	5573.500	86.68	1.06	87.74	N/A	N/A	281	199	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

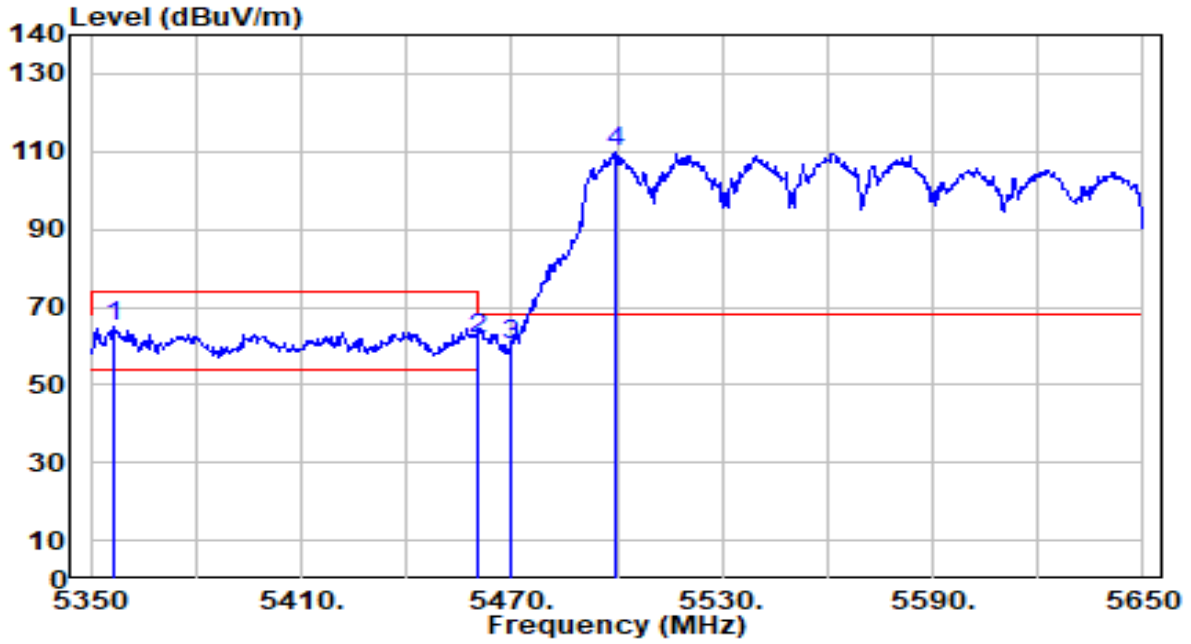


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5356.600	64.73	0.50	65.23	-8.77	74.00	240	267	Peak
2	5460.000	61.31	0.65	61.97	-12.03	74.00	240	267	Peak
3	* 5470.000	59.47	0.69	60.15	-8.05	68.20	240	267	Peak
4	5499.400	109.30	0.79	110.08	N/A	N/A	240	267	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

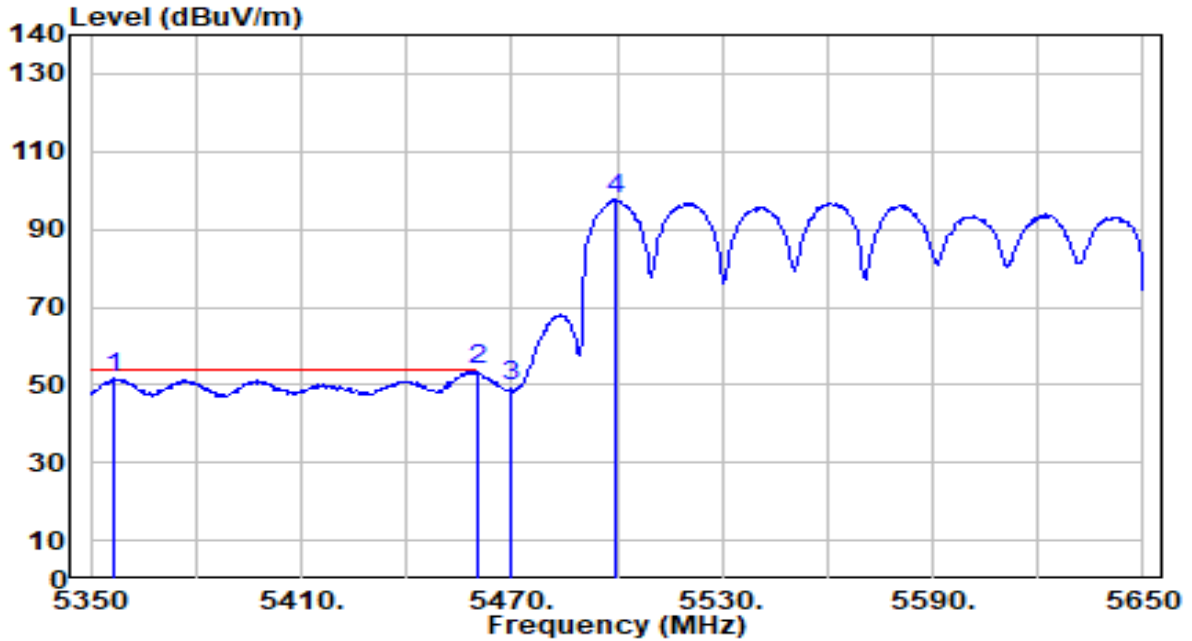


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5356.900	51.02	0.50	51.52	-2.48	54.00	240	267	Average
2	* 5460.000	53.09	0.65	53.74	-0.26	54.00	240	267	Average
3	5470.000	49.22	0.69	49.91	N/A	N/A	240	267	Average
4	5499.400	96.90	0.79	97.69	N/A	N/A	240	267	Average

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

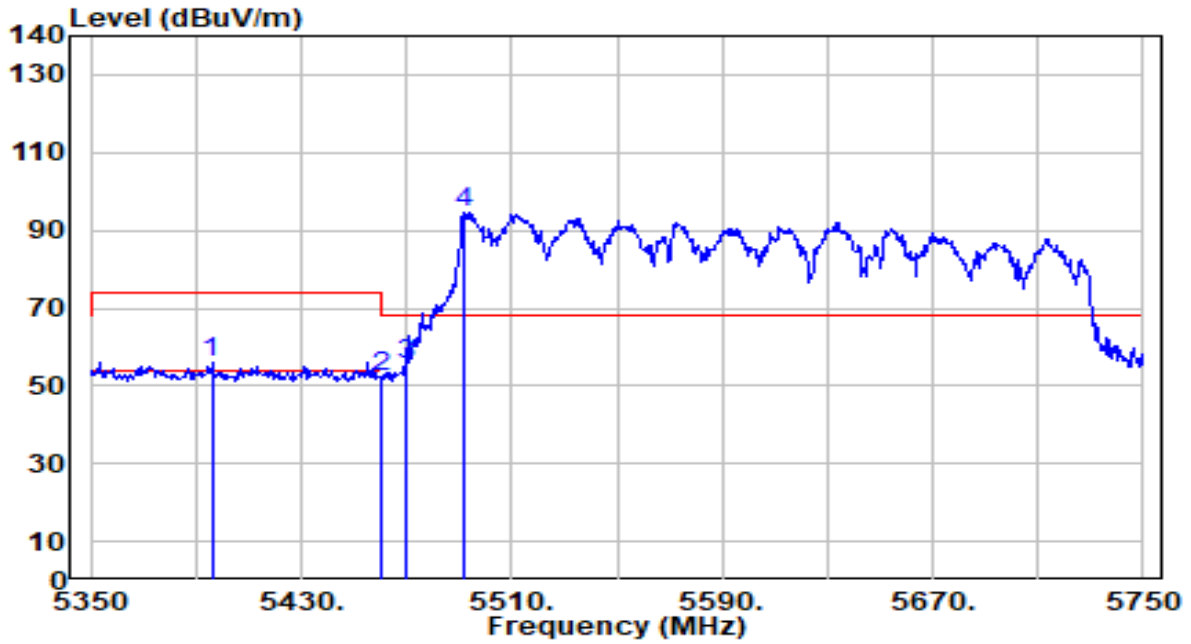


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5396.000	55.70	0.45	56.16	-17.84	74.00	213	38	Peak
2	5460.000	51.71	0.65	52.36	-21.64	74.00	213	38	Peak
3	* 5470.000	54.64	0.69	55.33	-12.87	68.20	213	38	Peak
4	5491.600	93.91	0.76	94.67	N/A	N/A	213	38	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

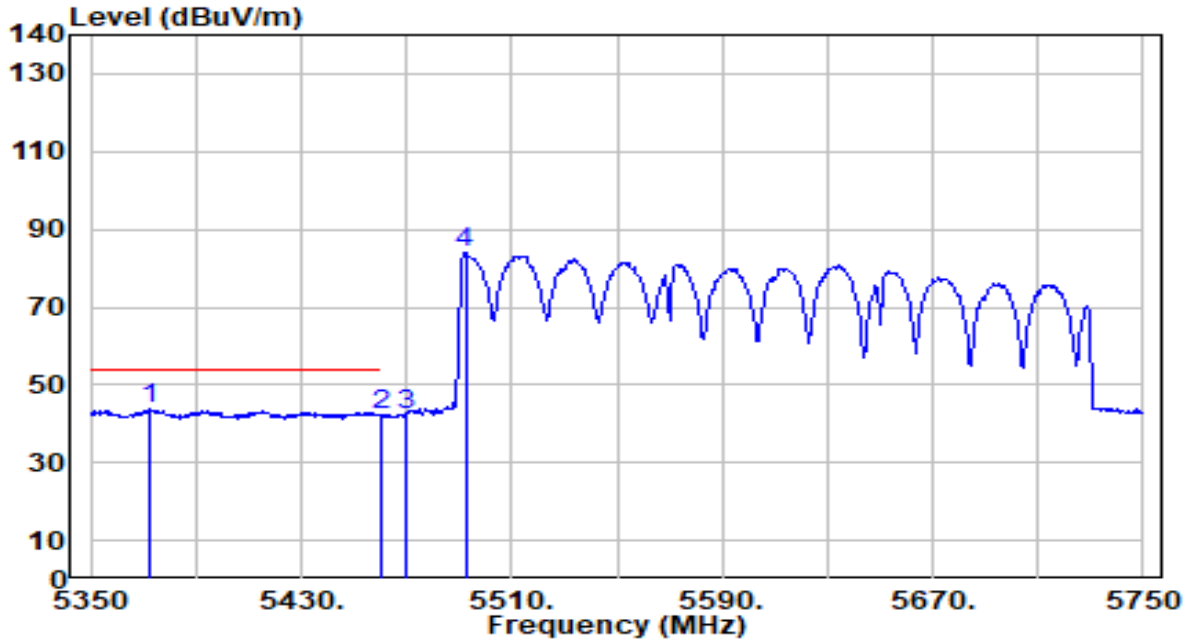


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5372.000	43.16	0.48	43.64	-10.36	54.00	213	38	Average
2	5460.000	41.81	0.65	42.47	-11.53	54.00	213	38	Average
3	5470.000	41.55	0.69	42.24	N/A	N/A	213	38	Average
4	5492.400	83.11	0.76	83.88	N/A	N/A	213	38	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

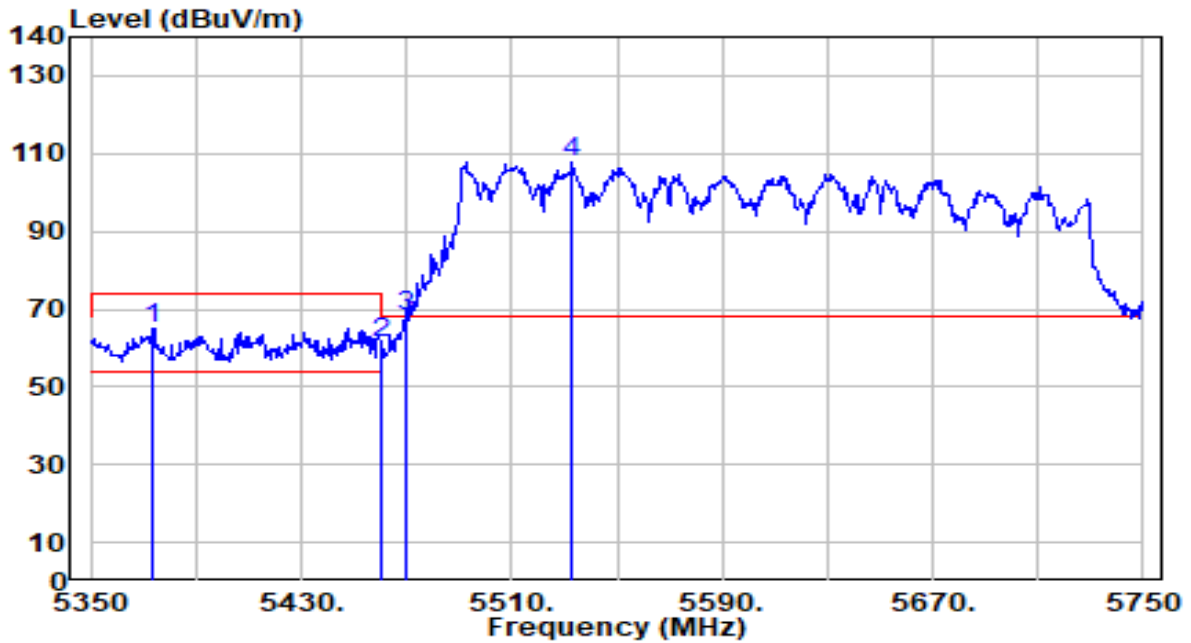


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5373.600	64.59	0.48	65.07	-8.93	74.00	196	82	Peak
2	5460.000	60.50	0.65	61.16	-12.84	74.00	196	82	Peak
3	* 5470.000	67.27	0.69	67.96	-0.24	68.20	196	82	Peak
4	5533.200	106.86	0.91	107.77	N/A	N/A	196	82	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-27
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

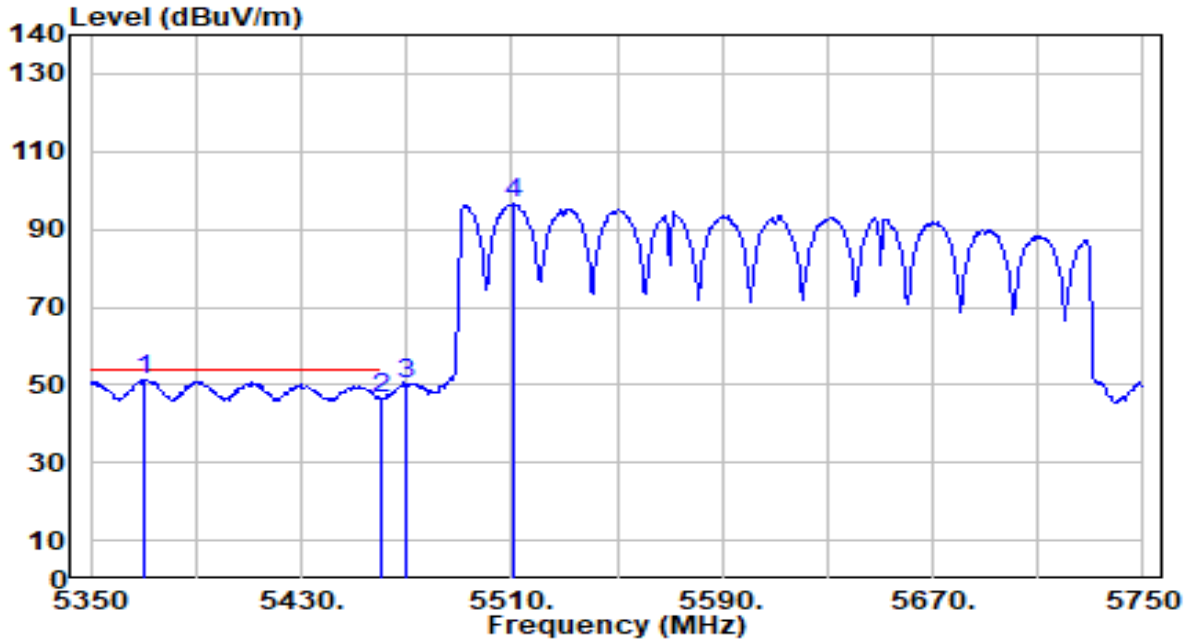

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5370.800	50.71	0.48	51.19	-2.81	54.00	196	82	Average
2	5460.000	45.78	0.65	46.44	-7.56	54.00	196	82	Average
3	5470.000	49.53	0.69	50.22	N/A	N/A	196	82	Average
4	5510.400	95.65	0.83	96.48	N/A	N/A	196	82	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



## 7.10.AC Conducted Emissions Measurement

### 7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


### 7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 7.10.3. Test Setup

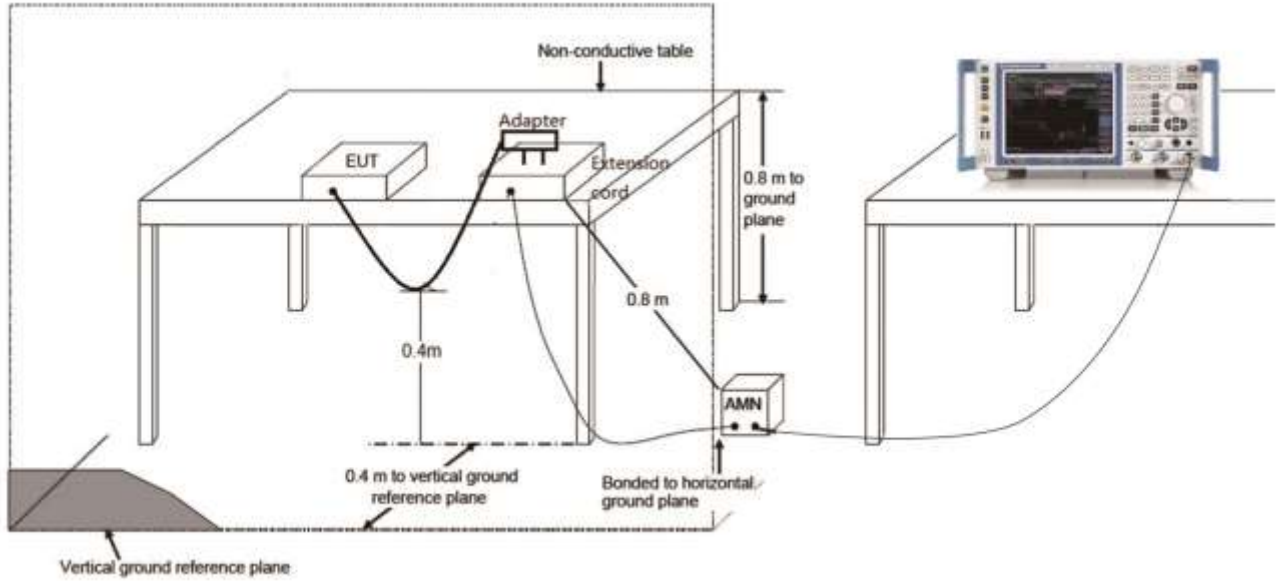

### 7.10.4. Test Result

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

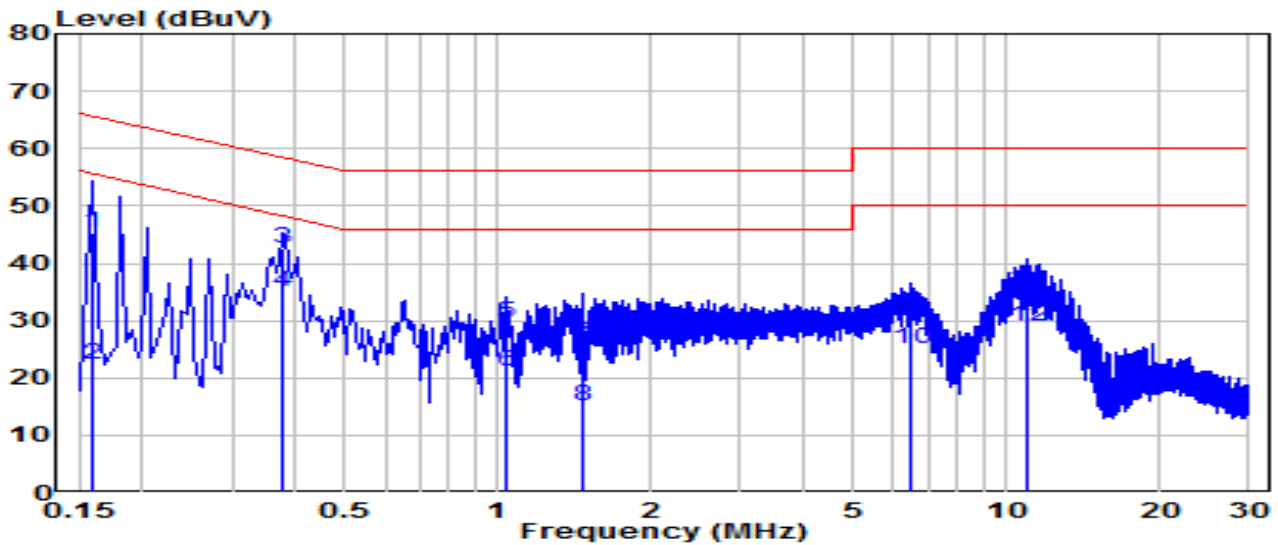


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.159	35.70	9.63	45.33	-20.18	65.52	QP
2	0.159	12.75	9.63	22.38	-33.13	55.52	Average
3	* 0.375	32.95	9.64	42.59	-15.80	58.39	QP
4	* 0.375	25.48	9.64	35.12	-13.27	48.39	Average
5	1.036	19.94	9.68	29.62	-26.38	56.00	QP
6	1.036	11.59	9.68	21.27	-24.73	46.00	Average
7	1.464	16.34	9.69	26.03	-29.97	56.00	QP
8	1.464	5.52	9.69	15.21	-30.79	46.00	Average
9	6.476	21.25	9.78	31.03	-28.97	60.00	QP
10	6.476	15.38	9.78	25.16	-24.84	50.00	Average
11	10.935	25.35	9.88	35.22	-24.78	60.00	QP
12	10.935	19.01	9.88	28.89	-21.11	50.00	Average

Note:

1. "\*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

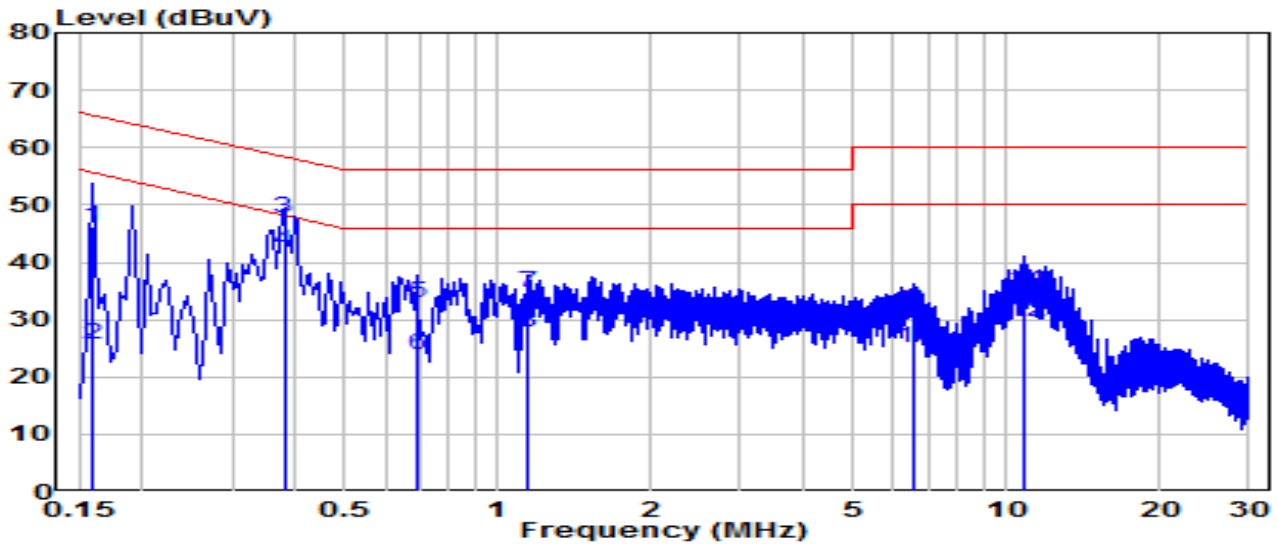


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	36.71	9.63	46.34	-19.18	65.52	QP
2	0.159	16.12	9.63	25.75	-29.77	55.52	Average
3	* 0.379	38.02	9.64	47.66	-10.63	58.29	QP
4	* 0.379	32.22	9.64	41.87	-6.42	48.29	Average
5	0.690	23.11	9.66	32.77	-23.23	56.00	QP
6	0.690	14.21	9.66	23.88	-22.12	46.00	Average
7	1.144	25.00	9.68	34.69	-21.31	56.00	QP
8	1.144	18.19	9.68	27.87	-18.13	46.00	Average
9	6.566	21.81	9.80	31.61	-28.39	60.00	QP
10	6.566	15.37	9.80	25.17	-24.83	50.00	Average
11	10.904	25.18	9.90	35.08	-24.92	60.00	QP
12	10.904	19.56	9.90	29.46	-20.54	50.00	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

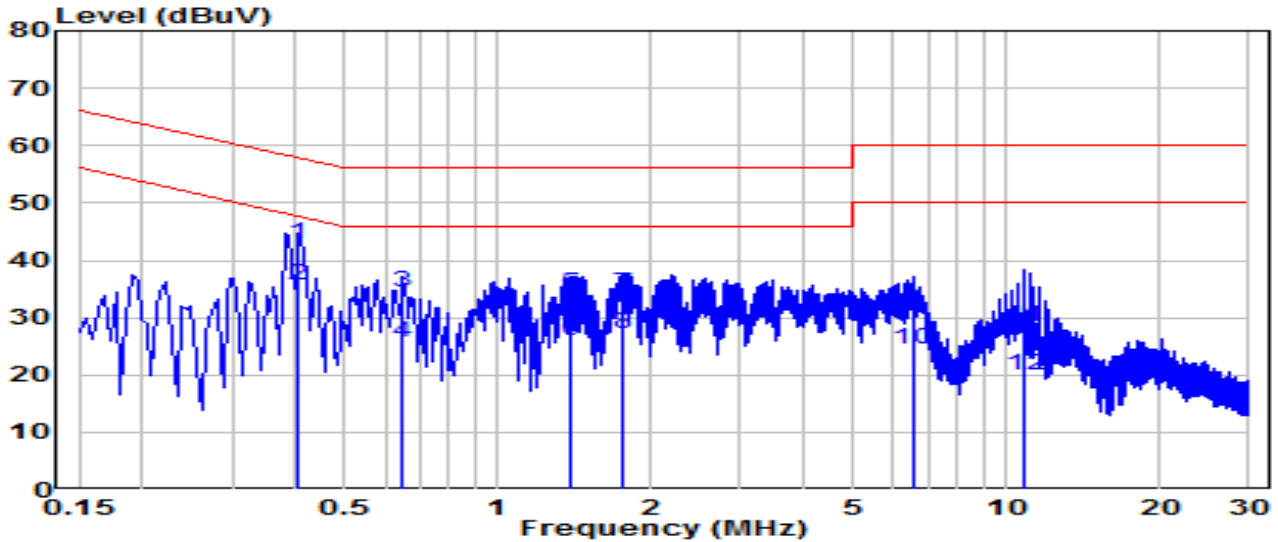


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	* 0.406	33.34	9.64	42.98	-14.74	57.72	QP
2	* 0.406	26.03	9.64	35.68	-12.04	47.72	Average
3	0.649	24.74	9.66	34.40	-21.60	56.00	QP
4	0.649	16.11	9.66	25.77	-20.23	46.00	Average
5	1.383	24.37	9.69	34.05	-21.95	56.00	QP
6	1.383	16.42	9.69	26.11	-19.89	46.00	Average
7	1.761	24.44	9.70	34.14	-21.86	56.00	QP
8	1.761	17.38	9.70	27.08	-18.92	46.00	Average
9	6.530	21.64	9.78	31.42	-28.58	60.00	QP
10	6.530	14.65	9.78	24.43	-25.57	50.00	Average
11	10.818	18.46	9.87	28.33	-31.67	60.00	QP
12	10.818	9.94	9.87	19.81	-30.19	50.00	Average

Note:

1. "\*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

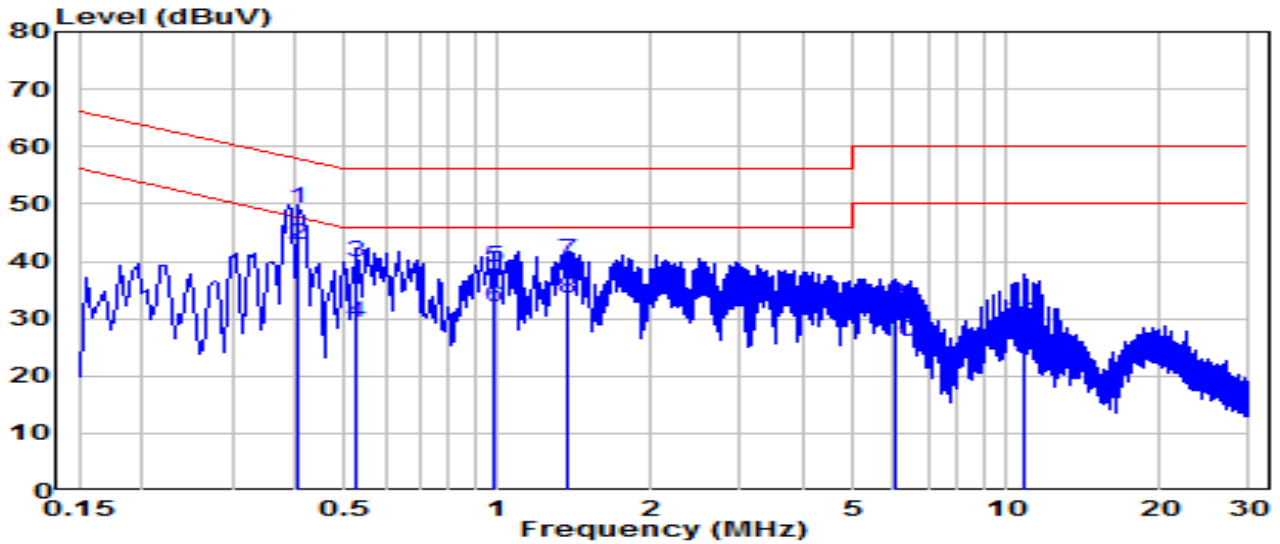

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	39.52	9.64	49.16	-8.56	57.72	QP
2	*	33.26	9.64	42.91	-4.81	47.72	Average
3		30.21	9.65	39.87	-16.13	56.00	QP
4		19.51	9.65	29.16	-16.84	46.00	Average
5		29.24	9.68	38.92	-17.08	56.00	QP
6		22.30	9.68	31.98	-14.02	46.00	Average
7		30.55	9.69	40.24	-15.76	56.00	QP
8		23.92	9.69	33.61	-12.39	46.00	Average
9		22.92	9.79	32.71	-27.29	60.00	QP
10		16.14	9.79	25.93	-24.07	50.00	Average
11		19.57	9.90	29.47	-30.53	60.00	QP
12		13.57	9.90	23.46	-26.54	50.00	Average

Note:

1. "\*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

## **Appendix A : Test Setup Photograph**

Refer to “2406TW0101-UT” file.

## **Appendix B : EUT Photograph**

Refer to “2406TW0101-UE” file.

## **Appendix C : Internal Photograph**

Refer to “2406TW0101-UI” file.

————— The End —————