




802.11 n20 CH01 (2412MHz)

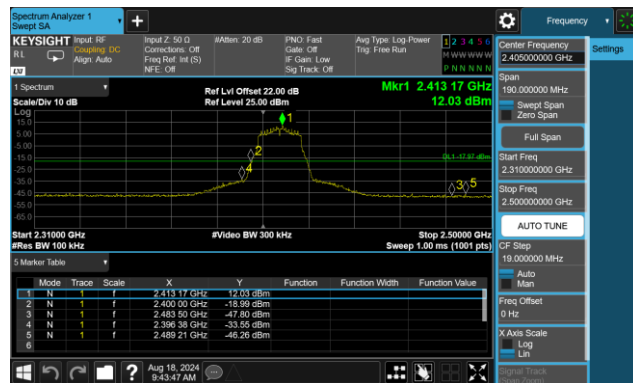


802.11 n20 CH01 (2412MHz)

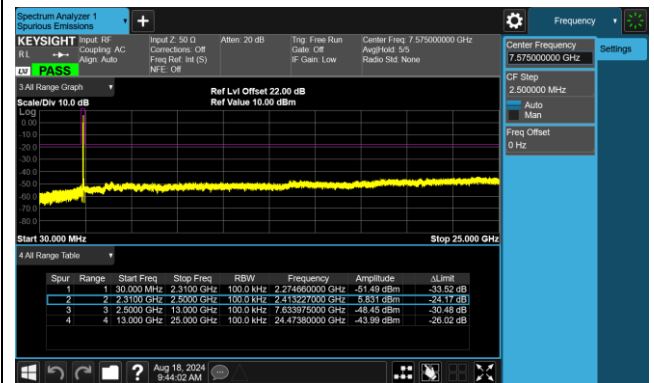


802.11 n20 CH06 (2437MHz)

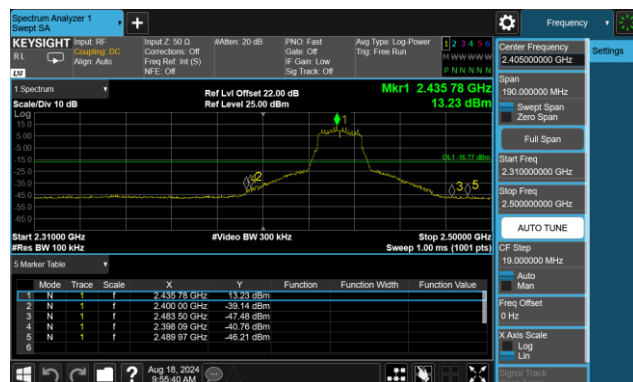


802.11 n20 CH06 (2437MHz)

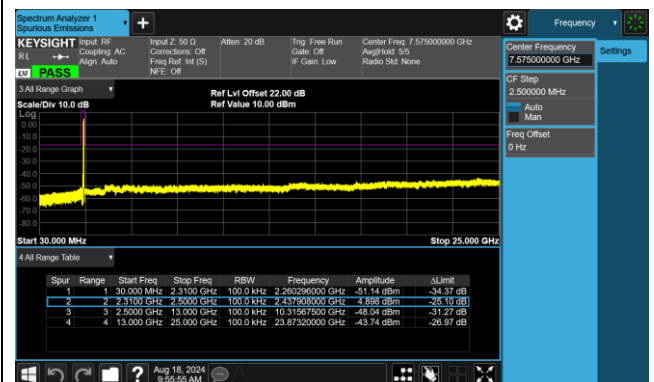


802.11 n20 CH11 (2462MHz)

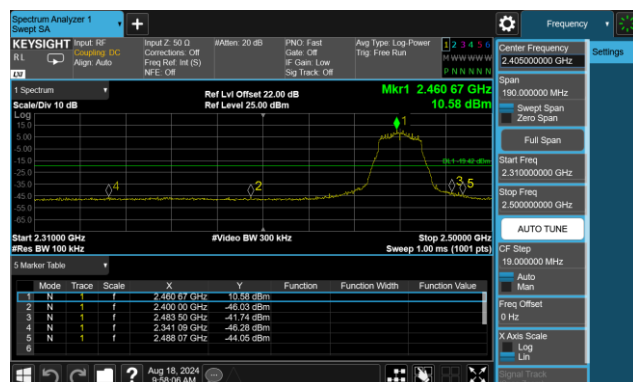


802.11 n20 CH11 (2462MHz)

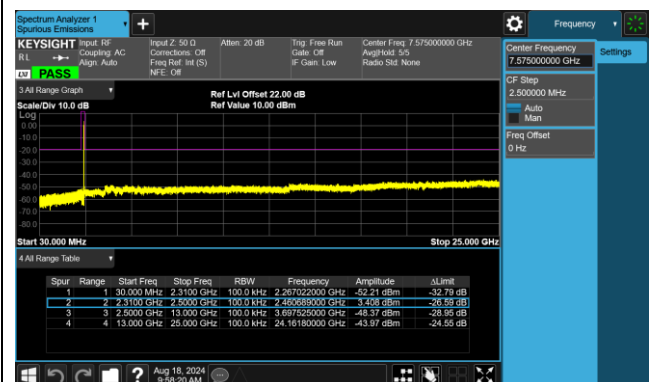

802.11 n40 CH03 (2422MHz)

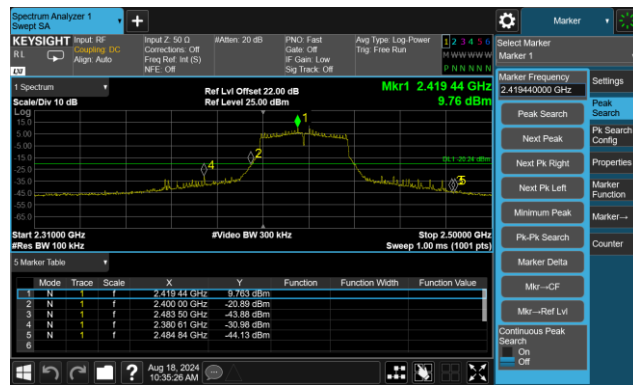


802.11 n40 CH03 (2422MHz)

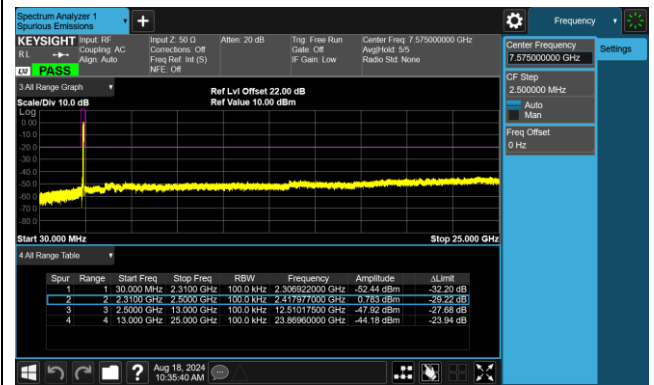


802.11 n40 CH06 (2437MHz)




802.11 n40 CH06 (2437MHz)

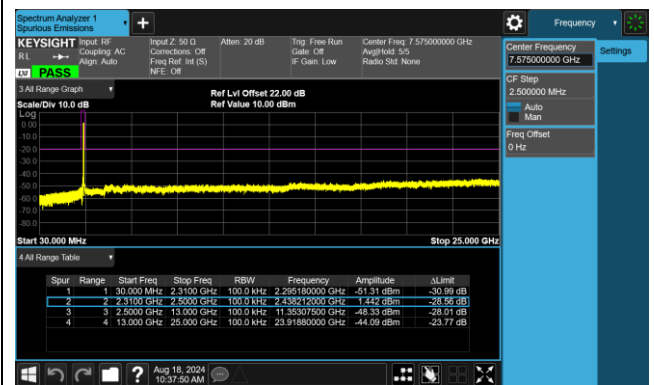


802.11 n40 CH09 (2452MHz)

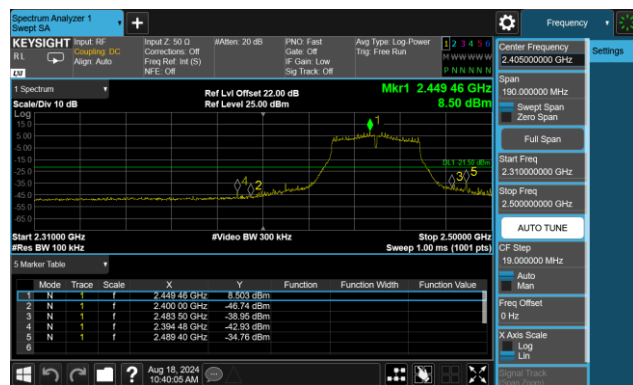


802.11 n40 CH09 (2452MHz)

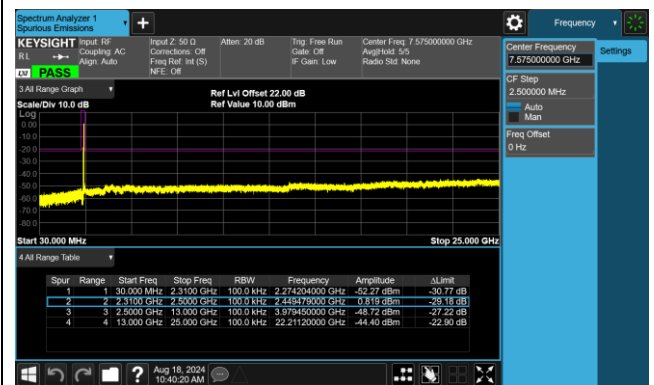

802.11 ax20 CH01 (2412MHz)

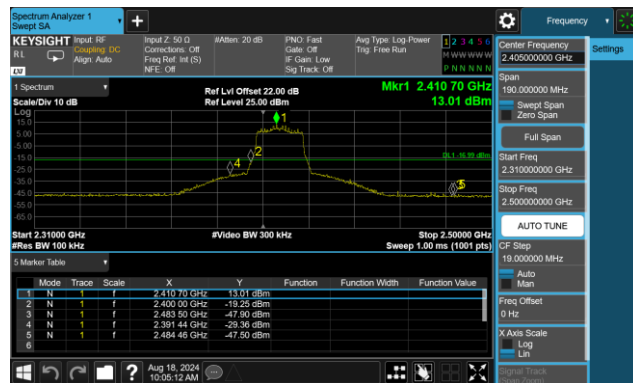


802.11 ax20 CH01 (2412MHz)

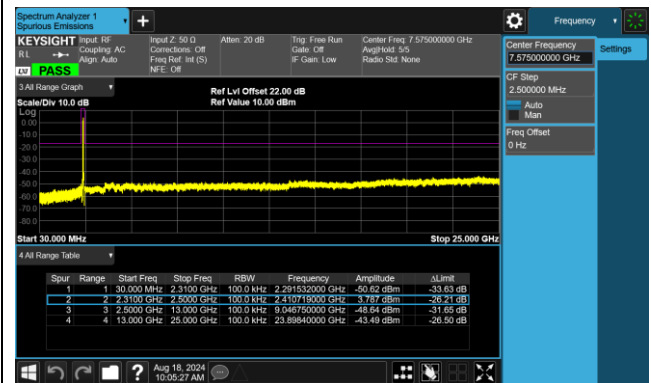


802.11 ax20 CH06 (2437MHz)




802.11 ax20 CH06 (2437MHz)

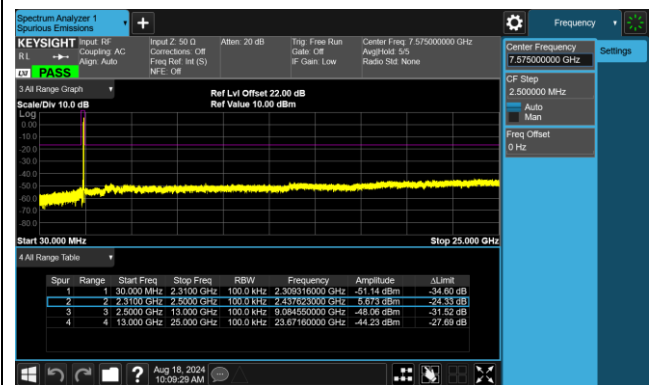


802.11 ax20 CH11 (2462MHz)

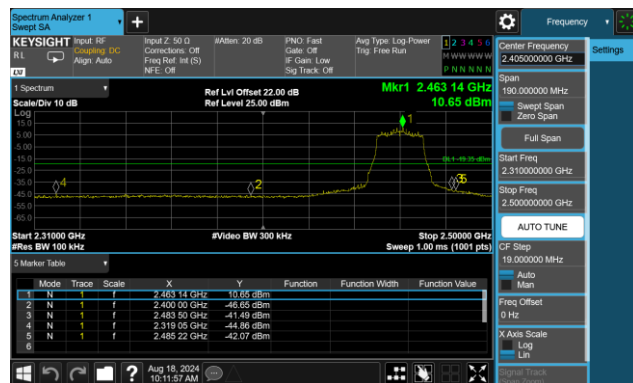


802.11 ax20 CH11 (2462MHz)

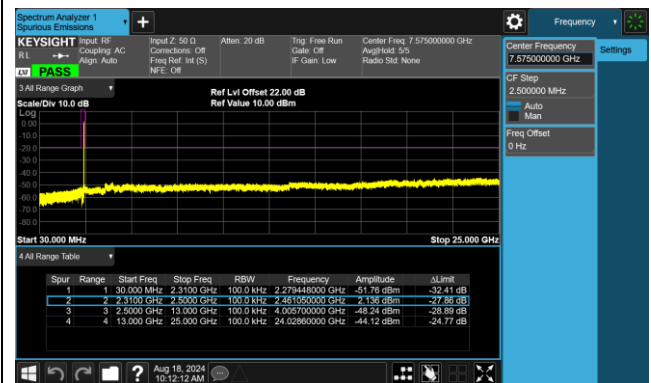


802.11 ax40 CH03 (2422MHz)

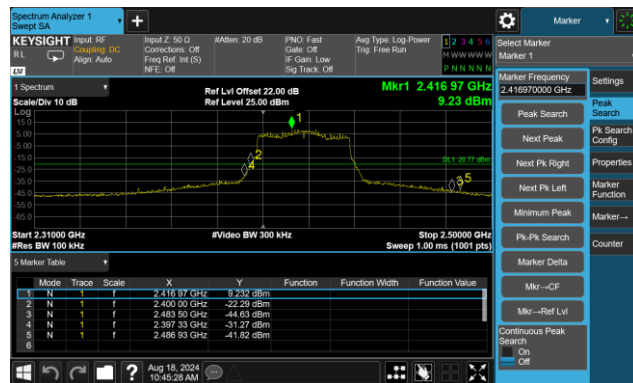


802.11 ax40 CH03 (2422MHz)

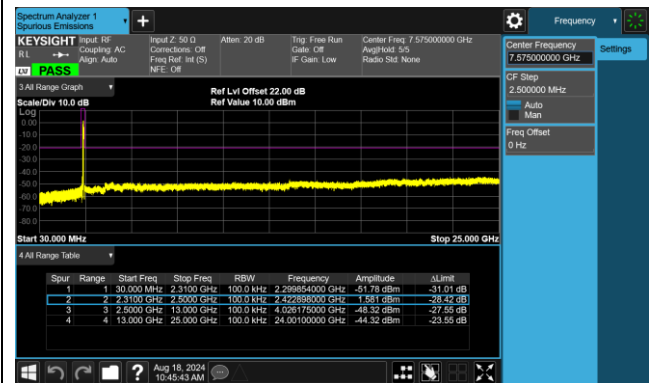


802.11 ax40 CH06 (2437MHz)

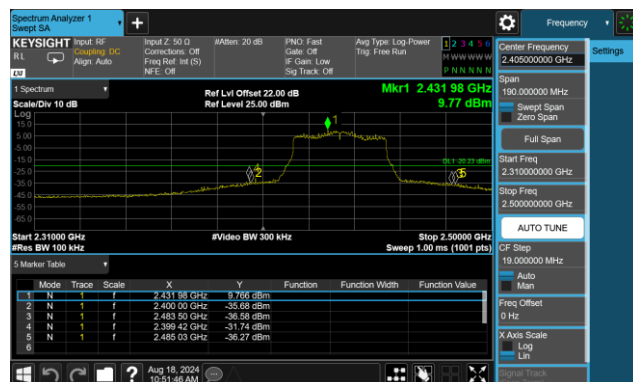


802.11 ax40 CH06 (2437MHz)

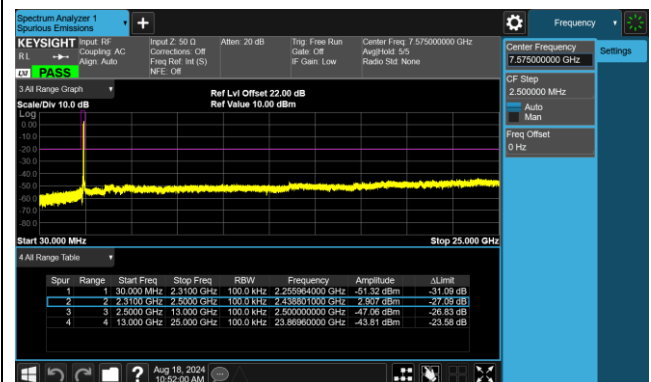


802.11 ax40 CH09 (2452MHz)

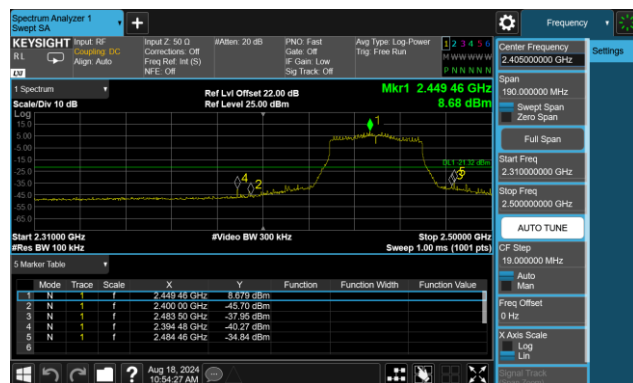


802.11 ax40 CH09 (2452MHz)

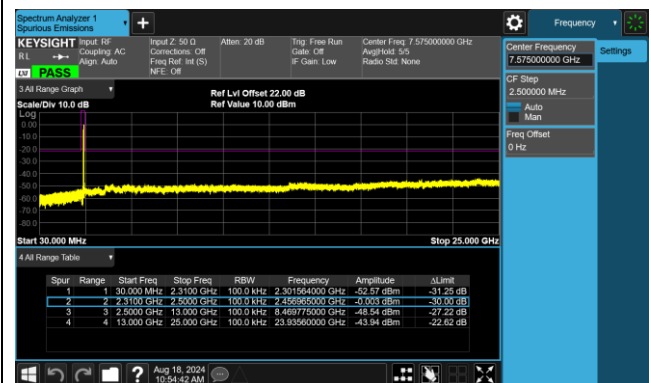

802.11be40 CH03 (2422MHz)

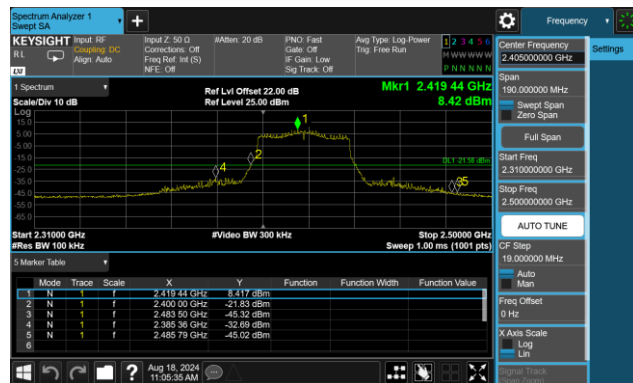


802.11be40 CH03 (2422MHz)

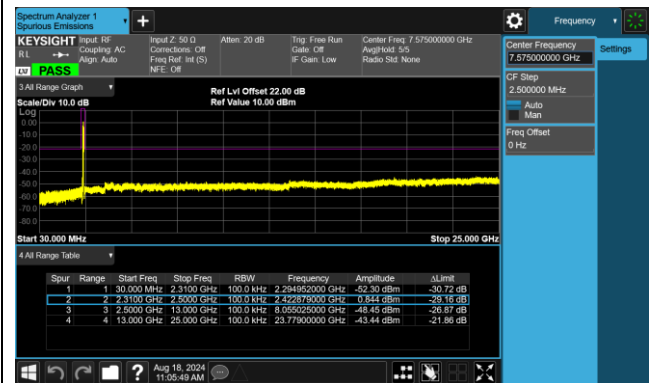


802.11be40 CH06 (2437MHz)




802.11be40 CH06 (2437MHz)

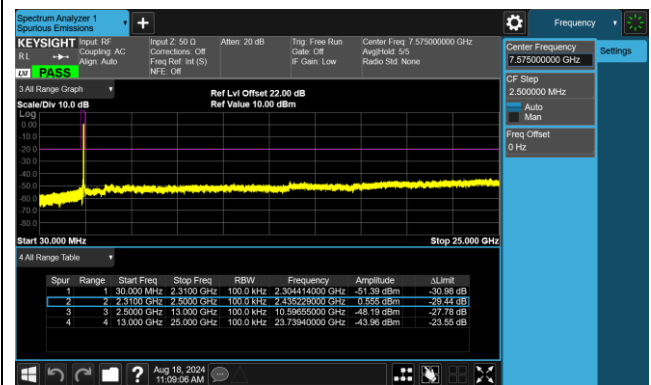

802.11be40 CH09 (2452MHz)

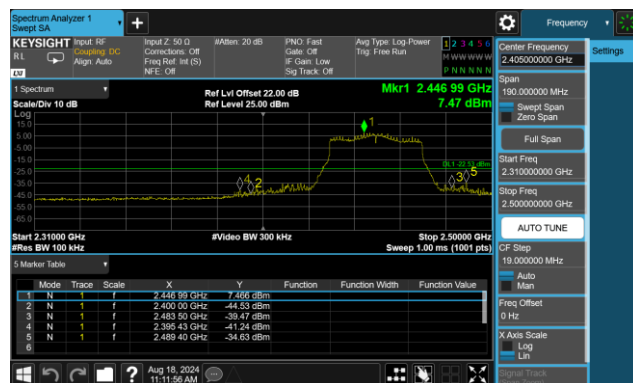

802.11be40 CH09 (2452MHz)

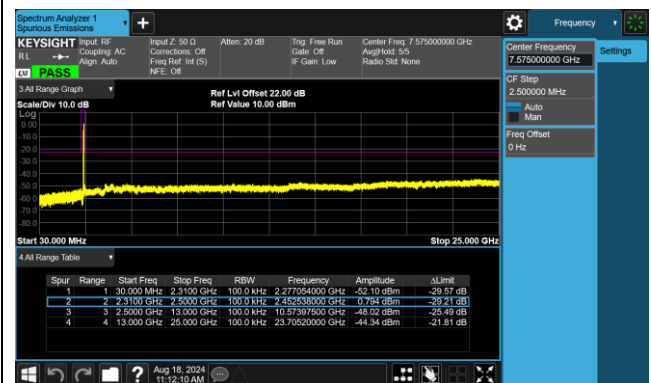

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

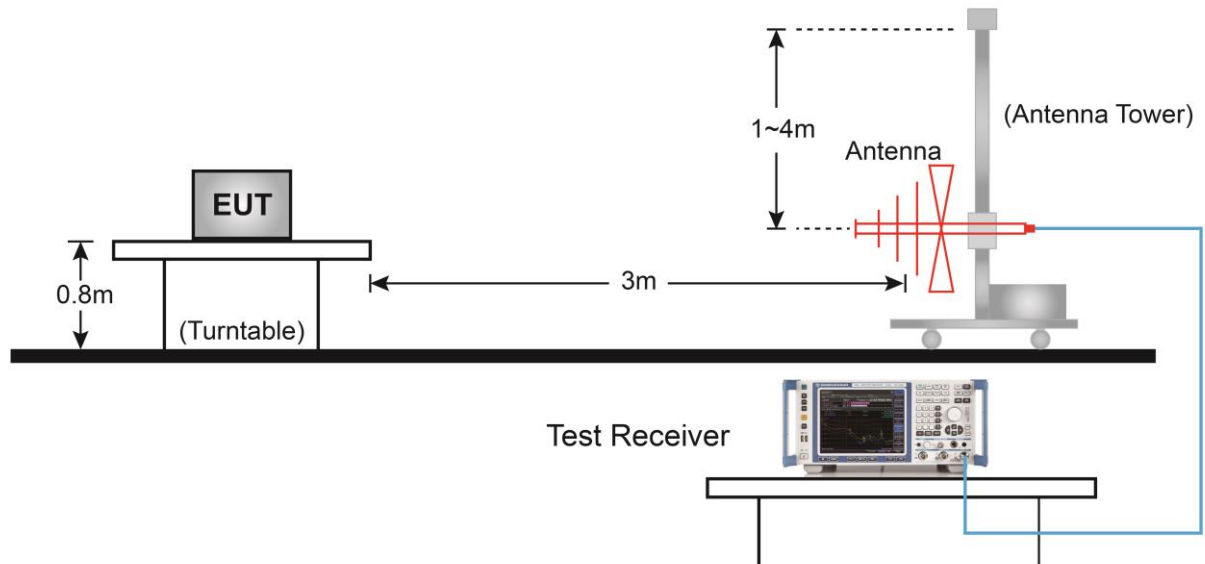


Above 1GHz Test Setup:

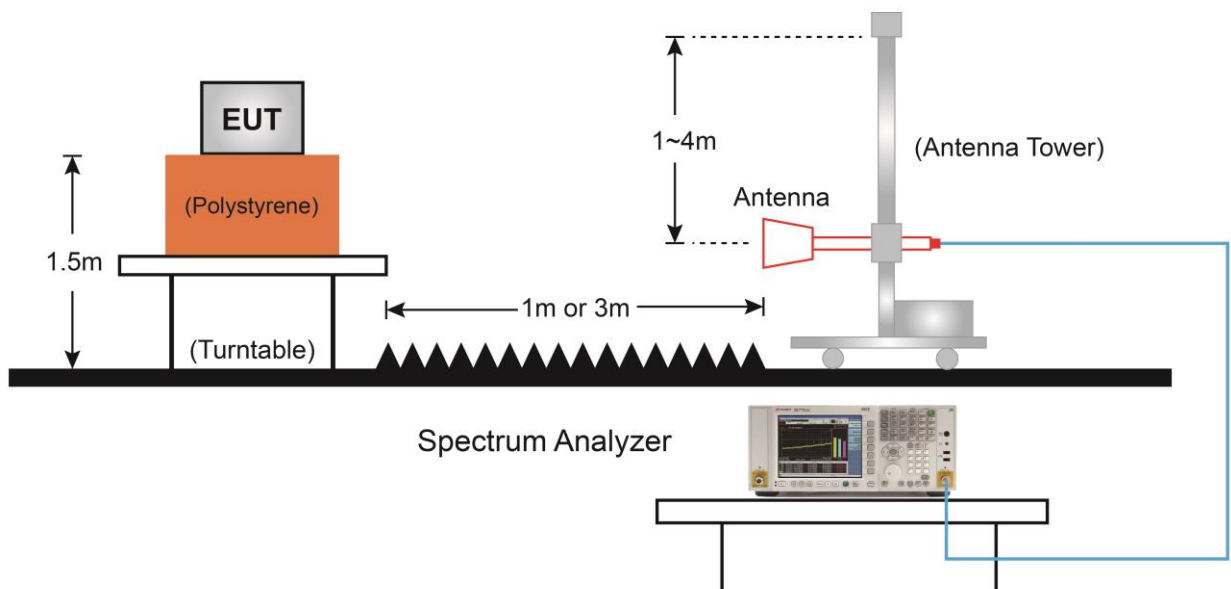

7.6.5. Test Result

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-02
Factor	VULB 9162	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

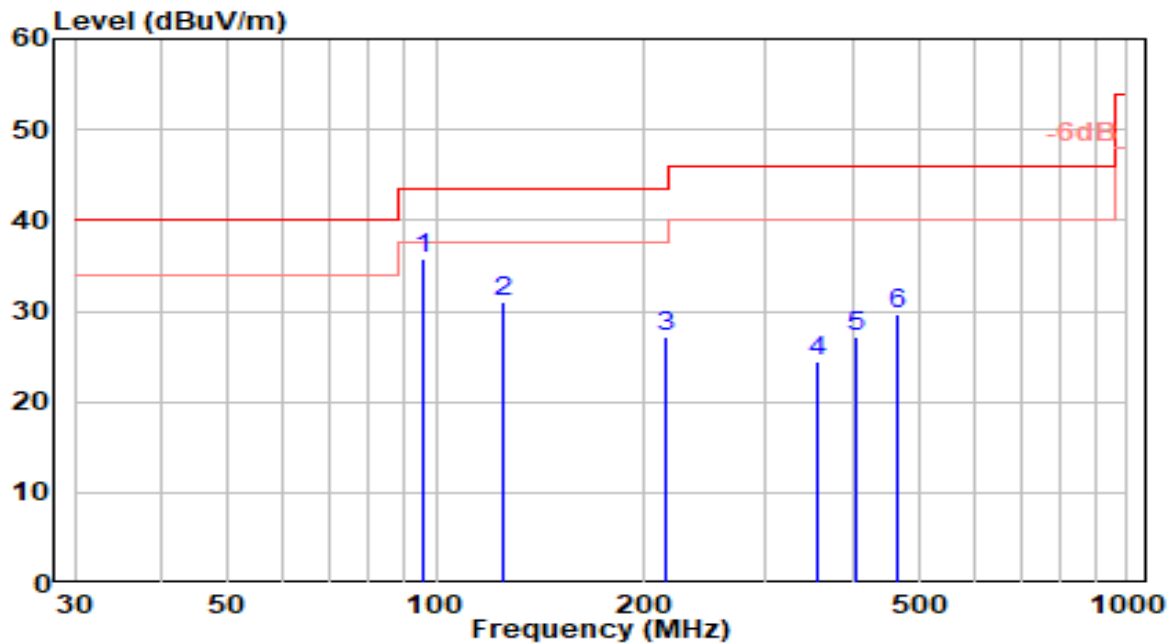


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	95.960	18.17	17.71	35.88	-7.62	43.50	200	90	QP
2		125.060	15.04	16.06	31.10	-12.40	43.50	200	298	QP
3		215.270	9.03	18.04	27.07	-16.43	43.50	200	58	QP
4		355.920	1.96	22.57	24.53	-21.47	46.00	100	44	QP
5		405.390	3.80	23.37	27.17	-18.83	46.00	100	45	QP
6		463.590	5.44	24.14	29.58	-16.42	46.00	100	311	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-02
Factor	VULB 9162	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

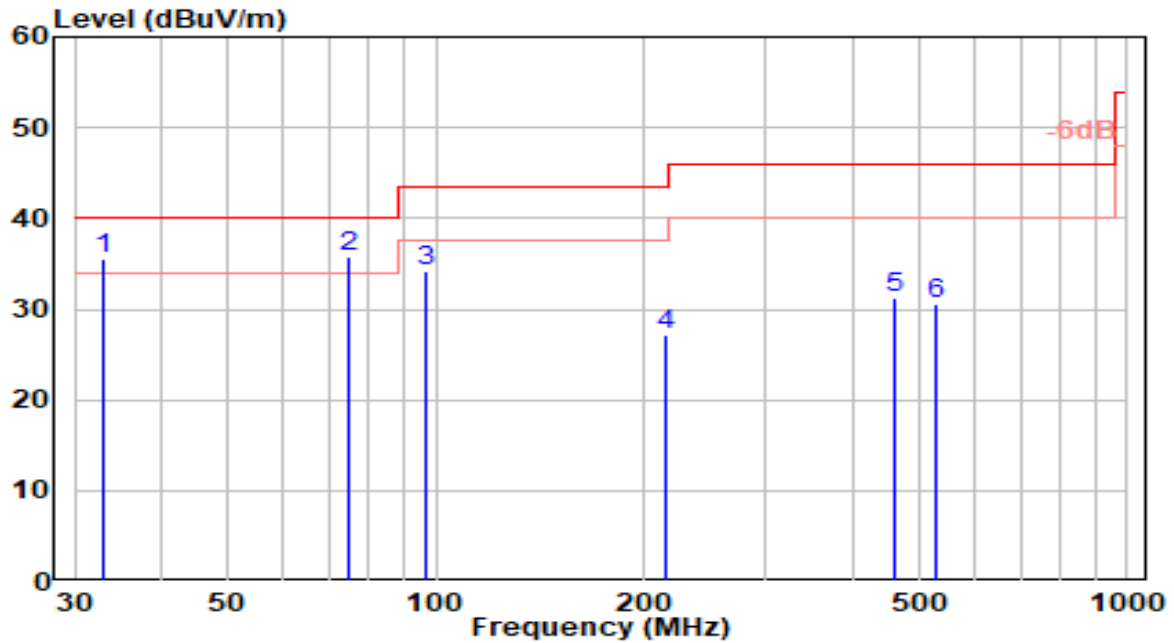


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		32.910	18.31	17.14	35.45	-4.55	40.00	100	83	QP
2	*	74.620	20.91	14.78	35.69	-4.31	40.00	200	360	QP
3		96.930	16.26	17.86	34.12	-9.38	43.50	100	89	QP
4		215.270	9.21	18.04	27.25	-16.25	43.50	100	235	QP
5		462.620	7.23	24.12	31.35	-14.65	46.00	100	214	QP
6		526.640	5.22	25.41	30.63	-15.37	46.00	100	360	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	By PoE

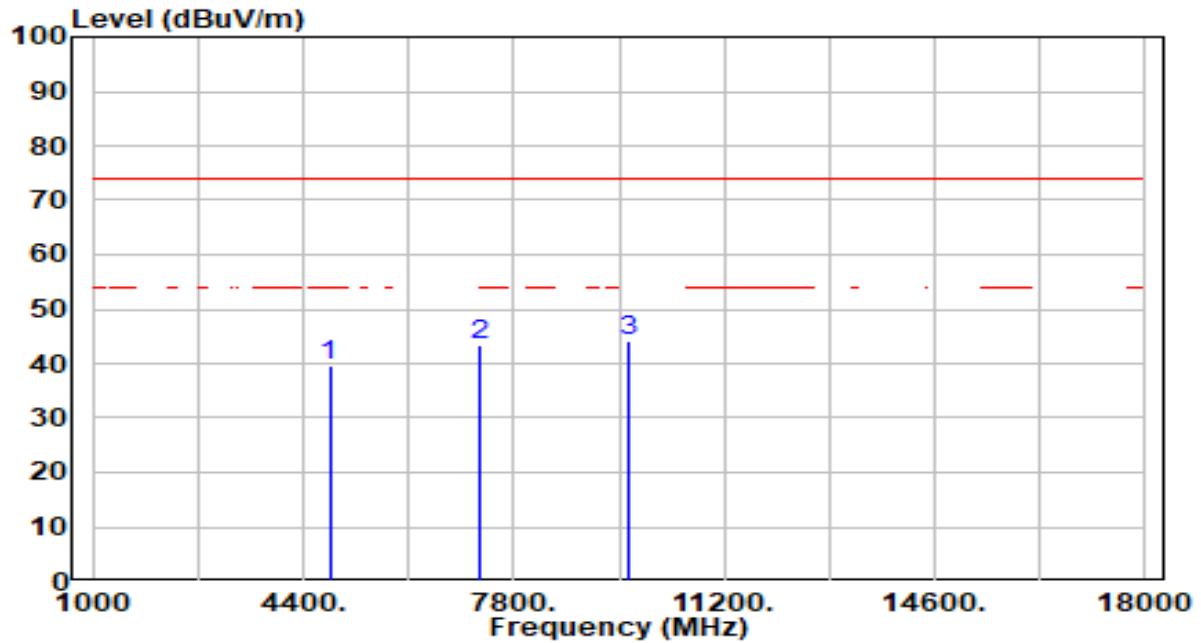


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.46	0.15	39.61	-34.39	74.00	100	170	Peak
2	7236.000	37.74	5.81	43.55	-30.45	74.00	100	360	Peak
3	* 9648.000	38.96	5.16	44.13	-29.87	74.00	100	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	By PoE

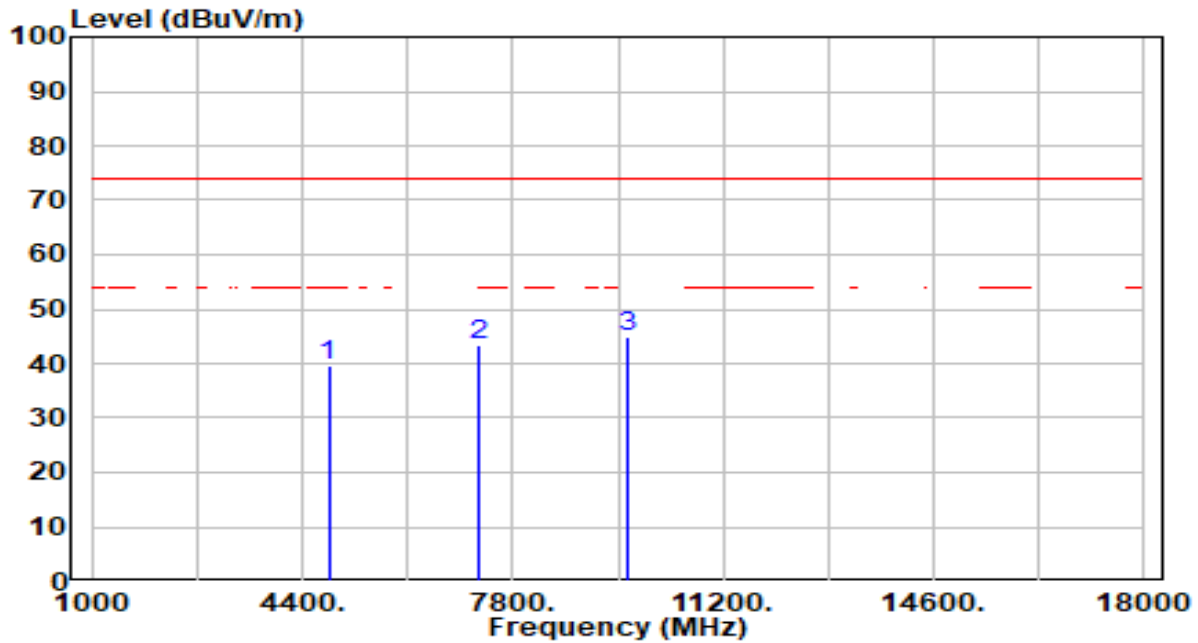


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.44	0.15	39.59	-34.41	74.00	200	28	Peak
2	7236.000	37.48	5.81	43.29	-30.71	74.00	100	127	Peak
3	* 9648.000	39.90	5.16	45.06	-28.94	74.00	200	62	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	By PoE

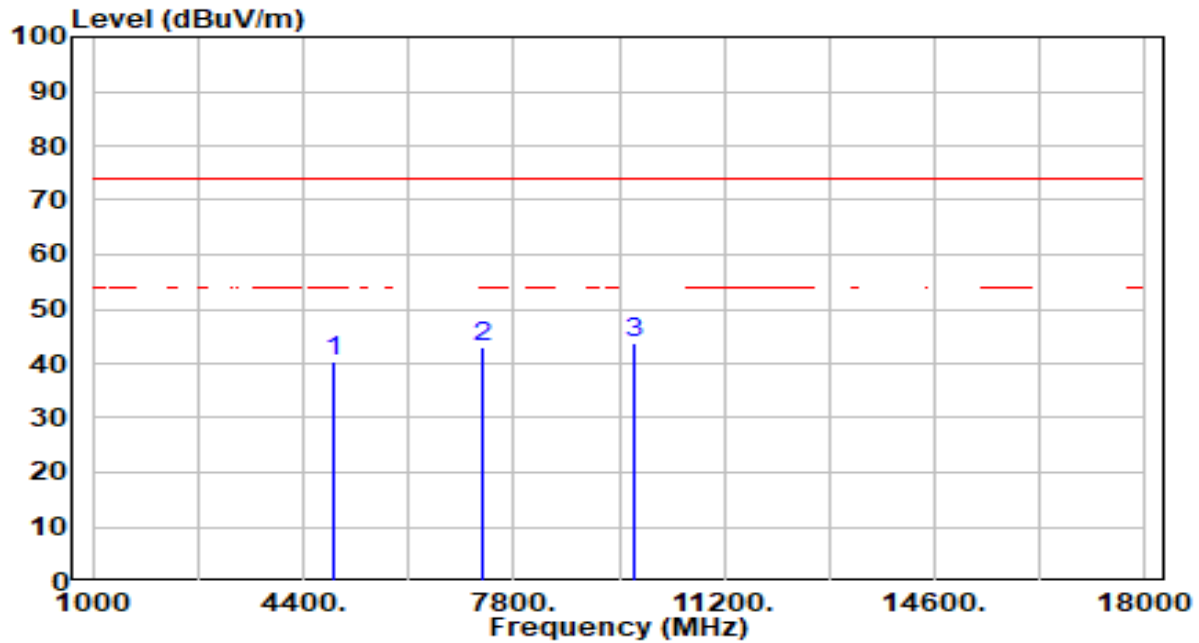


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.17	0.25	40.42	-33.58	74.00	100	170	Peak
2	7311.000	37.30	5.82	43.12	-30.88	74.00	100	97	Peak
3	* 9748.000	38.60	5.19	43.79	-30.21	74.00	100	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	By PoE

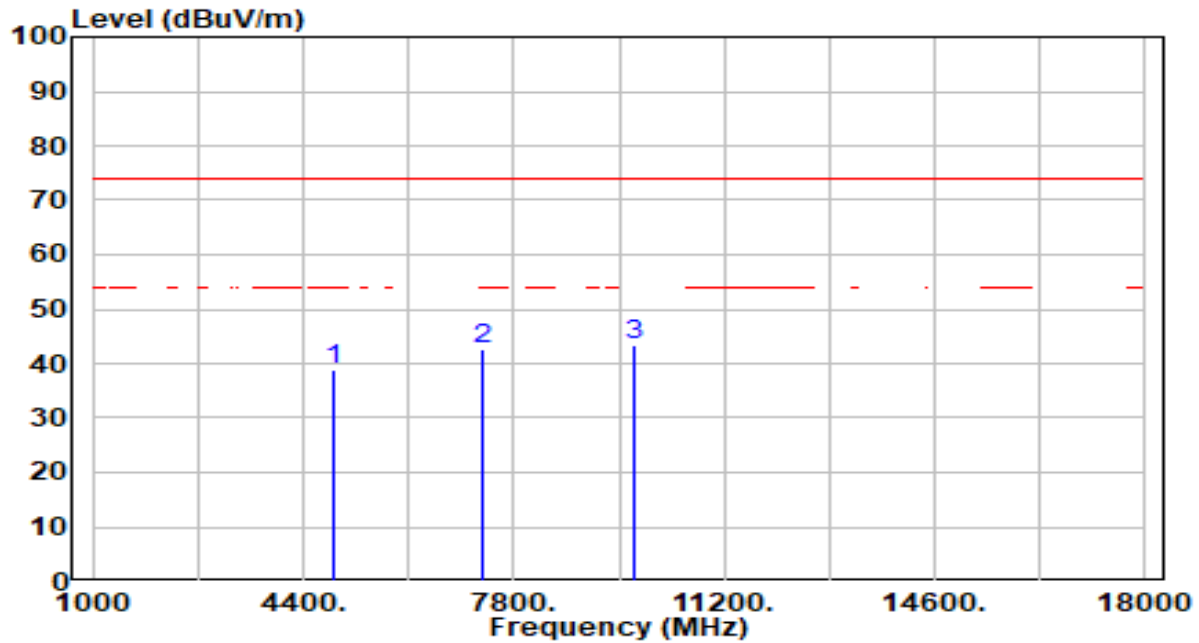


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.48	0.25	38.73	-35.27	74.00	100	79	Peak
2	7311.000	36.94	5.82	42.76	-31.24	74.00	100	360	Peak
3	* 9748.000	38.31	5.19	43.50	-30.50	74.00	100	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	By PoE

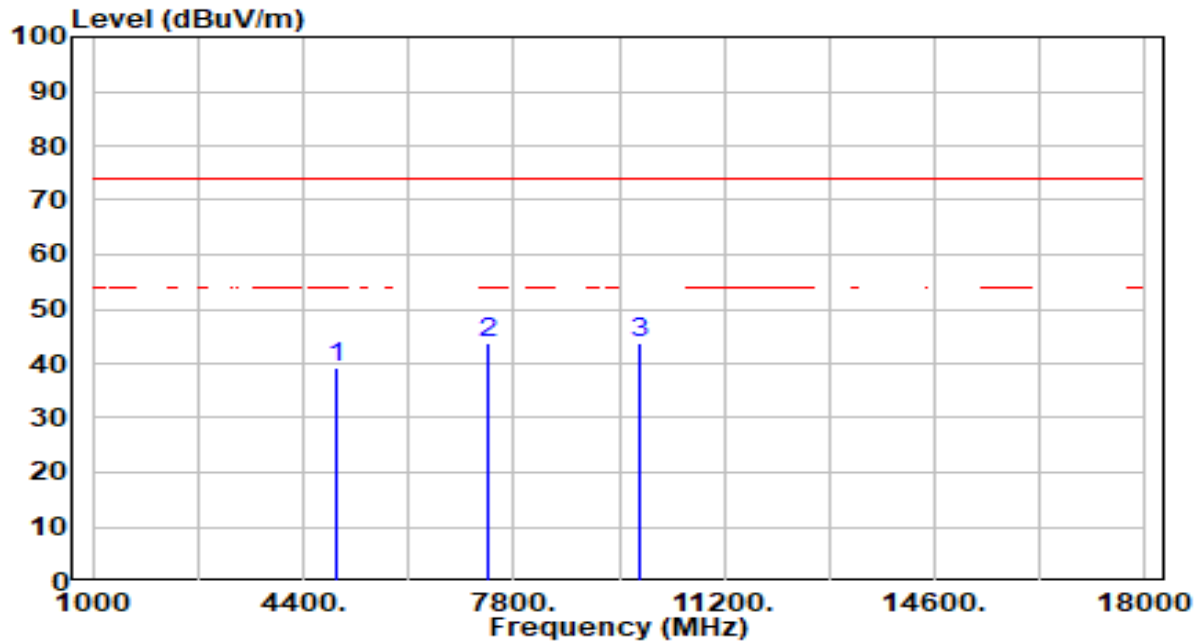


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.02	0.35	39.37	-34.63	74.00	100	360	Peak
2	7386.000	37.78	5.82	43.61	-30.39	74.00	100	100	Peak
3	* 9848.000	38.47	5.22	43.70	-30.30	74.00	100	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	By PoE

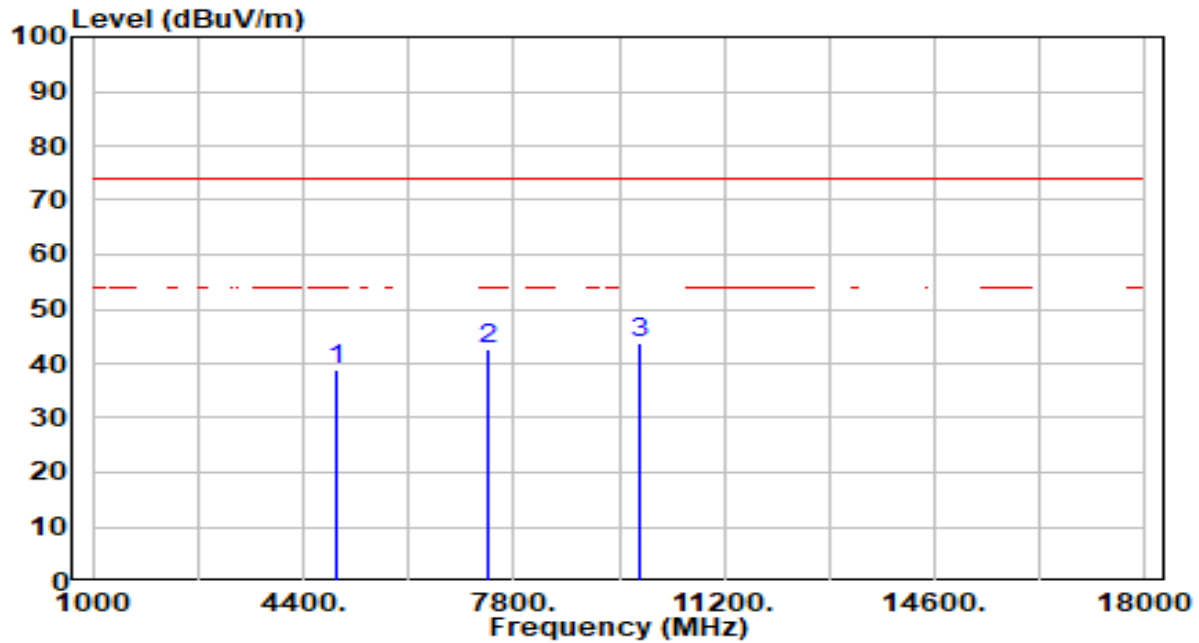


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.61	0.35	38.97	-35.03	74.00	100	39	Peak
2	7386.000	36.98	5.82	42.80	-31.20	74.00	100	274	Peak
3	* 9848.000	38.62	5.22	43.84	-30.16	74.00	100	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	By PoE

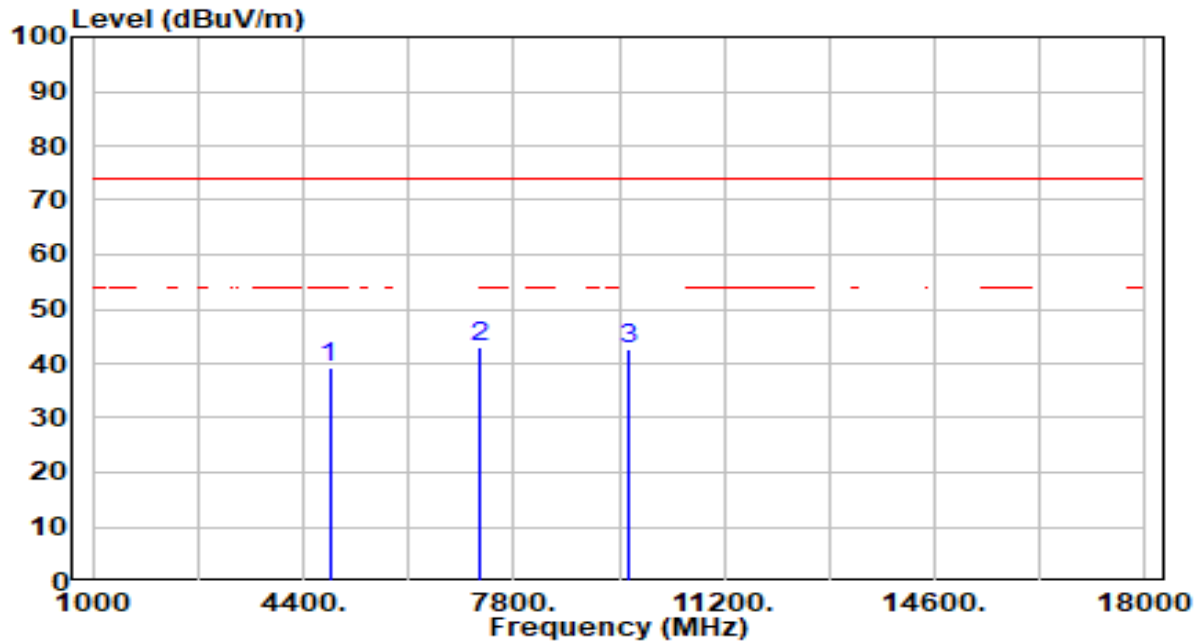


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	39.00	0.15	39.15	-34.85	74.00	100	354	Peak
2	*	7236.000	37.05	5.81	42.86	-31.14	74.00	100	350	Peak
3		9648.000	37.65	5.16	42.81	-31.19	74.00	100	82	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	By PoE

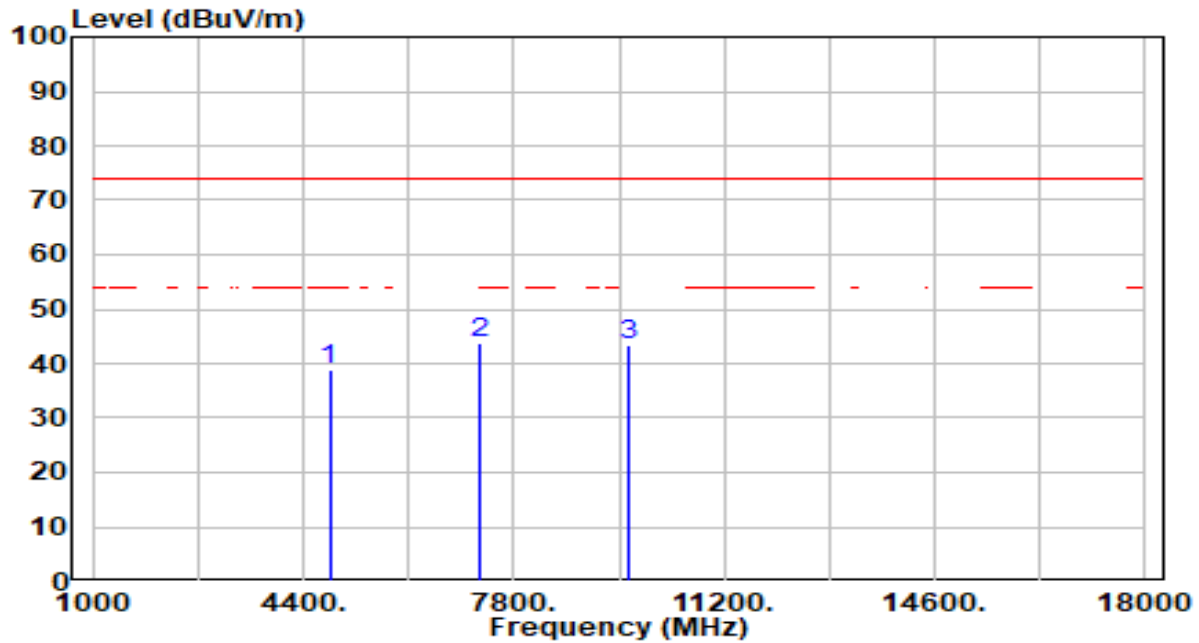


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	38.80	0.15	38.95	-35.05	74.00	100	221	Peak
2	* 7236.000	37.87	5.81	43.68	-30.32	74.00	100	199	Peak
3	9648.000	38.11	5.16	43.27	-30.73	74.00	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	By PoE

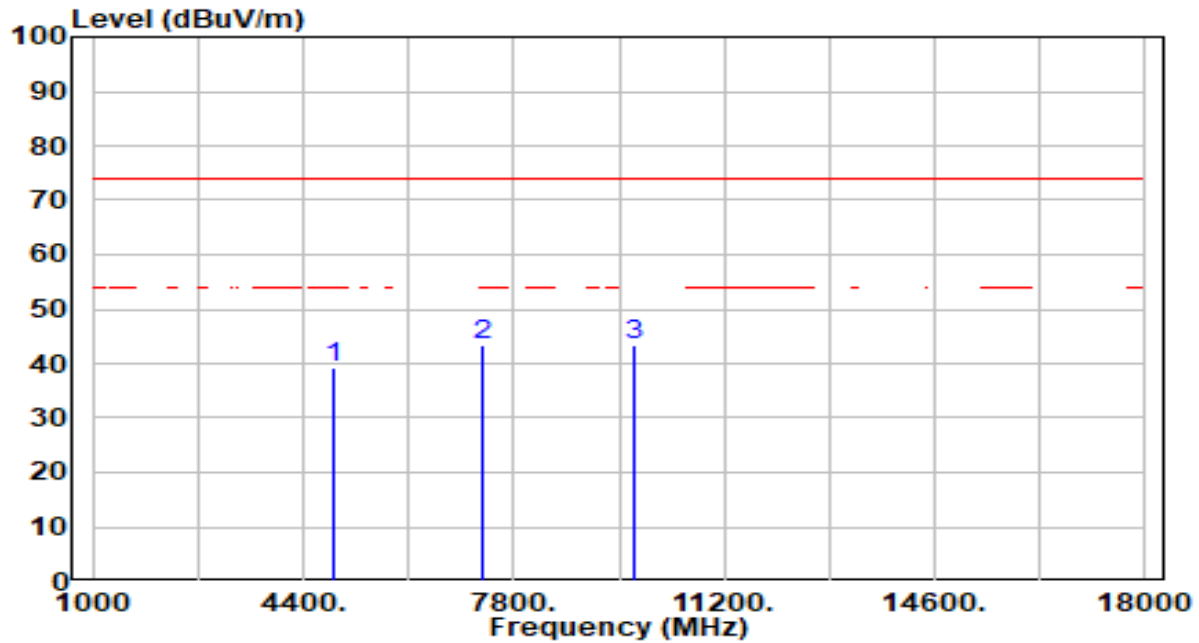


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.87	0.25	39.12	-34.88	74.00	100	190	Peak
2	7311.000	37.39	5.82	43.21	-30.79	74.00	100	208	Peak
3	* 9748.000	38.30	5.19	43.49	-30.51	74.00	100	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	By PoE

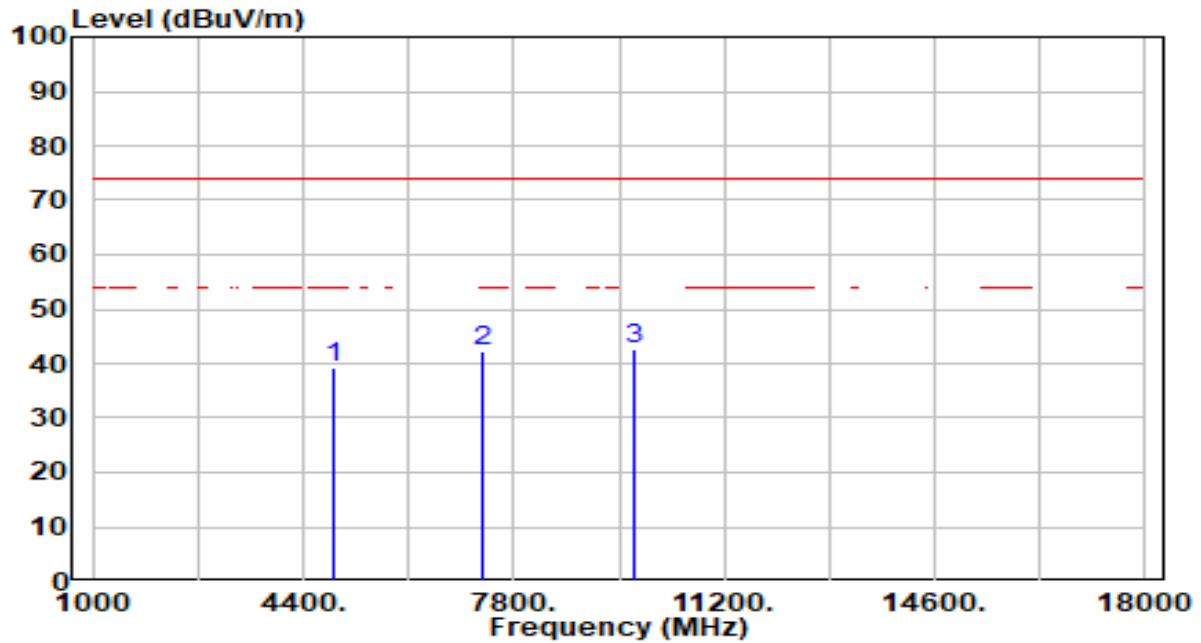


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.14	0.25	39.40	-34.60	74.00	100	173	Peak
2	7311.000	36.53	5.82	42.34	-31.66	74.00	100	184	Peak
3	* 9748.000	37.48	5.19	42.67	-31.33	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	By PoE

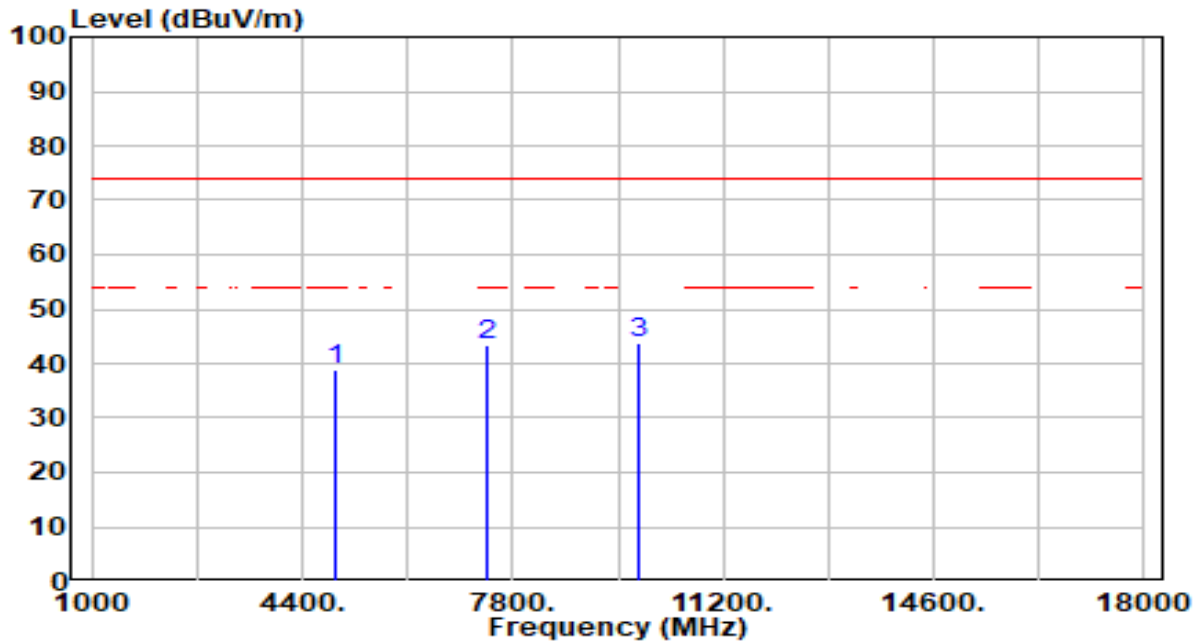


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.65	0.35	39.00	-35.00	74.00	100	291	Peak
2	7386.000	37.72	5.82	43.54	-30.46	74.00	100	97	Peak
3	* 9848.000	38.49	5.22	43.71	-30.29	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	By PoE

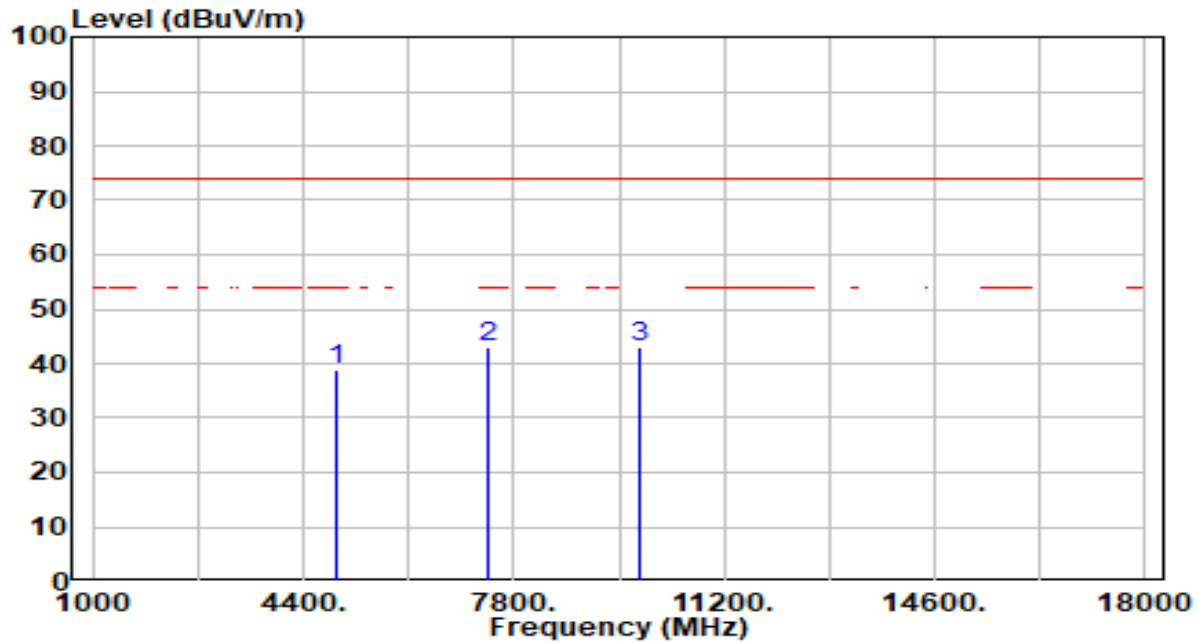


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.64	0.35	38.99	-35.01	74.00	100	76	Peak
2	* 7386.000	37.31	5.82	43.14	-30.86	74.00	100	36	Peak
3	9848.000	37.64	5.22	42.86	-31.14	74.00	100	123	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

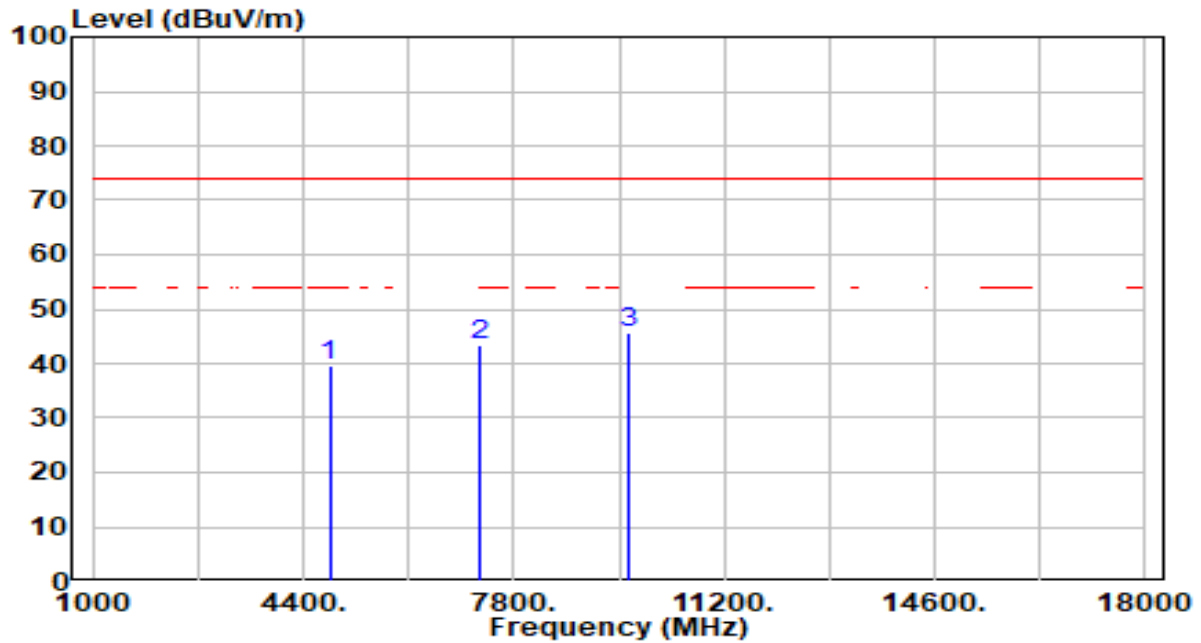


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	39.48	0.15	39.64	-34.36	74.00	100	297	Peak
2		7236.000	37.68	5.81	43.49	-30.51	74.00	100	130	Peak
3	*	9648.000	40.45	5.16	45.61	-28.39	74.00	100	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

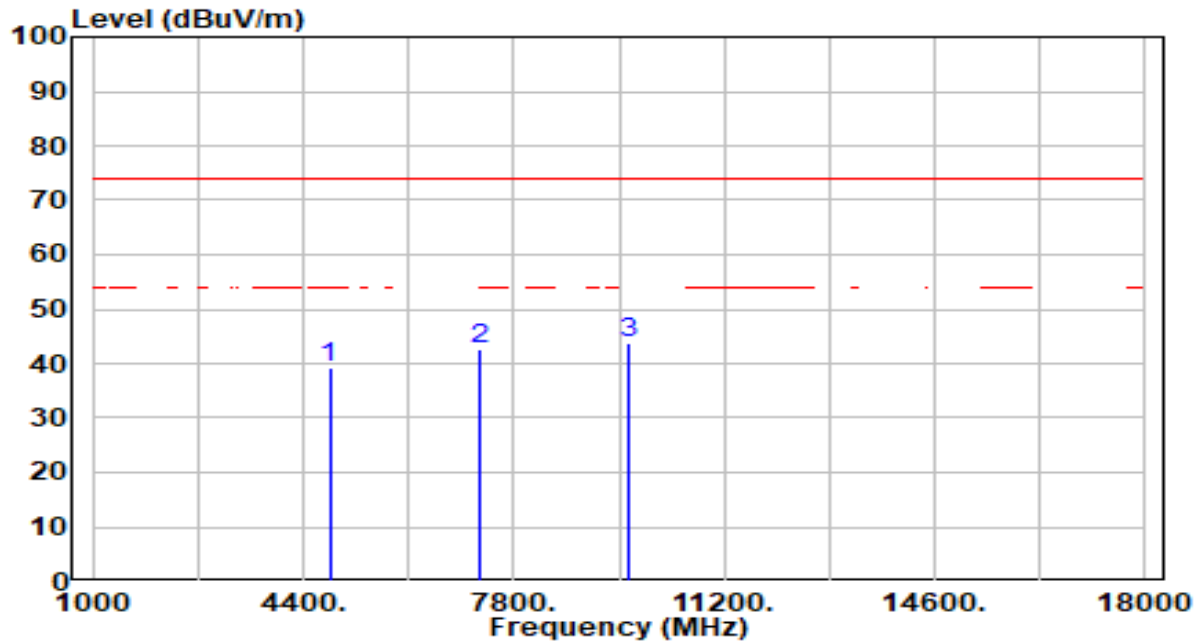


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.23	0.15	39.38	-34.62	74.00	100	0	Peak
2	7236.000	36.85	5.81	42.66	-31.34	74.00	100	292	Peak
3	* 9648.000	38.73	5.16	43.89	-30.11	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

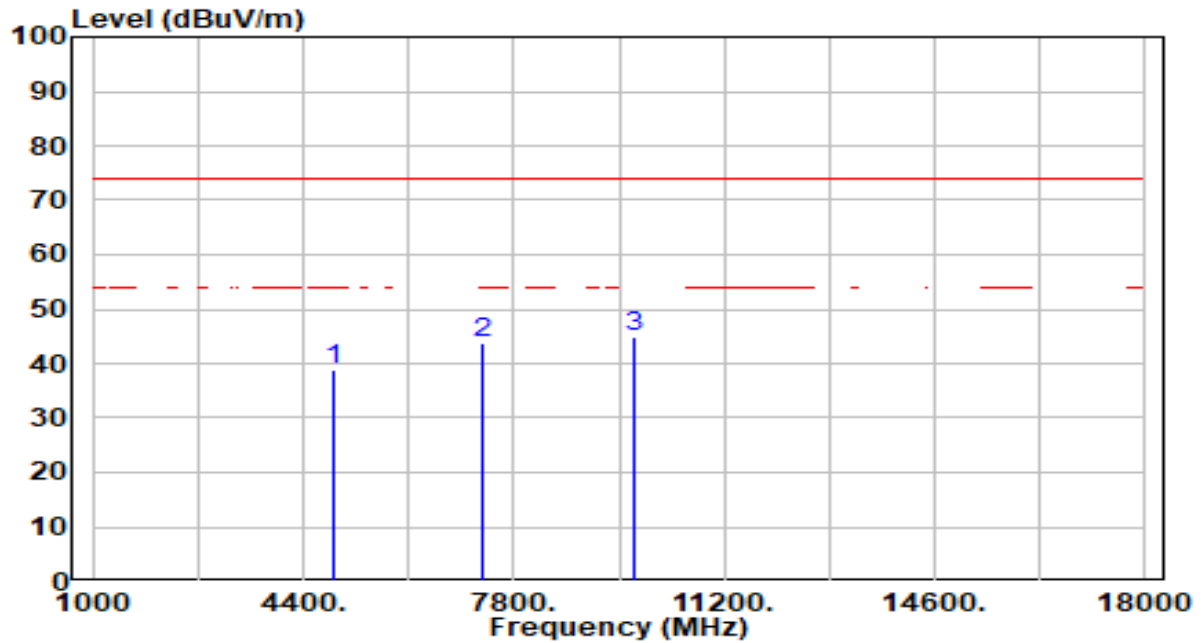


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.75	0.25	39.00	-35.00	74.00	100	20	Peak
2	7311.000	37.92	5.82	43.73	-30.27	74.00	100	350	Peak
3	* 9748.000	39.54	5.19	44.73	-29.27	74.00	100	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

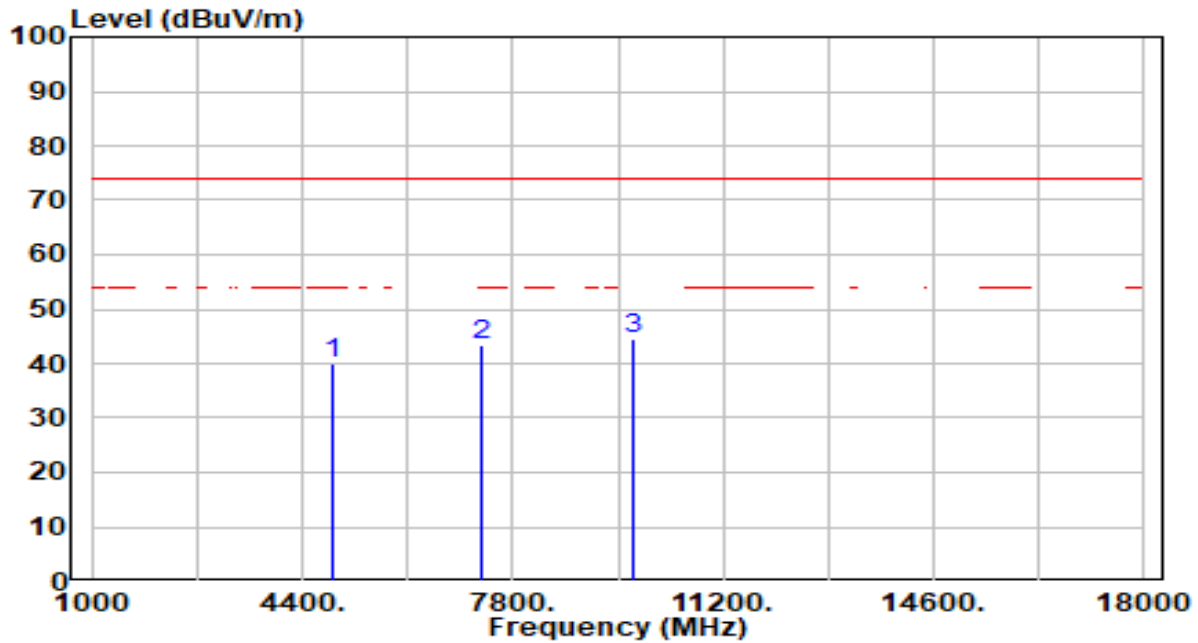


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.81	0.25	40.06	-33.94	74.00	100	360	Peak
2	7311.000	37.52	5.82	43.34	-30.66	74.00	100	75	Peak
3	* 9748.000	39.18	5.19	44.37	-29.63	74.00	100	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

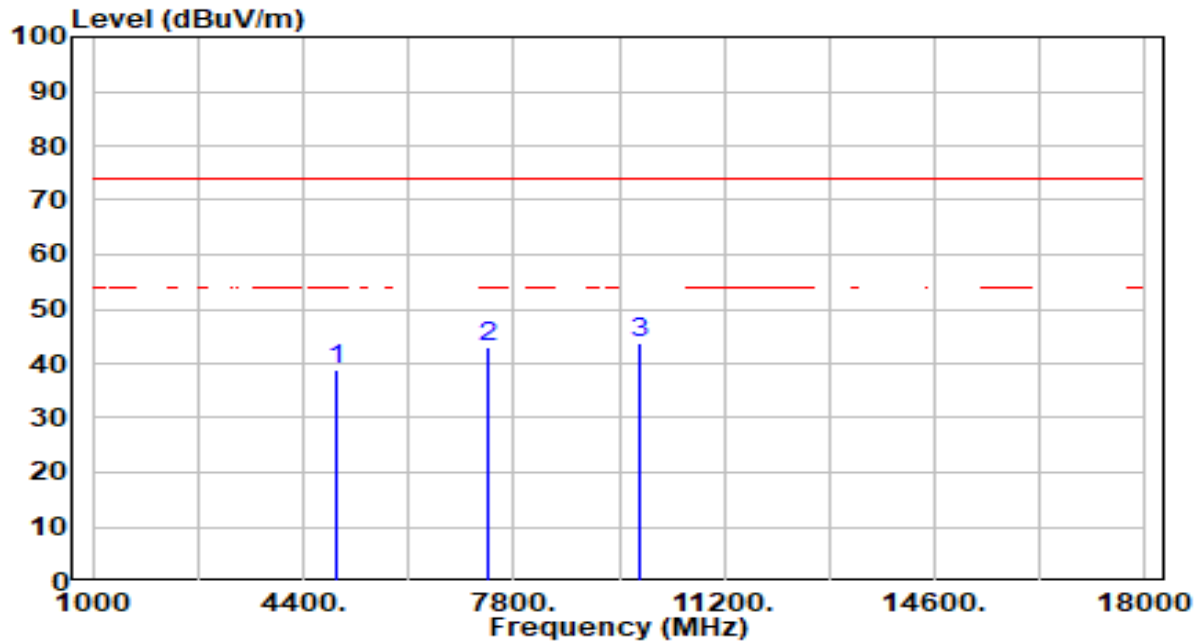


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.67	0.35	39.02	-34.98	74.00	100	208	Peak
2	7386.000	37.26	5.82	43.08	-30.92	74.00	100	82	Peak
3	* 9848.000	38.43	5.22	43.66	-30.34	74.00	100	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

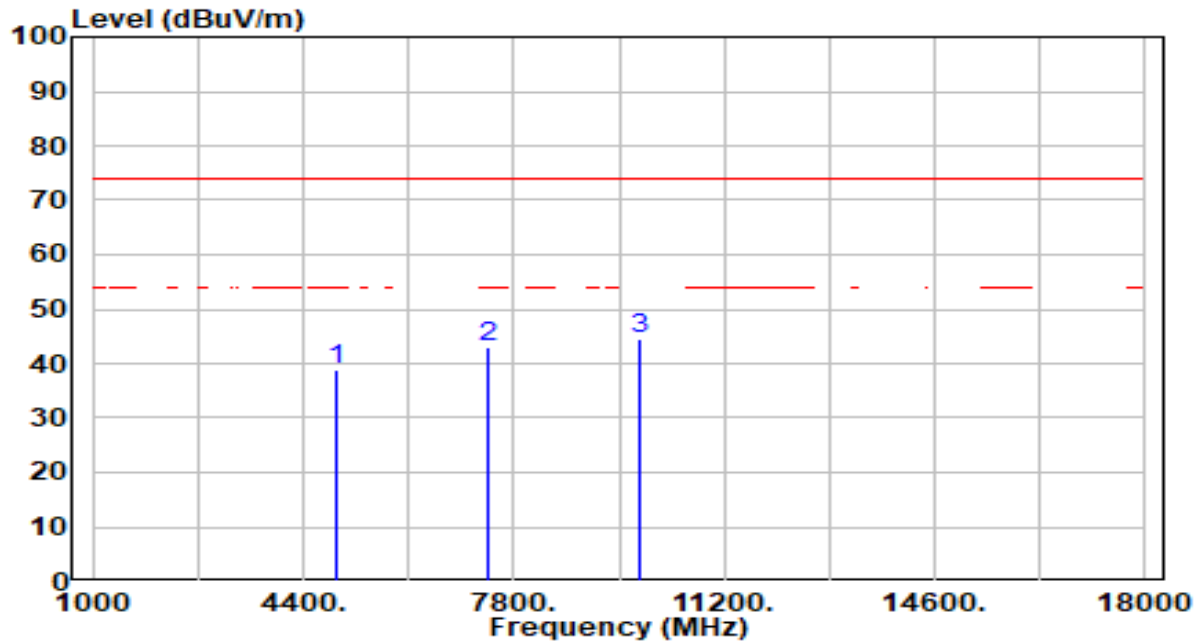


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.46	0.35	38.82	-35.18	74.00	100	166	Peak
2	7386.000	37.16	5.82	42.99	-31.01	74.00	100	184	Peak
3	* 9848.000	39.29	5.22	44.52	-29.48	74.00	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

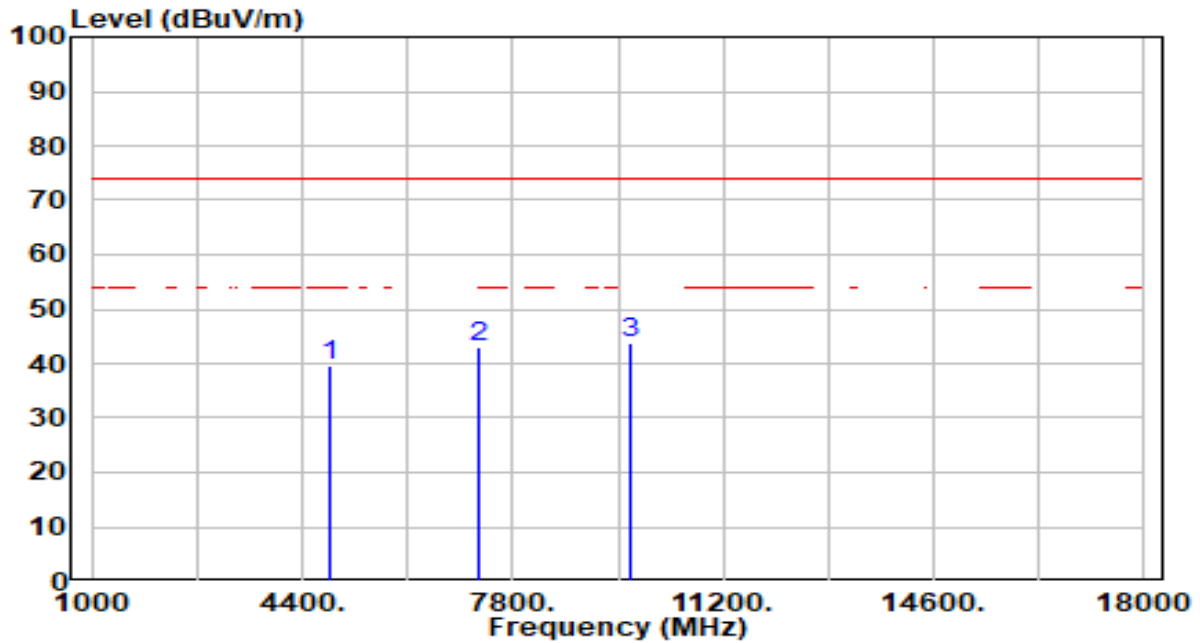


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.60	0.19	39.79	-34.21	74.00	100	303	Peak
2	7266.000	37.03	5.81	42.85	-31.15	74.00	100	213	Peak
3	* 9688.000	38.51	5.18	43.69	-30.31	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

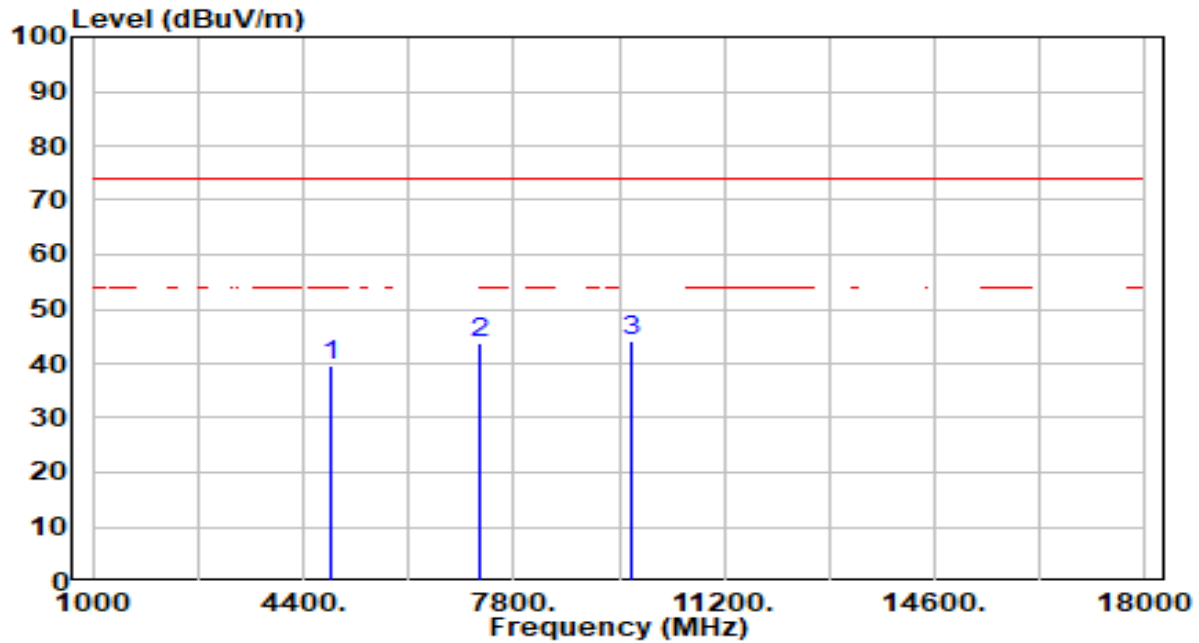


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.59	0.19	39.78	-34.22	74.00	100	159	Peak
2	7266.000	37.91	5.81	43.72	-30.28	74.00	100	17	Peak
3	* 9688.000	38.92	5.18	44.10	-29.90	74.00	100	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

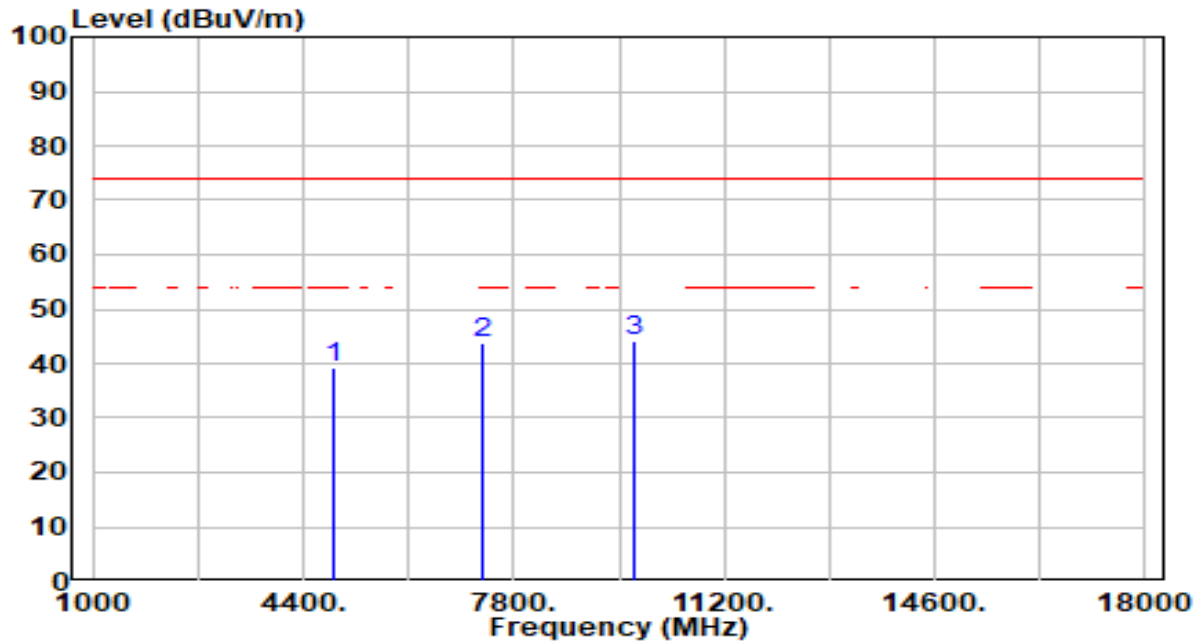


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.82	0.25	39.07	-34.93	74.00	100	360	Peak
2	7311.000	38.08	5.82	43.90	-30.10	74.00	100	43	Peak
3	* 9748.000	39.09	5.19	44.28	-29.72	74.00	100	21	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

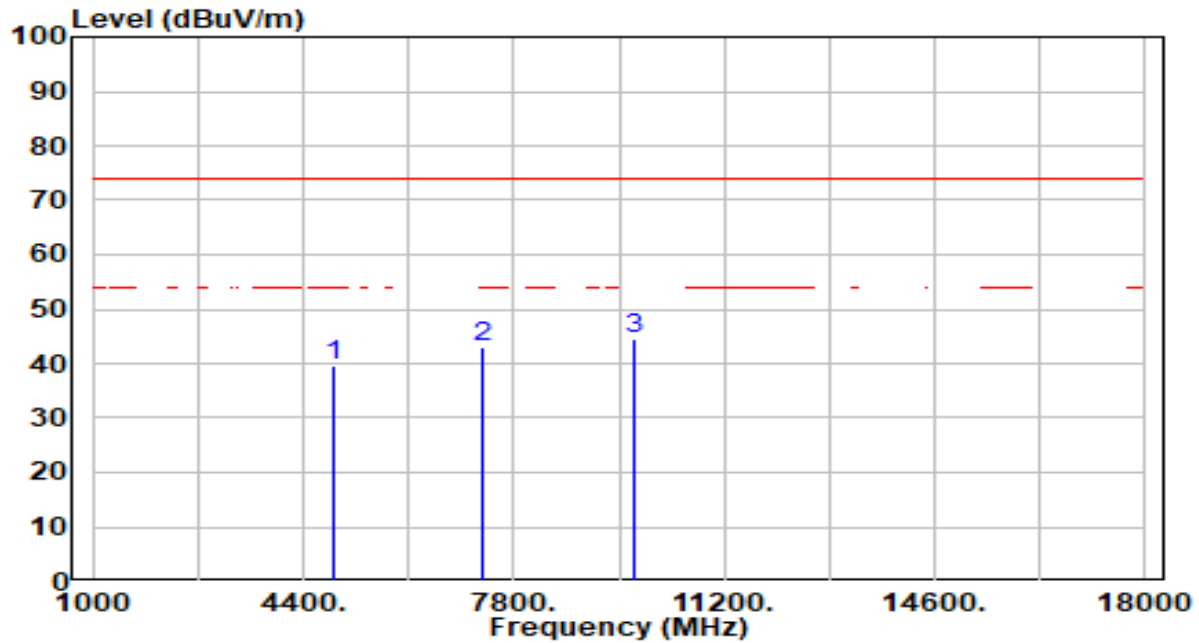


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.52	0.25	39.77	-34.23	74.00	100	114	Peak
2	7311.000	37.18	5.82	43.00	-31.00	74.00	100	41	Peak
3	* 9748.000	39.20	5.19	44.39	-29.61	74.00	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

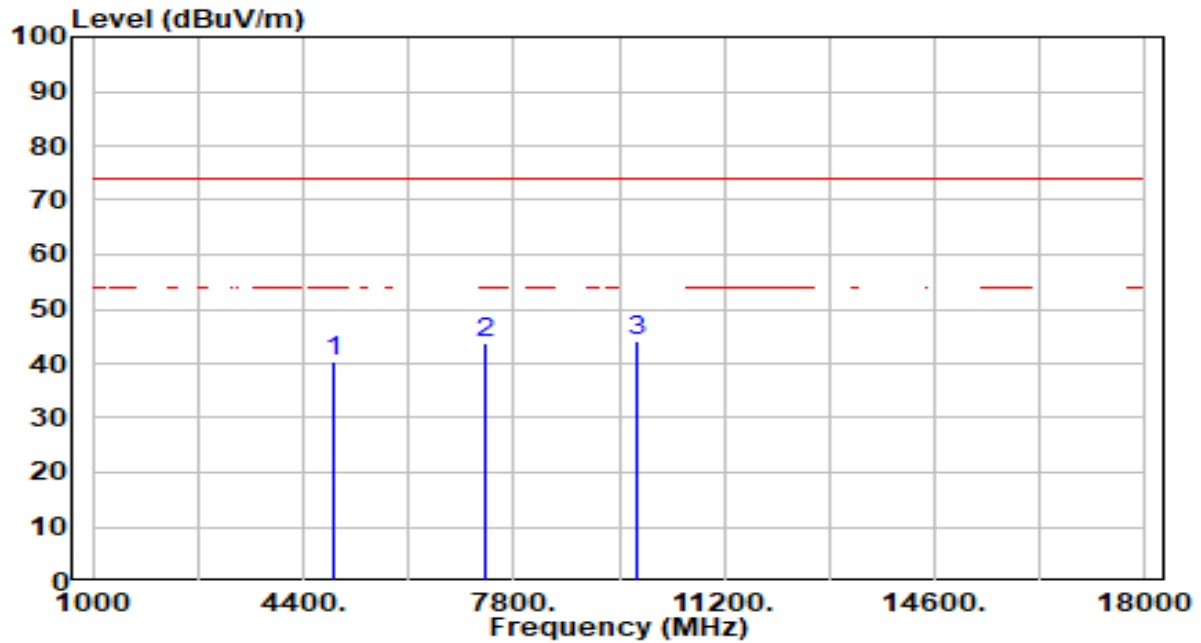


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.14	0.31	40.46	-33.54	74.00	100	260	Peak
2	7356.000	37.91	5.82	43.73	-30.27	74.00	100	46	Peak
3	* 9808.000	38.96	5.21	44.17	-29.83	74.00	100	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

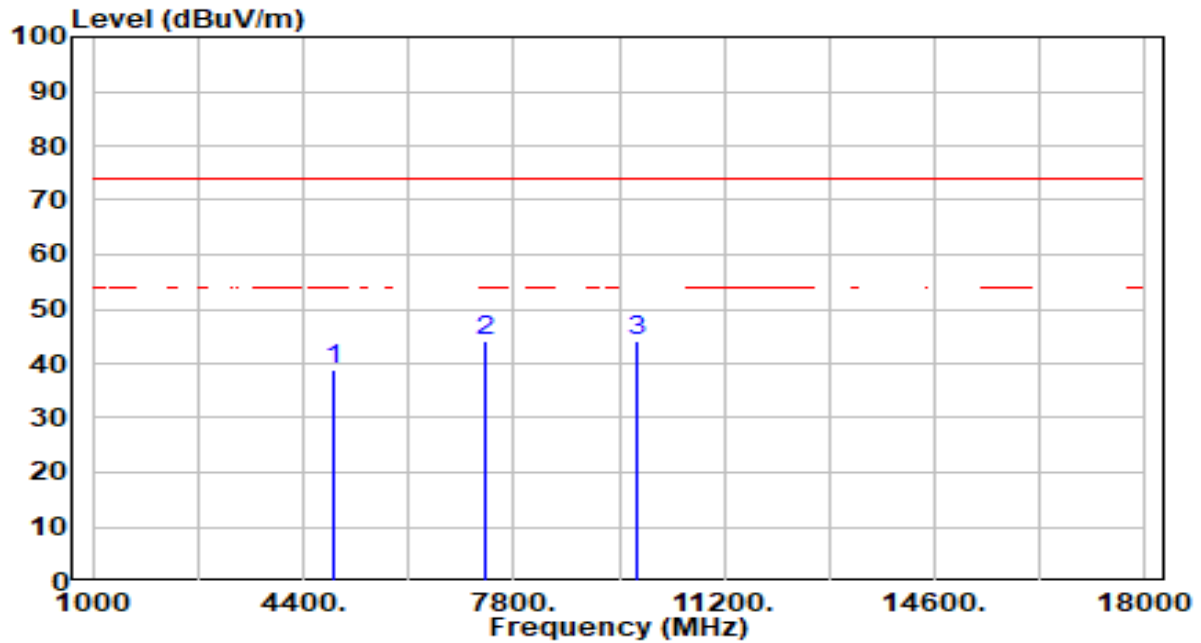


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	38.65	0.31	38.96	-35.04	74.00	100	307	Peak
2	7356.000	38.18	5.82	44.00	-30.00	74.00	100	260	Peak
3	* 9808.000	38.89	5.21	44.10	-29.90	74.00	100	97	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

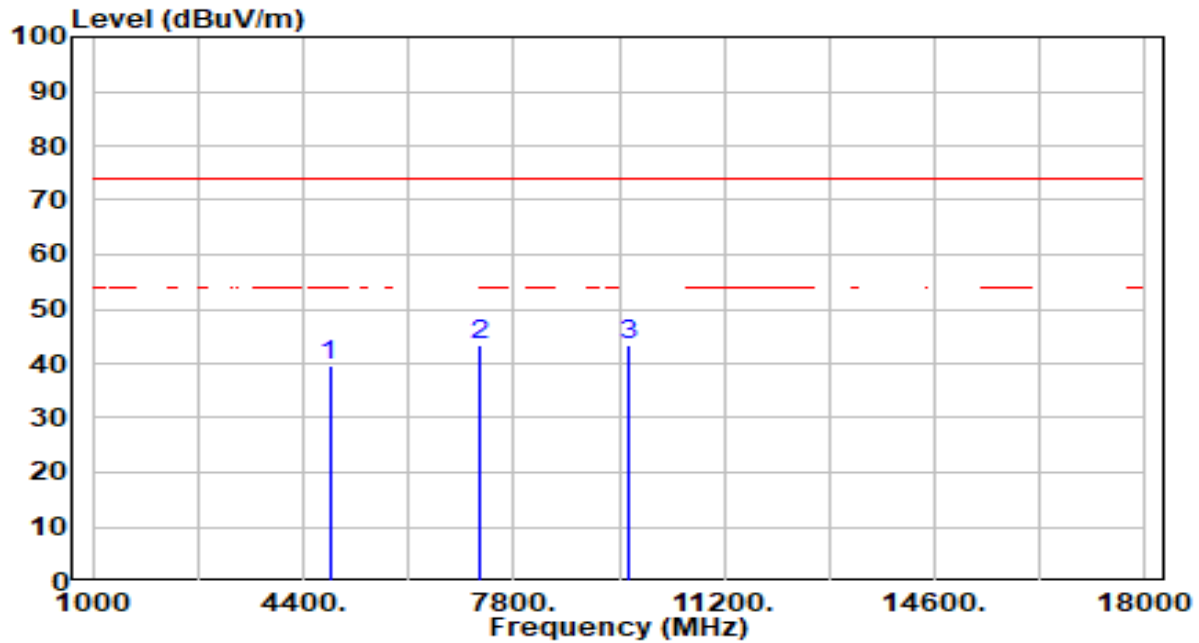


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	39.51	0.15	39.66	-34.34	74.00	100	65	Peak
2	*	7236.000	37.69	5.81	43.50	-30.50	74.00	100	148	Peak
3		9648.000	38.21	5.16	43.37	-30.63	74.00	100	267	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

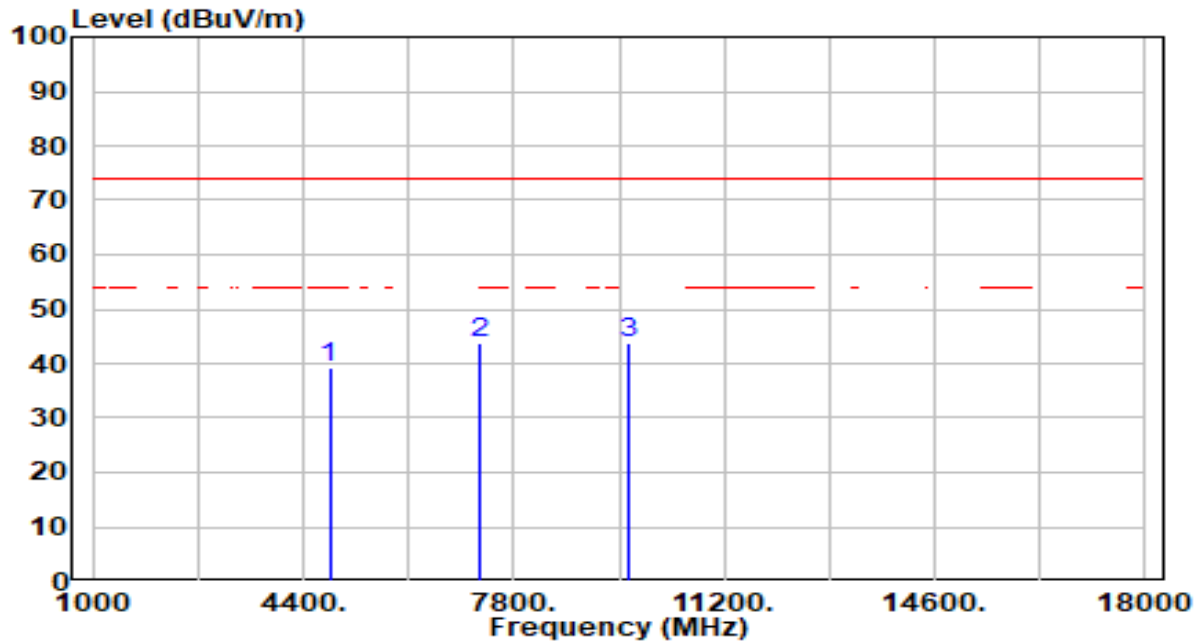


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	39.12	0.15	39.27	-34.73	74.00	100	360	Peak
2	*	7236.000	37.92	5.81	43.73	-30.27	74.00	100	129	Peak
3		9648.000	38.54	5.16	43.70	-30.30	74.00	100	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

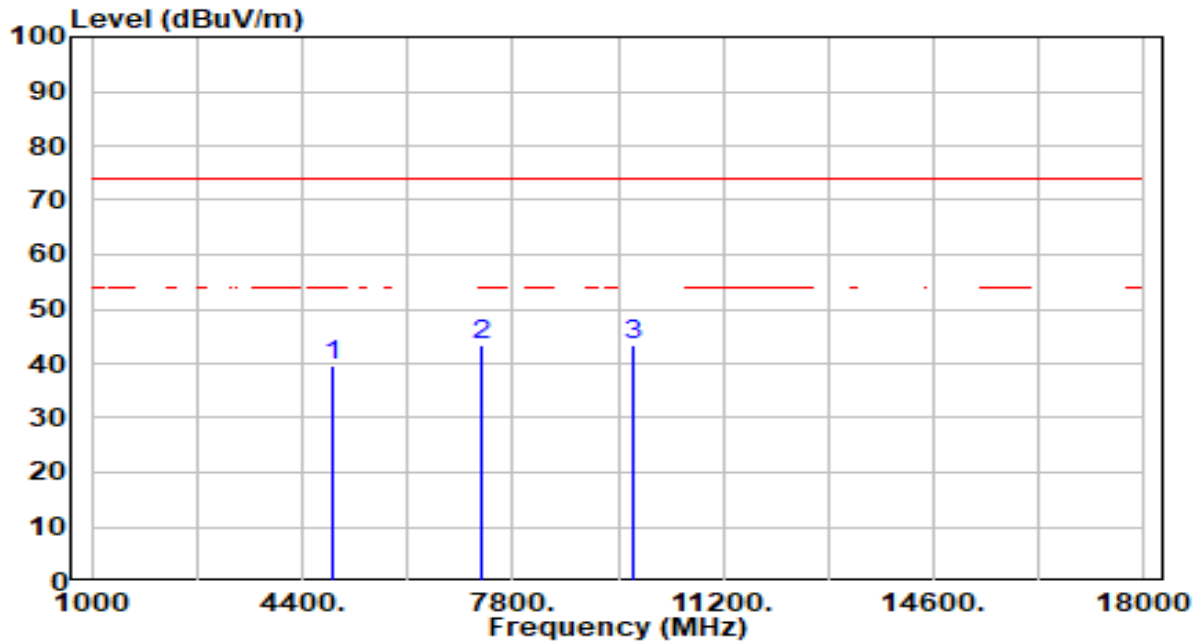


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	39.47	0.25	39.72	-34.28	74.00	100	0	Peak
2	*	7311.000	37.47	5.82	43.29	-30.71	74.00	100	0	Peak
3		9748.000	38.07	5.19	43.26	-30.74	74.00	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

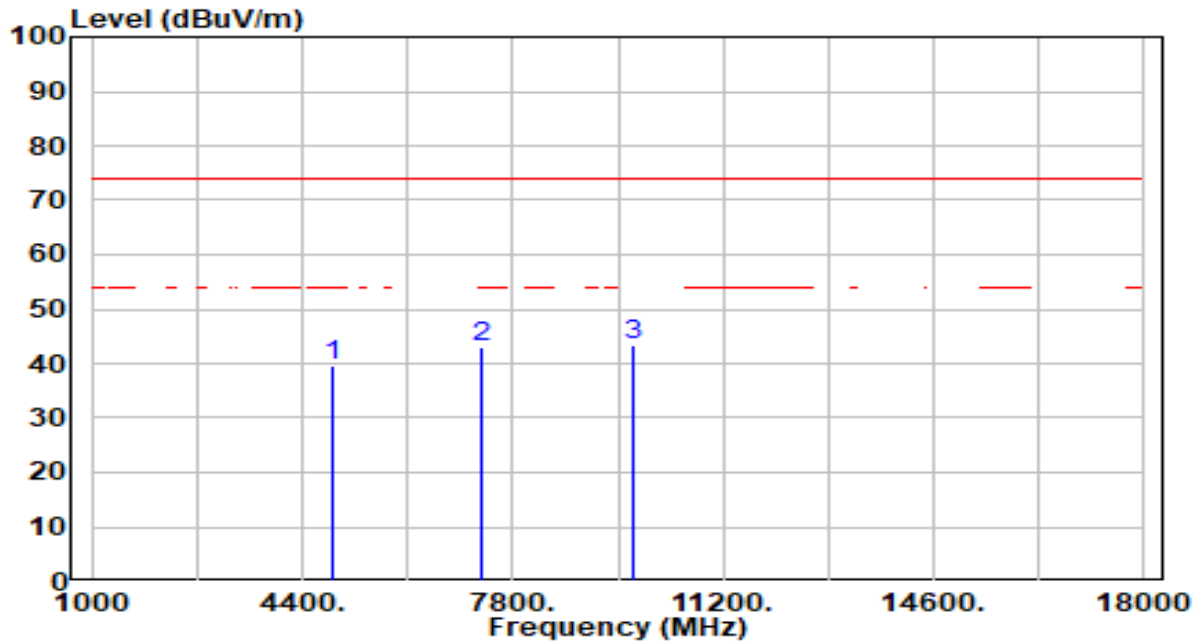


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.41	0.25	39.66	-34.34	74.00	100	224	Peak
2	7311.000	37.06	5.82	42.87	-31.13	74.00	100	360	Peak
3	* 9748.000	38.13	5.19	43.33	-30.67	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

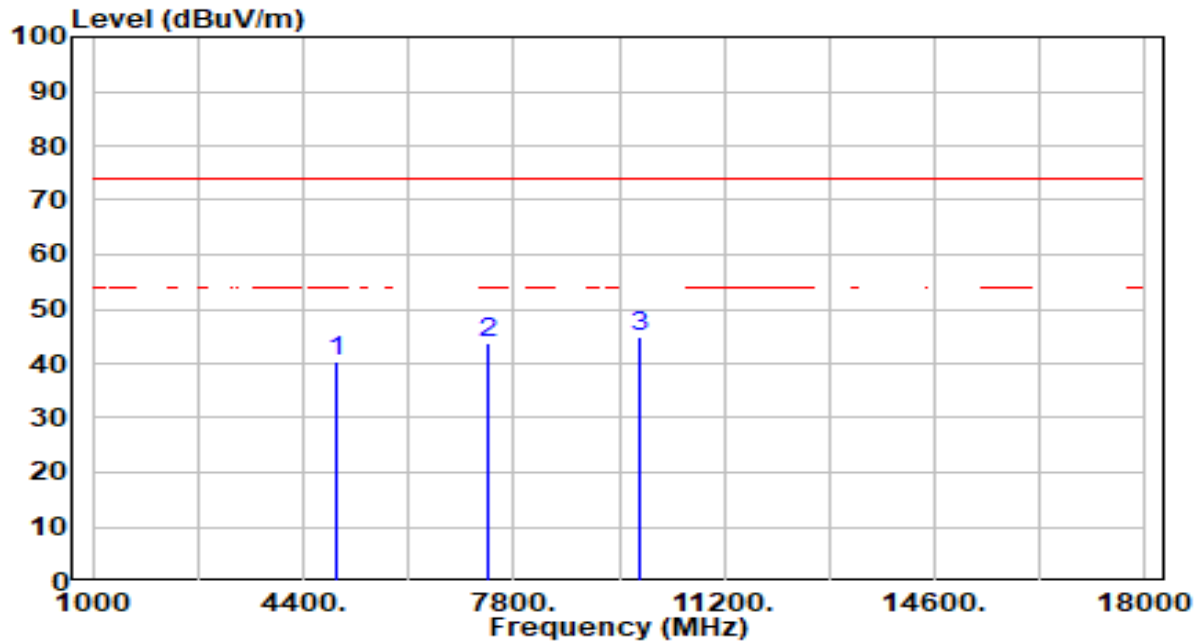


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.93	0.35	40.29	-33.71	74.00	100	275	Peak
2	7386.000	37.84	5.82	43.67	-30.33	74.00	100	293	Peak
3	* 9848.000	39.66	5.22	44.88	-29.12	74.00	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

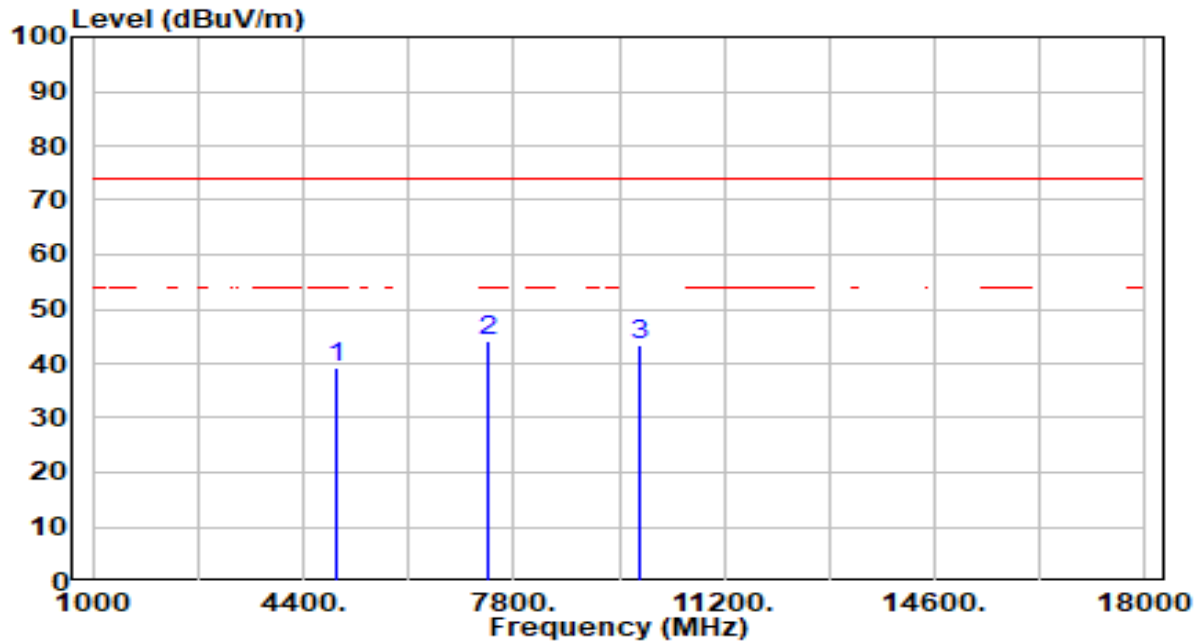


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	39.06	0.35	39.42	-34.58	74.00	100	256	Peak
2	*	7386.000	38.34	5.82	44.16	-29.84	74.00	100	191	Peak
3		9848.000	38.35	5.22	43.58	-30.42	74.00	100	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

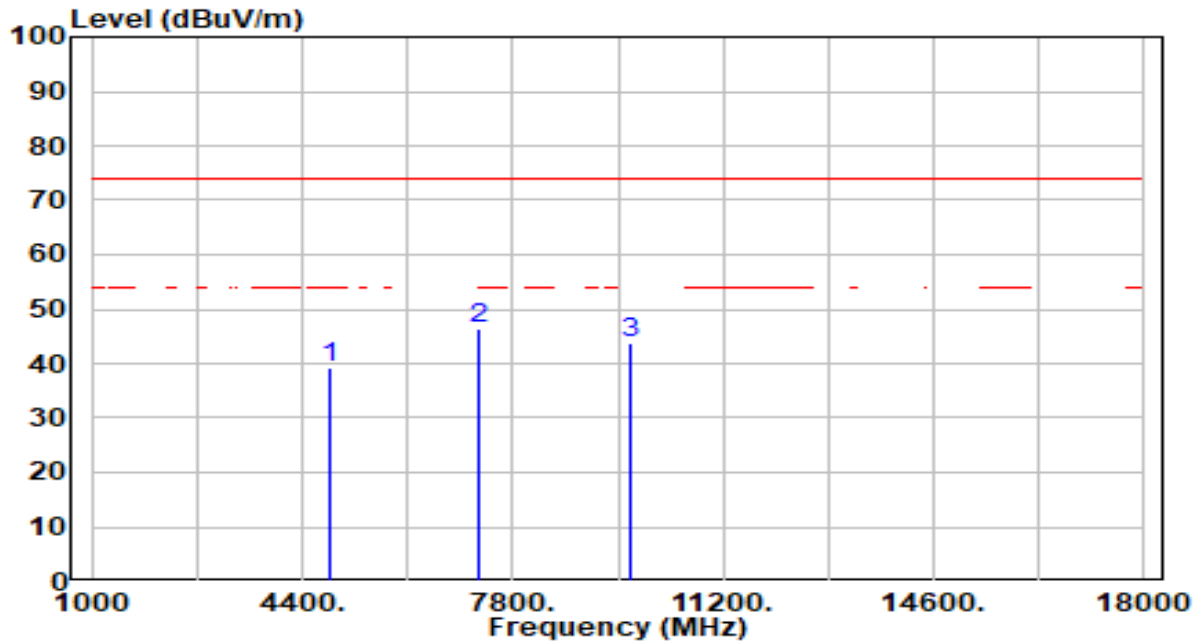


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.13	0.19	39.33	-34.67	74.00	100	17	Peak
2	* 7266.000	40.49	5.81	46.30	-27.70	74.00	100	144	Peak
3	9688.000	38.41	5.18	43.59	-30.41	74.00	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

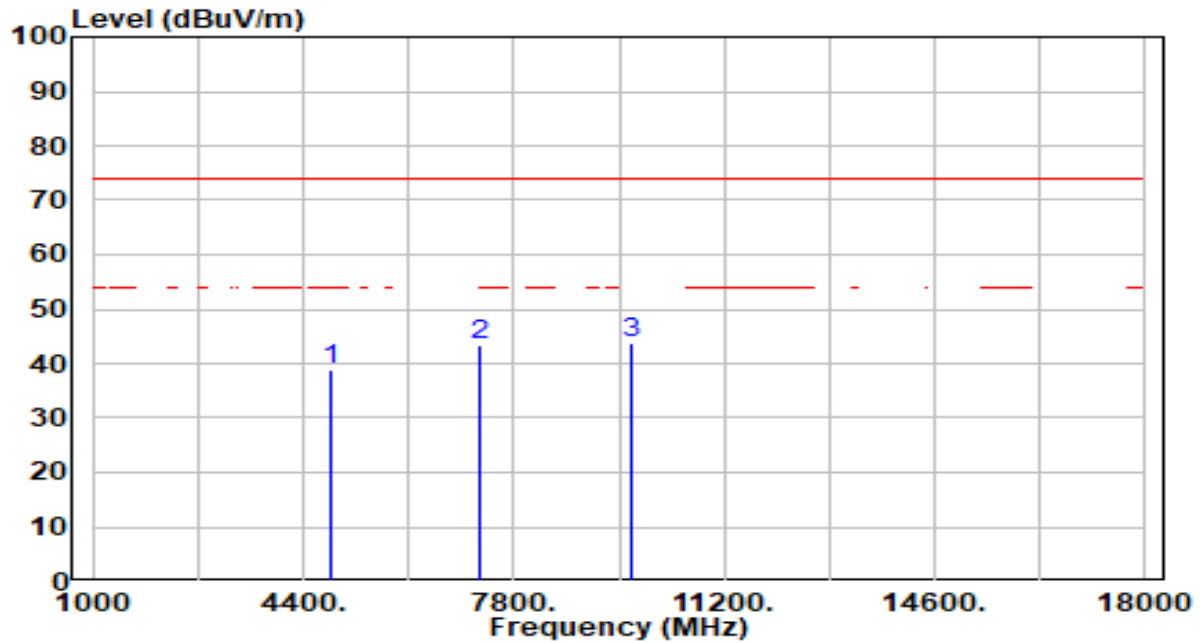


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	38.71	0.19	38.90	-35.10	74.00	100	328	Peak
2	7266.000	37.46	5.81	43.27	-30.73	74.00	100	318	Peak
3	* 9688.000	38.43	5.18	43.61	-30.39	74.00	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

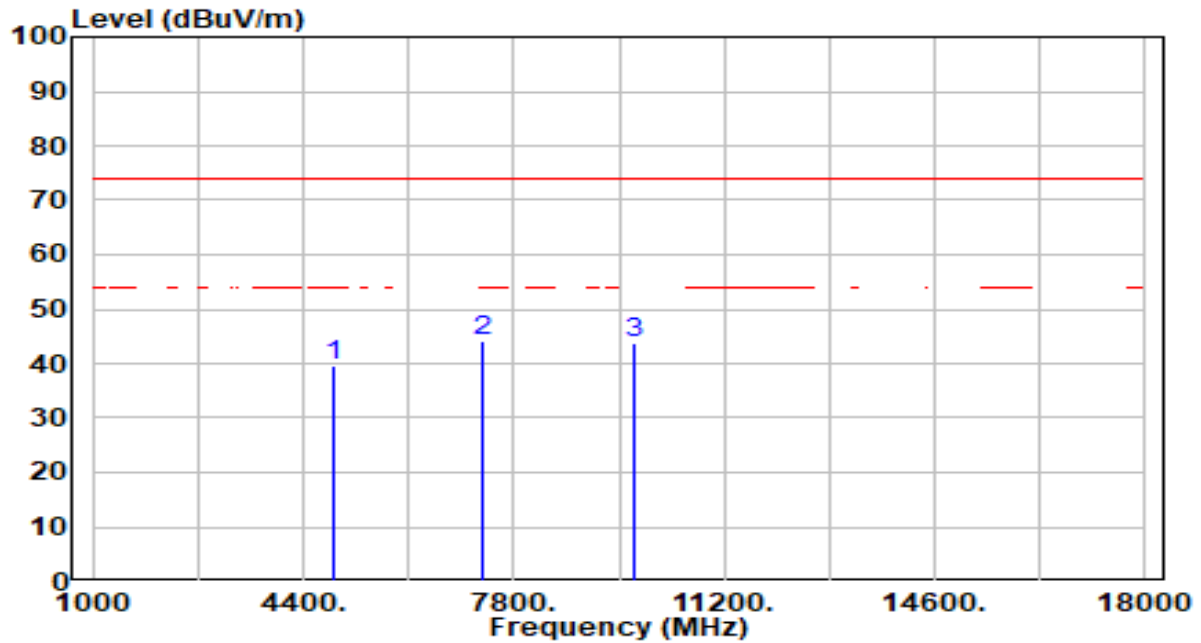


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	39.38	0.25	39.64	-34.36	74.00	100	285	Peak
2	*	7311.000	38.32	5.82	44.14	-29.86	74.00	100	213	Peak
3		9748.000	38.63	5.19	43.82	-30.18	74.00	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

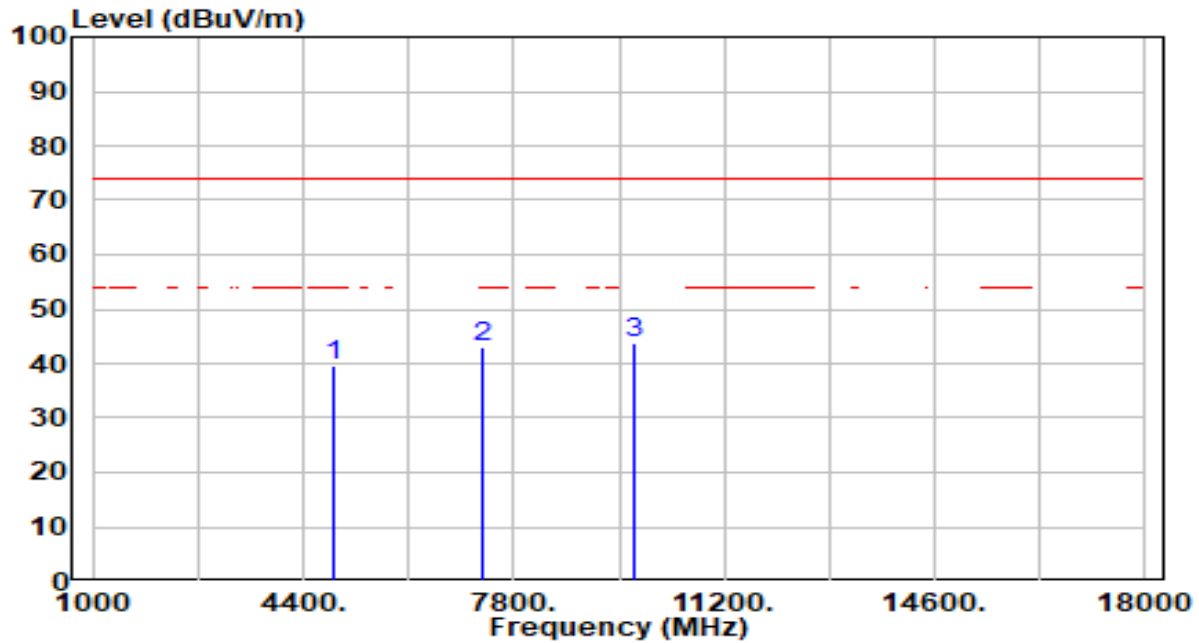


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.24	0.25	39.49	-34.51	74.00	100	265	Peak
2	7311.000	37.20	5.82	43.02	-30.98	74.00	100	181	Peak
3	* 9748.000	38.55	5.19	43.74	-30.26	74.00	100	72	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

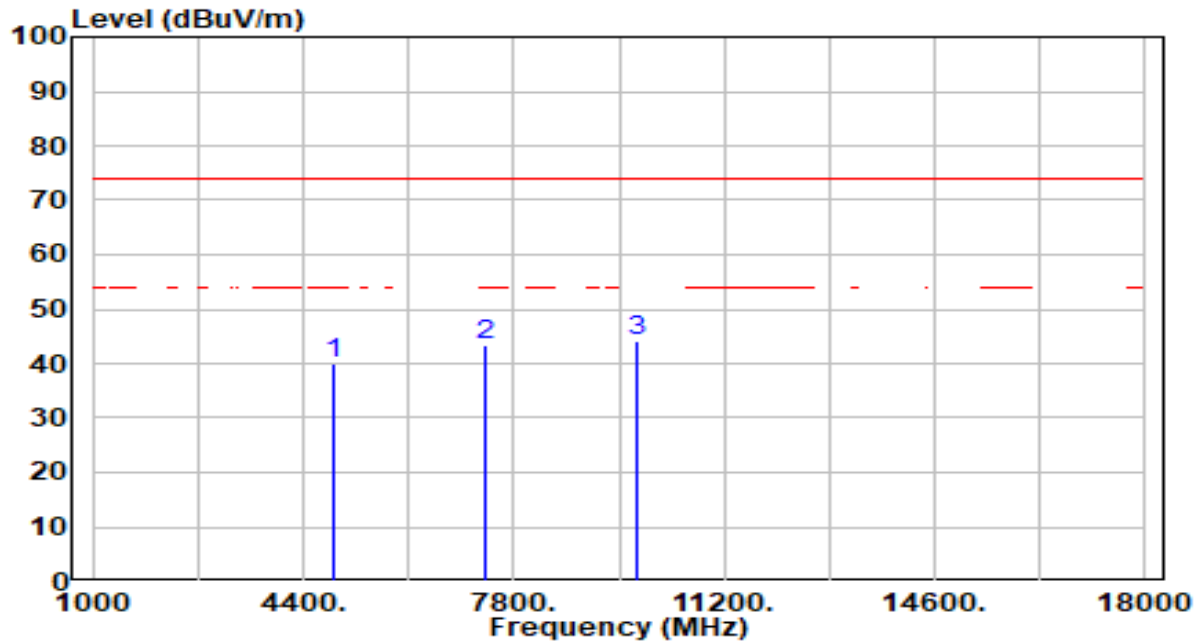


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.58	0.31	39.89	-34.11	74.00	100	165	Peak
2	7356.000	37.74	5.82	43.56	-30.44	74.00	100	234	Peak
3	* 9808.000	38.87	5.21	44.08	-29.92	74.00	100	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

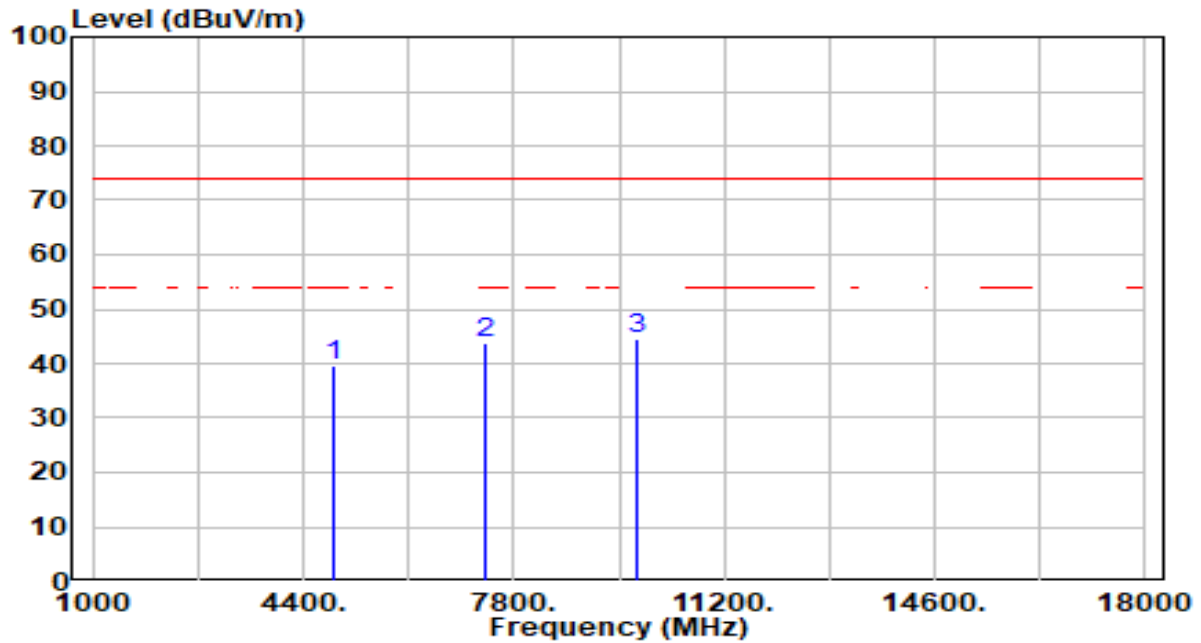


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.37	0.31	39.69	-34.31	74.00	100	293	Peak
2	7356.000	37.79	5.82	43.62	-30.38	74.00	100	285	Peak
3	* 9808.000	39.25	5.21	44.46	-29.54	74.00	100	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

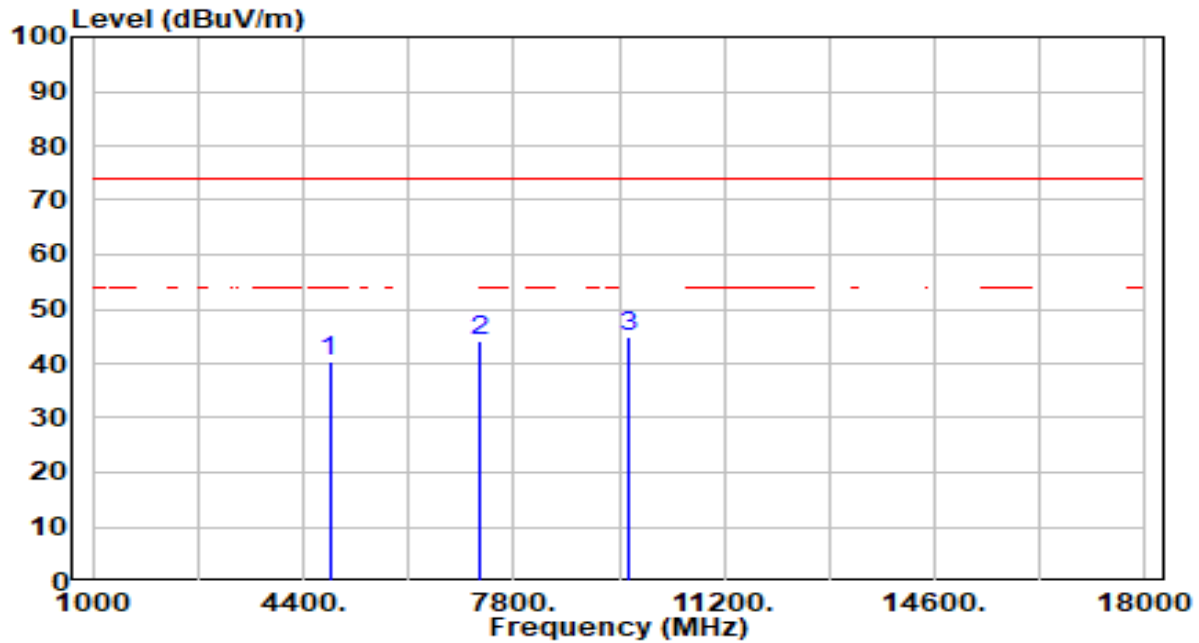


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.04	0.15	40.19	-33.81	74.00	100	31	Peak
2	7236.000	38.29	5.81	44.10	-29.90	74.00	100	3	Peak
3	* 9648.000	39.65	5.16	44.82	-29.18	74.00	100	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

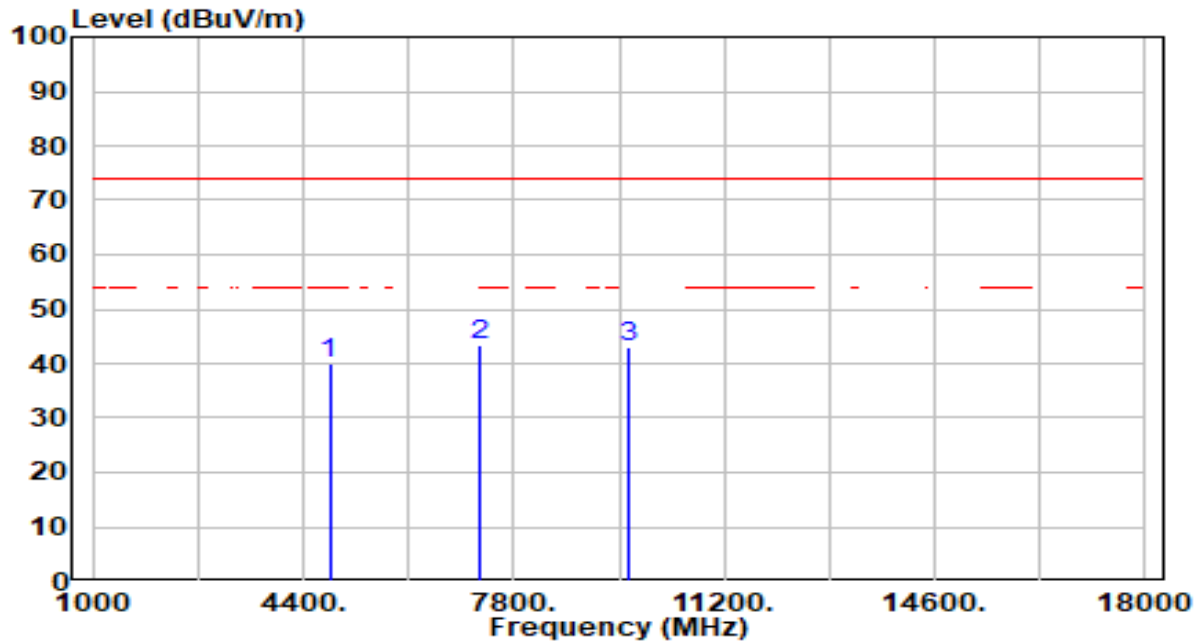


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	39.85	0.15	40.00	-34.00	74.00	100	6	Peak
2	*	7236.000	37.65	5.81	43.46	-30.54	74.00	100	332	Peak
3		9648.000	38.02	5.16	43.19	-30.81	74.00	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

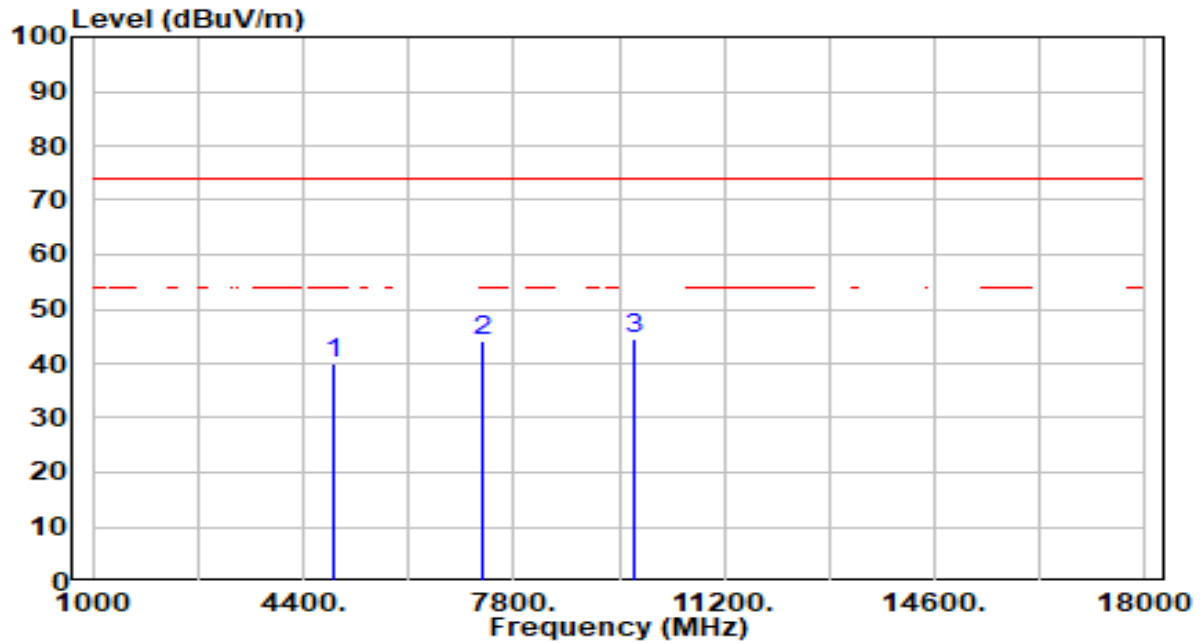


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.61	0.25	39.87	-34.13	74.00	100	60	Peak
2	7311.000	38.51	5.82	44.33	-29.67	74.00	100	97	Peak
3	* 9748.000	39.19	5.19	44.38	-29.62	74.00	100	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

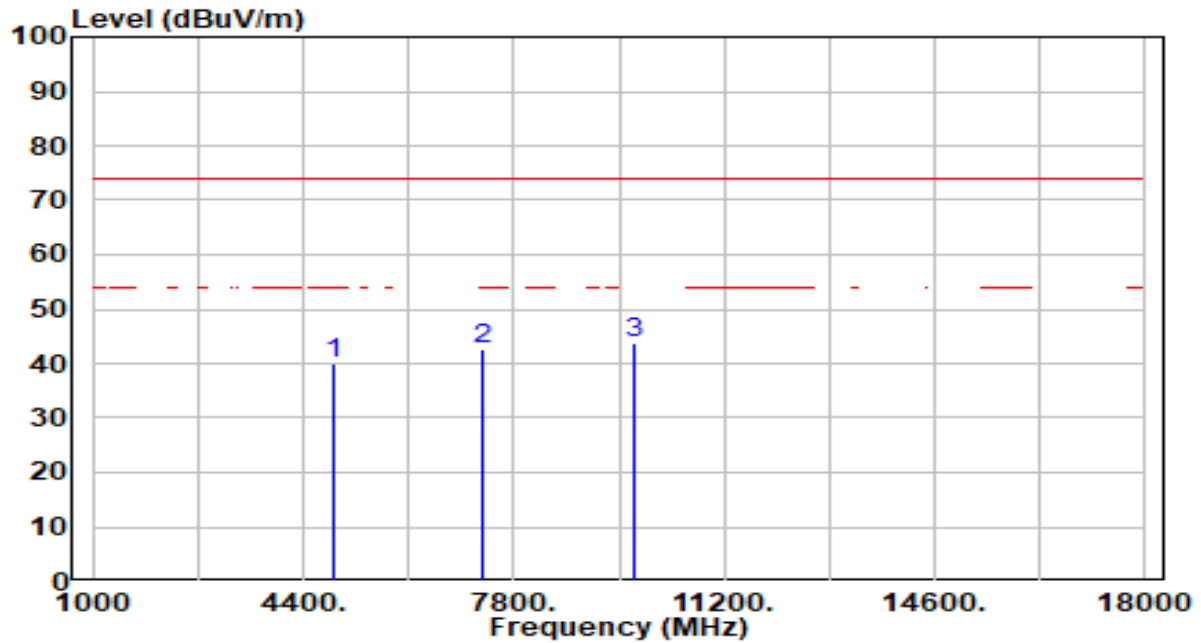


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.57	0.25	39.82	-34.18	74.00	100	67	Peak
2	7311.000	36.91	5.82	42.73	-31.27	74.00	100	244	Peak
3	* 9748.000	38.40	5.19	43.60	-30.40	74.00	100	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

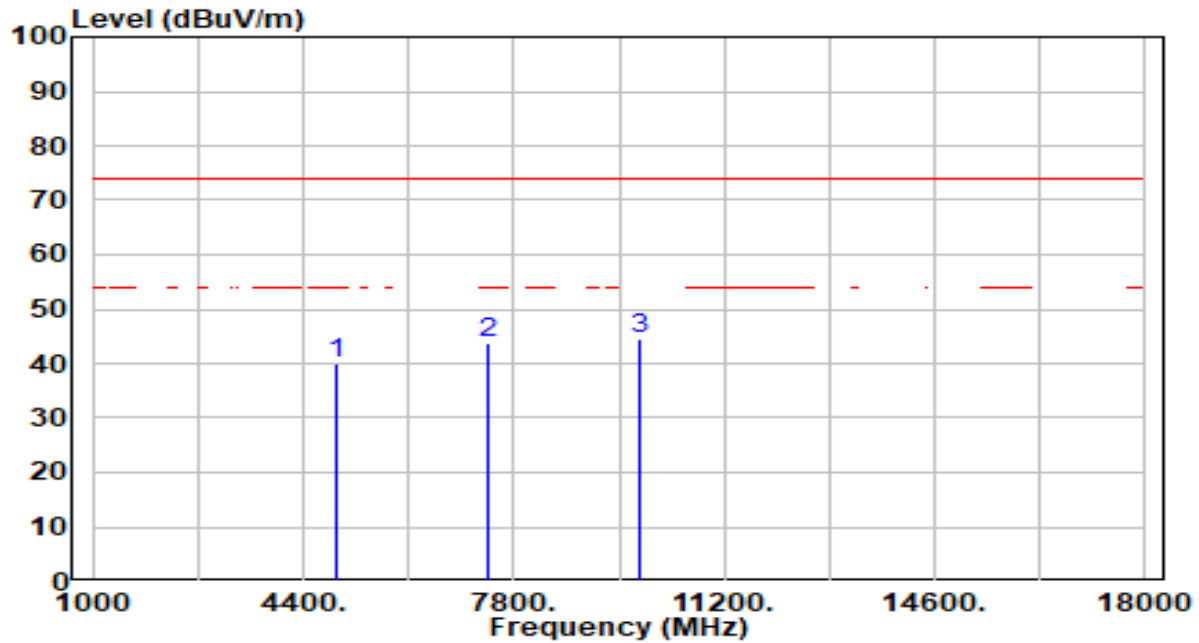


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.53	0.35	39.88	-34.12	74.00	100	42	Peak
2	7386.000	38.10	5.82	43.92	-30.08	74.00	100	201	Peak
3	* 9848.000	39.47	5.22	44.69	-29.31	74.00	100	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

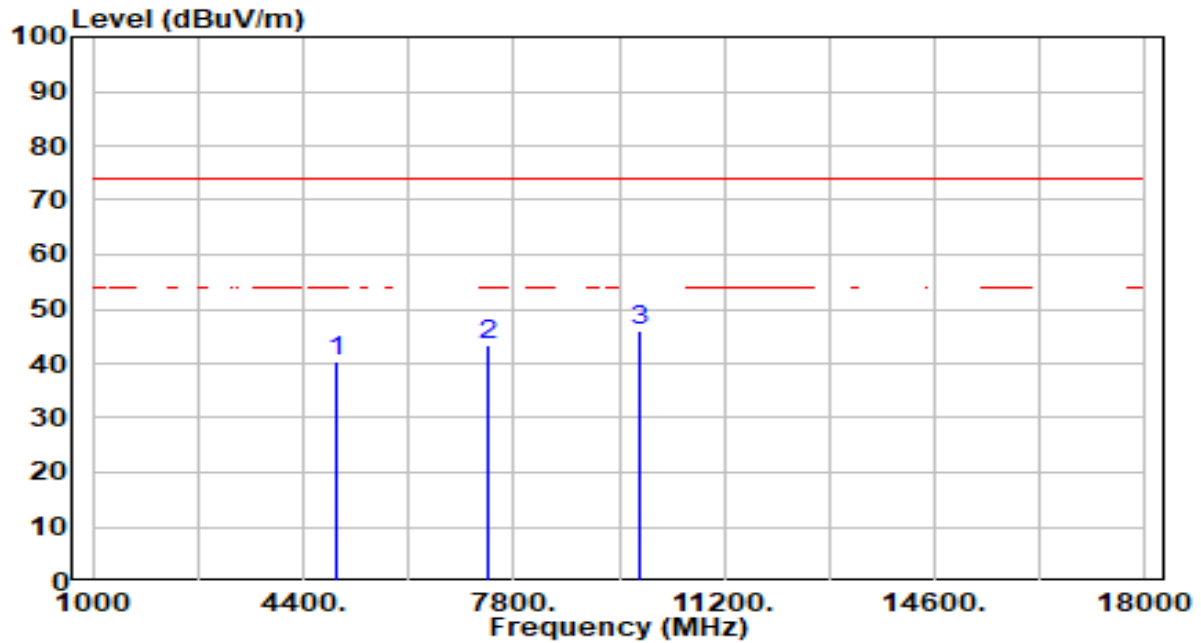


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.07	0.35	40.42	-33.58	74.00	100	213	Peak
2	7386.000	37.70	5.82	43.52	-30.48	74.00	100	169	Peak
3	* 9848.000	40.80	5.22	46.02	-27.98	74.00	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

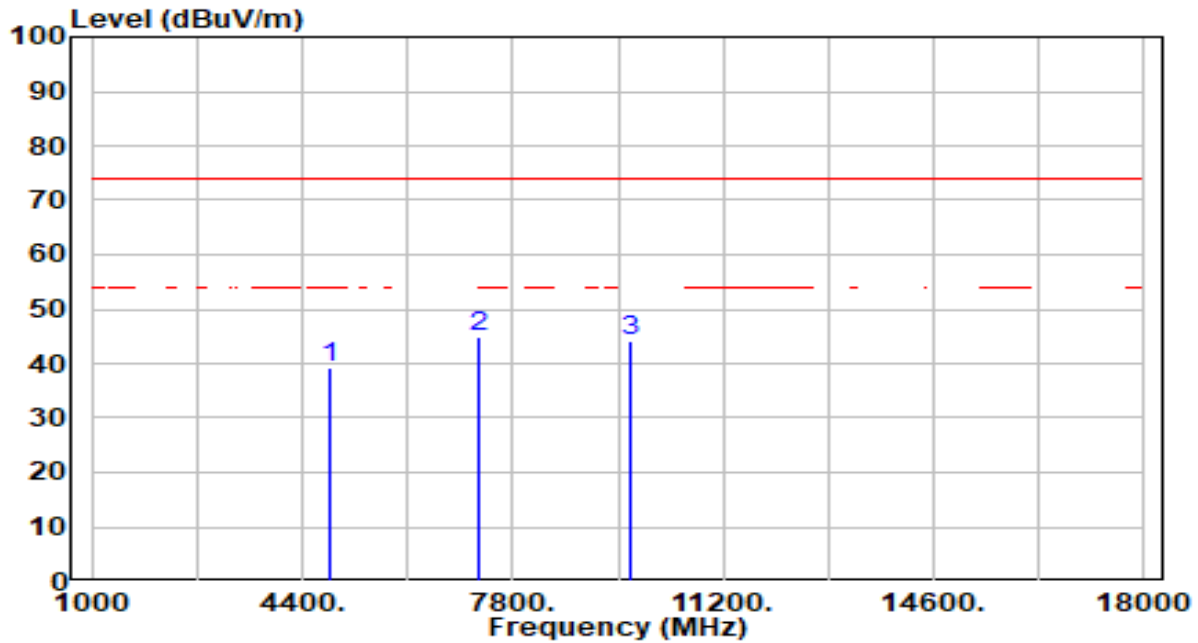


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4844.000	39.04	0.19	39.23	-34.77	74.00	100	0	Peak
2	*	7266.000	38.92	5.81	44.73	-29.27	74.00	100	46	Peak
3		9688.000	39.05	5.18	44.22	-29.78	74.00	100	241	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

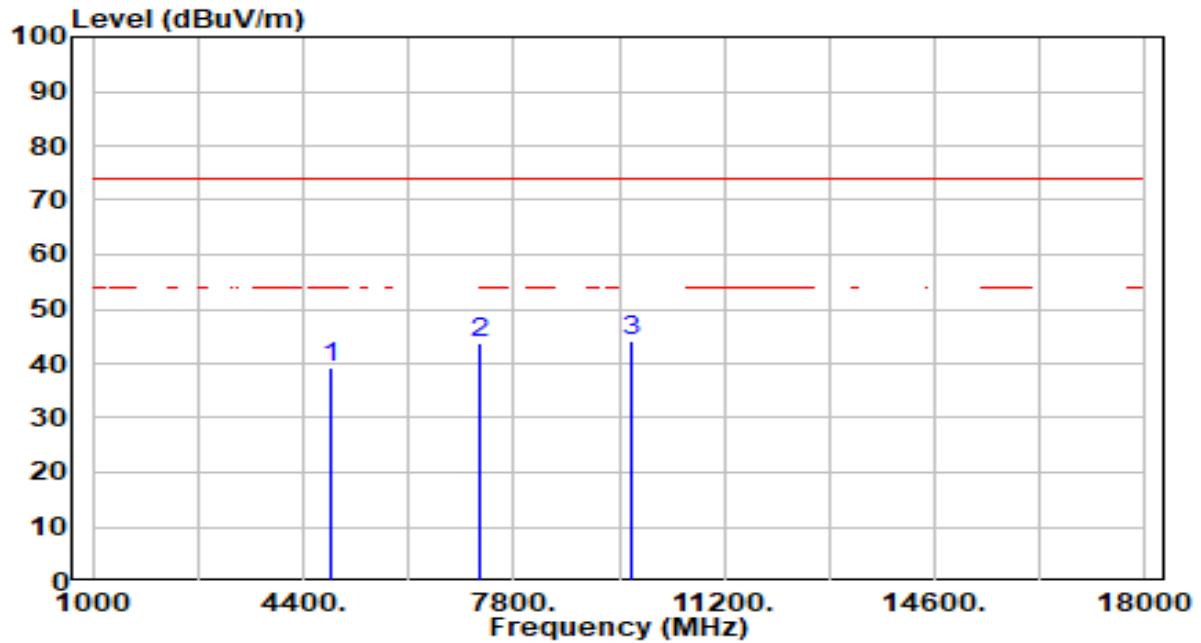


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.10	0.19	39.29	-34.71	74.00	100	296	Peak
2	7266.000	38.13	5.81	43.95	-30.05	74.00	100	0	Peak
3	* 9688.000	38.95	5.18	44.13	-29.87	74.00	100	264	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

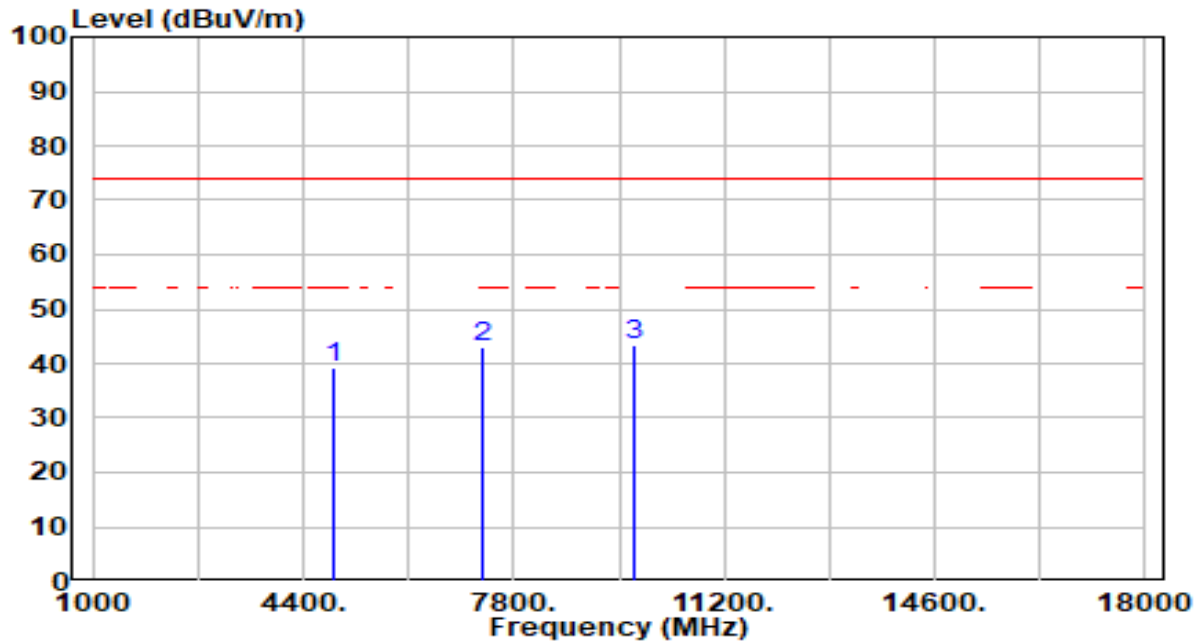


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.91	0.25	39.17	-34.83	74.00	100	53	Peak
2	7311.000	37.29	5.82	43.11	-30.89	74.00	100	169	Peak
3	* 9748.000	38.09	5.19	43.28	-30.72	74.00	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

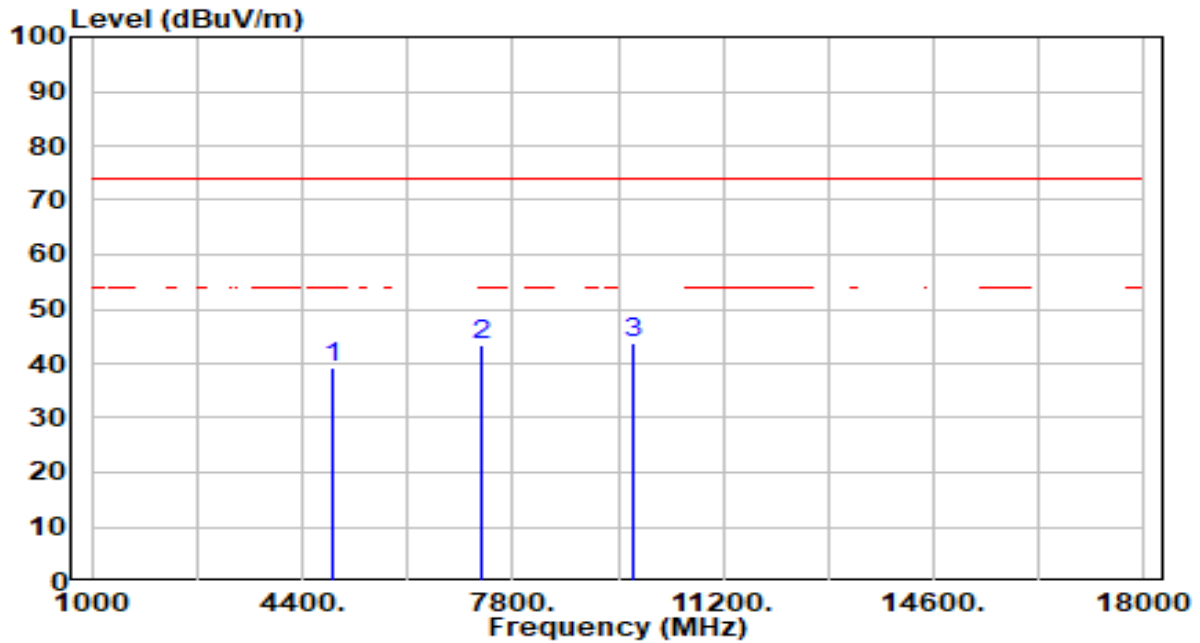


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.06	0.25	39.31	-34.69	74.00	100	300	Peak
2	7311.000	37.71	5.82	43.53	-30.47	74.00	100	115	Peak
3	* 9748.000	38.63	5.19	43.83	-30.17	74.00	100	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

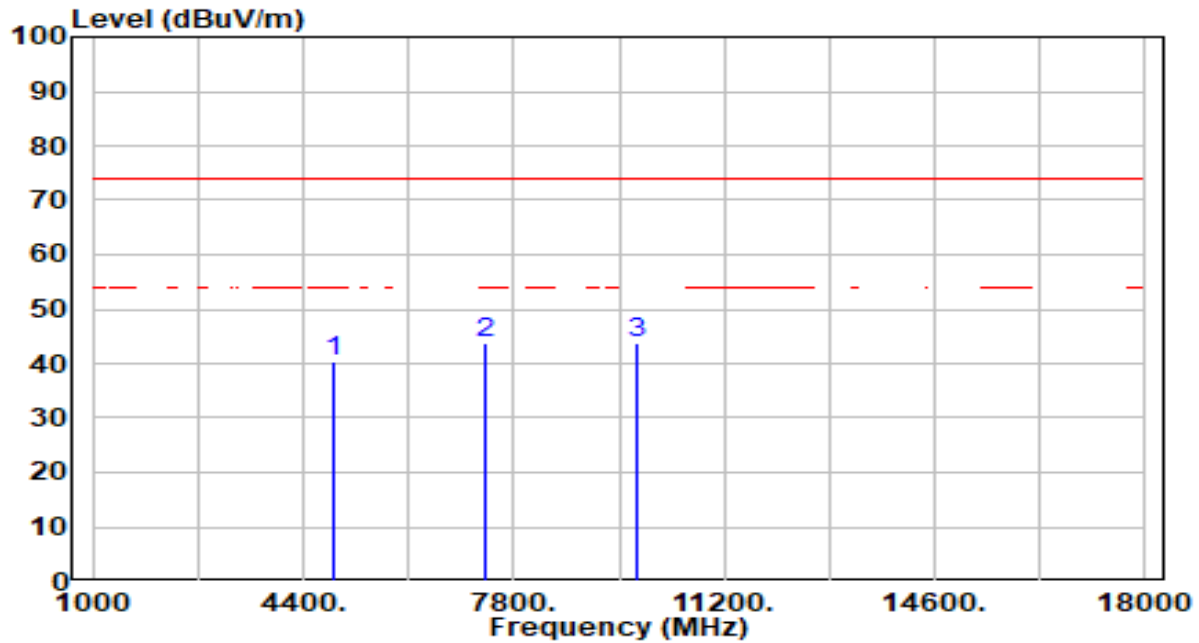


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	40.00	0.31	40.32	-33.68	74.00	100	350	Peak
2	*	7356.000	38.12	5.82	43.94	-30.06	74.00	100	329	Peak
3		9808.000	38.60	5.21	43.81	-30.19	74.00	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

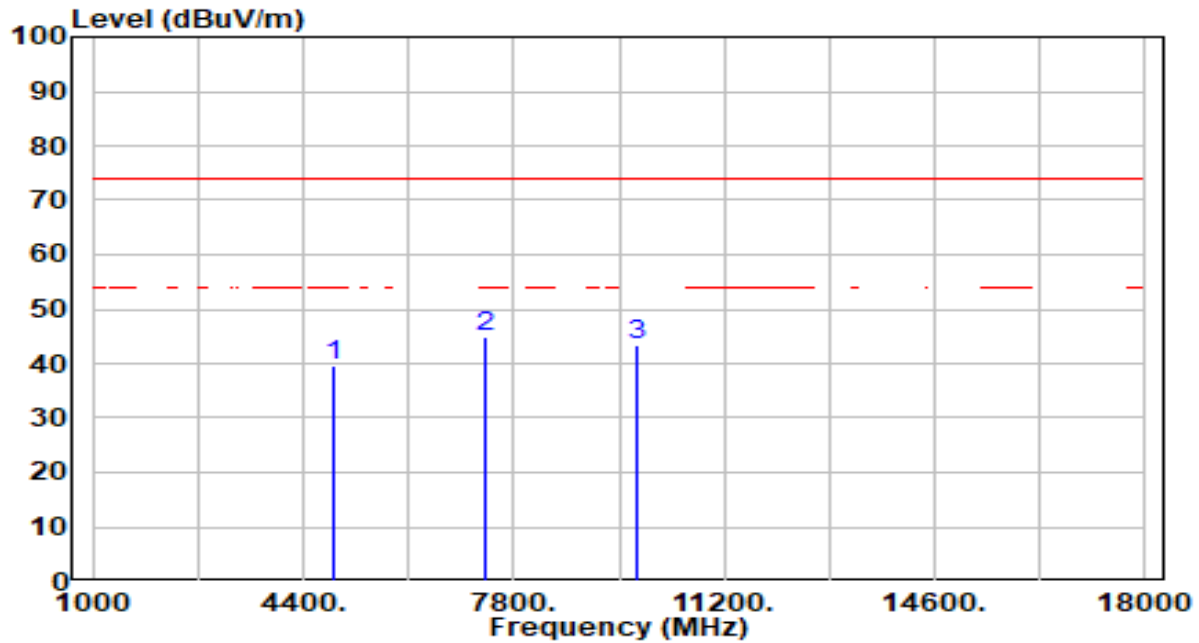


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	39.17	0.31	39.48	-34.52	74.00	100	1	Peak
2	*	7356.000	39.00	5.82	44.82	-29.18	74.00	100	180	Peak
3		9808.000	38.12	5.21	43.34	-30.66	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-29
Factor	BBHA 9170	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	By PoE

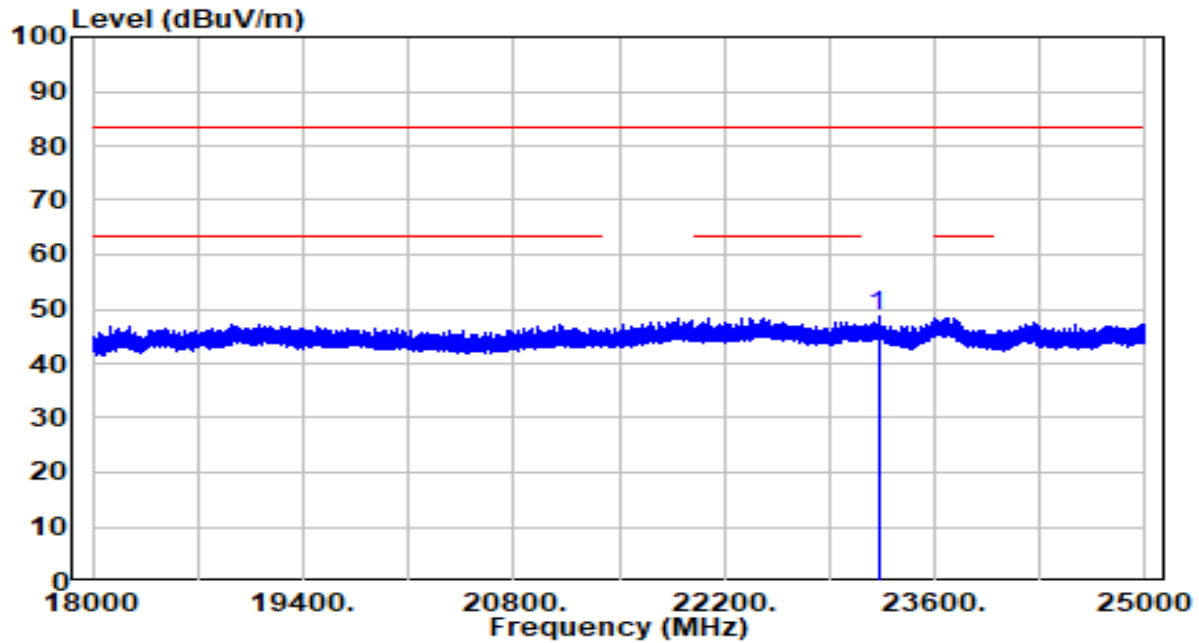


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23224.190	36.29	12.47	48.76	-34.74	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-29
Factor	BBHA 9170	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	By PoE

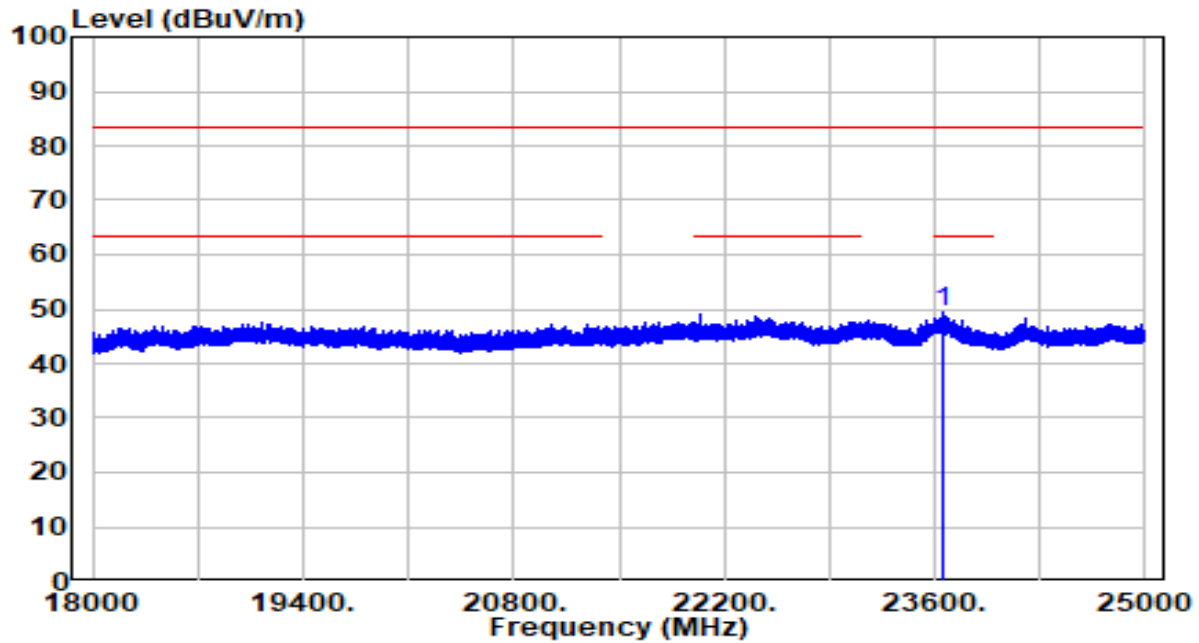

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23661.470	36.87	12.61	49.48	-34.02	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

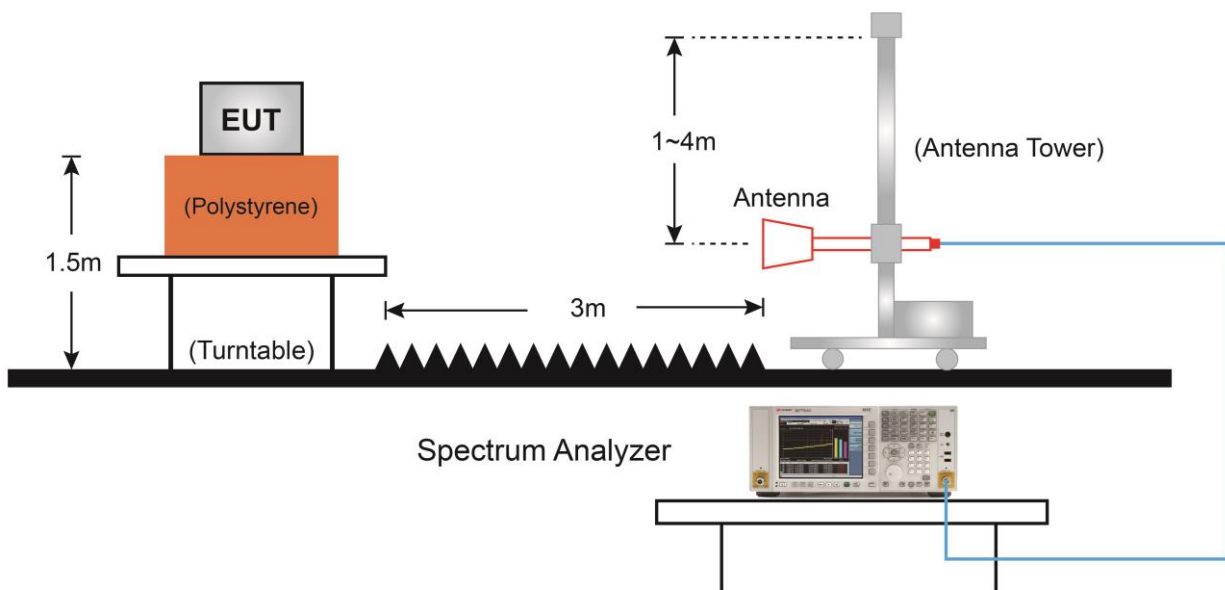7.7.4.Test Setup

7.7.5.Test Result

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	By PoE

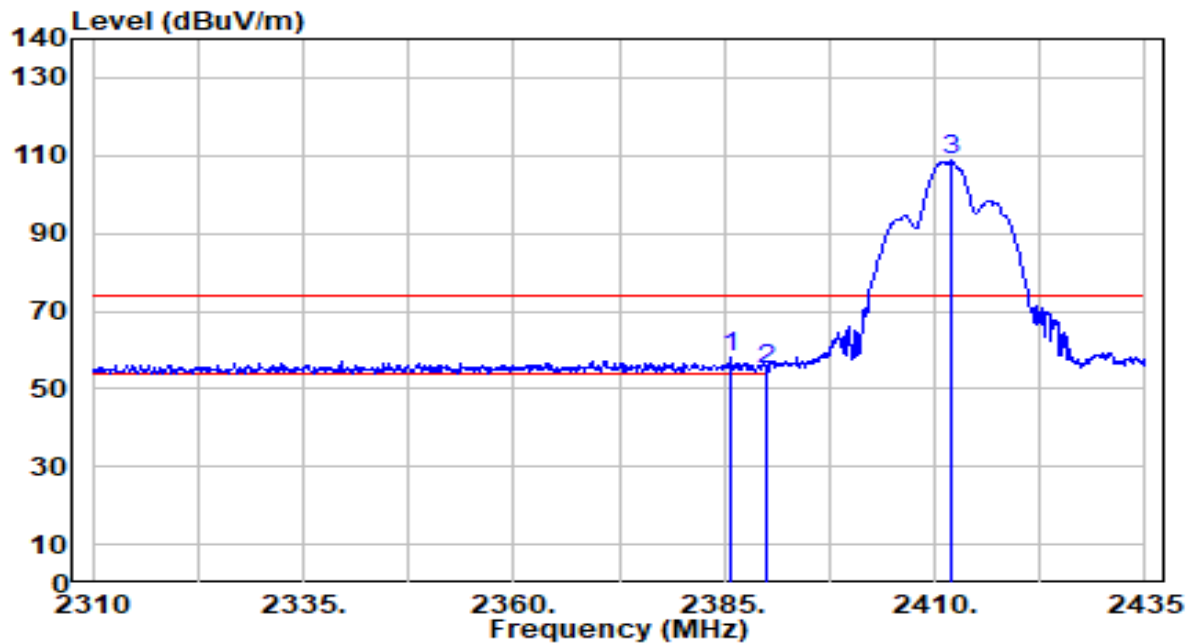


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	27.84	30.54	58.37	-15.63	74.00	225	180	Peak
2		2390.000	24.50	30.55	55.05	-18.95	74.00	225	180	Peak
3		2412.000	78.05	30.61	108.66	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	By PoE

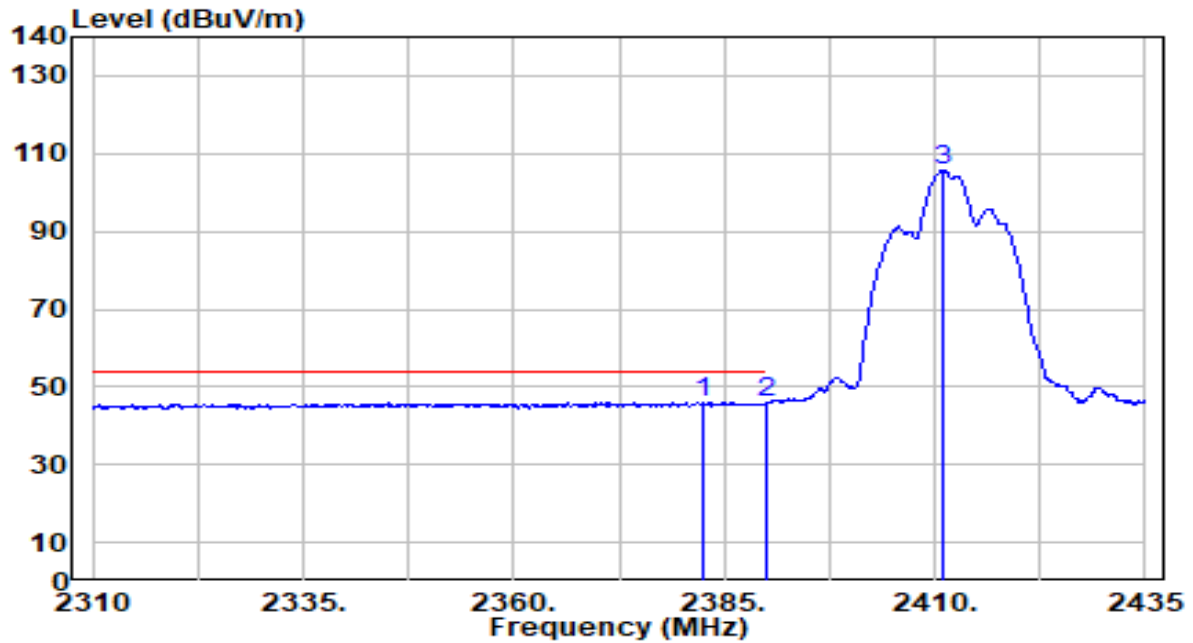


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.375	15.35	30.53	45.88	-8.12	54.00	225	180	Average
2		2390.000	15.26	30.55	45.80	-8.20	54.00	225	180	Average
3		2411.000	75.24	30.61	105.85	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	By PoE

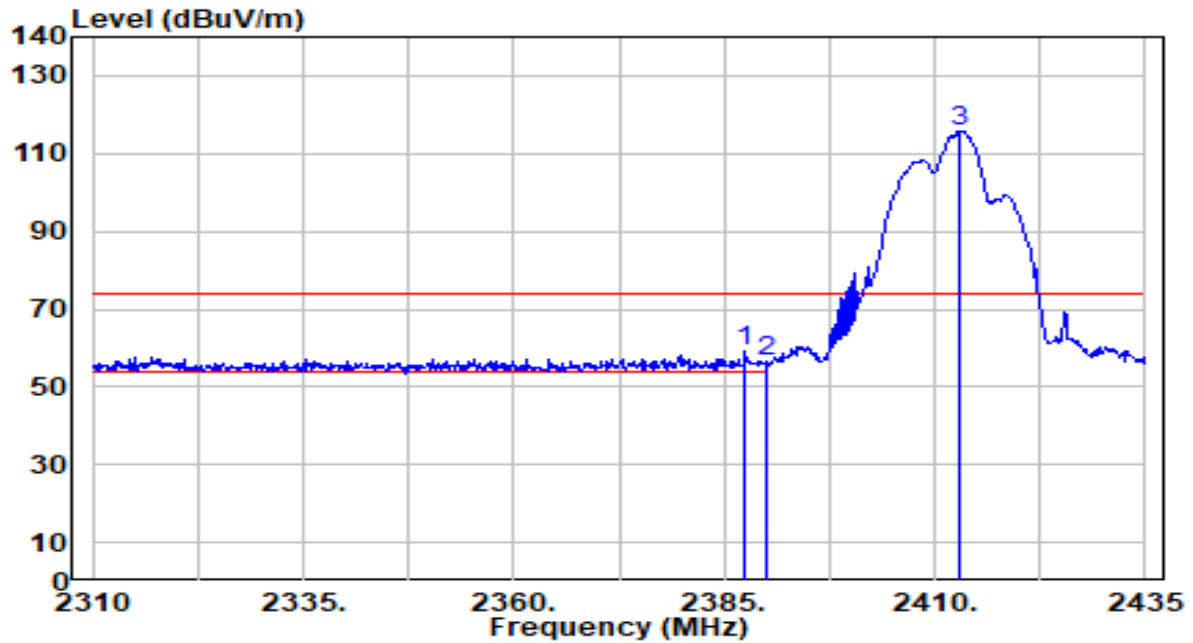


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.375	28.50	30.54	59.04	-14.96	74.00	207	160	Peak
2		2390.000	26.12	30.55	56.67	-17.33	74.00	207	160	Peak
3		2413.000	85.26	30.61	115.87	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	By PoE

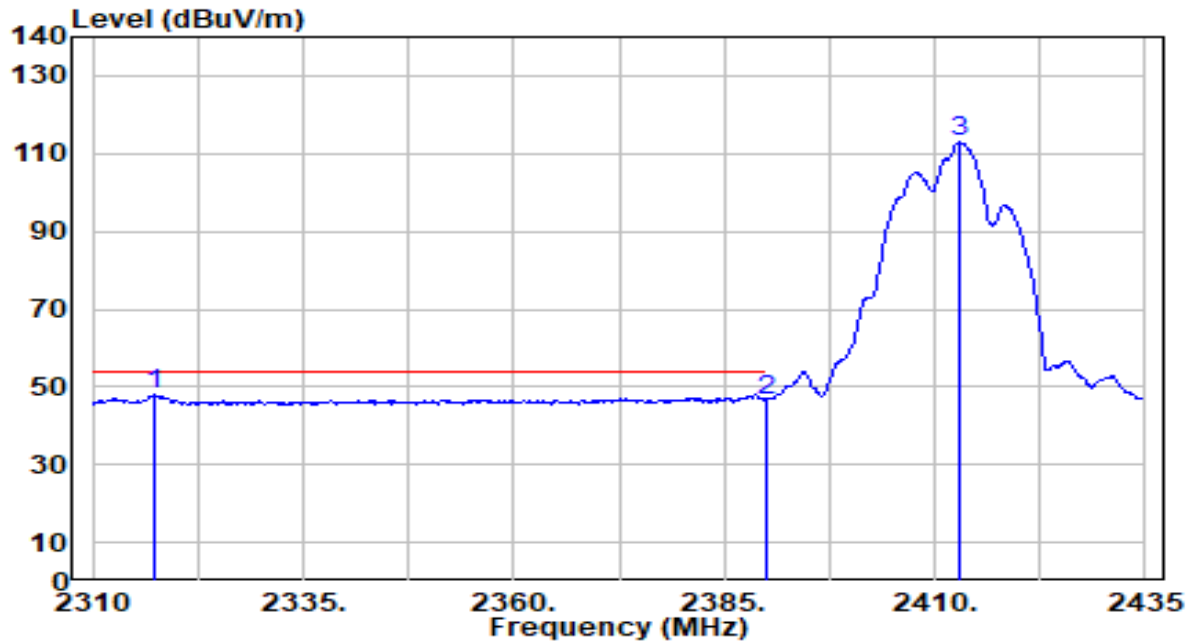


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.250	17.54	30.34	47.88	-6.12	54.00	207	160	Average
2		2390.000	15.90	30.55	46.44	-7.56	54.00	207	160	Average
3		2412.875	82.25	30.61	112.87	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	By PoE

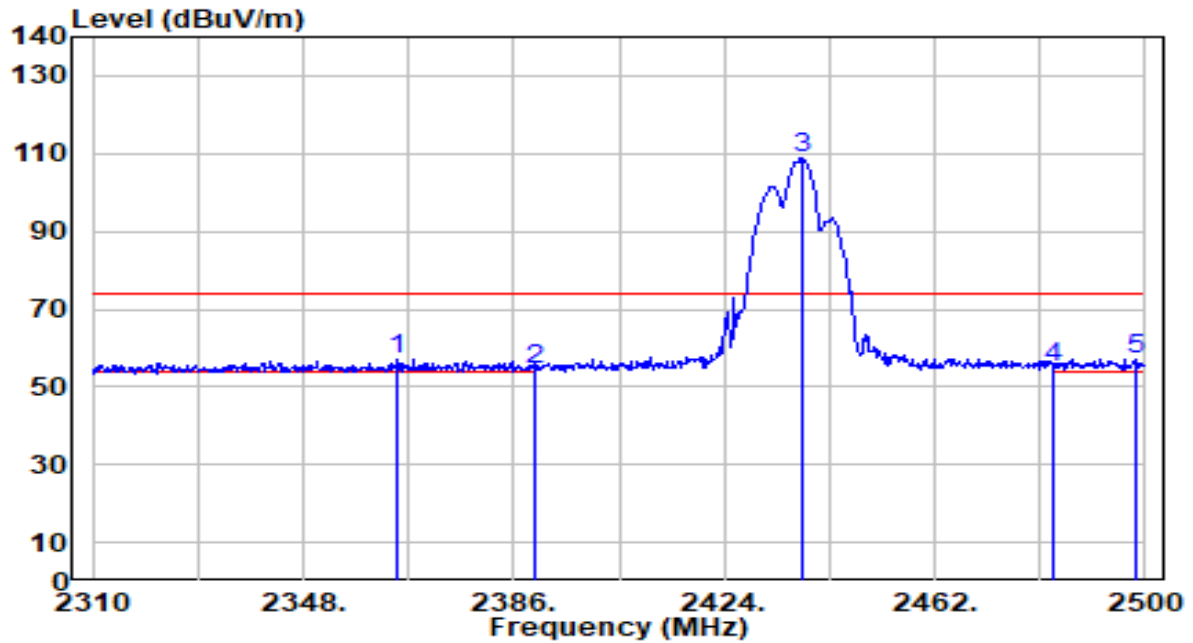


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2365.100	26.67	30.48	57.15	-16.85	74.00	206	208	Peak
2	2390.000	23.87	30.55	54.41	-19.59	74.00	206	208	Peak
3	2438.060	78.17	30.68	108.85	N/A	N/A	206	208	Peak
4	2483.500	24.26	30.81	55.07	-18.93	74.00	206	208	Peak
5	* 2498.290	26.41	30.86	57.27	-16.73	74.00	206	208	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	By PoE

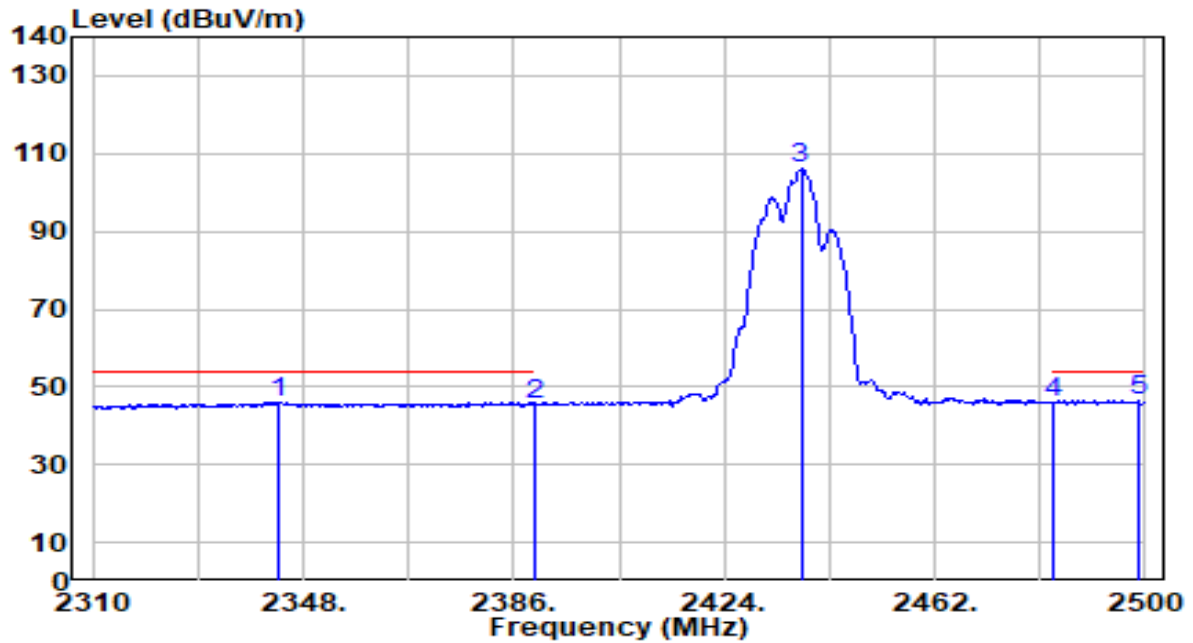


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2343.630	15.71	30.42	46.12	-7.88	54.00	206	208	Average
2	2390.000	15.05	30.55	45.60	-8.40	54.00	206	208	Average
3	2437.870	75.37	30.68	106.05	N/A	N/A	206	208	Average
4	2483.500	15.34	30.81	46.15	-7.85	54.00	206	208	Average
5	* 2498.670	15.63	30.86	46.48	-7.52	54.00	206	208	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	By PoE

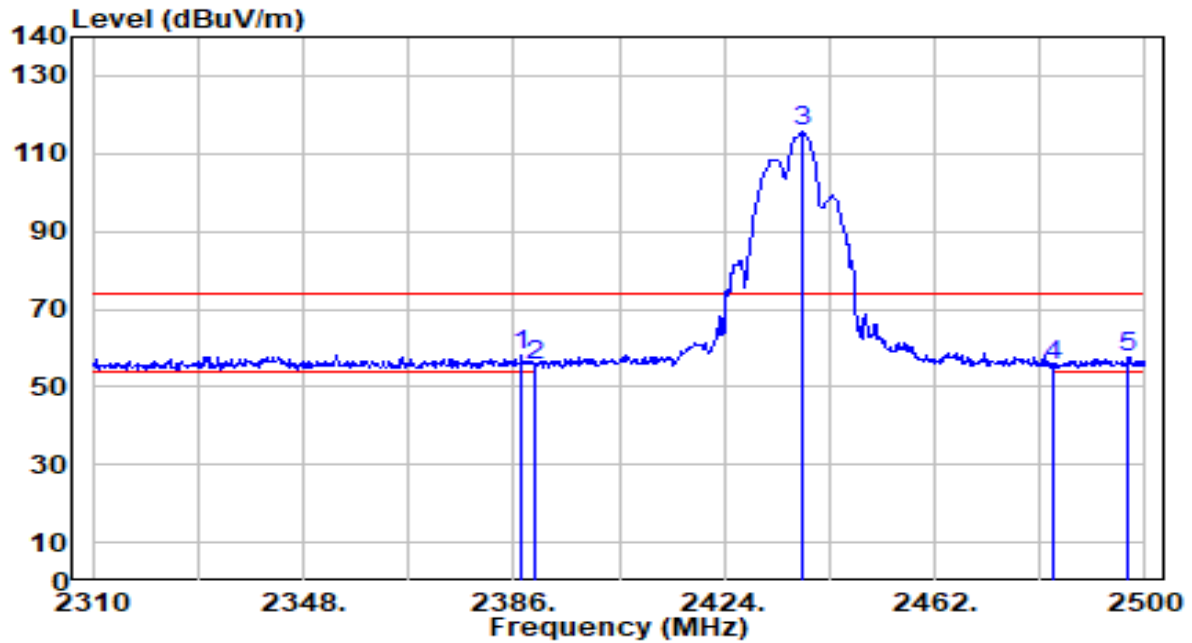


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.520	27.62	30.54	58.16	-15.84	74.00	184	164	Peak
2		2390.000	25.16	30.55	55.70	-18.30	74.00	184	164	Peak
3		2438.060	84.88	30.68	115.56	N/A	N/A	184	164	Peak
4		2483.500	24.81	30.81	55.62	-18.38	74.00	184	164	Peak
5		2496.960	26.90	30.85	57.75	-16.25	74.00	184	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	By PoE

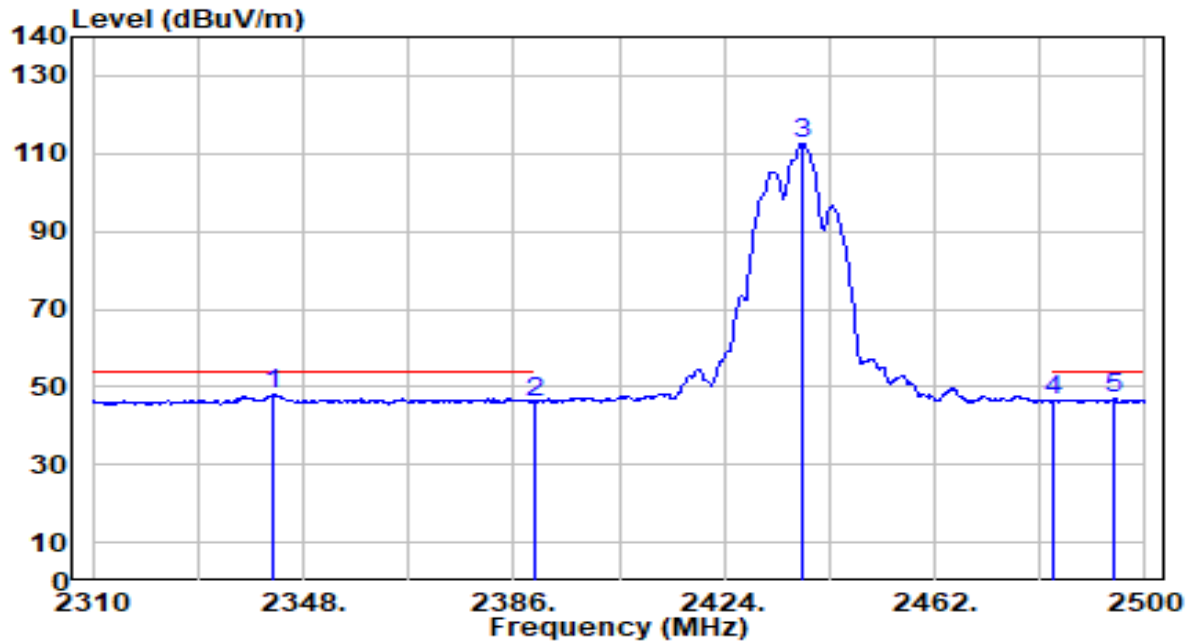


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.680	17.69	30.41	48.10	-5.90	54.00	184	164	Average
2		2390.000	15.54	30.55	46.08	-7.92	54.00	184	164	Average
3		2438.060	82.03	30.68	112.72	N/A	N/A	184	164	Average
4		2483.500	15.91	30.81	46.72	-7.28	54.00	184	164	Average
5		2494.300	16.07	30.84	46.91	-7.09	54.00	184	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	By PoE

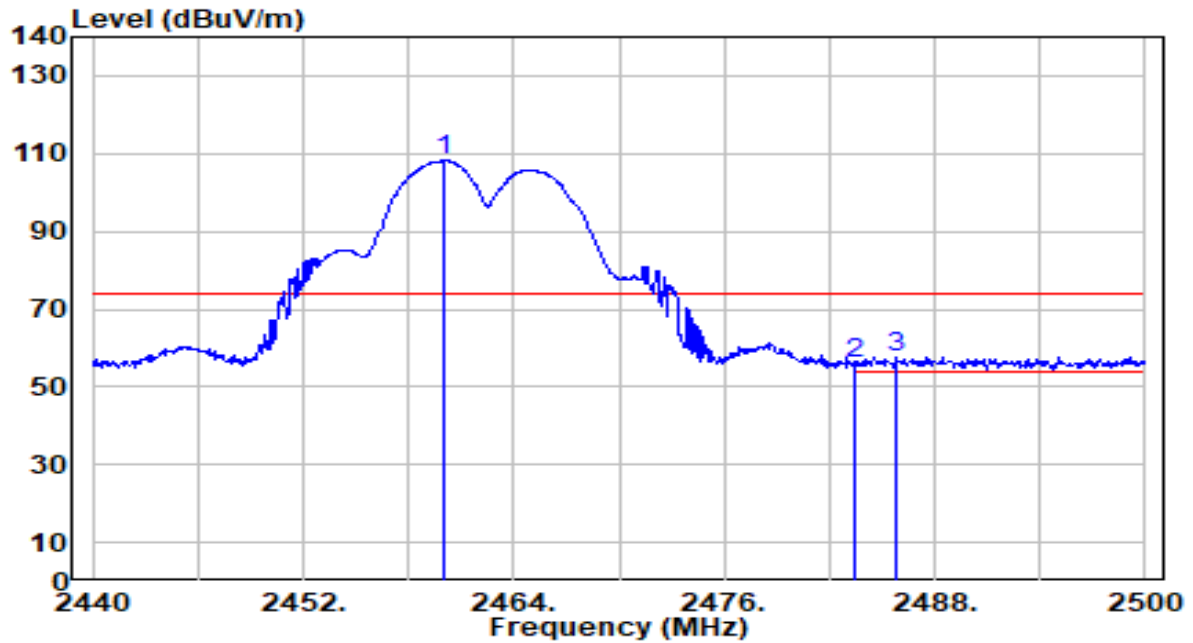


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.040	77.42	30.75	108.16	N/A	N/A	223	201	Peak
2	2483.500	25.03	30.81	55.85	-18.15	74.00	223	201	Peak
3	* 2485.780	26.96	30.82	57.78	-16.22	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	By PoE

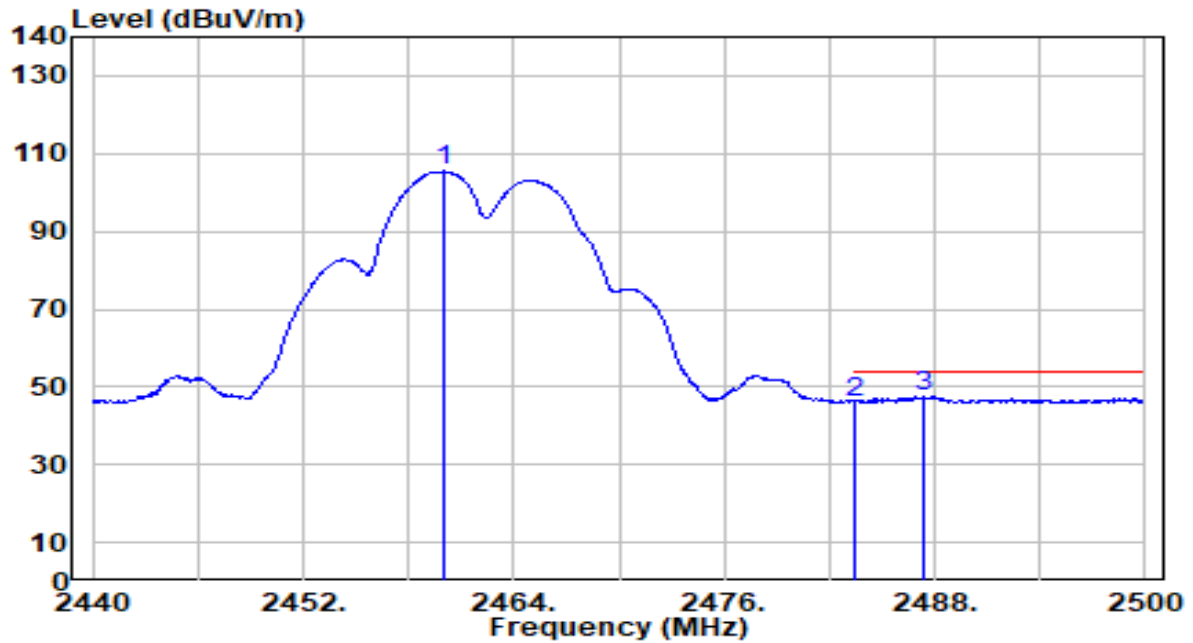


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.980	74.68	30.75	105.43	N/A	N/A	223	201	Average
2	2483.500	15.23	30.81	46.04	-7.96	54.00	223	201	Average
3	* 2487.400	16.59	30.82	47.42	-6.58	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	By PoE

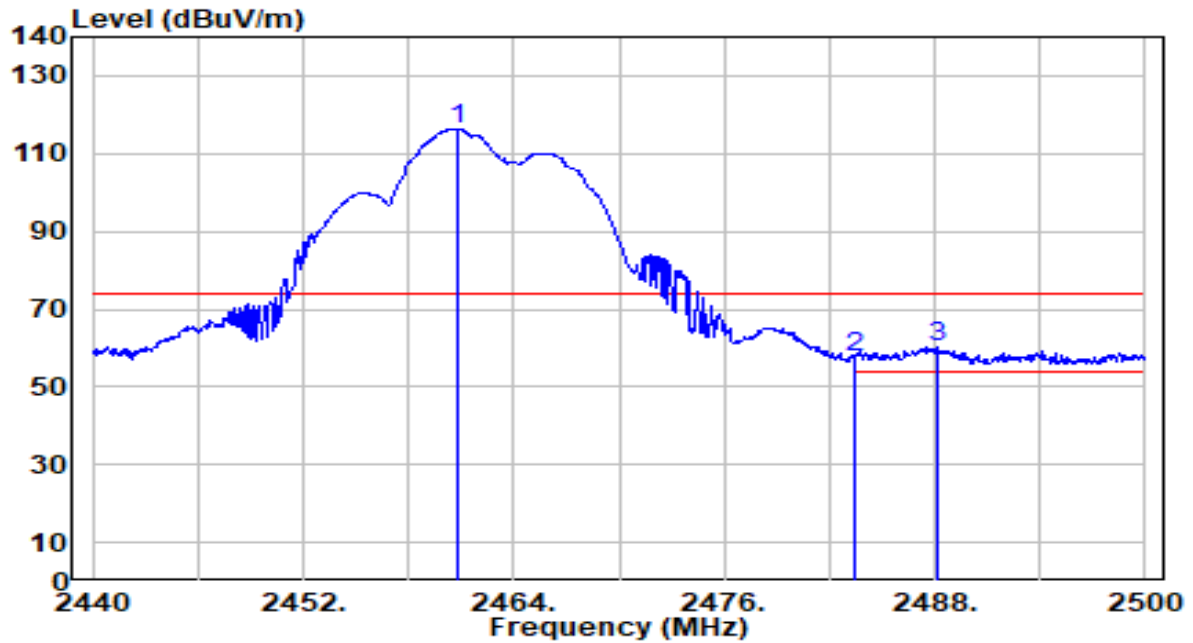


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	85.69	30.75	116.43	N/A	N/A	219	180	Peak
2	2483.500	26.95	30.81	57.76	-16.24	74.00	219	180	Peak
3	* 2488.180	29.62	30.83	60.45	-13.55	74.00	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	By PoE

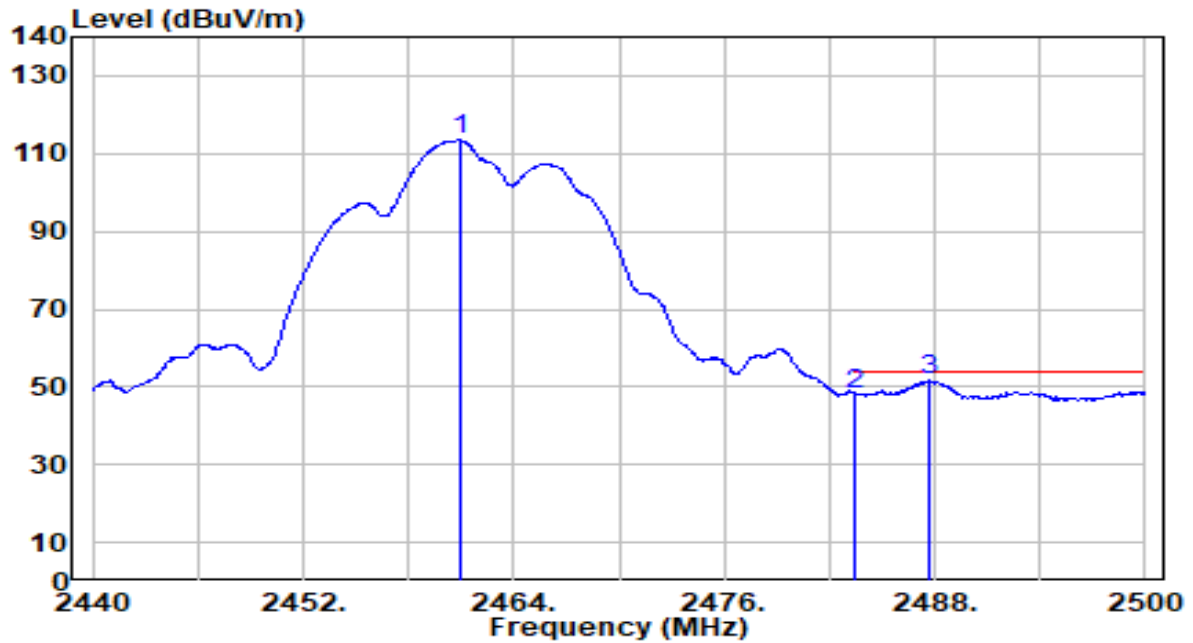


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	82.66	30.75	113.41	N/A	N/A	219	180	Average
2	2483.500	17.48	30.81	48.29	-5.71	54.00	219	180	Average
3	* 2487.760	20.72	30.83	51.54	-2.46	54.00	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	By PoE

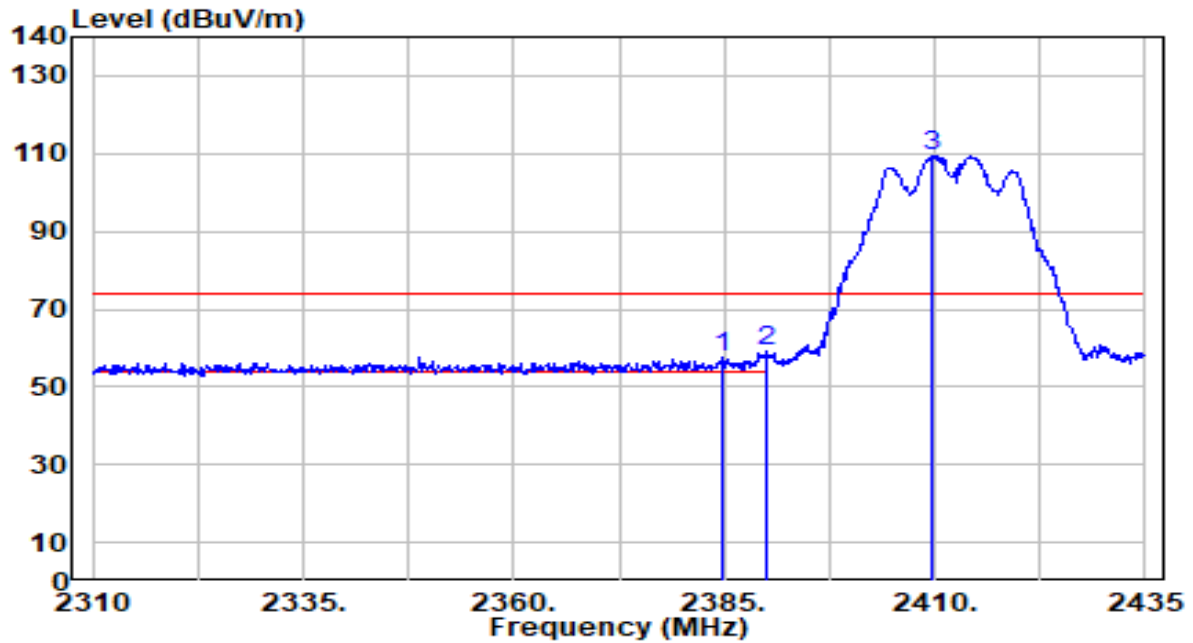


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.750	26.97	30.53	57.50	-16.50	74.00	225	180	Peak
2	*	2390.000	28.42	30.55	58.96	-15.04	74.00	225	180	Peak
3		2409.750	78.68	30.60	109.29	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	By PoE

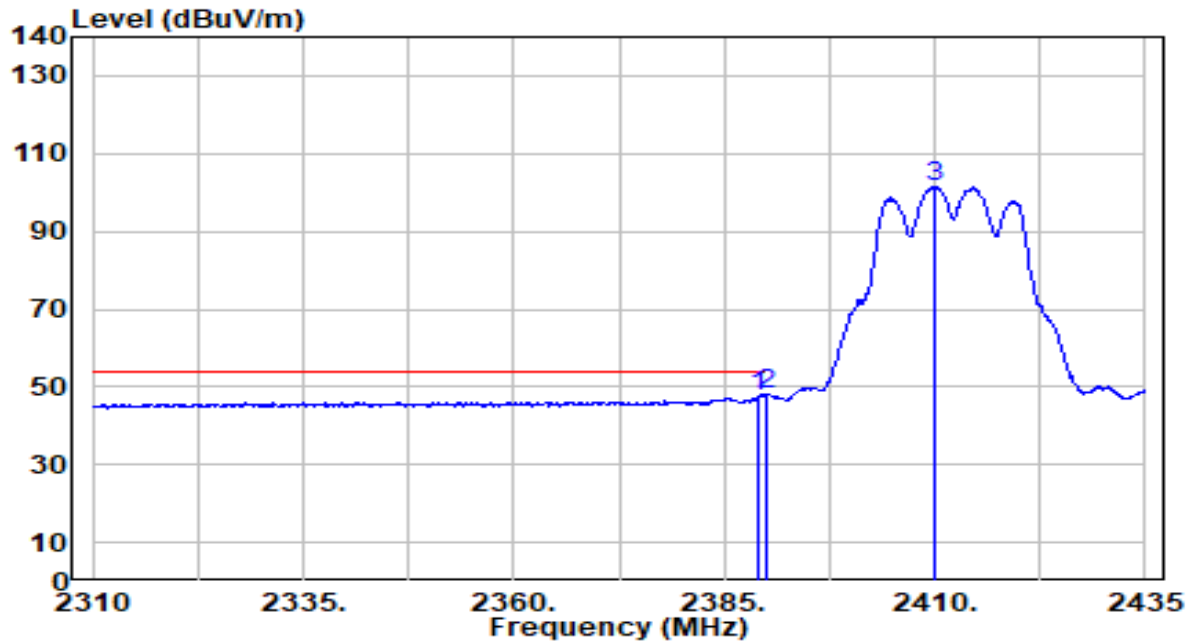


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	16.91	30.54	47.46	-6.54	54.00	225	180	Average
2	*	2390.000	17.65	30.55	48.20	-5.80	54.00	225	180	Average
3		2410.000	70.92	30.60	101.52	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	By PoE

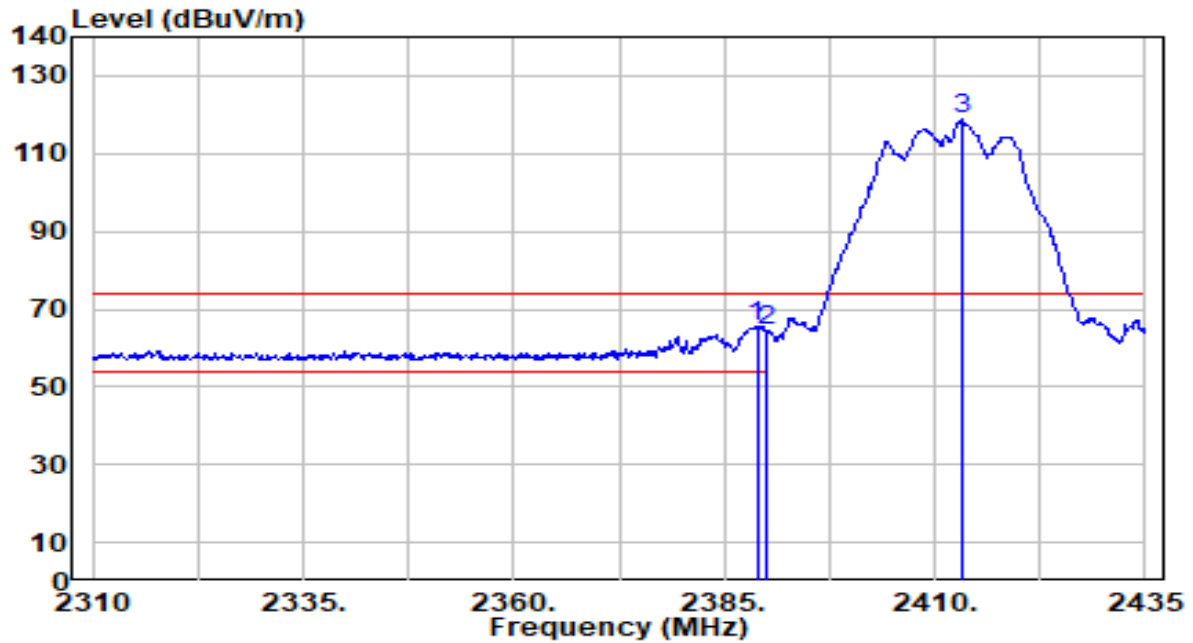


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	34.77	30.54	65.31	-8.69	74.00	207	160	Peak
2		2390.000	33.88	30.55	64.43	-9.57	74.00	207	160	Peak
3		2413.125	88.47	30.61	119.09	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	By PoE

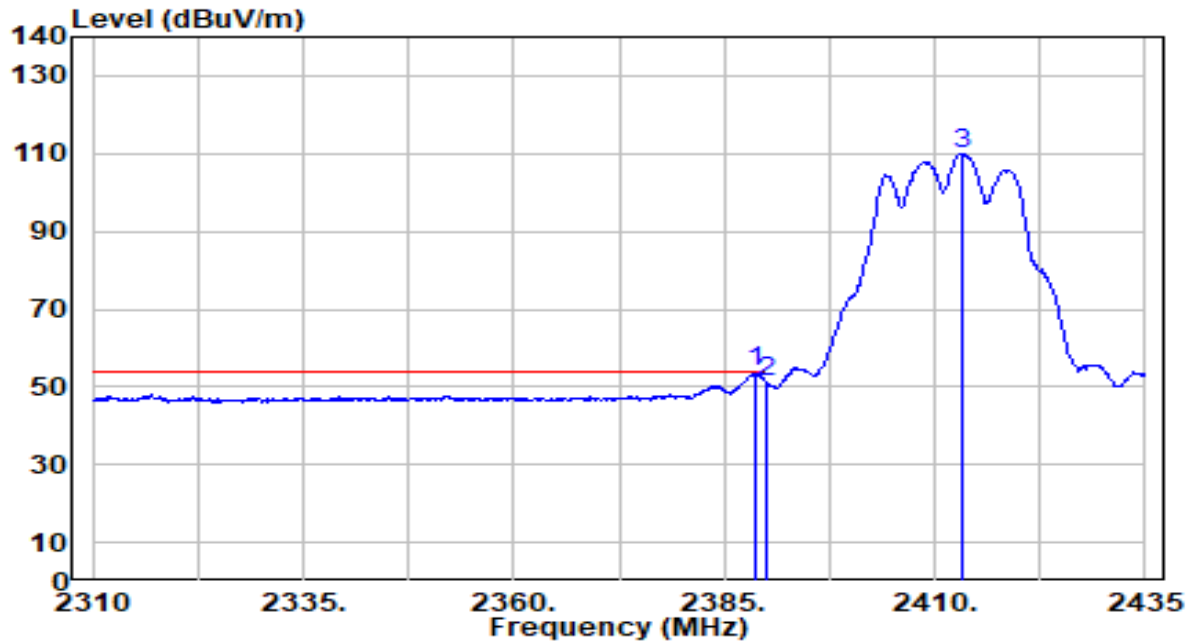


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	23.25	30.54	53.79	-0.21	54.00	207	160	Average
2		2390.000	20.54	30.55	51.09	-2.91	54.00	207	160	Average
3		2413.125	79.49	30.61	110.10	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	By PoE

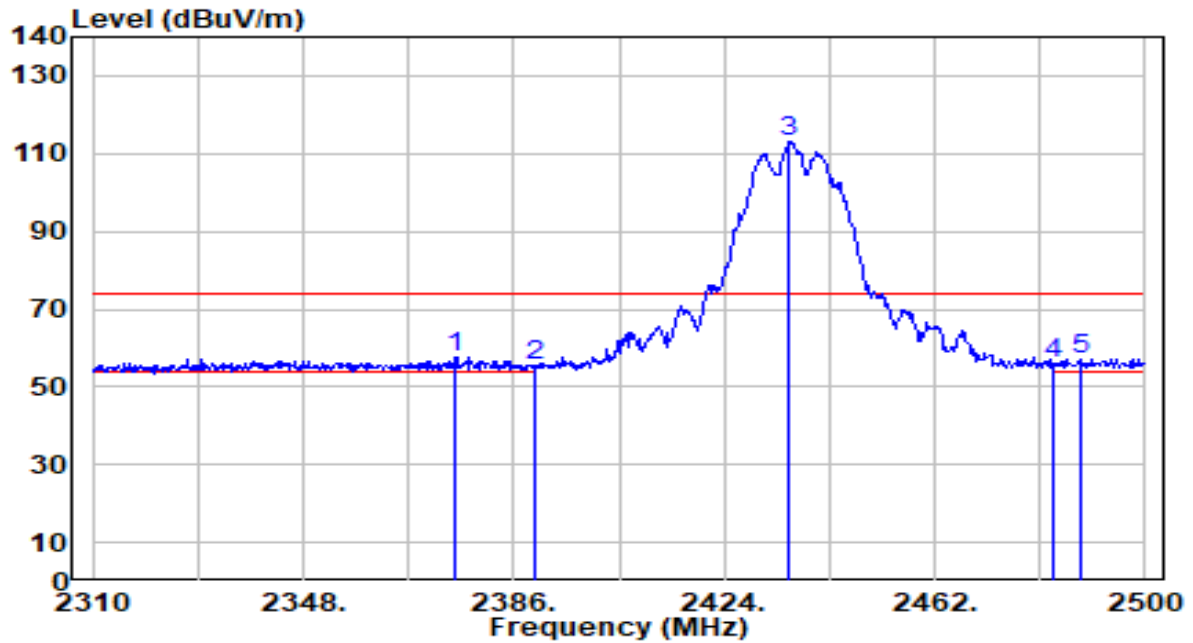


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.550	27.21	30.51	57.71	-16.29	74.00	206	208	Peak
2		2390.000	24.87	30.55	55.42	-18.58	74.00	206	208	Peak
3		2435.780	82.57	30.68	113.25	N/A	N/A	206	208	Peak
4		2483.500	25.35	30.81	56.16	-17.84	74.00	206	208	Peak
5		2488.600	26.37	30.83	57.20	-16.80	74.00	206	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	By PoE

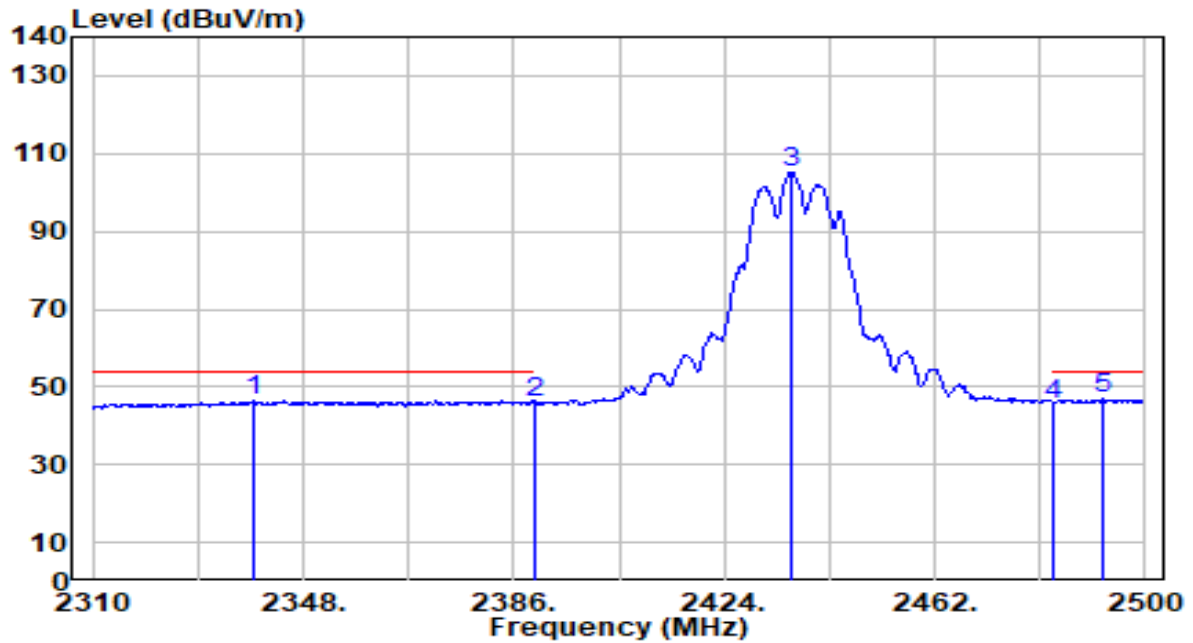


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2338.880	15.93	30.40	46.33	-7.67	54.00	206	208	Average
2	2390.000	15.45	30.55	46.00	-8.00	54.00	206	208	Average
3	2436.350	74.71	30.68	105.39	N/A	N/A	206	208	Average
4	2483.500	14.84	30.81	45.65	-8.35	54.00	206	208	Average
5	* 2492.590	15.97	30.84	46.80	-7.20	54.00	206	208	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	By PoE

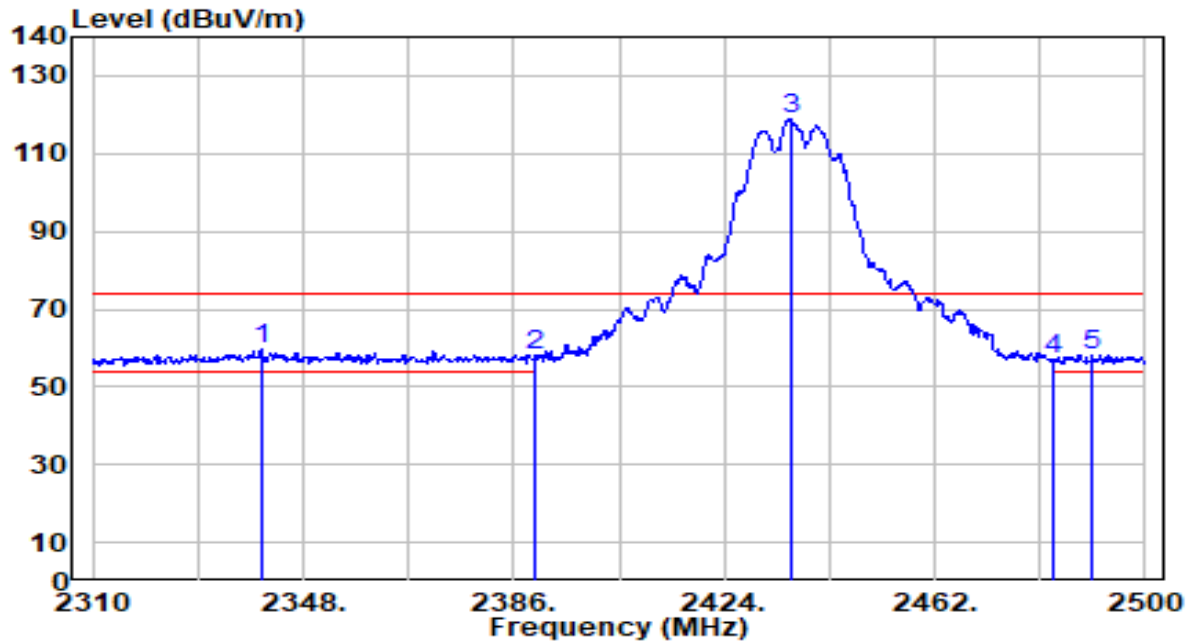


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	29.16	30.41	59.57	-14.43	74.00	184	164	Peak
2		2390.000	27.30	30.55	57.85	-16.15	74.00	184	164	Peak
3		2435.970	88.44	30.68	119.12	N/A	N/A	184	164	Peak
4		2483.500	26.35	30.81	57.16	-16.84	74.00	184	164	Peak
5		2490.310	27.34	30.83	58.18	-15.82	74.00	184	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	By PoE

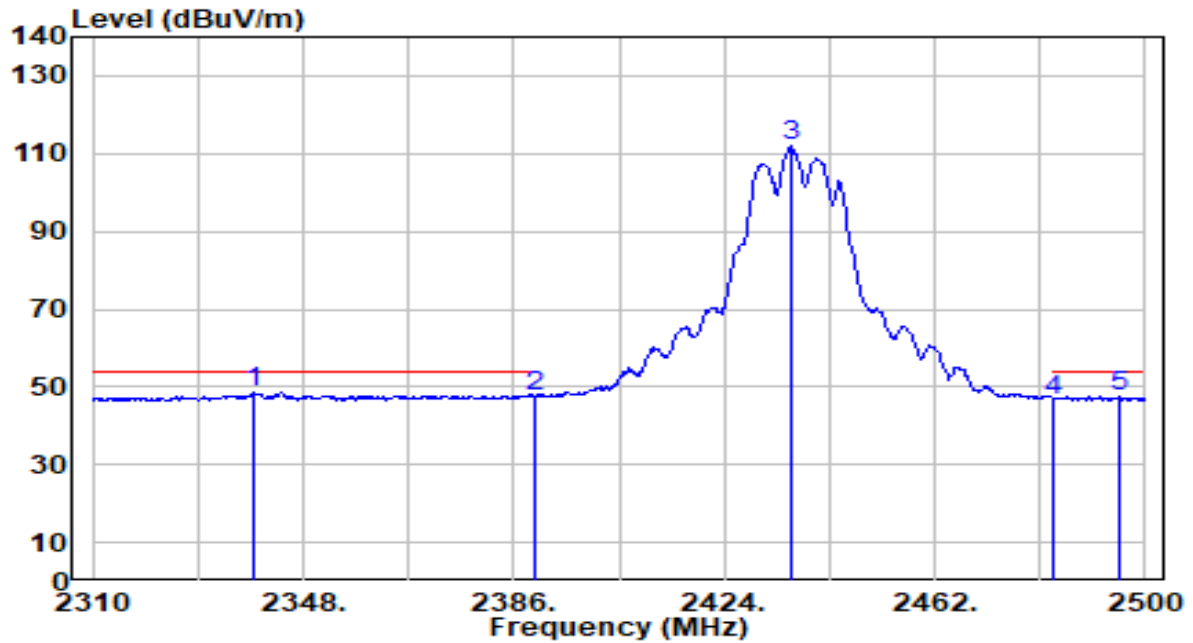


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.260	18.09	30.40	48.49	-5.51	54.00	184	164	Average
2		2390.000	17.09	30.55	47.64	-6.36	54.00	184	164	Average
3		2436.350	81.09	30.68	111.77	N/A	N/A	184	164	Average
4		2483.500	15.79	30.81	46.60	-7.40	54.00	184	164	Average
5		2495.440	16.49	30.85	47.34	-6.66	54.00	184	164	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	By PoE

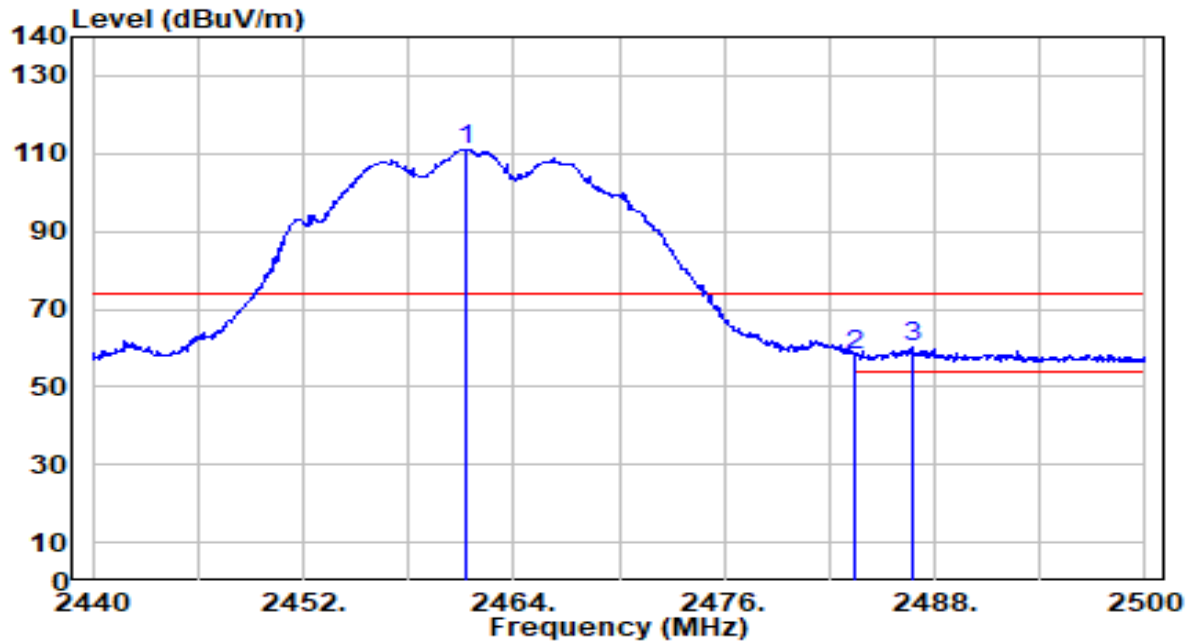


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	80.36	30.75	111.11	N/A	N/A	223	201	Peak
2	2483.500	27.49	30.81	58.31	-15.69	74.00	223	201	Peak
3	* 2486.680	29.38	30.82	60.20	-13.80	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	By PoE

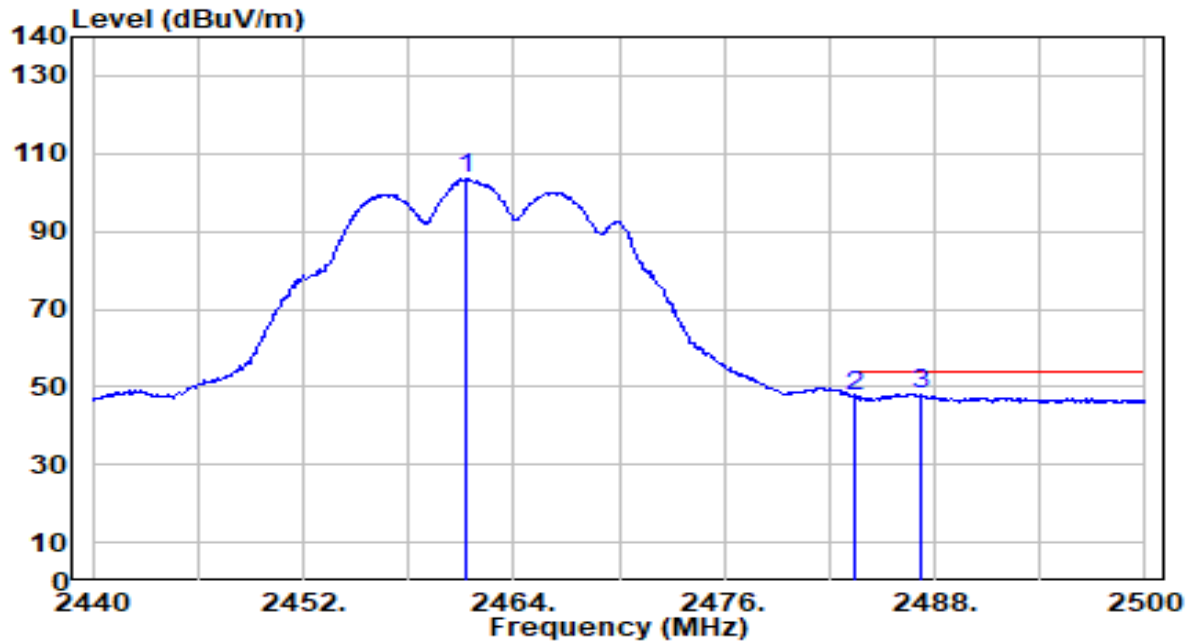


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	72.83	30.75	103.58	N/A	N/A	223	201	Average
2	2483.500	16.61	30.81	47.42	-6.58	54.00	223	201	Average
3	* 2487.160	17.40	30.82	48.22	-5.78	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	By PoE

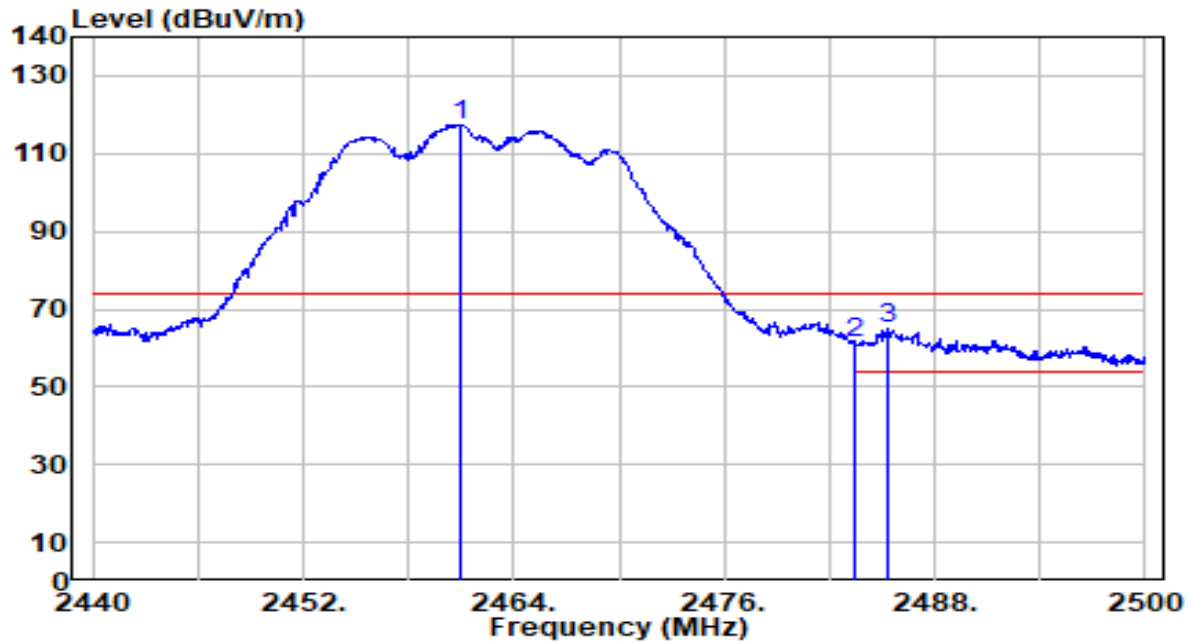


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	86.70	30.75	117.45	N/A	N/A	219	180	Peak
2	2483.500	30.46	30.81	61.27	-12.73	74.00	219	180	Peak
3	* 2485.300	34.41	30.82	65.23	-8.77	74.00	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	By PoE

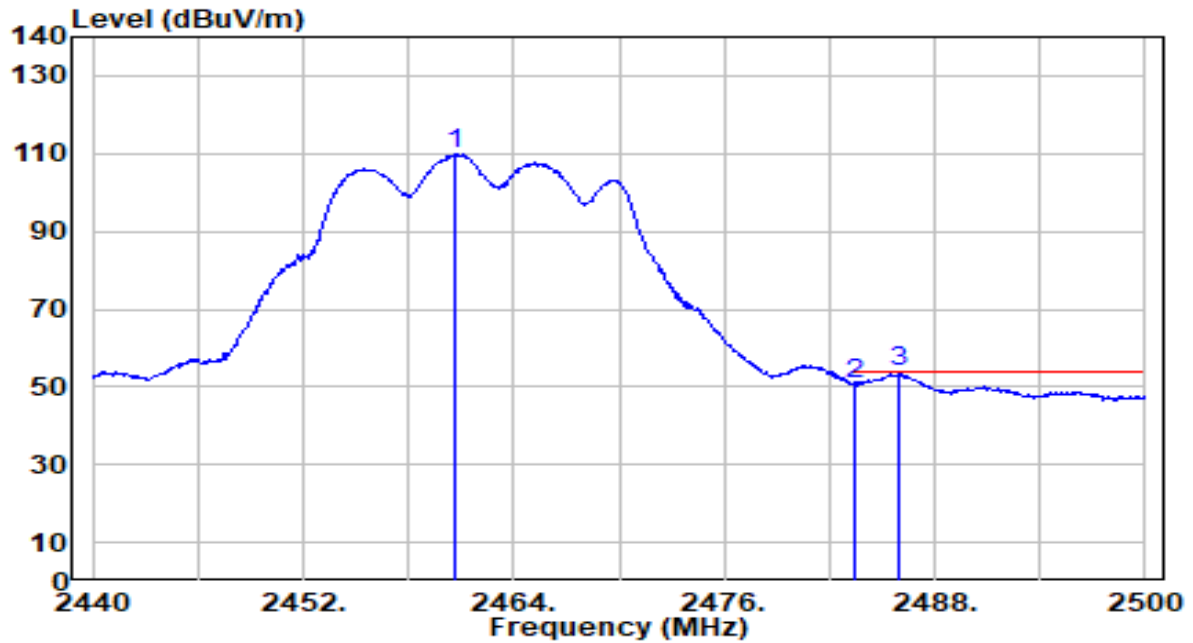


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.580	78.99	30.75	109.74	N/A	N/A	219	180	Average
2	2483.500	20.10	30.81	50.92	-3.08	54.00	219	180	Average
3	* 2485.900	22.89	30.82	53.71	-0.29	54.00	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

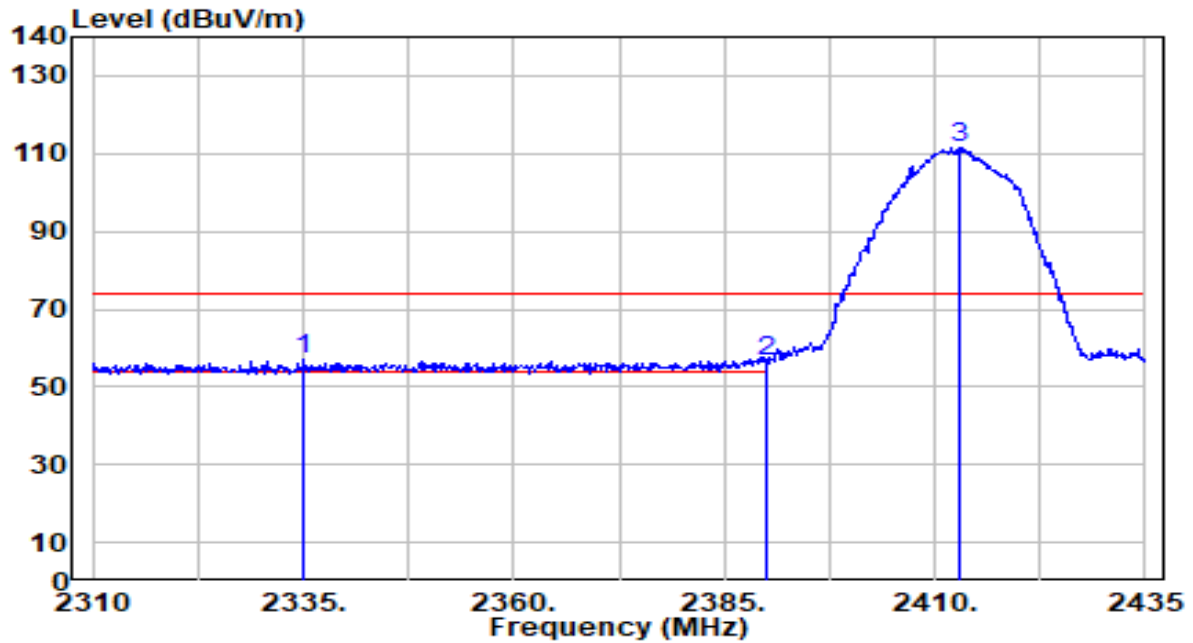


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2335.125	26.83	30.39	57.22	-16.78	74.00	225	180	Peak
2		2390.000	25.92	30.55	56.47	-17.53	74.00	225	180	Peak
3		2413.000	80.75	30.61	111.36	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

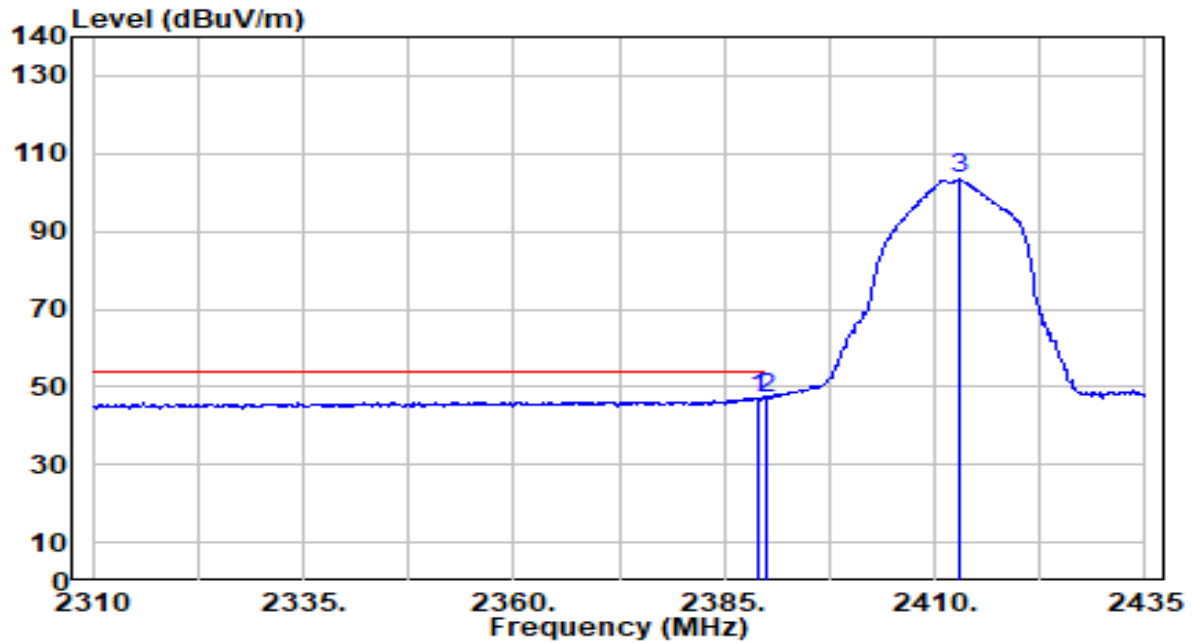


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	16.69	30.54	47.23	-6.77	54.00	225	180	Average
2	*	2390.000	16.68	30.55	47.23	-6.77	54.00	225	180	Average
3		2412.875	73.08	30.61	103.69	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

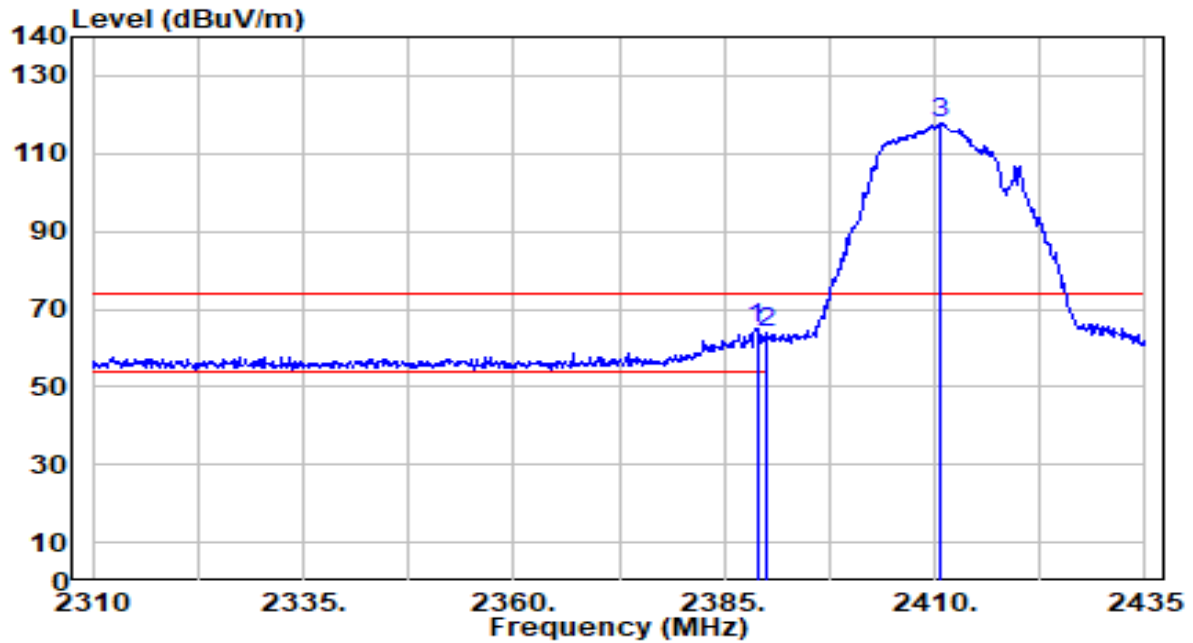


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	34.41	30.54	64.95	-9.05	74.00	207	160	Peak
2		2390.000	33.40	30.55	63.95	-10.05	74.00	207	160	Peak
3		2410.750	86.99	30.61	117.60	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

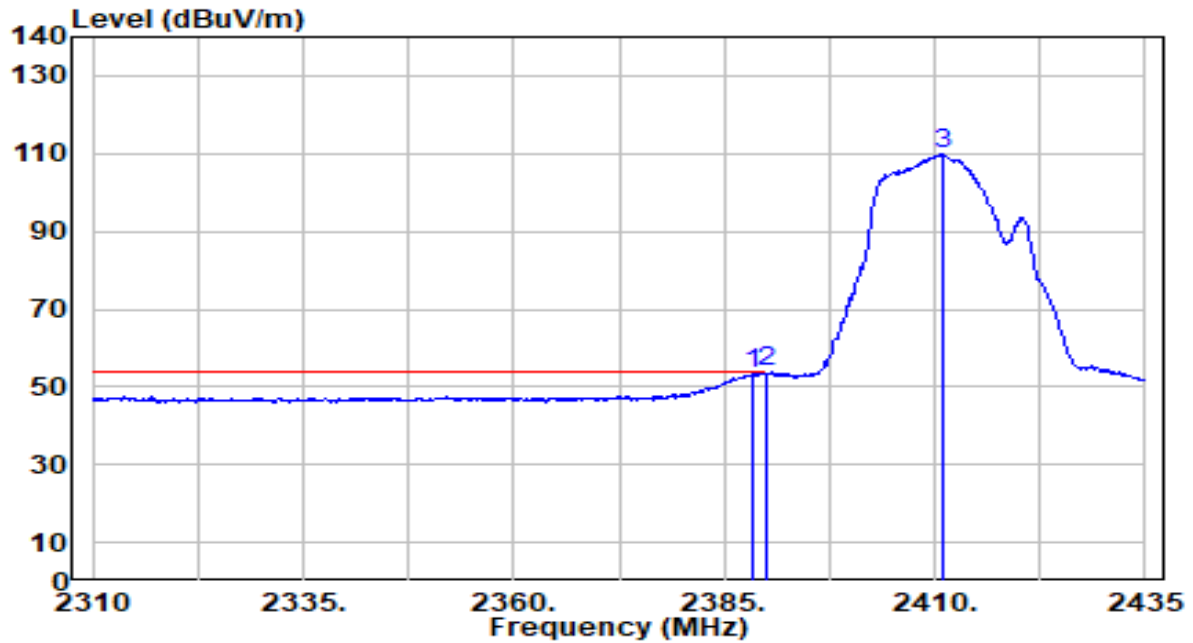


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.500	23.00	30.54	53.55	-0.45	54.00	207	160	Average
2	*	2390.000	23.18	30.55	53.73	-0.27	54.00	207	160	Average
3		2411.125	79.10	30.61	109.71	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

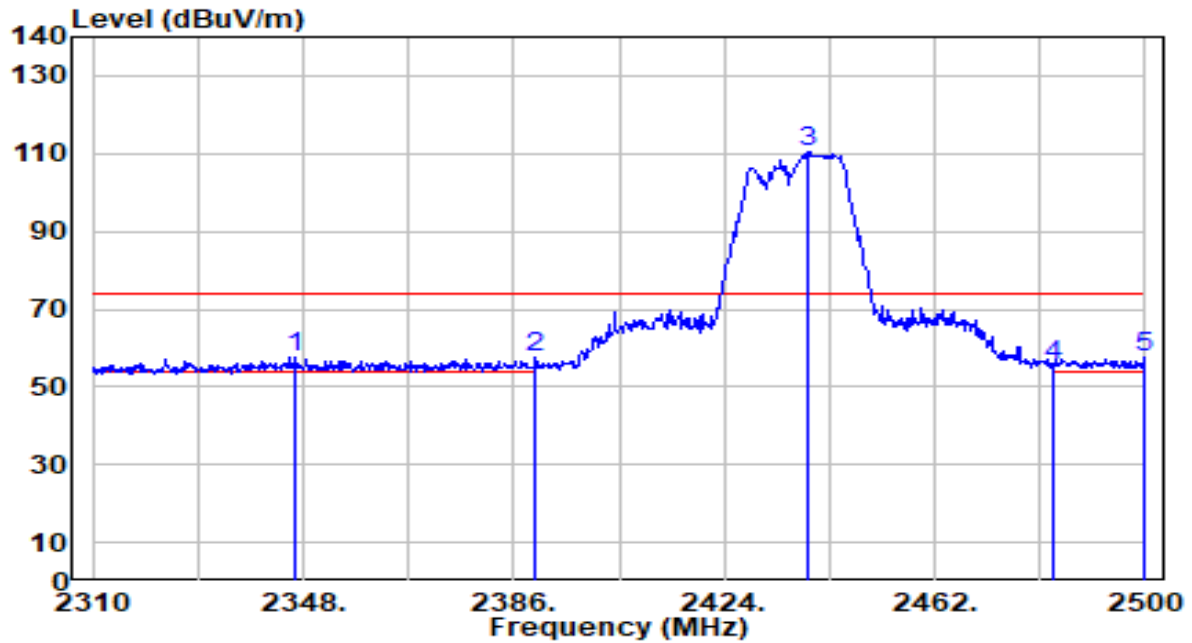


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2346.670	27.25	30.42	57.67	-16.33	74.00	206	208	Peak
2		2390.000	27.07	30.55	57.62	-16.38	74.00	206	208	Peak
3		2439.200	79.83	30.69	110.52	N/A	N/A	206	208	Peak
4		2483.500	24.50	30.81	55.31	-18.69	74.00	206	208	Peak
5		2499.810	26.79	30.86	57.65	-16.35	74.00	206	208	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

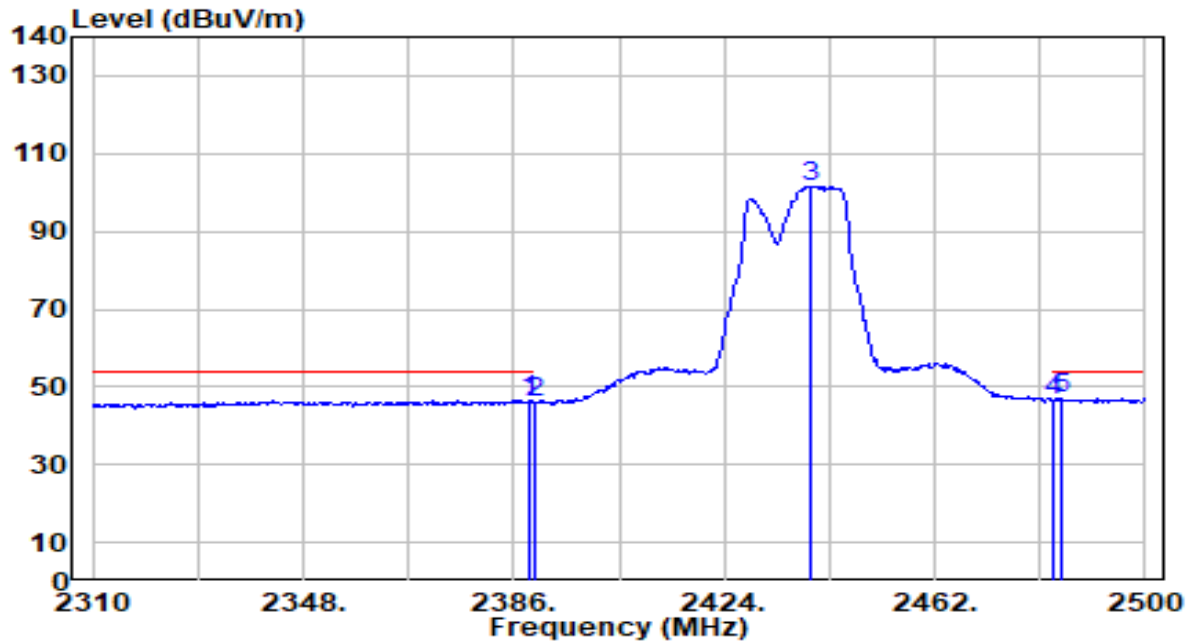


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	15.90	30.54	46.44	-7.56	54.00	206	208	Average
2	2390.000	15.32	30.55	45.87	-8.13	54.00	206	208	Average
3	2439.390	70.89	30.69	101.58	N/A	N/A	206	208	Average
4	2483.500	15.64	30.81	46.46	-7.54	54.00	206	208	Average
5	* 2484.800	16.36	30.82	47.18	-6.82	54.00	206	208	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

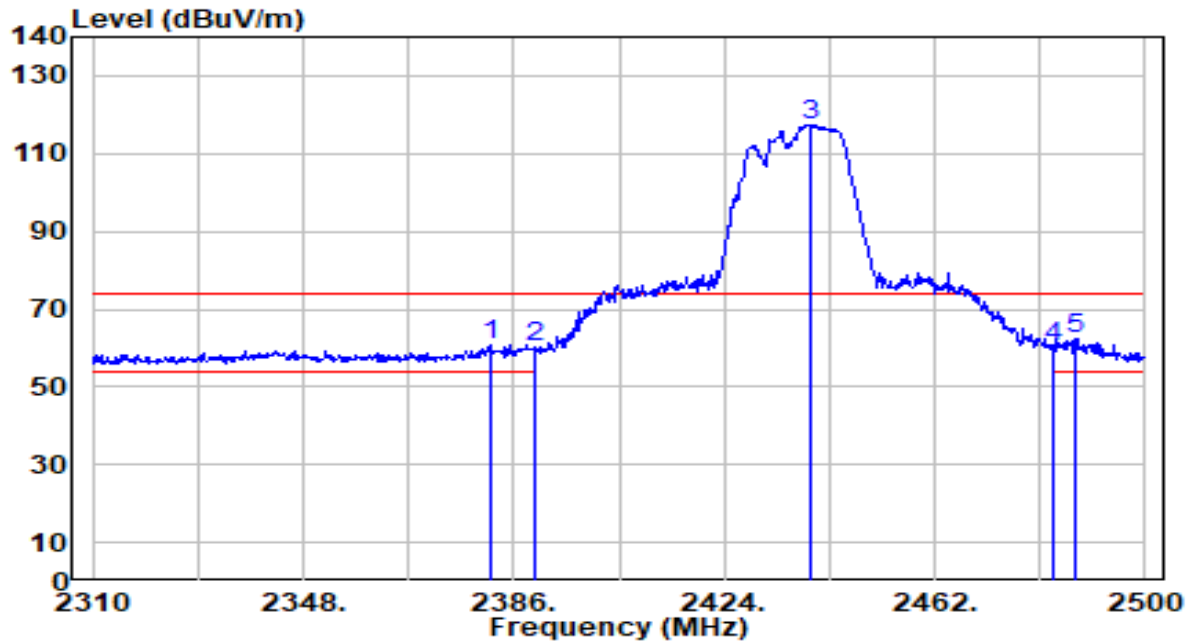


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2381.630	30.20	30.52	60.73	-13.27	74.00	184	164	Peak
2	2390.000	29.58	30.55	60.13	-13.87	74.00	184	164	Peak
3	2439.770	86.73	30.69	117.42	N/A	N/A	184	164	Peak
4	2483.500	29.19	30.81	60.00	-14.00	74.00	184	164	Peak
5	* 2487.270	31.59	30.82	62.42	-11.58	74.00	184	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

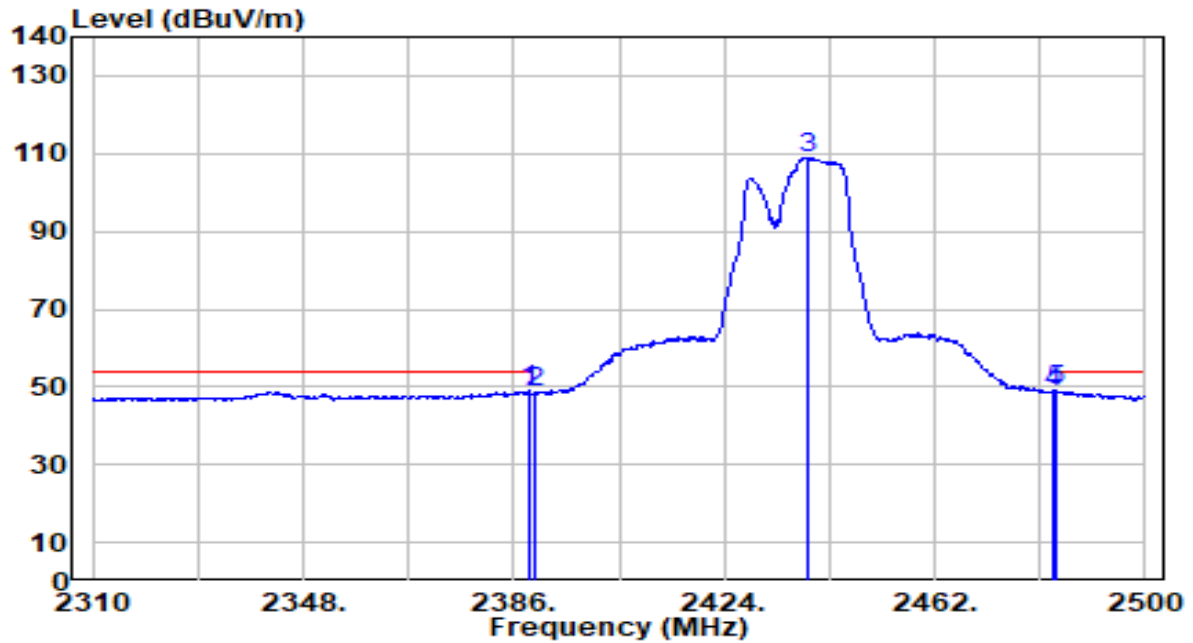


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	18.36	30.54	48.90	-5.10	54.00	184	164	Average
2	2390.000	18.09	30.55	48.64	-5.36	54.00	184	164	Average
3	2439.010	78.19	30.69	108.87	N/A	N/A	184	164	Average
4	2483.500	18.05	30.81	48.86	-5.14	54.00	184	164	Average
5	* 2484.040	18.25	30.81	49.07	-4.93	54.00	184	164	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

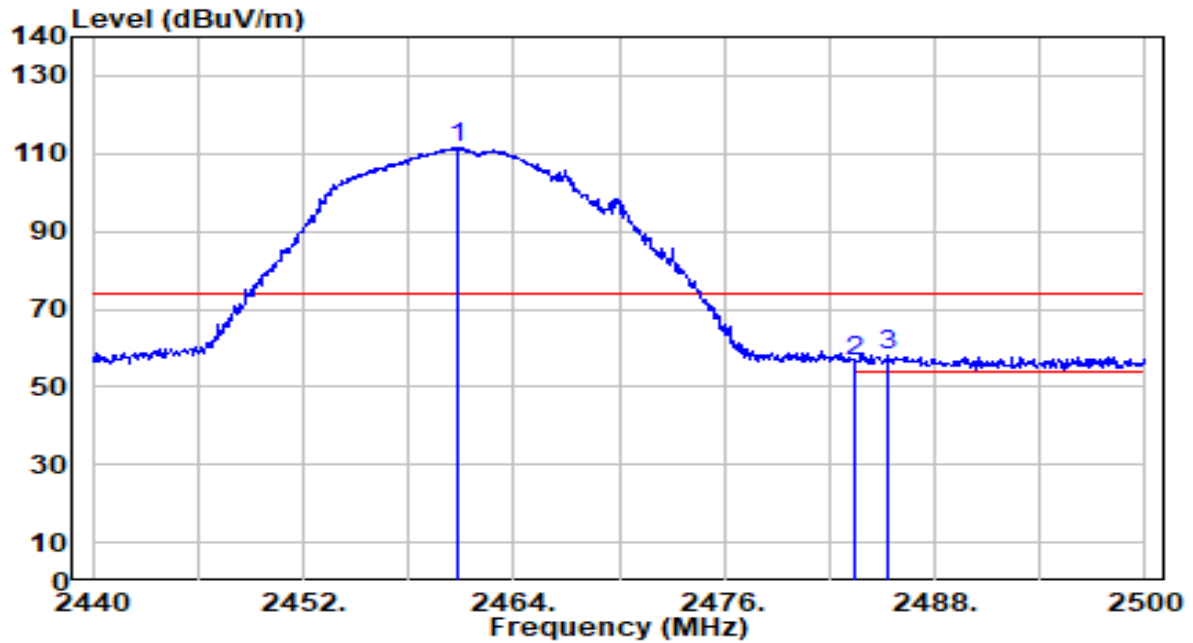


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	80.77	30.75	111.52	N/A	N/A	223	201	Peak
2	2483.500	25.55	30.81	56.36	-17.64	74.00	223	201	Peak
3	* 2485.300	27.10	30.82	57.92	-16.08	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

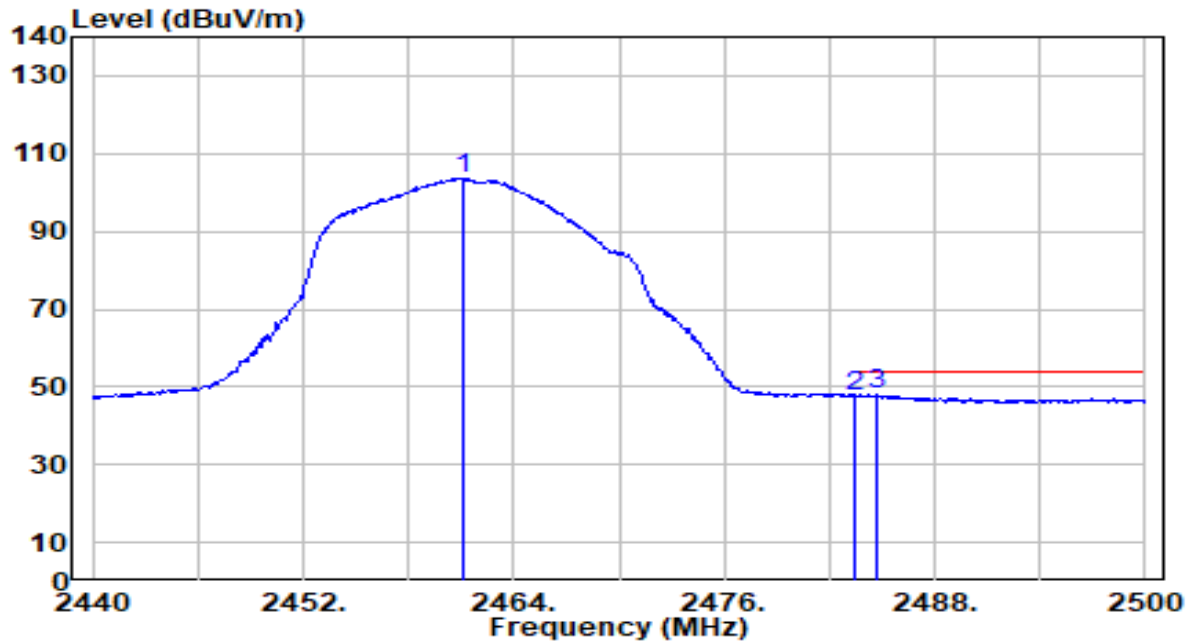


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.060	72.97	30.75	103.72	N/A	N/A	223	201	Average
2		2483.500	16.97	30.81	47.78	-6.22	54.00	223	201	Average
3	*	2484.640	17.03	30.82	47.85	-6.15	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

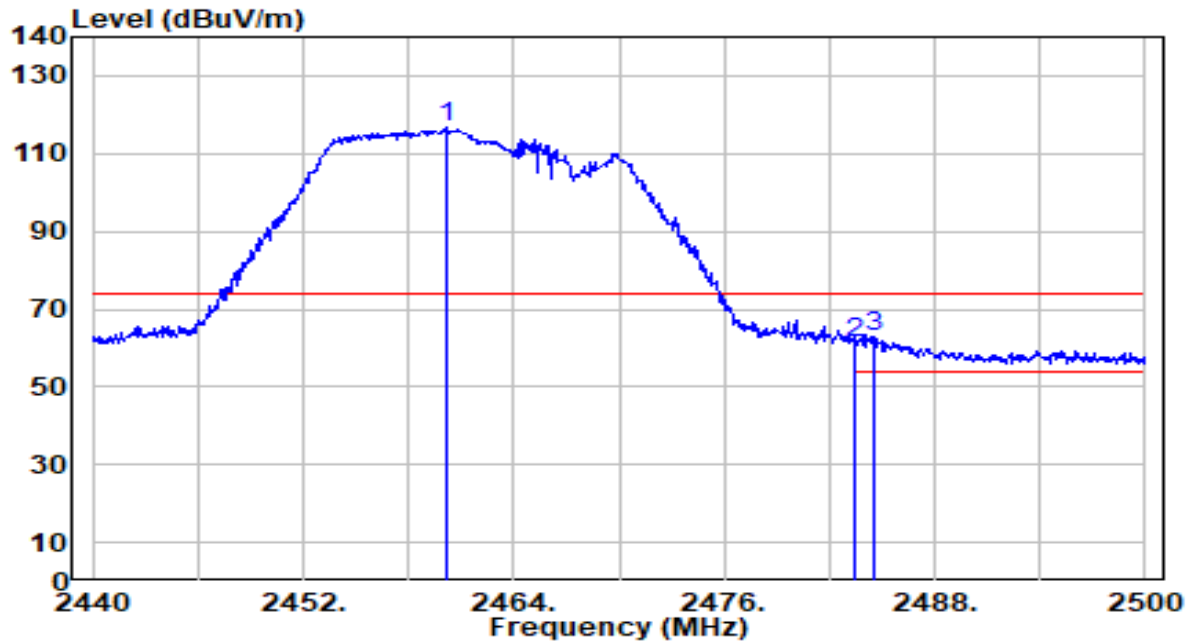


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.220	86.26	30.75	117.01	N/A	N/A	219	180	Peak
2	2483.500	30.44	30.81	61.25	-12.75	74.00	219	180	Peak
3	* 2484.520	31.98	30.82	62.80	-11.20	74.00	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

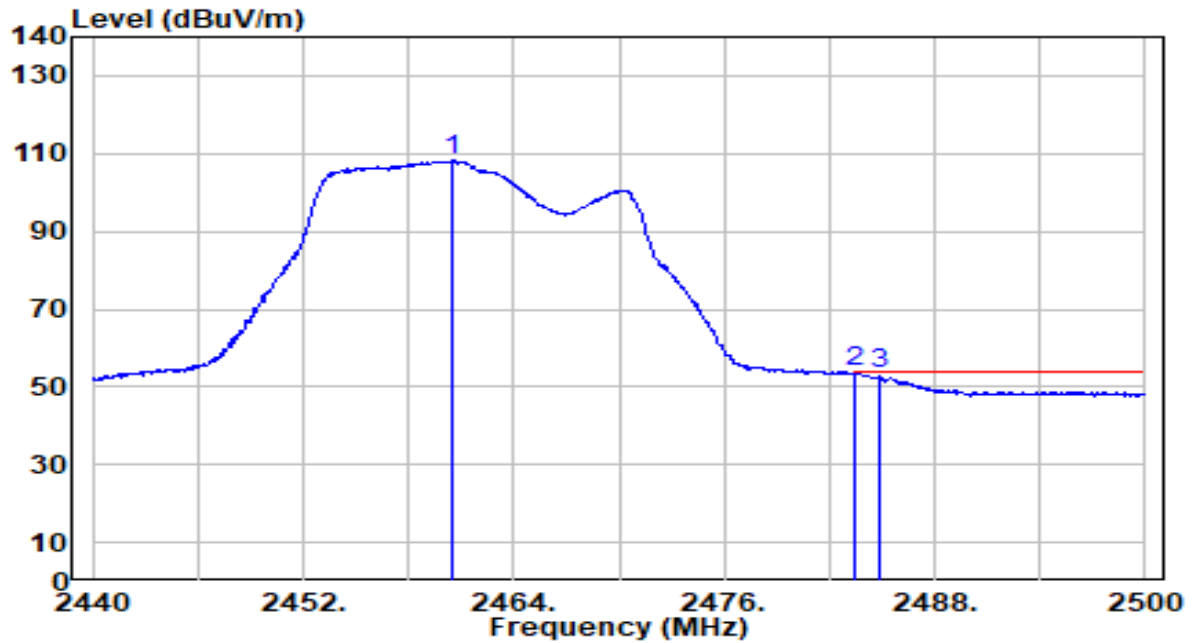


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.520	77.37	30.75	108.12	N/A	N/A	219	180	Average
2	*	2483.500	22.89	30.81	53.71	-0.29	54.00	219	180	Average
3		2484.820	22.63	30.82	53.45	-0.55	54.00	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

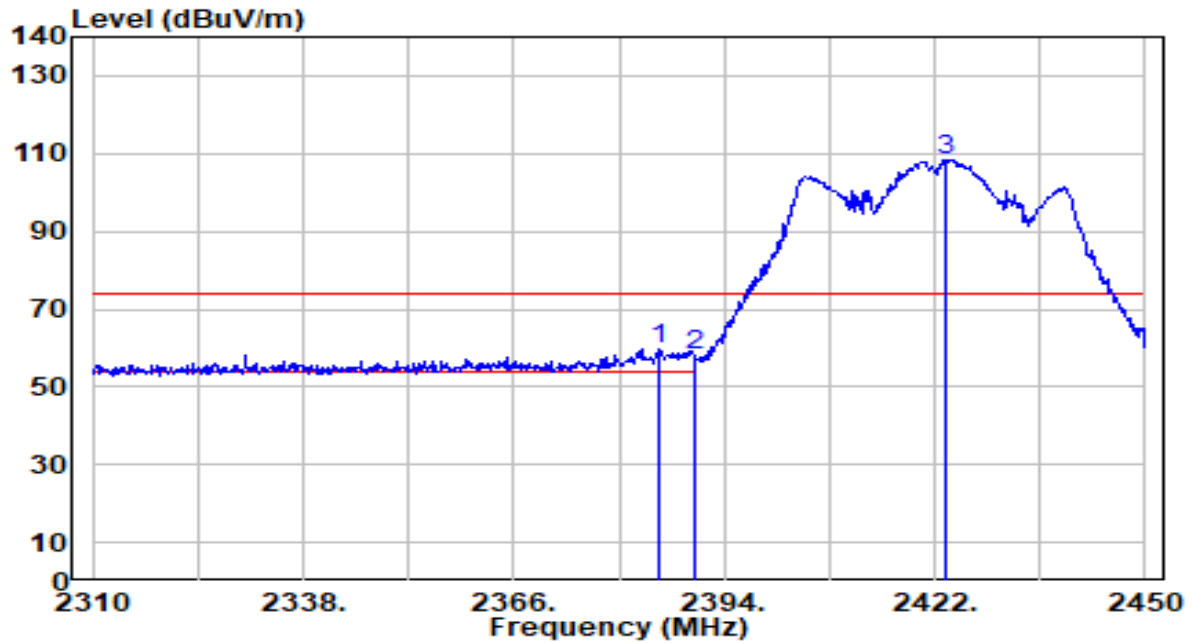


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.180	29.23	30.53	59.76	-14.24	74.00	225	180	Peak
2		2390.000	27.38	30.55	57.92	-16.08	74.00	225	180	Peak
3		2423.400	77.90	30.64	108.54	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

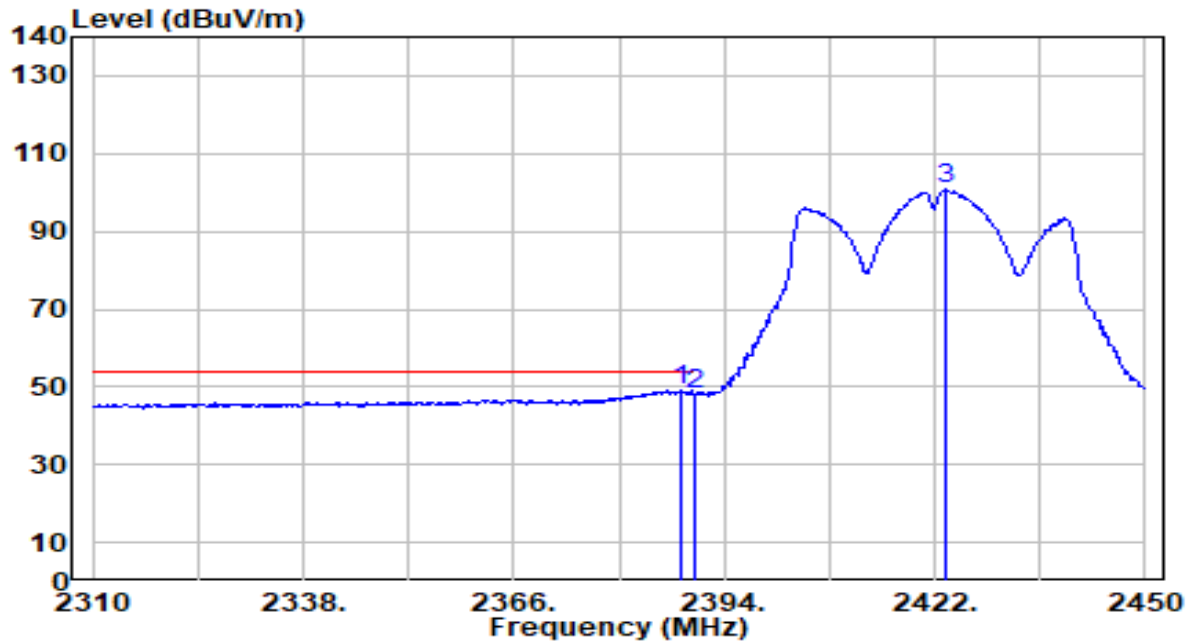


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.120	18.38	30.54	48.93	-5.07	54.00	225	180	Average
2		2390.000	17.73	30.55	48.28	-5.72	54.00	225	180	Average
3		2423.540	70.21	30.64	100.85	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

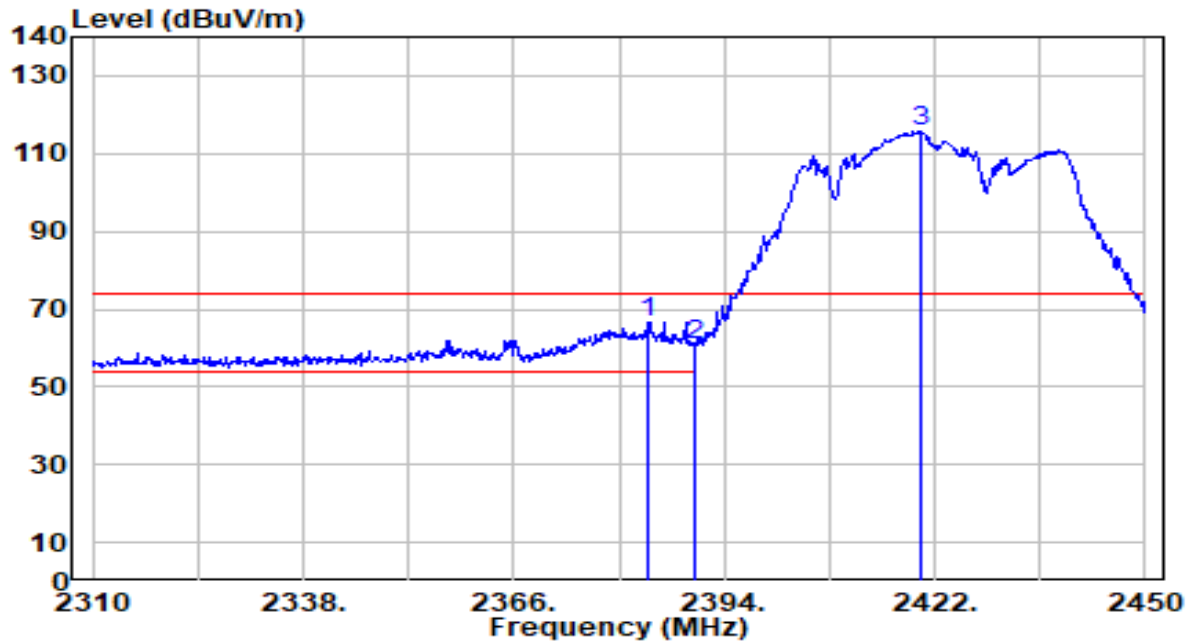


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.780	36.17	30.53	66.70	-7.30	74.00	207	160	Peak
2		2390.000	30.14	30.55	60.69	-13.31	74.00	207	160	Peak
3		2420.040	85.27	30.63	115.90	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

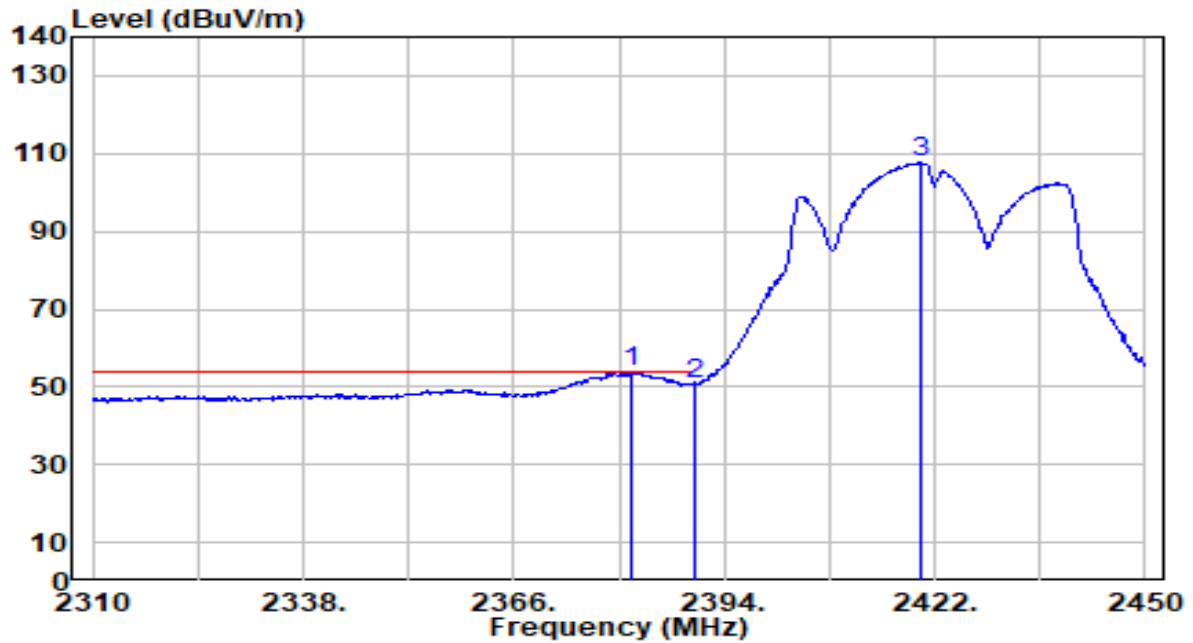


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.540	23.24	30.52	53.77	-0.23	54.00	207	160	Average
2		2390.000	20.31	30.55	50.86	-3.14	54.00	207	160	Average
3		2420.180	76.97	30.63	107.61	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

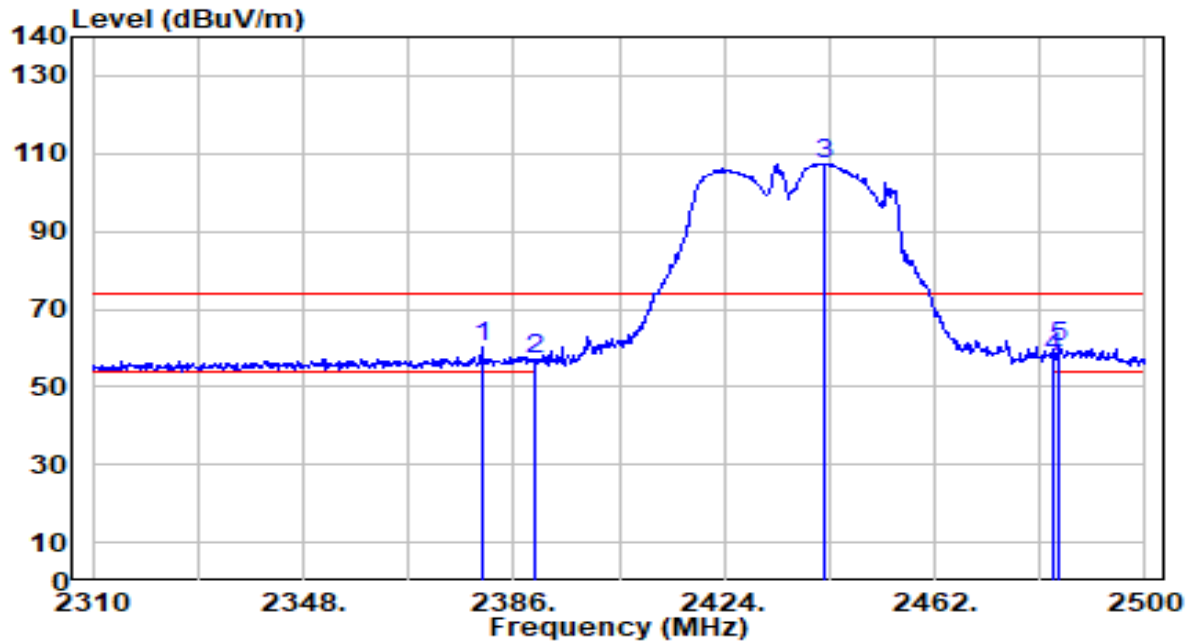


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.300	29.47	30.52	59.99	-14.01	74.00	206	208	Peak
2	2390.000	26.50	30.55	57.05	-16.95	74.00	206	208	Peak
3	2442.050	76.78	30.70	107.48	N/A	N/A	206	208	Peak
4	2483.500	26.74	30.81	57.55	-16.45	74.00	206	208	Peak
5	* 2484.610	29.56	30.82	60.38	-13.62	74.00	206	208	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

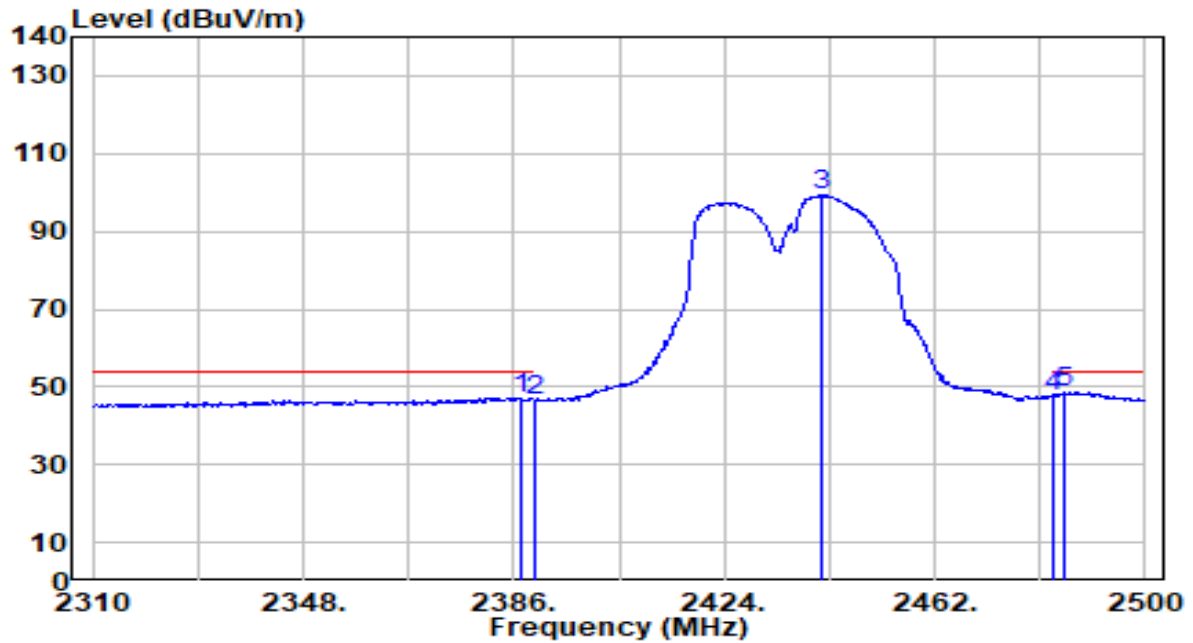


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	16.74	30.54	47.28	-6.72	54.00	206	208	Average
2	2390.000	16.05	30.55	46.60	-7.40	54.00	206	208	Average
3	2441.480	68.69	30.69	99.38	N/A	N/A	206	208	Average
4	2483.500	16.65	30.81	47.47	-6.53	54.00	206	208	Average
5	* 2485.560	17.72	30.82	48.54	-5.46	54.00	206	208	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

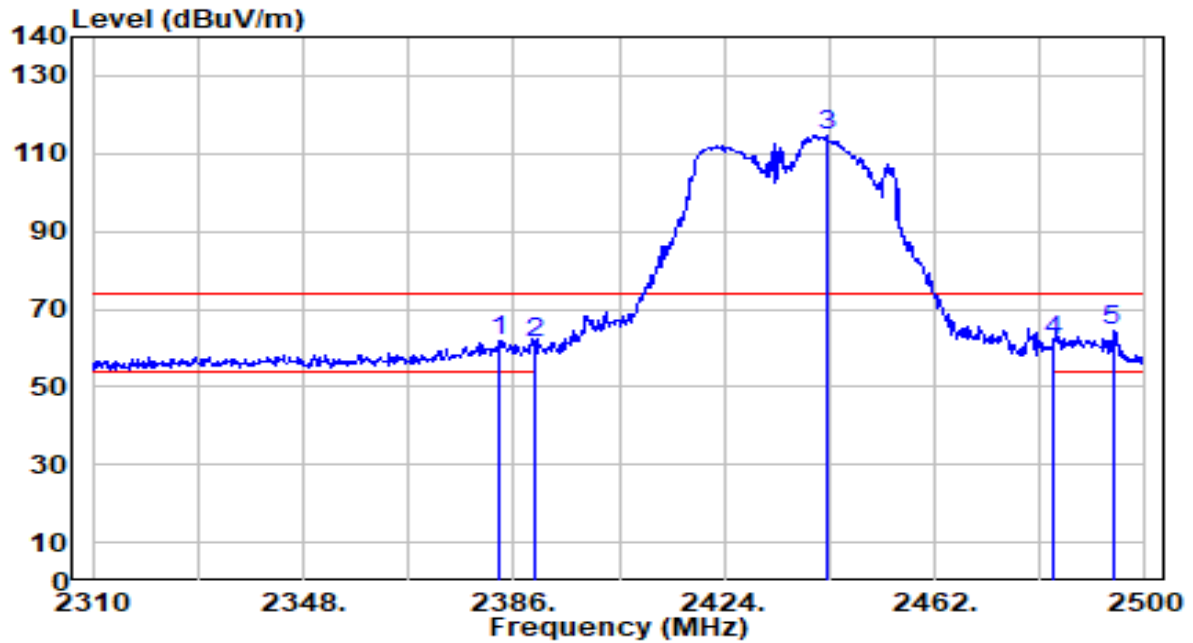


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.340	31.14	30.53	61.66	-12.34	74.00	184	164	Peak
2	2390.000	30.66	30.55	61.21	-12.79	74.00	184	164	Peak
3	2442.430	84.03	30.70	114.72	N/A	N/A	184	164	Peak
4	2483.500	30.90	30.81	61.72	-12.28	74.00	184	164	Peak
5	* 2494.110	33.85	30.84	64.70	-9.30	74.00	184	164	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

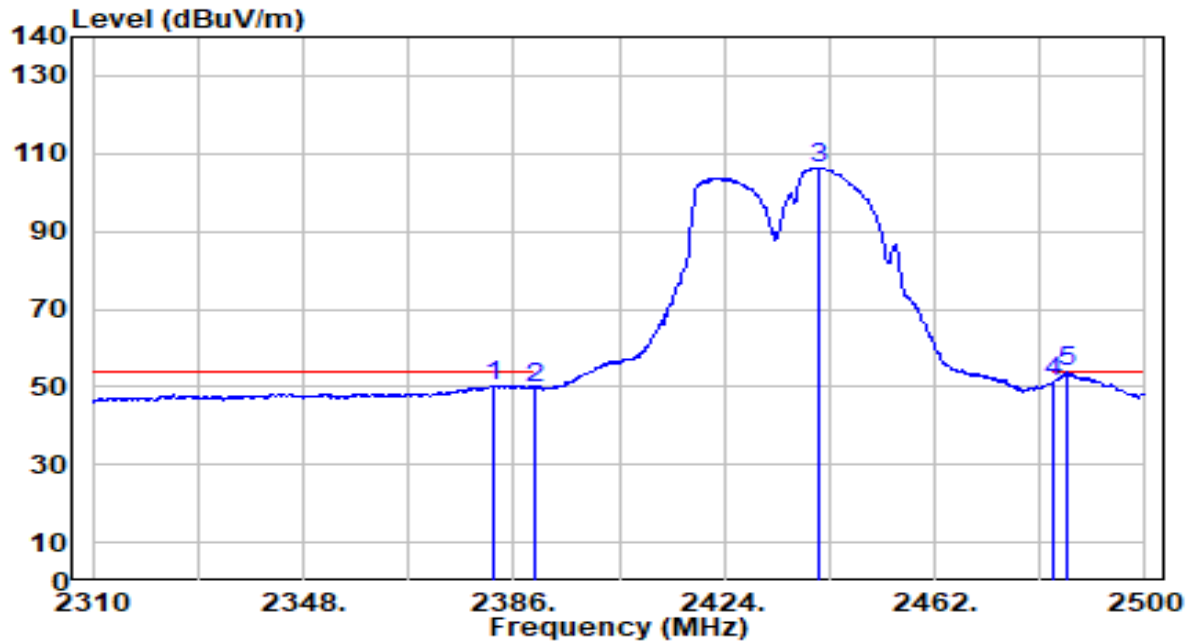


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.200	19.78	30.53	50.31	-3.69	54.00	184	164	Average
2	2390.000	19.03	30.55	49.57	-4.43	54.00	184	164	Average
3	2441.100	75.73	30.69	106.42	N/A	N/A	184	164	Average
4	2483.500	20.50	30.81	51.31	-2.69	54.00	184	164	Average
5	* 2485.940	22.93	30.82	53.75	-0.25	54.00	184	164	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

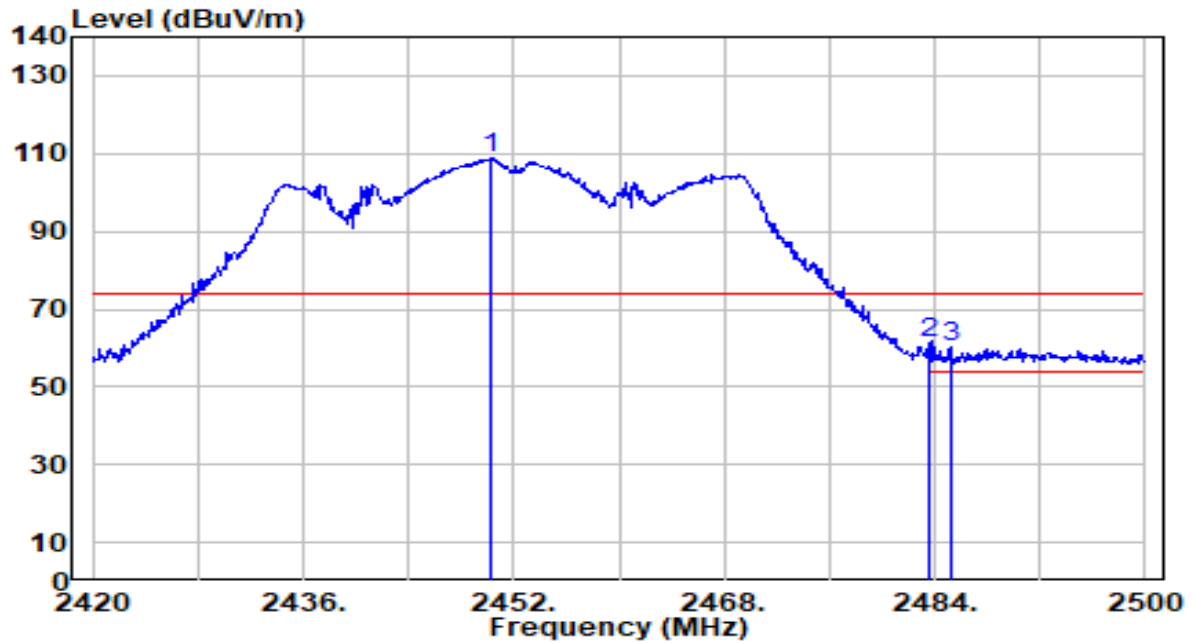


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.160	77.87	30.72	108.58	N/A	N/A	223	201	Peak
2	*	2483.500	30.59	30.81	61.40	-12.60	74.00	223	201	Peak
3		2485.200	29.18	30.82	60.00	-14.00	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

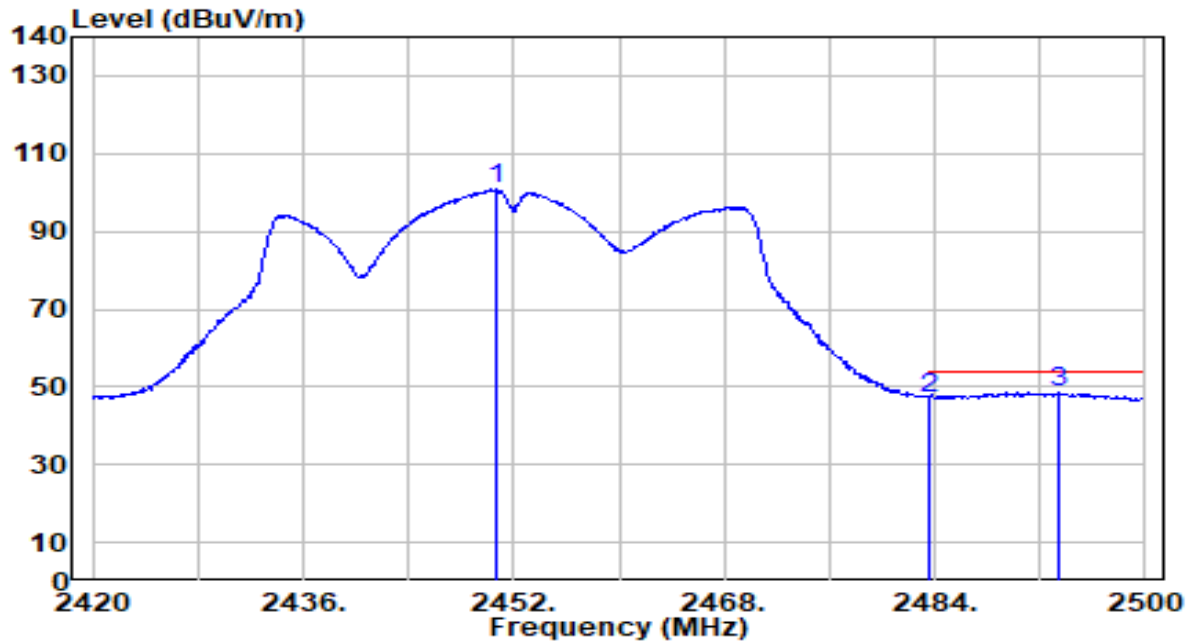


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.640	70.00	30.72	100.72	N/A	N/A	223	201	Average
2	2483.500	16.40	30.81	47.21	-6.79	54.00	223	201	Average
3	* 2493.440	17.75	30.84	48.59	-5.41	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

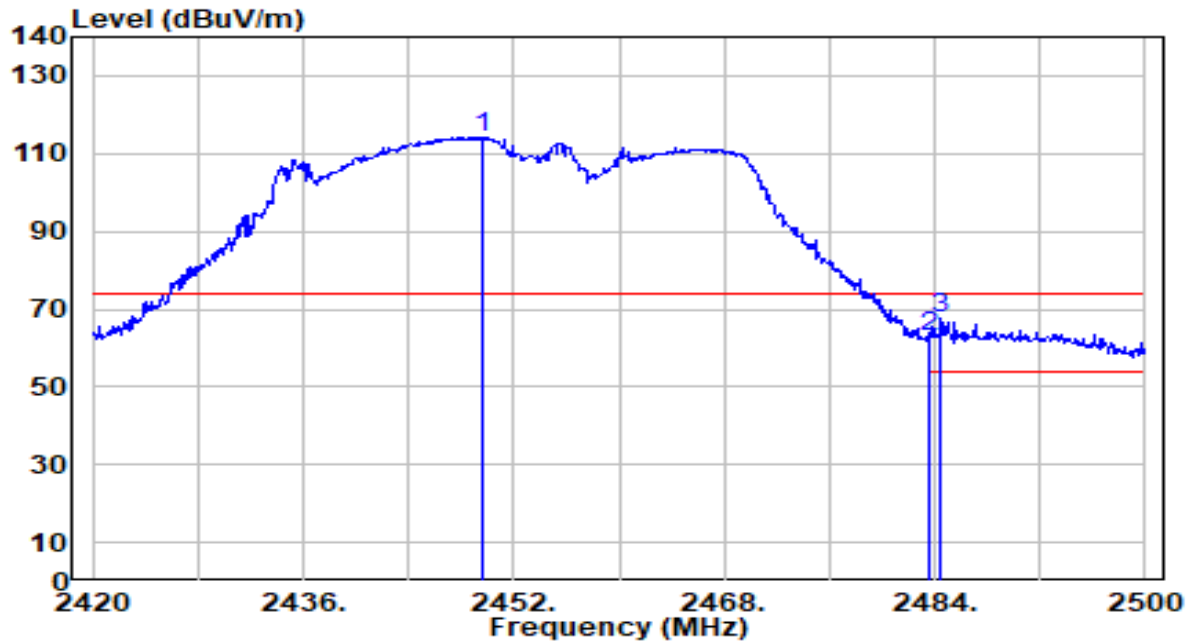


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.680	83.45	30.72	114.17	N/A	N/A	219	180	Peak
2	2483.500	32.29	30.81	63.10	-10.90	74.00	219	180	Peak
3	* 2484.480	36.76	30.82	67.57	-6.43	74.00	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

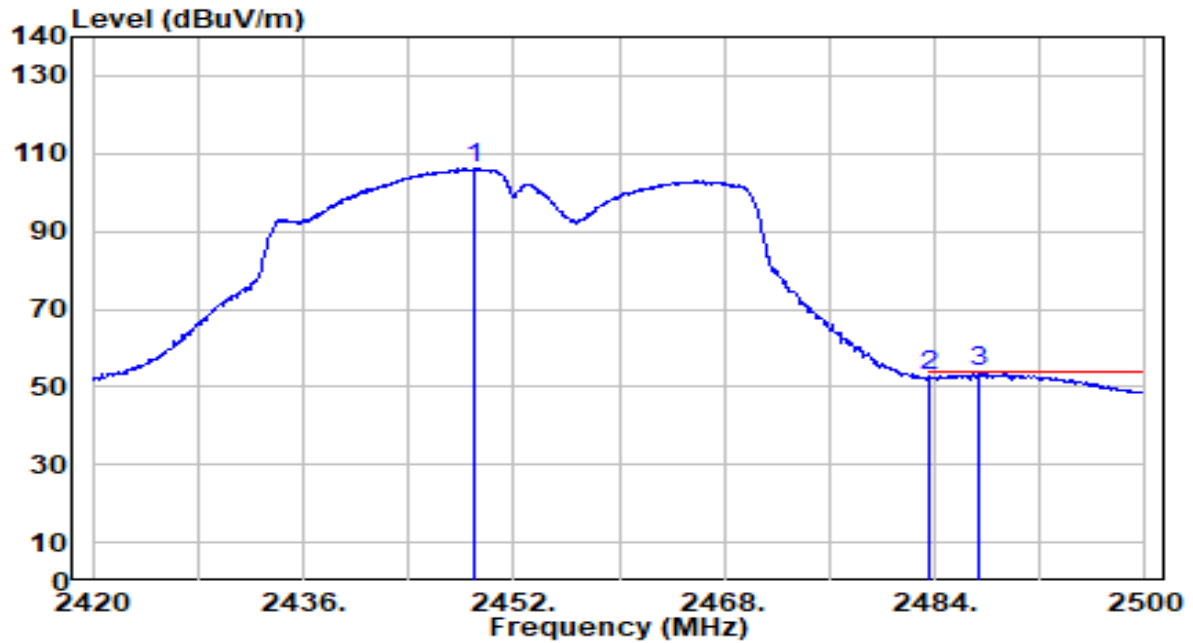


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.960	75.51	30.72	106.22	N/A	N/A	219	180	Average
2	2483.500	21.86	30.81	52.67	-1.33	54.00	219	180	Average
3	* 2487.280	22.95	30.82	53.77	-0.23	54.00	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

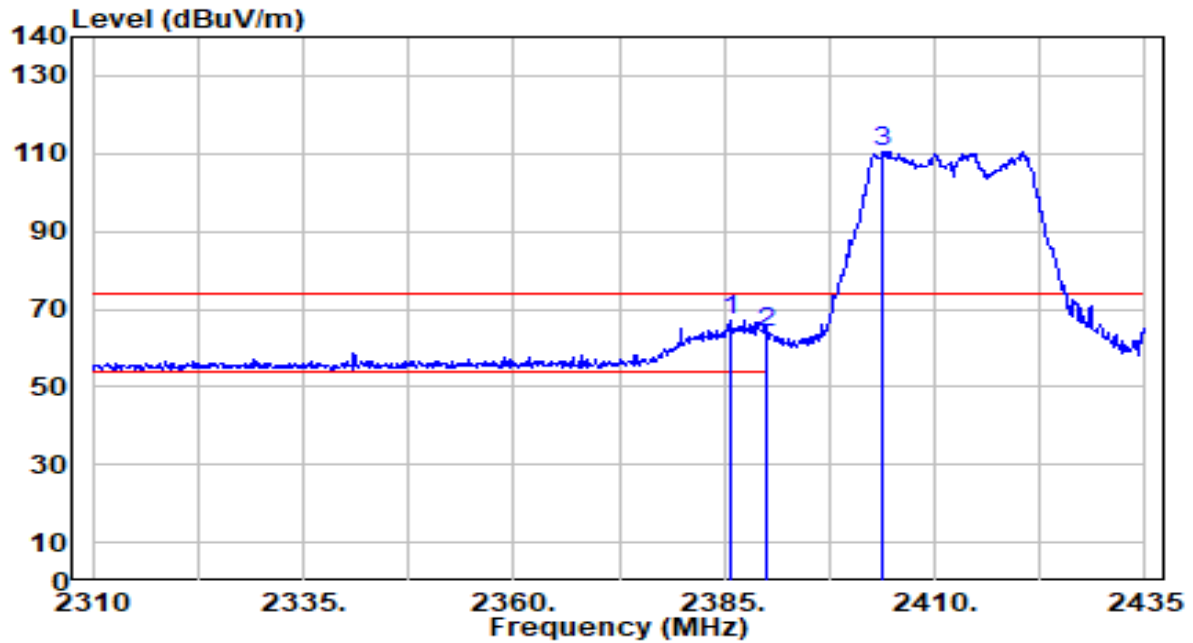


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	36.70	30.54	67.24	-6.76	74.00	225	180	Peak
2		2390.000	33.27	30.55	63.82	-10.18	74.00	225	180	Peak
3		2403.875	79.98	30.59	110.57	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

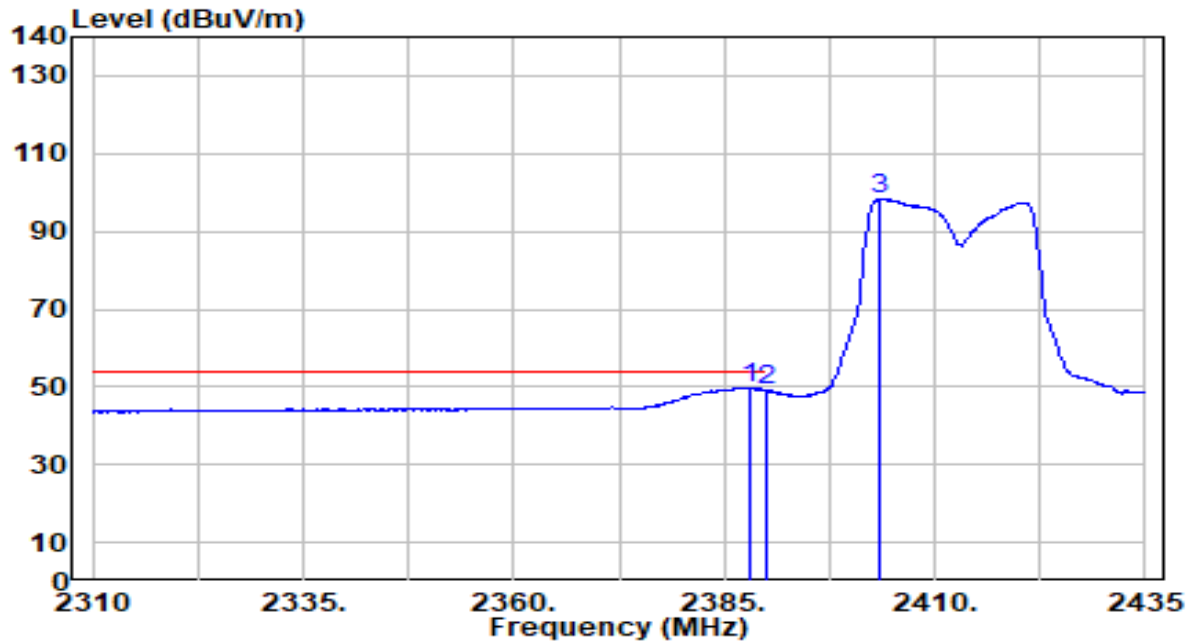


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	19.21	30.54	49.75	-4.25	54.00	225	180	Average
2		2390.000	18.53	30.55	49.07	-4.93	54.00	225	180	Average
3		2403.500	67.69	30.59	98.28	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

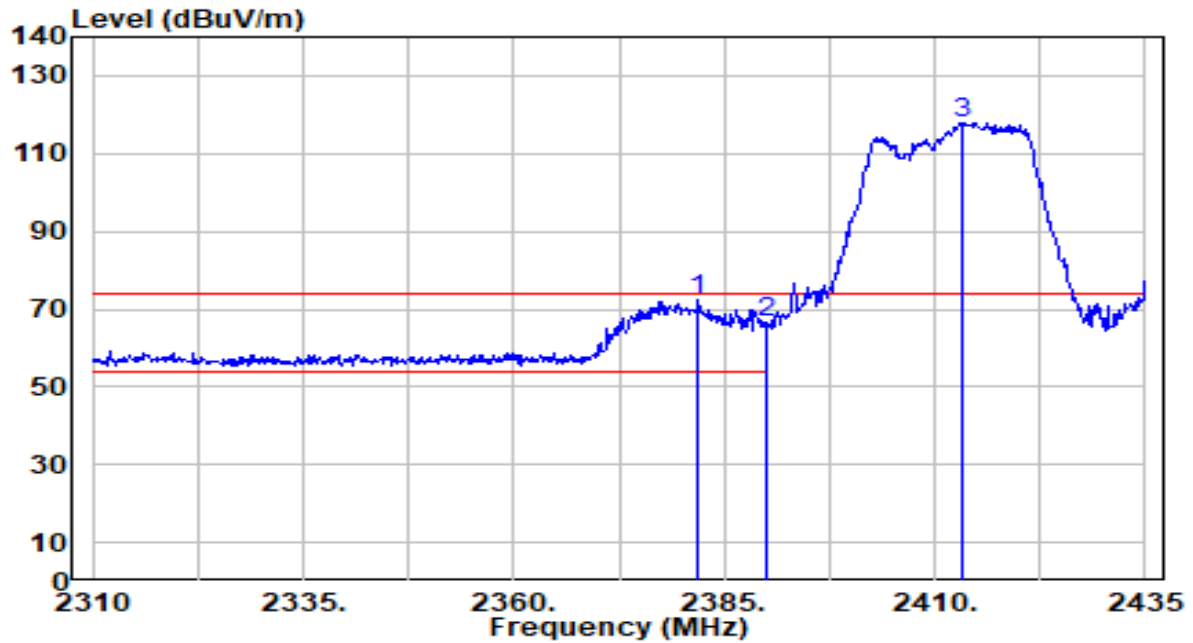


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.875	41.75	30.52	72.28	-1.72	74.00	207	160	Peak
2		2390.000	36.17	30.55	66.71	-7.29	74.00	207	160	Peak
3		2413.250	87.39	30.61	118.00	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

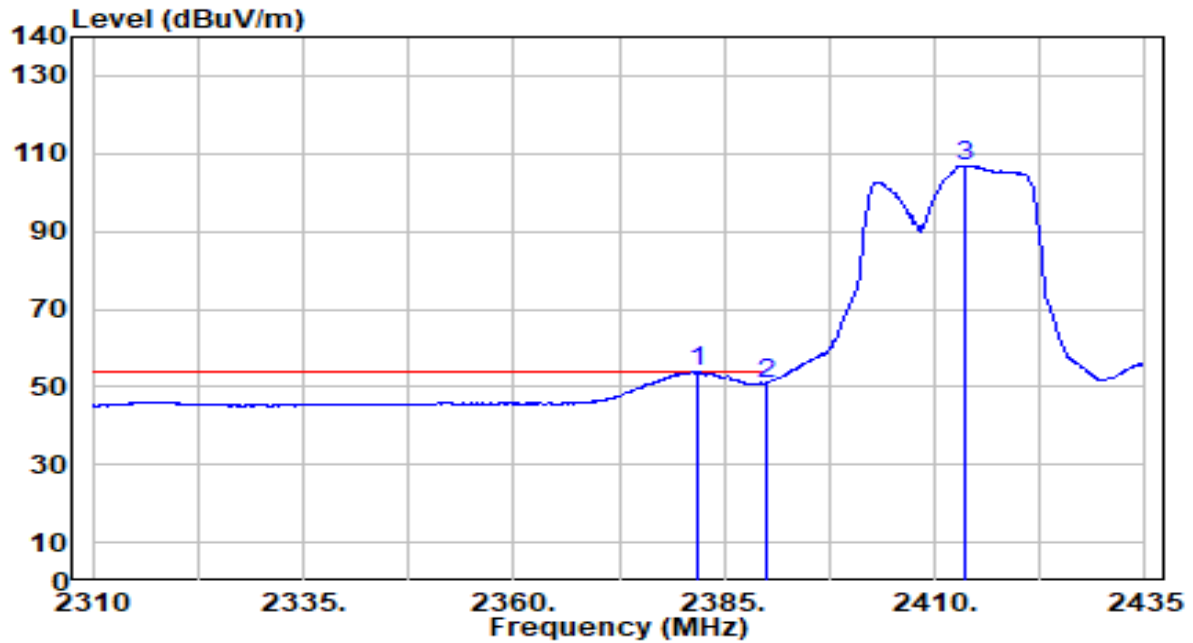


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.750	23.22	30.52	53.74	-0.26	54.00	207	160	Average
2		2390.000	20.41	30.55	50.96	-3.04	54.00	207	160	Average
3		2413.750	76.31	30.62	106.92	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

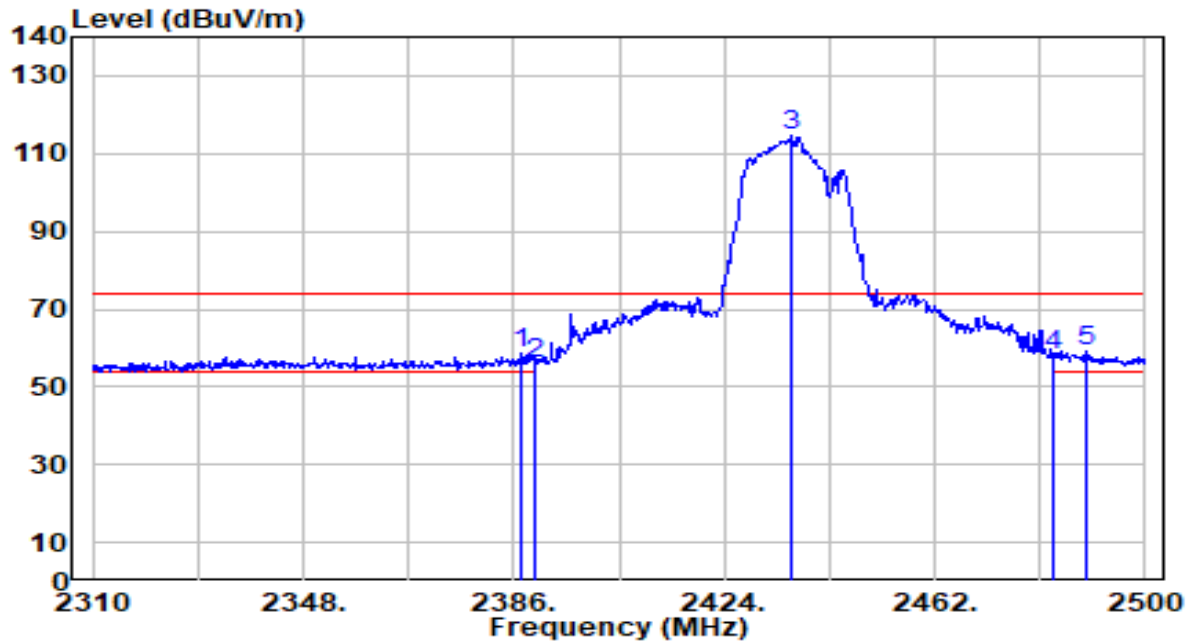


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	28.04	30.54	58.58	-15.42	74.00	206	208	Peak
2	2390.000	25.32	30.55	55.86	-18.14	74.00	206	208	Peak
3	2436.160	83.81	30.68	114.49	N/A	N/A	206	208	Peak
4	2483.500	27.28	30.81	58.10	-15.90	74.00	206	208	Peak
5	* 2489.550	28.30	30.83	59.13	-14.87	74.00	206	208	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

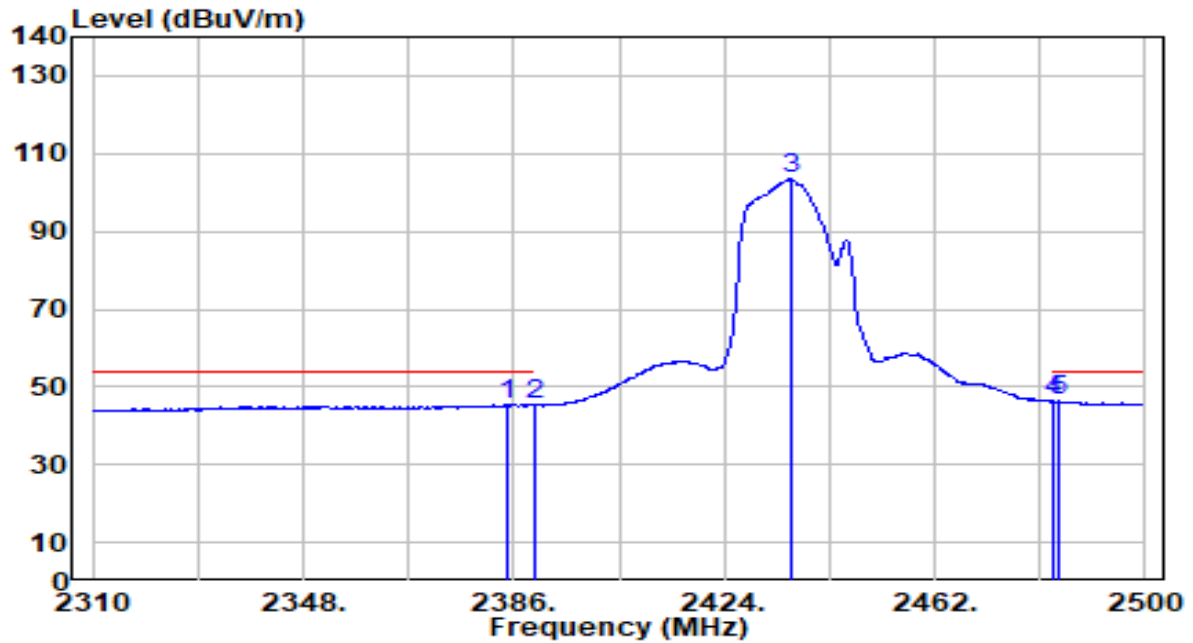


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.670	14.95	30.53	45.49	-8.51	54.00	206	208	Average
2		2390.000	14.67	30.55	45.21	-8.79	54.00	206	208	Average
3		2436.160	72.66	30.68	103.34	N/A	N/A	206	208	Average
4	*	2483.500	15.58	30.81	46.39	-7.61	54.00	206	208	Average
5		2484.420	15.45	30.82	46.26	-7.74	54.00	206	208	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

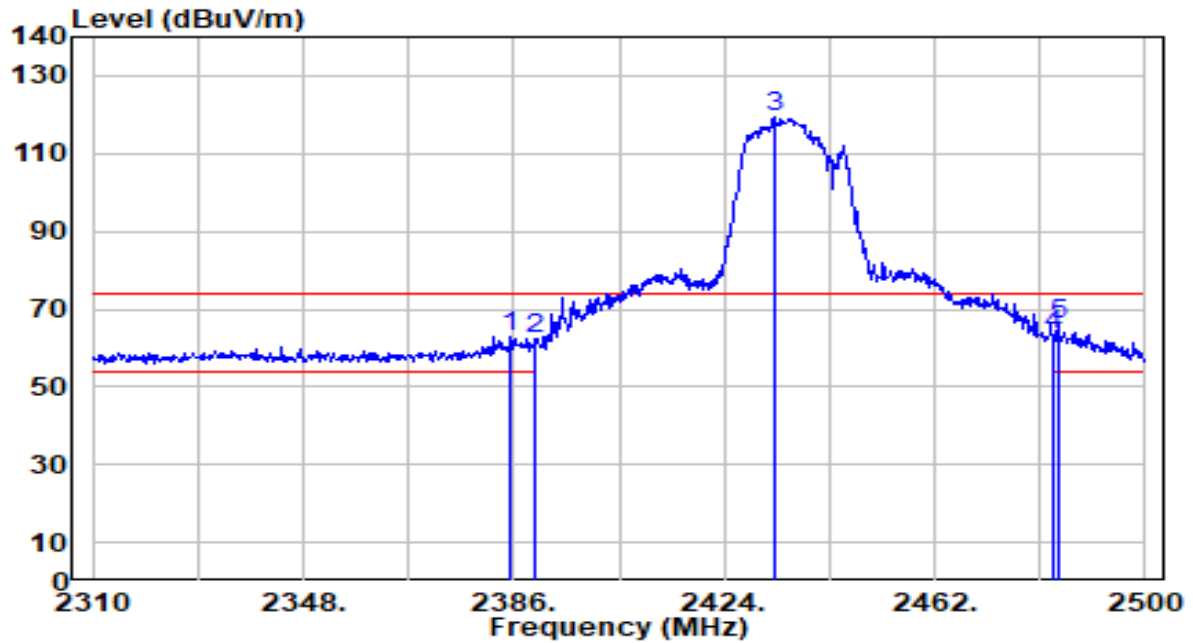


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	32.27	30.53	62.81	-11.19	74.00	184	164	Peak
2	2390.000	31.79	30.55	62.34	-11.66	74.00	184	164	Peak
3	2433.310	88.50	30.67	119.17	N/A	N/A	184	164	Peak
4	2483.500	32.83	30.81	63.64	-10.36	74.00	184	164	Peak
5	* 2484.230	35.39	30.82	66.21	-7.79	74.00	184	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

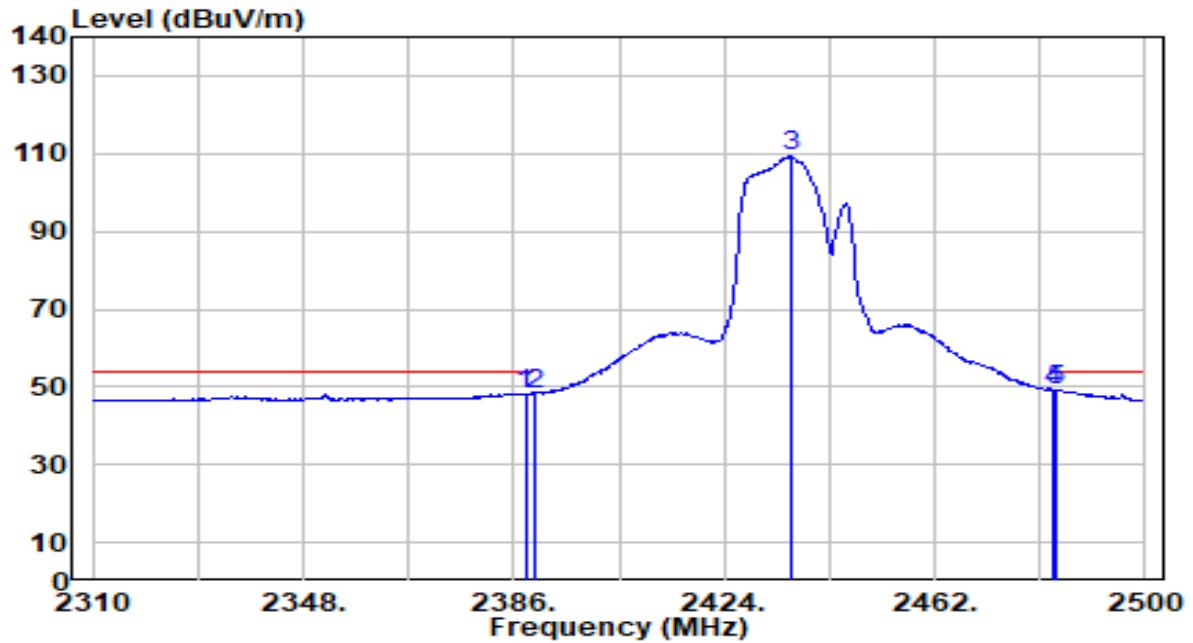


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.090	17.77	30.54	48.31	-5.69	54.00	184	164	Average
2	2390.000	17.78	30.55	48.33	-5.67	54.00	184	164	Average
3	2436.160	78.66	30.68	109.33	N/A	N/A	184	164	Average
4	2483.500	18.23	30.81	49.05	-4.95	54.00	184	164	Average
5	* 2484.040	18.36	30.81	49.18	-4.82	54.00	184	164	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

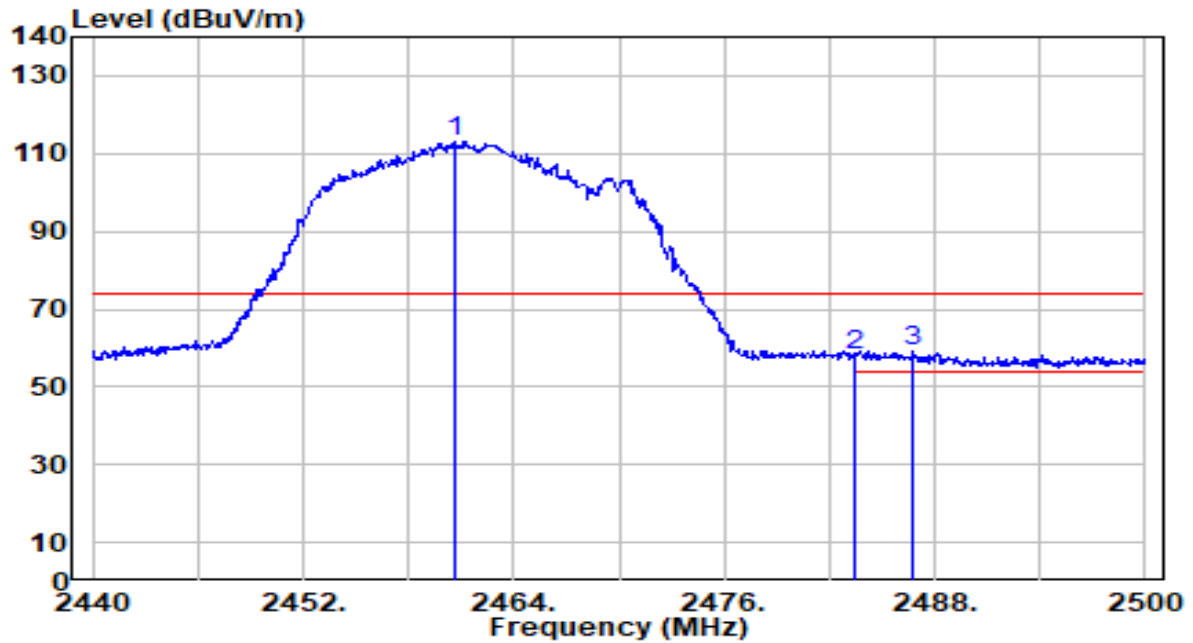


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.580	82.29	30.75	113.04	N/A	N/A	223	201	Peak
2	2483.500	27.06	30.81	57.87	-16.13	74.00	223	201	Peak
3	* 2486.800	28.18	30.82	59.00	-15.00	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

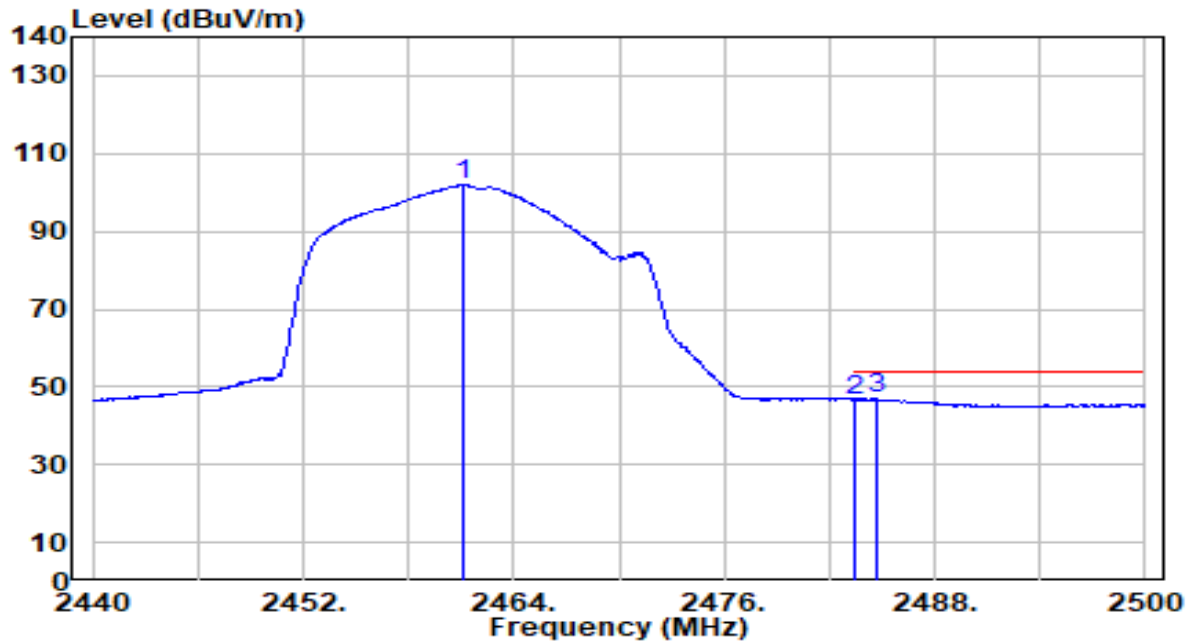


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.180	71.22	30.75	101.97	N/A	N/A	223	201	Average
2		2483.500	15.86	30.81	46.67	-7.33	54.00	223	201	Average
3	*	2484.640	16.28	30.82	47.10	-6.90	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

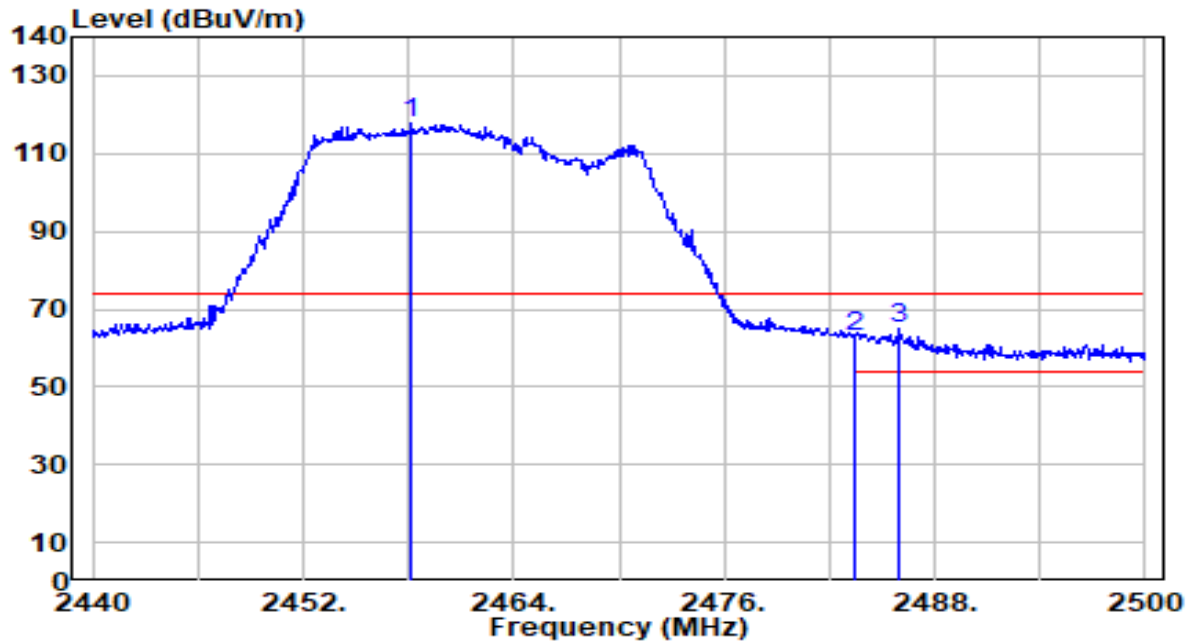


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.180	87.18	30.74	117.92	N/A	N/A	219	180	Peak
2	2483.500	31.99	30.81	62.80	-11.20	74.00	219	180	Peak
3	* 2486.020	33.93	30.82	64.75	-9.25	74.00	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

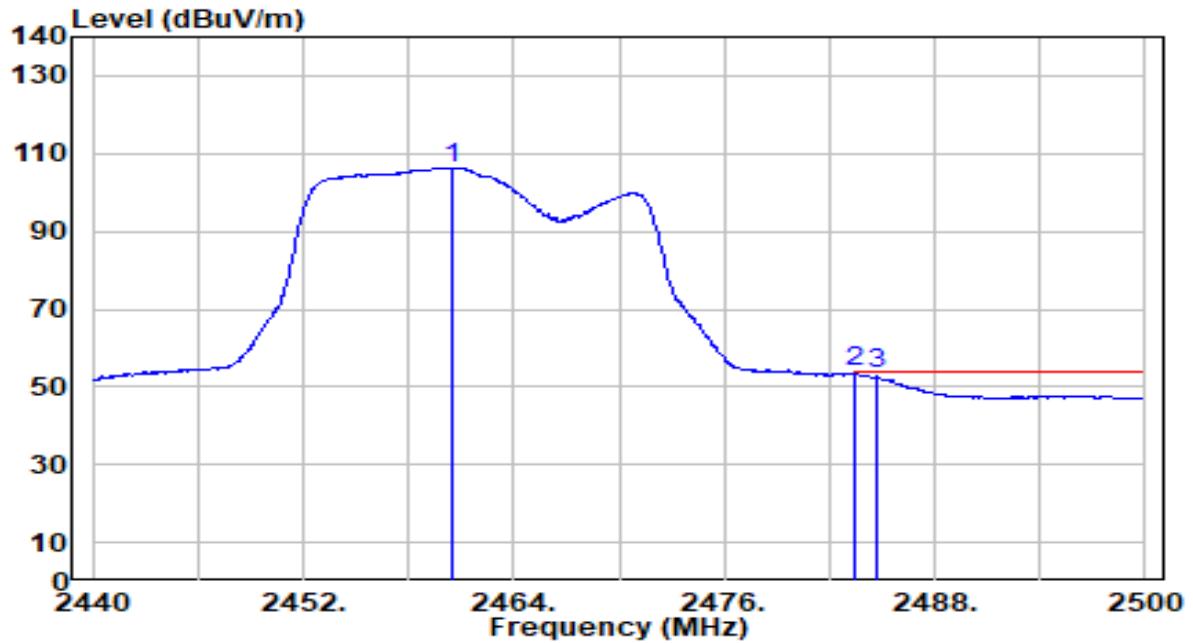


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.520	75.60	30.75	106.34	N/A	N/A	219	180	Average
2	*	2483.500	22.97	30.81	53.78	-0.22	54.00	219	180	Average
3		2484.640	22.35	30.82	53.16	-0.84	54.00	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

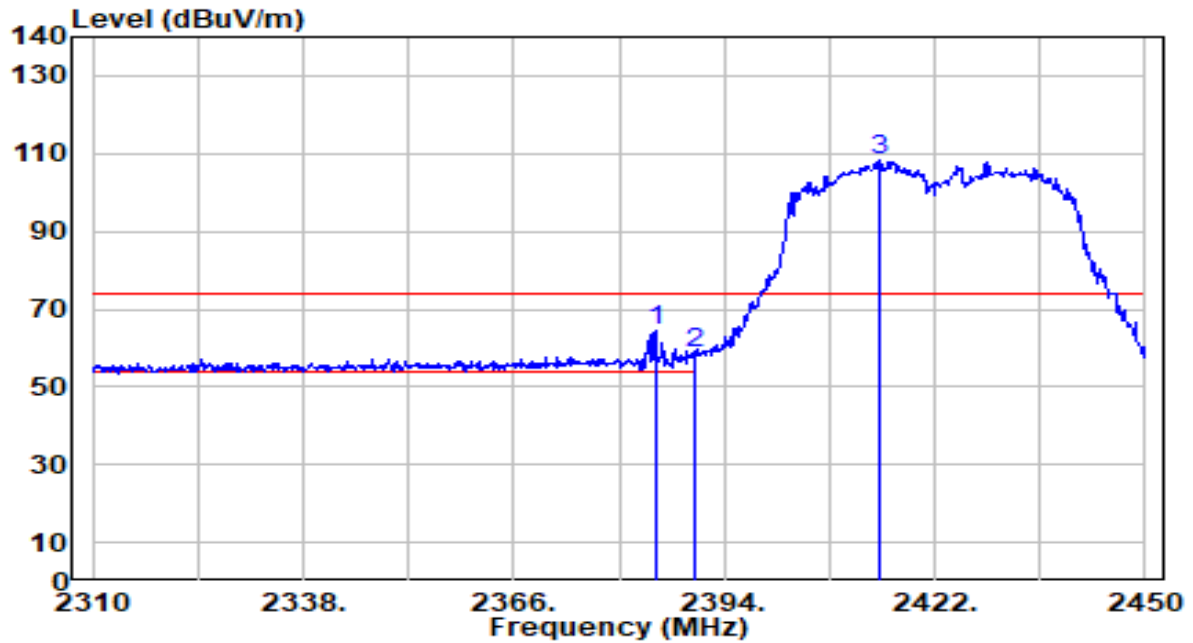


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.900	34.01	30.53	64.54	-9.46	74.00	225	180	Peak
2		2390.000	28.33	30.55	58.87	-15.13	74.00	225	180	Peak
3		2414.720	77.56	30.62	108.18	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

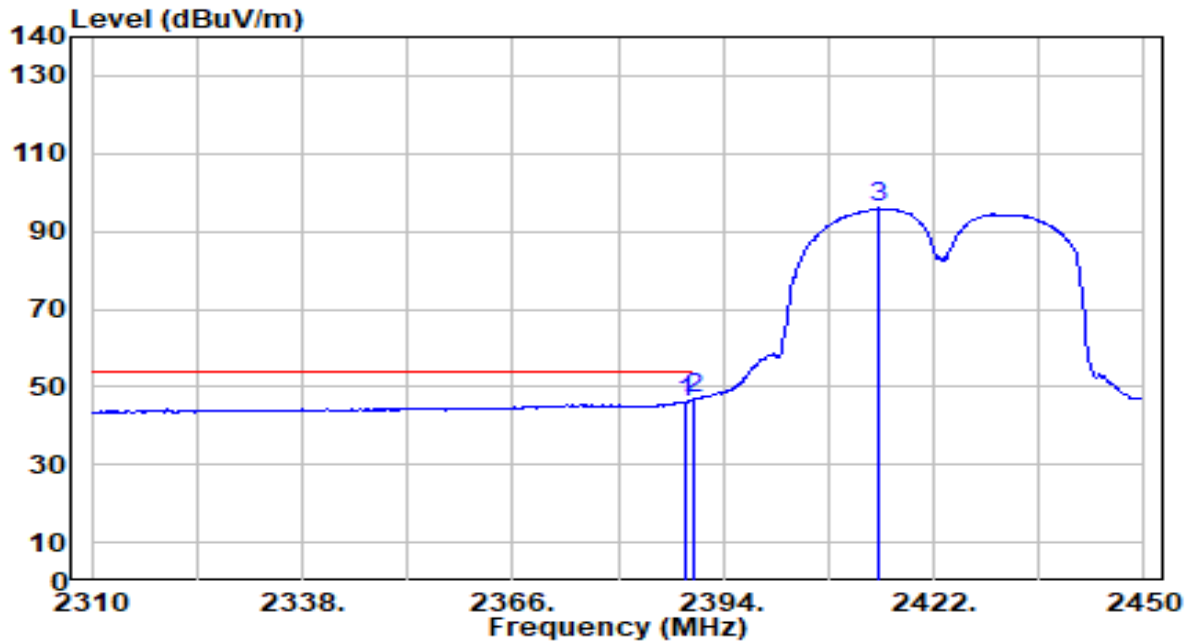


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.960	15.67	30.54	46.22	-7.78	54.00	225	180	Average
2	*	2390.000	16.31	30.55	46.85	-7.15	54.00	225	180	Average
3		2414.580	65.31	30.62	95.93	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

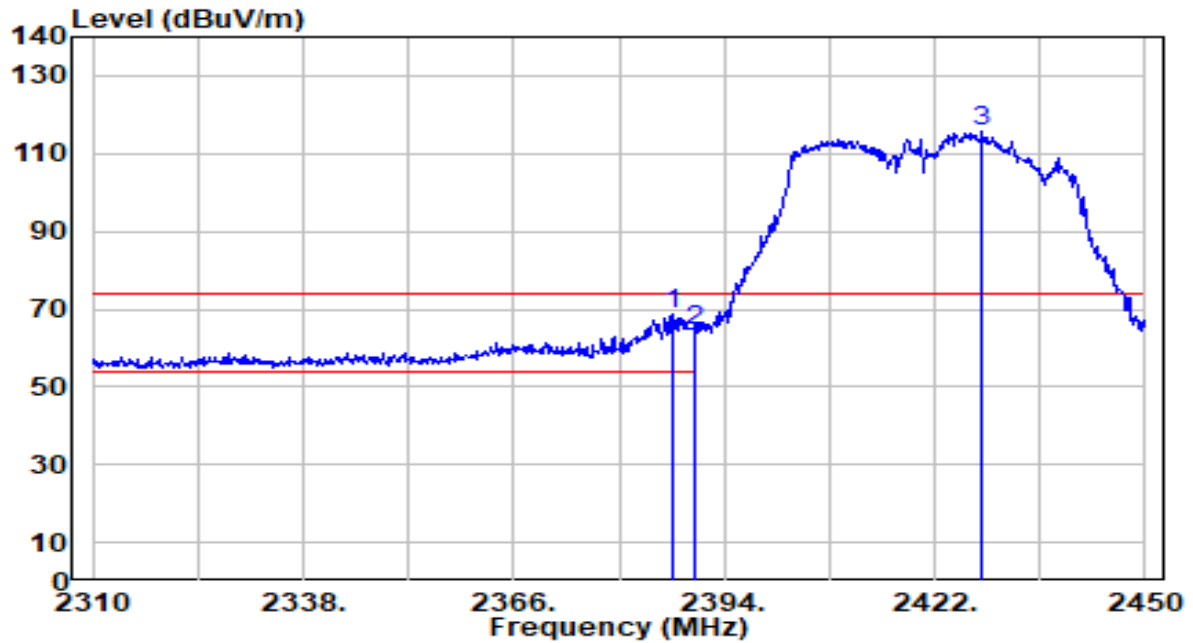


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	38.20	30.54	68.74	-5.26	74.00	207	160	Peak
2		2390.000	33.98	30.55	64.52	-9.48	74.00	207	160	Peak
3		2428.300	84.83	30.66	115.49	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

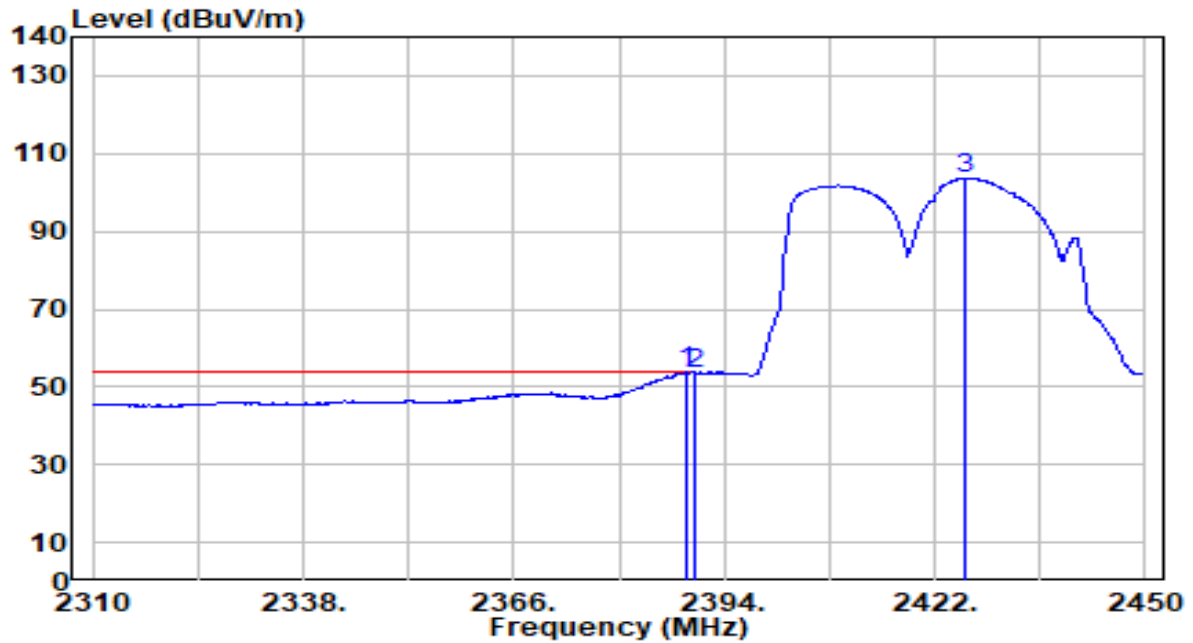


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	23.18	30.54	53.73	-0.27	54.00	207	160	Average
2		2390.000	23.02	30.55	53.57	-0.43	54.00	207	160	Average
3		2426.200	73.01	30.65	103.66	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

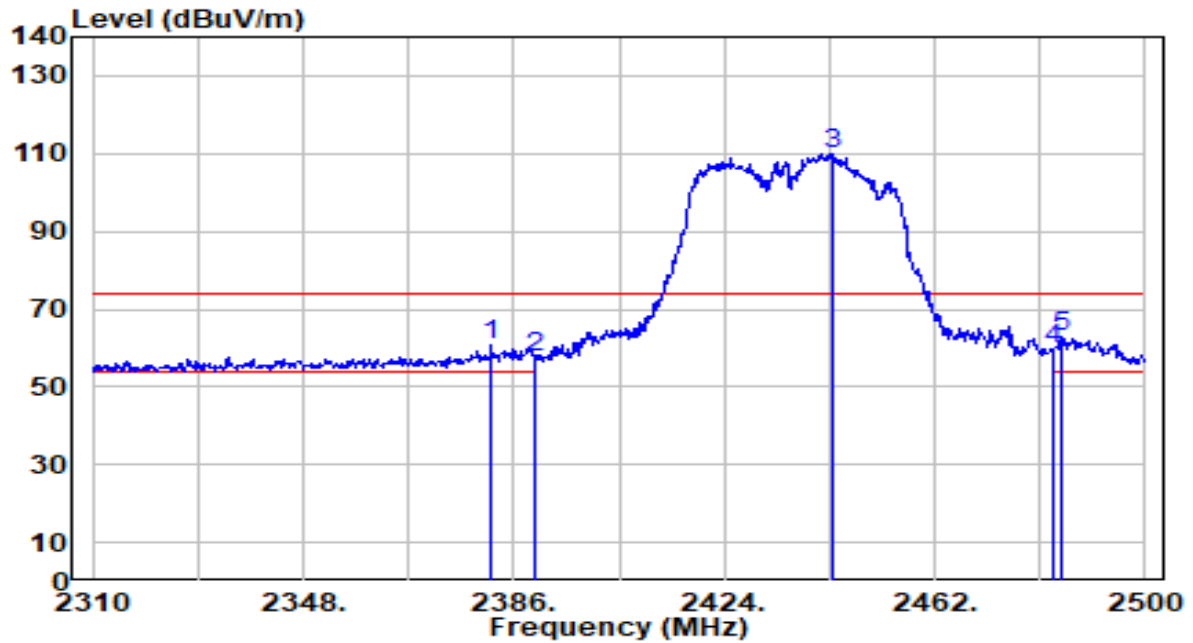


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2381.820	30.00	30.52	60.53	-13.47	74.00	206	208	Peak
2	2390.000	26.87	30.55	57.42	-16.58	74.00	206	208	Peak
3	2443.380	79.44	30.70	110.14	N/A	N/A	206	208	Peak
4	2483.500	29.07	30.81	59.88	-14.12	74.00	206	208	Peak
5	* 2484.800	32.30	30.82	63.12	-10.88	74.00	206	208	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

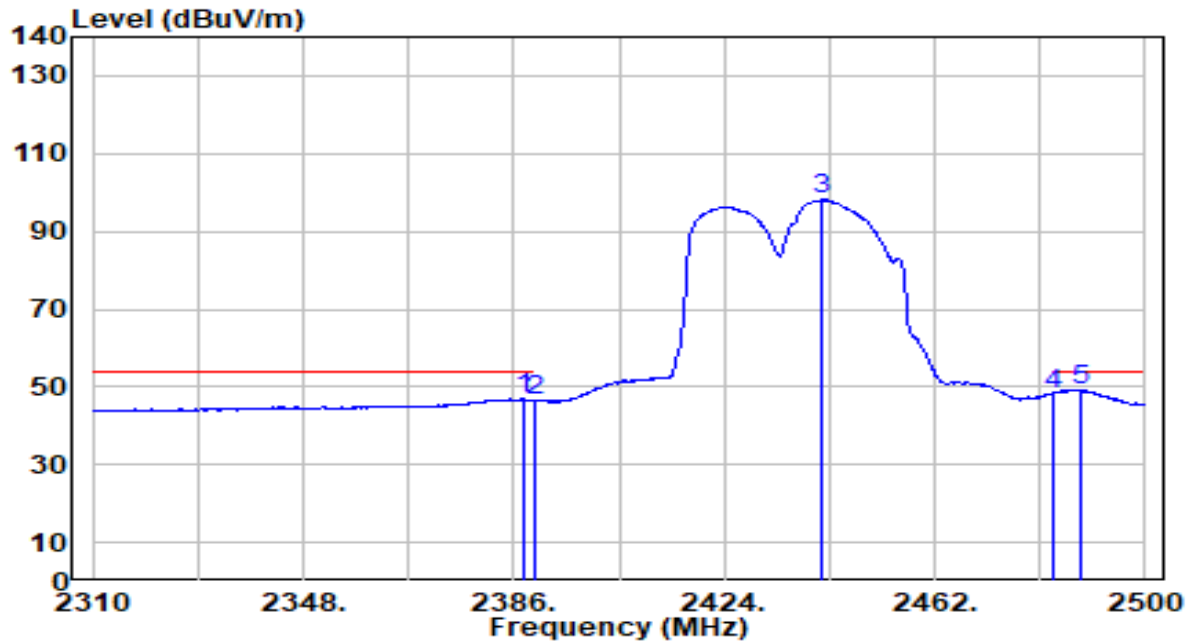


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	16.26	30.54	46.81	-7.19	54.00	206	208	Average
2	2390.000	15.94	30.55	46.49	-7.51	54.00	206	208	Average
3	2441.670	67.39	30.69	98.08	N/A	N/A	206	208	Average
4	2483.500	17.43	30.81	48.25	-5.75	54.00	206	208	Average
5	* 2488.600	18.33	30.83	49.15	-4.85	54.00	206	208	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

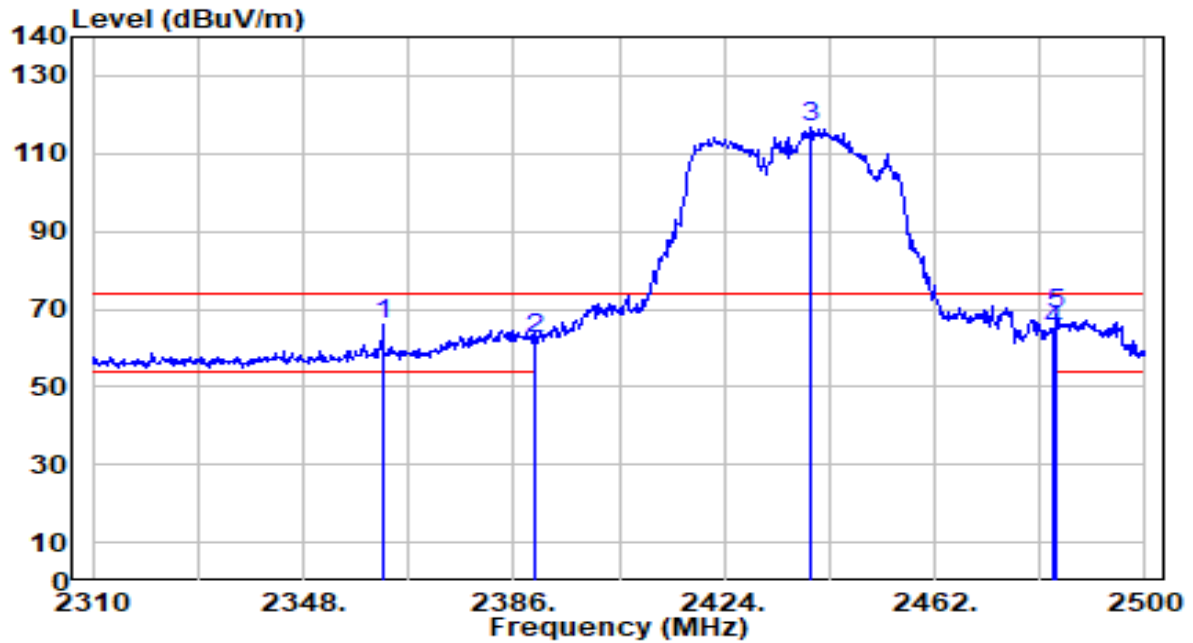


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2362.440	35.32	30.47	65.79	-8.21	74.00	184	164	Peak
2	2390.000	31.55	30.55	62.10	-11.90	74.00	184	164	Peak
3	2439.770	85.90	30.69	116.59	N/A	N/A	184	164	Peak
4	2483.500	33.89	30.81	64.70	-9.30	74.00	184	164	Peak
5	* 2484.040	37.78	30.81	68.60	-5.40	74.00	184	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

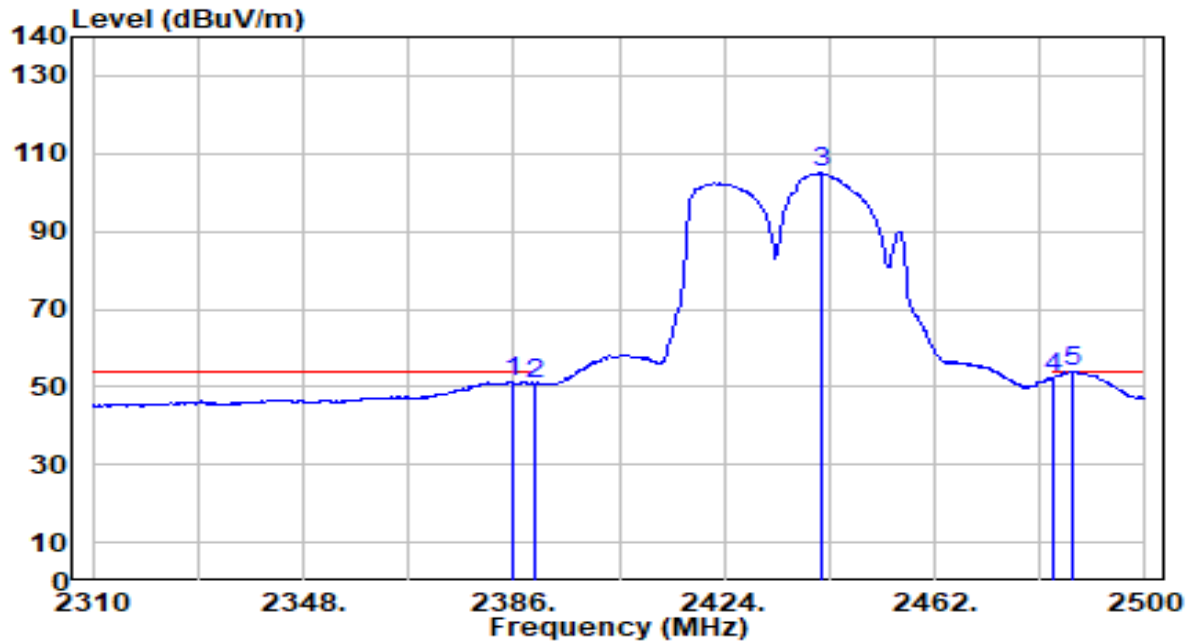


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	20.81	30.54	51.35	-2.65	54.00	184	164	Average
2	2390.000	20.25	30.55	50.80	-3.20	54.00	184	164	Average
3	2441.480	74.19	30.69	104.88	N/A	N/A	184	164	Average
4	2483.500	21.53	30.81	52.35	-1.65	54.00	184	164	Average
5	* 2487.080	23.02	30.82	53.84	-0.16	54.00	184	164	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

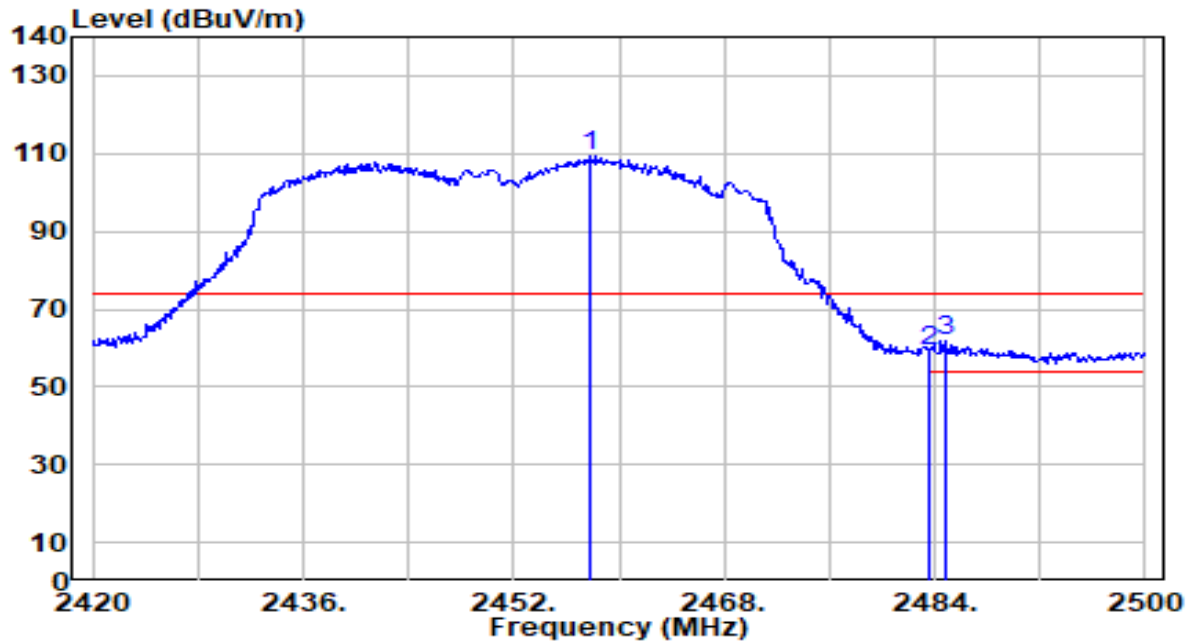


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.760	78.64	30.74	109.38	N/A	N/A	223	201	Peak
2	2483.500	28.56	30.81	59.38	-14.62	74.00	223	201	Peak
3	* 2484.800	31.17	30.82	61.99	-12.01	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

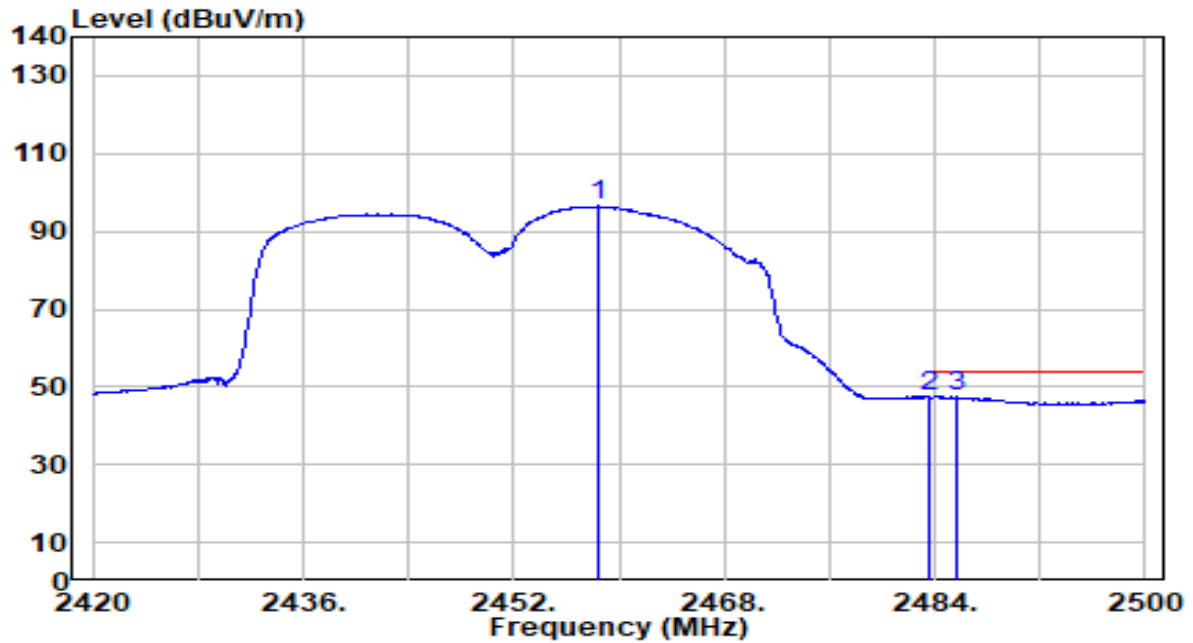


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.480	65.70	30.74	96.44	N/A	N/A	223	201	Average
2	*	2483.500	16.67	30.81	47.49	-6.51	54.00	223	201	Average
3		2485.760	16.52	30.82	47.34	-6.66	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

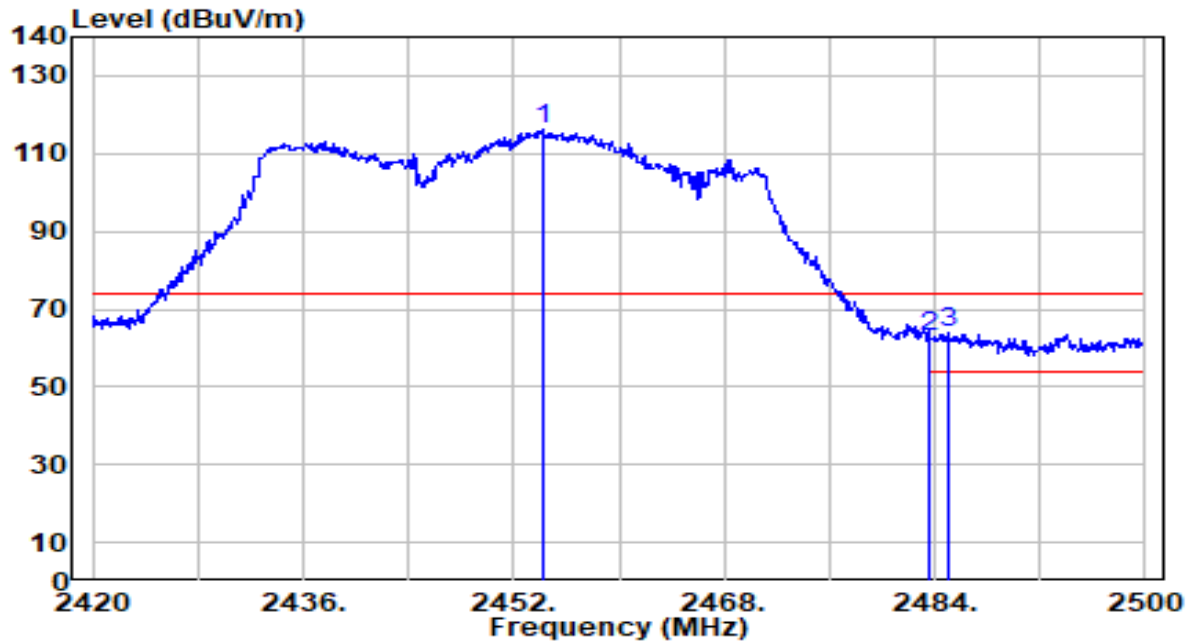


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.240	85.54	30.73	116.27	N/A	N/A	210	180	Peak
2	2483.500	32.28	30.81	63.09	-10.91	74.00	210	180	Peak
3	* 2484.960	33.02	30.82	63.84	-10.16	74.00	210	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

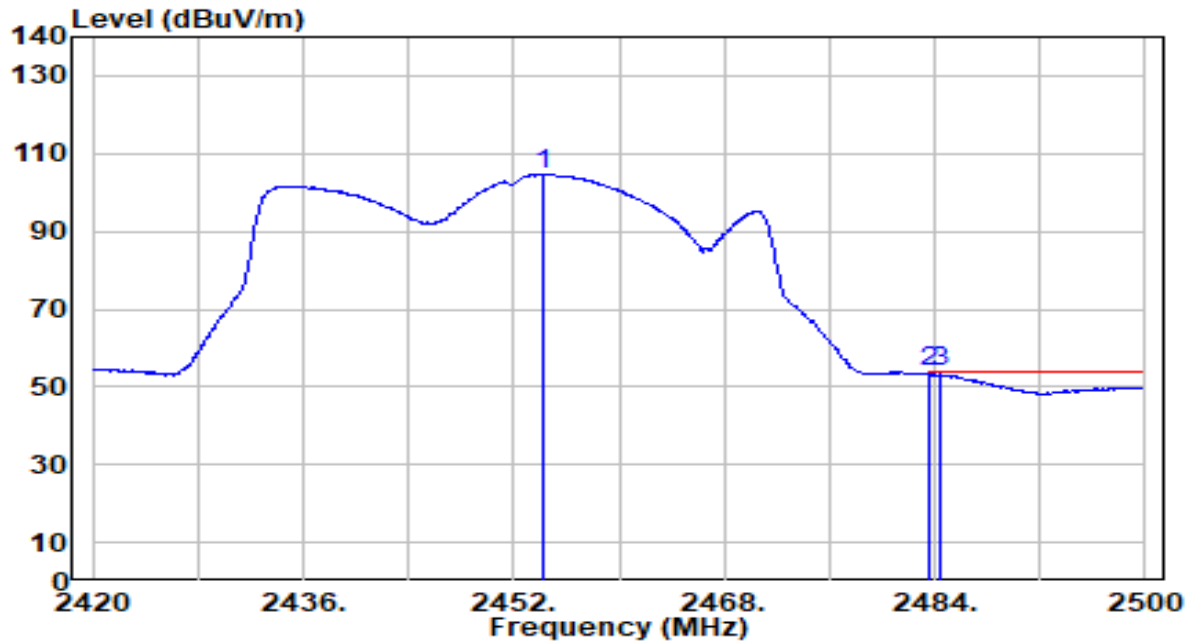


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.160	73.79	30.73	104.52	N/A	N/A	210	180	Average
2	2483.500	22.97	30.81	53.79	-0.21	54.00	210	180	Average
3	* 2484.480	22.98	30.82	53.79	-0.21	54.00	210	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

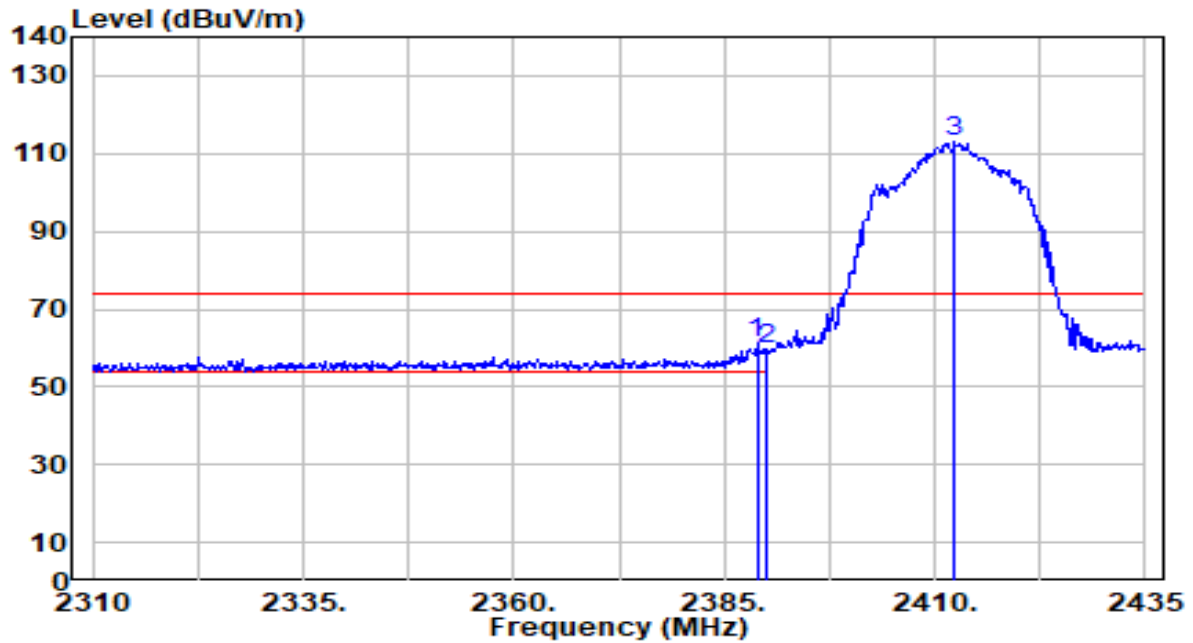


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	30.60	30.54	61.14	-12.86	74.00	225	180	Peak
2		2390.000	29.07	30.55	59.62	-14.38	74.00	225	180	Peak
3		2412.250	82.19	30.61	112.80	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

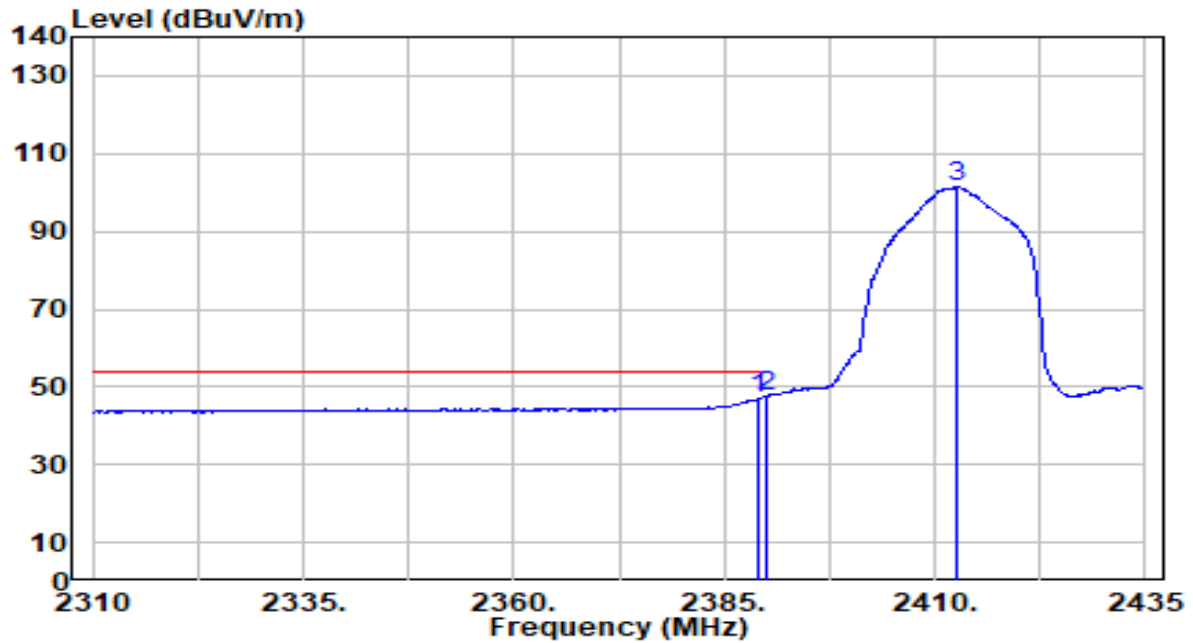


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	16.42	30.54	46.97	-7.03	54.00	225	180	Average
2	*	2390.000	16.96	30.55	47.51	-6.49	54.00	225	180	Average
3		2412.750	70.77	30.61	101.39	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

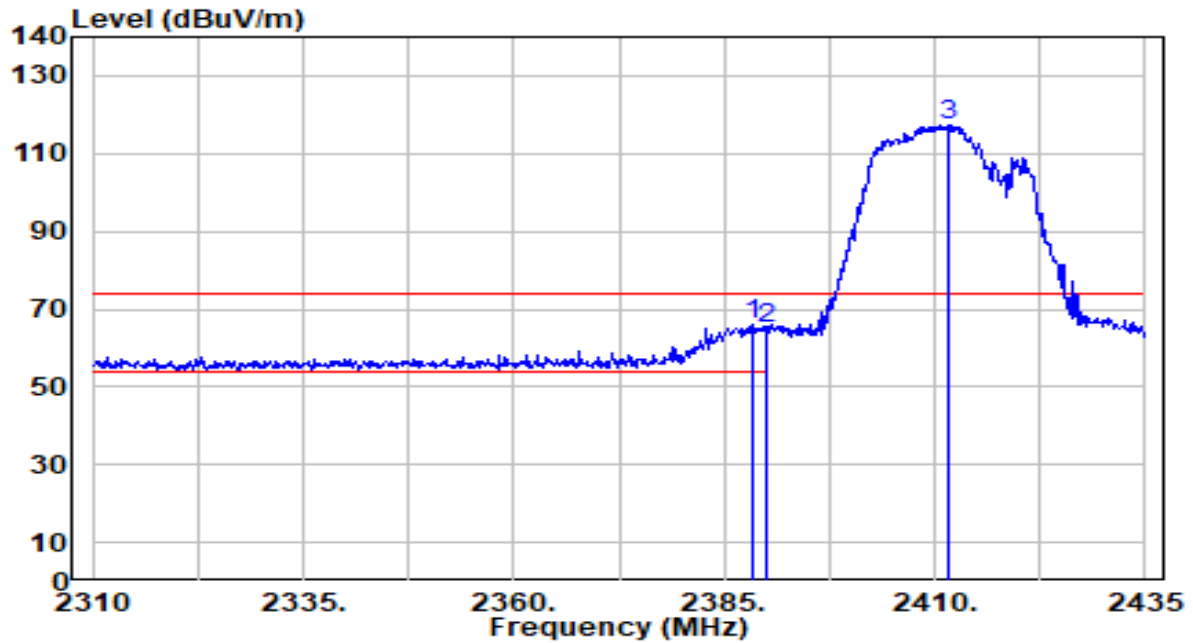


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.375	35.36	30.54	65.90	-8.10	74.00	207	160	Peak
2		2390.000	34.68	30.55	65.23	-8.77	74.00	207	160	Peak
3		2411.750	86.84	30.61	117.45	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	By PoE

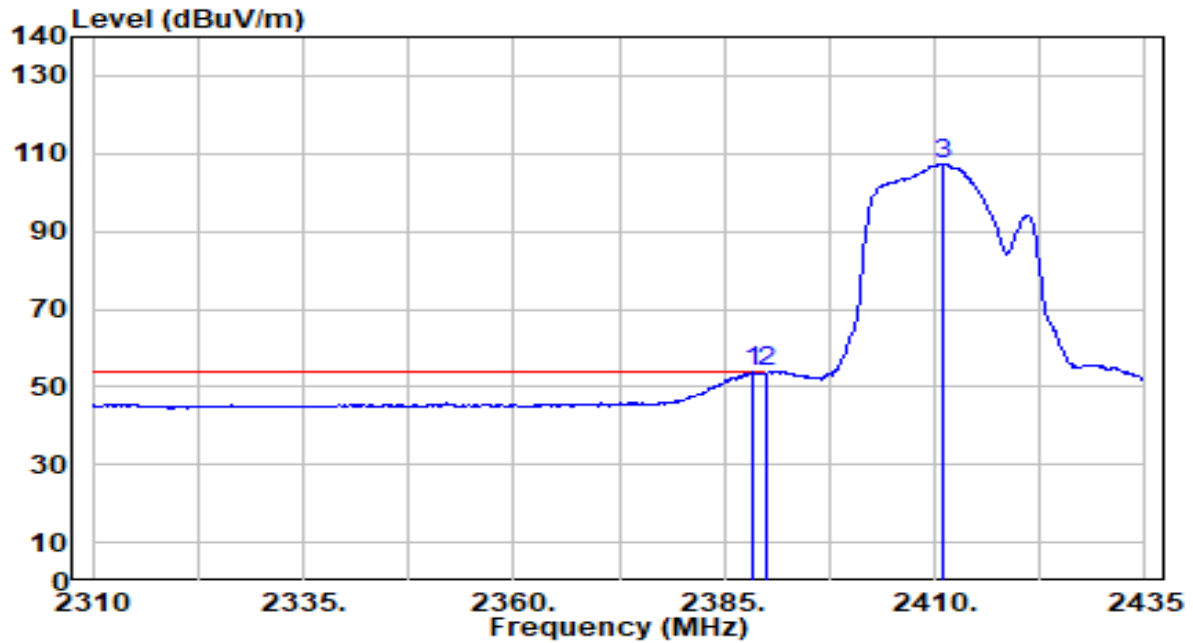


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.500	23.29	30.54	53.83	-0.17	54.00	207	160	Average
2		2390.000	23.18	30.55	53.73	-0.27	54.00	207	160	Average
3		2411.000	76.89	30.61	107.50	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

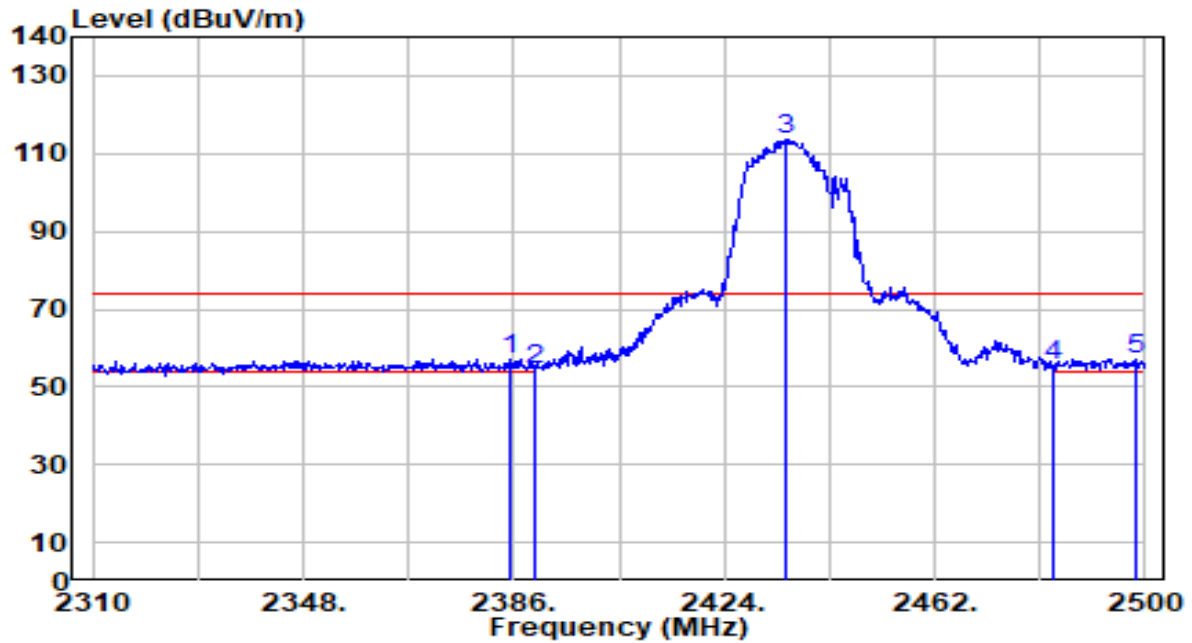


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	26.50	30.53	57.04	-16.96	74.00	206	208	Peak
2	2390.000	24.09	30.55	54.64	-19.36	74.00	206	208	Peak
3	2435.210	82.91	30.68	113.59	N/A	N/A	206	208	Peak
4	2483.500	24.85	30.81	55.66	-18.34	74.00	206	208	Peak
5	* 2498.100	26.45	30.85	57.31	-16.69	74.00	206	208	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

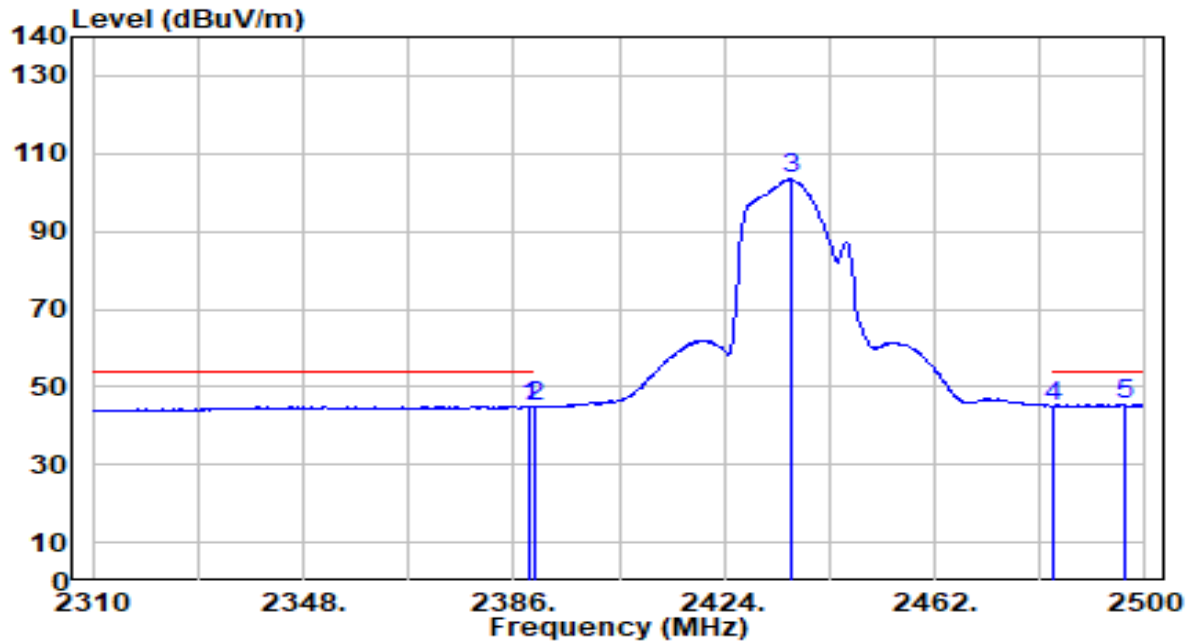


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	14.34	30.54	44.89	-9.11	54.00	206	208	Average
2	2390.000	14.31	30.55	44.86	-9.14	54.00	206	208	Average
3	2435.970	72.77	30.68	103.45	N/A	N/A	206	208	Average
4	2483.500	14.25	30.81	45.06	-8.94	54.00	206	208	Average
5	* 2496.390	14.63	30.85	45.48	-8.52	54.00	206	208	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

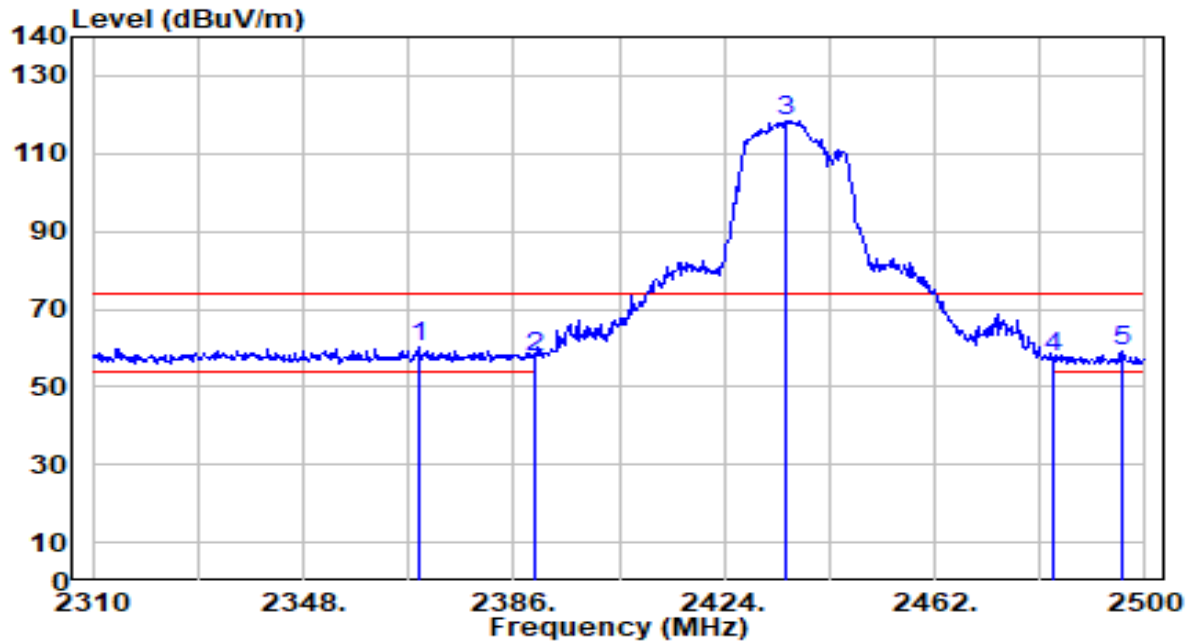


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2368.710	29.57	30.49	60.05	-13.95	74.00	184	164	Peak
2		2390.000	27.23	30.55	57.78	-16.22	74.00	184	164	Peak
3		2435.210	87.92	30.68	118.60	N/A	N/A	184	164	Peak
4		2483.500	26.69	30.81	57.50	-16.50	74.00	184	164	Peak
5		2496.010	28.11	30.85	58.96	-15.04	74.00	184	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

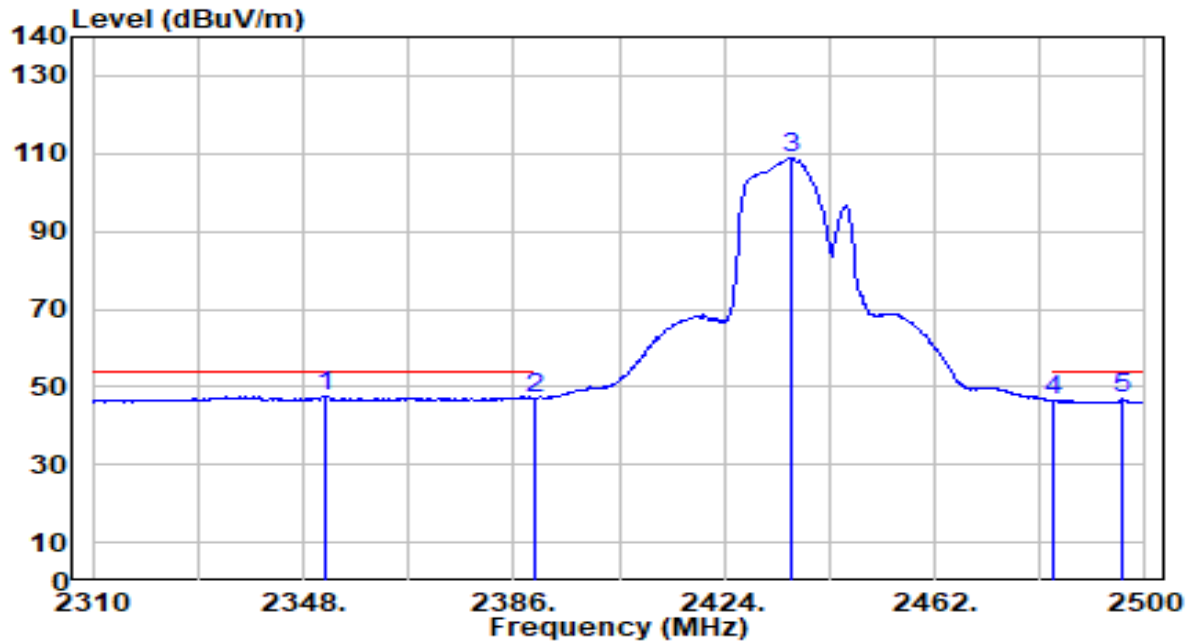


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2351.990	17.22	30.44	47.66	-6.34	54.00	184	164	Average
2		2390.000	16.54	30.55	47.09	-6.91	54.00	184	164	Average
3		2436.160	78.16	30.68	108.84	N/A	N/A	184	164	Average
4		2483.500	15.84	30.81	46.65	-7.35	54.00	184	164	Average
5		2496.010	16.07	30.85	46.92	-7.08	54.00	184	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

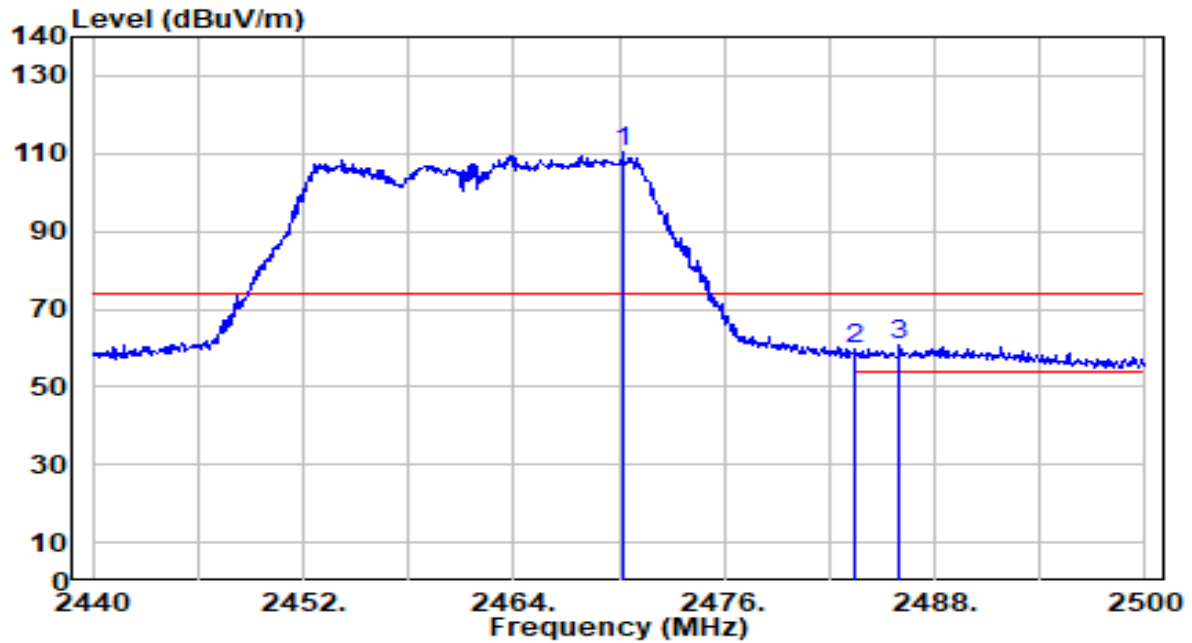


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2470.240	79.38	30.78	110.15	N/A	N/A	223	201	Peak
2	2483.500	28.85	30.81	59.66	-14.34	74.00	223	201	Peak
3	* 2485.960	29.81	30.82	60.63	-13.37	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

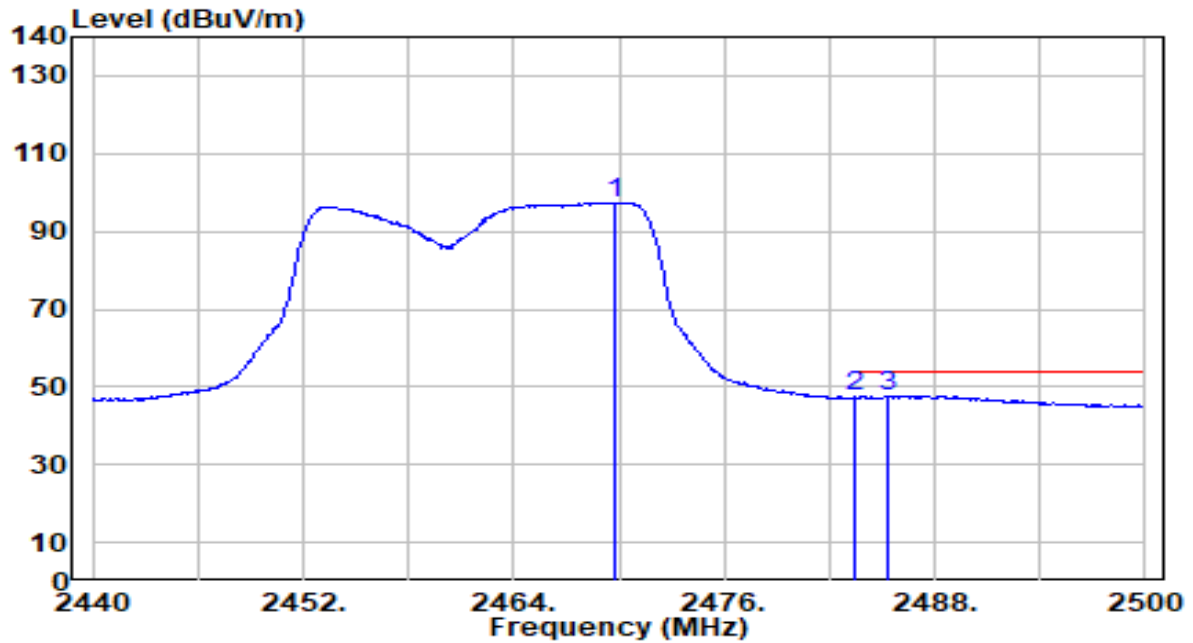


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.700	66.54	30.77	97.32	N/A	N/A	223	201	Average
2	2483.500	16.48	30.81	47.30	-6.70	54.00	223	201	Average
3	* 2485.360	16.76	30.82	47.58	-6.42	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

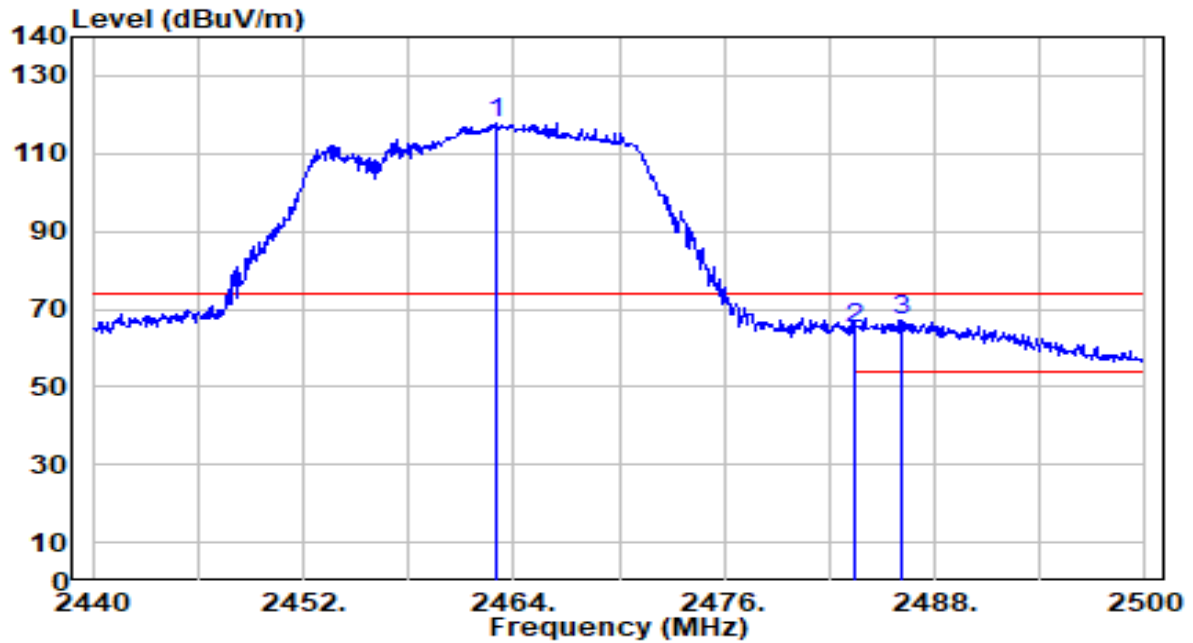


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	87.25	30.76	118.01	N/A	N/A	219	180	Peak
2	2483.500	34.14	30.81	64.95	-9.05	74.00	219	180	Peak
3	* 2486.140	36.17	30.82	66.99	-7.01	74.00	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	By PoE

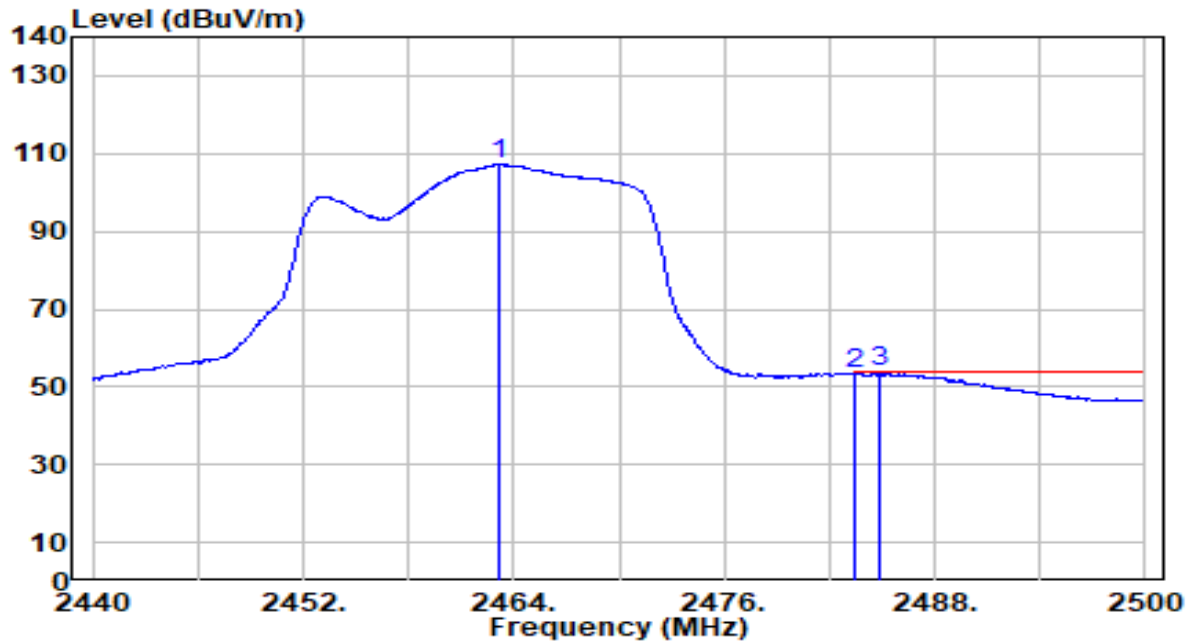


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	76.56	30.76	107.31	N/A	N/A	219	180	Average
2	2483.500	22.38	30.81	53.19	-0.81	54.00	219	180	Average
3	* 2484.880	22.93	30.82	53.75	-0.25	54.00	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

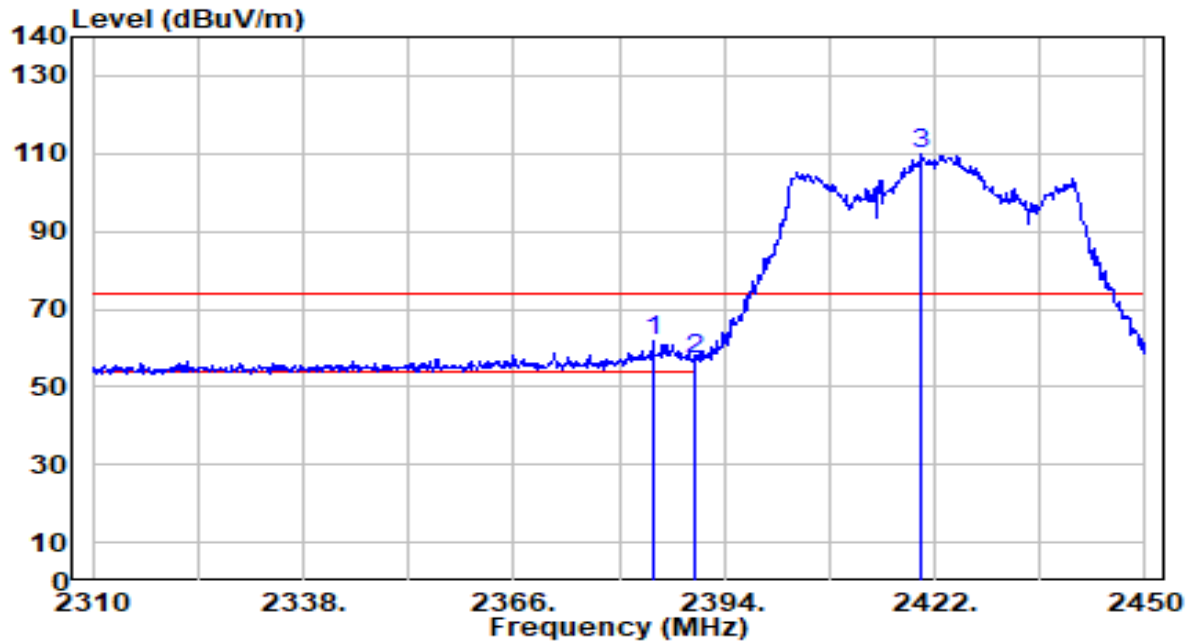


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.480	31.13	30.53	61.67	-12.33	74.00	225	180	Peak
2		2390.000	26.55	30.55	57.09	-16.91	74.00	225	180	Peak
3		2420.320	79.38	30.63	110.01	N/A	N/A	225	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

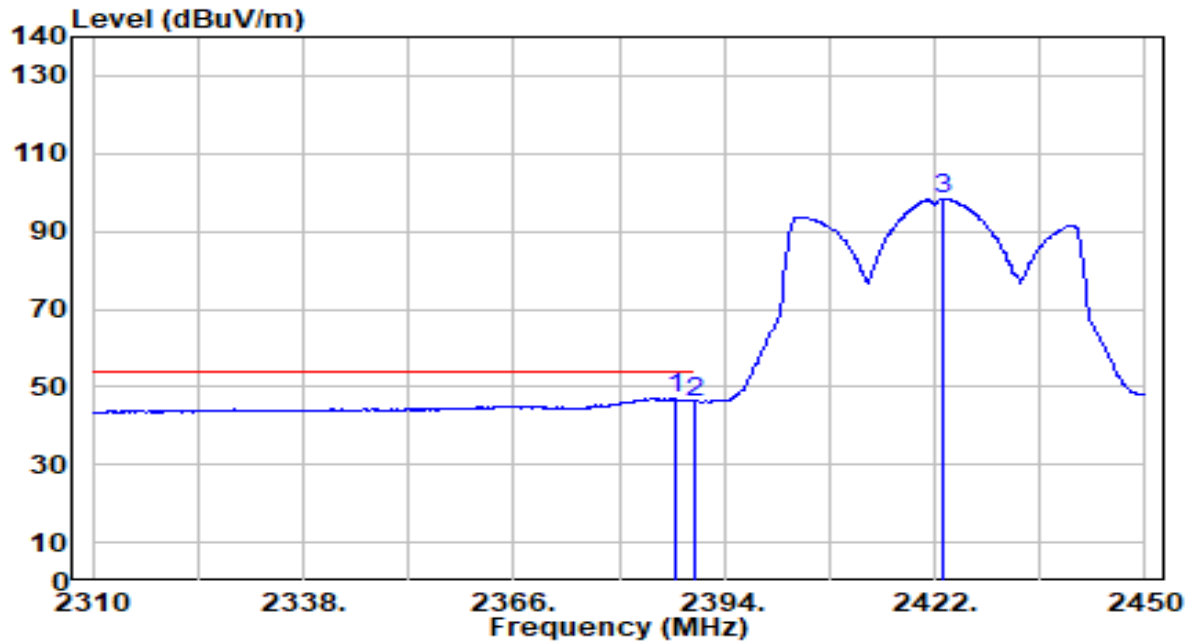


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	16.49	30.54	47.03	-6.97	54.00	225	180	Average
2		2390.000	15.64	30.55	46.19	-7.81	54.00	225	180	Average
3		2422.980	67.80	30.64	98.44	N/A	N/A	225	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

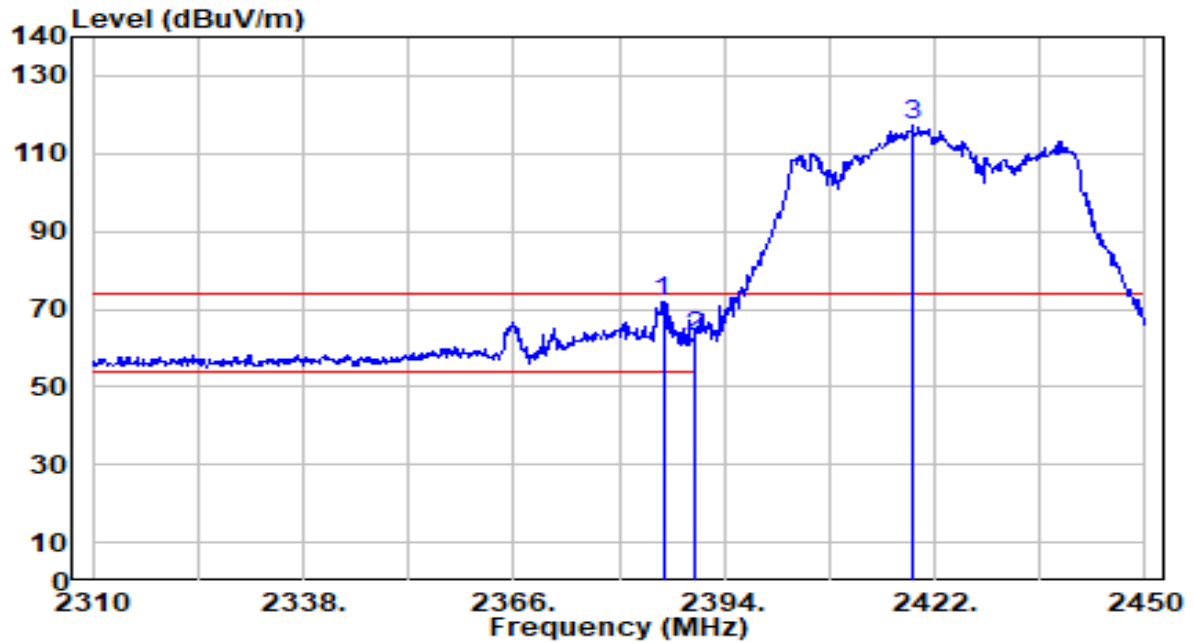


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.880	41.57	30.54	72.11	-1.89	74.00	207	160	Peak
2		2390.000	32.47	30.55	63.02	-10.98	74.00	207	160	Peak
3		2419.060	86.58	30.63	117.21	N/A	N/A	207	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	By PoE

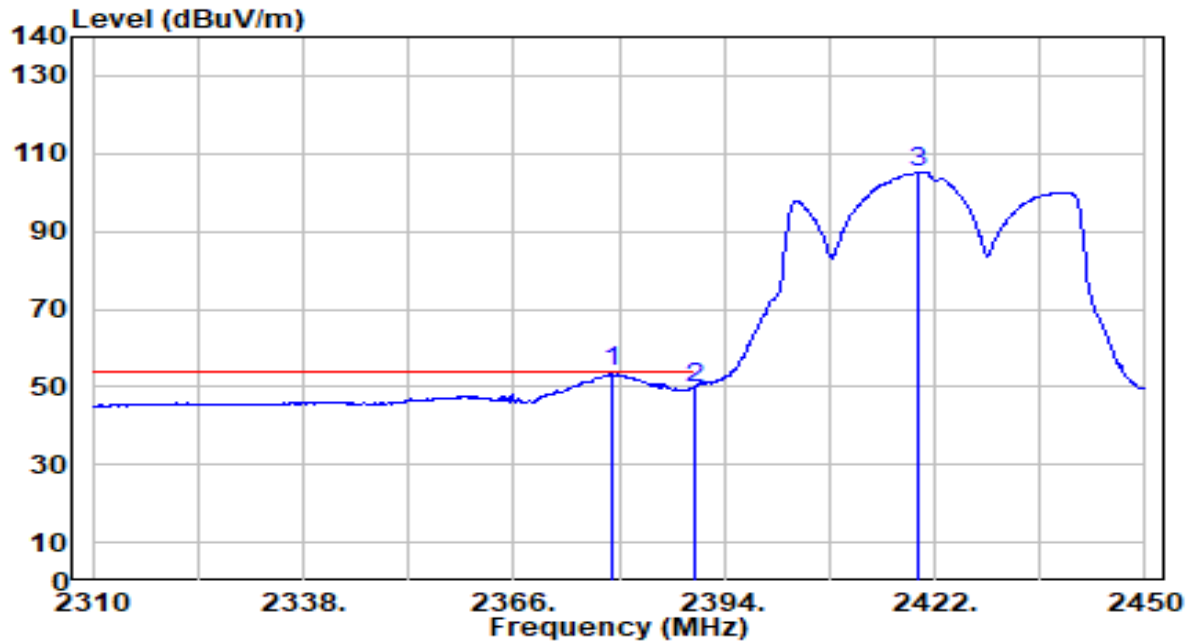


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.160	23.25	30.52	53.77	-0.23	54.00	207	160	Average
2		2390.000	19.32	30.55	49.87	-4.13	54.00	207	160	Average
3		2419.760	74.52	30.63	105.15	N/A	N/A	207	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

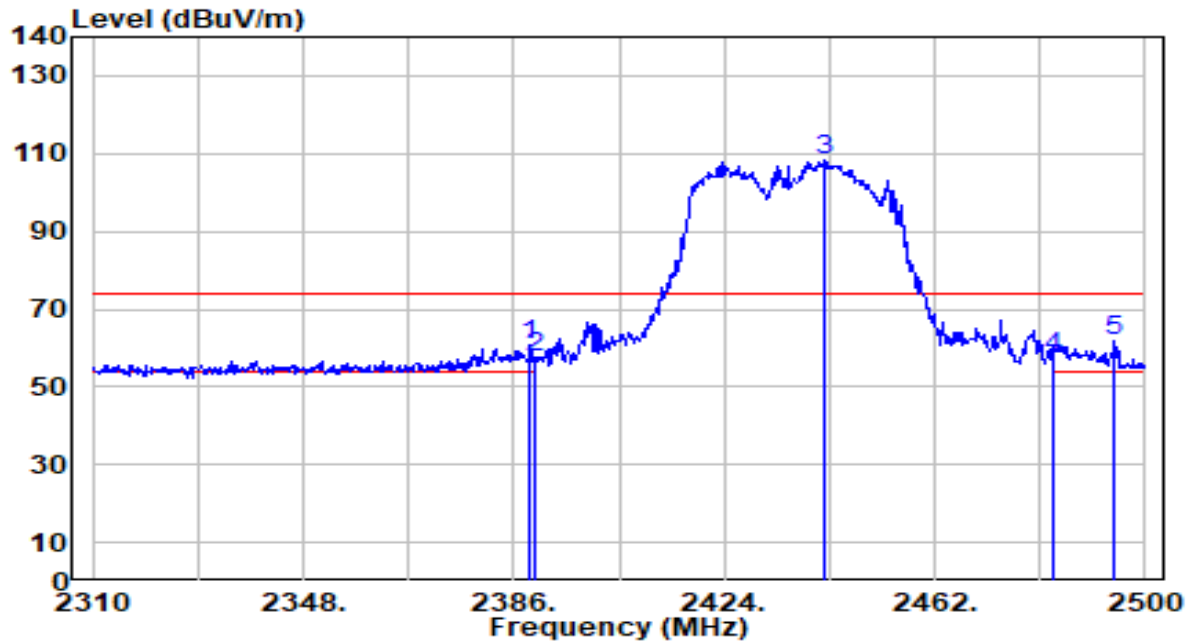


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	30.29	30.54	60.83	-13.17	74.00	206	208	Peak
2	2390.000	26.86	30.55	57.41	-16.59	74.00	206	208	Peak
3	2442.240	77.41	30.70	108.10	N/A	N/A	206	208	Peak
4	2483.500	26.64	30.81	57.46	-16.54	74.00	206	208	Peak
5	* 2494.490	30.87	30.84	61.71	-12.29	74.00	206	208	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

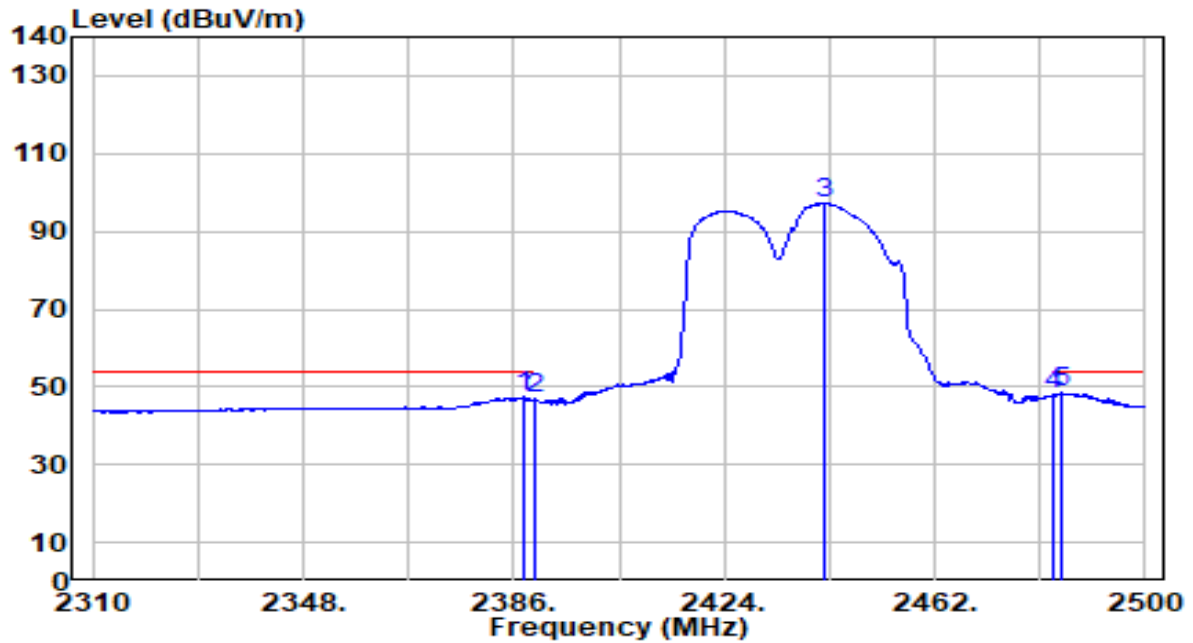


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	16.80	30.54	47.34	-6.66	54.00	206	208	Average
2	2390.000	16.28	30.55	46.82	-7.18	54.00	206	208	Average
3	2442.240	66.51	30.70	97.21	N/A	N/A	206	208	Average
4	2483.500	17.30	30.81	48.12	-5.88	54.00	206	208	Average
5	* 2484.990	17.55	30.82	48.37	-5.63	54.00	206	208	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

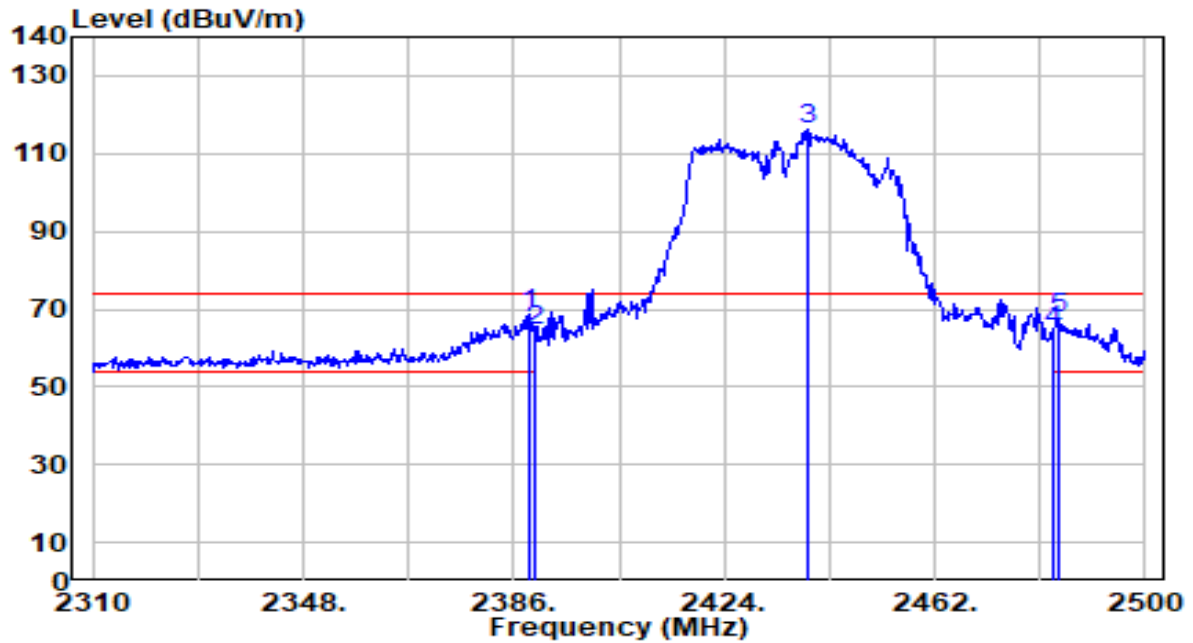


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.850	37.99	30.54	68.53	-5.47	74.00	184	164	Peak
2		2390.000	34.12	30.55	64.66	-9.34	74.00	184	164	Peak
3		2439.010	85.43	30.69	116.11	N/A	N/A	184	164	Peak
4		2483.500	33.63	30.81	64.45	-9.55	74.00	184	164	Peak
5		2484.230	36.68	30.82	67.49	-6.51	74.00	184	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	By PoE

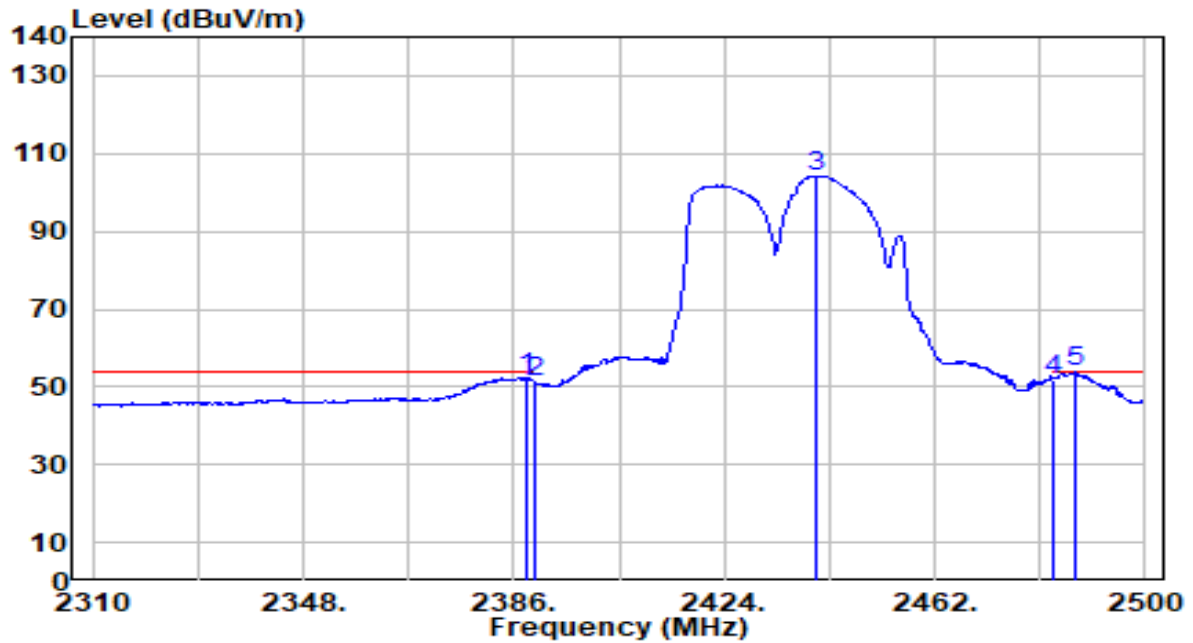


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	21.83	30.54	52.38	-1.62	54.00	184	164	Average
2	2390.000	20.49	30.55	51.04	-2.96	54.00	184	164	Average
3	2440.530	73.61	30.69	104.30	N/A	N/A	184	164	Average
4	2483.500	21.11	30.81	51.93	-2.07	54.00	184	164	Average
5	* 2487.270	22.97	30.82	53.80	-0.20	54.00	184	164	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

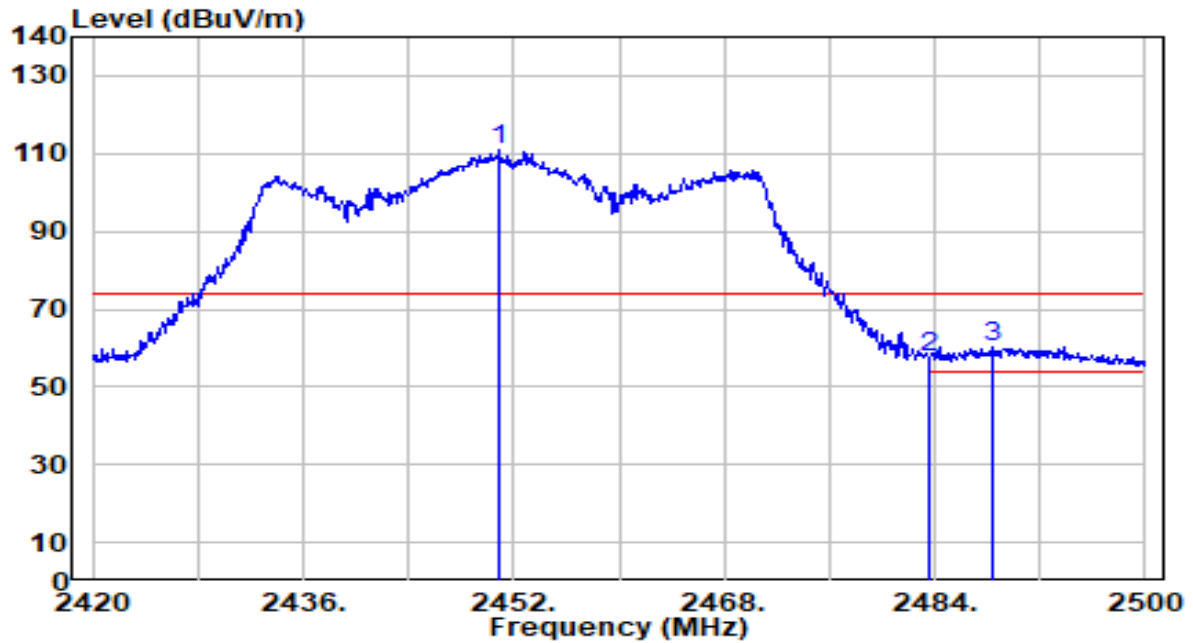


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.880	80.13	30.72	110.85	N/A	N/A	223	201	Peak
2	2483.500	26.90	30.81	57.71	-16.29	74.00	223	201	Peak
3	* 2488.320	29.39	30.83	60.21	-13.79	74.00	223	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

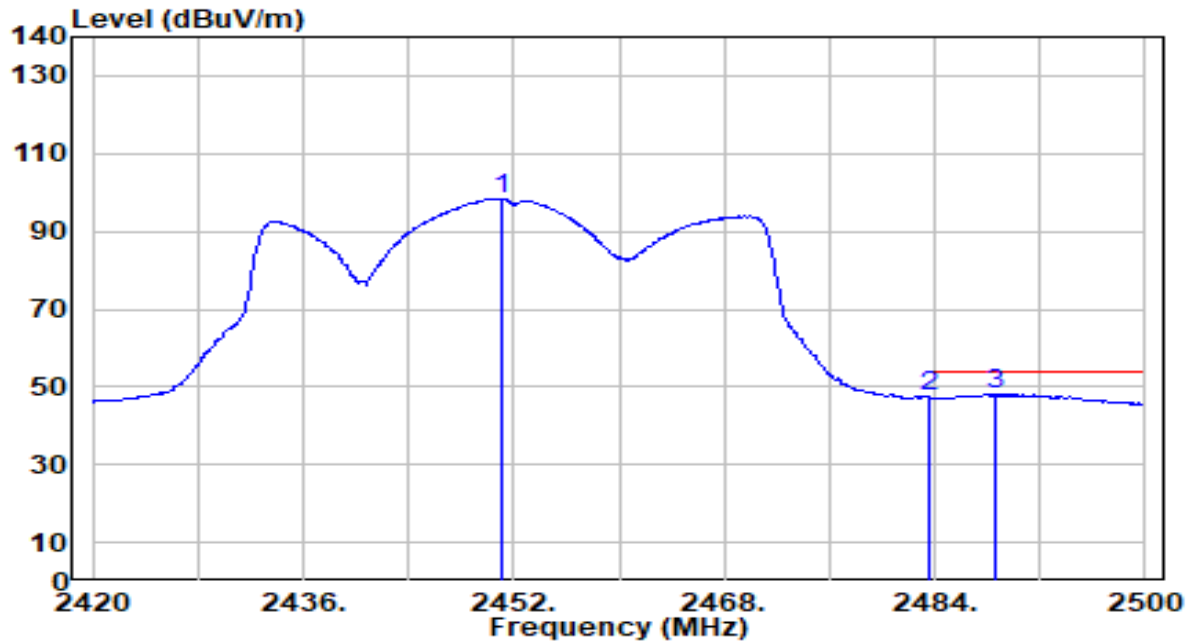


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.120	67.78	30.72	98.50	N/A	N/A	223	201	Average
2	2483.500	16.55	30.81	47.37	-6.63	54.00	223	201	Average
3	* 2488.640	17.36	30.83	48.19	-5.81	54.00	223	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

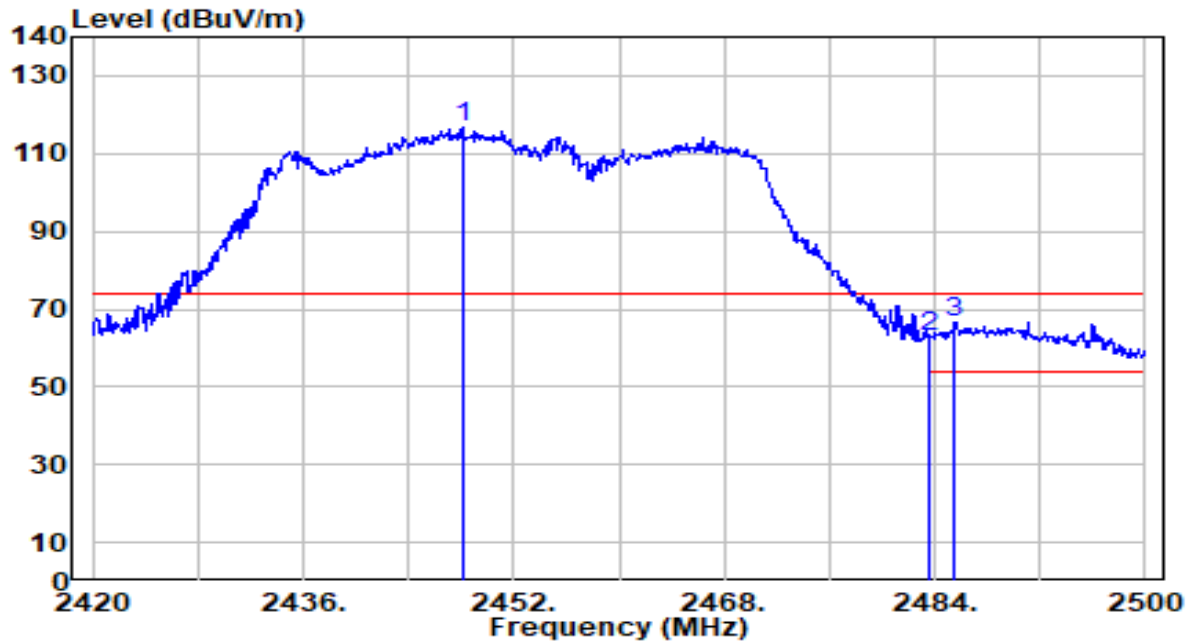


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.160	85.82	30.71	116.53	N/A	N/A	219	180	Peak
2	2483.500	31.90	30.81	62.71	-11.29	74.00	219	180	Peak
3	* 2485.440	35.95	30.82	66.77	-7.23	74.00	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-16
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	By PoE

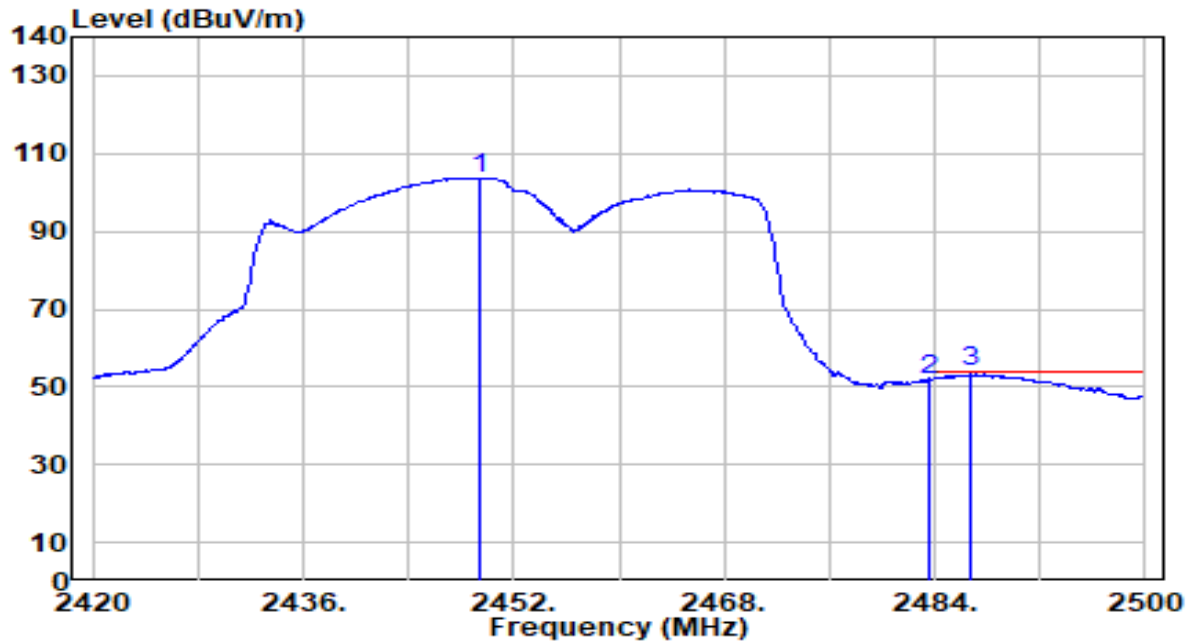

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.520	73.09	30.72	103.80	N/A	N/A	219	180	Average
2	2483.500	21.09	30.81	51.91	-2.09	54.00	219	180	Average
3	* 2486.640	22.92	30.82	53.74	-0.26	54.00	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

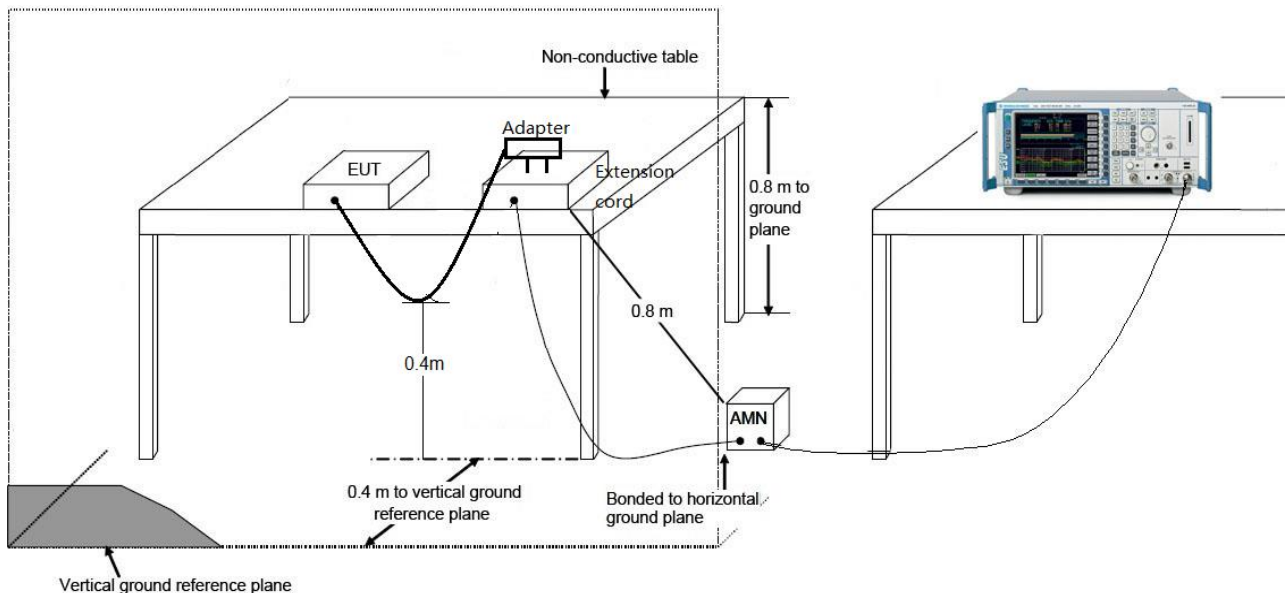

7.8.3.Test Result

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

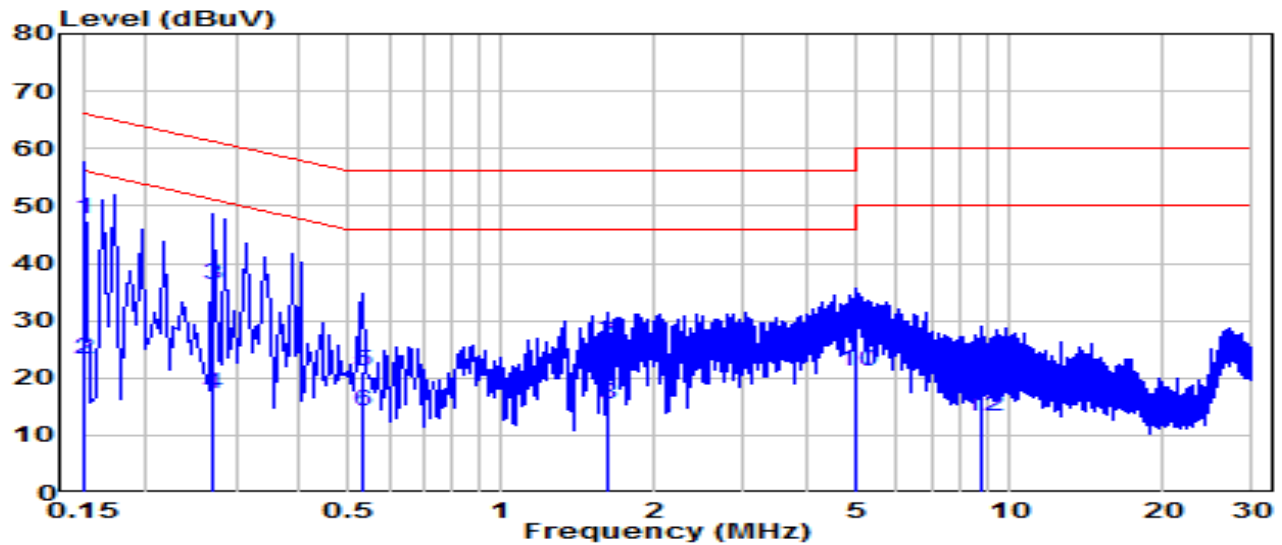


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.150	37.97	9.63	47.60	-18.40	66.00	QP
2	*	0.150	13.47	9.63	23.10	-32.90	56.00	Average
3		0.271	26.61	9.64	36.25	-24.82	61.07	QP
4		0.271	7.49	9.64	17.13	-33.95	51.07	Average
5		0.532	11.42	9.65	21.08	-34.92	56.00	QP
6		0.532	4.57	9.65	14.23	-31.77	46.00	Average
7		1.617	16.12	9.69	25.82	-30.18	56.00	QP
8		1.617	5.76	9.69	15.45	-30.55	46.00	Average
9		4.965	18.94	9.75	28.69	-27.31	56.00	QP
10		4.965	11.26	9.75	21.01	-24.99	46.00	Average
11		8.762	11.44	9.84	21.28	-38.72	60.00	QP
12		8.762	3.37	9.84	13.21	-36.79	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

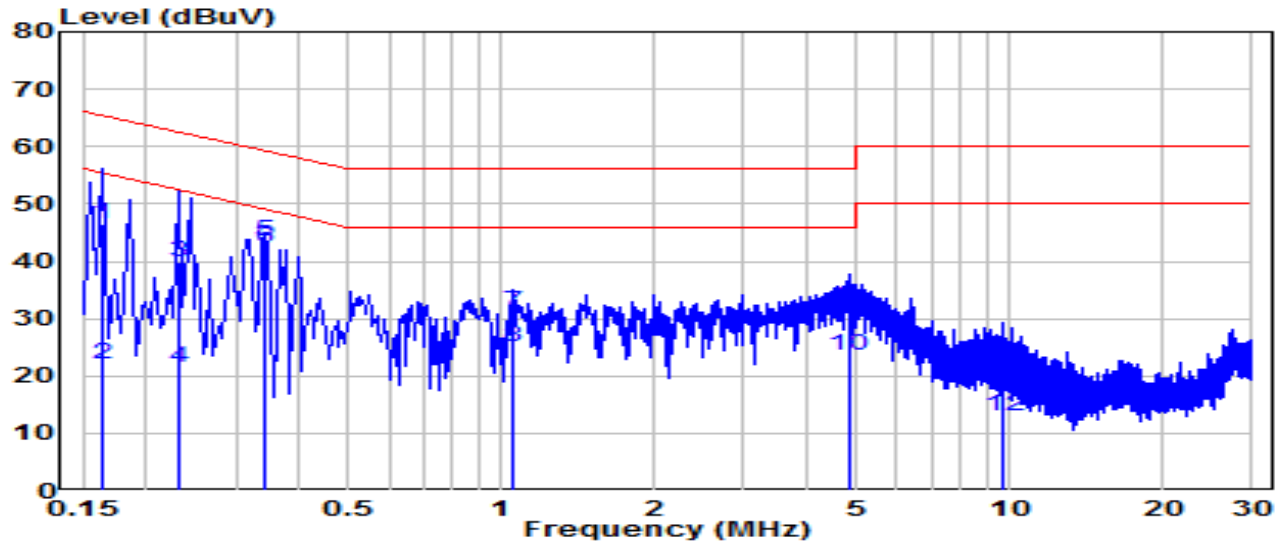


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	36.83	9.63	46.46	-18.82	65.28	QP
2	0.163	12.55	9.63	22.18	-33.10	55.28	Average
3	0.231	30.30	9.63	39.93	-22.48	62.41	QP
4	0.231	11.69	9.63	21.32	-31.09	52.41	Average
5	* 0.343	33.92	9.64	43.57	-15.55	59.12	QP
6	* 0.343	32.71	9.64	42.35	-6.77	49.12	Average
7	1.054	21.48	9.68	31.17	-24.83	56.00	QP
8	1.054	15.30	9.68	24.98	-21.02	46.00	Average
9	4.812	22.29	9.75	32.05	-23.95	56.00	QP
10	4.812	13.90	9.75	23.65	-22.35	46.00	Average
11	9.703	12.21	9.88	22.09	-37.91	60.00	QP
12	9.703	3.22	9.88	13.10	-36.90	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 240V/60Hz

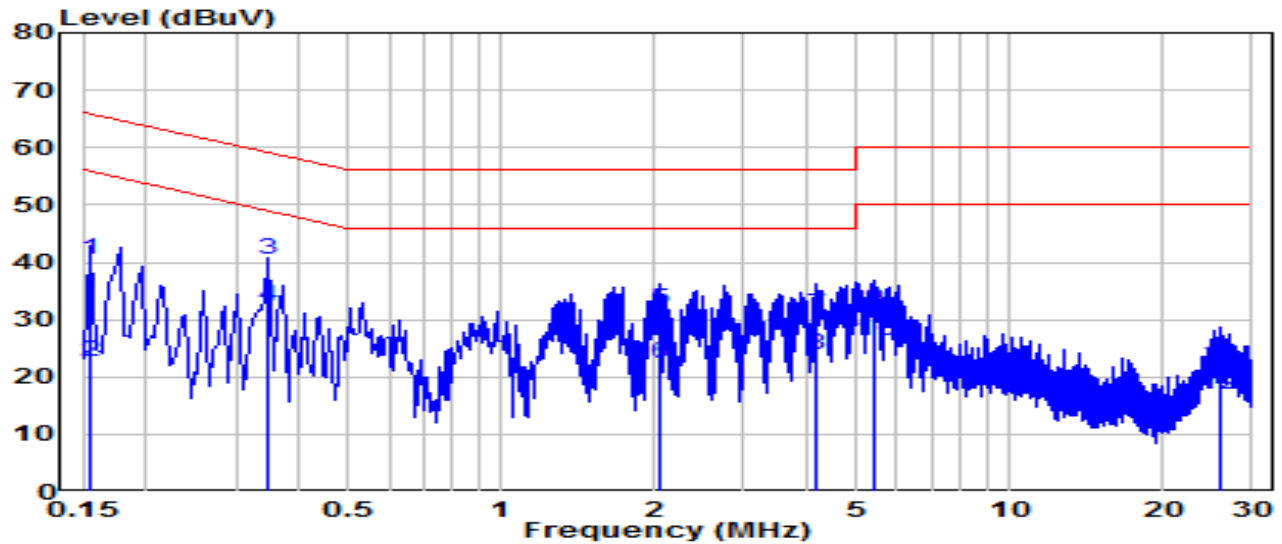


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	30.88	9.63	40.51	-25.24	65.75	QP
2	0.154	13.14	9.63	22.77	-32.98	55.75	Average
3	* 0.348	30.92	9.64	40.56	-18.45	59.01	QP
4	* 0.348	22.66	9.64	32.30	-16.71	49.01	Average
5	2.049	21.98	9.70	31.68	-24.32	56.00	QP
6	2.049	12.57	9.70	22.27	-23.73	46.00	Average
7	4.182	21.21	9.73	30.94	-25.06	56.00	QP
8	4.182	14.17	9.73	23.90	-22.10	46.00	Average
9	5.450	22.06	9.76	31.82	-28.18	60.00	QP
10	5.450	16.42	9.76	26.18	-23.82	50.00	Average
11	25.824	11.98	9.92	21.90	-38.10	60.00	QP
12	25.824	6.94	9.92	16.86	-33.14	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 240V/60Hz

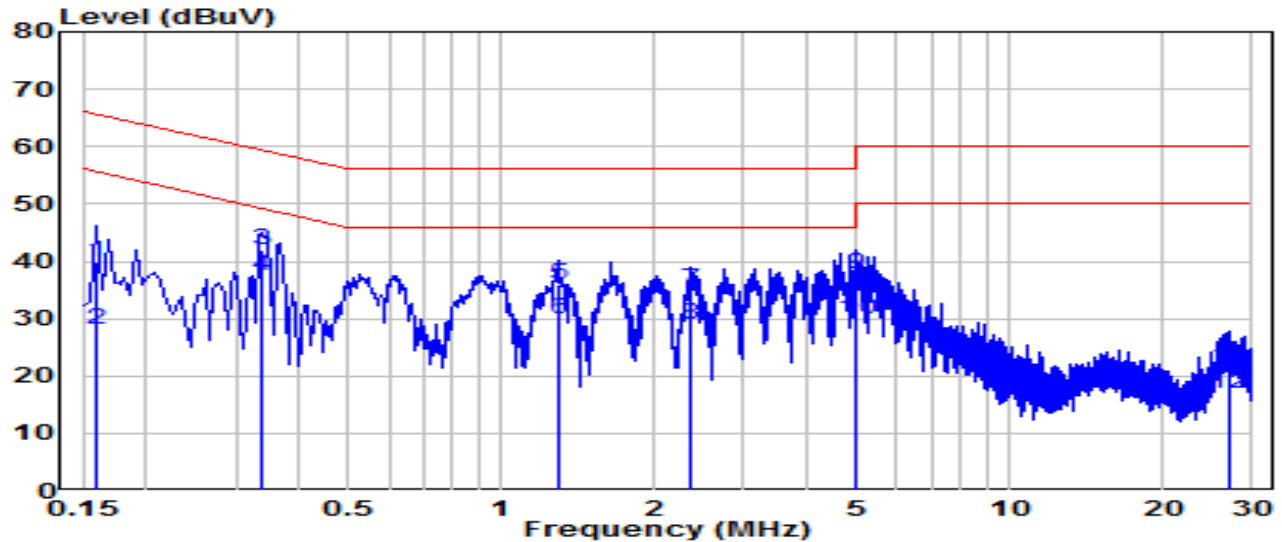

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	30.09	9.63	39.72	-25.80	65.52	QP
2	0.159	18.42	9.63	28.06	-27.46	55.52	Average
3	* 0.339	32.18	9.64	41.82	-17.41	59.23	QP
4	* 0.339	27.78	9.64	37.42	-11.81	49.23	Average
5	1.288	26.15	9.69	35.84	-20.16	56.00	QP
6	1.288	20.05	9.69	29.74	-16.26	46.00	Average
7	2.355	25.38	9.72	35.09	-20.91	56.00	QP
8	2.355	19.24	9.72	28.96	-17.04	46.00	Average
9	4.992	27.84	9.76	37.60	-18.40	56.00	QP
10	4.992	20.02	9.76	29.78	-16.22	46.00	Average
11	26.900	11.45	10.03	21.48	-38.52	60.00	QP
12	26.900	6.72	10.03	16.76	-33.24	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2408TW0107-UT” file.

Appendix B : External Photograph

Refer to “2408TW0107-UE” file.

Appendix C : Internal Photograph

Refer to “2408TW0107-UI” file.

_____ The End _____