


EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	By PoE

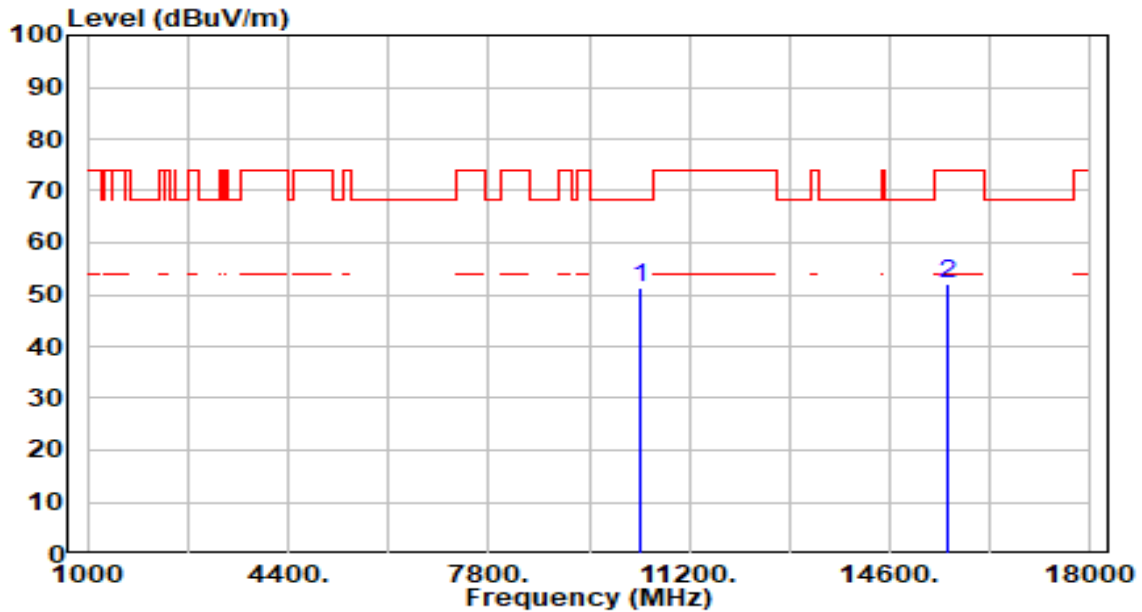


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	46.60	4.79	51.39	-16.81	68.20	100	216	Peak
2		15570.000	46.01	6.24	52.25	-21.75	74.00	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	By PoE

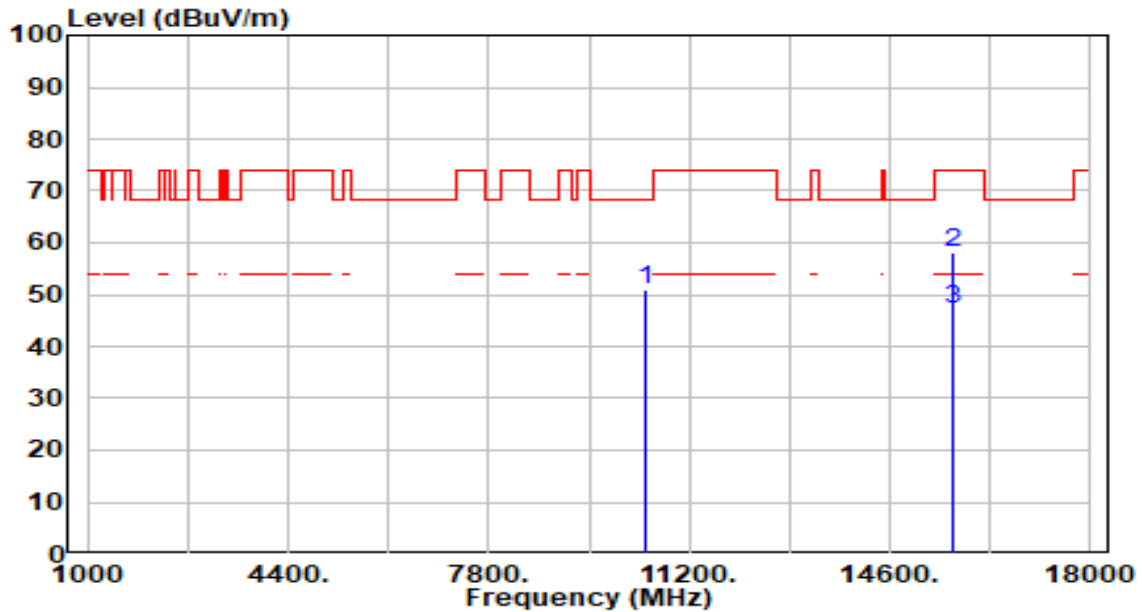


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10460.000	46.07	4.68	50.76	-17.44	68.20	100	129	Peak
2	15690.000	51.87	6.37	58.25	-15.75	74.00	100	146	Peak
3	* 15690.000	40.87	6.37	47.25	-6.75	54.00	100	146	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	By PoE

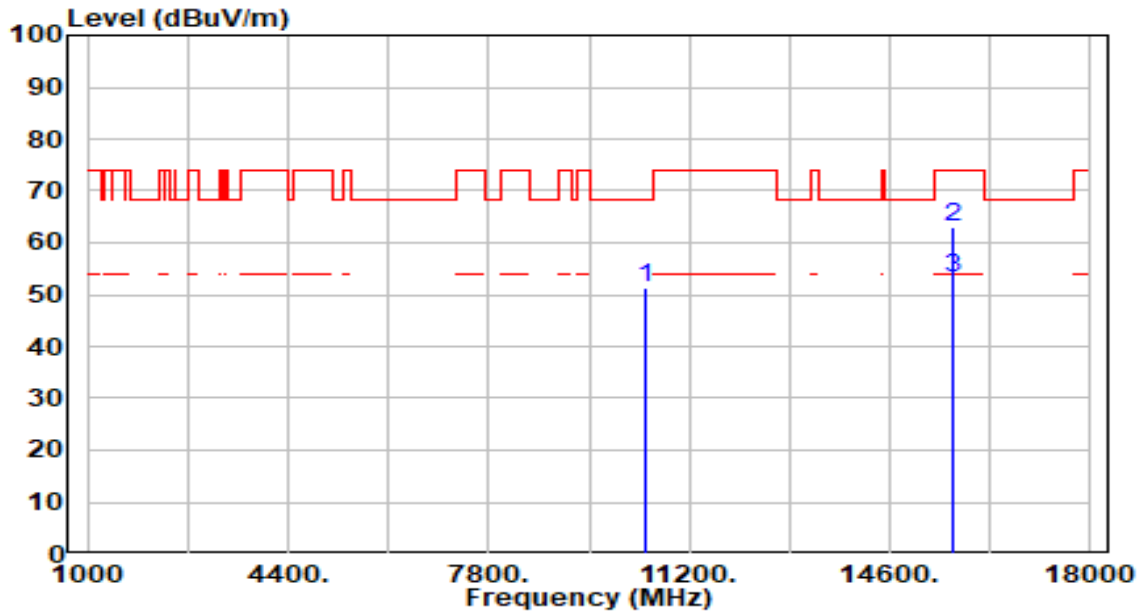


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10460.000	46.62	4.68	51.31	-16.89	68.20	100	219	Peak
2	15690.000	56.77	6.37	63.14	-10.86	74.00	100	173	Peak
3	* 15690.000	46.70	6.37	53.07	-0.93	54.00	100	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	By PoE

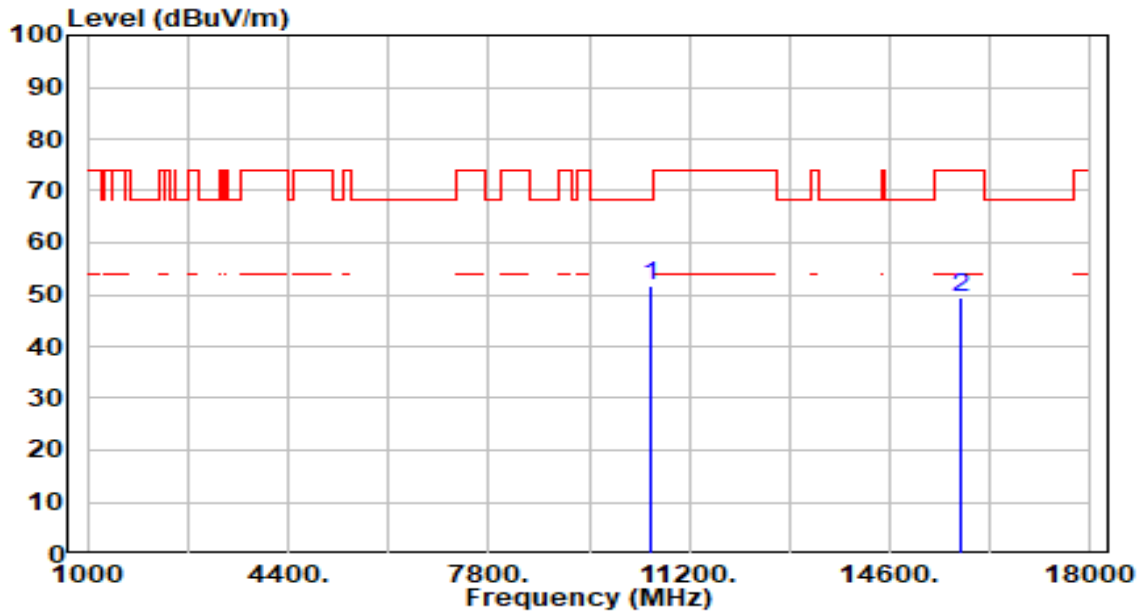


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	47.08	4.59	51.67	-16.53	68.20	100	198	Peak
2		15810.000	42.91	6.60	49.51	-24.49	74.00	100	233	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	By PoE

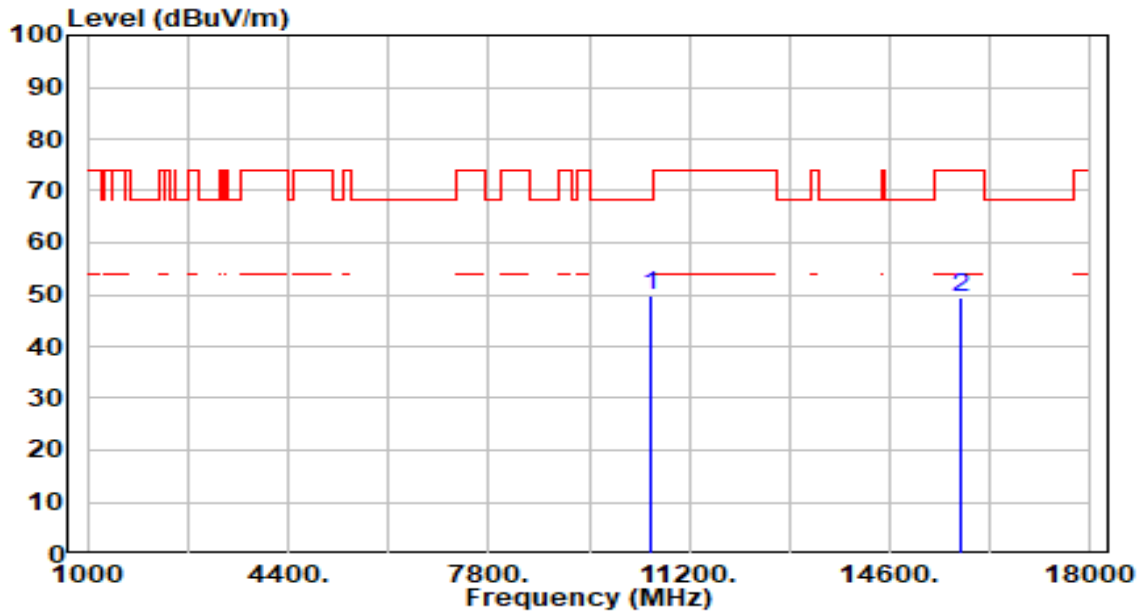


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	45.23	4.59	49.82	-18.38	68.20	100	218	Peak
2		15810.000	42.75	6.60	49.35	-24.65	74.00	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

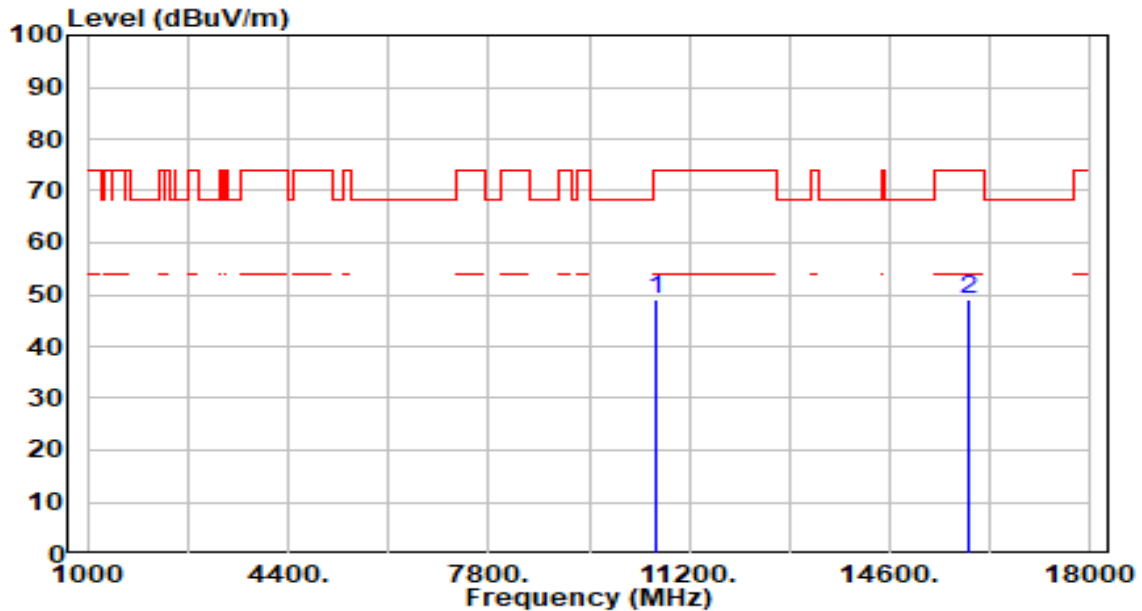


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	44.38	4.56	48.95	-25.05	74.00	100	88	Peak
2	*	15930.000	42.45	6.66	49.10	-24.90	74.00	100	268	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

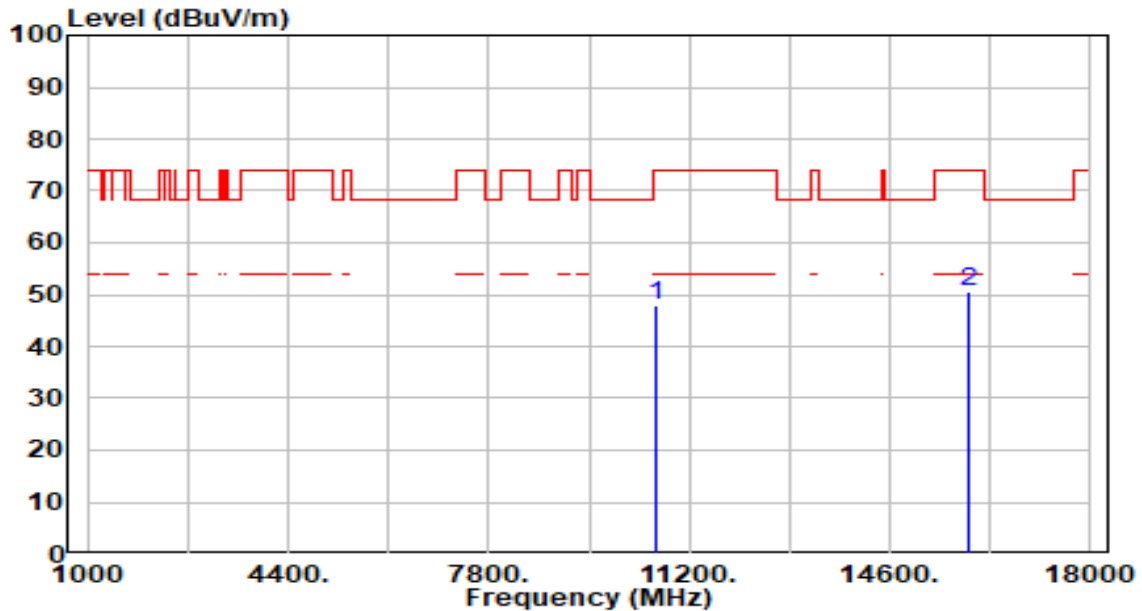


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	43.20	4.56	47.76	-26.24	74.00	100	219	Peak
2	*	15930.000	44.05	6.66	50.71	-23.29	74.00	100	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

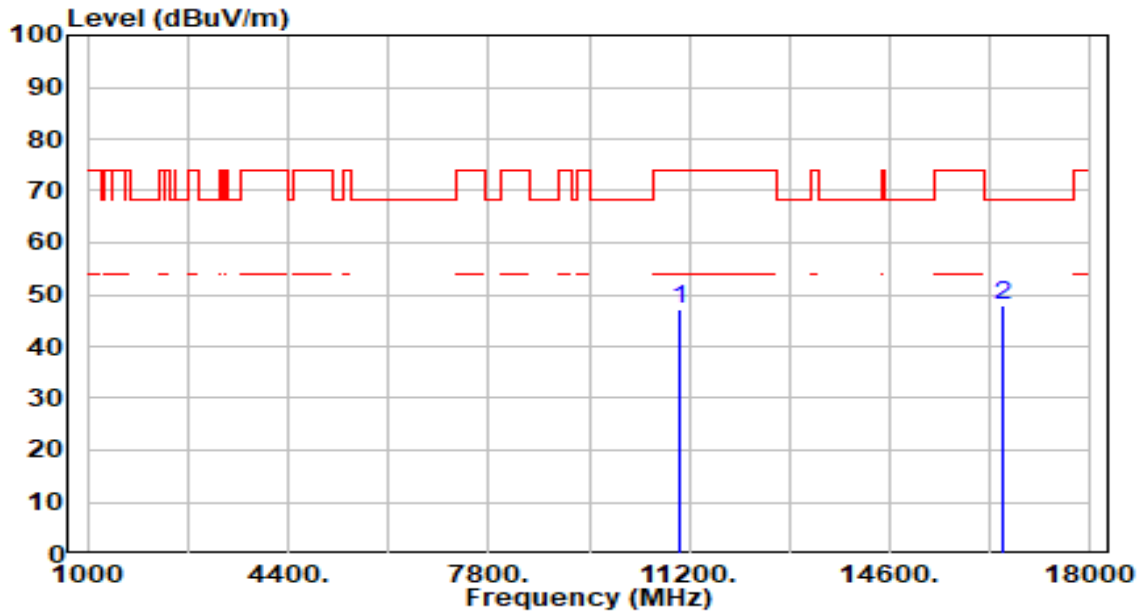


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	42.61	4.49	47.10	-26.90	74.00	100	135	Peak
2	*	16530.000	42.03	6.05	48.07	-20.13	68.20	0	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

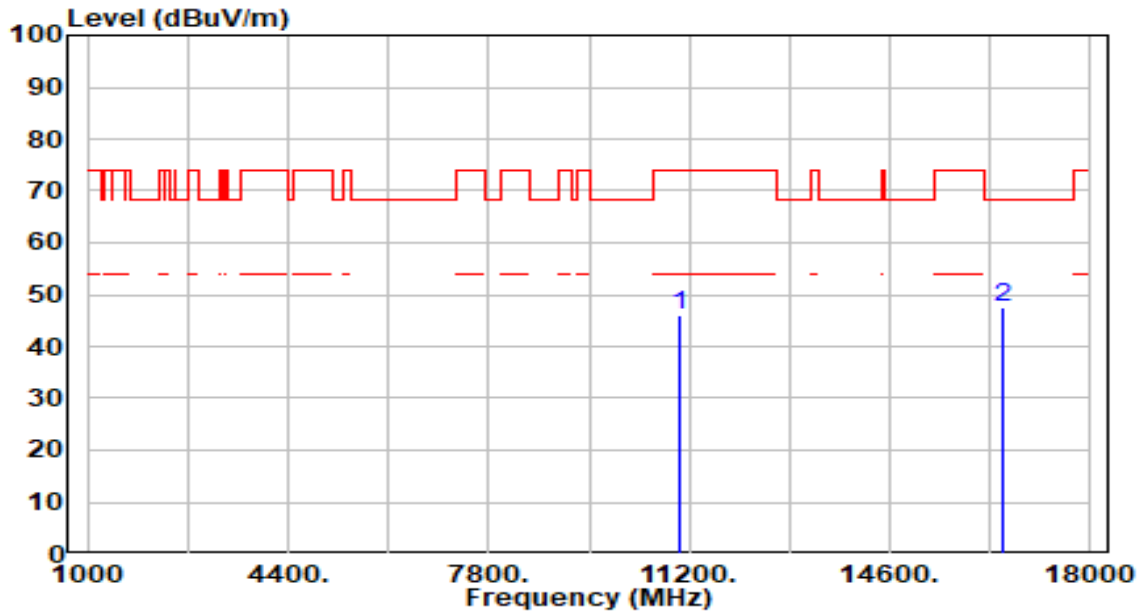


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	41.42	4.49	45.91	-28.09	74.00	100	239	Peak
2	*	16530.000	41.64	6.05	47.69	-20.51	68.20	100	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	By PoE

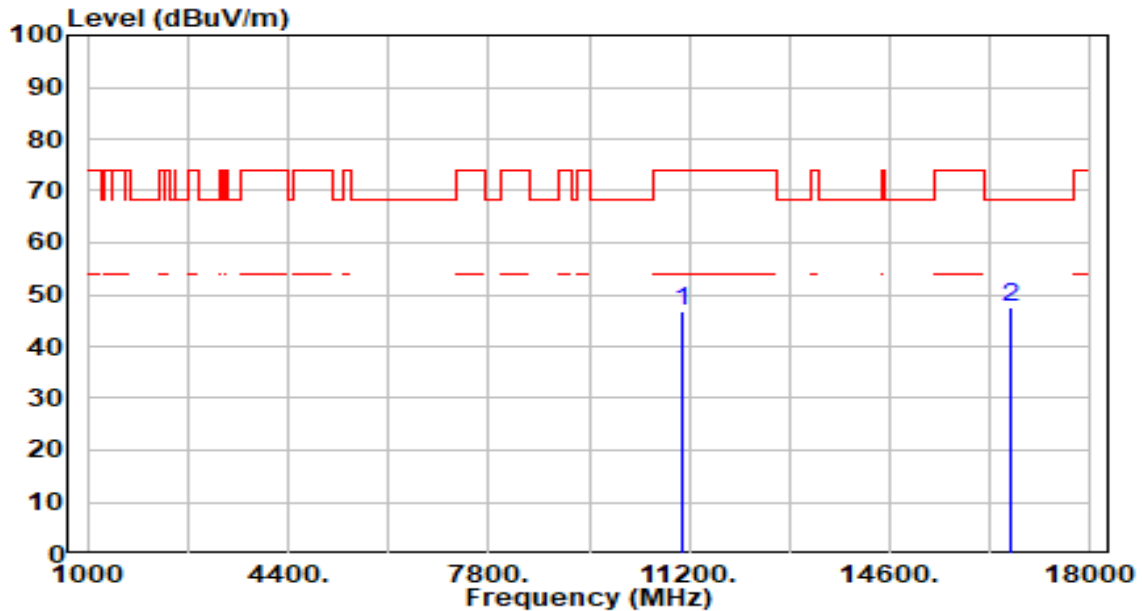


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.93	4.71	46.63	-27.37	74.00	100	42	Peak
2	*	16650.000	41.52	6.00	47.52	-20.68	68.20	100	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	By PoE

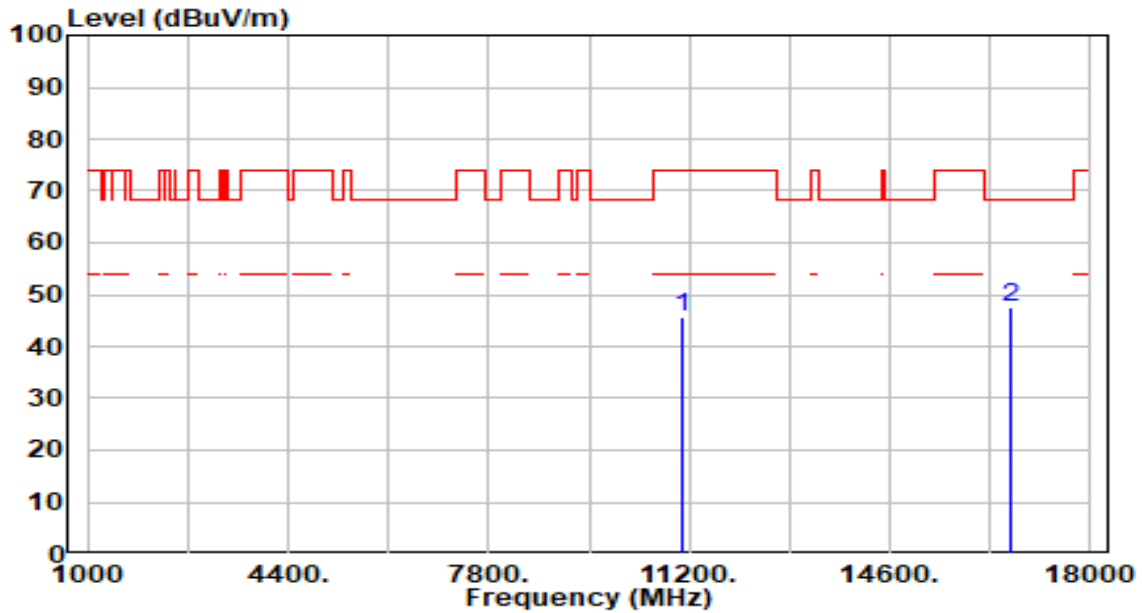


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.01	4.71	45.72	-28.28	74.00	100	231	Peak
2	*	16650.000	41.58	6.00	47.57	-20.63	68.20	100	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

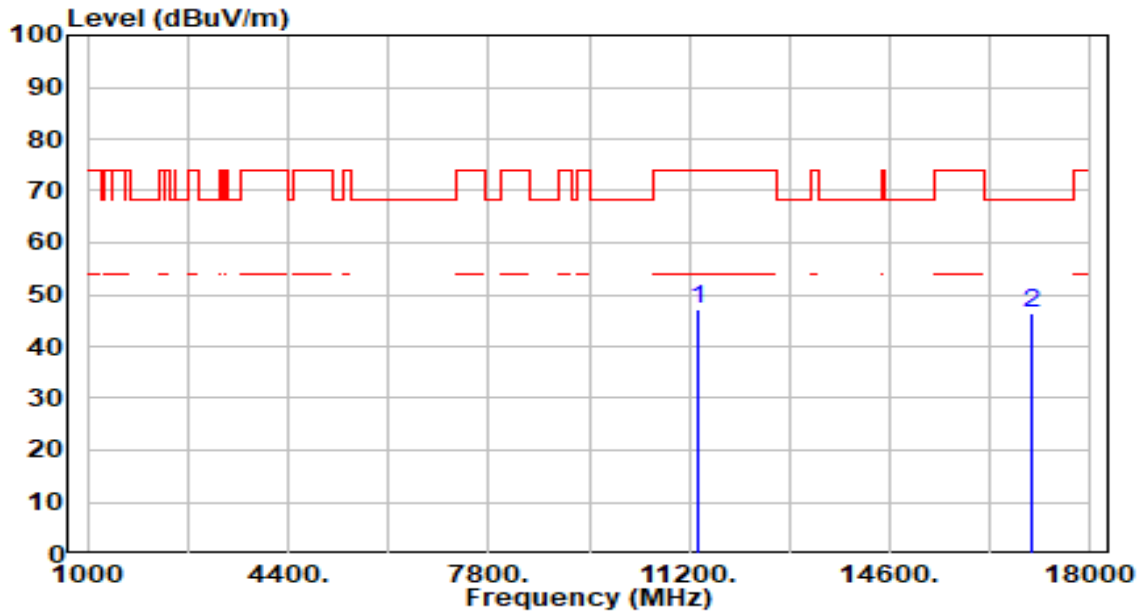


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.94	5.14	47.09	-26.91	74.00	100	85	Peak
2	*	17010.000	40.69	5.74	46.43	-21.77	68.20	100	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

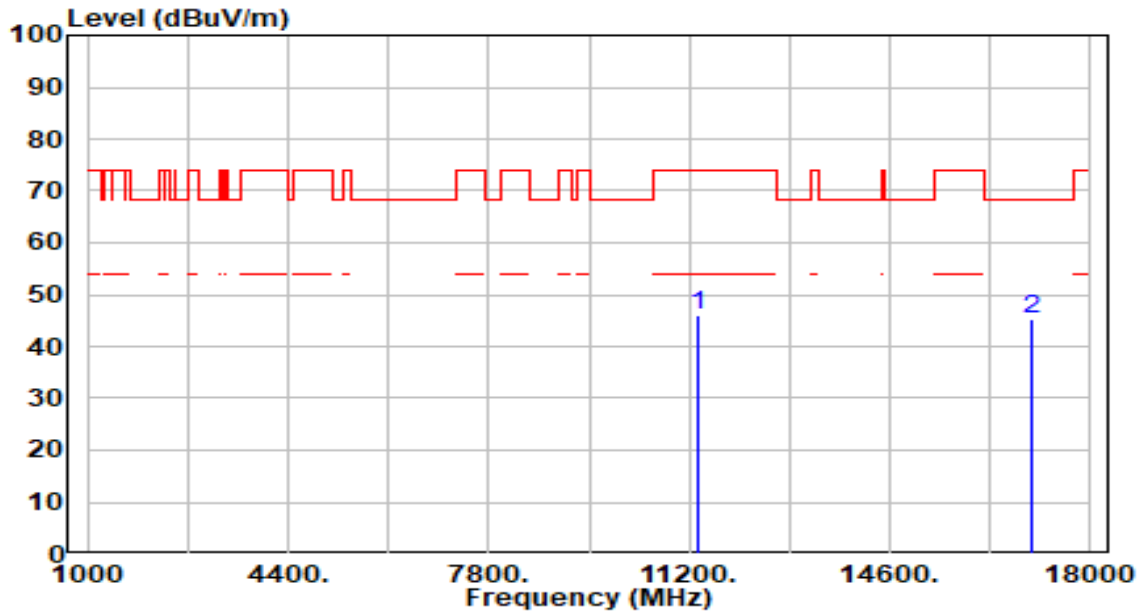


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	40.78	5.14	45.93	-28.07	74.00	100	127	Peak
2	*	17010.000	39.66	5.74	45.40	-22.80	68.20	100	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	By PoE

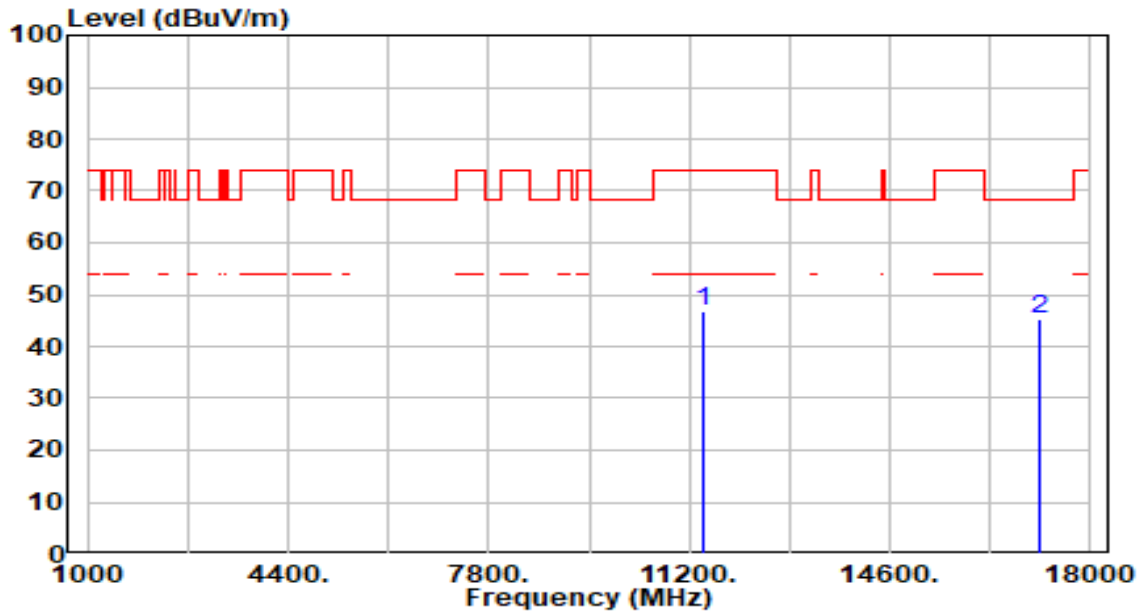


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.63	5.23	46.86	-27.14	74.00	100	20	Peak
2	*	17130.000	39.93	5.48	45.41	-22.79	68.20	100	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	By PoE

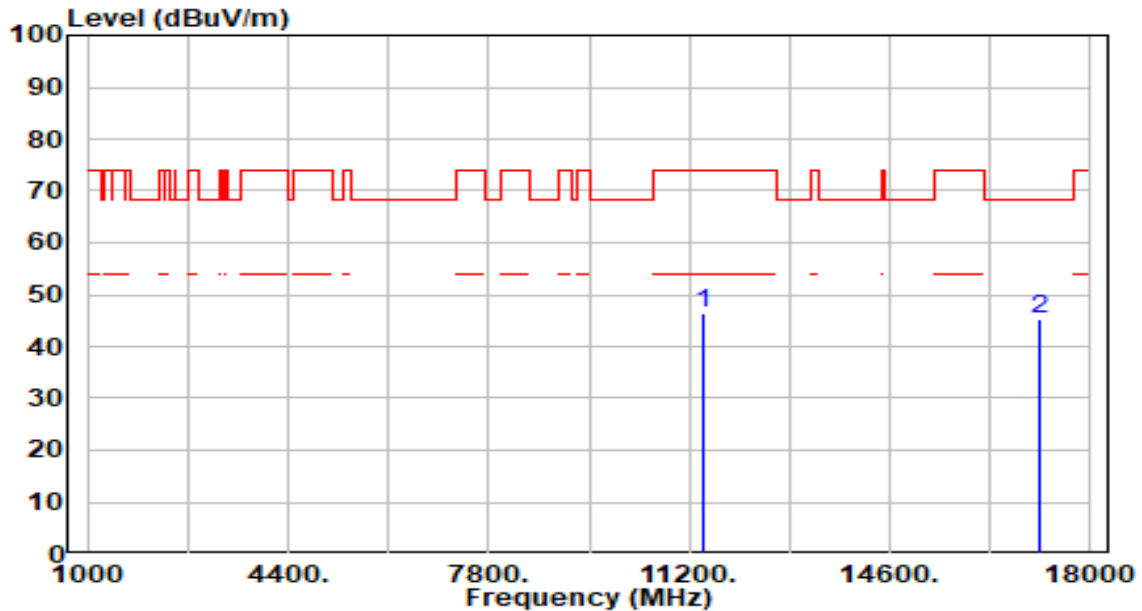


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.10	5.23	46.33	-27.67	74.00	100	69	Peak
2	*	17130.000	39.94	5.48	45.42	-22.78	68.20	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

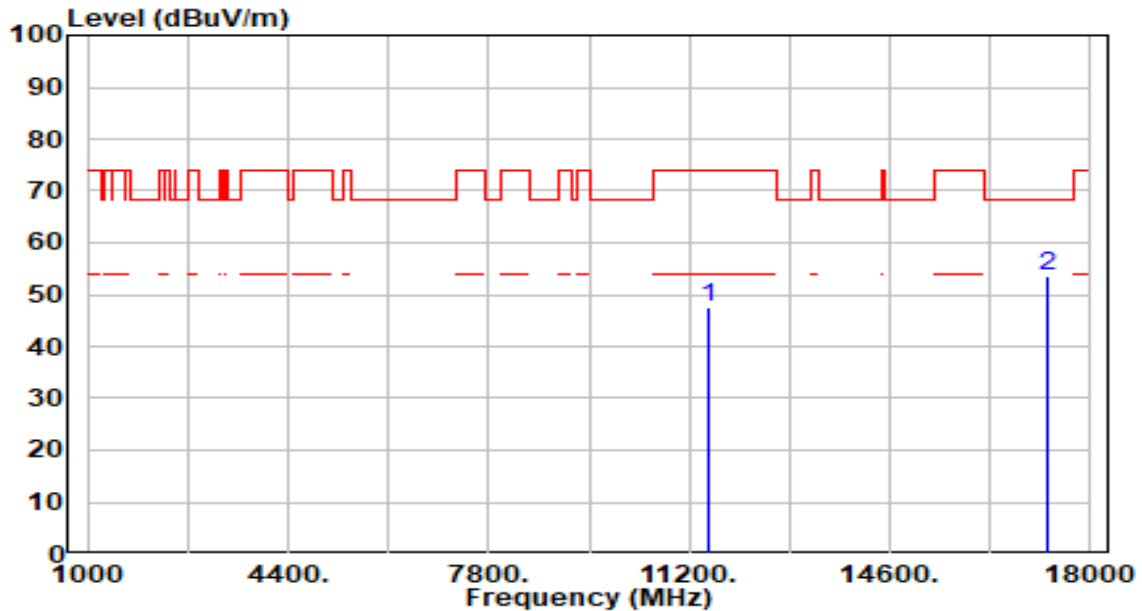


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	42.23	5.29	47.52	-26.48	74.00	100	225	Peak
2	*	17265.000	48.54	5.18	53.72	-14.48	68.20	100	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

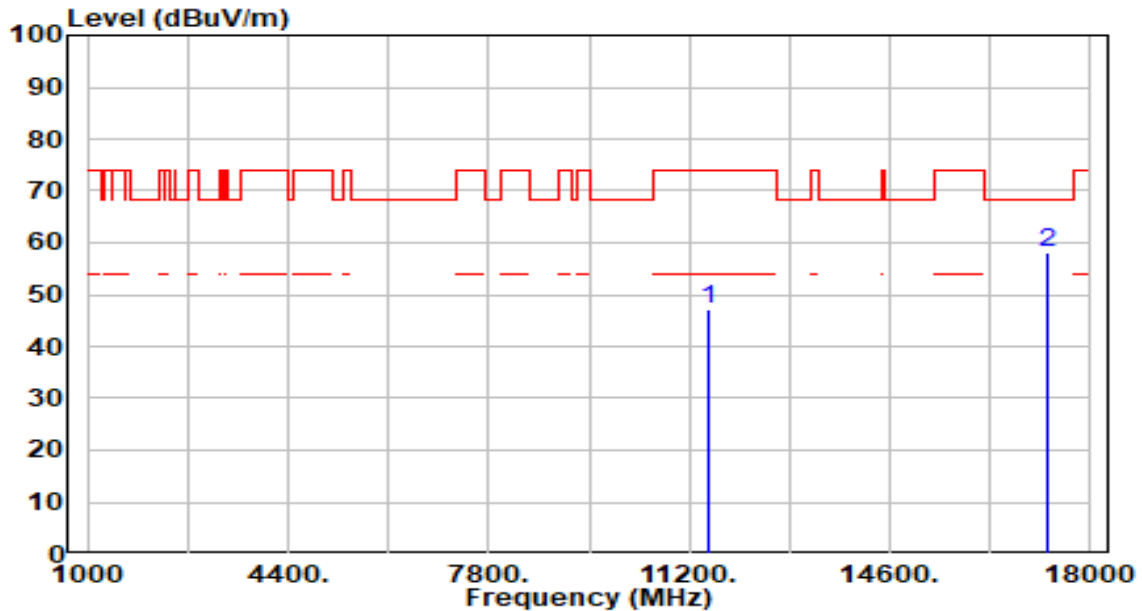


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	41.96	5.29	47.25	-26.75	74.00	100	86	Peak
2	*	17265.000	52.97	5.18	58.16	-10.04	68.20	100	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

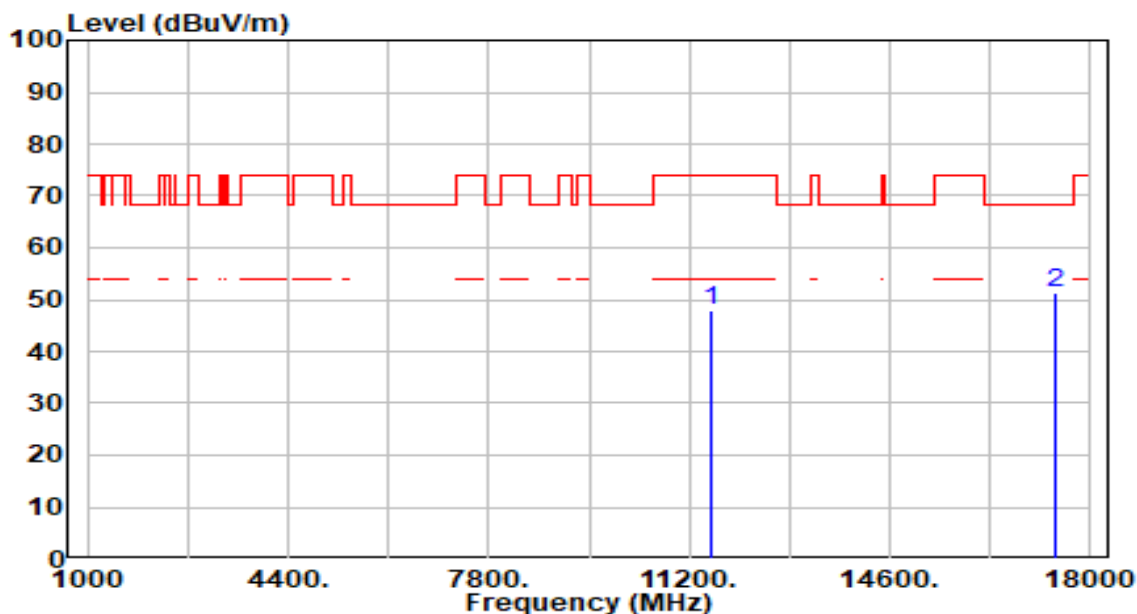


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	42.37	5.37	47.74	-26.26	74.00	100	223	Peak
2	*	17385.000	46.49	4.92	51.41	-16.79	68.20	100	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

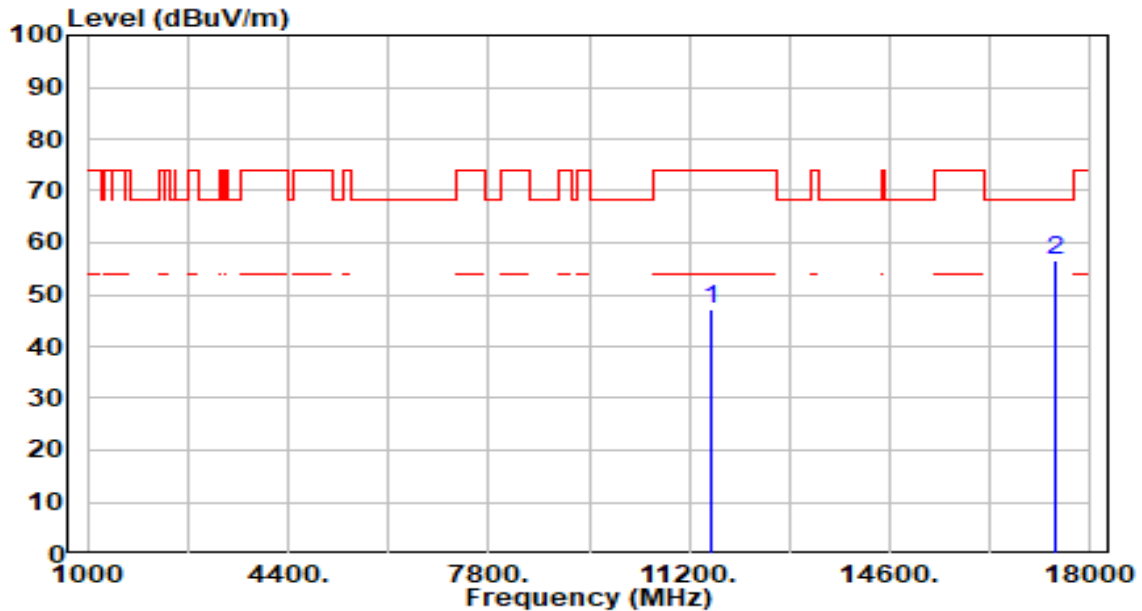


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	41.90	5.37	47.27	-26.73	74.00	100	70	Peak
2	*	17385.000	51.77	4.92	56.69	-11.51	68.20	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

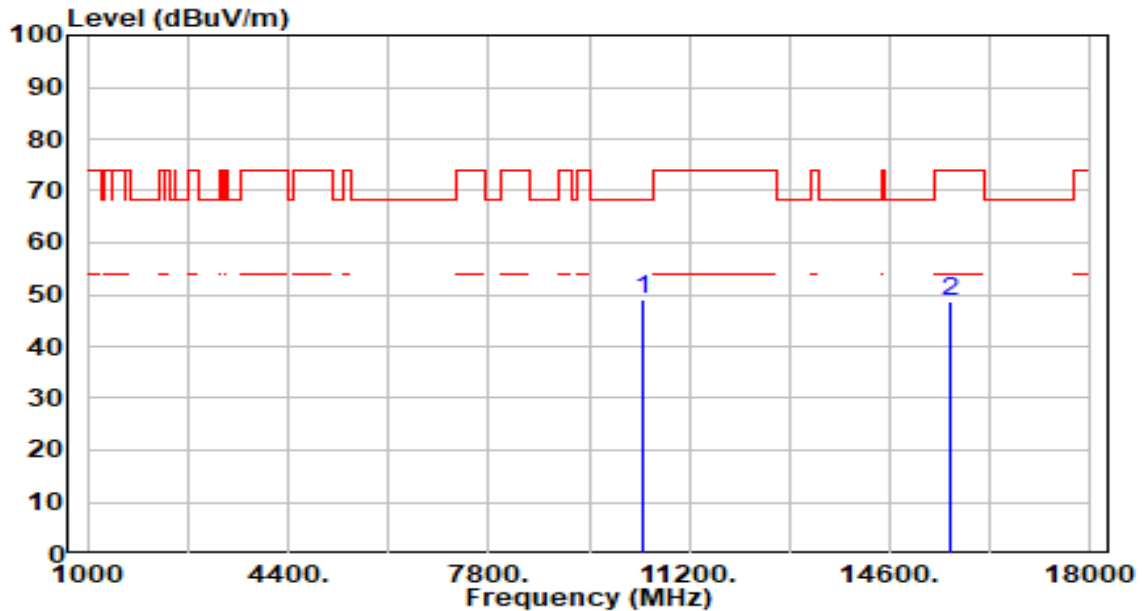


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	44.46	4.74	49.21	-18.99	68.20	100	130	Peak
2		15630.000	42.54	6.25	48.80	-25.20	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

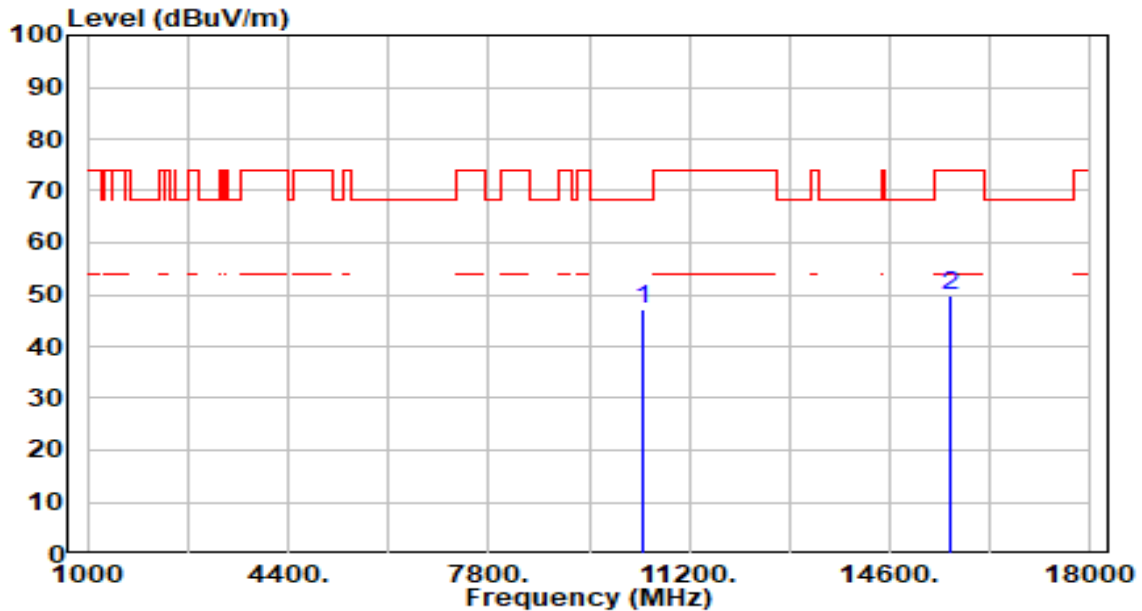


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.34	4.74	47.09	-21.11	68.20	100	114	Peak
2		15630.000	43.51	6.25	49.77	-24.23	74.00	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

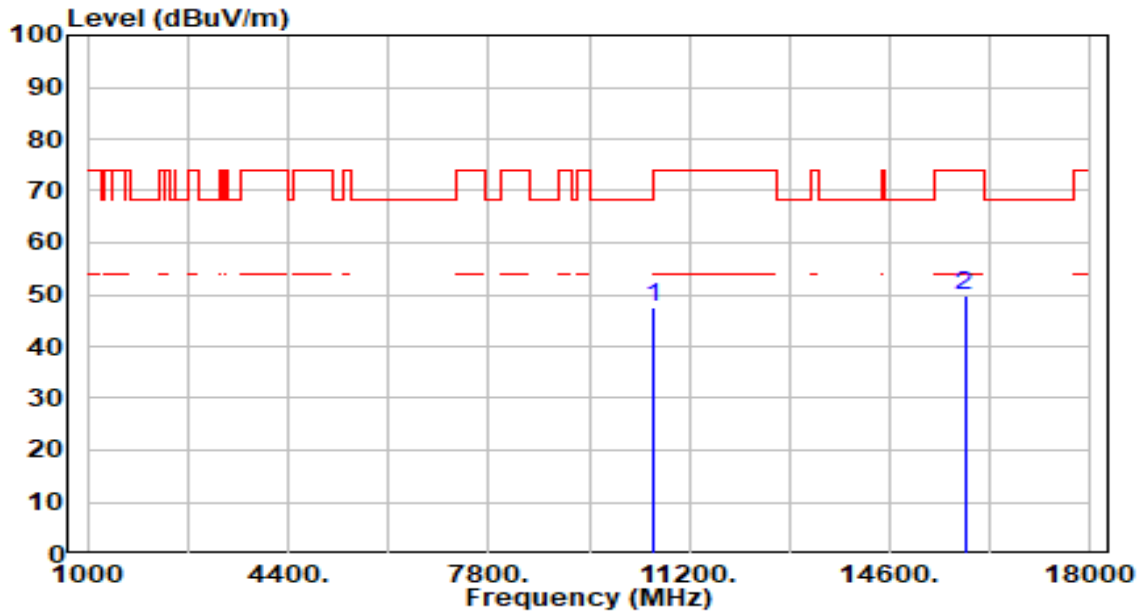


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	43.04	4.56	47.60	-20.60	68.20	100	194	Peak
2		15870.000	43.04	6.63	49.67	-24.33	74.00	100	281	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

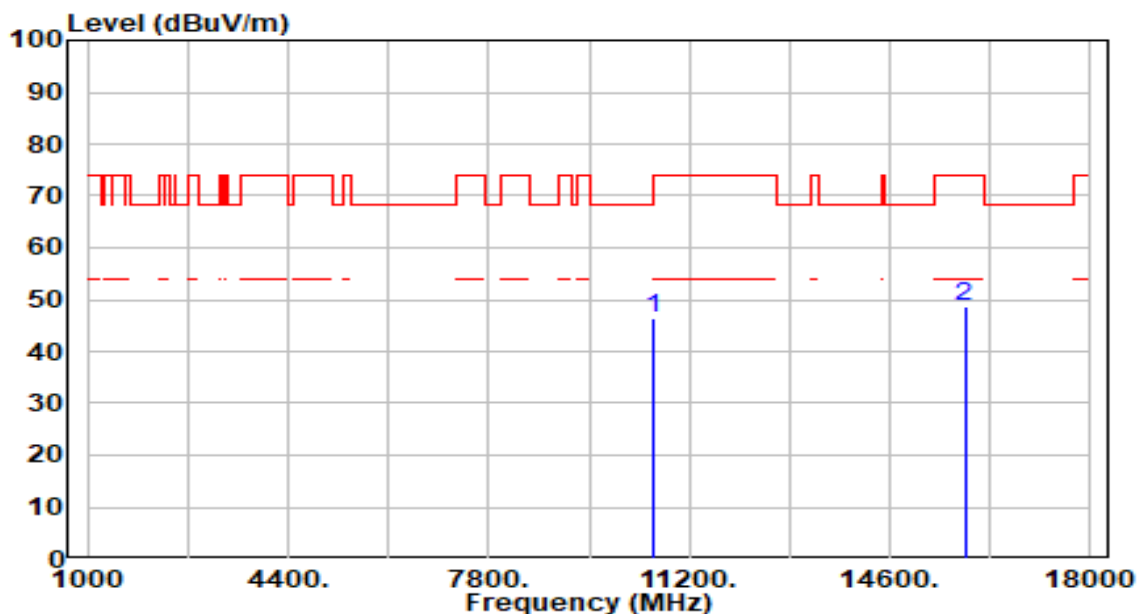


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.72	4.56	46.28	-21.92	68.20	100	180	Peak
2		15870.000	41.95	6.63	48.57	-25.43	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

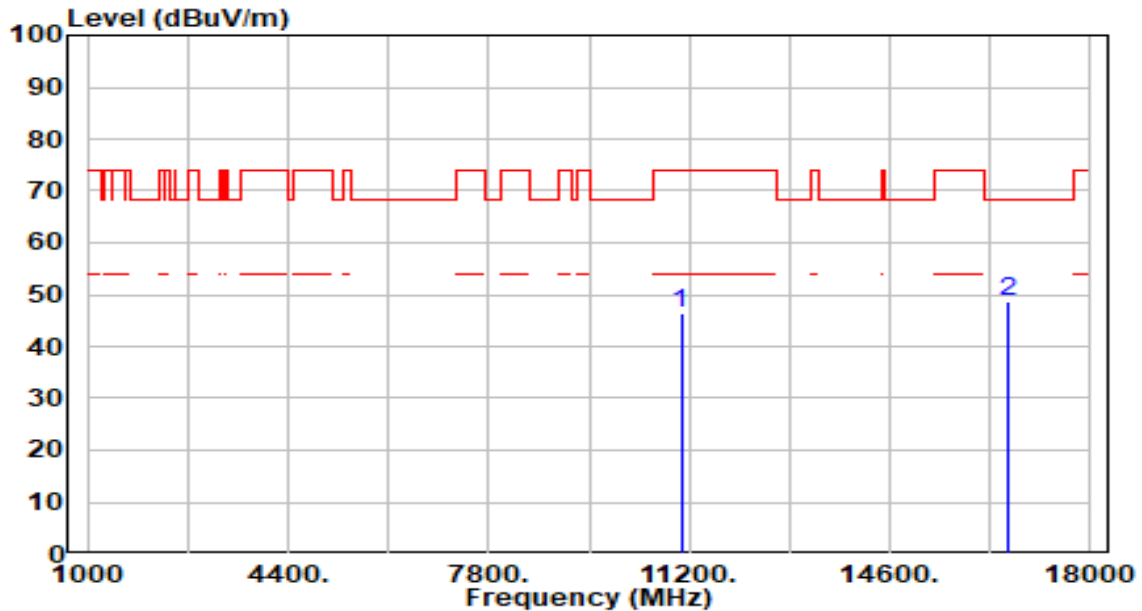


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.91	4.60	46.51	-27.49	74.00	100	144	Peak
2	*	16590.000	42.52	6.00	48.51	-19.69	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

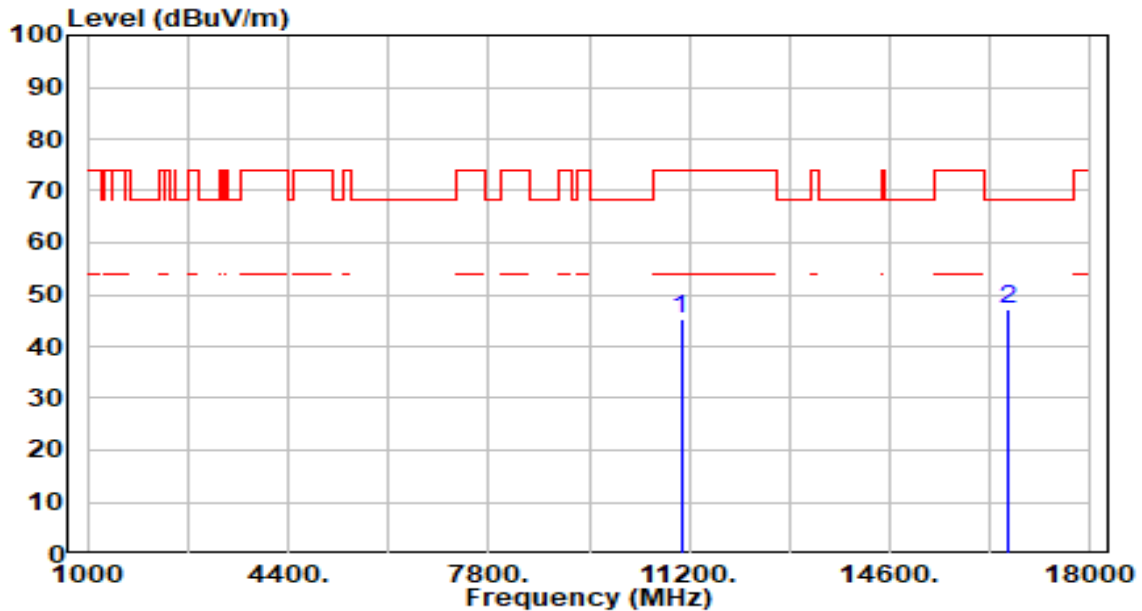


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	40.70	4.60	45.30	-28.70	74.00	100	194	Peak
2	*	16590.000	41.27	6.00	47.27	-20.93	68.20	100	309	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	By PoE

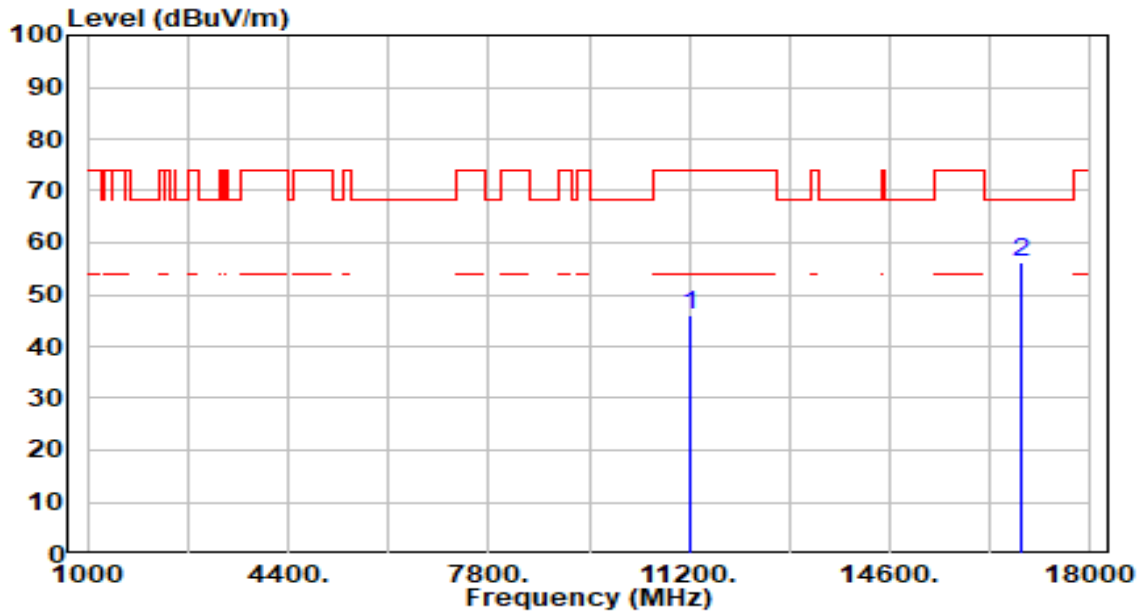


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.04	5.00	46.04	-27.96	74.00	100	195	Peak
2	*	16830.000	50.33	5.98	56.31	-11.89	68.20	100	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	By PoE

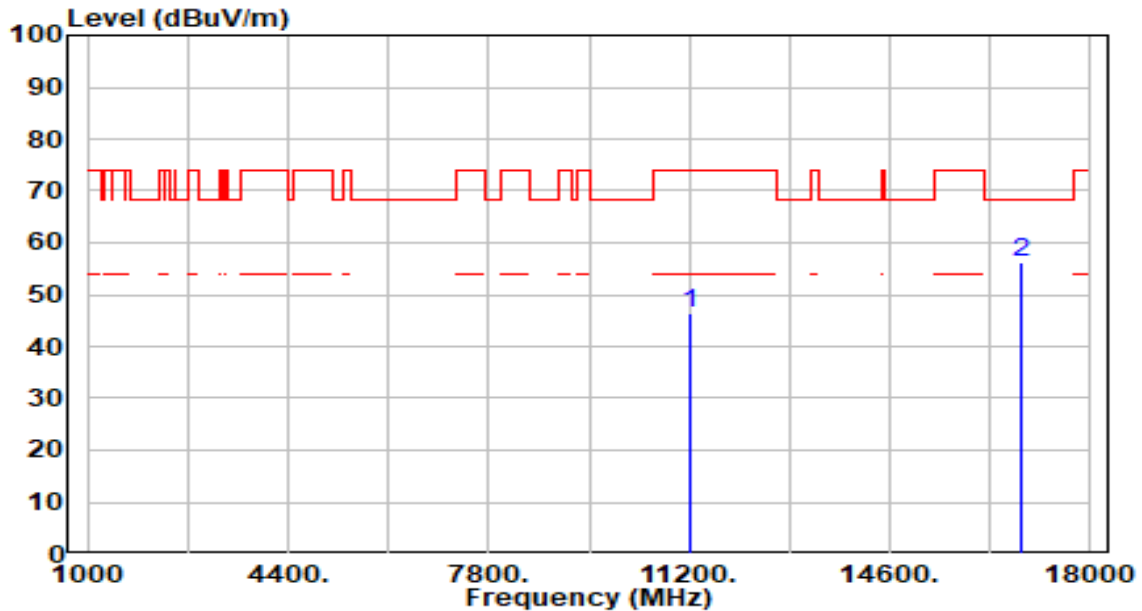


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.29	5.00	46.29	-27.71	74.00	100	140	Peak
2	*	16830.000	50.43	5.98	56.41	-11.79	68.20	100	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	By PoE

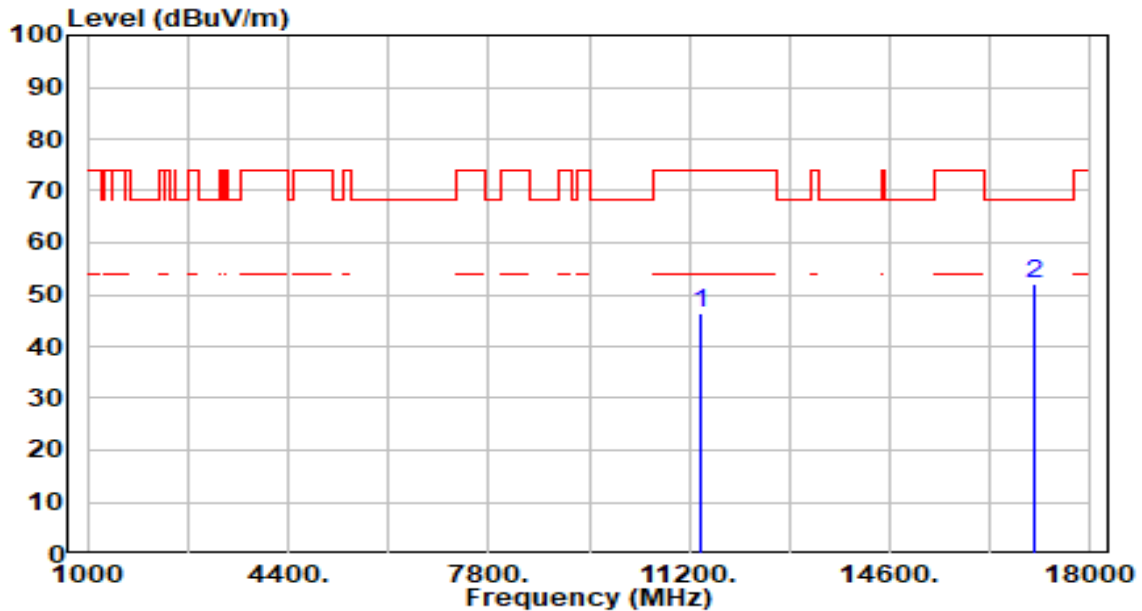


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.22	5.19	46.41	-27.59	74.00	100	218	Peak
2	*	17070.000	46.38	5.61	51.99	-16.21	68.20	100	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	By PoE

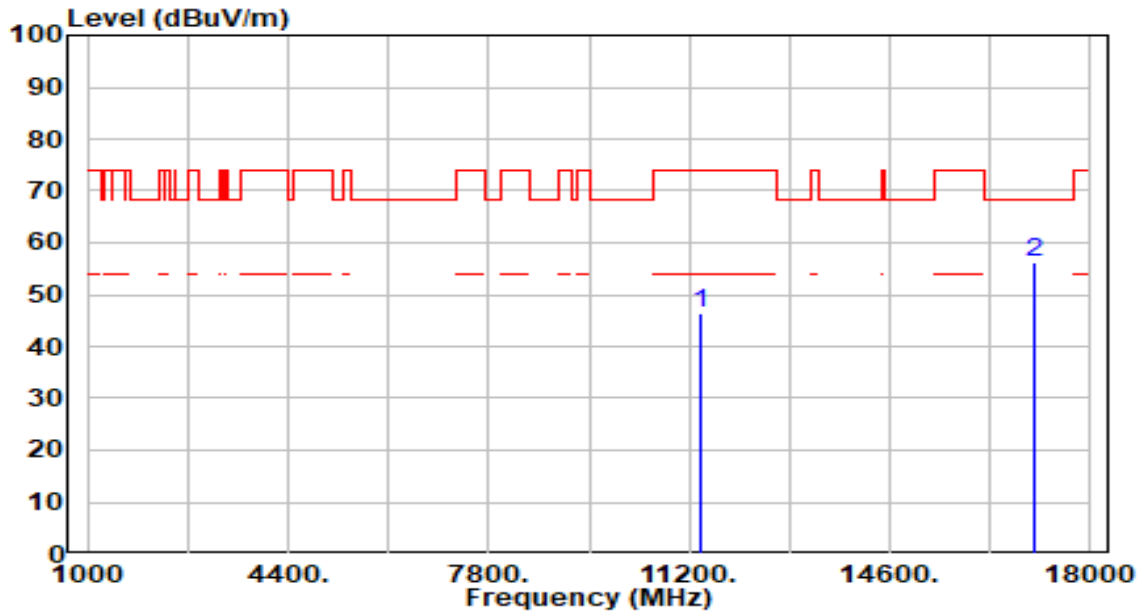


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.06	5.19	46.25	-27.75	74.00	100	166	Peak
2	*	17070.000	50.47	5.61	56.07	-12.13	68.20	100	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

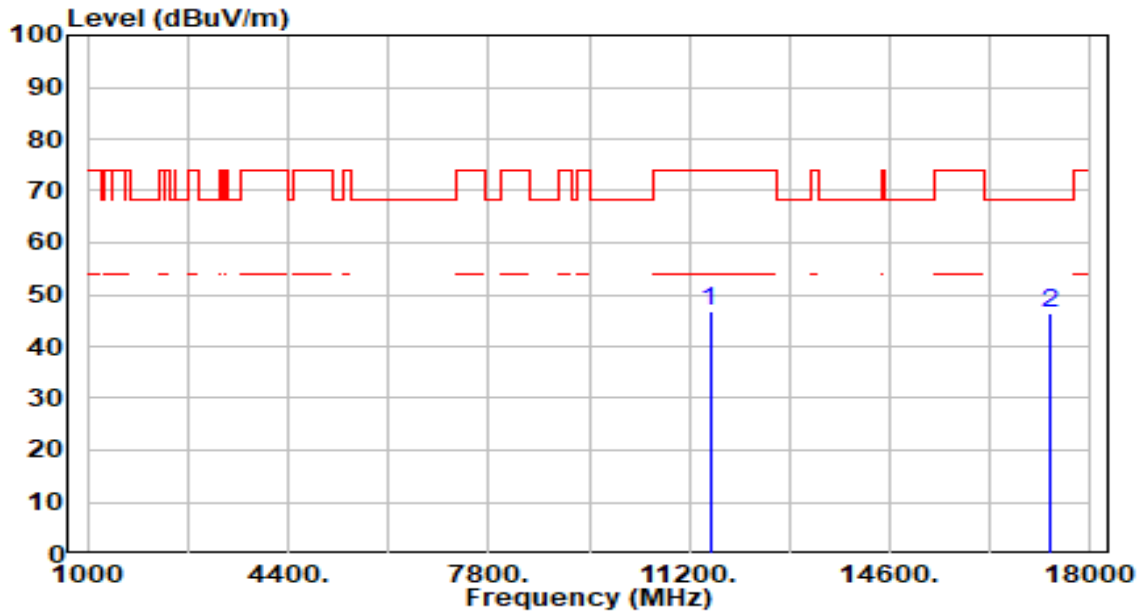


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	41.33	5.33	46.66	-27.34	74.00	100	124	Peak
2	*	17325.000	41.37	5.05	46.43	-21.77	68.20	100	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

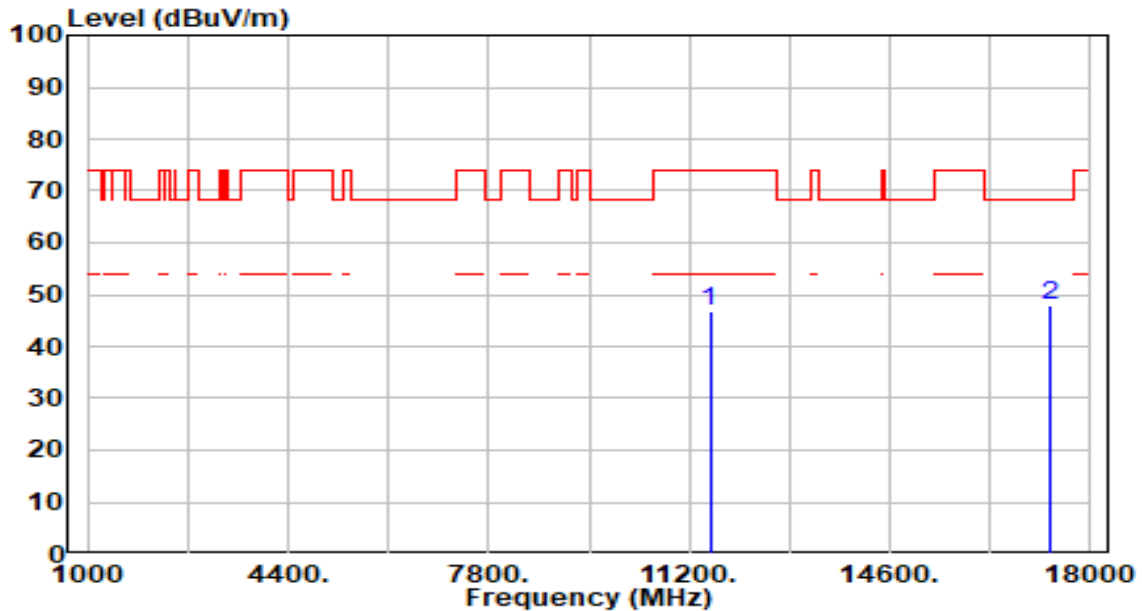


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	41.50	5.33	46.83	-27.17	74.00	100	202	Peak
2	*	17325.000	42.68	5.05	47.74	-20.46	68.20	100	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

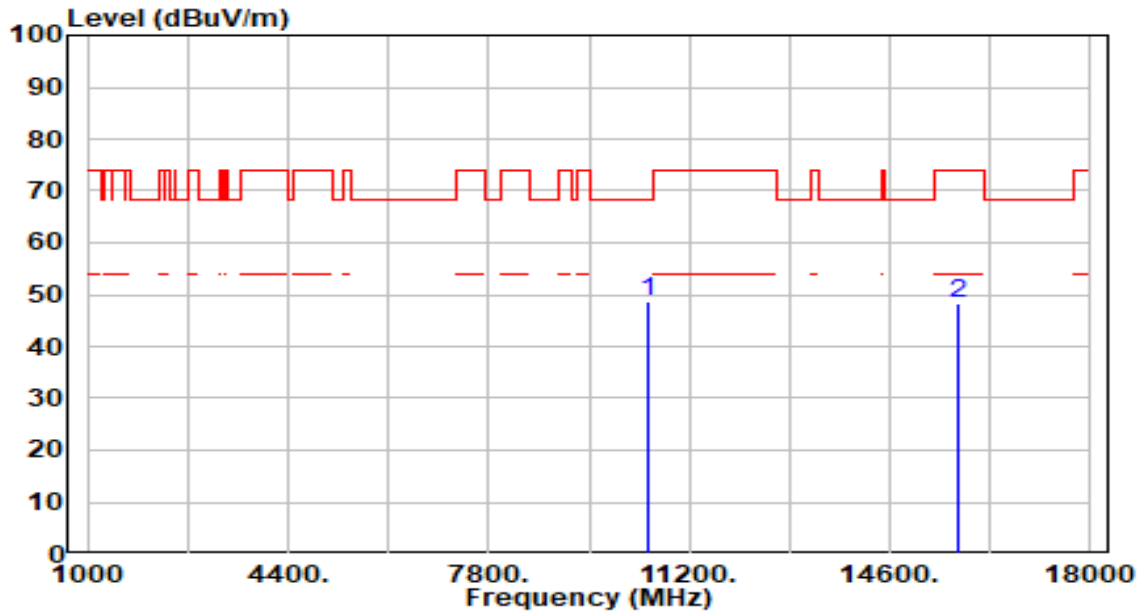


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	43.92	4.62	48.55	-19.65	68.20	100	118	Peak
2		15750.000	41.67	6.49	48.16	-25.84	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

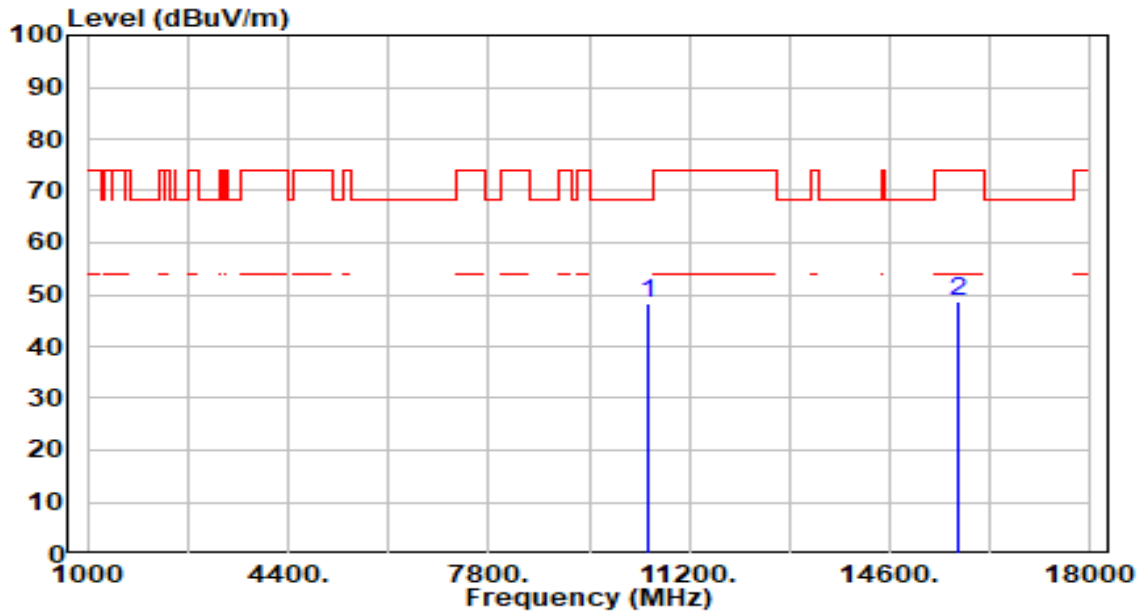


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	43.55	4.62	48.18	-20.02	68.20	100	181	Peak
2		15750.000	42.03	6.49	48.52	-25.48	74.00	100	263	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

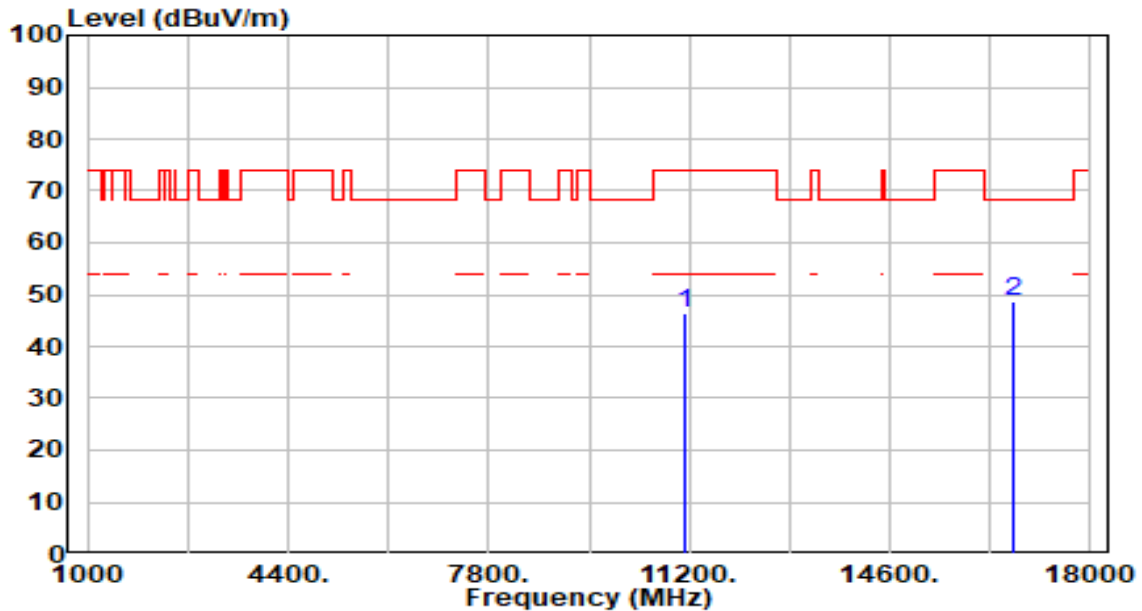


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.68	4.82	46.50	-27.50	74.00	100	116	Peak
2	*	16710.000	42.81	6.01	48.82	-19.38	68.20	100	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

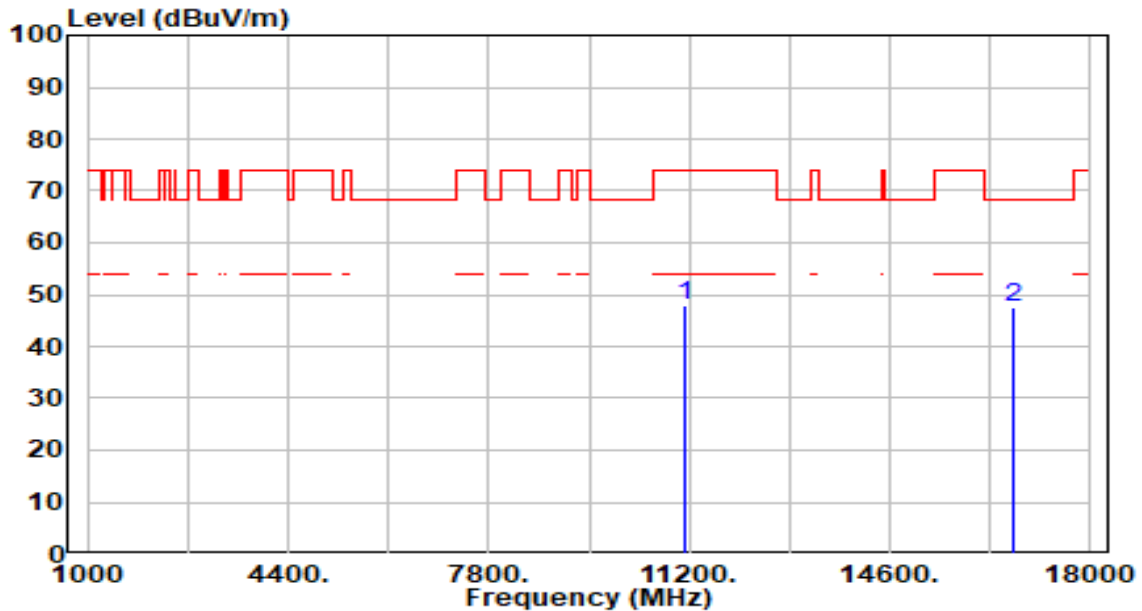


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	43.19	4.82	48.00	-26.00	74.00	100	137	Peak
2	*	16710.000	41.52	6.01	47.52	-20.68	68.20	100	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

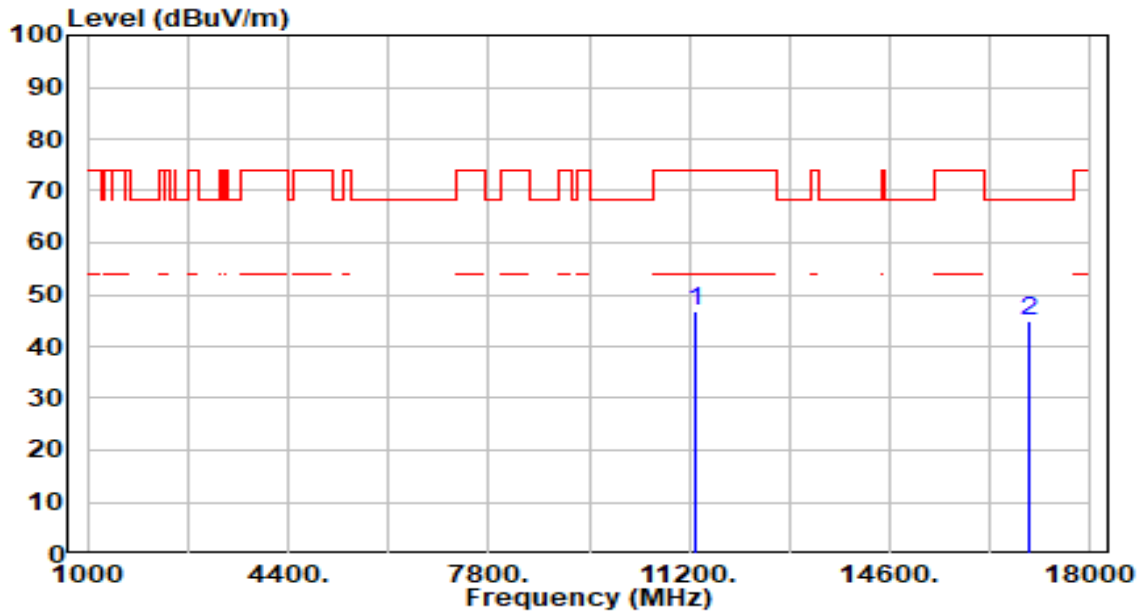


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11300.000	41.70	5.10	46.79	-27.21	74.00	100	343	Peak
2	*	16950.000	39.24	5.83	45.07	-23.13	68.20	100	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

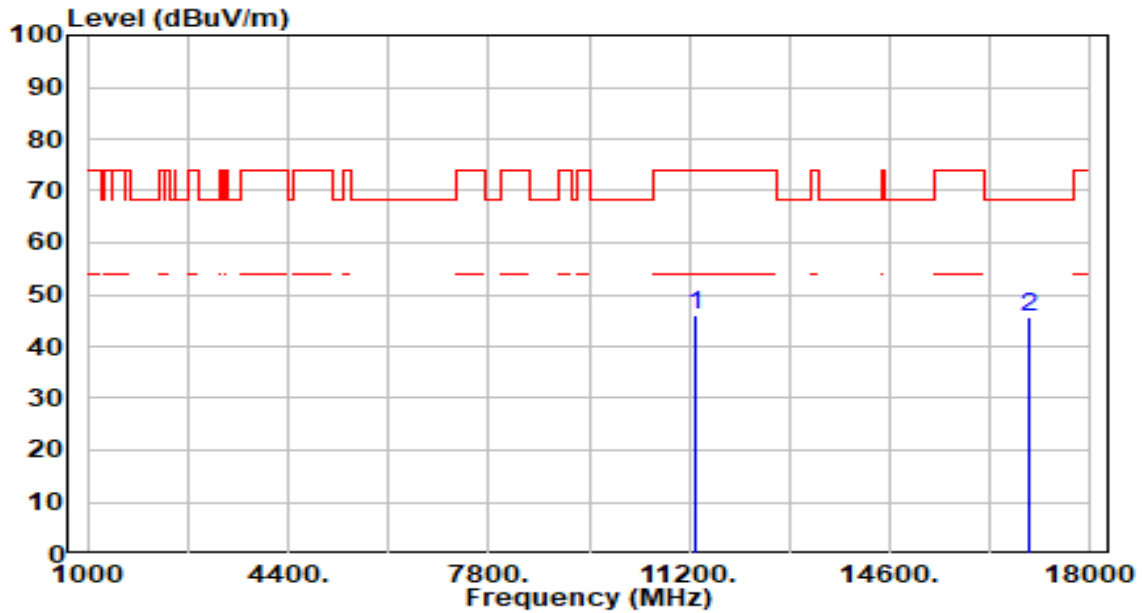


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11300.000	40.80	5.10	45.90	-28.10	74.00	100	145	Peak
2	*	16950.000	39.67	5.83	45.49	-22.71	68.20	100	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-29
Factor	BBHA 9170	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0	Test Voltage	By PoE

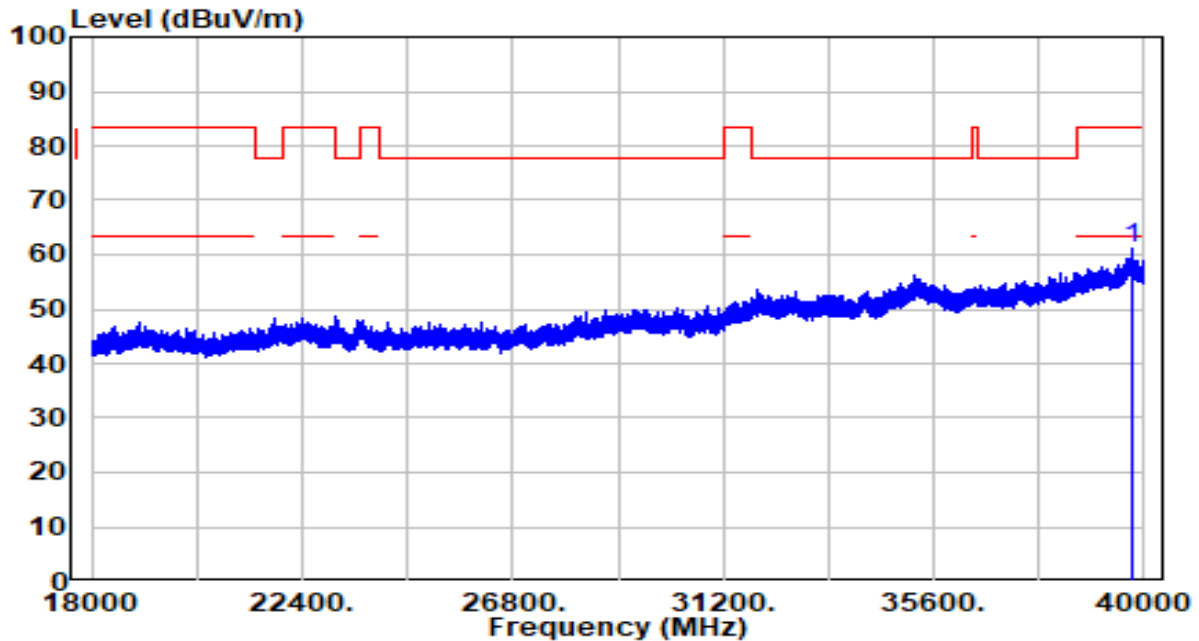


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39747.000	34.51	26.45	60.97	-22.53	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-29
Factor	BBHA 9170	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0	Test Voltage	By PoE

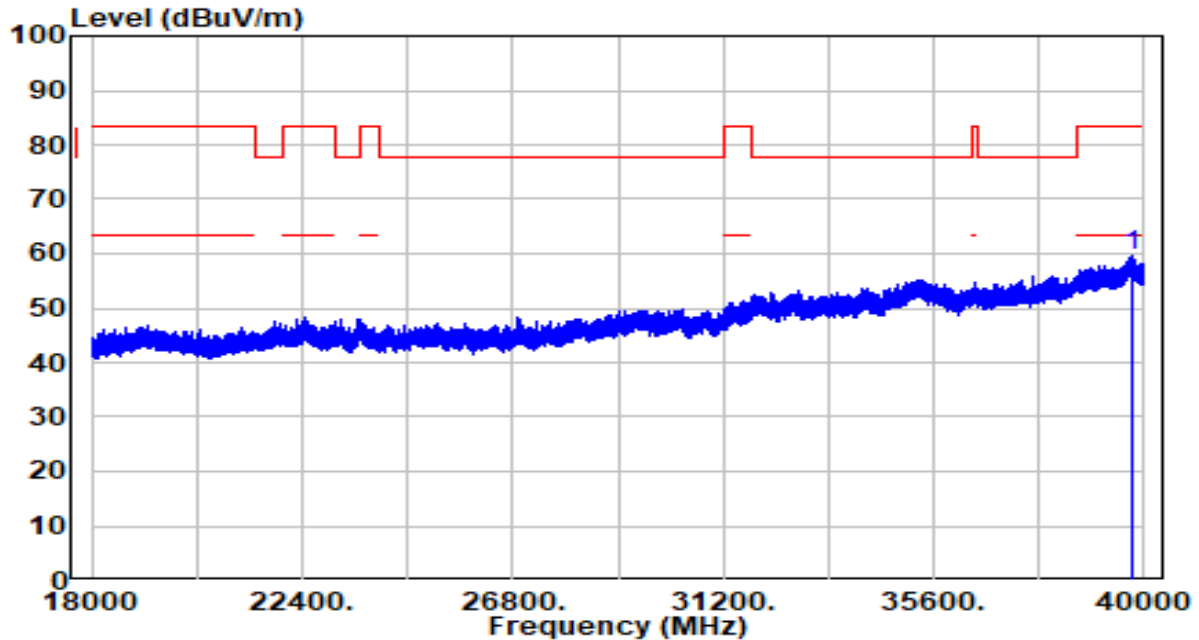

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39747.000	33.03	26.45	59.48	-24.02	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

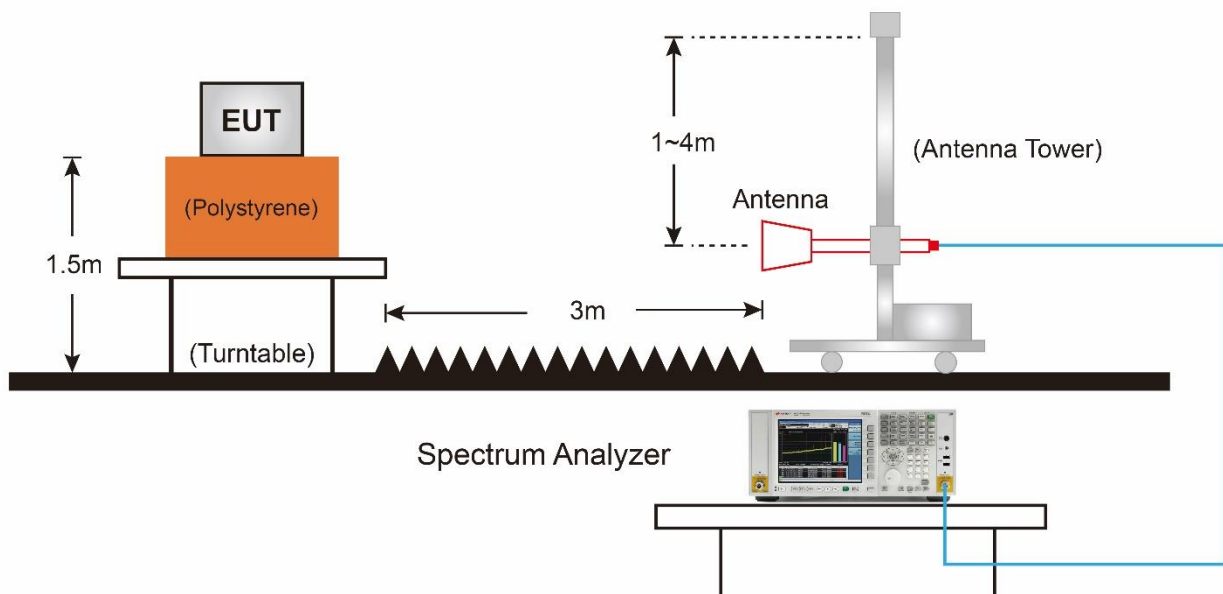

7.9.5. Test Result

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

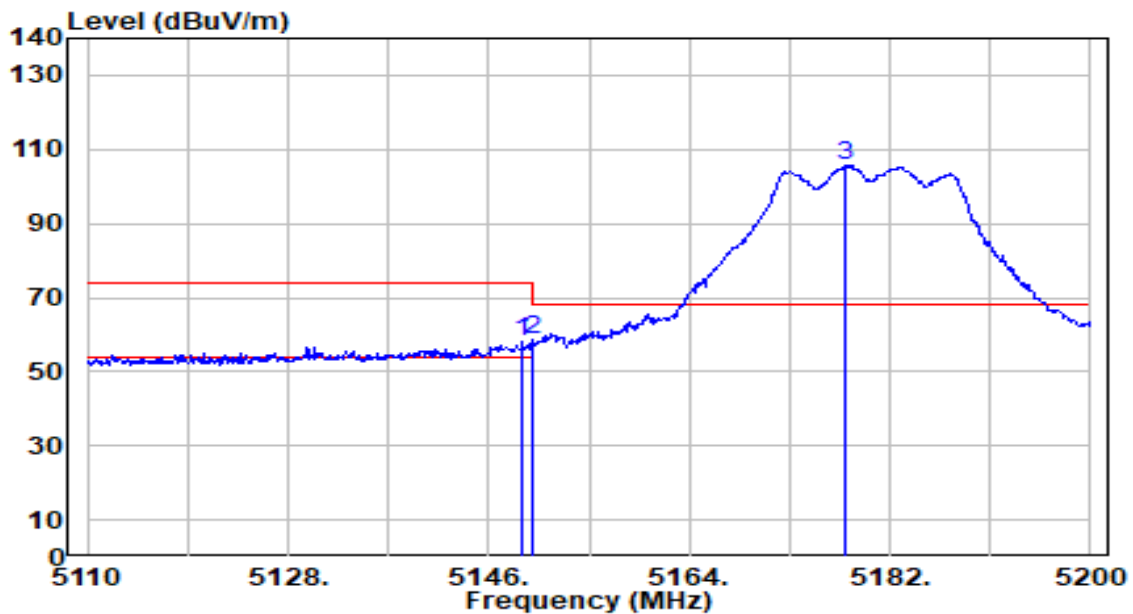


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.060	57.33	0.65	57.99	-16.01	74.00	100	133	Peak
2	*	5150.000	57.75	0.65	58.41	-15.59	74.00	100	133	Peak
3		5178.040	104.94	0.68	105.62	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

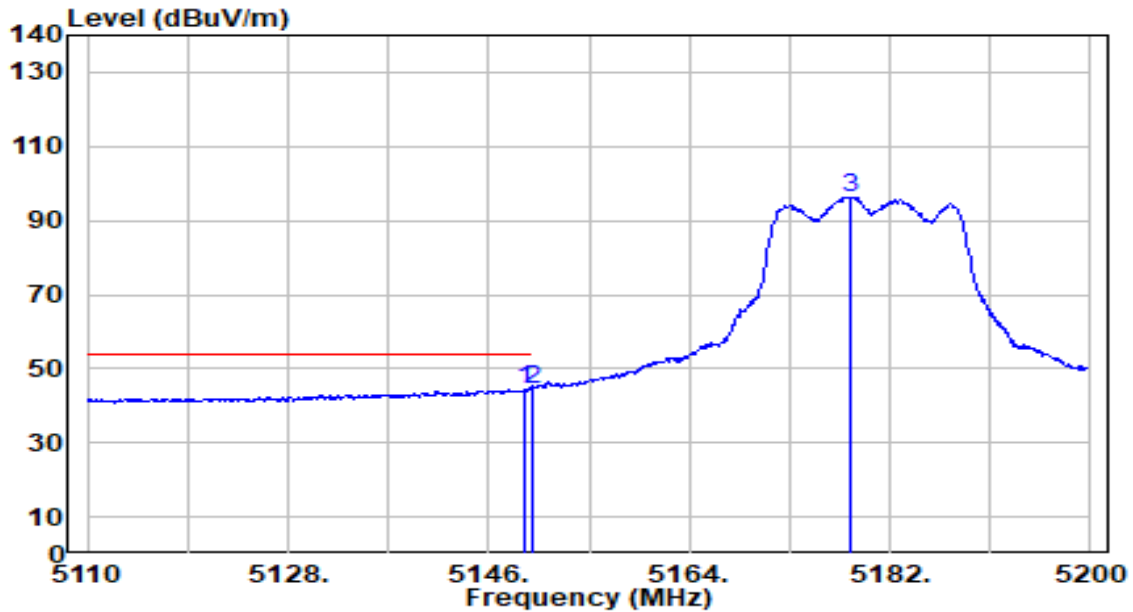


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.330	43.74	0.65	44.39	-9.61	54.00	100	133	Average
2	*	5150.000	43.95	0.65	44.61	-9.39	54.00	100	133	Average
3		5178.490	95.68	0.68	96.36	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

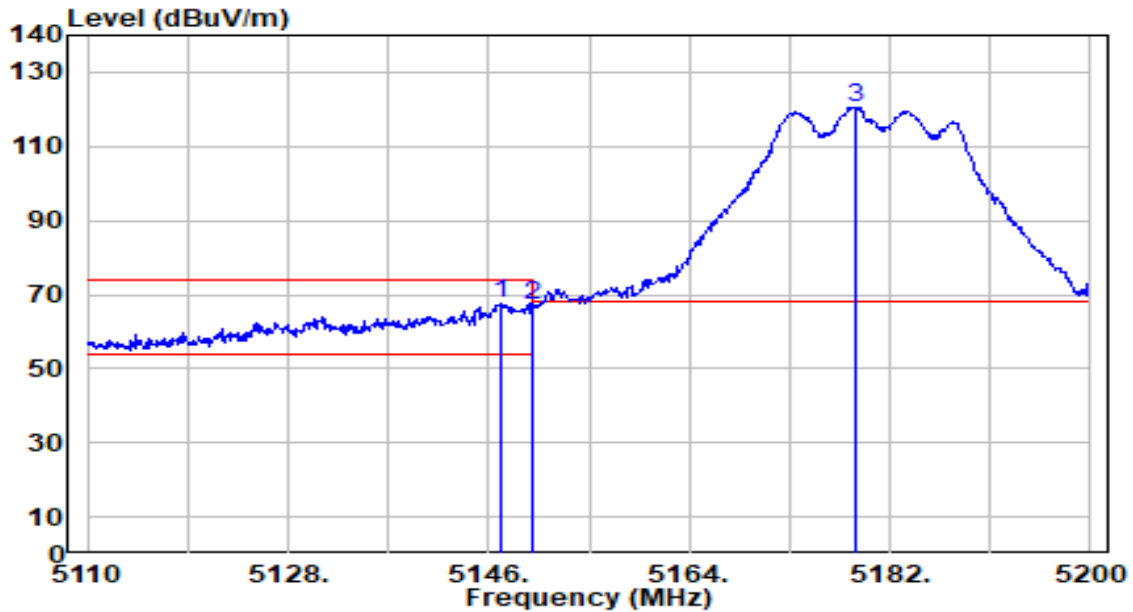


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.170	66.96	0.65	67.61	-6.39	74.00	219	172	Peak
2		5150.000	66.32	0.65	66.97	-7.03	74.00	219	172	Peak
3		5179.030	119.77	0.68	120.45	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

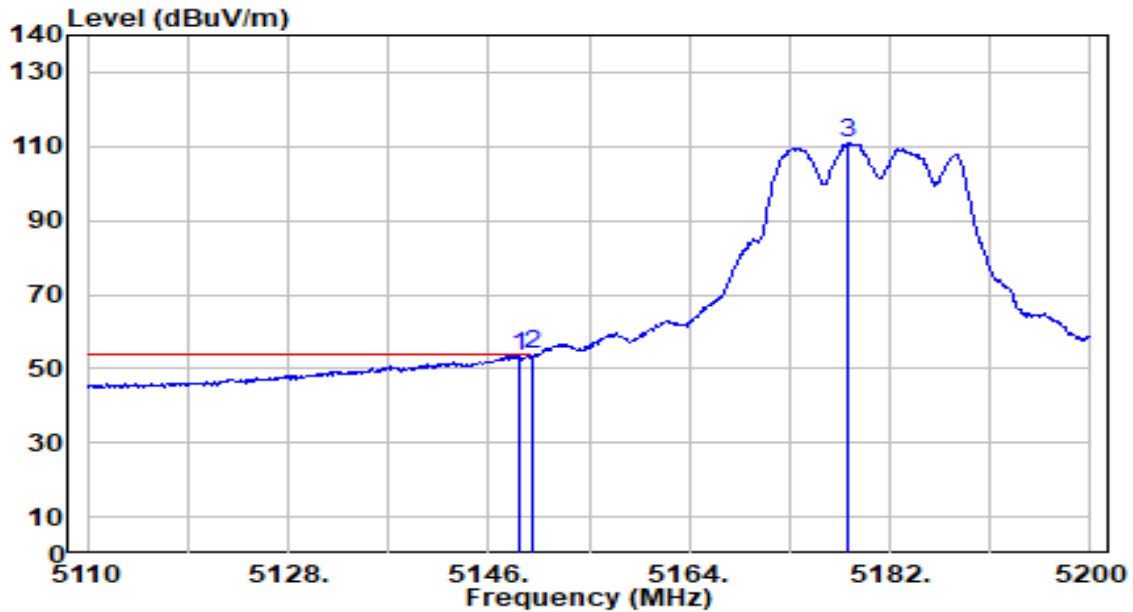


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.790	52.74	0.65	53.40	-0.60	54.00	219	172	Average
2	*	5150.000	53.12	0.65	53.78	-0.22	54.00	219	172	Average
3		5178.130	110.24	0.68	110.92	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

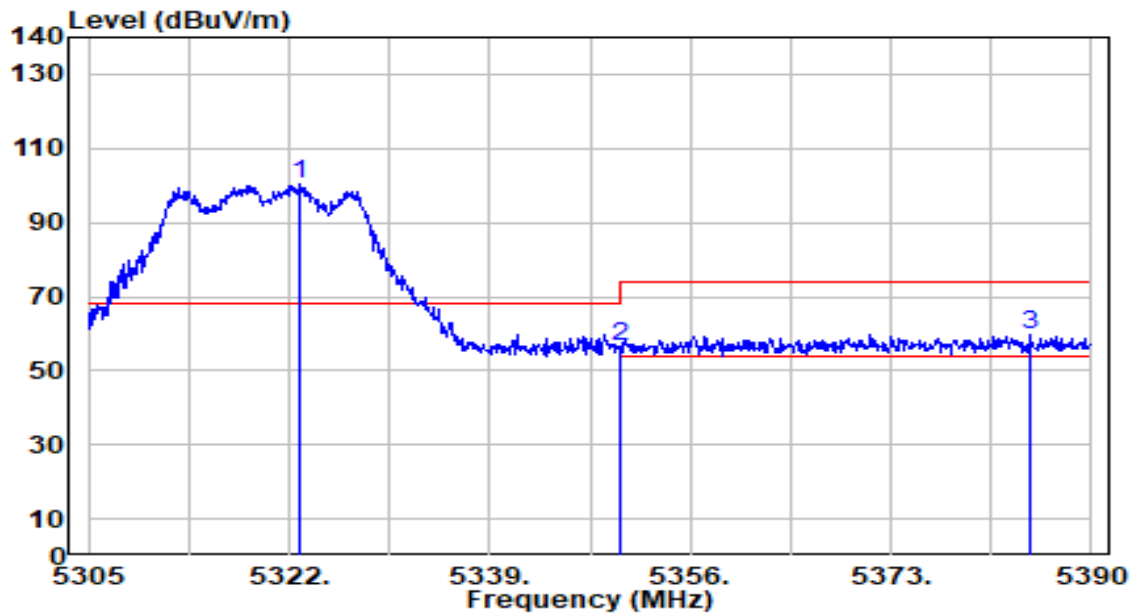


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.935	100.04	0.51	100.55	N/A	N/A	100	133	Peak
2	5350.000	56.08	0.47	56.55	-17.45	74.00	100	133	Peak
3	* 5384.900	59.28	0.42	59.70	-14.30	74.00	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

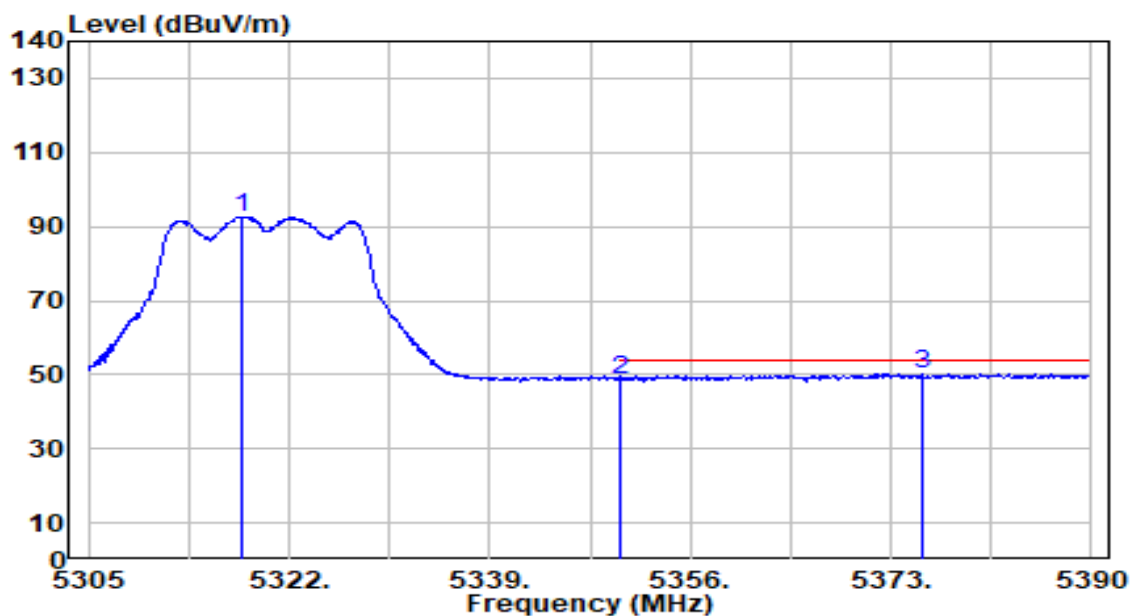


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.090	92.13	0.52	92.65	N/A	N/A	100	133	Average
2	5350.000	48.05	0.47	48.52	-5.48	54.00	100	133	Average
3	* 5375.720	49.81	0.43	50.24	-3.76	54.00	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

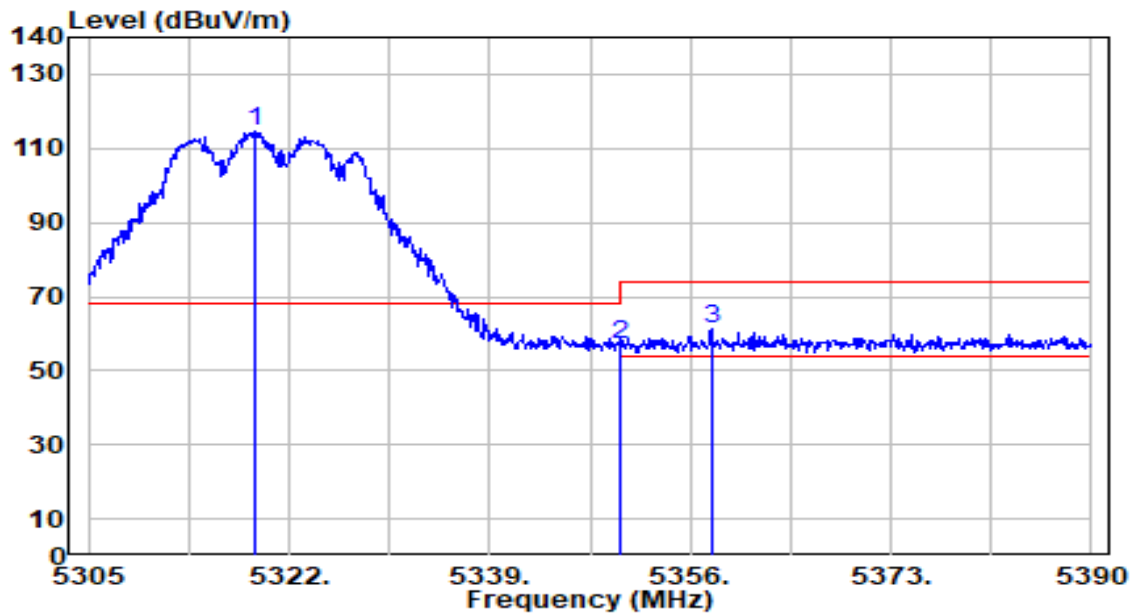


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.025	114.33	0.52	114.85	N/A	N/A	183	173	Peak
2	5350.000	56.48	0.47	56.95	-17.05	74.00	183	173	Peak
3	* 5357.785	60.63	0.46	61.08	-12.92	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

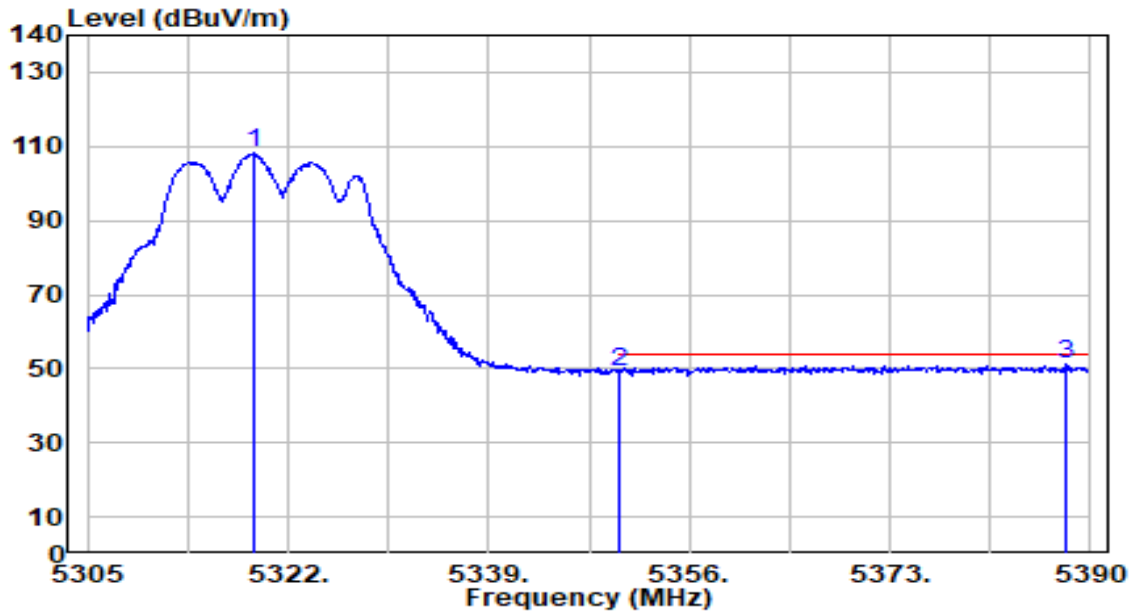


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.110	107.79	0.52	108.31	N/A	N/A	183	173	Average
2	5350.000	48.58	0.47	49.05	-4.95	54.00	183	173	Average
3	* 5387.960	50.62	0.41	51.03	-2.97	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

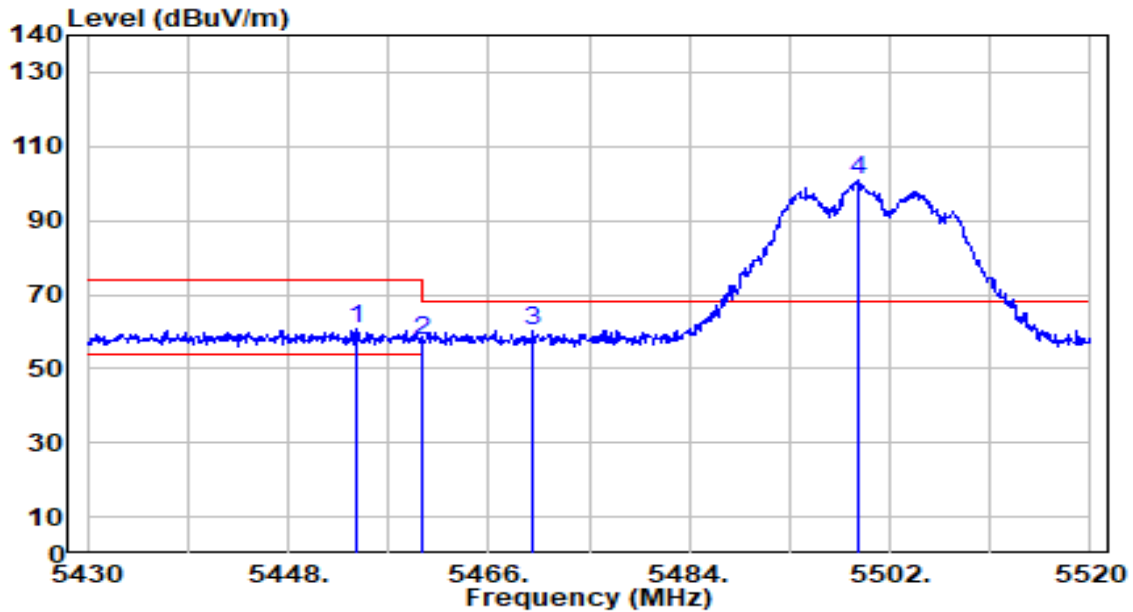


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.030	59.95	0.63	60.58	-13.42	74.00	300	98	Peak
2	5460.000	56.74	0.66	57.40	-16.60	74.00	300	98	Peak
3	* 5470.000	59.49	0.71	60.20	-8.00	68.20	300	98	Peak
4	5499.210	99.87	0.84	100.71	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

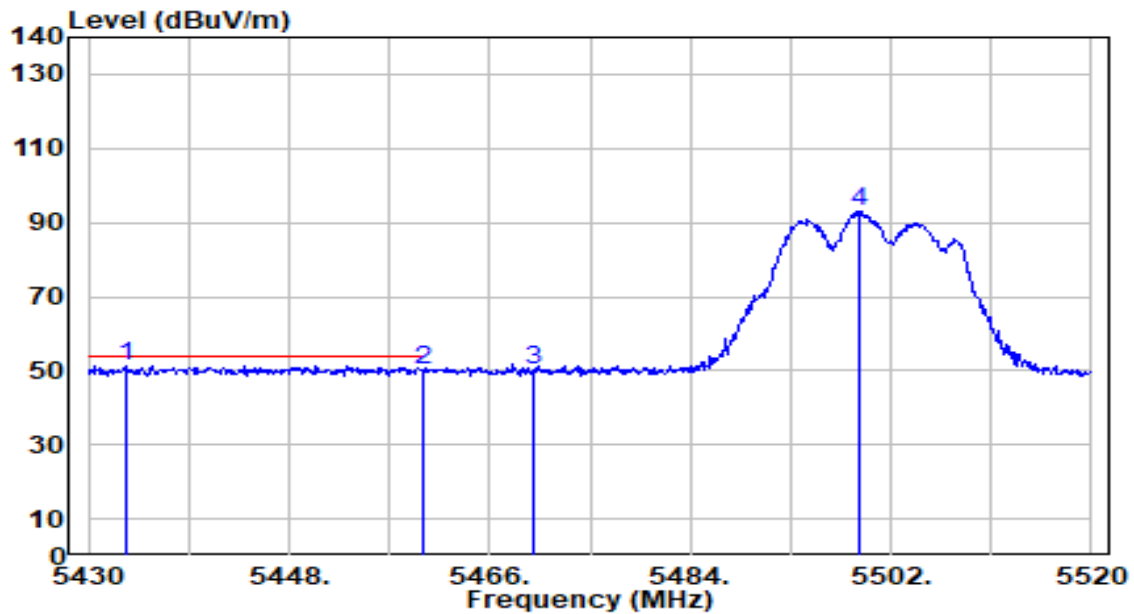


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5433.330	50.78	0.54	51.32	-2.68	54.00	300	98	Average
2		5460.000	49.49	0.66	50.15	-3.85	54.00	300	98	Average
3		5470.000	49.25	0.71	49.96	N/A	N/A	300	98	Average
4		5499.120	92.15	0.84	92.98	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

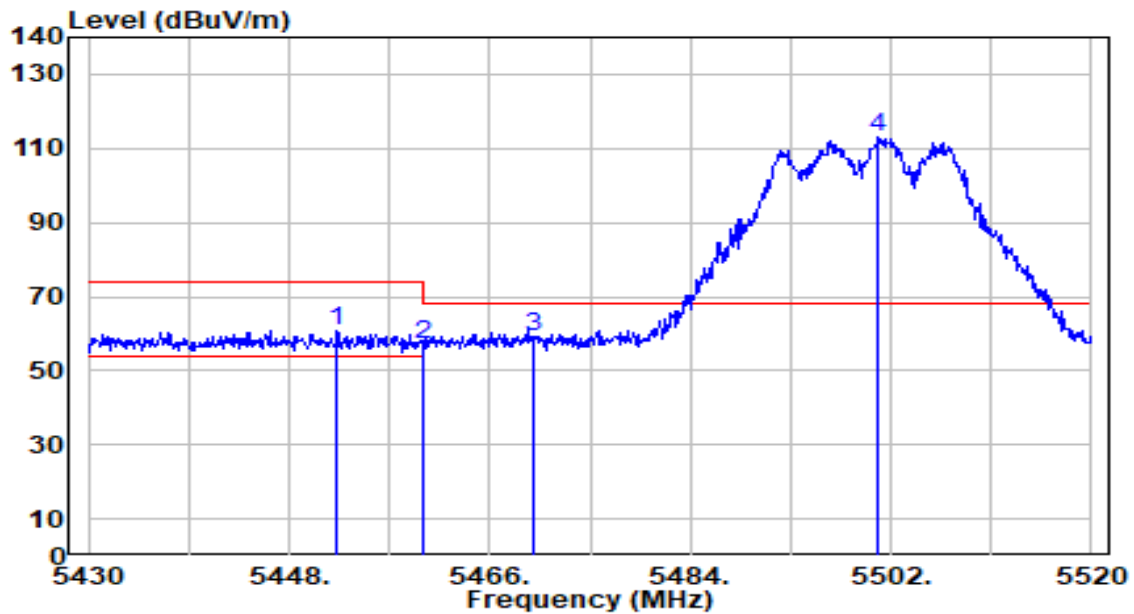


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.320	60.13	0.63	60.76	-13.24	74.00	213	148	Peak
2	5460.000	56.50	0.66	57.16	-16.84	74.00	213	148	Peak
3	* 5470.000	58.48	0.71	59.18	-9.02	68.20	213	148	Peak
4	5500.830	112.04	0.84	112.88	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

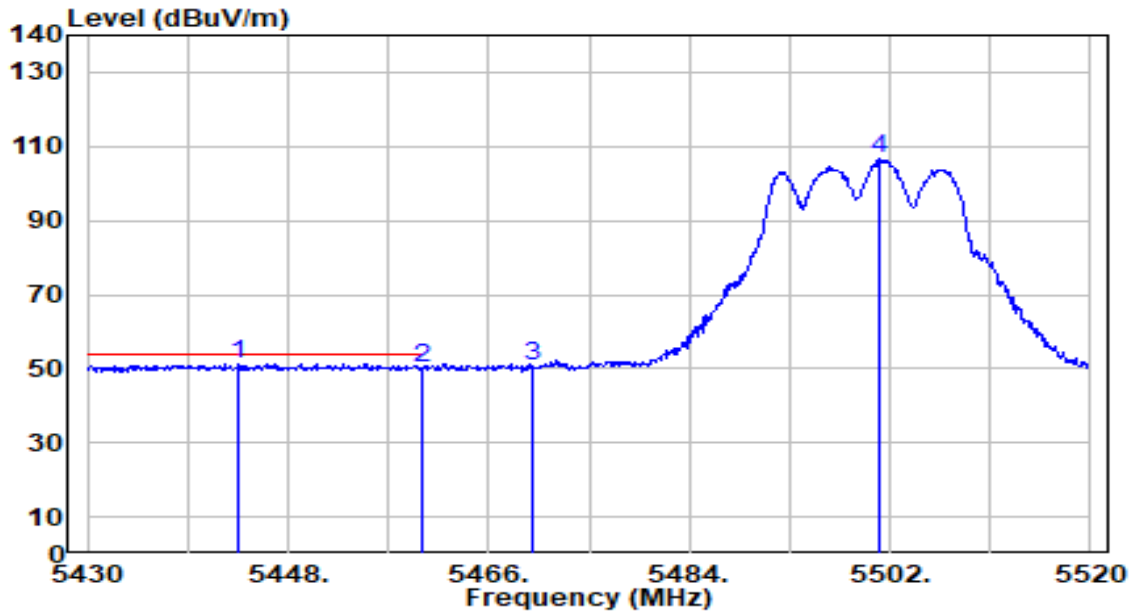


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5443.500	50.68	0.59	51.27	-2.73	54.00	213	148	Average
2		5460.000	49.39	0.66	50.05	-3.95	54.00	213	148	Average
3		5470.000	50.19	0.71	50.89	N/A	N/A	213	148	Average
4		5501.010	105.65	0.84	106.49	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

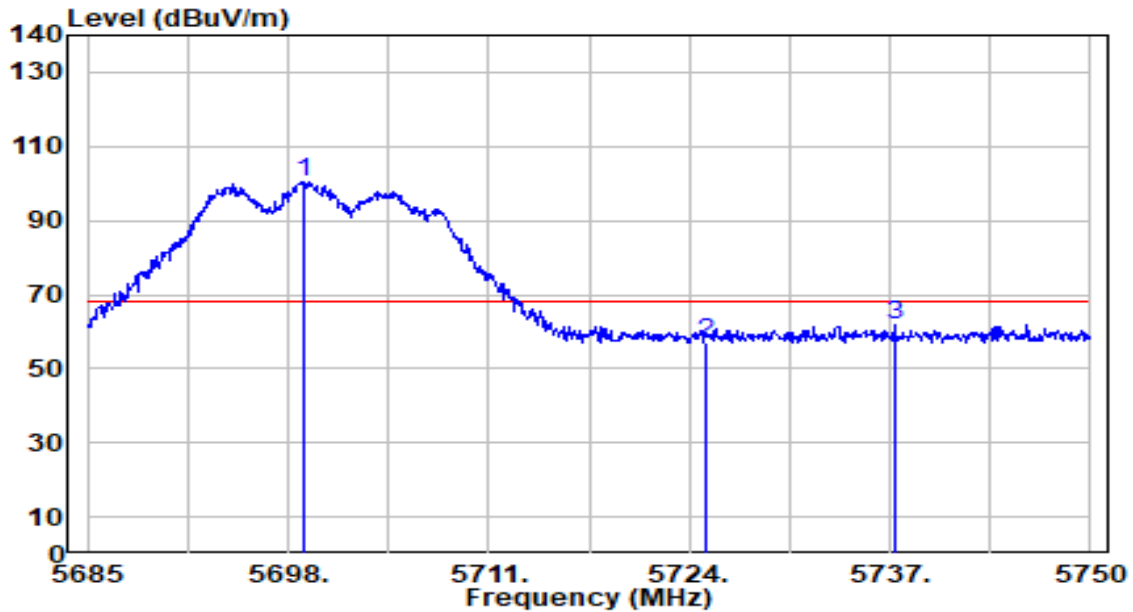


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.975	98.50	1.77	100.27	N/A	N/A	200	105	Peak
2	5725.000	55.16	1.89	57.05	-11.15	68.20	200	105	Peak
3	* 5737.325	59.99	1.95	61.94	-6.26	68.20	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

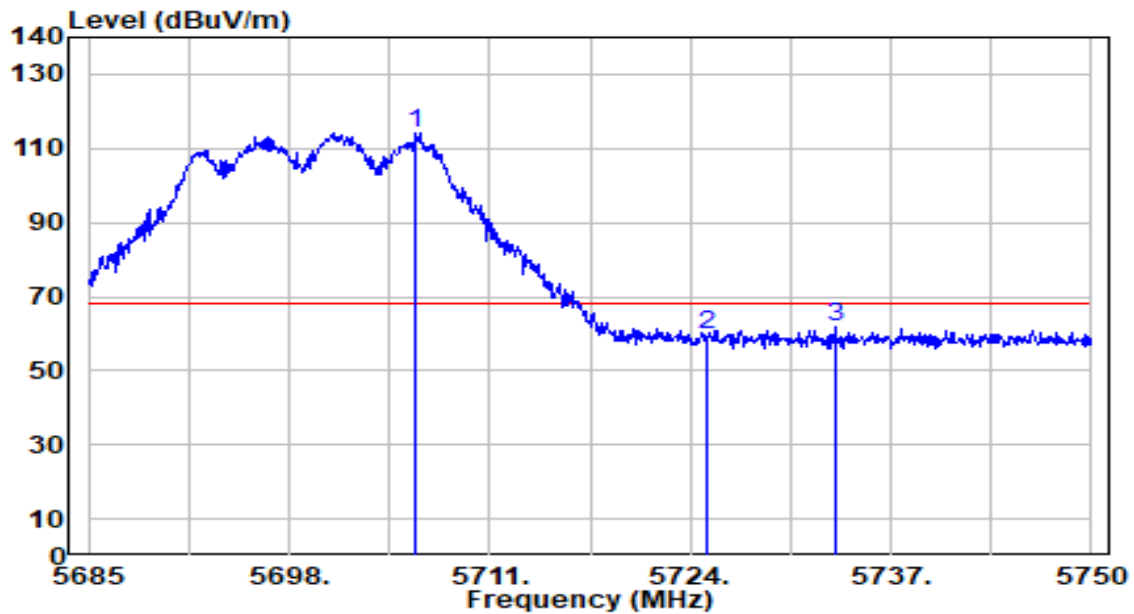


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.255	112.23	1.81	114.04	N/A	N/A	204	195	Peak
2	5725.000	57.91	1.89	59.80	-8.40	68.20	204	195	Peak
3	* 5733.425	60.12	1.93	62.05	-6.15	68.20	204	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

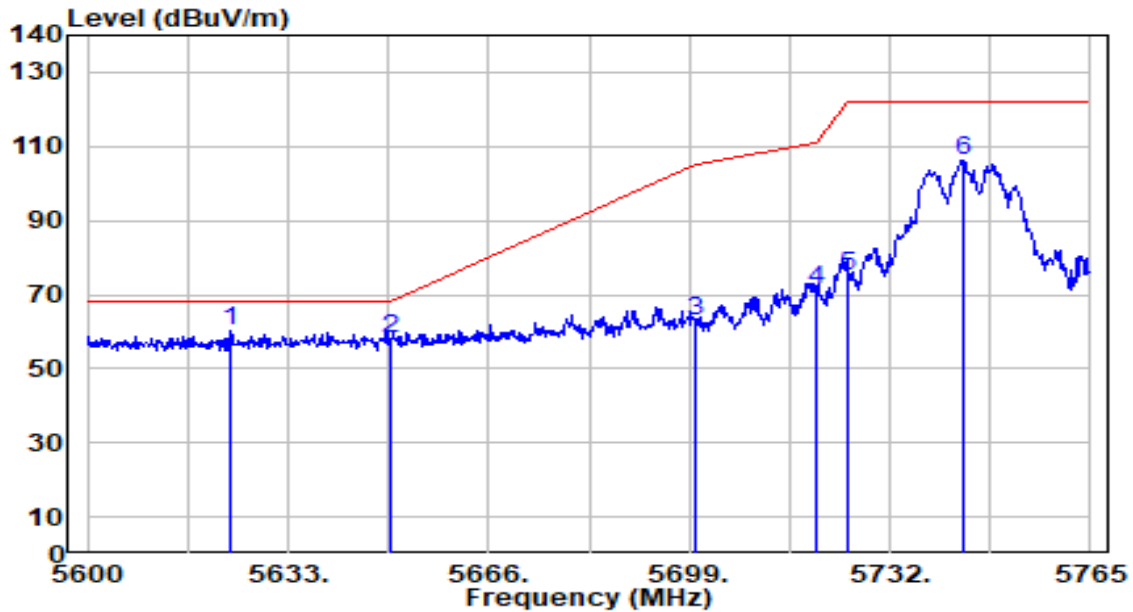


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5623.595	58.58	1.42	59.99	-8.21	68.20	207	99	Peak
2		5650.000	56.77	1.54	58.31	-9.89	68.20	207	99	Peak
3		5700.000	61.13	1.78	62.90	-42.30	105.20	207	99	Peak
4		5720.000	69.68	1.87	71.55	-39.25	110.80	207	99	Peak
5		5725.000	72.90	1.89	74.80	-47.40	122.20	207	99	Peak
6		5744.045	104.04	1.98	106.02	N/A	N/A	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

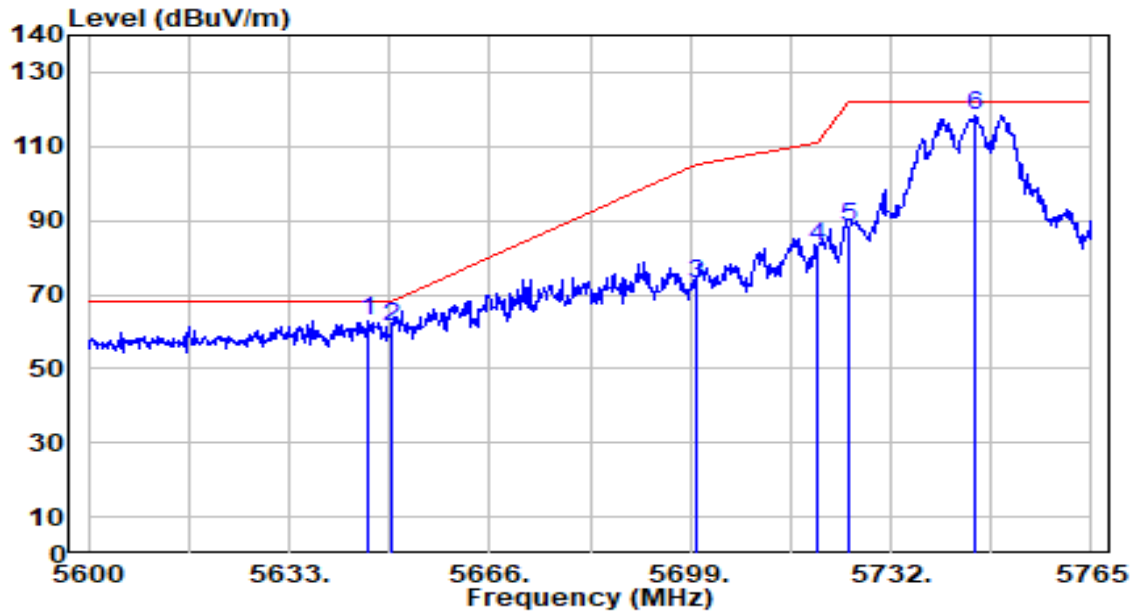


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.035	61.51	1.52	63.03	-5.17	68.20	202	188	Peak
2		5650.000	59.90	1.54	61.44	-6.76	68.20	202	188	Peak
3		5700.000	71.29	1.78	73.07	-32.13	105.20	202	188	Peak
4		5720.000	80.98	1.87	82.85	-27.95	110.80	202	188	Peak
5		5725.000	86.28	1.89	88.17	-34.03	122.20	202	188	Peak
6		5745.695	116.48	1.99	118.47	N/A	N/A	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

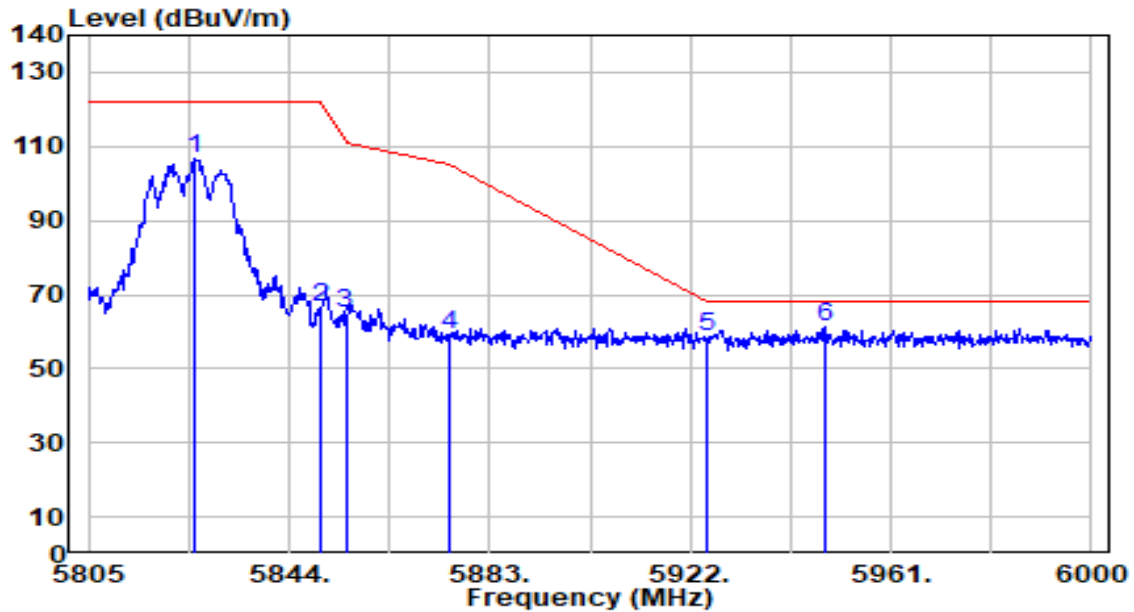


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.475	104.50	2.25	106.75	N/A	N/A	285	222	Peak
2	5850.000	64.28	2.25	66.53	-55.67	122.20	285	222	Peak
3	5855.000	62.82	2.25	65.07	-45.73	110.80	285	222	Peak
4	5875.000	56.94	2.26	59.20	-46.00	105.20	285	222	Peak
5	5925.000	56.51	2.27	58.78	-9.42	68.20	285	222	Peak
6	* 5948.130	58.86	2.27	61.13	-7.07	68.20	285	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

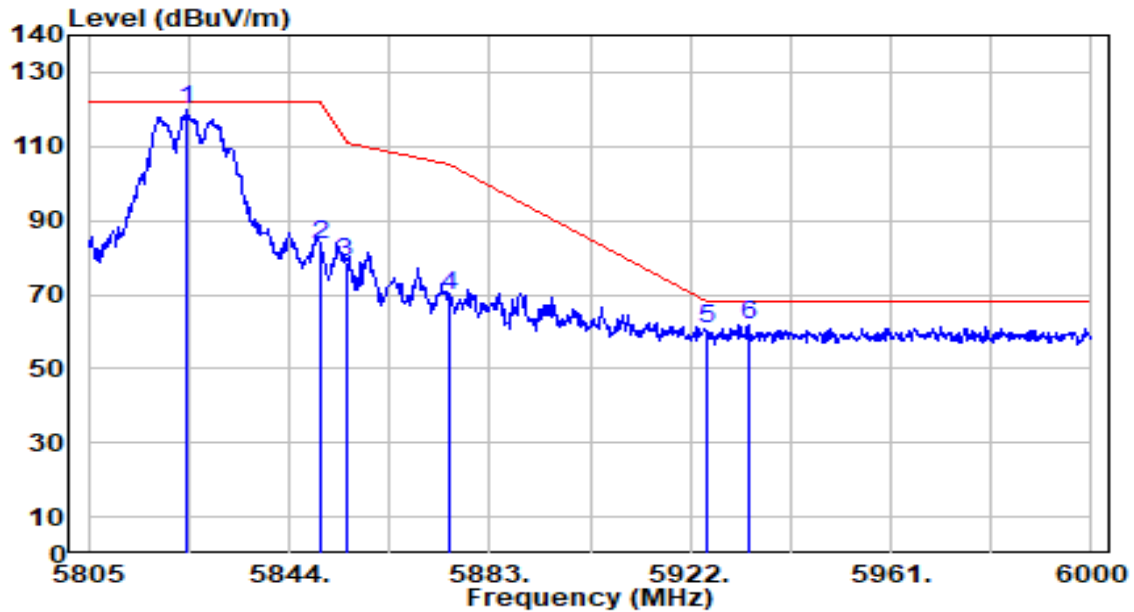


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.915	117.74	2.25	119.99	N/A	N/A	185	176	Peak
2	5850.000	81.18	2.25	83.43	-38.77	122.20	185	176	Peak
3	5855.000	76.23	2.25	78.48	-32.32	110.80	185	176	Peak
4	5875.000	67.57	2.26	69.83	-35.37	105.20	185	176	Peak
5	5925.000	58.74	2.27	61.01	-7.19	68.20	185	176	Peak
6	* 5933.310	59.61	2.27	61.88	-6.32	68.20	185	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

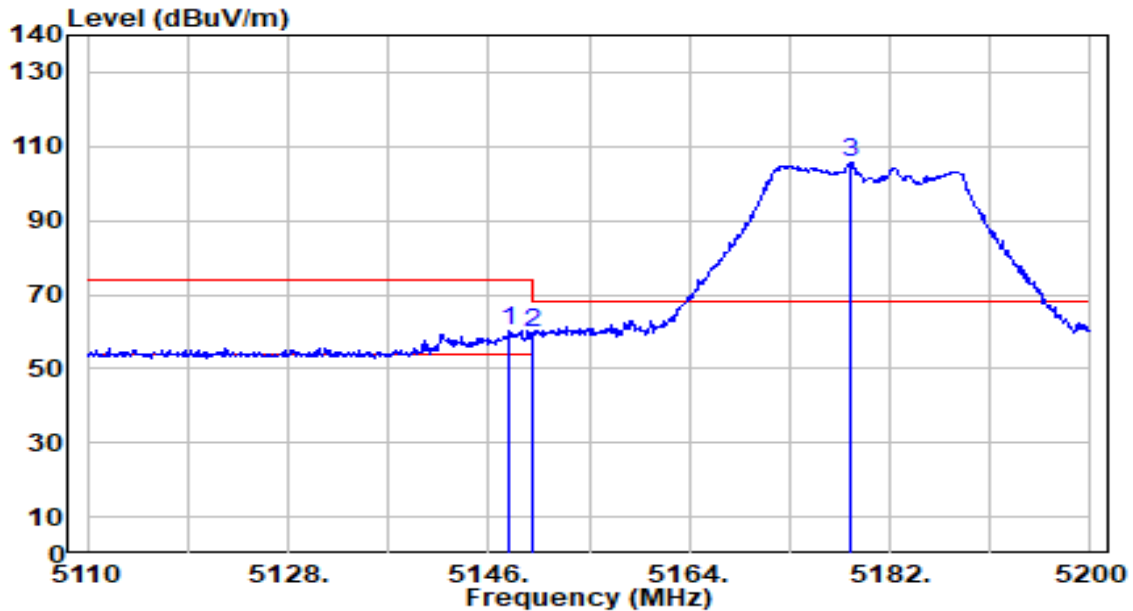


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	59.50	0.65	60.15	-13.85	74.00	100	133	Peak
2		5150.000	59.12	0.65	59.77	-14.23	74.00	100	133	Peak
3		5178.490	104.77	0.68	105.45	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

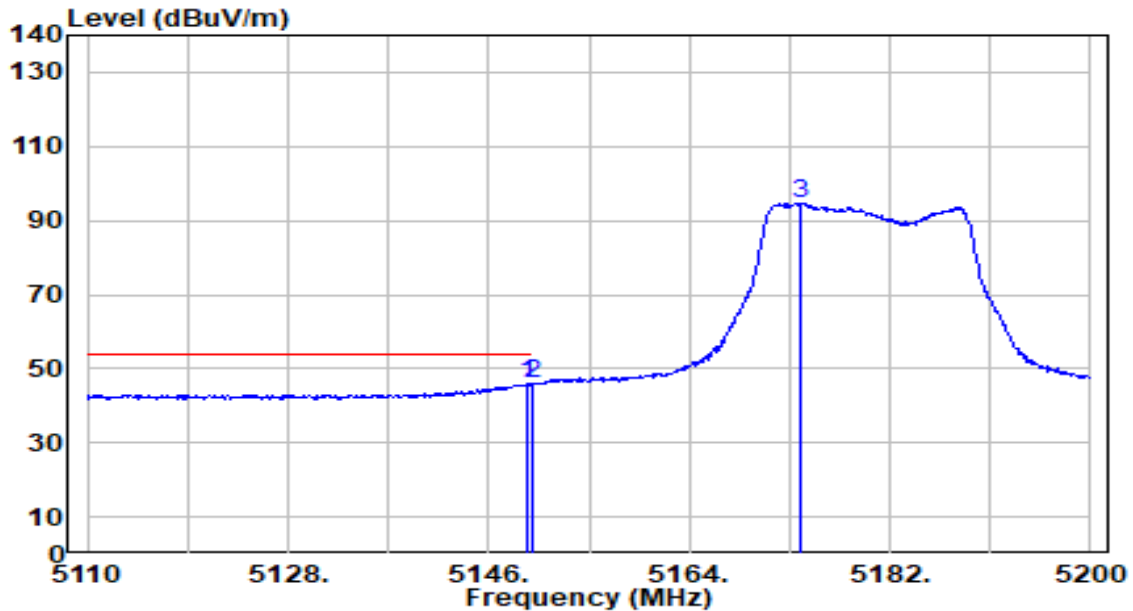


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	45.35	0.65	46.00	-8.00	54.00	100	133	Average
2	*	5150.000	45.52	0.65	46.17	-7.83	54.00	100	133	Average
3		5173.990	93.93	0.68	94.61	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

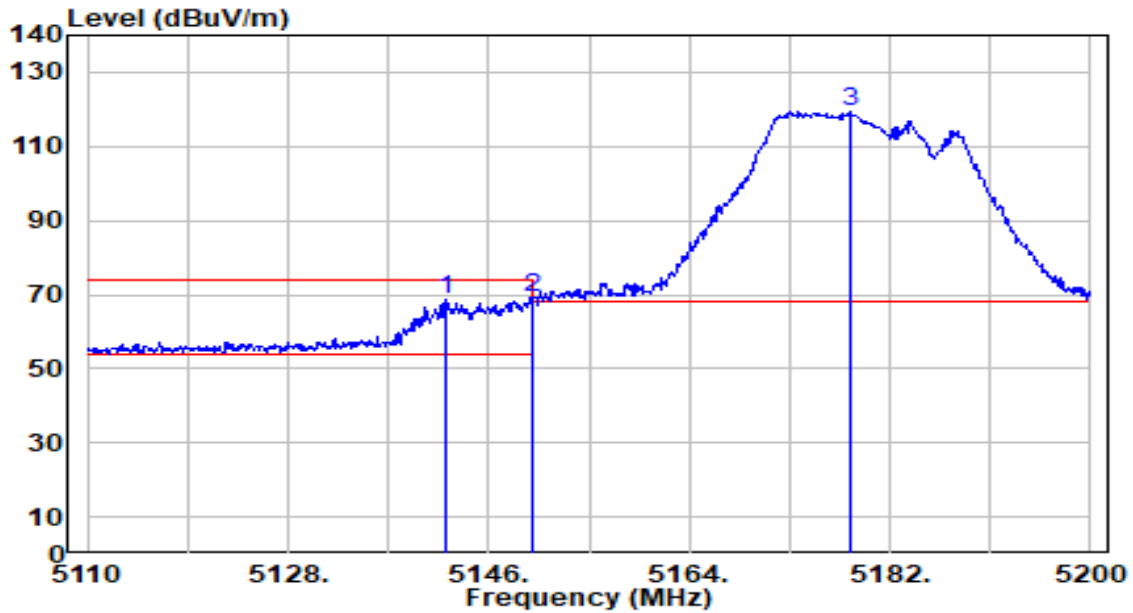


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.130	67.91	0.65	68.55	-5.45	74.00	219	172	Peak
2	* 5150.000	68.70	0.65	69.35	-4.65	74.00	219	172	Peak
3	5178.400	118.87	0.68	119.55	N/A	N/A	219	172	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

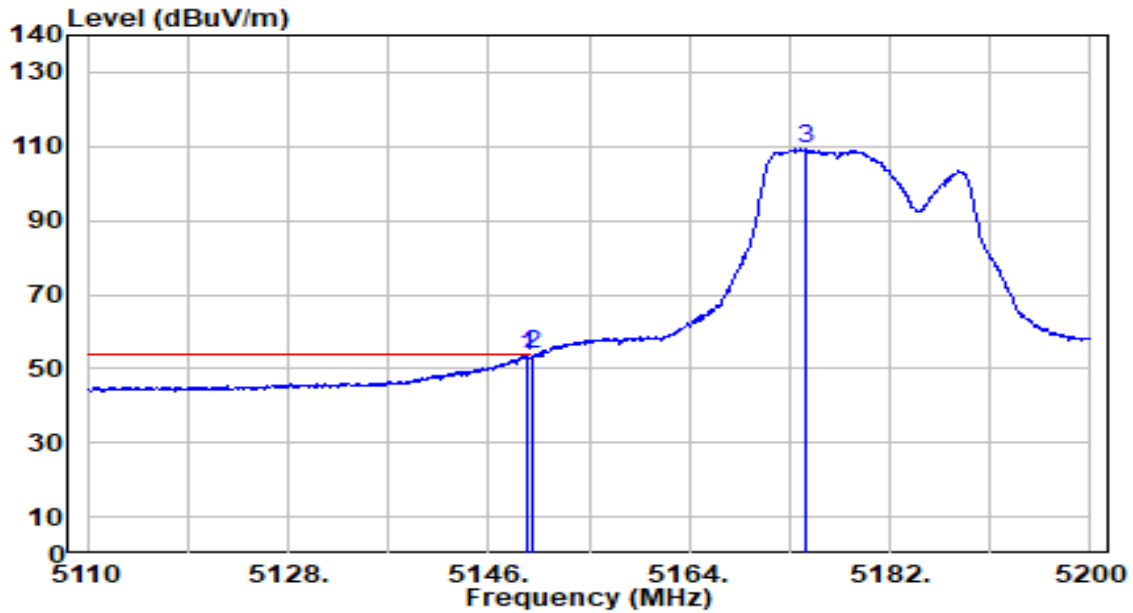


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	52.65	0.65	53.30	-0.70	54.00	219	172	Average
2	*	5150.000	53.06	0.65	53.71	-0.29	54.00	219	172	Average
3		5174.350	108.62	0.68	109.30	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

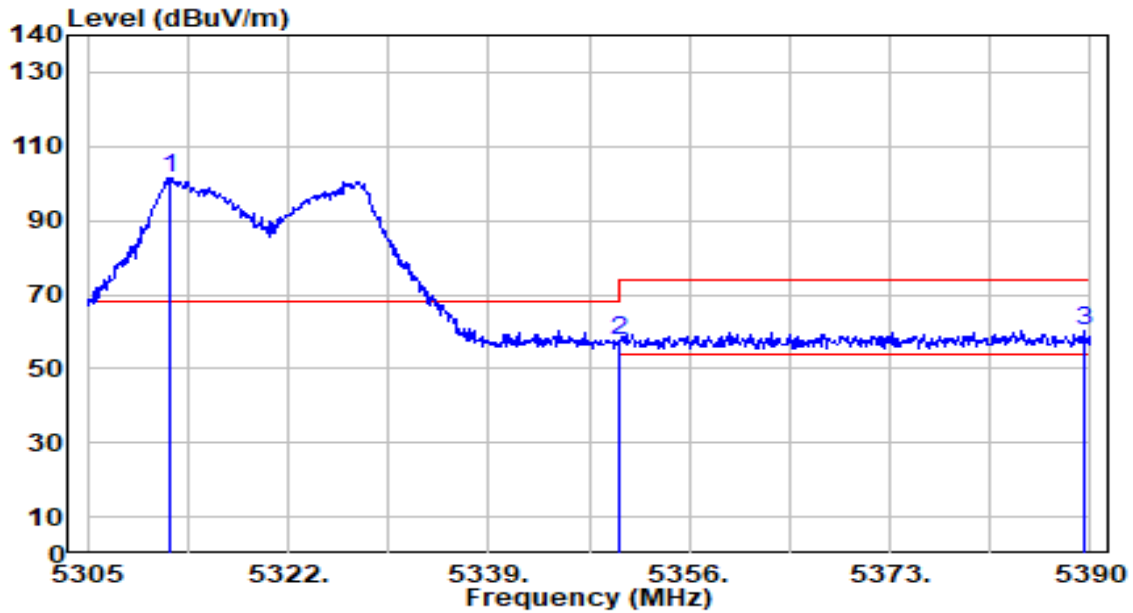


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.885	100.95	0.53	101.48	N/A	N/A	169	138	Peak
2	5350.000	57.35	0.47	57.82	-16.18	74.00	169	138	Peak
3	* 5389.490	60.01	0.41	60.42	-13.58	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

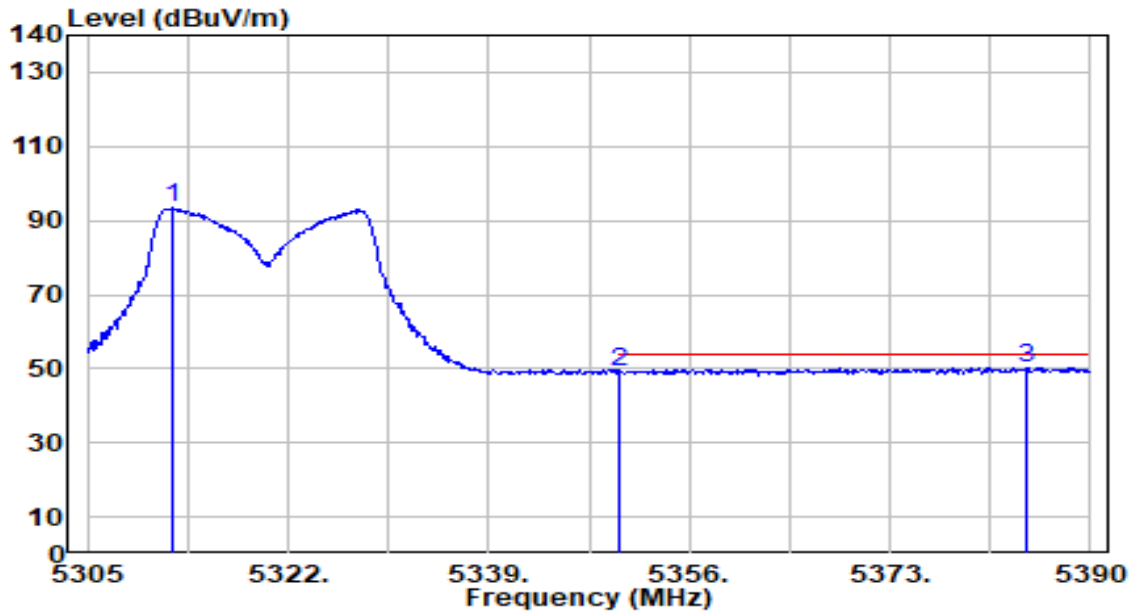


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.140	93.20	0.53	93.73	N/A	N/A	169	138	Average
2	5350.000	48.80	0.47	49.27	-4.73	54.00	169	138	Average
3	* 5384.645	49.91	0.42	50.33	-3.67	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

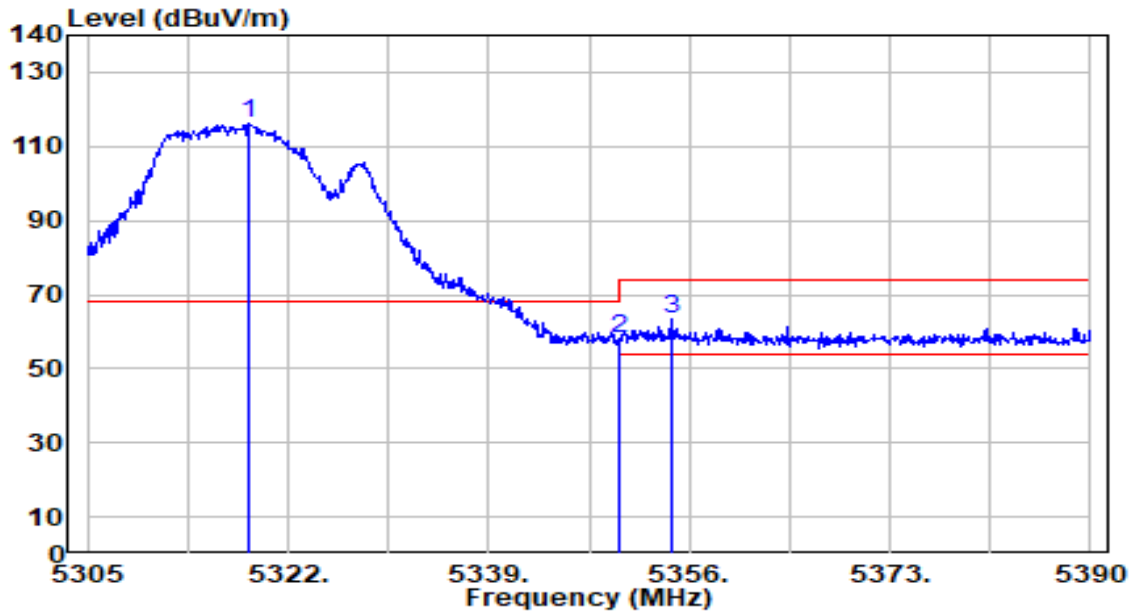


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.600	115.45	0.52	115.97	N/A	N/A	183	173	Peak
2	5350.000	57.77	0.47	58.24	-15.76	74.00	183	173	Peak
3	* 5354.470	63.18	0.46	63.64	-10.36	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

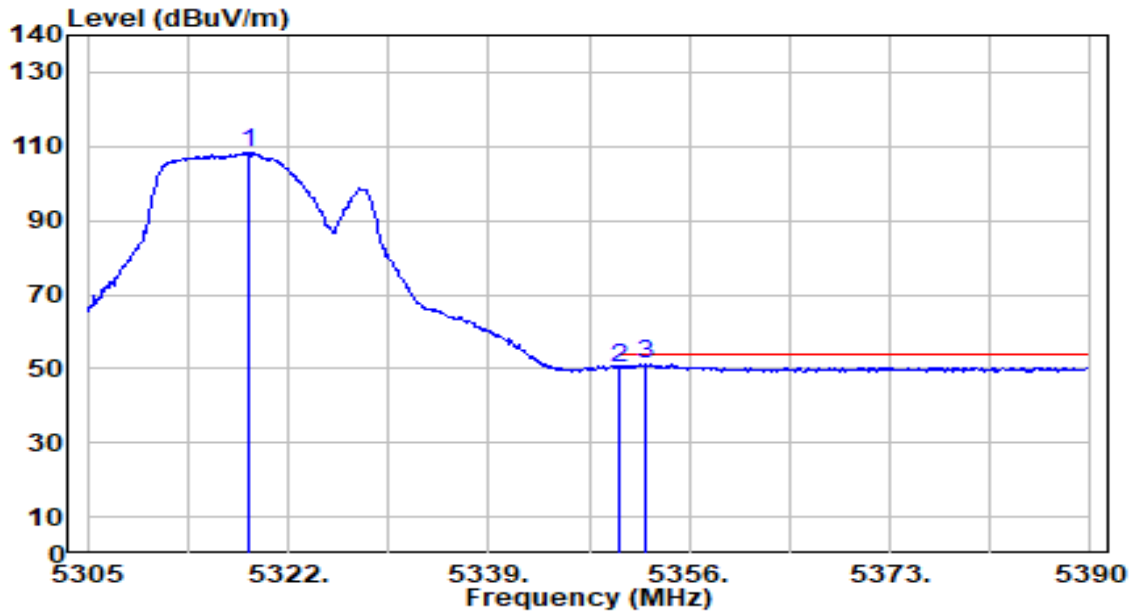


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.770	107.97	0.52	108.49	N/A	N/A	183	173	Average
2	5350.000	49.79	0.47	50.26	-3.74	54.00	183	173	Average
3	* 5352.260	50.64	0.47	51.11	-2.89	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

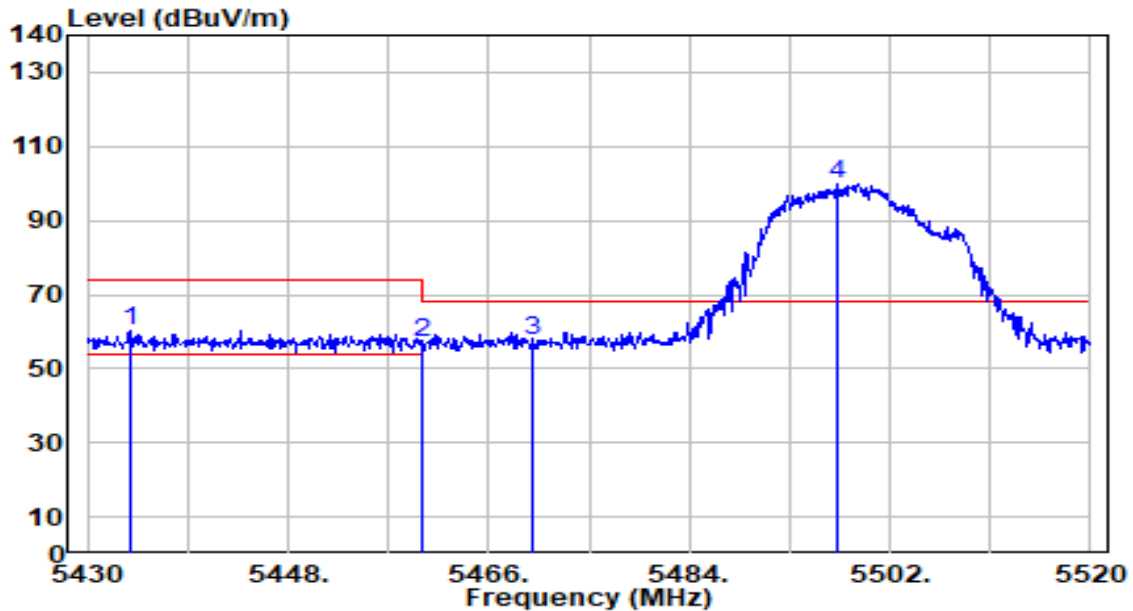


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.780	59.60	0.54	60.14	-13.86	74.00	300	98	Peak
2	5460.000	56.45	0.66	57.11	-16.89	74.00	300	98	Peak
3	* 5470.000	56.93	0.71	57.63	-10.57	68.20	300	98	Peak
4	5497.230	98.99	0.83	99.82	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

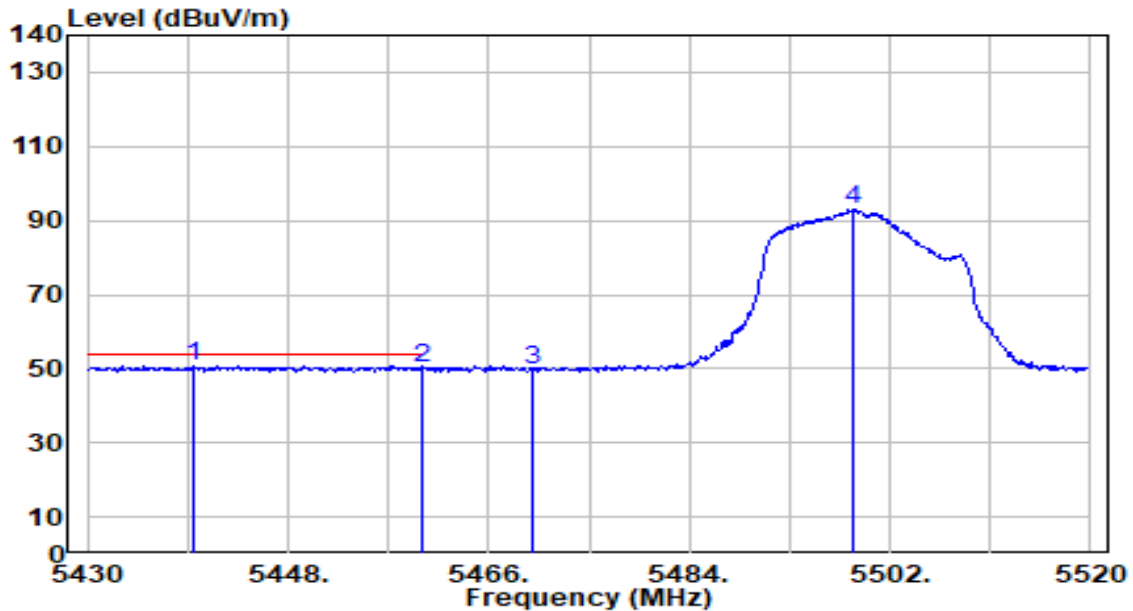


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5439.450	50.24	0.57	50.81	-3.19	54.00	300	98	Average
2		5460.000	49.64	0.66	50.30	-3.70	54.00	300	98	Average
3		5470.000	49.07	0.71	49.77	N/A	N/A	300	98	Average
4		5498.760	92.34	0.83	93.18	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

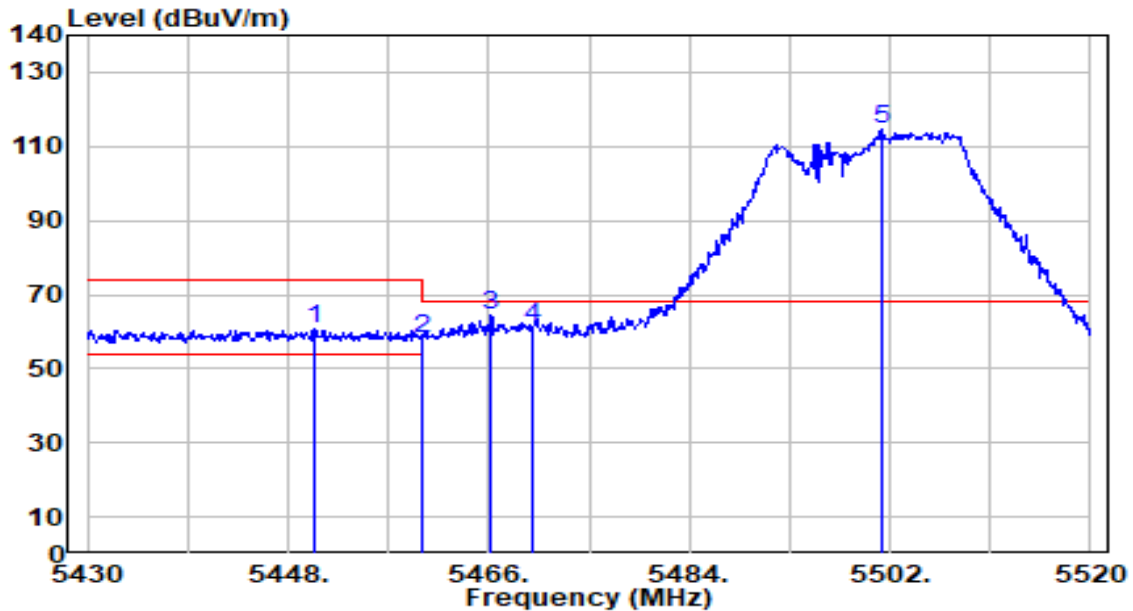


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.340	60.07	0.62	60.69	-13.31	74.00	213	148	Peak
2	5460.000	57.68	0.66	58.34	-15.66	74.00	213	148	Peak
3	* 5466.270	63.75	0.69	64.44	-3.76	68.20	213	148	Peak
4	5470.000	60.47	0.71	61.17	-7.03	68.20	213	148	Peak
5	5501.370	113.66	0.85	114.51	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

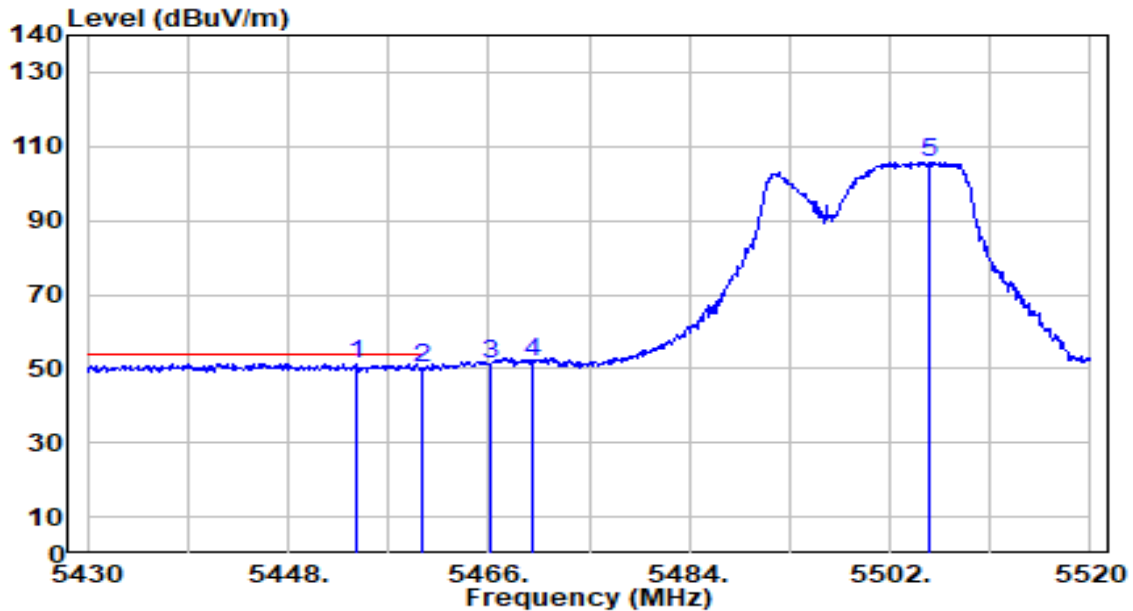


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.210	50.87	0.64	51.50	-2.50	54.00	213	148	Average
2		5460.000	49.39	0.66	50.06	-3.94	54.00	213	148	Average
3		5466.270	50.81	0.69	51.50	N/A	N/A	213	148	Average
4		5470.000	51.17	0.71	51.88	N/A	N/A	213	148	Average
5		5505.510	104.89	0.87	105.75	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

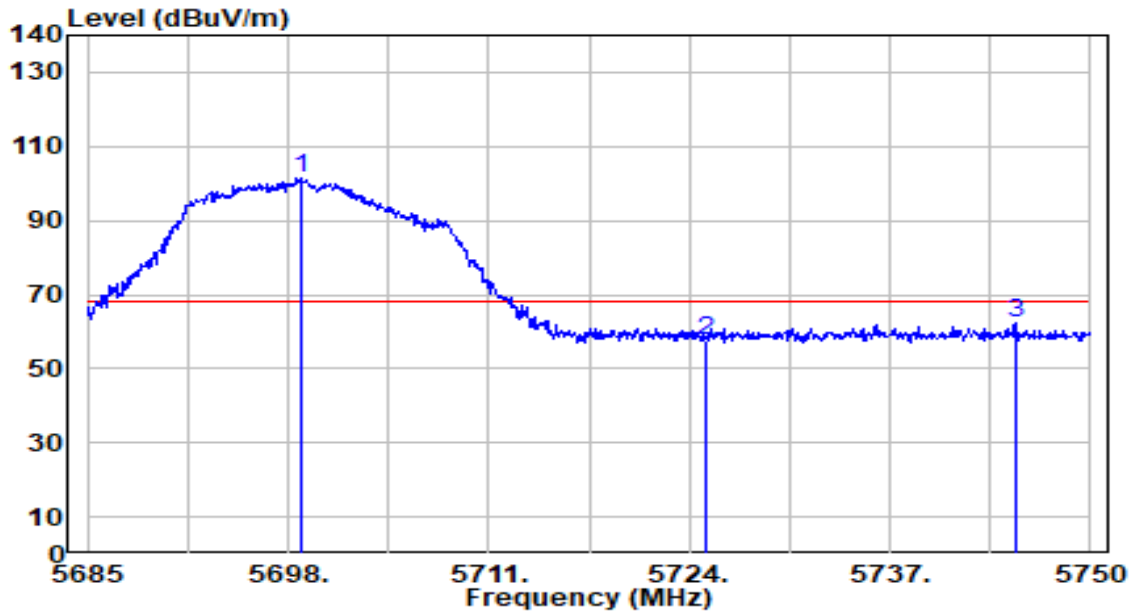


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.780	99.60	1.77	101.37	N/A	N/A	200	105	Peak
2	5725.000	55.81	1.89	57.71	-10.49	68.20	200	105	Peak
3	* 5745.125	60.47	1.99	62.46	-5.74	68.20	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

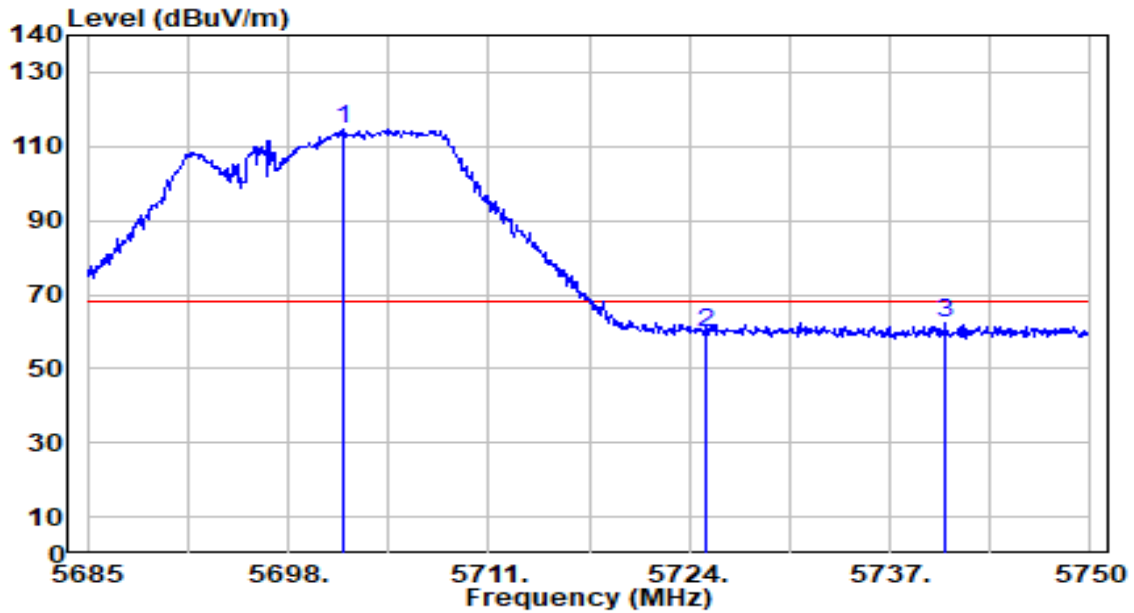


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.510	112.73	1.78	114.52	N/A	N/A	204	195	Peak
2	5725.000	57.86	1.89	59.75	-8.45	68.20	204	195	Peak
3	* 5740.640	60.12	1.97	62.09	-6.11	68.20	204	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

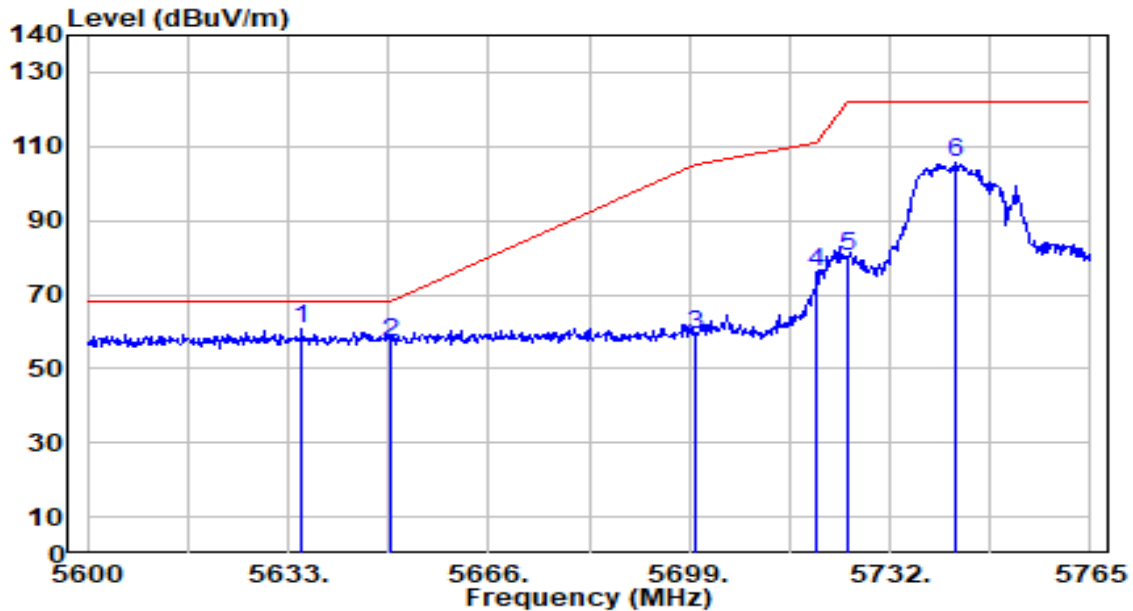


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.310	59.04	1.47	60.51	-7.69	68.20	207	99	Peak
2		5650.000	55.54	1.54	57.08	-11.12	68.20	207	99	Peak
3		5700.000	57.48	1.78	59.26	-45.94	105.20	207	99	Peak
4		5720.000	74.24	1.87	76.11	-34.69	110.80	207	99	Peak
5		5725.000	78.41	1.89	80.31	-41.89	122.20	207	99	Peak
6		5742.890	103.67	1.98	105.64	N/A	N/A	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

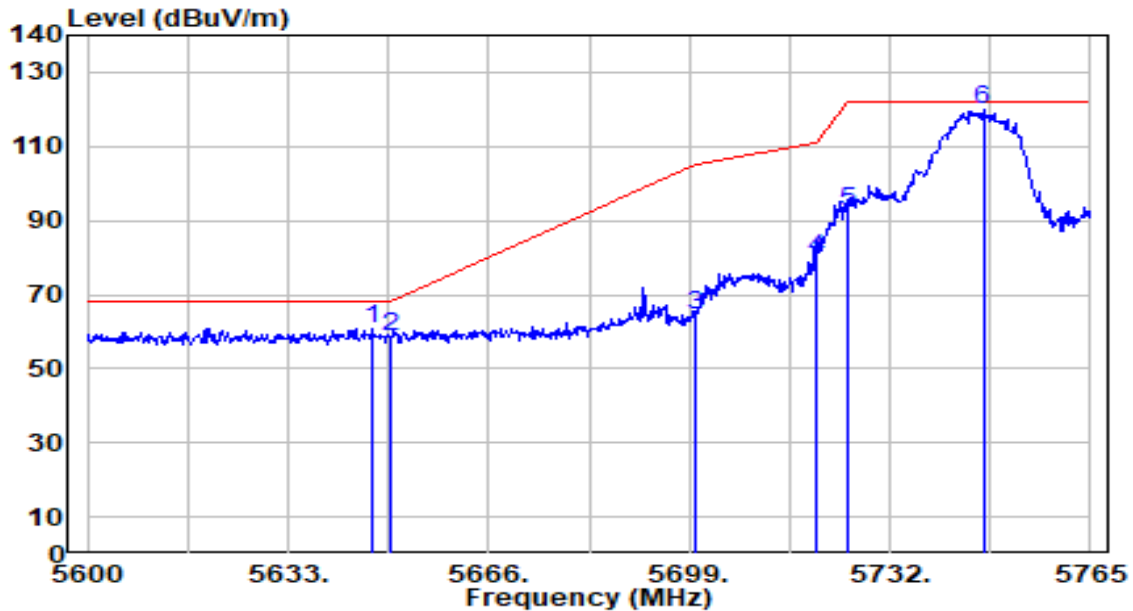


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.860	59.42	1.53	60.95	-7.25	68.20	202	188	Peak
2		5650.000	56.96	1.54	58.50	-9.70	68.20	202	188	Peak
3		5700.000	62.57	1.78	64.34	-40.86	105.20	202	188	Peak
4		5720.000	77.99	1.87	79.86	-30.94	110.80	202	188	Peak
5		5725.000	90.44	1.89	92.34	-29.86	122.20	202	188	Peak
6		5747.345	117.78	2.00	119.77	N/A	N/A	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

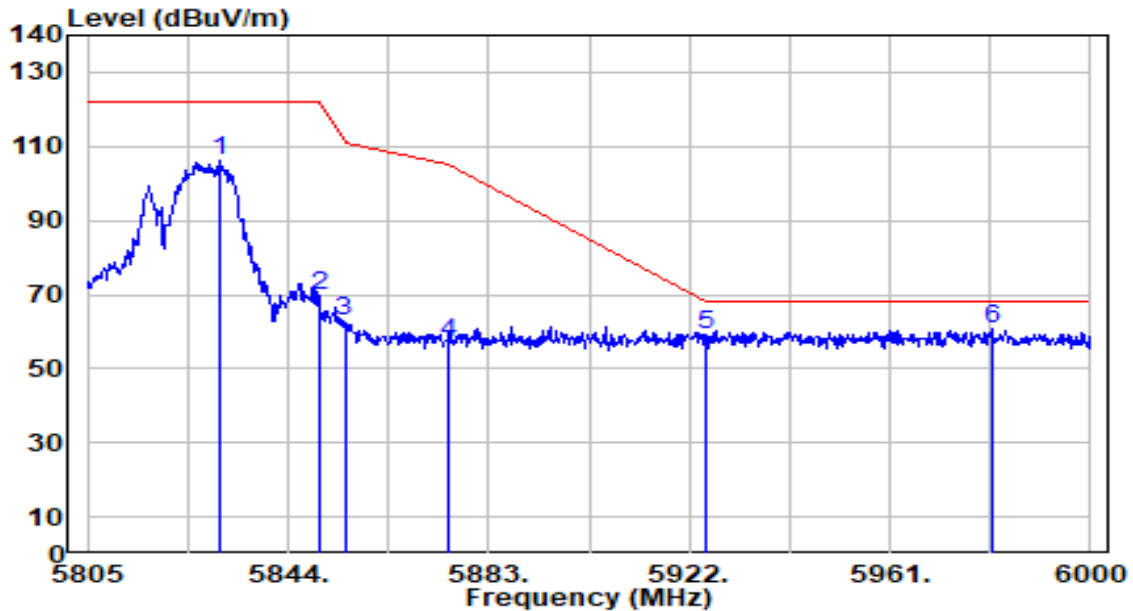


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.545	103.78	2.25	106.03	N/A	N/A	285	222	Peak
2	5850.000	67.67	2.25	69.93	-52.27	122.20	285	222	Peak
3	5855.000	60.45	2.25	62.70	-48.10	110.80	285	222	Peak
4	5875.000	54.86	2.26	57.11	-48.09	105.20	285	222	Peak
5	5925.000	56.69	2.27	58.96	-9.24	68.20	285	222	Peak
6	* 5980.695	58.23	2.28	60.51	-7.69	68.20	285	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

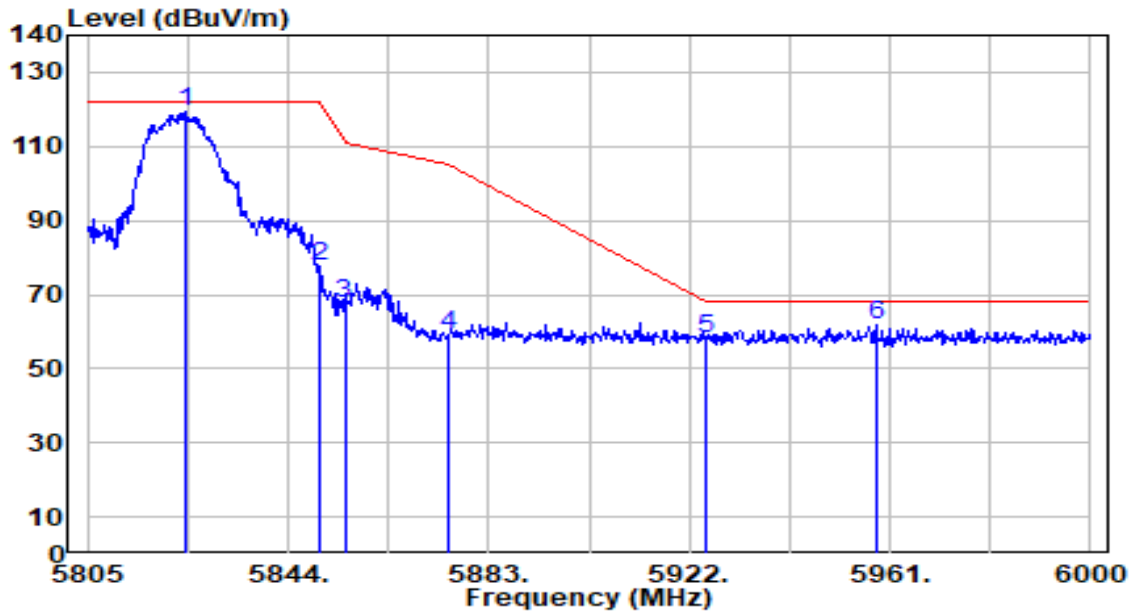


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.110	117.29	2.25	119.54	N/A	N/A	185	176	Peak
2	5850.000	75.36	2.25	77.61	-44.59	122.20	185	176	Peak
3	5855.000	65.13	2.25	67.38	-43.42	110.80	185	176	Peak
4	5875.000	57.05	2.26	59.31	-45.89	105.20	185	176	Peak
5	5925.000	55.92	2.27	58.18	-10.02	68.20	185	176	Peak
6	* 5958.270	59.28	2.27	61.55	-6.65	68.20	185	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

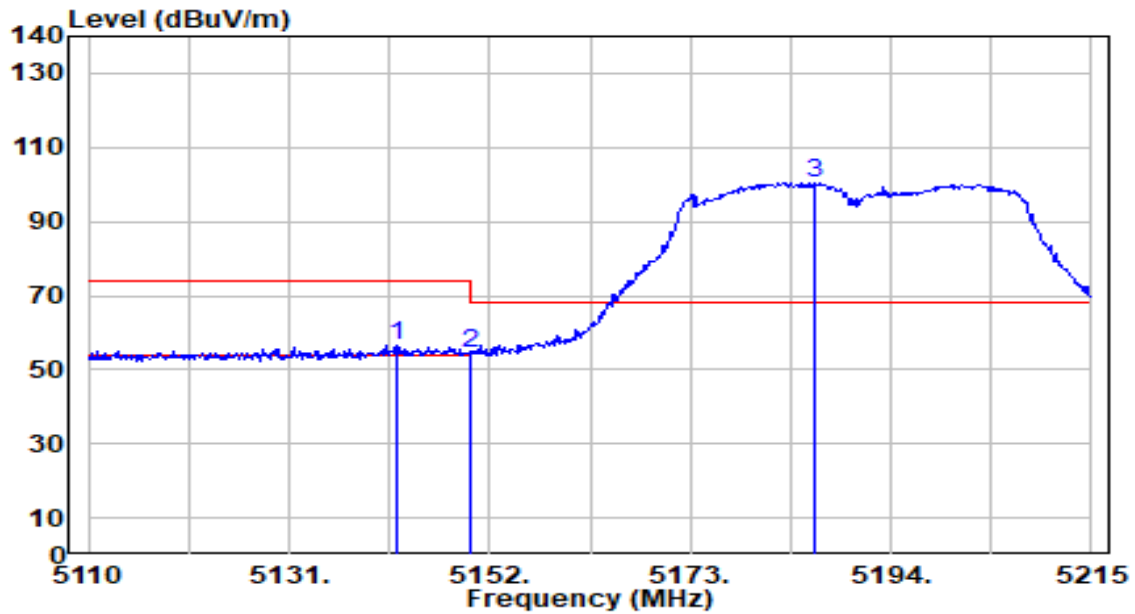


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.235	55.82	0.65	56.46	-17.54	74.00	100	133	Peak
2		5150.000	53.51	0.65	54.16	-19.84	74.00	100	133	Peak
3		5186.125	99.72	0.69	100.41	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

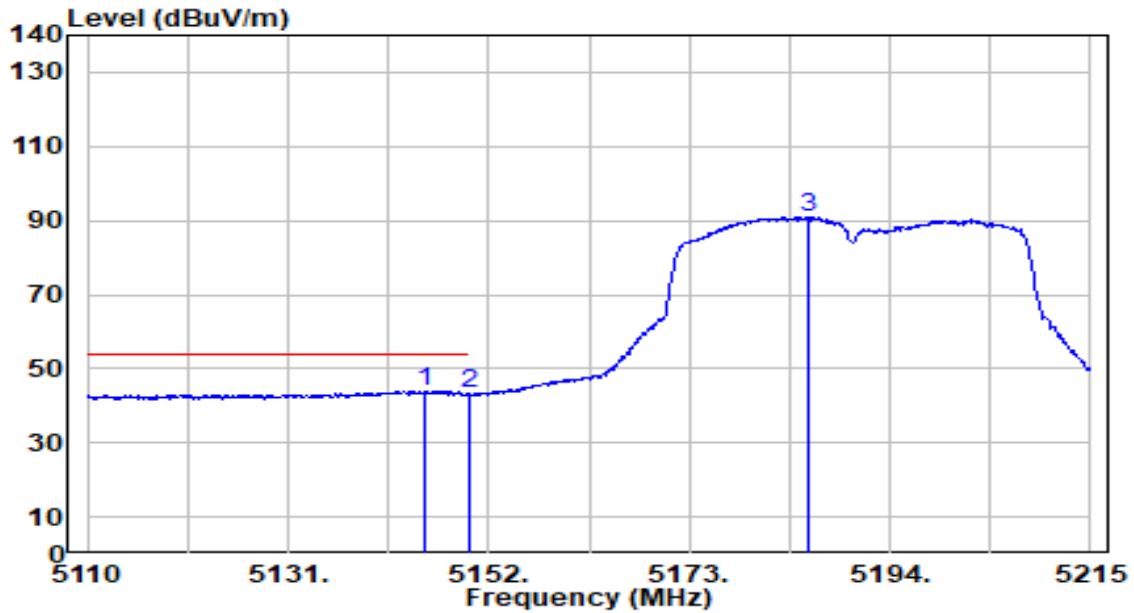


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.385	43.30	0.65	43.95	-10.05	54.00	100	133	Average
2		5150.000	42.44	0.65	43.09	-10.91	54.00	100	133	Average
3		5185.495	90.36	0.69	91.05	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

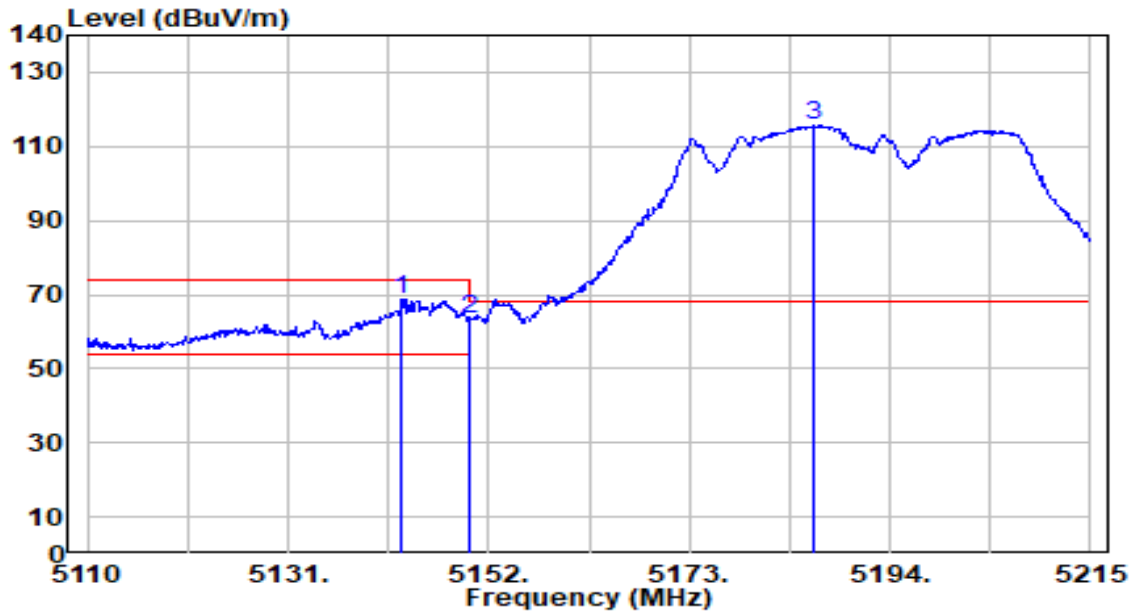


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.865	68.28	0.65	68.93	-5.07	74.00	219	172	Peak
2	5150.000	62.76	0.65	63.41	-10.59	74.00	219	172	Peak
3	* 5186.020	114.94	0.69	115.63	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

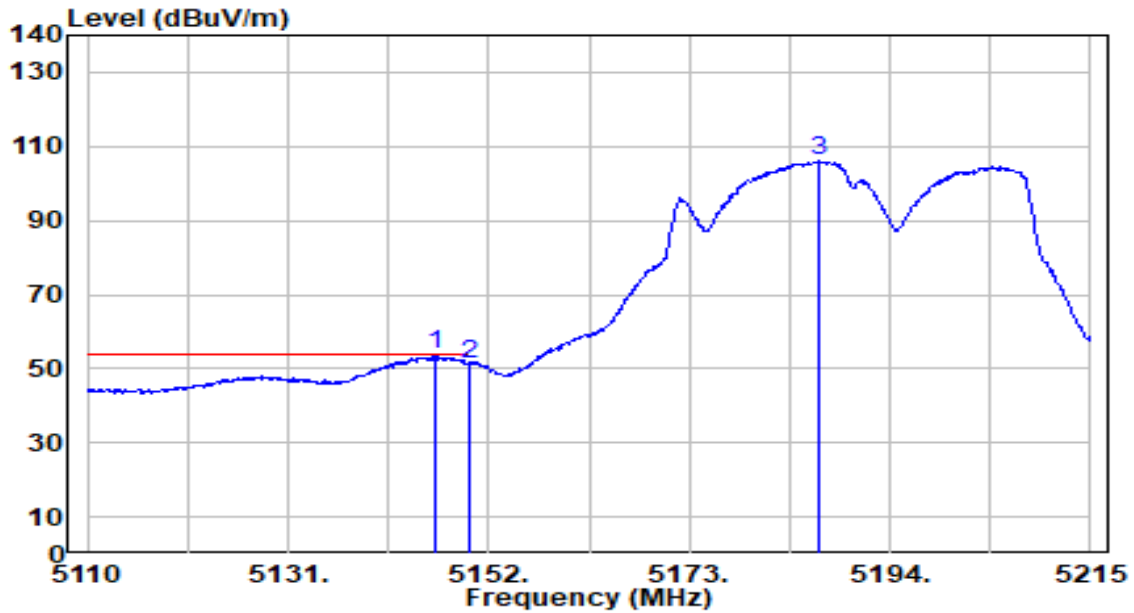


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.435	53.09	0.65	53.74	-0.26	54.00	219	172	Average
2		5150.000	50.49	0.65	51.15	-2.85	54.00	219	172	Average
3		5186.545	105.35	0.69	106.04	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

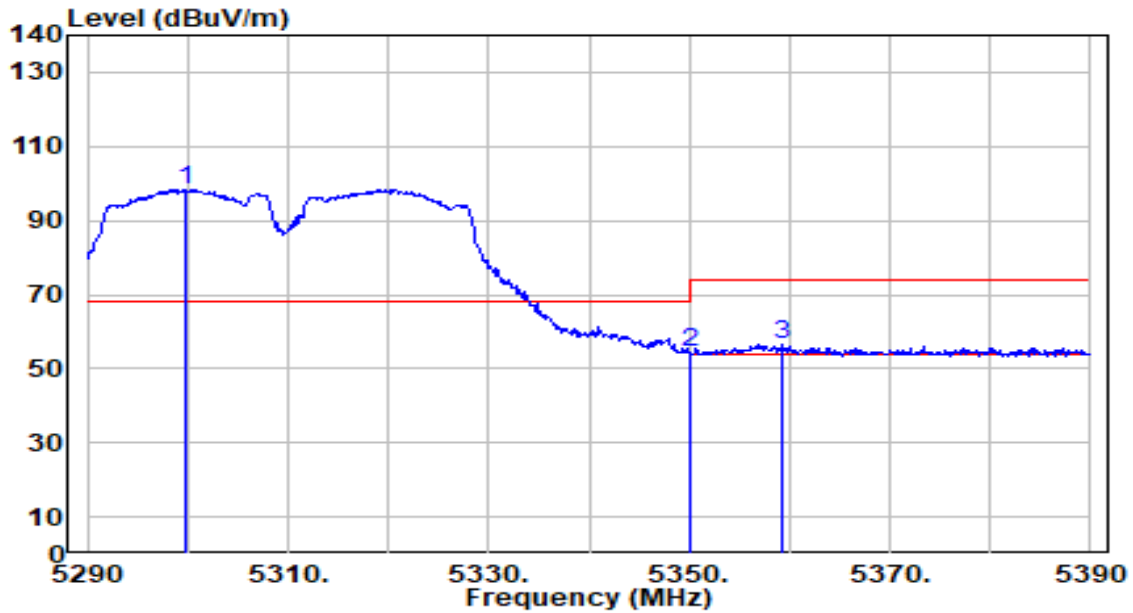


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.800	97.93	0.55	98.48	N/A	N/A	169	138	Peak
2	5350.000	53.68	0.47	54.15	-19.85	74.00	169	138	Peak
3	* 5359.300	56.20	0.46	56.65	-17.35	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

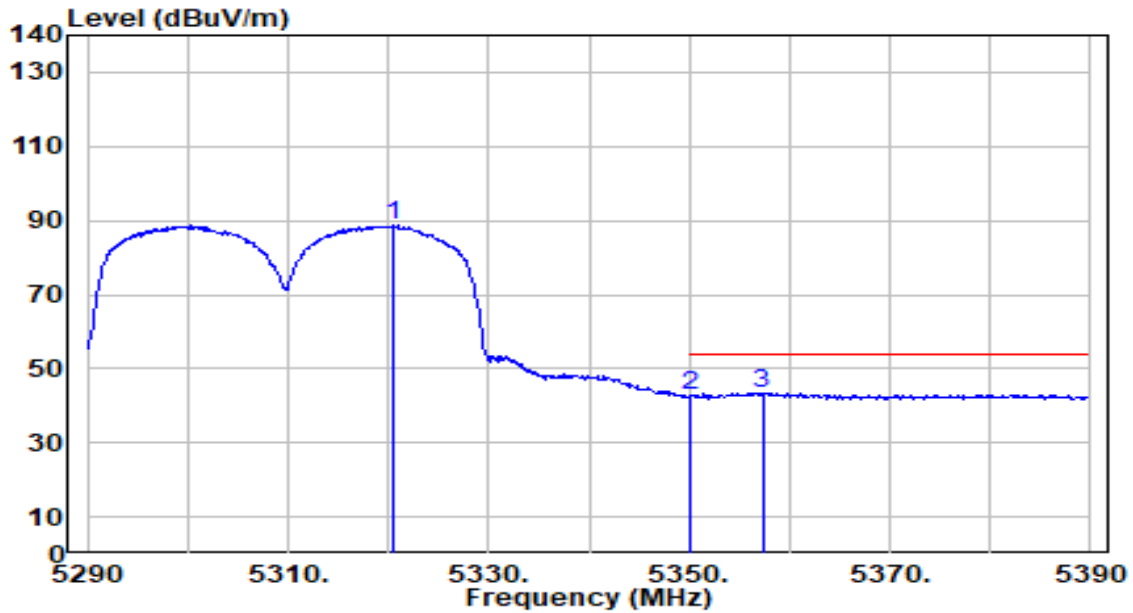


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.400	88.20	0.52	88.72	N/A	N/A	169	138	Average
2	5350.000	42.34	0.47	42.81	-11.19	54.00	169	138	Average
3	* 5357.300	42.91	0.46	43.37	-10.63	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

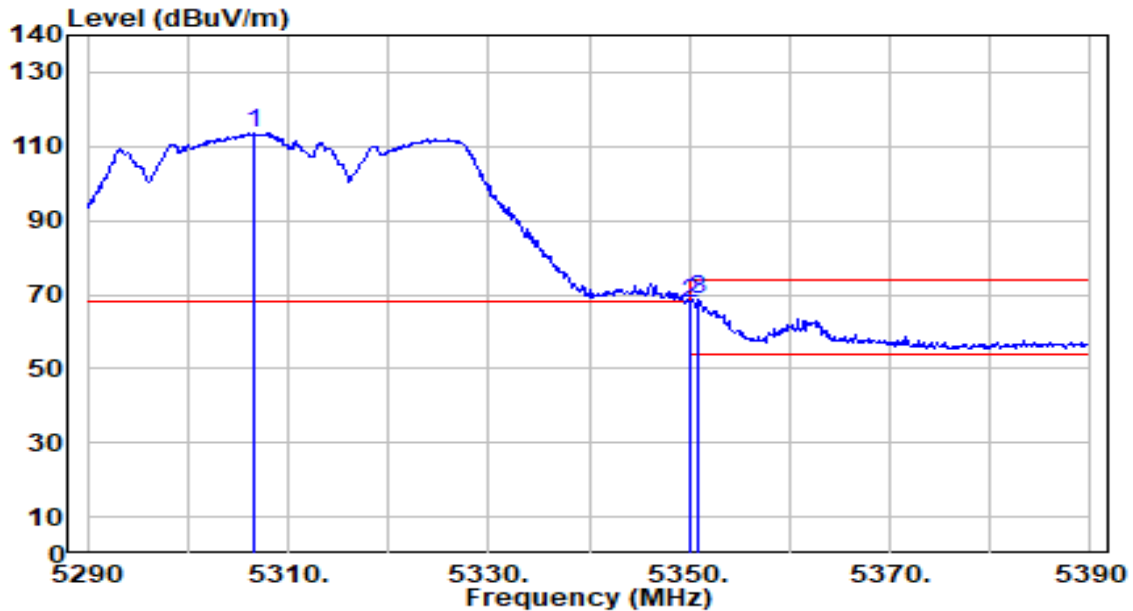


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.500	113.01	0.54	113.55	N/A	N/A	183	173	Peak
2	5350.000	67.24	0.47	67.71	-6.29	74.00	183	173	Peak
3	* 5351.000	68.10	0.47	68.57	-5.43	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

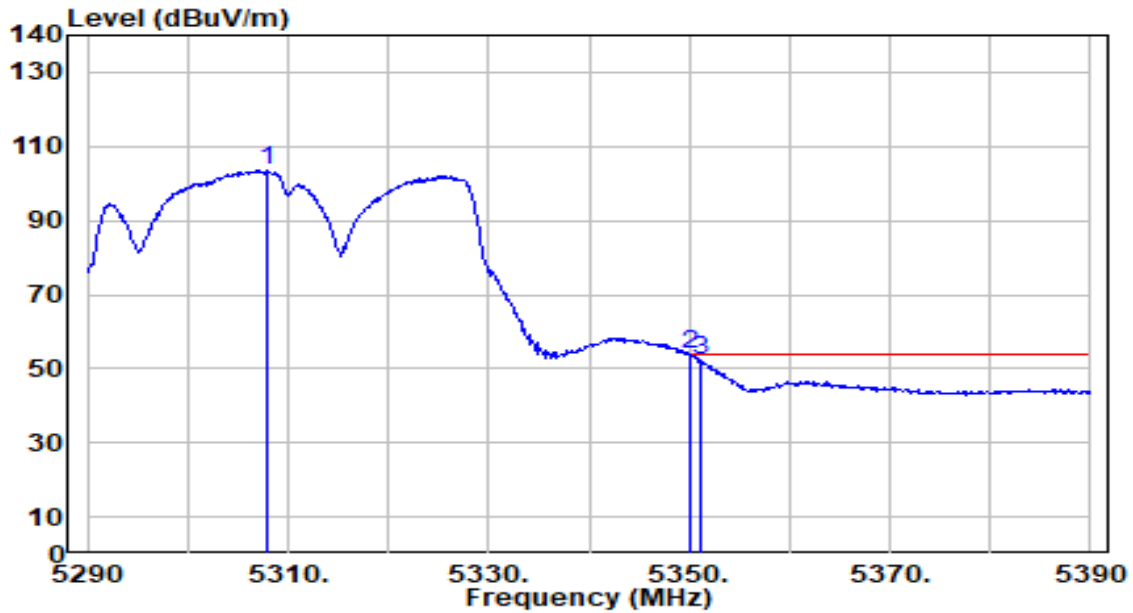


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5307.800	102.99	0.54	103.53	N/A	N/A	183	173	Average
2	*	5350.000	53.21	0.47	53.68	-0.32	54.00	183	173	Average
3		5351.100	51.70	0.47	52.17	-1.83	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

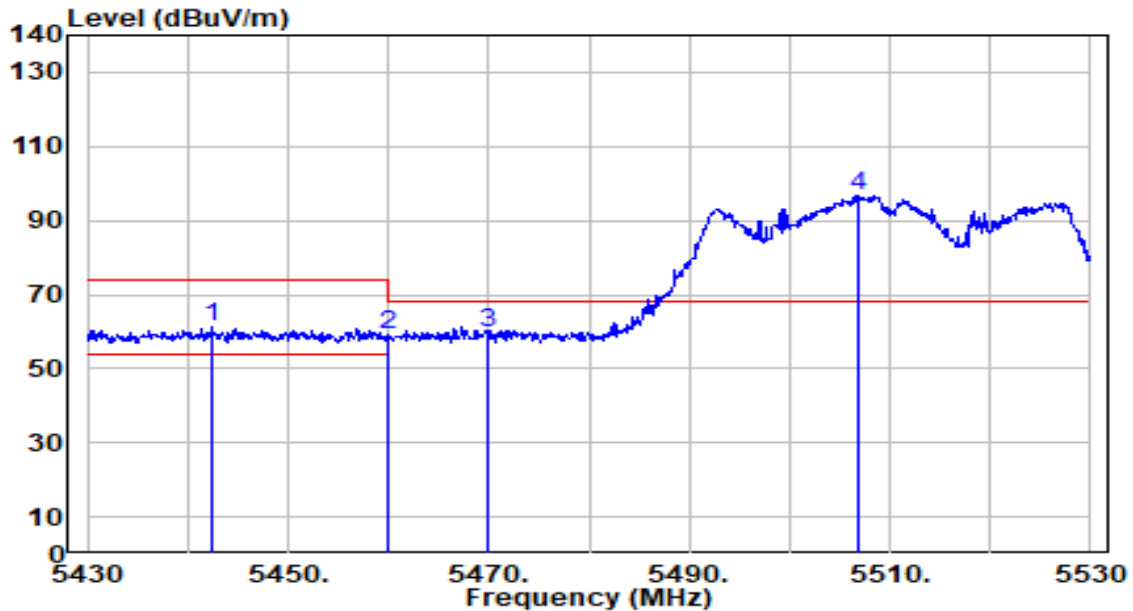


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.300	60.66	0.58	61.25	-12.75	74.00	300	98	Peak
2	5460.000	58.35	0.66	59.01	-14.99	74.00	300	98	Peak
3	* 5470.000	59.07	0.71	59.78	-8.42	68.20	300	98	Peak
4	5506.800	96.05	0.87	96.93	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

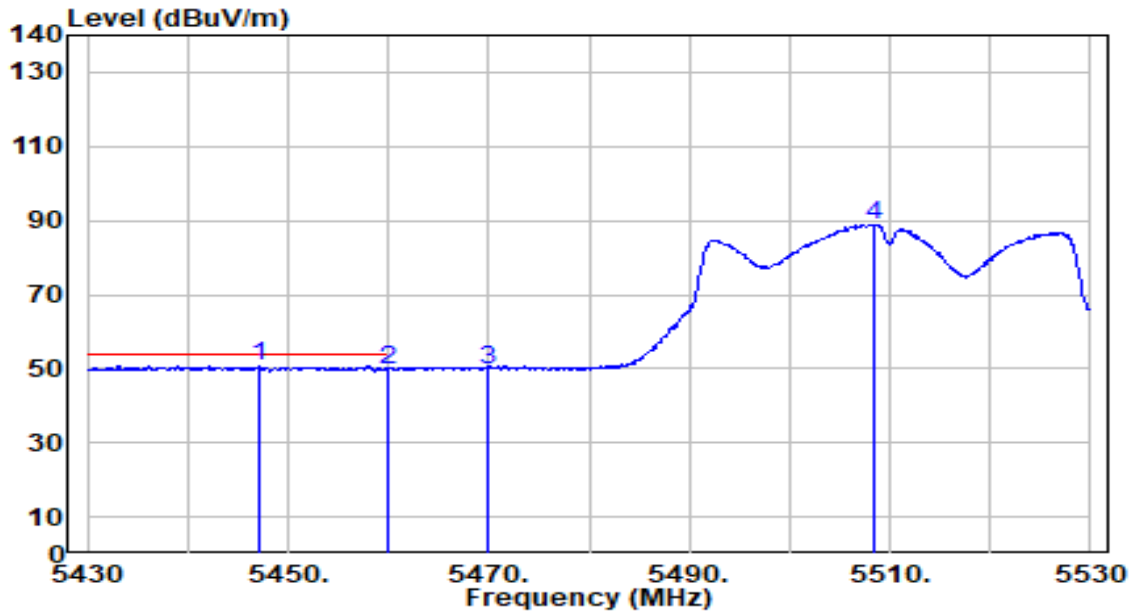


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5447.100	50.02	0.60	50.63	-3.37	54.00	300	98	Average
2		5460.000	49.16	0.66	49.82	-4.18	54.00	300	98	Average
3		5470.000	49.14	0.71	49.85	N/A	N/A	300	98	Average
4		5508.400	88.11	0.88	88.99	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

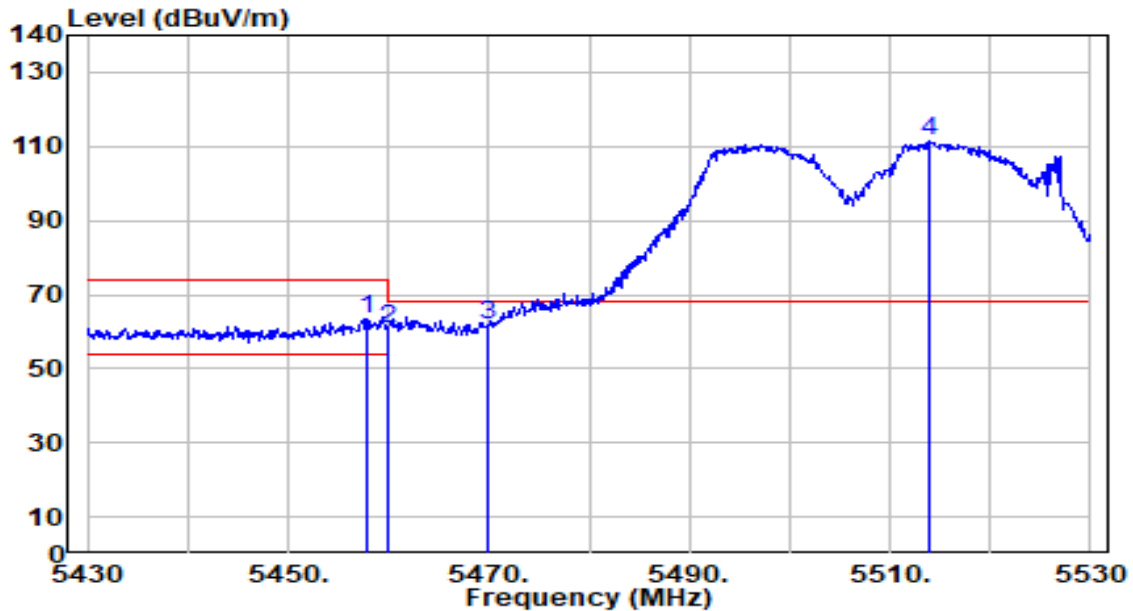


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.800	62.92	0.65	63.57	-10.43	74.00	213	148	Peak
2	5460.000	59.88	0.66	60.54	-13.46	74.00	213	148	Peak
3	* 5470.000	61.06	0.71	61.77	-6.43	68.20	213	148	Peak
4	5514.000	110.31	0.91	111.22	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

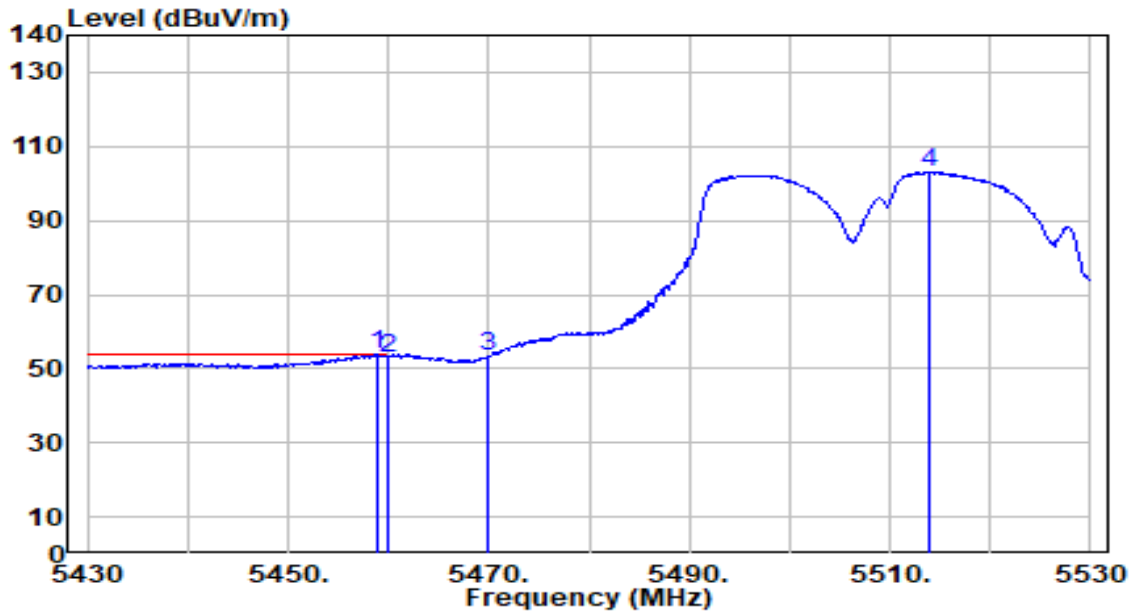


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.800	53.09	0.66	53.75	-0.25	54.00	213	148	Average
2		5460.000	52.35	0.66	53.02	-0.98	54.00	213	148	Average
3		5470.000	52.89	0.71	53.59	N/A	N/A	213	148	Average
4		5513.900	102.16	0.91	103.07	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

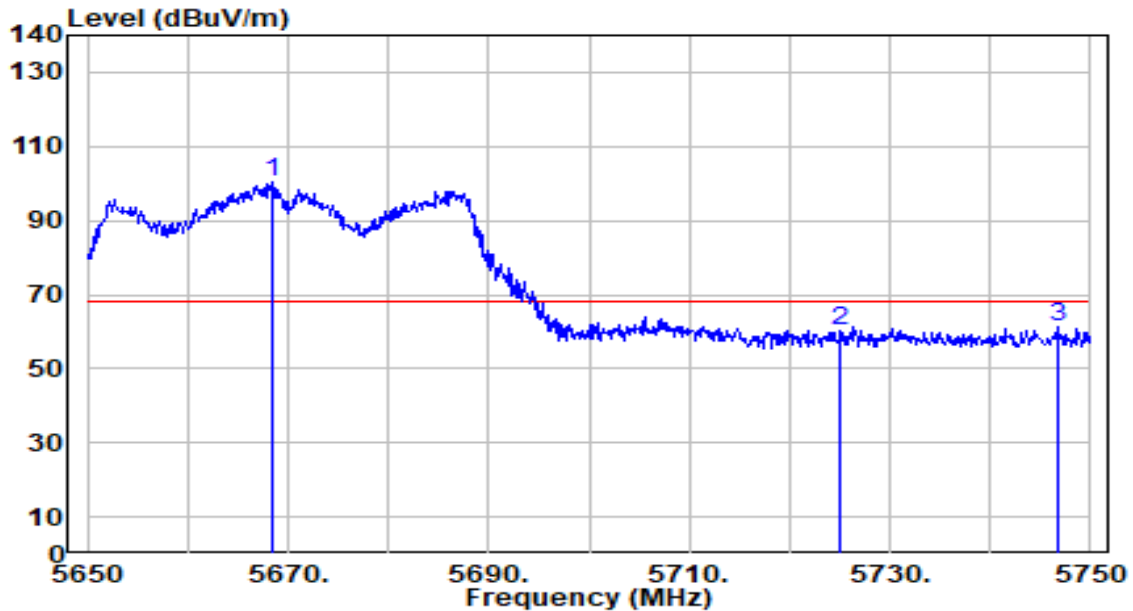


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.400	98.79	1.63	100.42	N/A	N/A	200	105	Peak
2	5725.000	58.09	1.89	59.99	-8.21	68.20	200	105	Peak
3	* 5746.700	59.12	1.99	61.11	-7.09	68.20	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

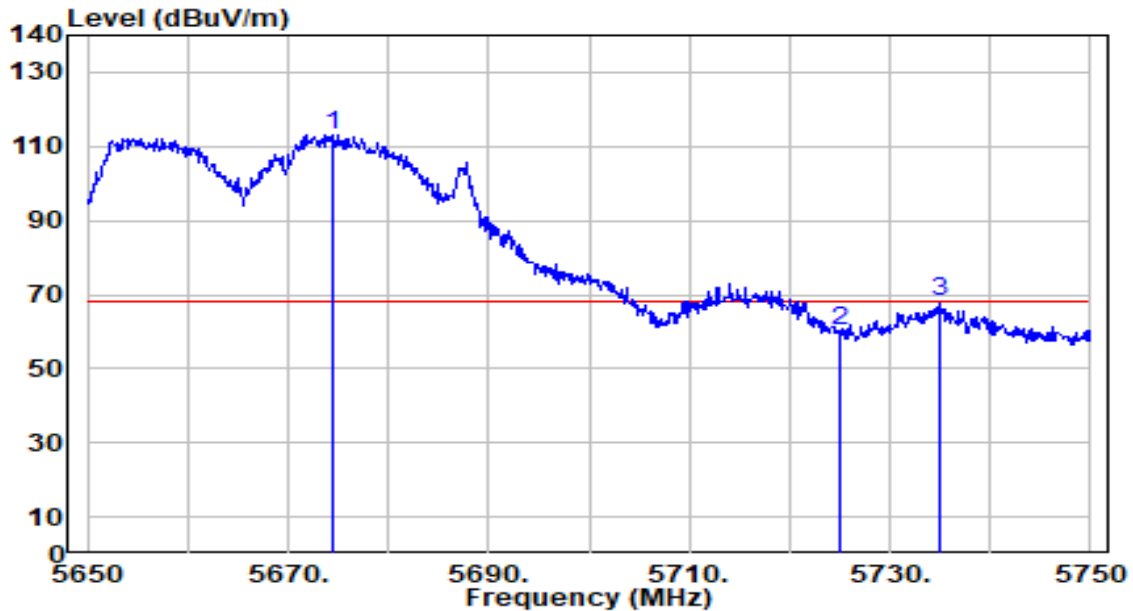


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.500	111.56	1.66	113.22	N/A	N/A	204	195	Peak
2	5725.000	58.51	1.89	60.40	-7.80	68.20	204	195	Peak
3	* 5734.900	65.98	1.94	67.92	-0.28	68.20	204	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

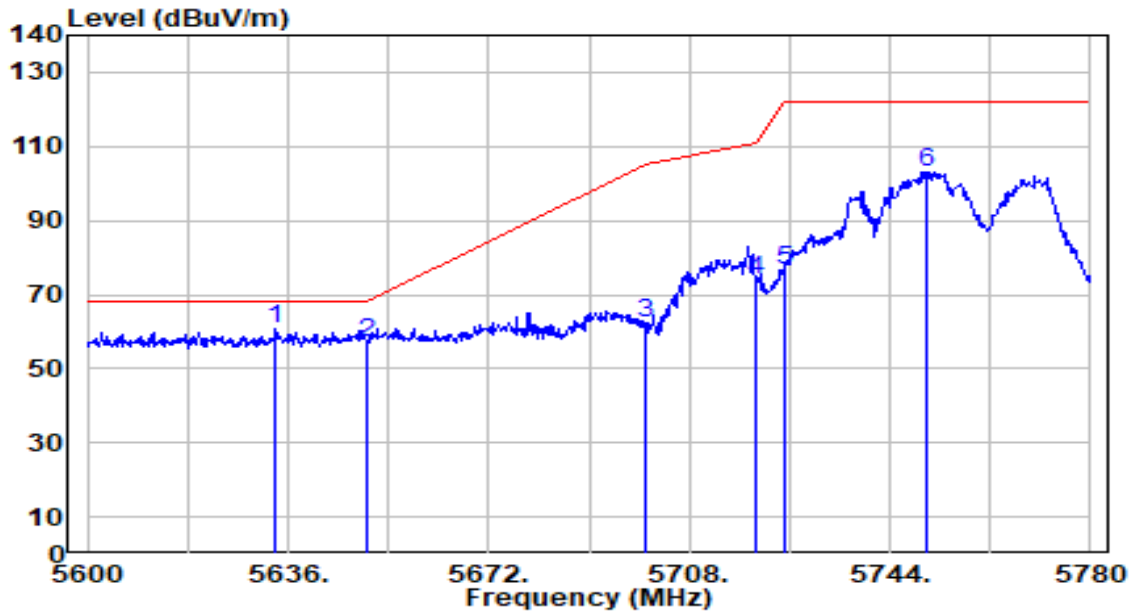


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5633.660	59.21	1.47	60.68	-7.52	68.20	207	99	Peak
2		5650.000	55.45	1.54	56.99	-11.21	68.20	207	99	Peak
3		5700.000	60.57	1.78	62.35	-42.85	105.20	207	99	Peak
4		5720.000	71.97	1.87	73.84	-36.96	110.80	207	99	Peak
5		5725.000	74.79	1.89	76.68	-45.52	122.20	207	99	Peak
6		5750.480	101.21	2.01	103.22	N/A	N/A	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

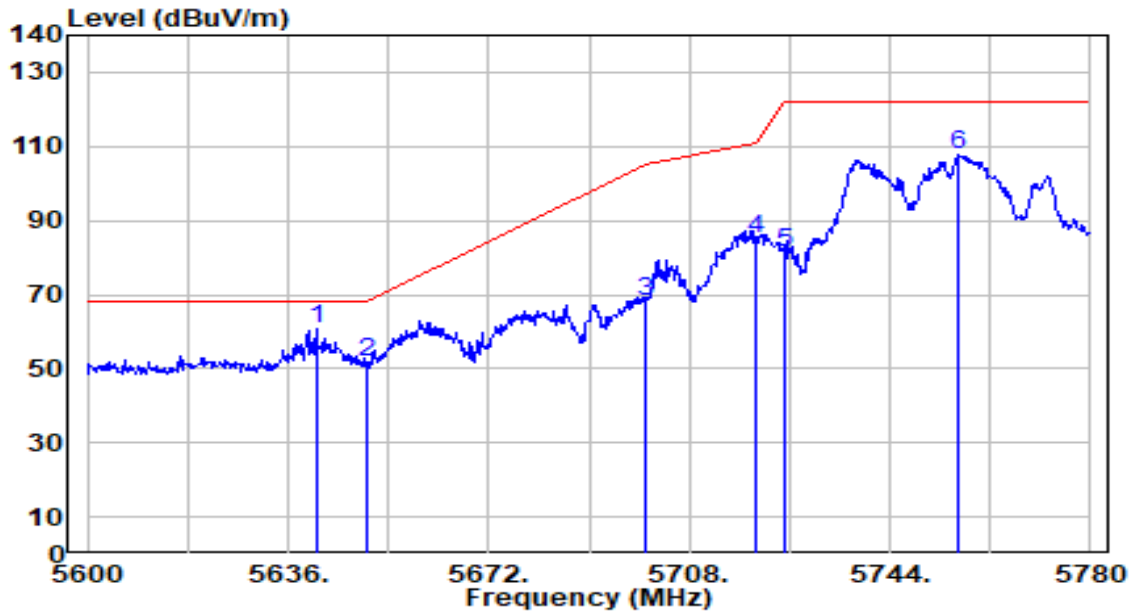


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.220	58.99	1.50	60.50	-7.70	68.20	202	188	Peak
2		5650.000	50.31	1.54	51.85	-16.35	68.20	202	188	Peak
3		5700.000	66.44	1.78	68.21	-36.99	105.20	202	188	Peak
4		5720.000	83.39	1.87	85.26	-25.54	110.80	202	188	Peak
5		5725.000	79.67	1.89	81.56	-40.64	122.20	202	188	Peak
6		5756.420	105.57	2.04	107.61	N/A	N/A	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

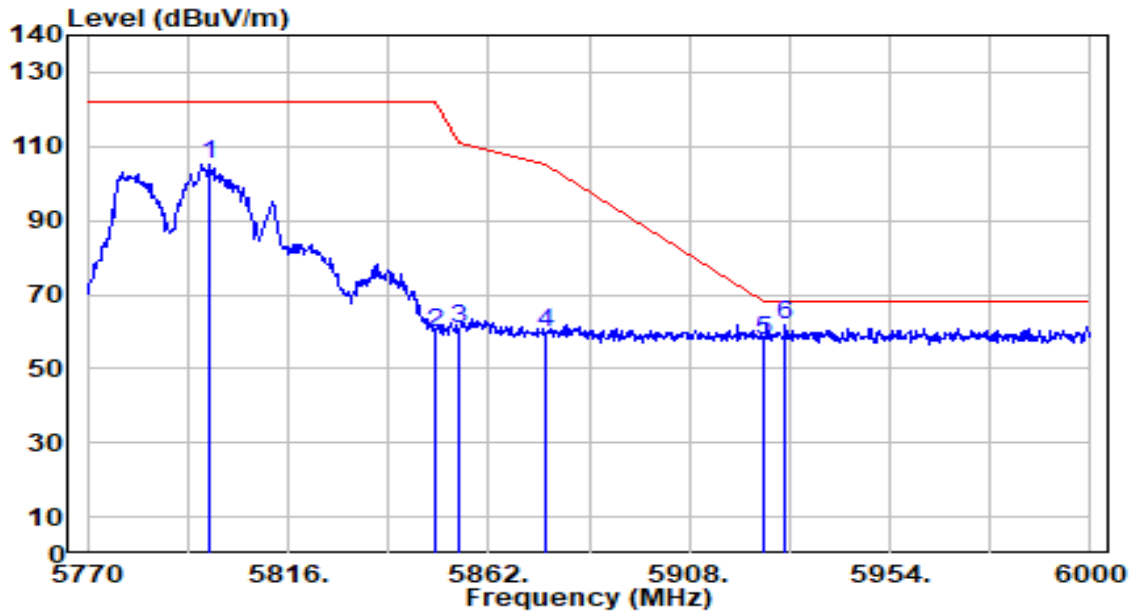


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5798.060	102.95	2.23	105.19	N/A	N/A	285	222	Peak
2	5850.000	57.32	2.25	59.57	-62.63	122.20	285	222	Peak
3	5855.000	58.42	2.25	60.67	-50.13	110.80	285	222	Peak
4	5875.000	57.30	2.26	59.56	-45.64	105.20	285	222	Peak
5	5925.000	55.11	2.27	57.38	-10.82	68.20	285	222	Peak
6	* 5930.080	59.77	2.27	62.04	-6.16	68.20	285	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

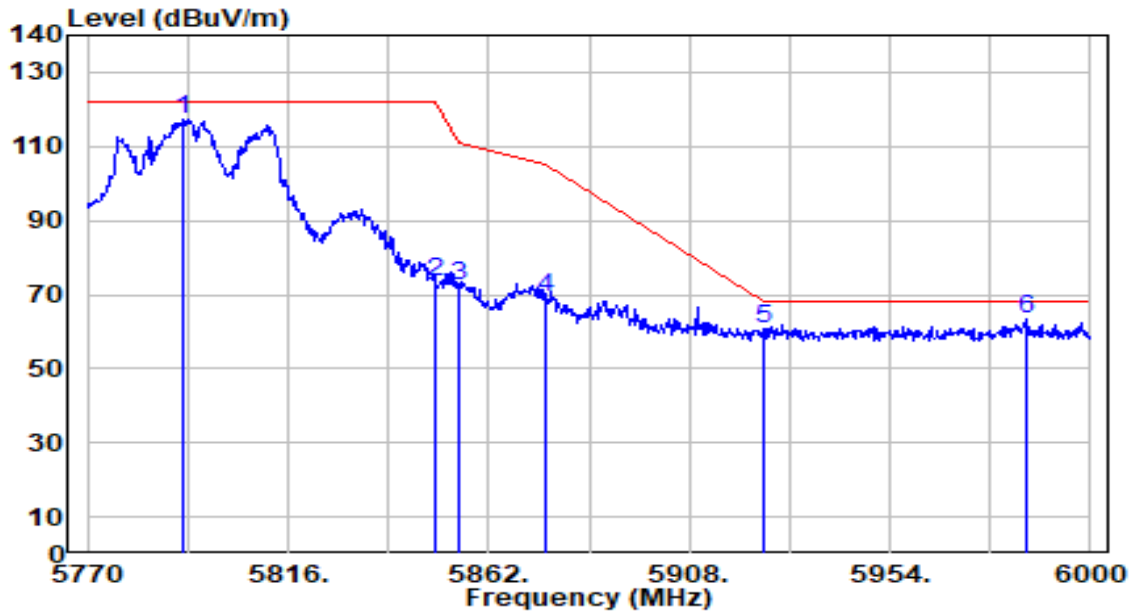


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5791.850	115.09	2.21	117.29	N/A	N/A	185	176	Peak
2	5850.000	71.40	2.25	73.65	-48.55	122.20	185	176	Peak
3	5855.000	70.31	2.25	72.56	-38.24	110.80	185	176	Peak
4	5875.000	66.69	2.26	68.94	-36.26	105.20	185	176	Peak
5	5925.000	58.36	2.27	60.63	-7.57	68.20	185	176	Peak
6	* 5985.510	60.87	2.28	63.15	-5.05	68.20	185	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

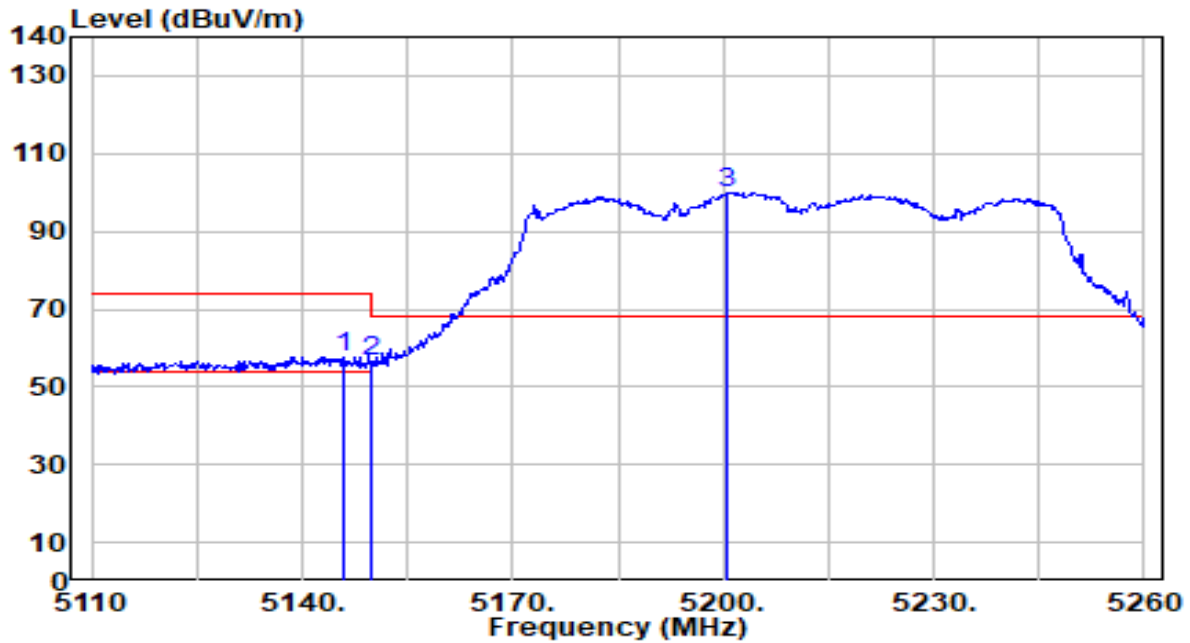


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.000	57.15	0.65	57.80	-16.20	74.00	100	133	Peak
2		5150.000	55.66	0.65	56.32	-17.68	74.00	100	133	Peak
3		5200.600	99.38	0.70	100.08	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

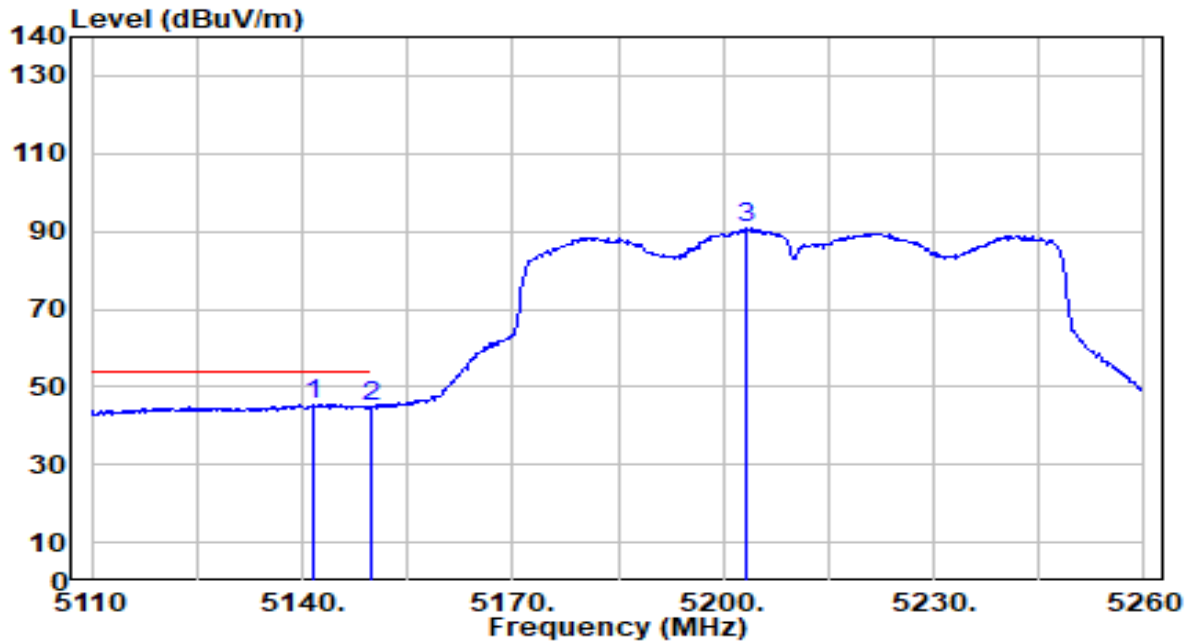


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.500	44.87	0.65	45.51	-8.49	54.00	100	133	Average
2		5150.000	44.12	0.65	44.77	-9.23	54.00	100	133	Average
3		5203.300	90.18	0.70	90.88	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

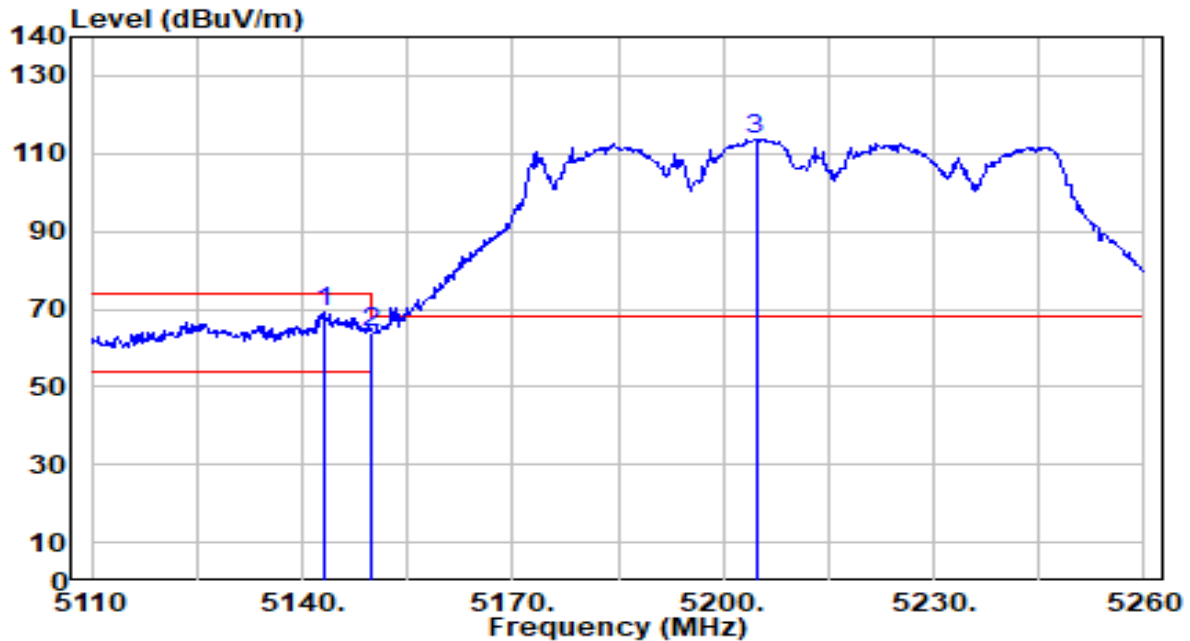


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.000	68.40	0.65	69.04	-4.96	74.00	219	172	Peak
2		5150.000	63.46	0.65	64.11	-9.89	74.00	219	172	Peak
3		5204.650	113.10	0.69	113.79	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

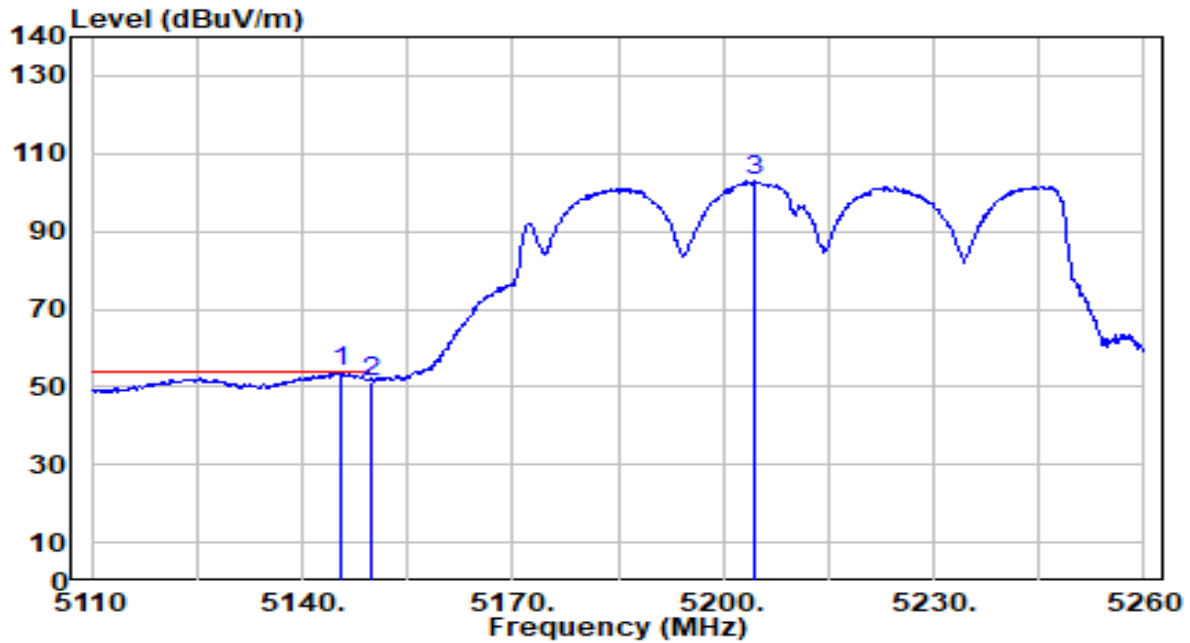


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.550	53.11	0.65	53.76	-0.24	54.00	219	172	Average
2		5150.000	50.82	0.65	51.47	-2.53	54.00	219	172	Average
3		5204.500	102.51	0.70	103.21	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

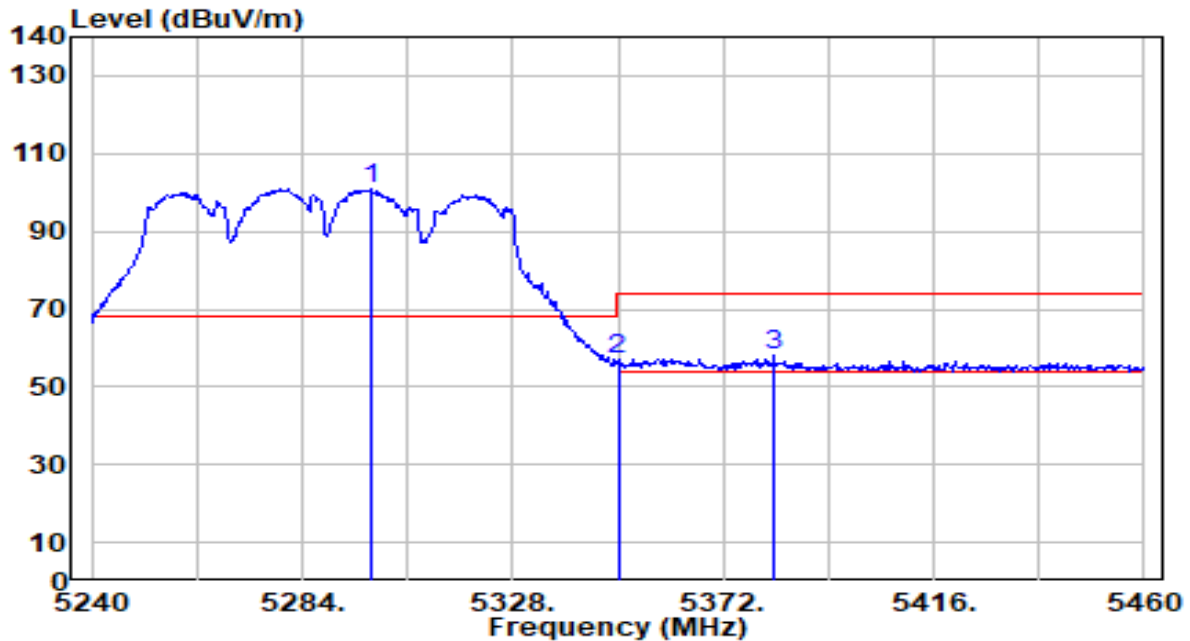


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.300	100.22	0.55	100.77	N/A	N/A	169	138	Peak
2	5350.000	56.33	0.47	56.80	-17.20	74.00	169	138	Peak
3	* 5382.560	57.46	0.42	57.88	-16.12	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

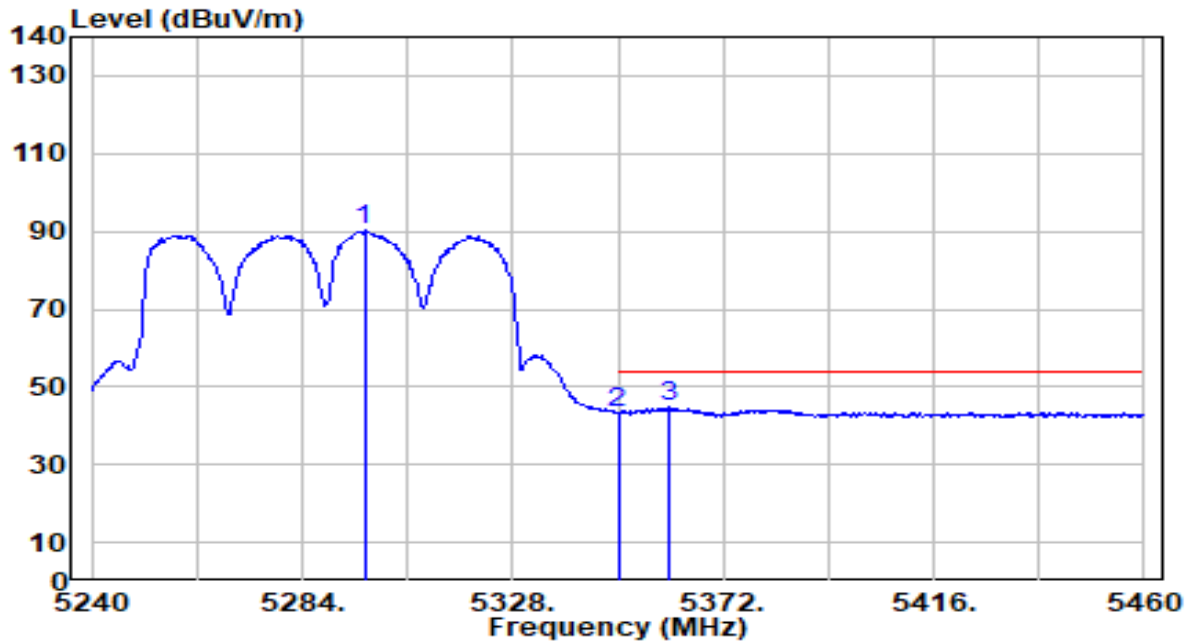


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.980	89.69	0.55	90.25	N/A	N/A	169	138	Average
2	5350.000	43.03	0.47	43.50	-10.50	54.00	169	138	Average
3	* 5360.560	44.23	0.45	44.68	-9.32	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

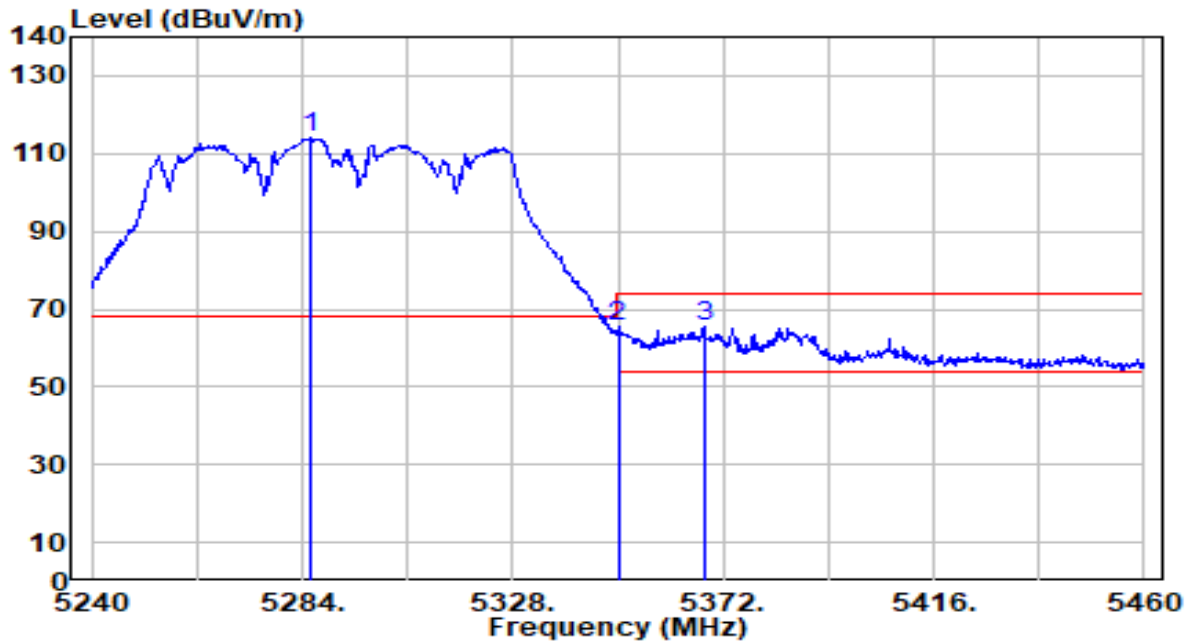


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5285.980	113.51	0.57	114.08	N/A	N/A	183	173	Peak
2	*	5350.000	65.22	0.47	65.69	-8.31	74.00	183	173	Peak
3		5368.040	64.96	0.44	65.40	-8.60	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

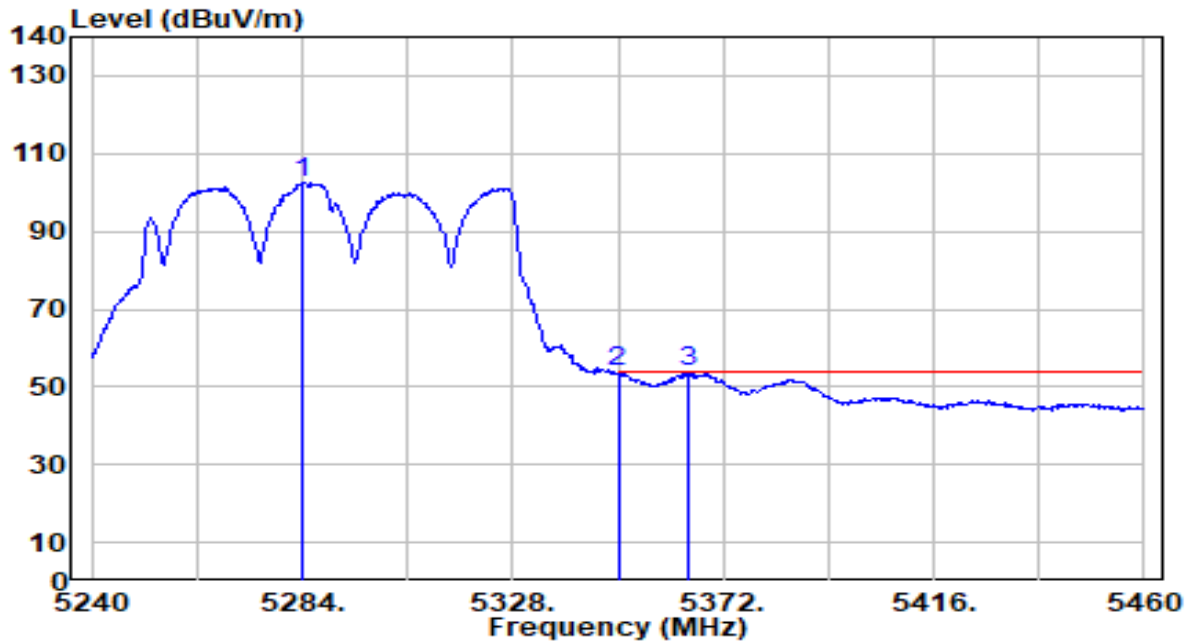


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5284.000	102.04	0.57	102.61	N/A	N/A	183	173	Average
2	*	5350.000	53.25	0.47	53.72	-0.28	54.00	183	173	Average
3		5364.960	53.20	0.45	53.65	-0.35	54.00	183	173	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

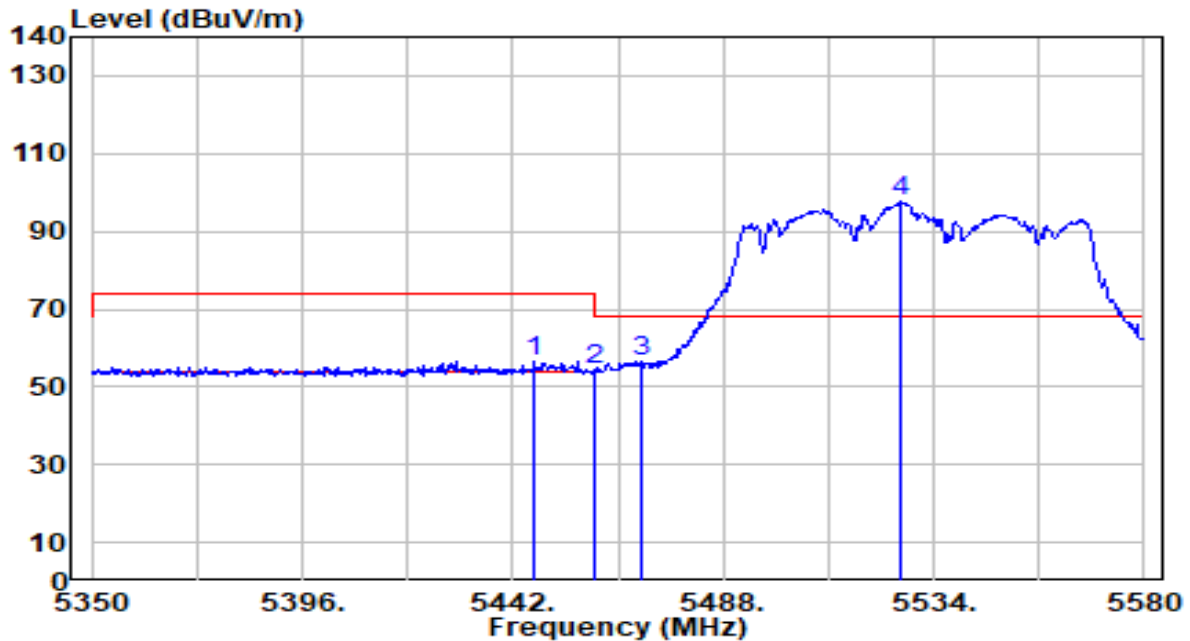


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.600	55.79	0.60	56.39	-17.61	74.00	300	98	Peak
2	5460.000	53.69	0.66	54.35	-19.65	74.00	300	98	Peak
3	* 5470.000	55.71	0.71	56.42	-11.78	68.20	300	98	Peak
4	5526.640	96.82	0.96	97.78	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

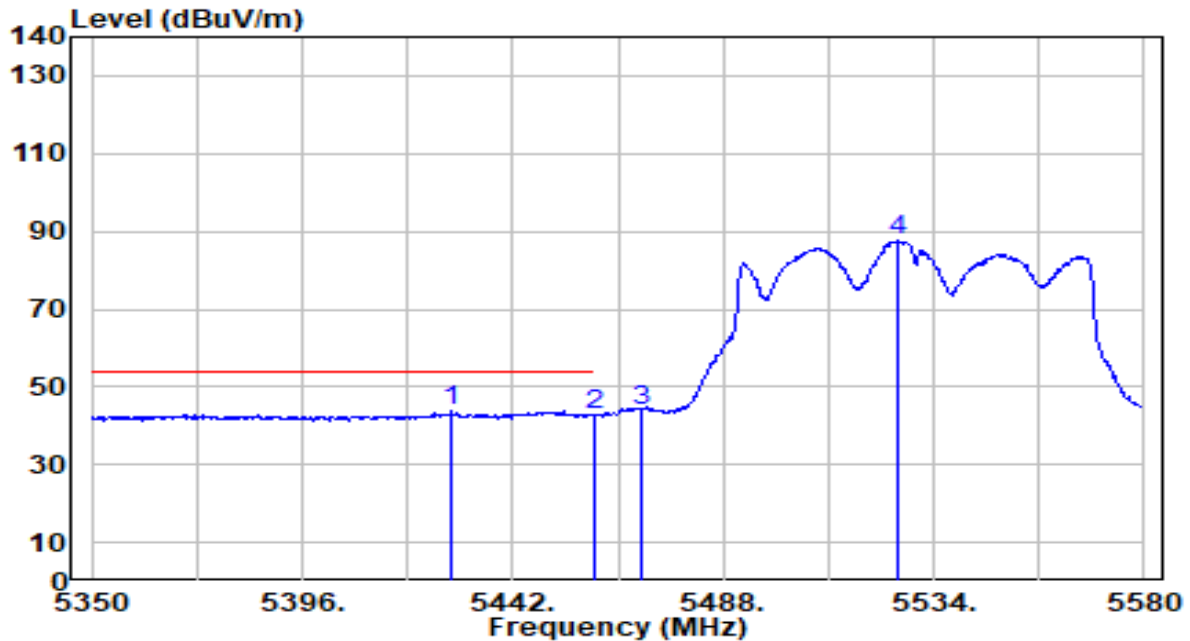


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5428.660	43.10	0.52	43.62	-10.38	54.00	300	98	Average
2		5460.000	41.97	0.66	42.63	-11.37	54.00	300	98	Average
3		5470.000	43.40	0.71	44.10	N/A	N/A	300	98	Average
4		5526.180	86.90	0.96	87.86	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

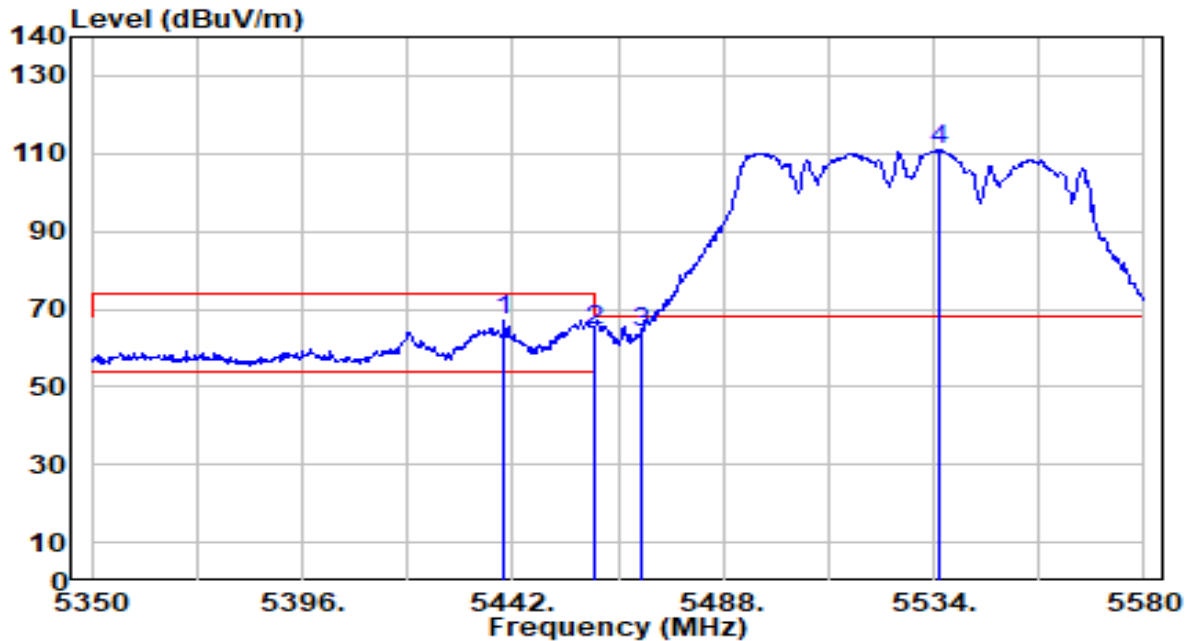


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5439.930	66.69	0.57	67.26	-6.74	74.00	213	148	Peak
2	5460.000	63.94	0.66	64.60	-9.40	74.00	213	148	Peak
3	* 5470.000	63.20	0.71	63.91	-4.29	68.20	213	148	Peak
4	5535.150	109.95	1.00	110.96	N/A	N/A	213	148	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Wi-Fi 7 Router	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

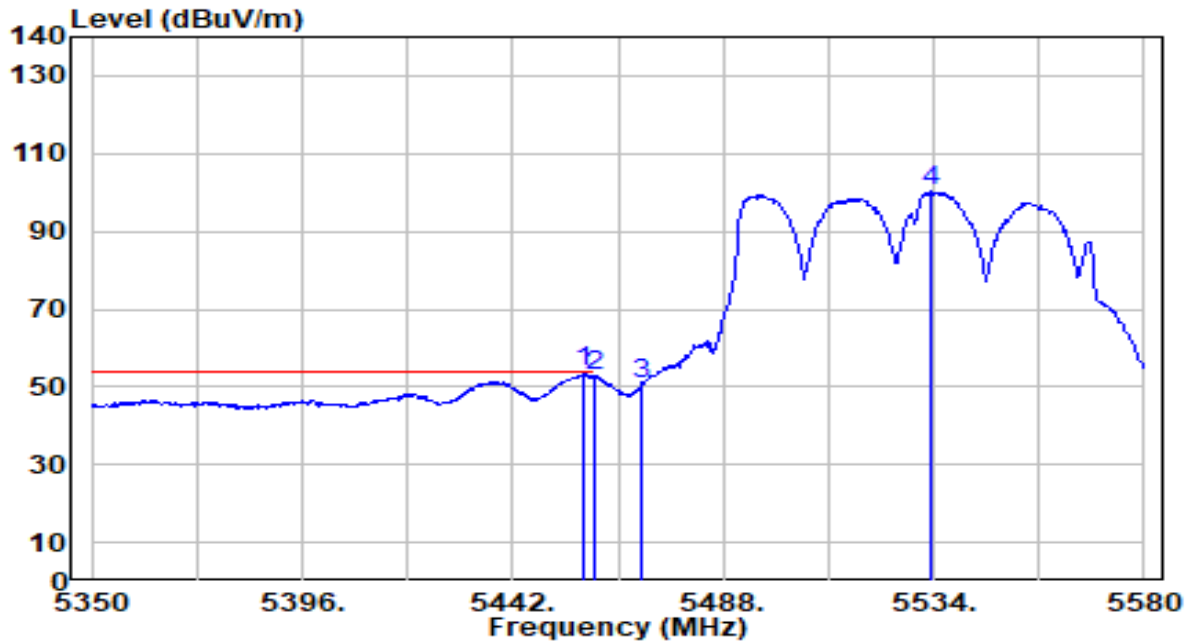


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.640	53.13	0.65	53.78	-0.22	54.00	213	148	Average
2		5460.000	51.94	0.66	52.61	-1.39	54.00	213	148	Average
3		5470.000	49.97	0.71	50.67	N/A	N/A	213	148	Average
4		5533.540	99.29	1.00	100.28	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

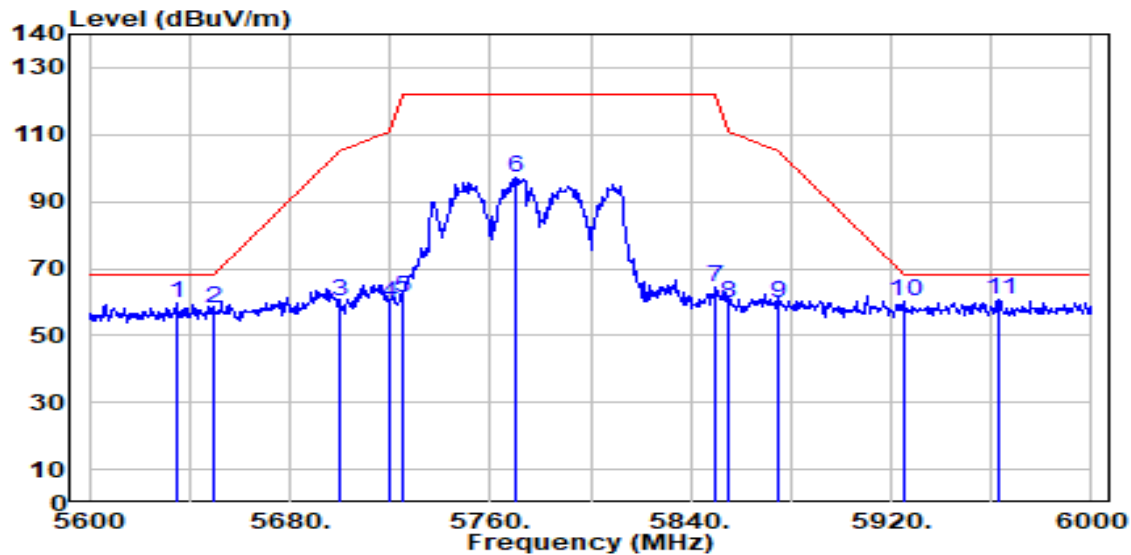


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5634.800	58.22	1.47	59.69	-8.51	68.20	207	99	Peak
2	5650.000	56.34	1.54	57.88	-10.32	68.20	207	99	Peak
3	5700.000	58.45	1.78	60.23	-44.97	105.20	207	99	Peak
4	5720.000	57.62	1.87	59.49	-51.31	110.80	207	99	Peak
5	5725.000	59.52	1.89	61.41	-60.79	122.20	207	99	Peak
6	5770.000	95.15	2.10	97.25	N/A	N/A	207	99	Peak
7	5850.000	62.33	2.25	64.58	-57.62	122.20	207	99	Peak
8	5855.000	57.47	2.25	59.72	-51.08	110.80	207	99	Peak
9	5875.000	57.35	2.26	59.61	-45.59	105.20	207	99	Peak
10	5925.000	57.77	2.27	60.04	-8.16	68.20	207	99	Peak
11	* 5963.200	58.37	2.27	60.64	-7.56	68.20	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

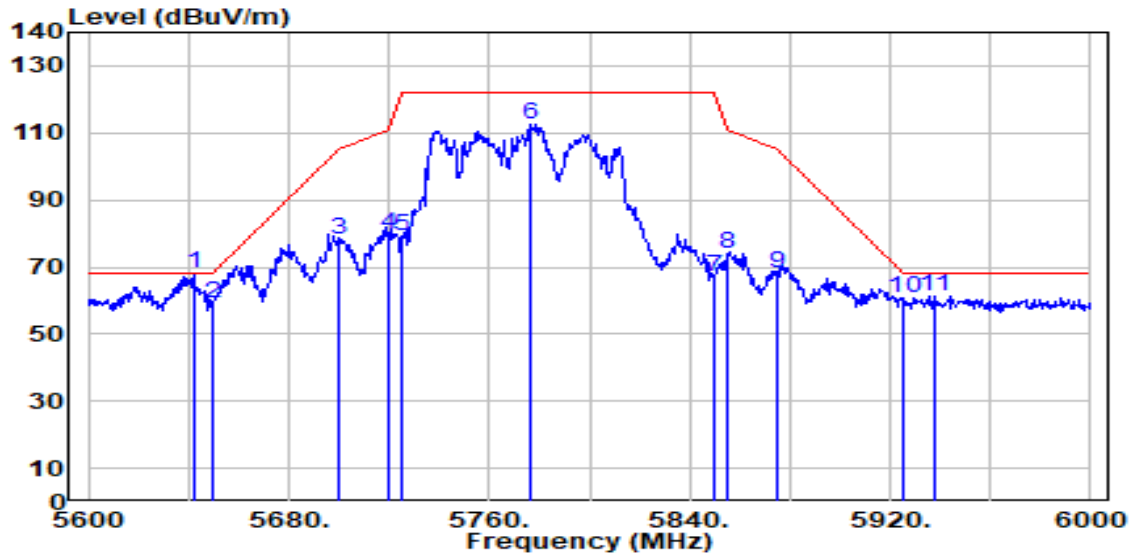


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.000	66.41	1.50	67.91	-0.29	68.20	202	188	Peak
2		5650.000	57.85	1.54	59.39	-8.81	68.20	202	188	Peak
3		5700.000	76.58	1.78	78.36	-26.84	105.20	202	188	Peak
4		5720.000	77.65	1.87	79.52	-31.28	110.80	202	188	Peak
5		5725.000	77.38	1.89	79.27	-42.93	122.20	202	188	Peak
6		5776.000	110.31	2.13	112.44	N/A	N/A	202	188	Peak
7		5850.000	64.82	2.25	67.07	-55.13	122.20	202	188	Peak
8		5855.000	71.90	2.25	74.15	-36.65	110.80	202	188	Peak
9		5875.000	65.82	2.26	68.08	-37.12	105.20	202	188	Peak
10		5925.000	58.27	2.27	60.54	-7.66	68.20	202	188	Peak
11		5937.600	59.26	2.27	61.53	-6.67	68.20	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

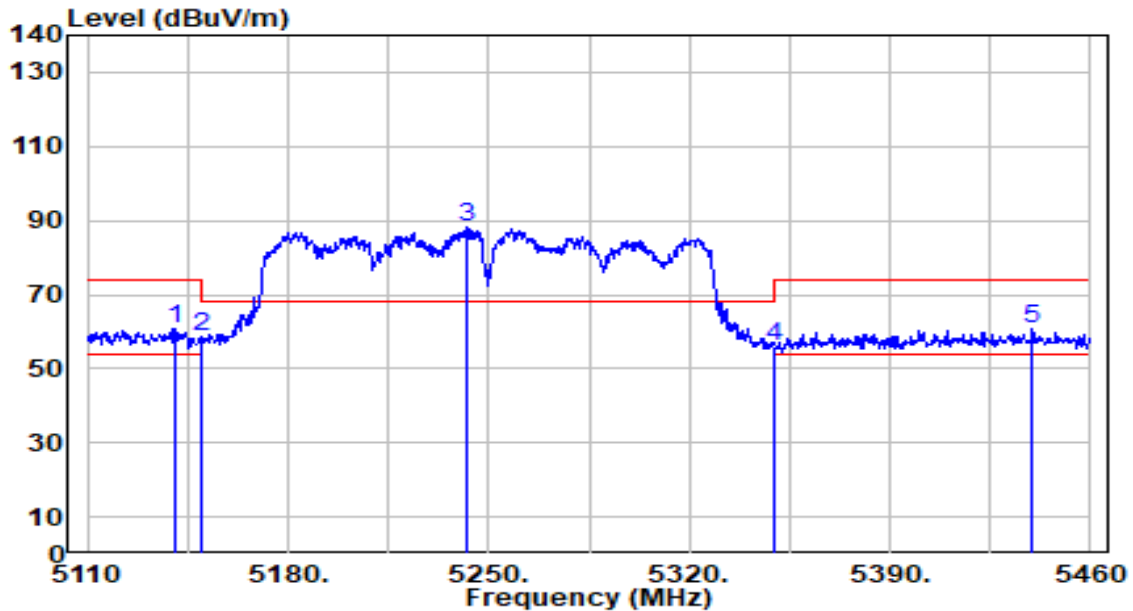


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5140.450	59.94	0.64	60.59	-13.41	74.00	100	133	Peak
2	5150.000	57.93	0.65	58.58	-15.42	74.00	100	133	Peak
3	5242.650	87.77	0.64	88.41	N/A	N/A	100	133	Peak
4	5350.000	55.76	0.47	56.23	-17.77	74.00	100	133	Peak
5	* 5439.700	60.15	0.57	60.72	-13.28	74.00	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

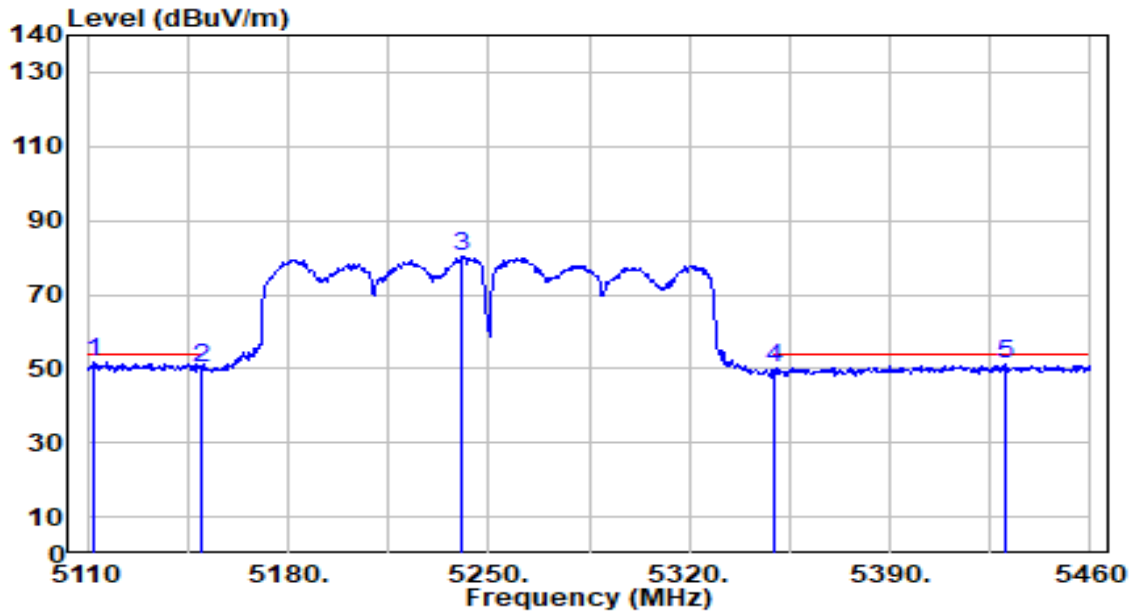


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5112.450	51.11	0.62	51.73	-2.27	54.00	100	133	Average
2		5150.000	49.42	0.65	50.08	-3.92	54.00	100	133	Average
3		5240.900	79.77	0.64	80.41	N/A	N/A	100	133	Average
4		5350.000	49.58	0.47	50.05	-3.95	54.00	100	133	Average
5		5430.600	50.90	0.53	51.43	-2.57	54.00	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

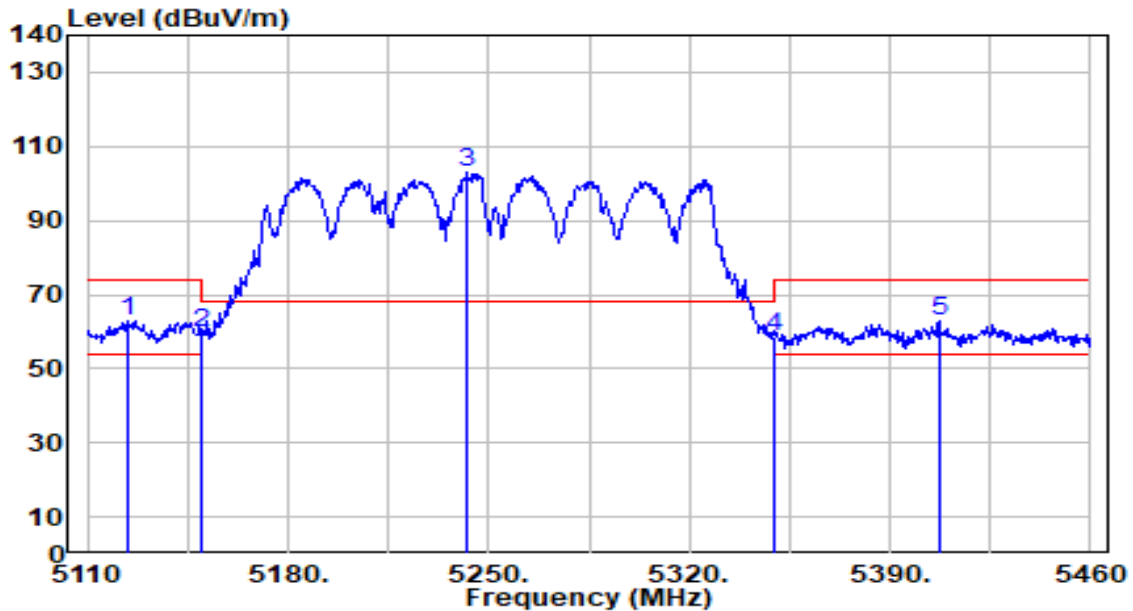


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5124.000	62.48	0.63	63.11	-10.89	74.00	219	172	Peak
2		5150.000	59.17	0.65	59.82	-14.18	74.00	219	172	Peak
3		5242.650	102.42	0.64	103.06	N/A	N/A	219	172	Peak
4		5350.000	58.09	0.47	58.57	-15.43	74.00	219	172	Peak
5		5407.150	62.23	0.43	62.65	-11.35	74.00	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

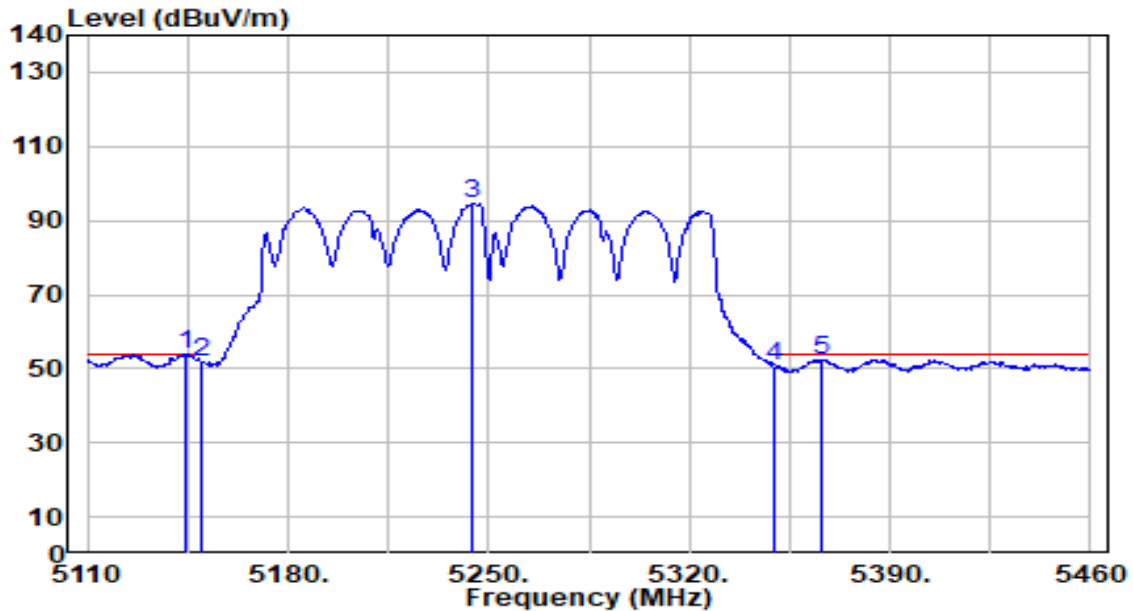


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.300	53.11	0.65	53.75	-0.25	54.00	219	172	Average
2		5150.000	51.04	0.65	51.69	-2.31	54.00	219	172	Average
3		5244.400	94.08	0.63	94.72	N/A	N/A	219	172	Average
4		5350.000	50.48	0.47	50.95	-3.05	54.00	219	172	Average
5		5366.200	52.10	0.45	52.55	-1.45	54.00	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

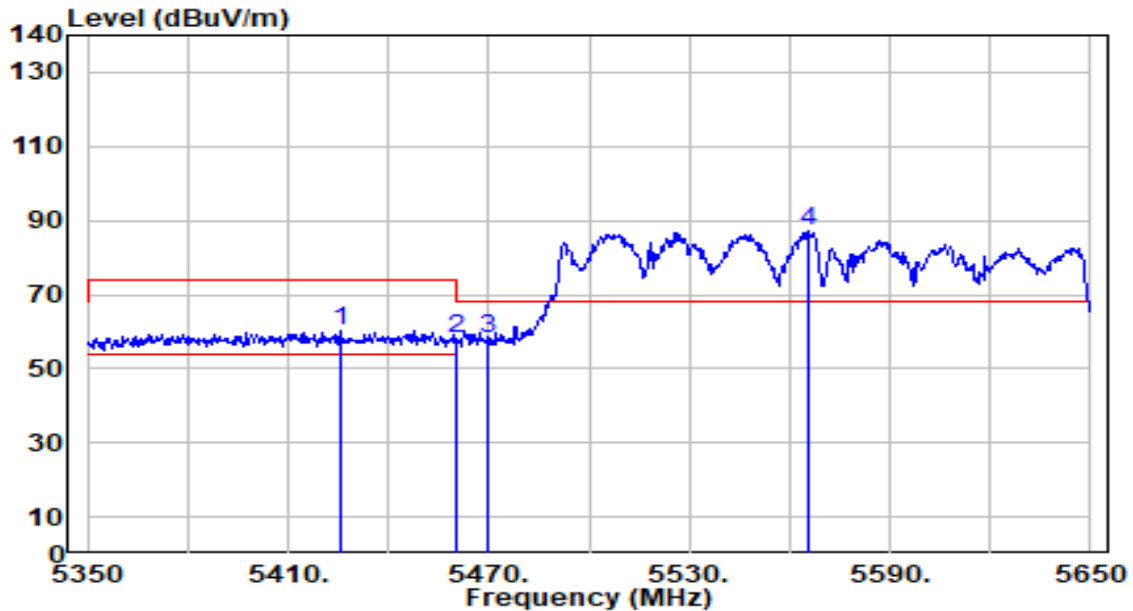


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5425.600	59.87	0.51	60.38	-13.62	74.00	300	98	Peak
2	5460.000	57.29	0.66	57.95	-16.05	74.00	300	98	Peak
3	* 5470.000	57.51	0.71	58.21	-9.99	68.20	300	98	Peak
4	5565.700	85.81	1.15	86.96	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

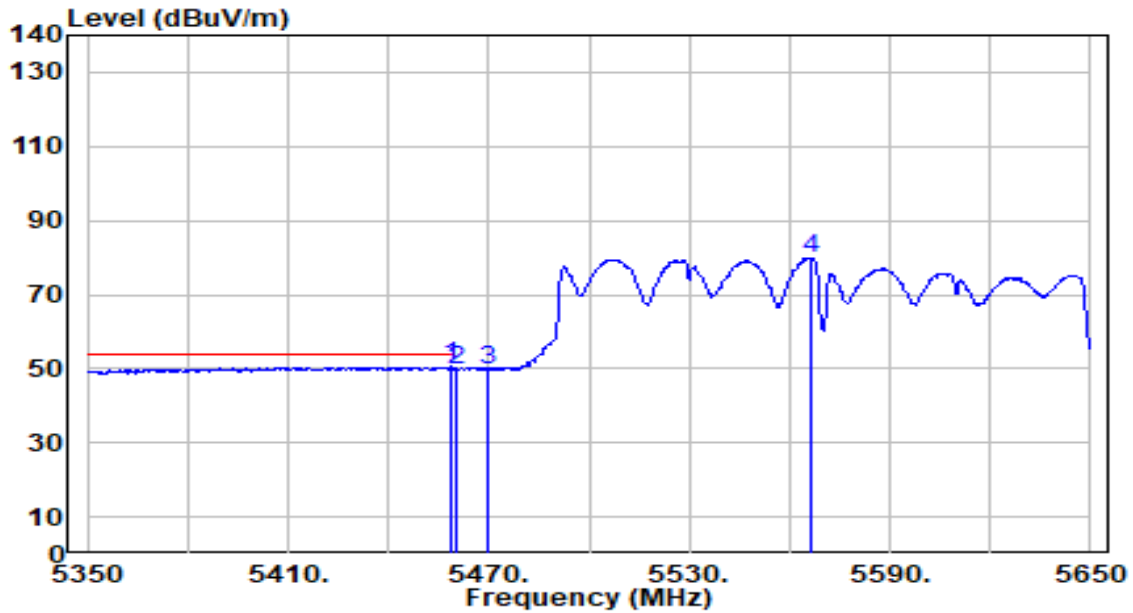


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.600	49.83	0.66	50.48	-3.52	54.00	300	98	Average
2		5460.000	49.13	0.66	49.79	-4.21	54.00	300	98	Average
3		5470.000	49.16	0.71	49.87	N/A	N/A	300	98	Average
4		5566.600	78.68	1.15	79.83	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

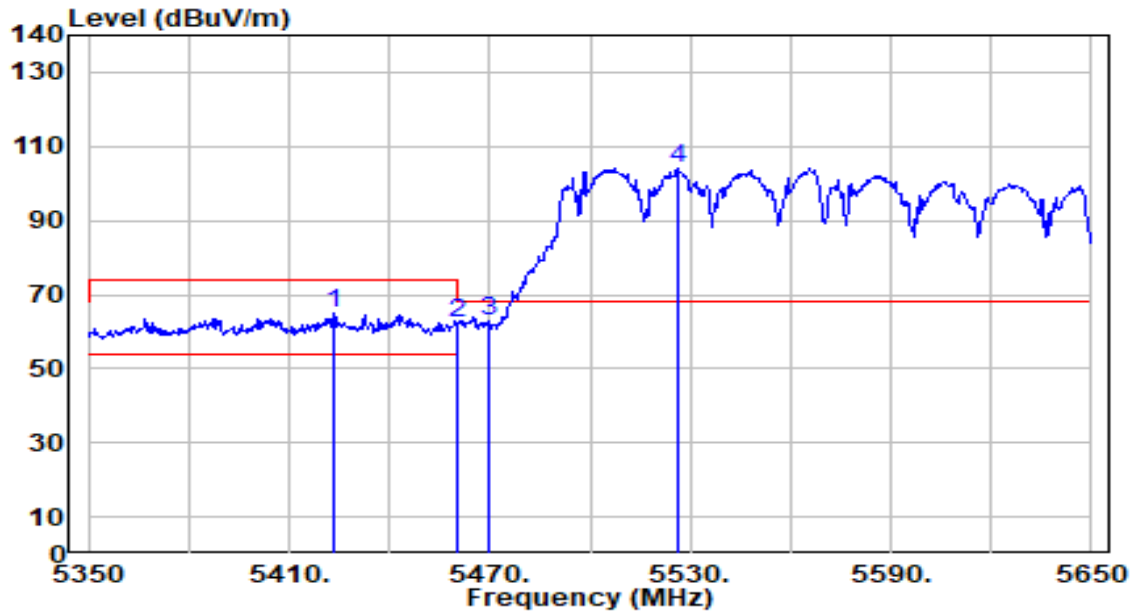


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5423.200	64.25	0.50	64.75	-9.25	74.00	183	173	Peak
2	5460.000	61.86	0.66	62.53	-11.47	74.00	183	173	Peak
3	* 5470.000	62.34	0.71	63.05	-5.15	68.20	183	173	Peak
4	5526.700	103.01	0.96	103.97	N/A	N/A	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

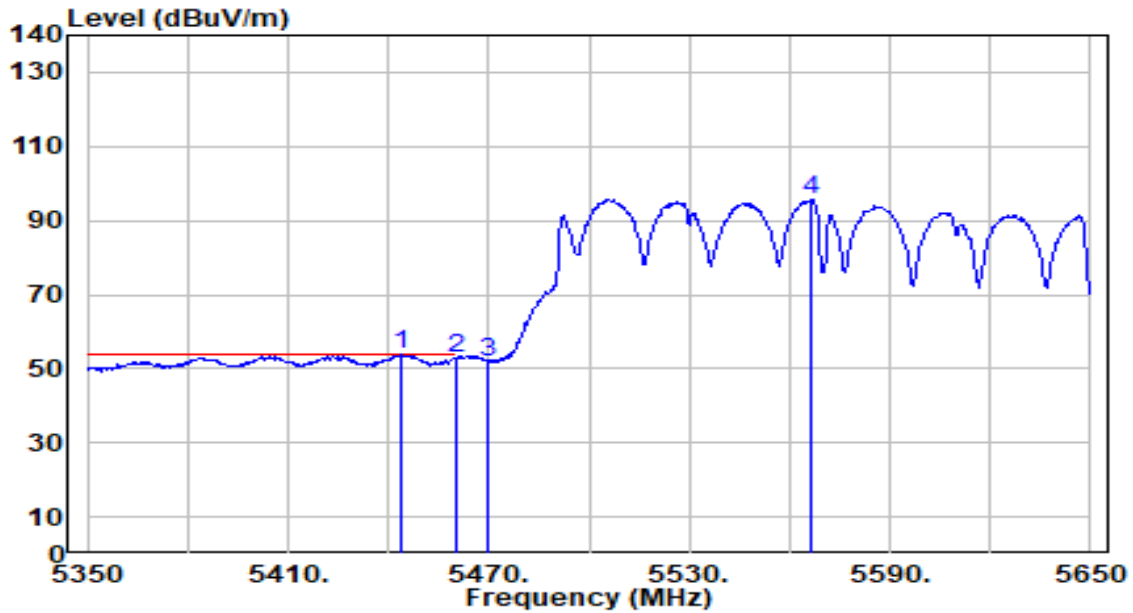


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5443.600	53.19	0.59	53.78	-0.22	54.00	183	173	Average
2		5460.000	51.95	0.66	52.61	-1.39	54.00	183	173	Average
3		5470.000	51.14	0.71	51.85	N/A	N/A	183	173	Average
4		5566.600	94.42	1.15	95.57	N/A	N/A	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

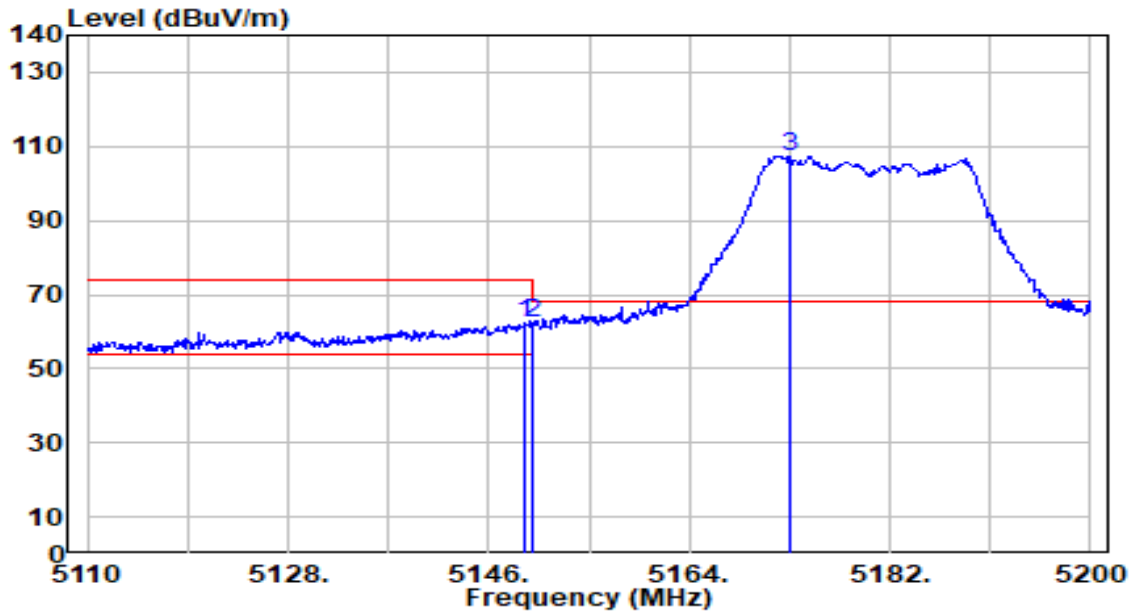


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.240	61.47	0.65	62.12	-11.88	74.00	100	133	Peak
2	* 5150.000	61.73	0.65	62.38	-11.62	74.00	100	133	Peak
3	5173.000	106.79	0.68	107.46	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

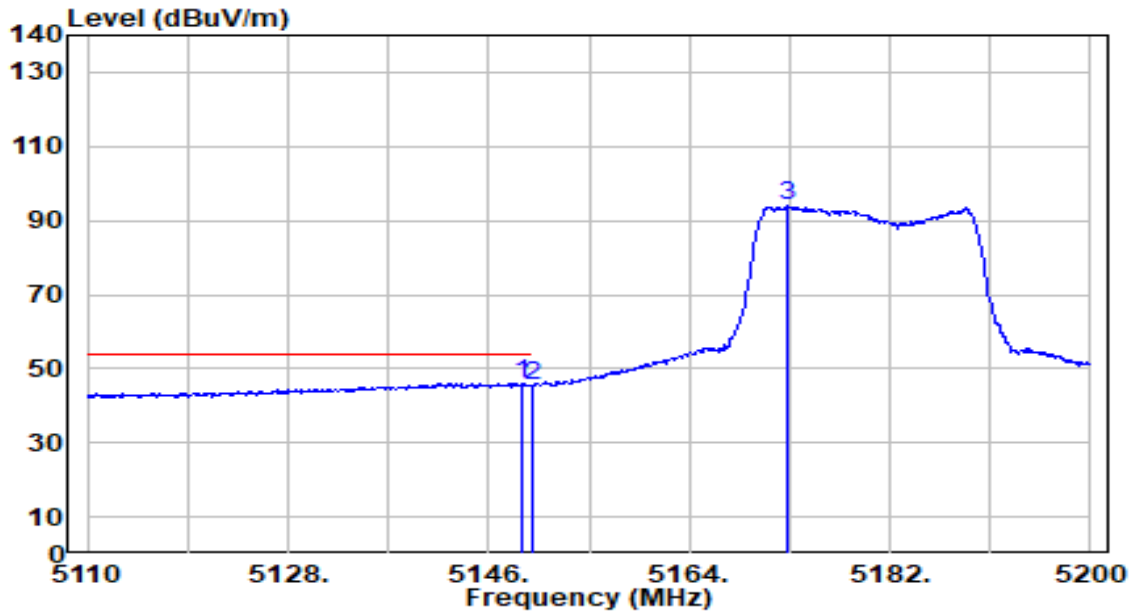


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	45.29	0.65	45.94	-8.06	54.00	100	133	Average
2		5150.000	44.82	0.65	45.47	-8.53	54.00	100	133	Average
3		5172.730	93.18	0.68	93.85	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

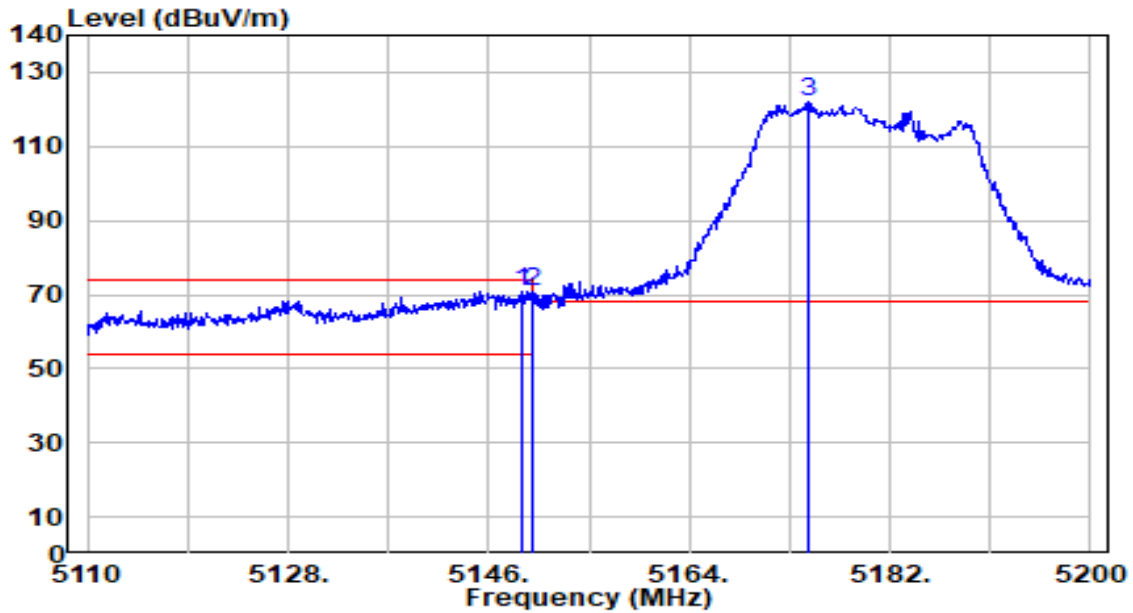


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.970	70.10	0.65	70.75	-3.25	74.00	219	172	Peak
2	* 5150.000	70.14	0.65	70.79	-3.21	74.00	219	172	Peak
3	5174.710	121.23	0.68	121.91	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-28
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

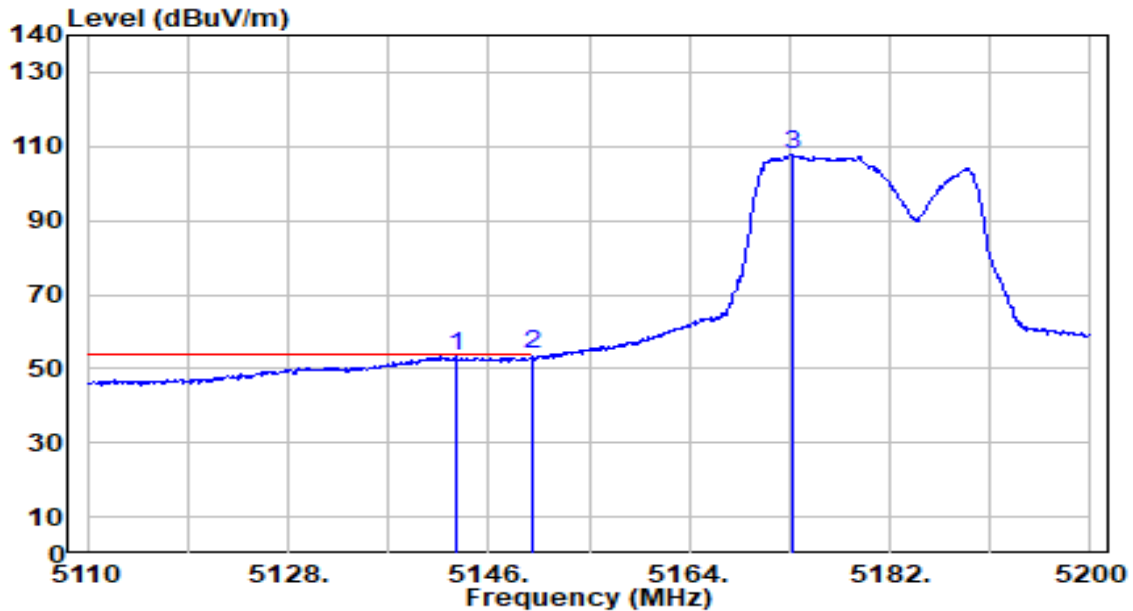


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5143.210	52.58	0.65	53.23	-0.77	54.00	219	172	Average
2	*	5150.000	53.09	0.65	53.75	-0.25	54.00	219	172	Average
3		5173.270	107.01	0.68	107.69	N/A	N/A	219	172	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

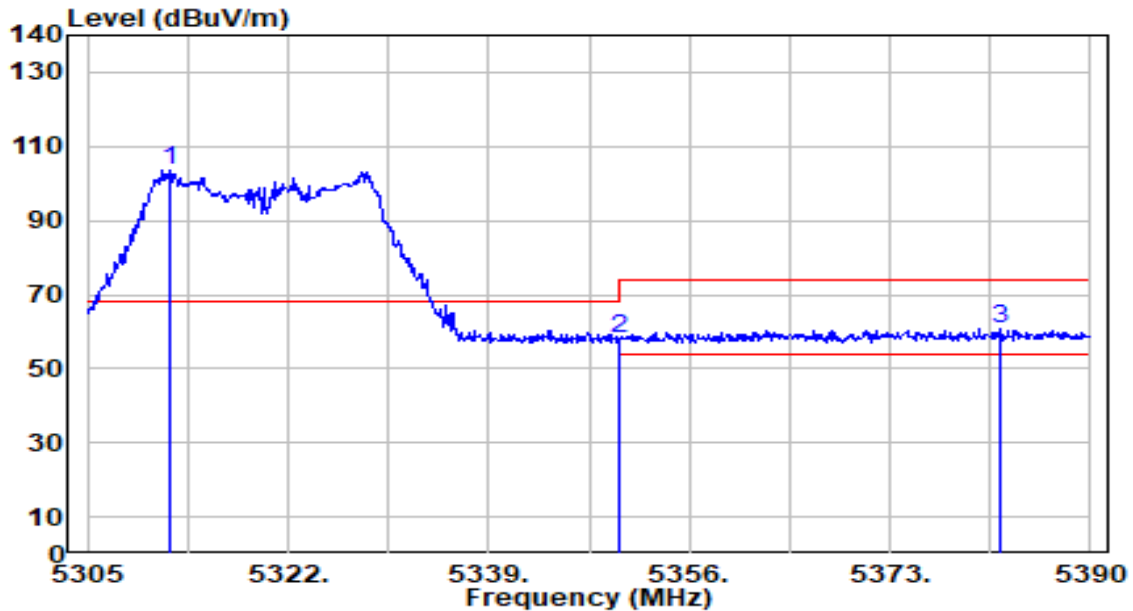


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.885	102.85	0.53	103.38	N/A	N/A	169	138	Peak
2	5350.000	57.71	0.47	58.18	-15.82	74.00	169	138	Peak
3	* 5382.265	60.35	0.42	60.77	-13.23	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

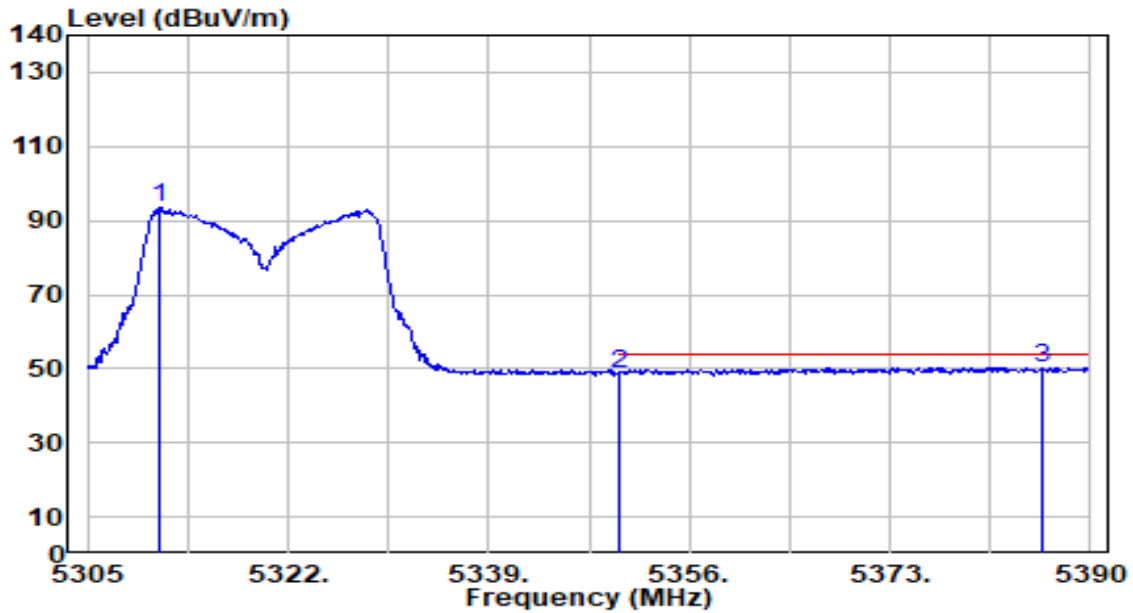


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.120	92.87	0.53	93.40	N/A	N/A	169	138	Average
2	5350.000	48.20	0.47	48.67	-5.33	54.00	169	138	Average
3	* 5385.835	50.01	0.42	50.43	-3.57	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

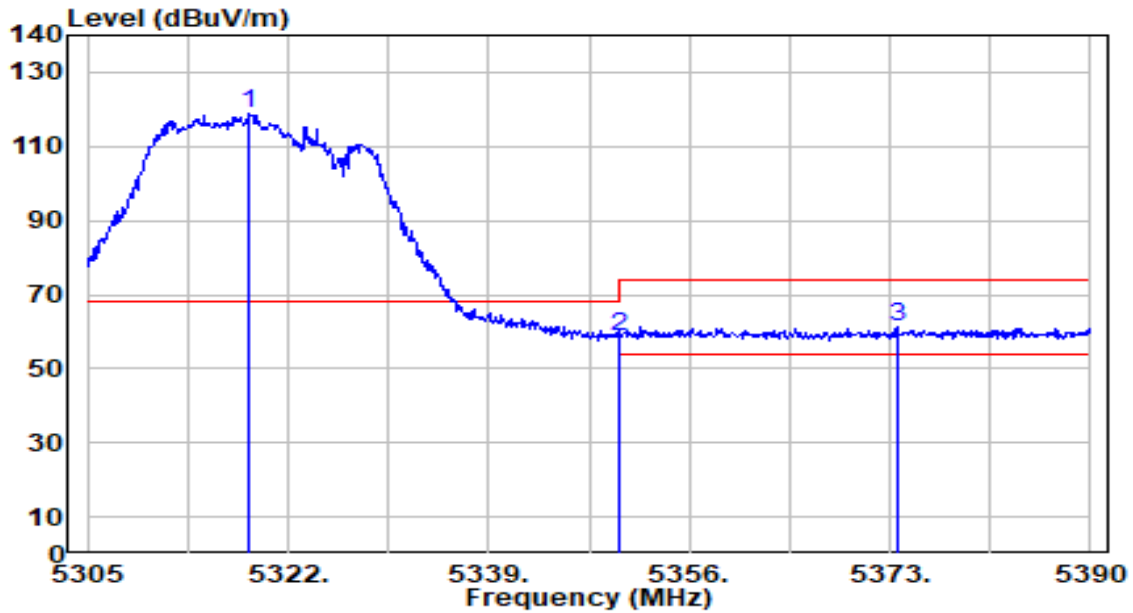


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.770	118.09	0.52	118.61	N/A	N/A	183	173	Peak
2	5350.000	58.38	0.47	58.85	-15.15	74.00	183	173	Peak
3	* 5373.595	61.09	0.43	61.53	-12.47	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

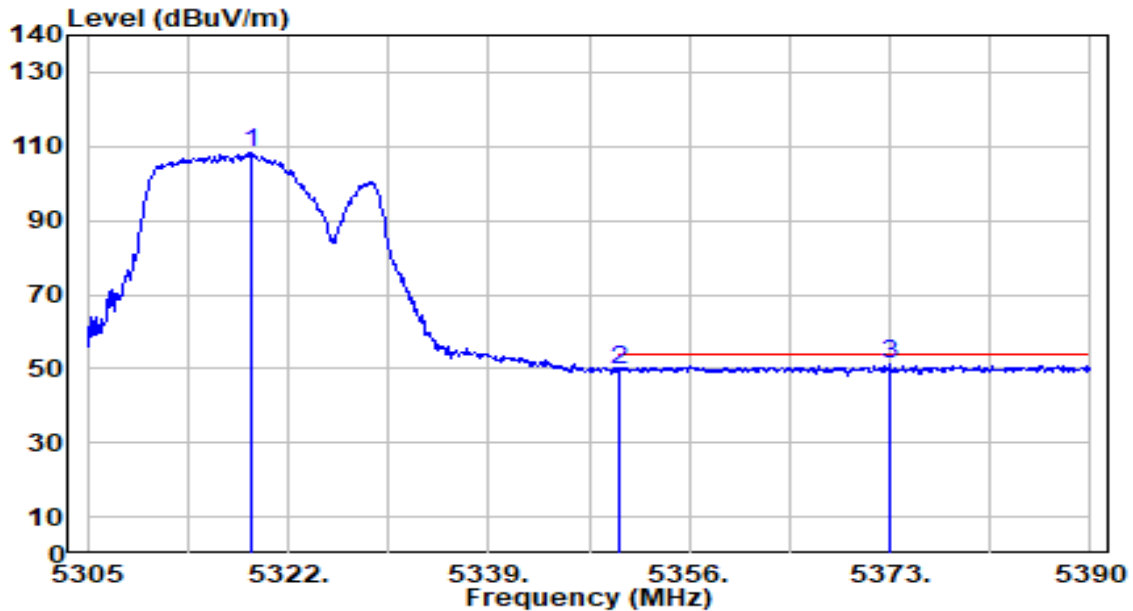


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.855	107.87	0.52	108.39	N/A	N/A	183	173	Average
2	5350.000	49.43	0.47	49.91	-4.09	54.00	183	173	Average
3	* 5373.000	50.76	0.44	51.20	-2.80	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

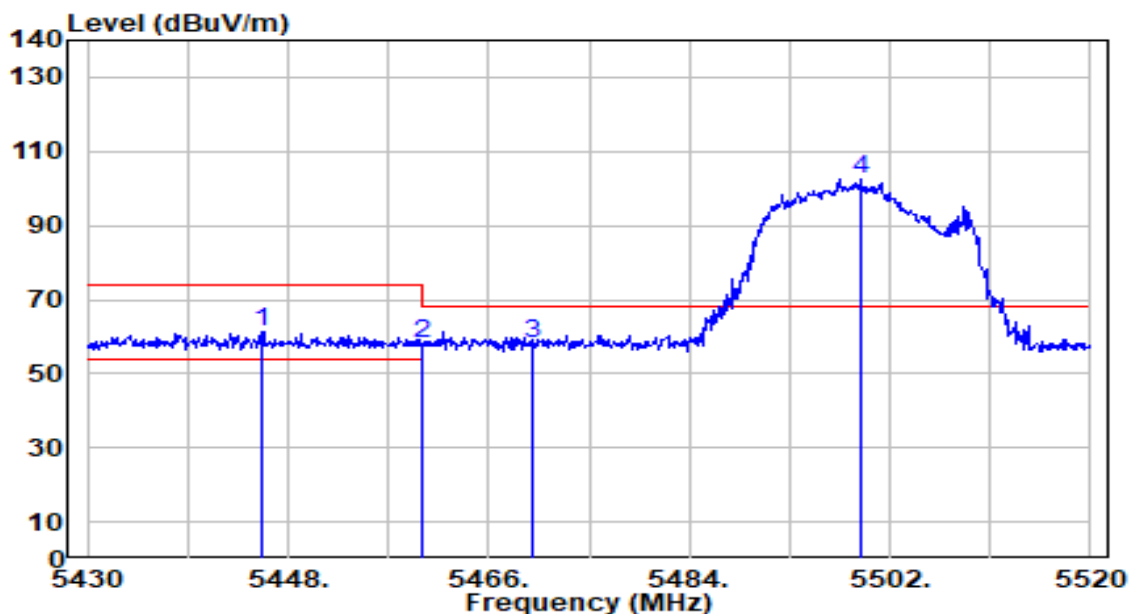


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5445.750	60.68	0.60	61.28	-12.72	74.00	300	98	Peak
2	5460.000	57.47	0.66	58.14	-15.86	74.00	300	98	Peak
3	* 5470.000	57.43	0.71	58.13	-10.07	68.20	300	98	Peak
4	5499.390	101.61	0.84	102.45	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

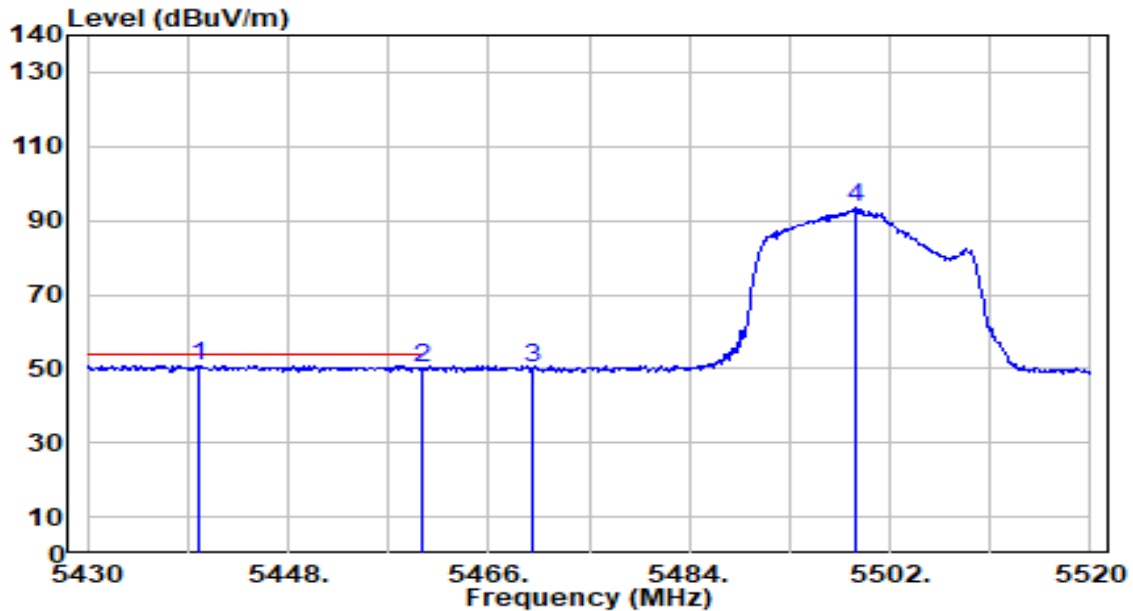


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5439.900	50.30	0.57	50.88	-3.12	54.00	300	98	Average
2		5460.000	49.70	0.66	50.36	-3.64	54.00	300	98	Average
3		5470.000	49.26	0.71	49.97	N/A	N/A	300	98	Average
4		5498.850	92.67	0.83	93.50	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

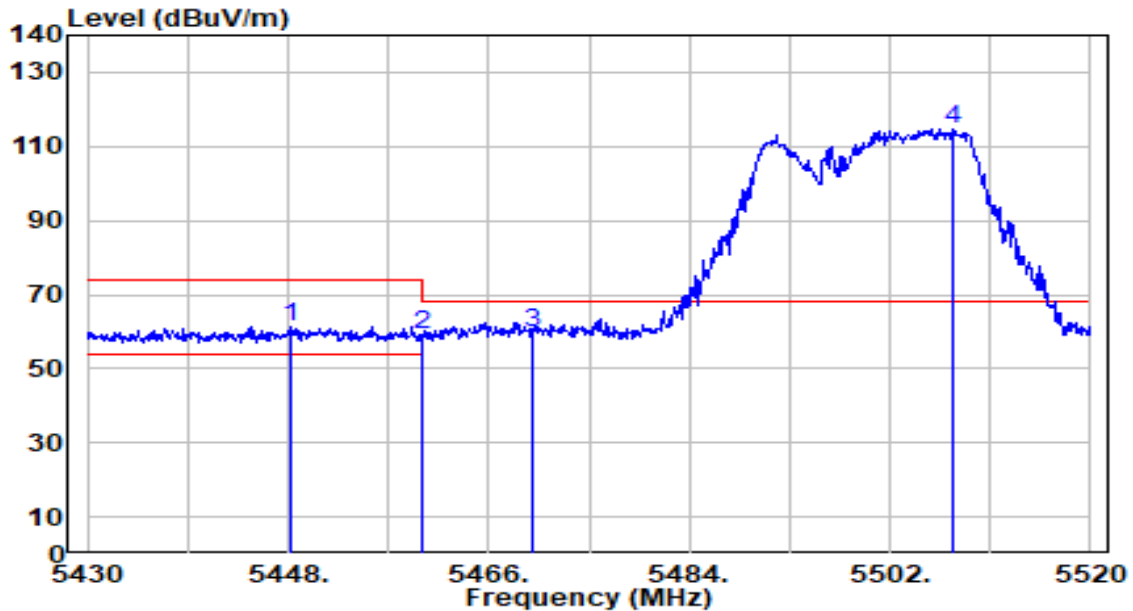


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.180	60.52	0.61	61.13	-12.87	74.00	213	148	Peak
2	5460.000	58.30	0.66	58.97	-15.03	74.00	213	148	Peak
3	* 5470.000	59.22	0.71	59.93	-8.27	68.20	213	148	Peak
4	5507.580	113.78	0.88	114.65	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

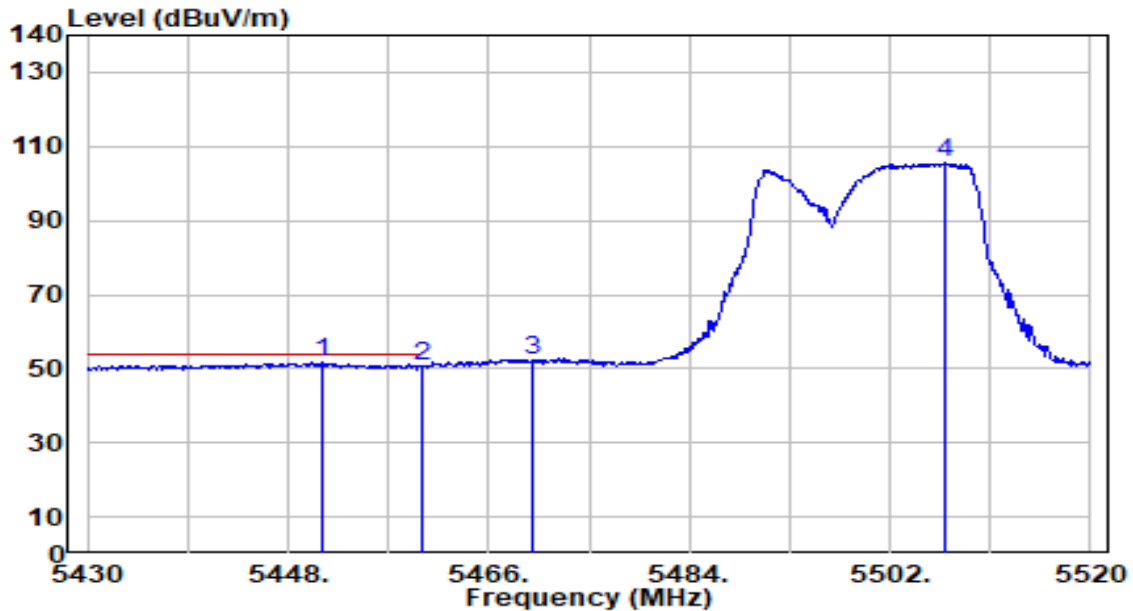


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.150	51.29	0.62	51.91	-2.09	54.00	213	148	Average
2		5460.000	50.23	0.66	50.89	-3.11	54.00	213	148	Average
3		5470.000	51.80	0.71	52.51	N/A	N/A	213	148	Average
4		5506.950	104.93	0.87	105.80	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

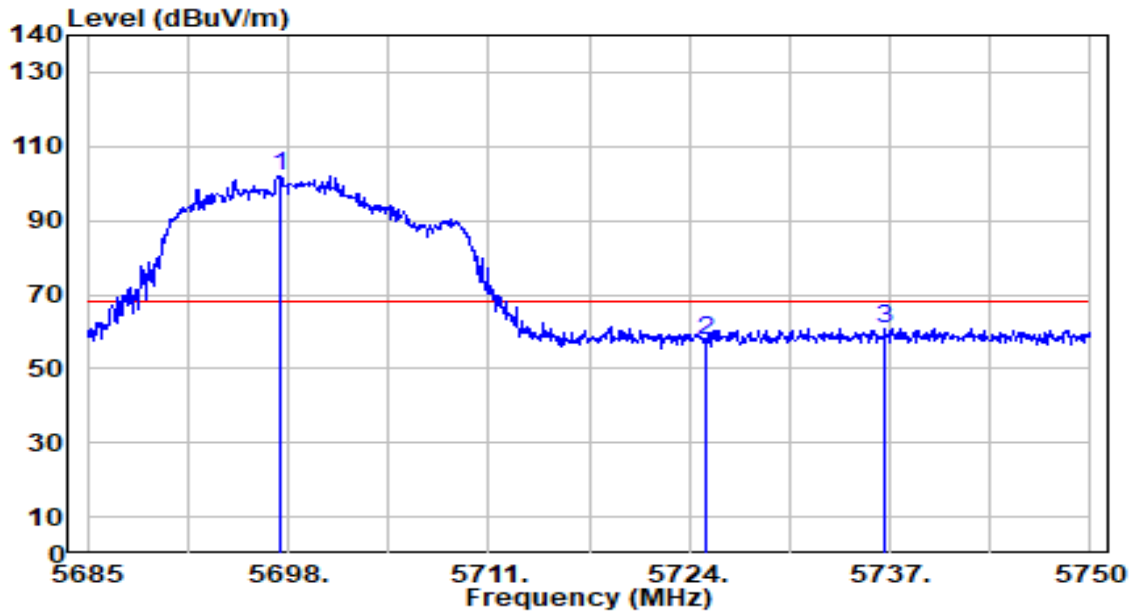


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.545	100.27	1.76	102.03	N/A	N/A	200	105	Peak
2	5725.000	55.94	1.89	57.83	-10.37	68.20	200	105	Peak
3	* 5736.675	58.97	1.95	60.92	-7.28	68.20	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

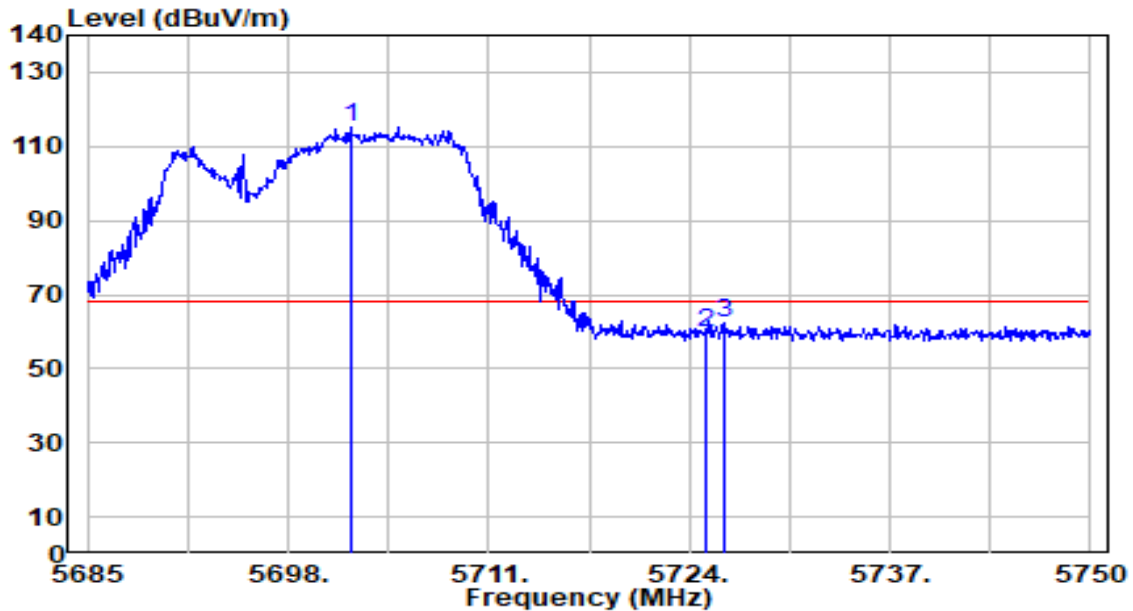


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.030	113.26	1.79	115.04	N/A	N/A	204	195	Peak
2	5725.000	58.01	1.89	59.91	-8.29	68.20	204	195	Peak
3	* 5726.340	60.57	1.90	62.47	-5.73	68.20	204	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

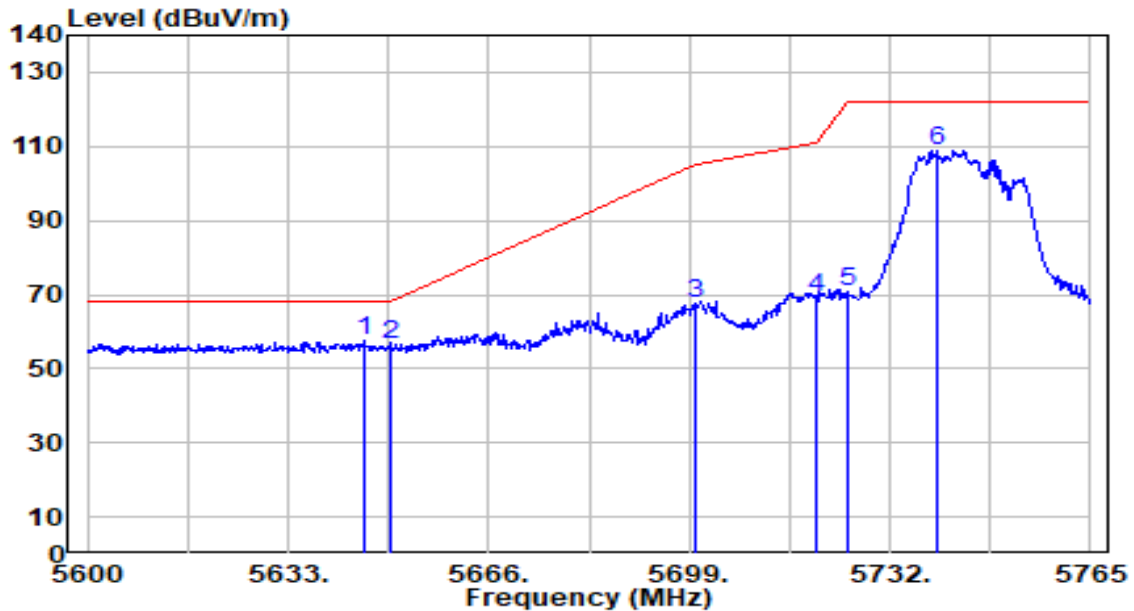


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.540	55.92	1.52	57.44	-10.76	68.20	207	99	Peak
2		5650.000	55.01	1.54	56.55	-11.65	68.20	207	99	Peak
3		5700.000	66.05	1.78	67.83	-37.37	105.20	207	99	Peak
4		5720.000	67.56	1.87	69.43	-41.37	110.80	207	99	Peak
5		5725.000	68.79	1.89	70.68	-51.52	122.20	207	99	Peak
6		5739.920	107.04	1.96	109.00	N/A	N/A	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

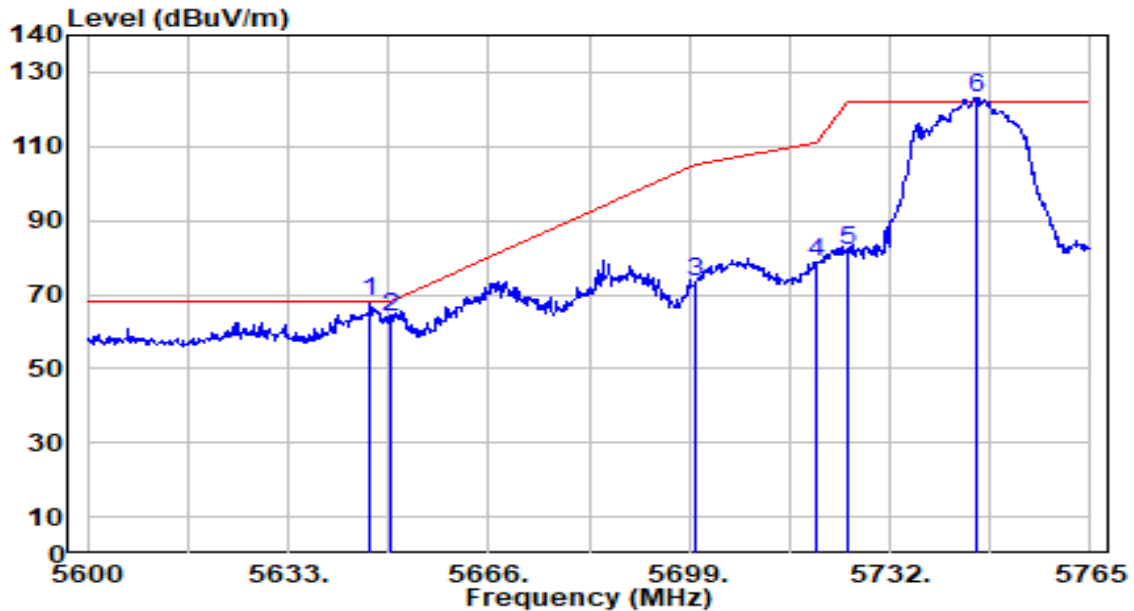


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.530	66.42	1.53	67.94	-0.26	68.20	202	188	Peak
2		5650.000	62.27	1.54	63.82	-4.38	68.20	202	188	Peak
3		5700.000	71.40	1.78	73.18	-32.02	105.20	202	188	Peak
4		5720.000	76.81	1.87	78.68	-32.12	110.80	202	188	Peak
5		5725.000	80.05	1.89	81.94	-40.26	122.20	202	188	Peak
6		5746.190	121.32	1.99	123.31	N/A	N/A	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

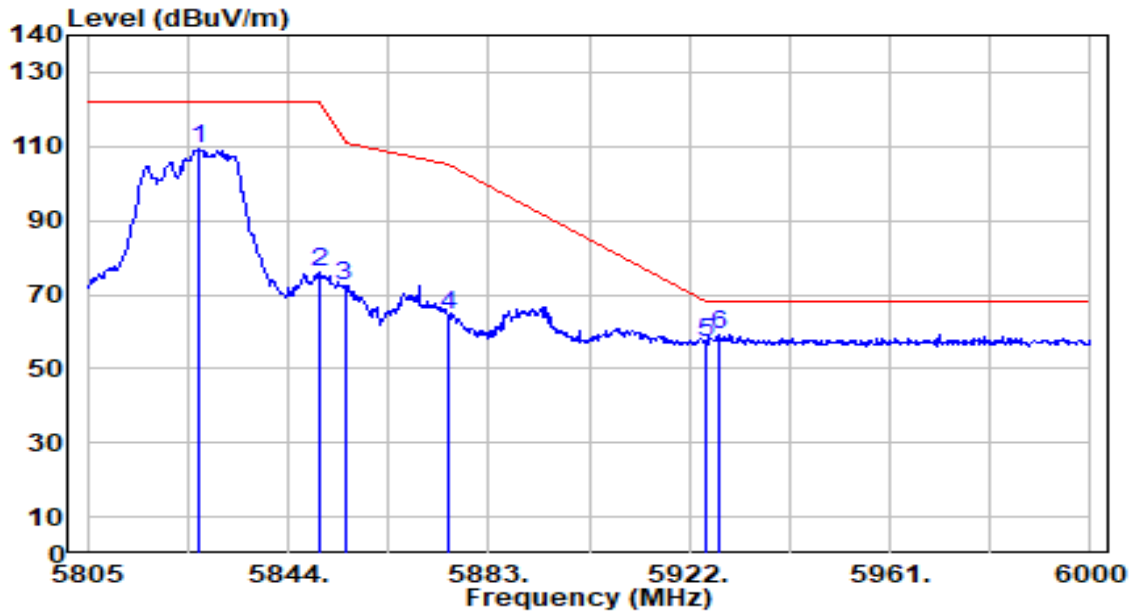


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.840	106.89	2.25	109.14	N/A	N/A	285	222	Peak
2	5850.000	73.56	2.25	75.81	-46.39	122.20	285	222	Peak
3	5855.000	69.91	2.25	72.17	-38.63	110.80	285	222	Peak
4	5875.000	62.06	2.26	64.32	-40.88	105.20	285	222	Peak
5	5925.000	54.61	2.27	56.88	-11.32	68.20	285	222	Peak
6	* 5927.655	57.02	2.27	59.29	-8.91	68.20	285	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

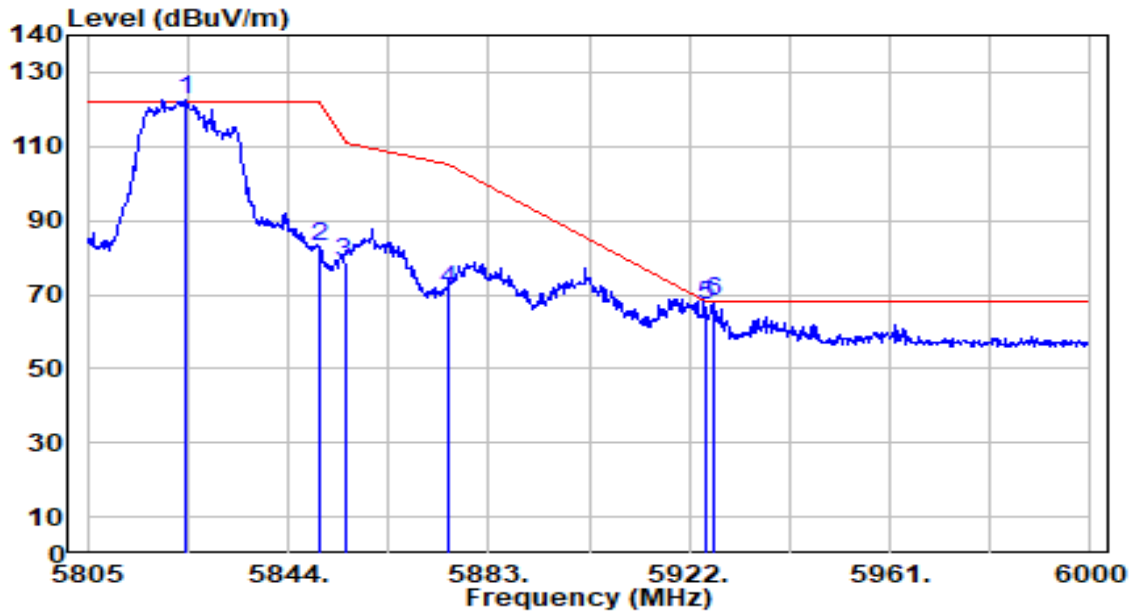


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.110	120.11	2.25	122.36	N/A	N/A	185	176	Peak
2	5850.000	80.45	2.25	82.70	-39.50	122.20	185	176	Peak
3	5855.000	76.61	2.25	78.86	-31.94	110.80	185	176	Peak
4	5875.000	69.28	2.26	71.53	-33.67	105.20	185	176	Peak
5	5925.000	65.04	2.27	67.31	-0.89	68.20	185	176	Peak
6	* 5926.680	65.64	2.27	67.91	-0.29	68.20	185	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

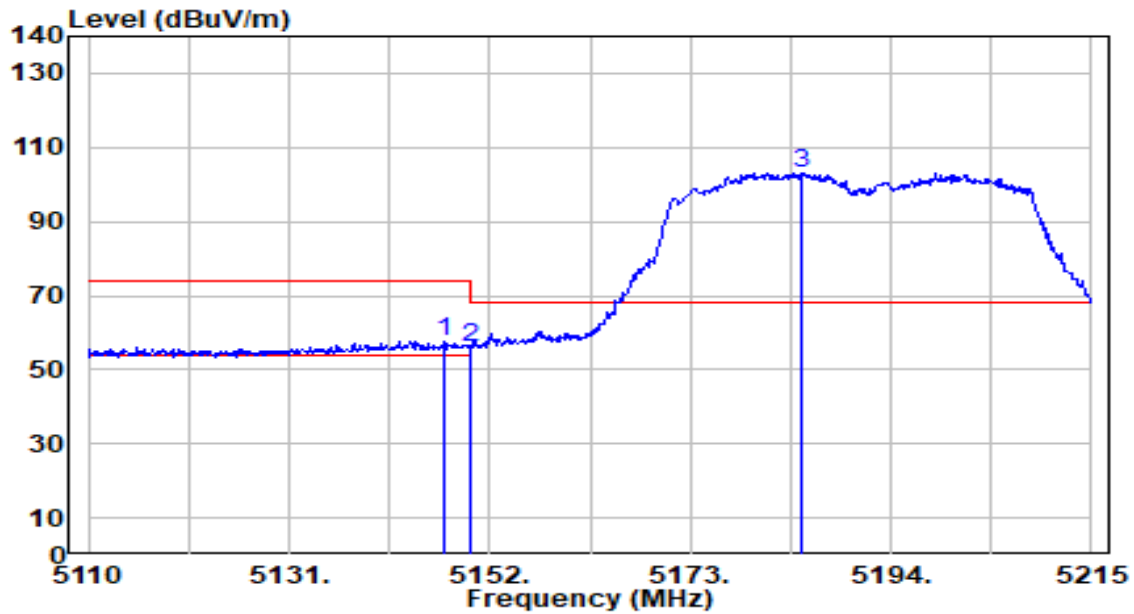


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.275	57.10	0.65	57.75	-16.25	74.00	100	133	Peak
2		5150.000	55.48	0.65	56.14	-17.86	74.00	100	133	Peak
3		5184.550	102.38	0.69	103.07	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

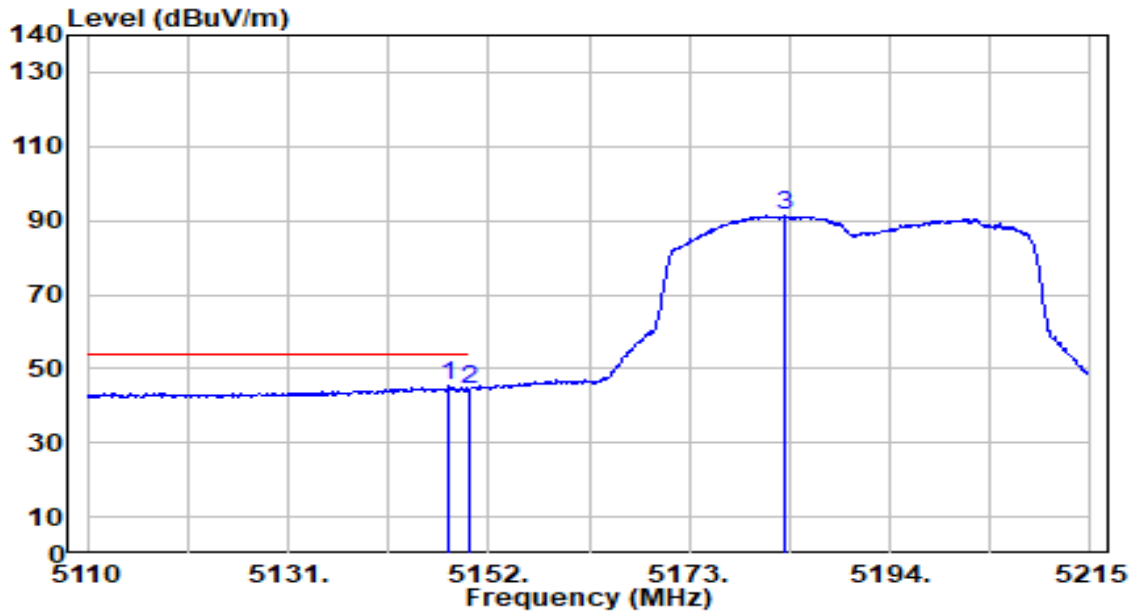


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	44.53	0.65	45.18	-8.82	54.00	100	133	Average
2		5150.000	43.96	0.65	44.61	-9.39	54.00	100	133	Average
3		5183.080	90.50	0.69	91.19	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

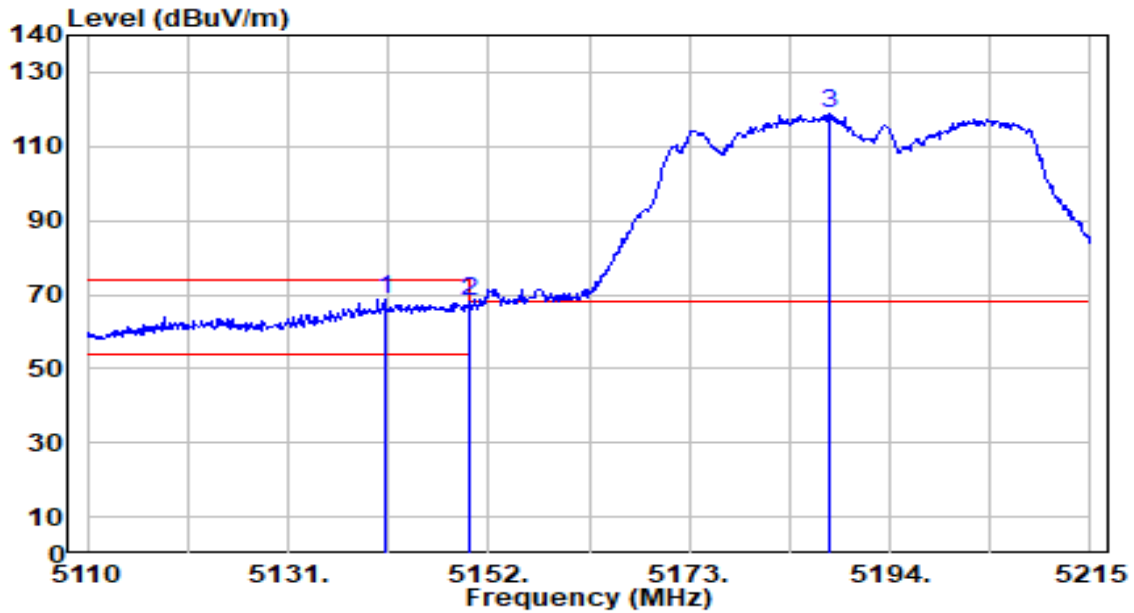


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.080	68.23	0.65	68.88	-5.12	74.00	219	172	Peak
2		5150.000	67.25	0.65	67.90	-6.10	74.00	219	172	Peak
3		5187.700	118.43	0.69	119.12	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

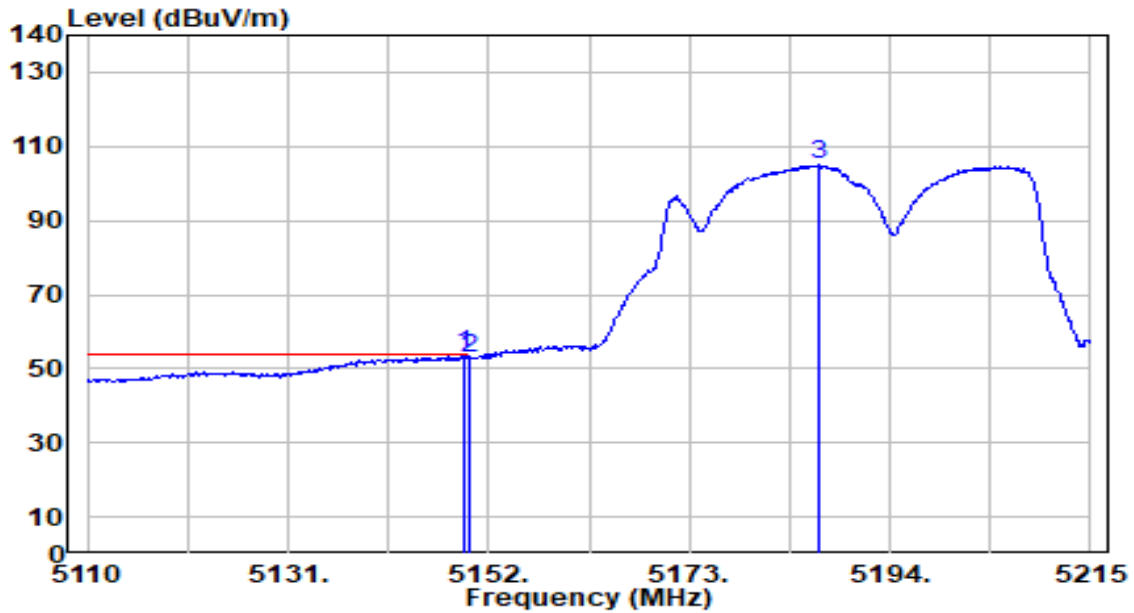


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	53.15	0.65	53.80	-0.20	54.00	219	172	Average
2		5150.000	52.27	0.65	52.93	-1.07	54.00	219	172	Average
3		5186.545	104.36	0.69	105.05	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

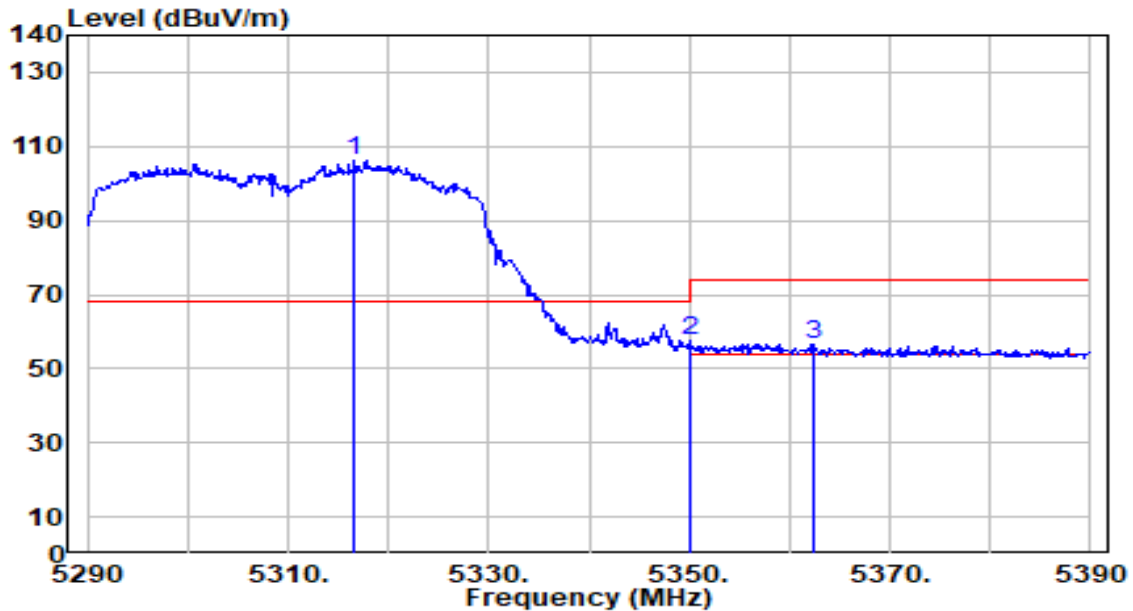


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.600	105.91	0.52	106.43	N/A	N/A	169	138	Peak
2	* 5350.000	56.95	0.47	57.42	-16.58	74.00	169	138	Peak
3	5362.400	56.02	0.45	56.47	-17.53	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

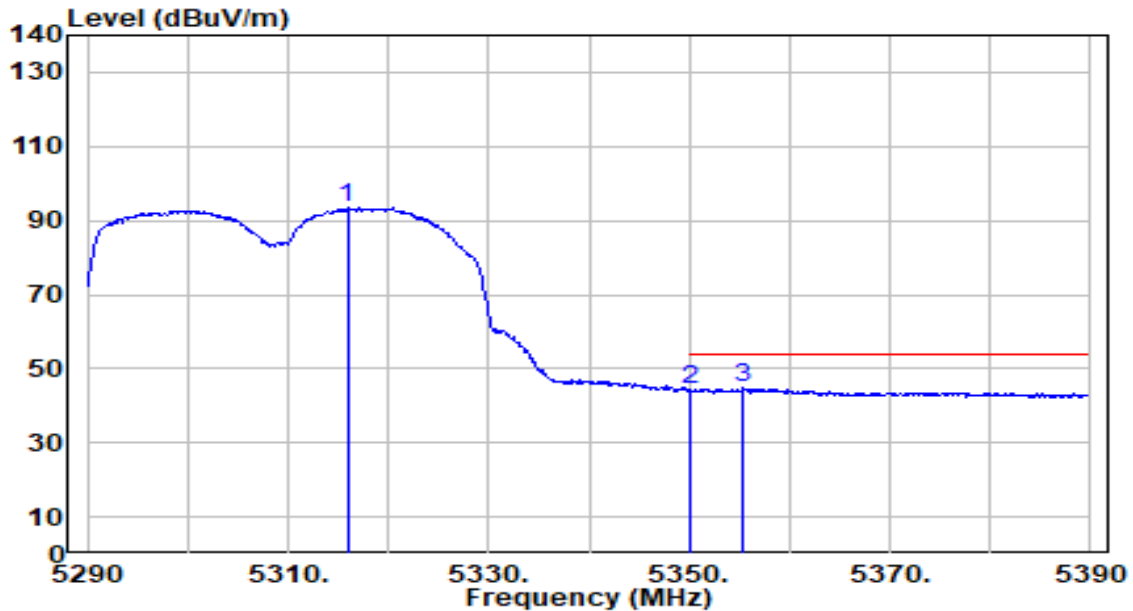


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.900	92.82	0.52	93.34	N/A	N/A	169	138	Average
2	5350.000	43.68	0.47	44.15	-9.85	54.00	169	138	Average
3	* 5355.400	44.22	0.46	44.68	-9.32	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

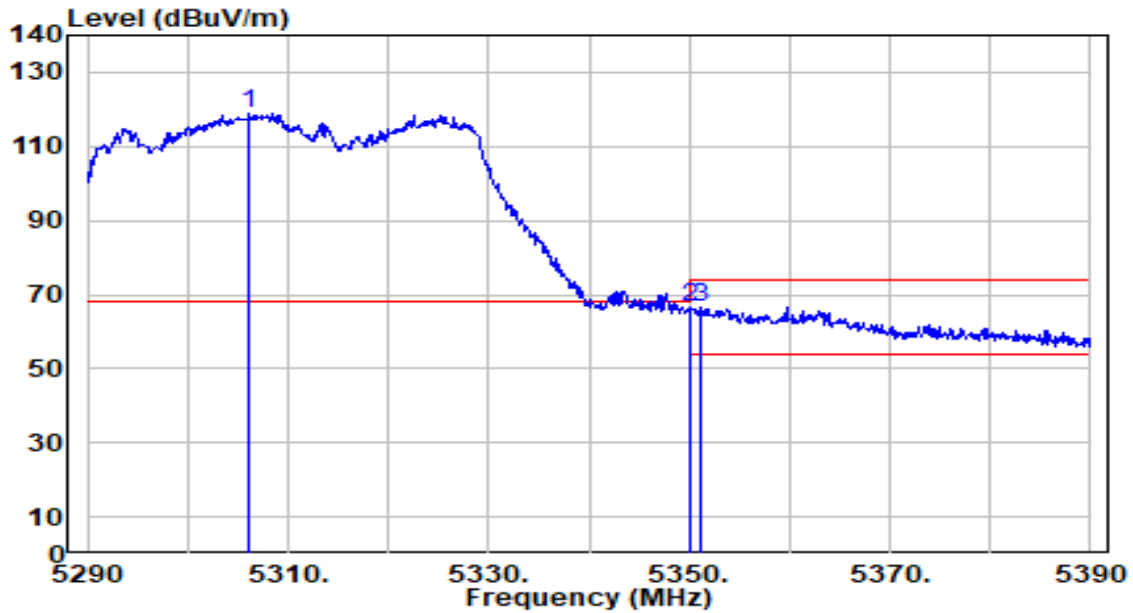


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.100	118.48	0.54	119.02	N/A	N/A	183	173	Peak
2	5350.000	66.22	0.47	66.69	-7.31	74.00	183	173	Peak
3	* 5351.100	66.31	0.47	66.78	-7.22	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

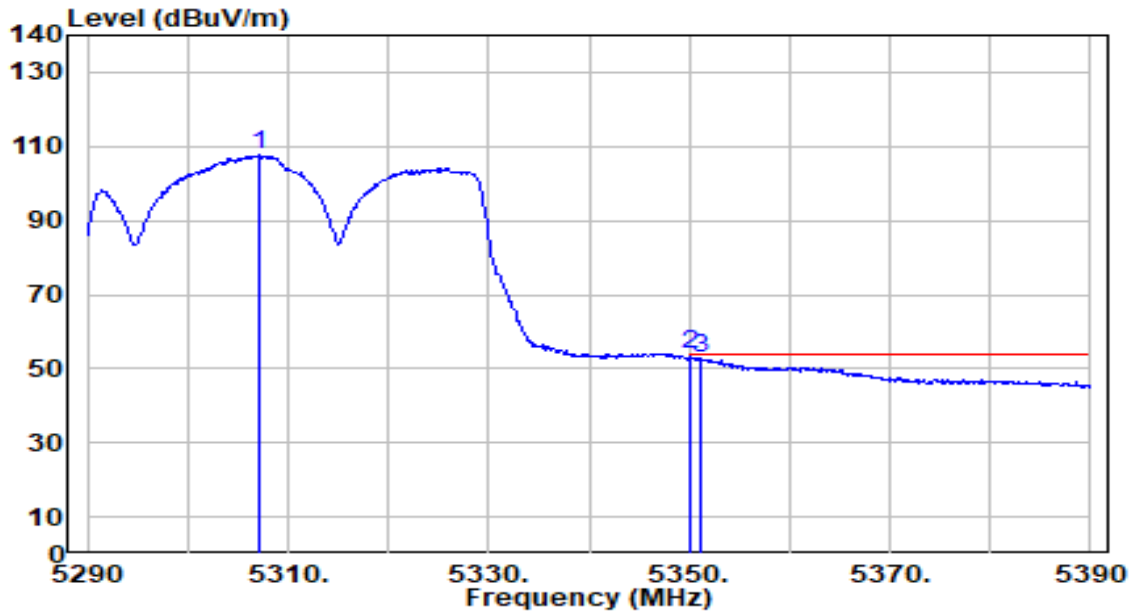


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5307.200	107.19	0.54	107.73	N/A	N/A	183	173	Average
2	*	5350.000	53.24	0.47	53.71	-0.29	54.00	183	173	Average
3		5351.100	52.18	0.47	52.65	-1.35	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

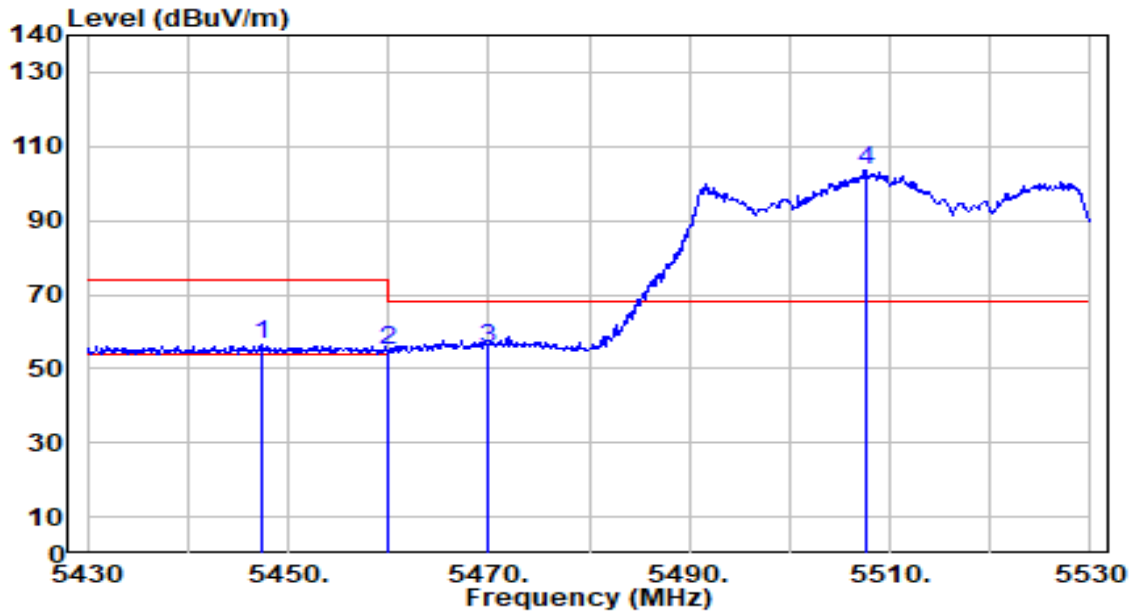


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5447.400	55.86	0.61	56.47	-17.53	74.00	300	98	Peak
2		5460.000	54.30	0.66	54.96	-19.04	74.00	300	98	Peak
3	*	5470.000	54.98	0.71	55.68	-12.52	68.20	300	98	Peak
4		5507.600	102.46	0.88	103.34	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

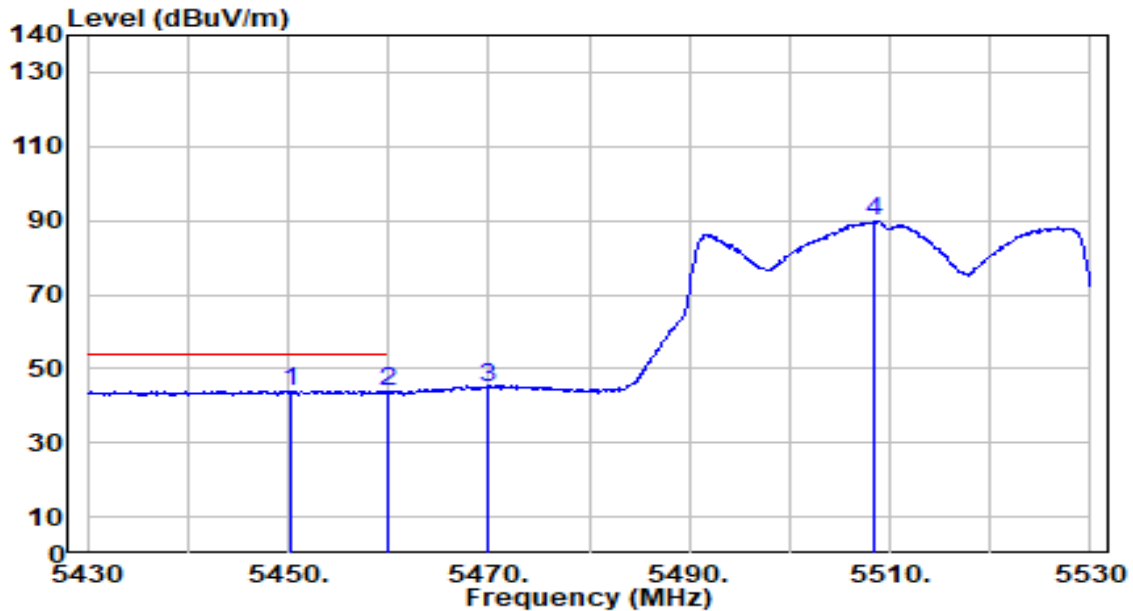


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.300	43.47	0.62	44.09	-9.91	54.00	300	98	Average
2		5460.000	42.93	0.66	43.59	-10.41	54.00	300	98	Average
3		5470.000	44.03	0.71	44.73	N/A	N/A	300	98	Average
4		5508.500	88.91	0.88	89.79	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

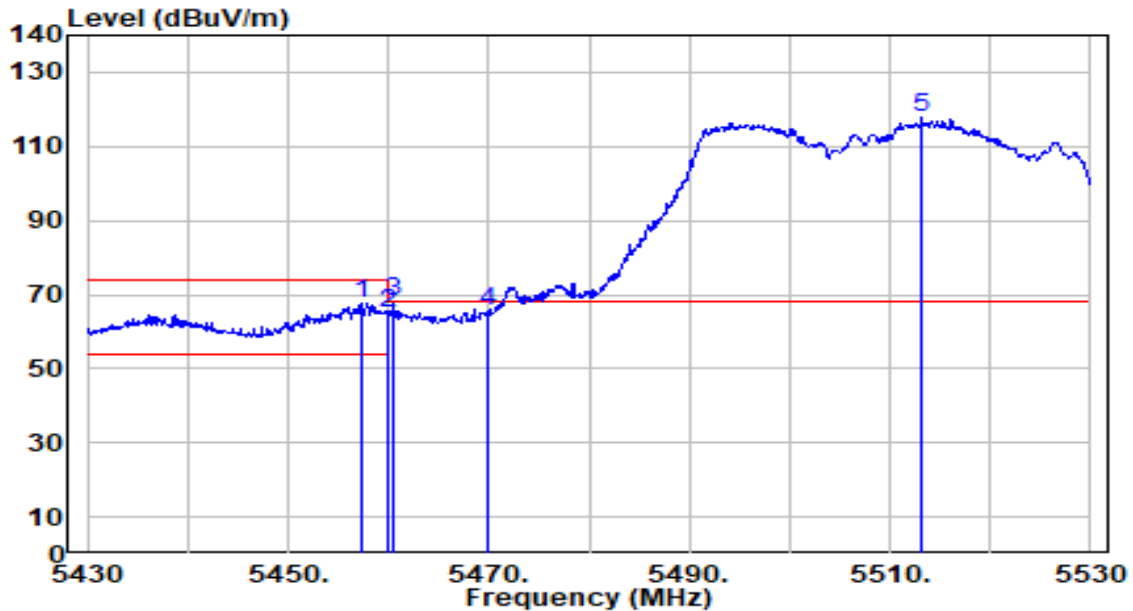


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.300	66.95	0.65	67.60	-6.40	74.00	213	148	Peak
2	5460.000	64.38	0.66	65.05	-8.95	74.00	213	148	Peak
3	* 5460.500	67.31	0.66	67.97	-0.23	68.20	213	148	Peak
4	5470.000	64.96	0.71	65.66	-2.54	68.20	213	148	Peak
5	5513.200	116.71	0.90	117.61	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

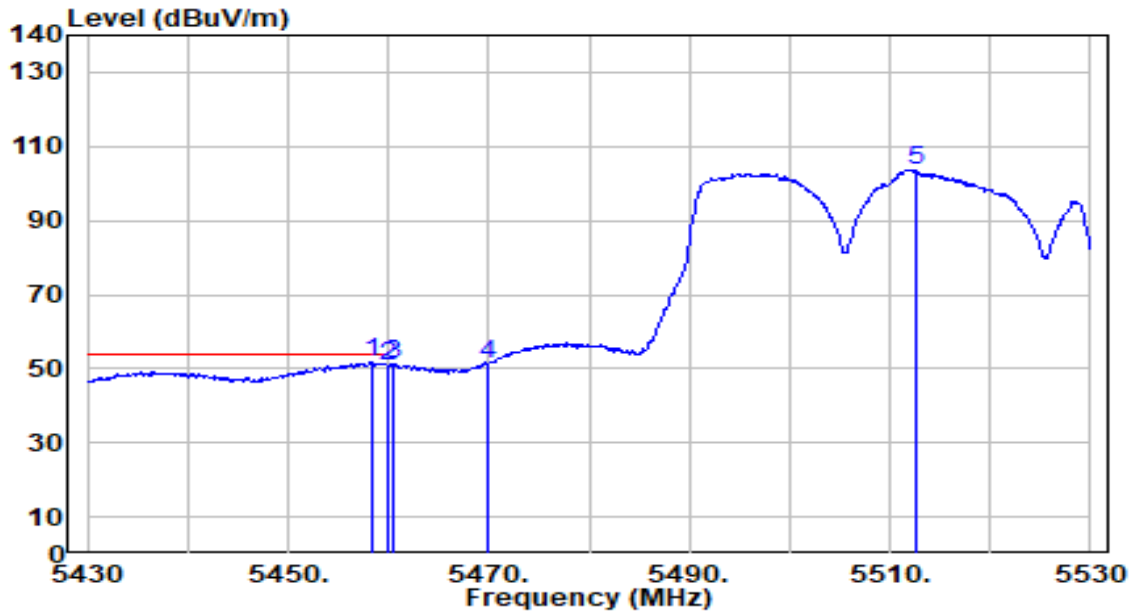


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.400	50.94	0.65	51.59	-2.41	54.00	213	148	Average
2		5460.000	50.16	0.66	50.82	-3.18	54.00	213	148	Average
3		5460.500	50.49	0.66	51.15	N/A	N/A	213	148	Average
4		5470.000	50.60	0.71	51.30	N/A	N/A	213	148	Average
5		5512.600	102.79	0.90	103.69	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

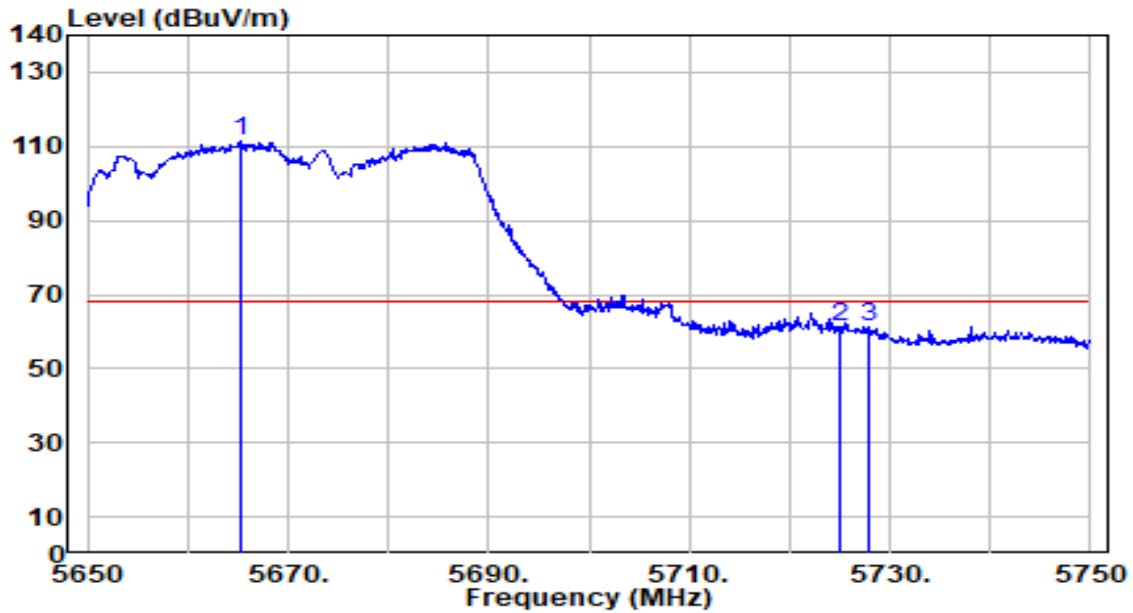


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.200	109.94	1.61	111.55	N/A	N/A	200	105	Peak
2	5725.000	59.15	1.89	61.05	-7.15	68.20	200	105	Peak
3	* 5728.000	59.58	1.91	61.49	-6.71	68.20	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

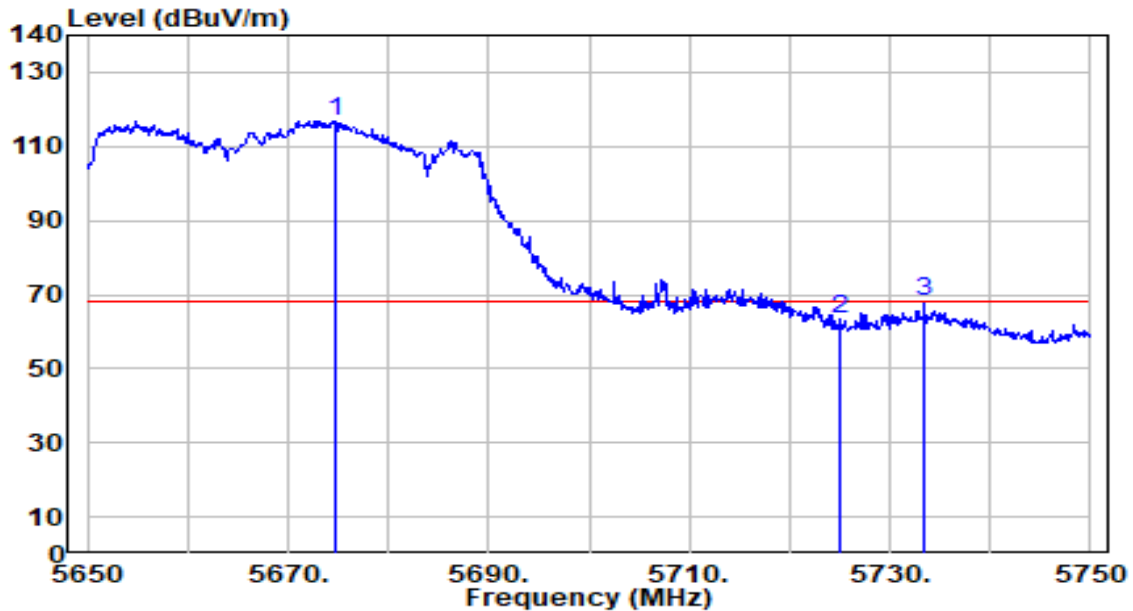


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.700	115.28	1.66	116.93	N/A	N/A	204	195	Peak
2	5725.000	61.54	1.89	63.43	-4.77	68.20	204	195	Peak
3	* 5733.400	66.04	1.93	67.97	-0.23	68.20	204	195	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

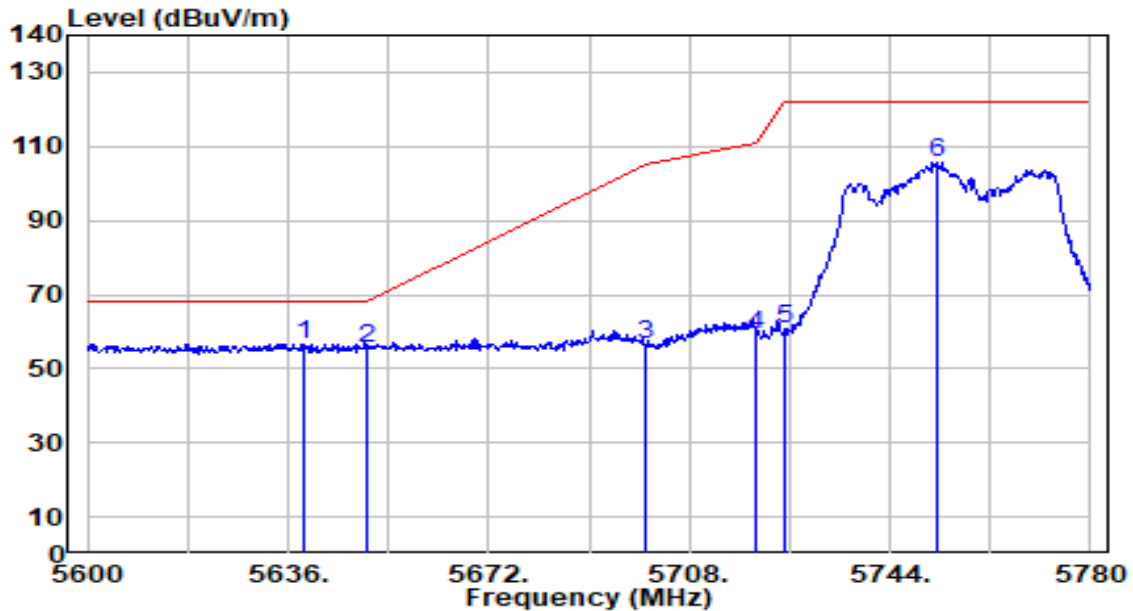


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.700	55.17	1.49	56.66	-11.54	68.20	207	99	Peak
2		5650.000	53.83	1.54	55.38	-12.82	68.20	207	99	Peak
3		5700.000	54.72	1.78	56.49	-48.71	105.20	207	99	Peak
4		5720.000	57.06	1.87	58.93	-51.87	110.80	207	99	Peak
5		5725.000	58.65	1.89	60.54	-61.66	122.20	207	99	Peak
6		5752.280	103.45	2.02	105.47	N/A	N/A	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	By PoE

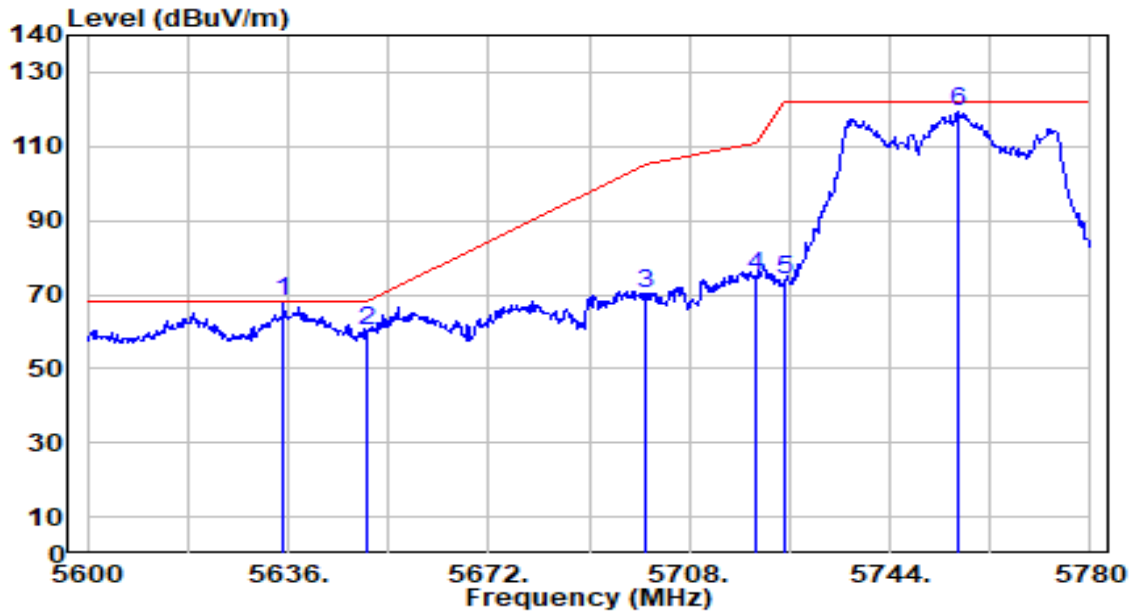


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.280	66.44	1.47	67.91	-0.29	68.20	202	188	Peak
2		5650.000	58.42	1.54	59.96	-8.24	68.20	202	188	Peak
3		5700.000	68.42	1.78	70.19	-35.01	105.20	202	188	Peak
4		5720.000	73.29	1.87	75.16	-35.64	110.80	202	188	Peak
5		5725.000	71.90	1.89	73.80	-48.40	122.20	202	188	Peak
6		5756.060	117.21	2.04	119.25	N/A	N/A	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

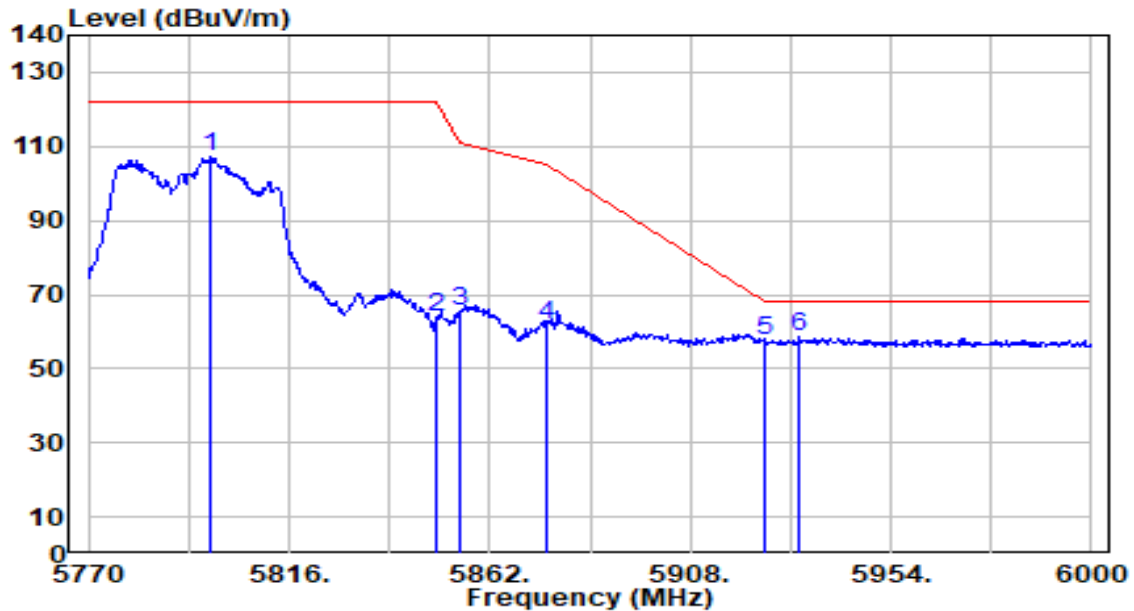


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5798.060	105.01	2.23	107.24	N/A	N/A	285	222	Peak
2	5850.000	61.71	2.25	63.96	-58.24	122.20	285	222	Peak
3	5855.000	63.14	2.25	65.39	-45.41	110.80	285	222	Peak
4	5875.000	59.67	2.26	61.93	-43.27	105.20	285	222	Peak
5	5925.000	55.43	2.27	57.69	-10.51	68.20	285	222	Peak
6	* 5932.840	56.15	2.27	58.42	-9.78	68.20	285	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	By PoE

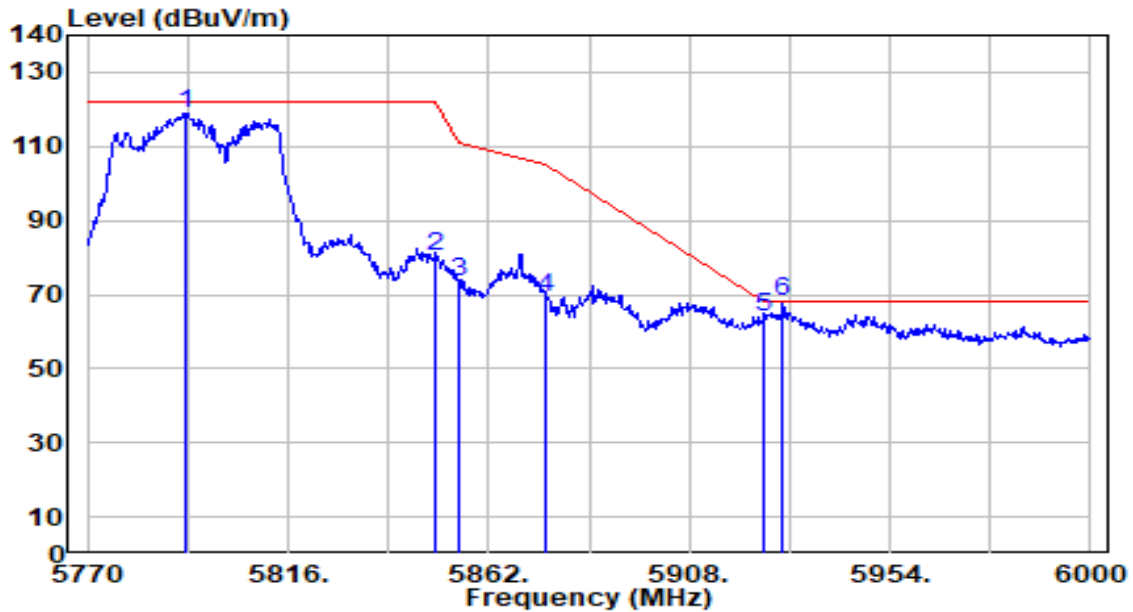


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.770	116.48	2.21	118.69	N/A	N/A	185	176	Peak
2	5850.000	78.29	2.25	80.55	-41.65	122.20	185	176	Peak
3	5855.000	71.30	2.25	73.55	-37.25	110.80	185	176	Peak
4	5875.000	66.89	2.26	69.15	-36.05	105.20	185	176	Peak
5	5925.000	61.75	2.27	64.02	-4.18	68.20	185	176	Peak
6	* 5929.390	65.73	2.27	68.00	-0.20	68.20	185	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

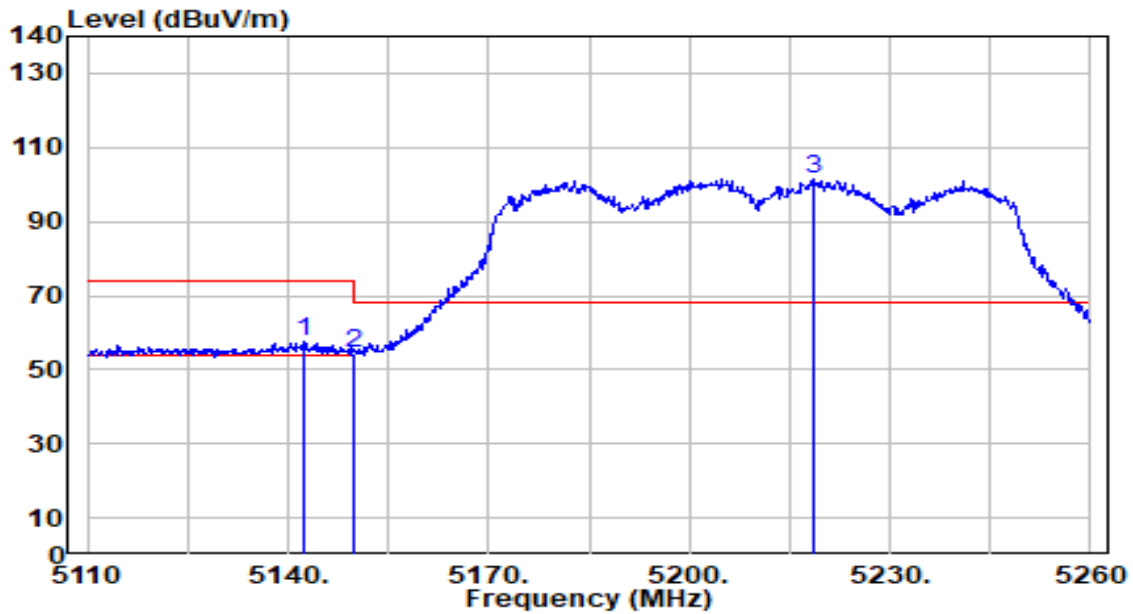


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.550	56.98	0.65	57.63	-16.37	74.00	100	133	Peak
2		5150.000	53.95	0.65	54.61	-19.39	74.00	100	133	Peak
3		5218.600	100.68	0.67	101.35	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

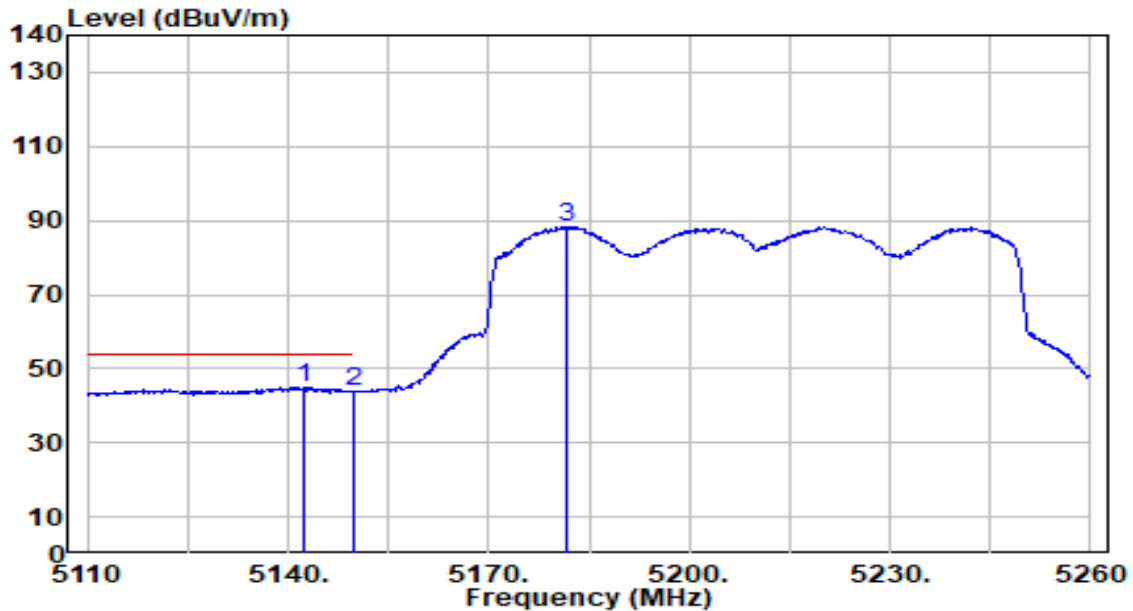


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.550	44.28	0.65	44.93	-9.07	54.00	100	133	Average
2		5150.000	43.30	0.65	43.95	-10.05	54.00	100	133	Average
3		5181.550	87.51	0.68	88.19	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

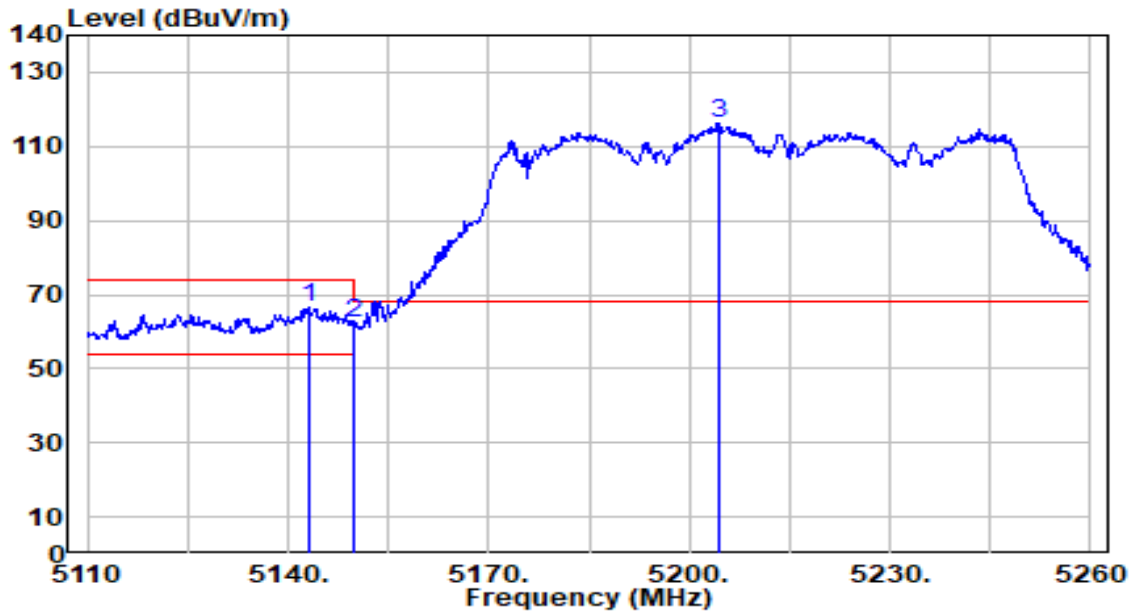


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.150	66.09	0.65	66.74	-7.26	74.00	219	172	Peak
2		5150.000	61.66	0.65	62.31	-11.69	74.00	219	172	Peak
3		5204.350	115.37	0.70	116.06	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

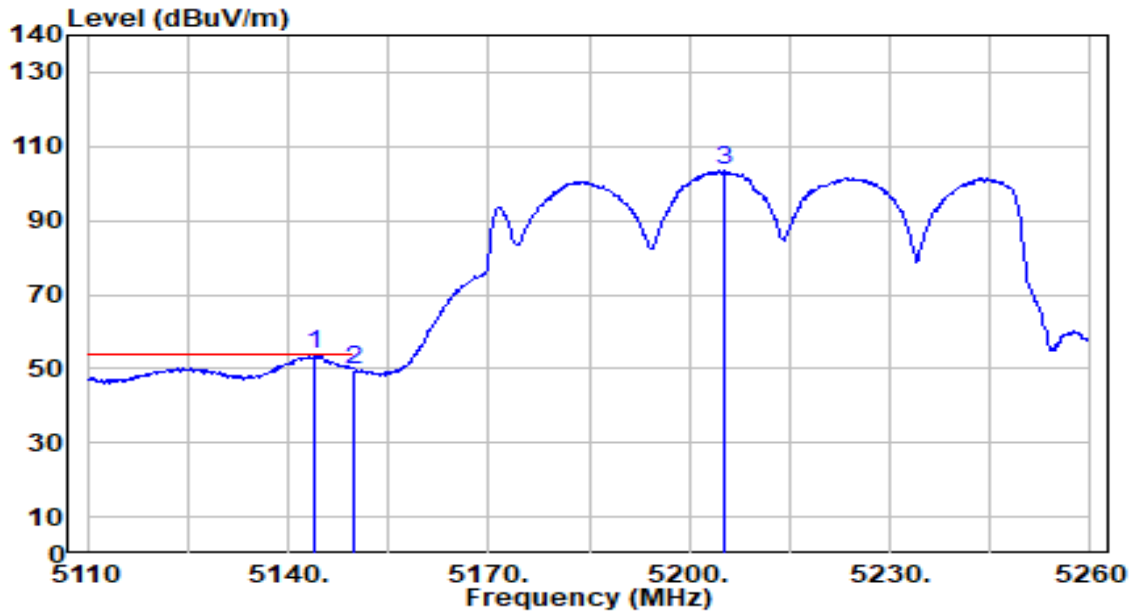


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.050	53.11	0.65	53.76	-0.24	54.00	219	172	Average
2		5150.000	49.17	0.65	49.82	-4.18	54.00	219	172	Average
3		5205.250	102.76	0.69	103.46	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

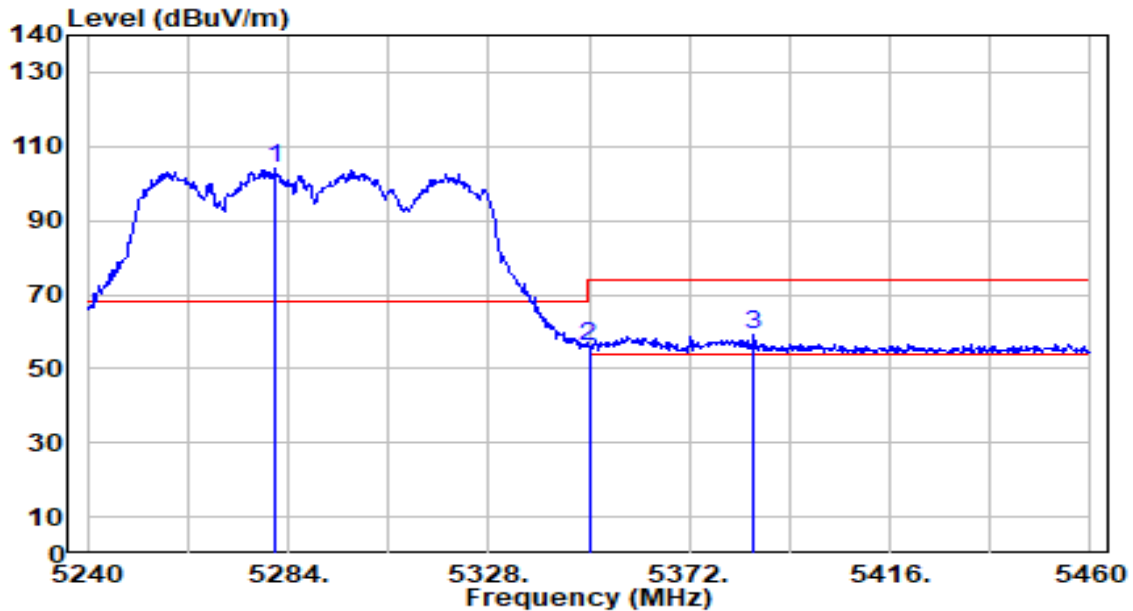


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5281.140	103.49	0.58	104.07	N/A	N/A	169	138	Peak
2	5350.000	55.76	0.47	56.23	-17.77	74.00	169	138	Peak
3	* 5386.300	58.50	0.42	58.92	-15.08	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

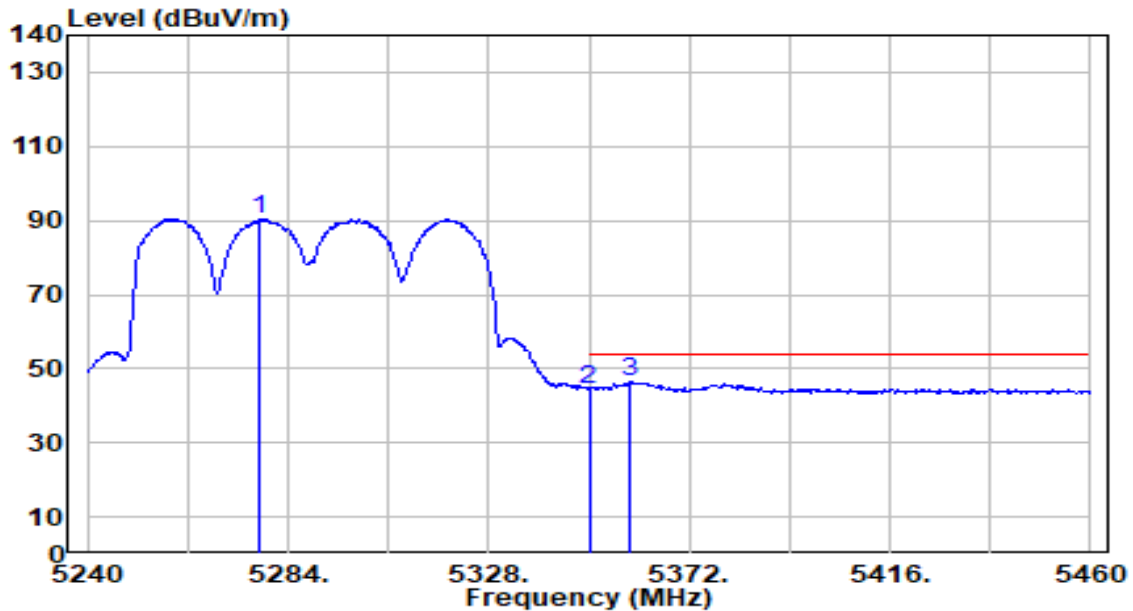


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5277.620	89.97	0.58	90.55	N/A	N/A	169	138	Average
2	5350.000	44.02	0.47	44.49	-9.51	54.00	169	138	Average
3	* 5359.020	45.82	0.46	46.27	-7.73	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

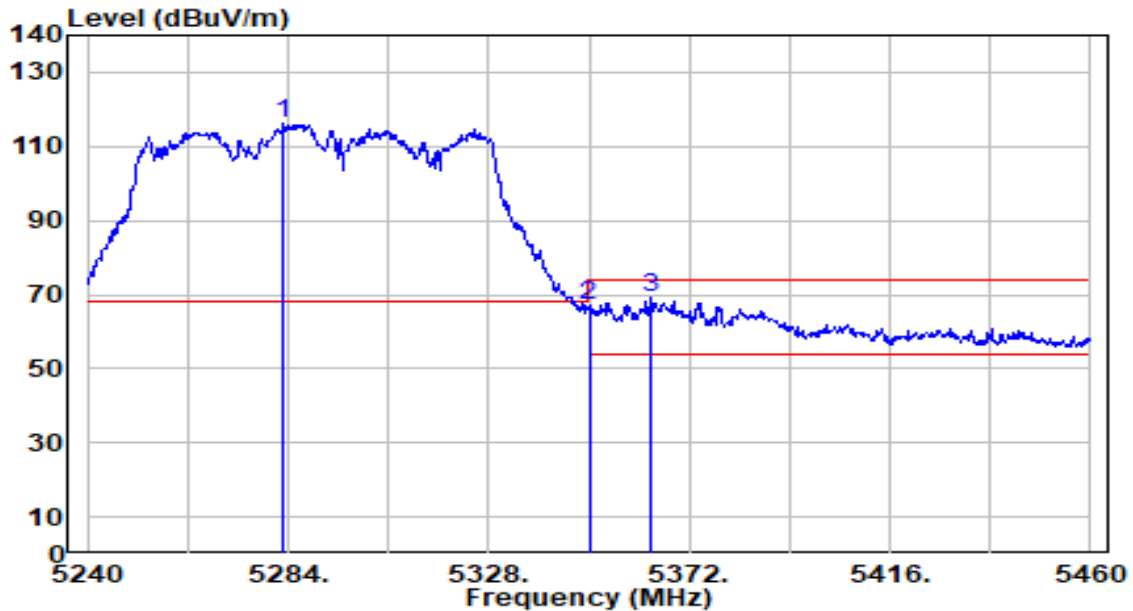


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5282.900	115.81	0.57	116.39	N/A	N/A	183	173	Peak
2	5350.000	66.49	0.47	66.97	-7.03	74.00	183	173	Peak
3	* 5363.420	68.80	0.45	69.25	-4.75	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

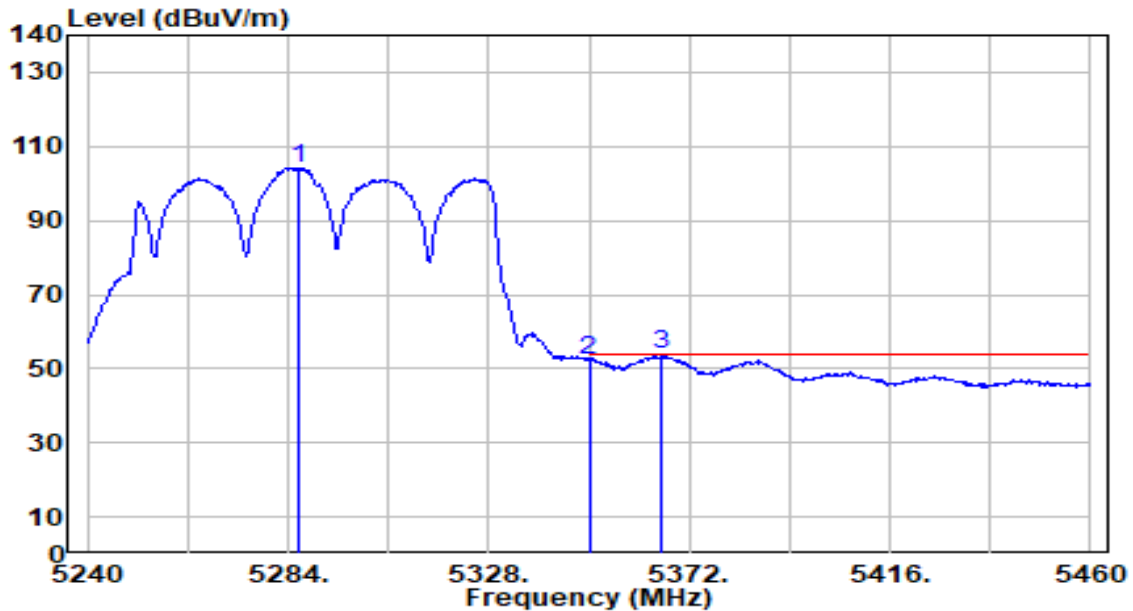


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.420	103.74	0.57	104.31	N/A	N/A	183	173	Average
2	5350.000	52.03	0.47	52.50	-1.50	54.00	183	173	Average
3	* 5365.620	53.33	0.45	53.78	-0.22	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

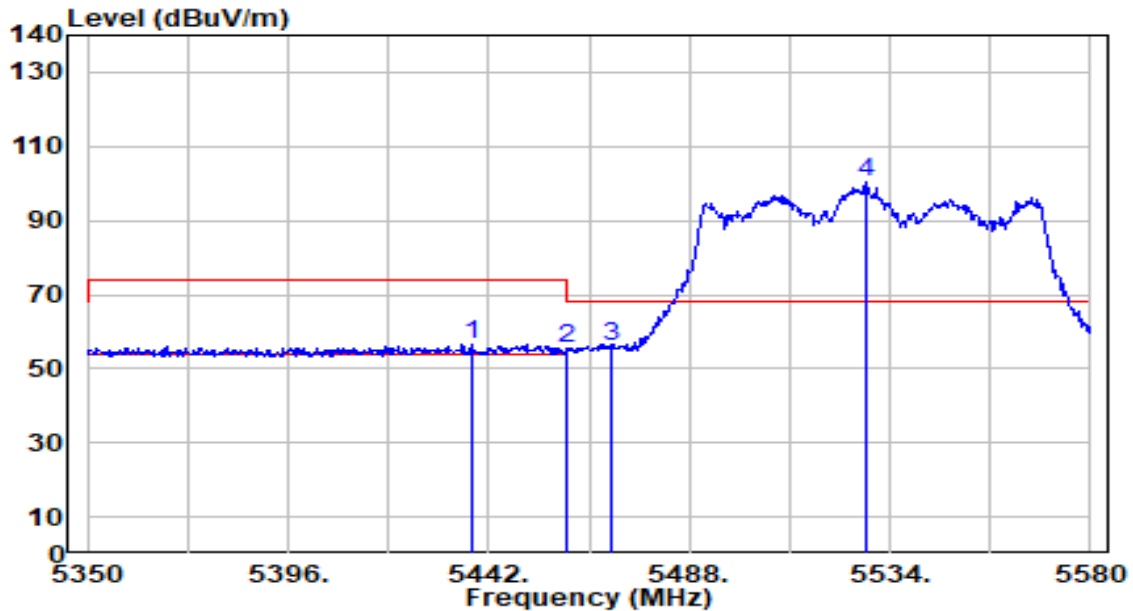


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5438.090	55.94	0.56	56.51	-17.49	74.00	300	98	Peak
2	5460.000	54.68	0.66	55.34	-18.66	74.00	300	98	Peak
3	* 5470.000	55.16	0.71	55.87	-12.33	68.20	300	98	Peak
4	5528.710	99.25	0.97	100.23	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

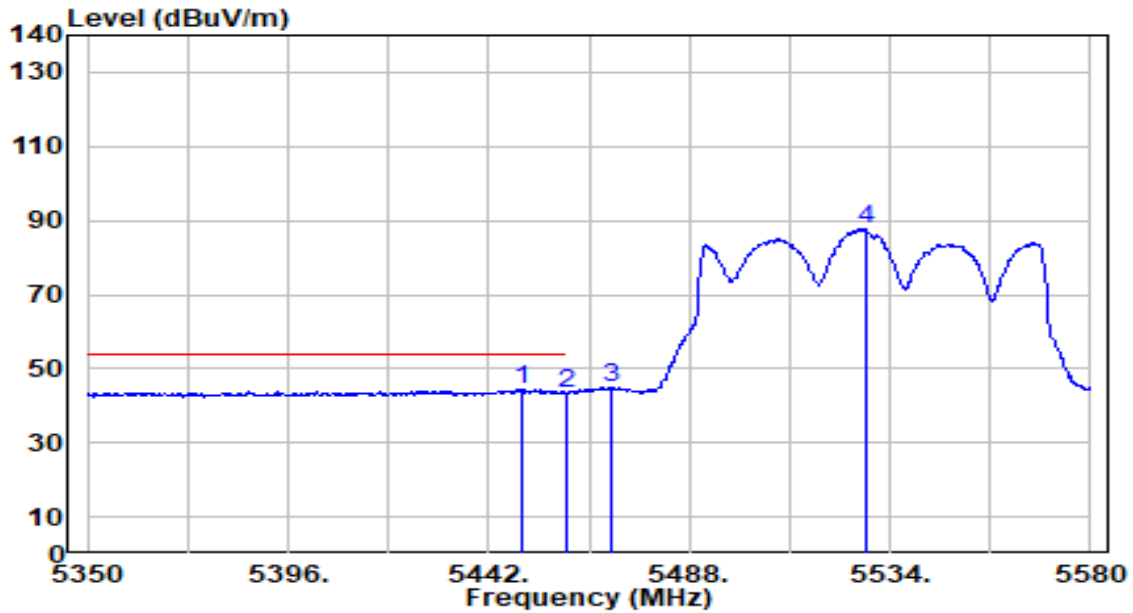


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.590	43.64	0.62	44.26	-9.74	54.00	300	98	Average
2		5460.000	42.75	0.66	43.41	-10.59	54.00	300	98	Average
3		5470.000	44.14	0.71	44.84	N/A	N/A	300	98	Average
4		5528.710	86.63	0.97	87.60	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

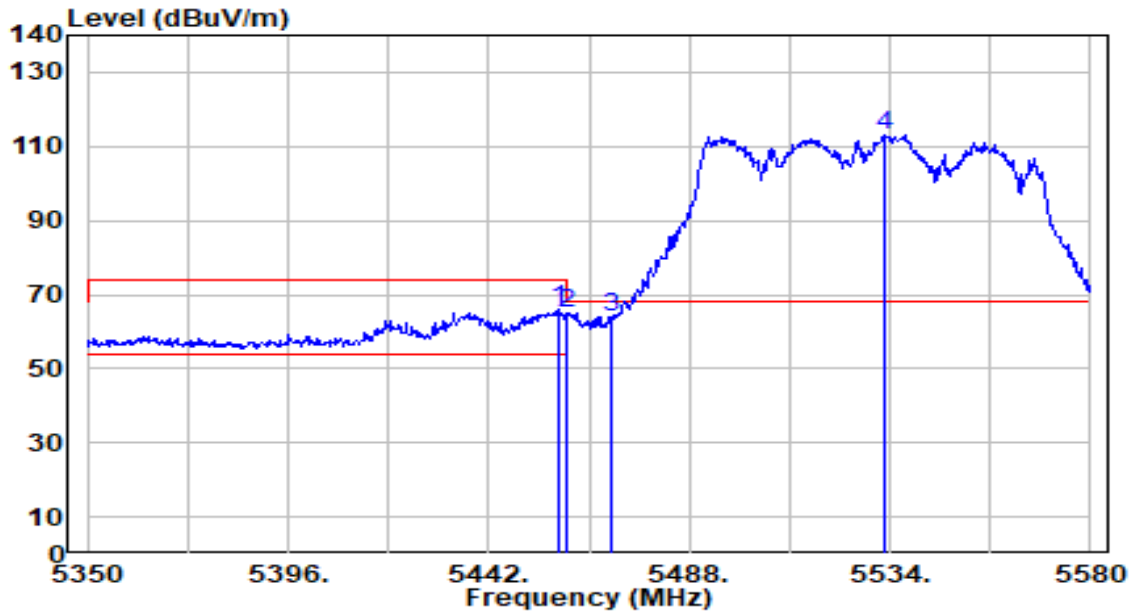


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.330	65.23	0.65	65.88	-8.12	74.00	213	148	Peak
2		5460.000	64.51	0.66	65.17	-8.83	74.00	213	148	Peak
3	*	5470.000	63.15	0.71	63.85	-4.35	68.20	213	148	Peak
4		5532.620	112.22	0.99	113.21	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

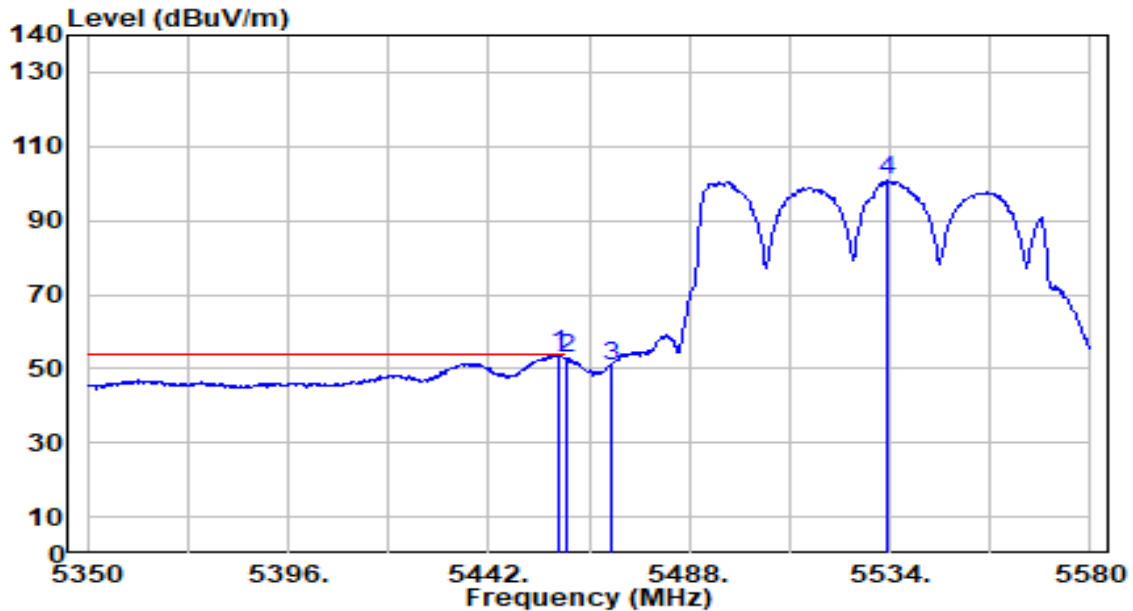


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.870	53.14	0.65	53.79	-0.21	54.00	213	148	Average
2		5460.000	52.31	0.66	52.98	-1.02	54.00	213	148	Average
3		5470.000	50.12	0.71	50.83	N/A	N/A	213	148	Average
4		5533.540	99.73	1.00	100.73	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

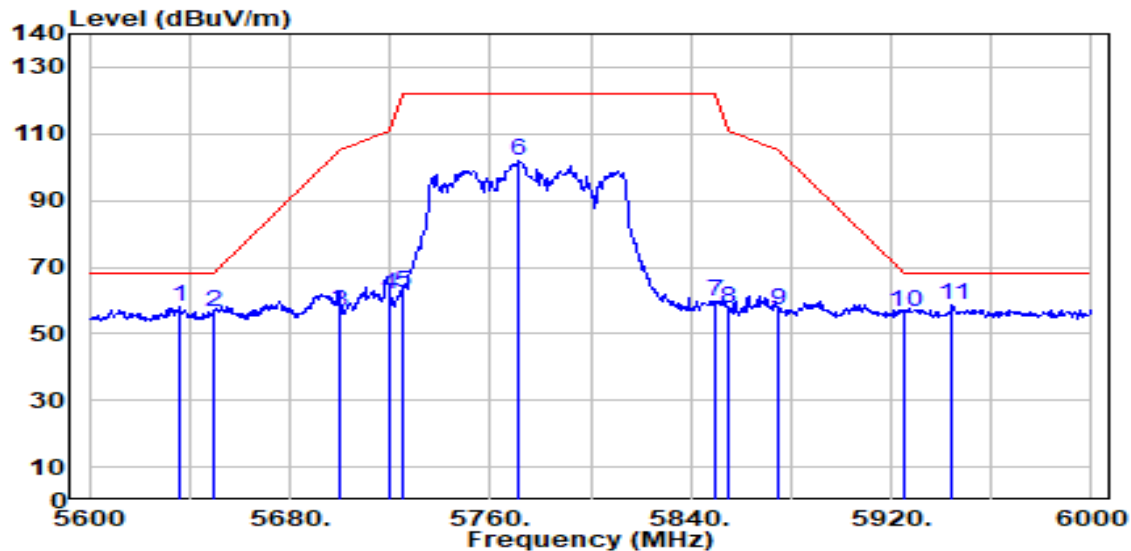


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5635.600	56.54	1.47	58.02	-10.18	68.20	207	99	Peak
2	5650.000	55.07	1.54	56.61	-11.59	68.20	207	99	Peak
3	5700.000	54.98	1.78	56.76	-48.44	105.20	207	99	Peak
4	5720.000	59.83	1.87	61.70	-49.10	110.80	207	99	Peak
5	5725.000	60.70	1.89	62.59	-59.61	122.20	207	99	Peak
6	5771.200	100.07	2.11	102.18	N/A	N/A	207	99	Peak
7	5850.000	57.31	2.25	59.56	-62.64	122.20	207	99	Peak
8	5855.000	55.20	2.25	57.46	-53.34	110.80	207	99	Peak
9	5875.000	55.06	2.26	57.32	-47.88	105.20	207	99	Peak
10	5925.000	54.29	2.27	56.55	-11.65	68.20	207	99	Peak
11 *	5944.400	56.11	2.27	58.38	-9.82	68.20	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

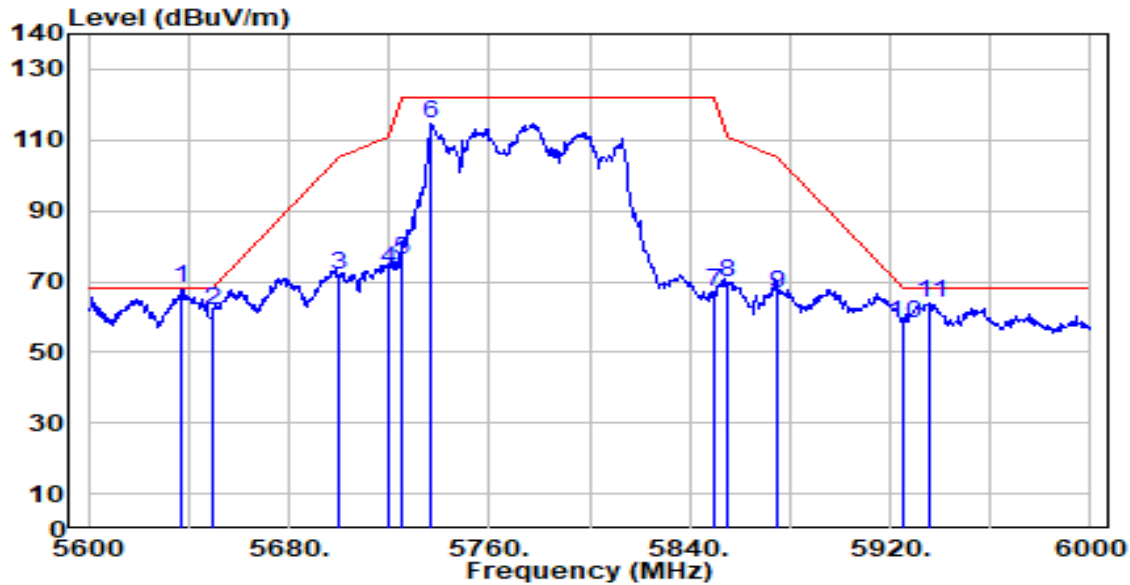


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.200	66.43	1.48	67.91	-0.29	68.20	202	188	Peak
2		5650.000	60.34	1.54	61.88	-6.32	68.20	202	188	Peak
3		5700.000	70.03	1.78	71.81	-33.39	105.20	202	188	Peak
4		5720.000	71.52	1.87	73.39	-37.41	110.80	202	188	Peak
5		5725.000	74.20	1.89	76.10	-46.10	122.20	202	188	Peak
6		5736.800	112.76	1.95	114.71	N/A	N/A	202	188	Peak
7		5850.000	64.91	2.25	67.16	-55.04	122.20	202	188	Peak
8		5855.000	67.36	2.25	69.62	-41.18	110.80	202	188	Peak
9		5875.000	64.28	2.26	66.53	-38.67	105.20	202	188	Peak
10		5925.000	56.09	2.27	58.36	-9.84	68.20	202	188	Peak
11		5936.000	61.57	2.27	63.84	-4.36	68.20	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

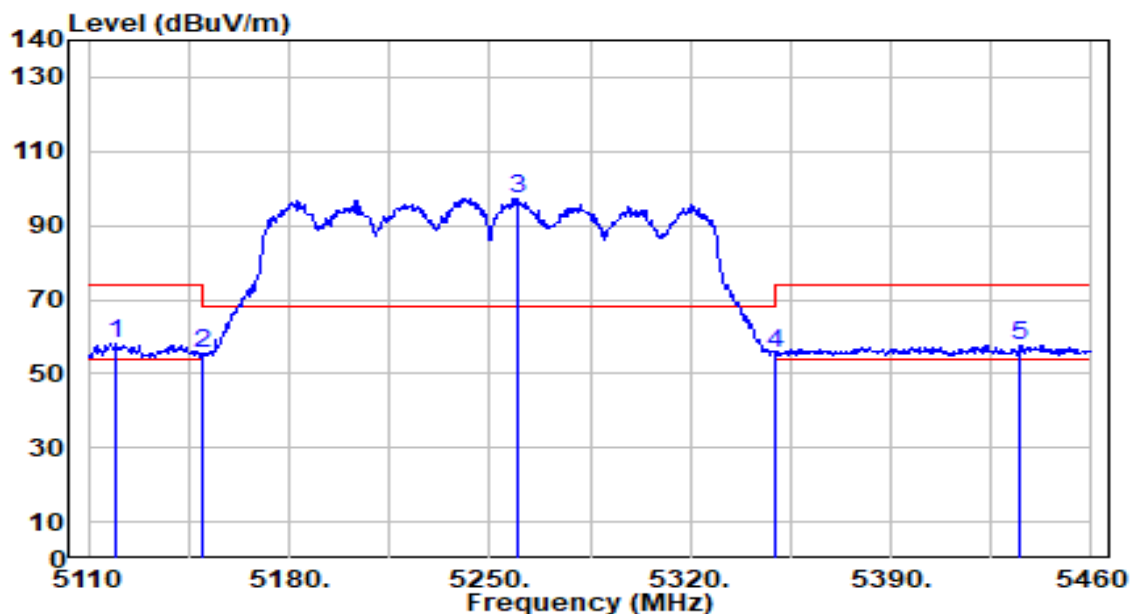


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5119.100	57.49	0.62	58.11	-15.89	74.00	100	133	Peak
2		5150.000	54.62	0.65	55.27	-18.73	74.00	100	133	Peak
3		5260.150	96.66	0.61	97.27	N/A	N/A	100	133	Peak
4		5350.000	55.15	0.47	55.62	-18.38	74.00	100	133	Peak
5		5435.150	57.13	0.55	57.68	-16.32	74.00	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

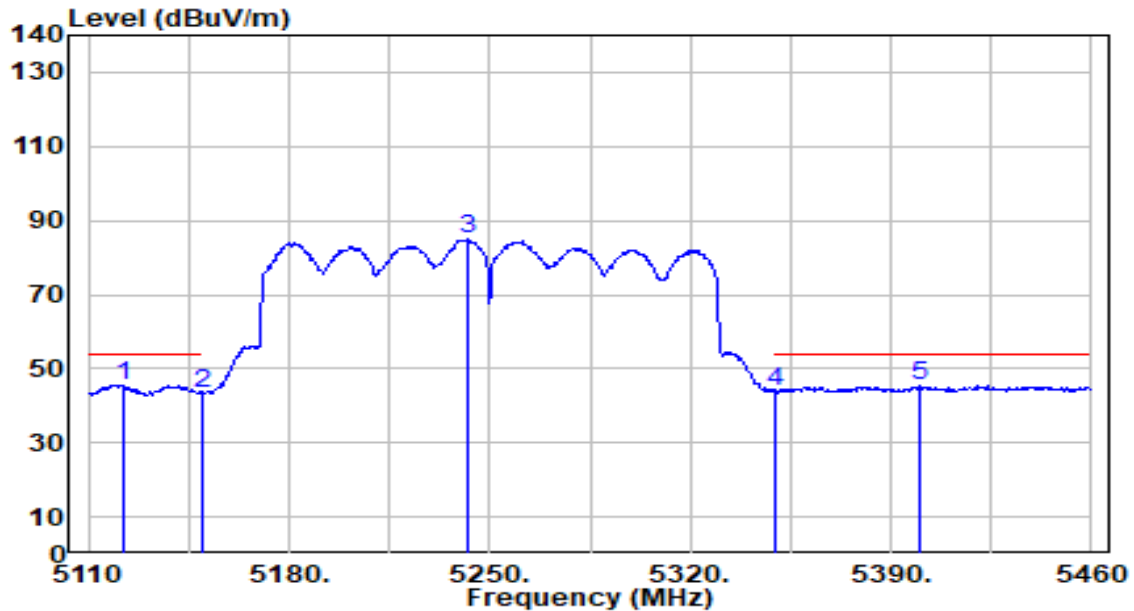


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5122.250	44.72	0.63	45.35	-8.65	54.00	100	133	Average
2		5150.000	42.65	0.65	43.31	-10.69	54.00	100	133	Average
3		5242.300	84.29	0.64	84.93	N/A	N/A	100	133	Average
4		5350.000	43.63	0.47	44.10	-9.90	54.00	100	133	Average
5		5400.150	44.91	0.39	45.30	-8.70	54.00	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

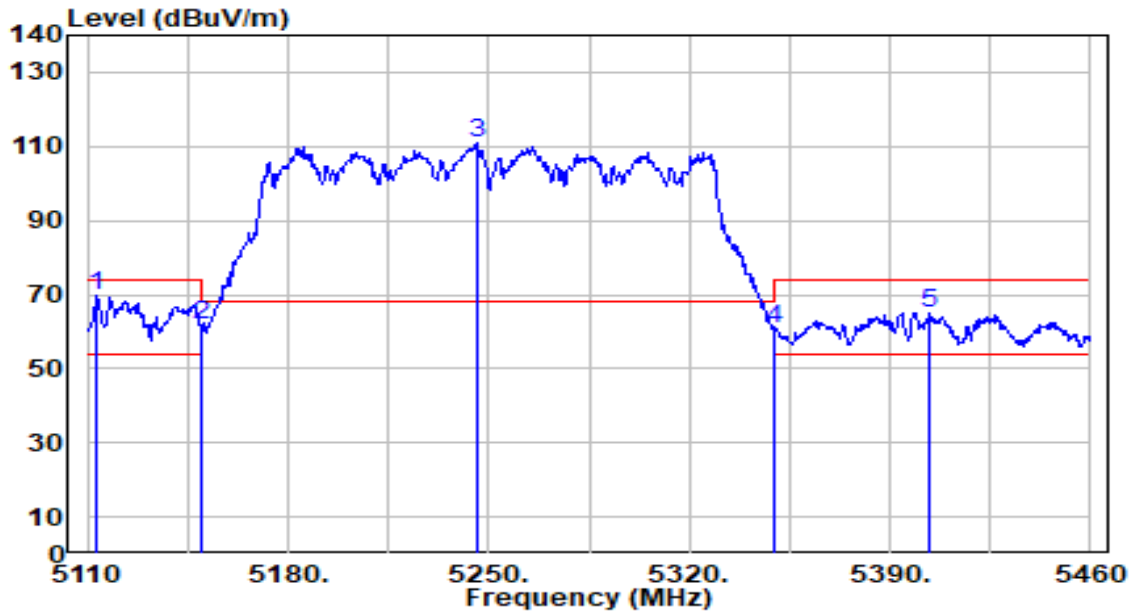


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5113.500	68.94	0.62	69.55	-4.45	74.00	219	172	Peak
2		5150.000	61.16	0.65	61.81	-12.19	74.00	219	172	Peak
3		5246.150	110.07	0.63	110.70	N/A	N/A	219	172	Peak
4		5350.000	60.14	0.47	60.61	-13.39	74.00	219	172	Peak
5		5404.000	64.80	0.41	65.21	-8.79	74.00	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

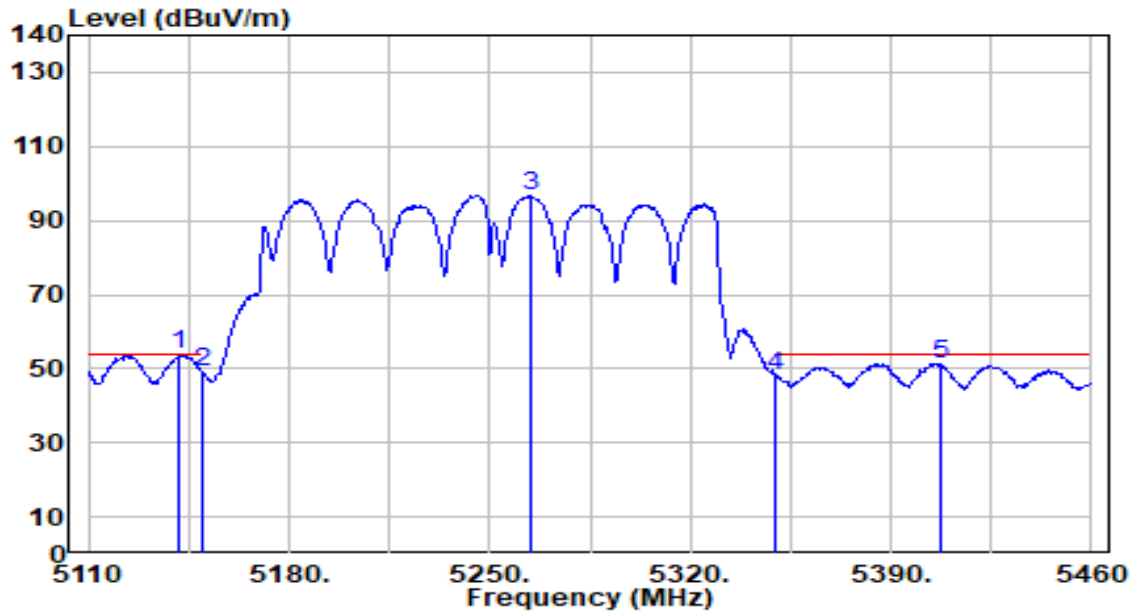


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.850	53.15	0.65	53.80	-0.20	54.00	219	172	Average
2		5150.000	48.22	0.65	48.88	-5.12	54.00	219	172	Average
3		5264.700	96.18	0.60	96.78	N/A	N/A	219	172	Average
4		5350.000	47.78	0.47	48.25	-5.75	54.00	219	172	Average
5		5407.150	50.88	0.43	51.31	-2.69	54.00	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 155_ANT 0+1	Test Voltage	By PoE

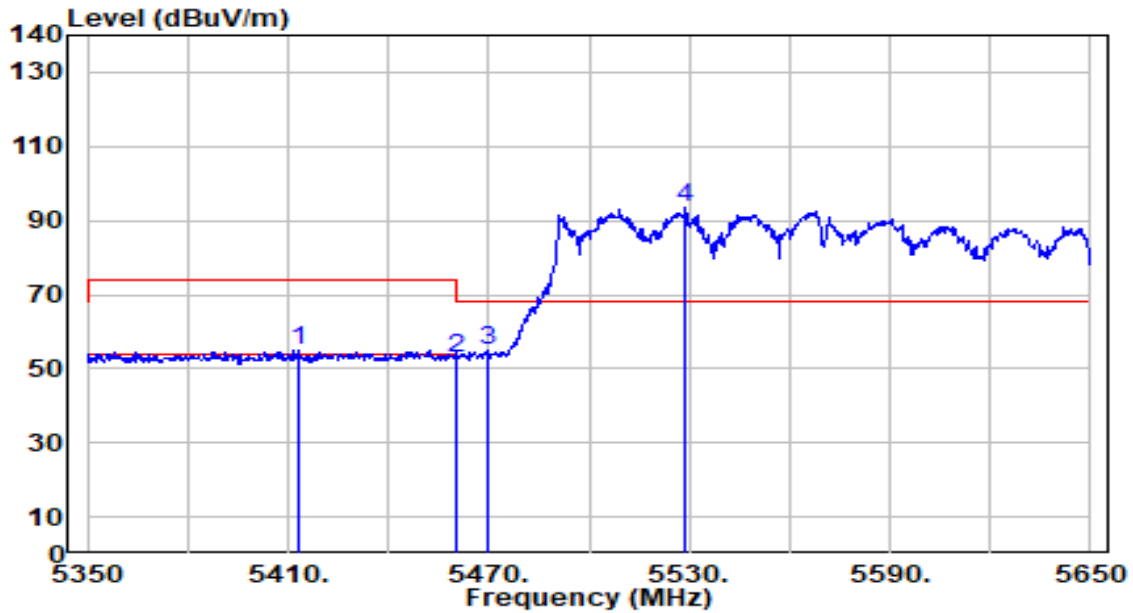


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5413.300	54.53	0.45	54.99	-19.01	74.00	300	98	Peak
2	5460.000	51.97	0.66	52.63	-21.37	74.00	300	98	Peak
3	* 5470.000	54.39	0.71	55.10	-13.10	68.20	300	98	Peak
4	5528.800	92.27	0.97	93.25	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 155_ANT 0+1	Test Voltage	By PoE

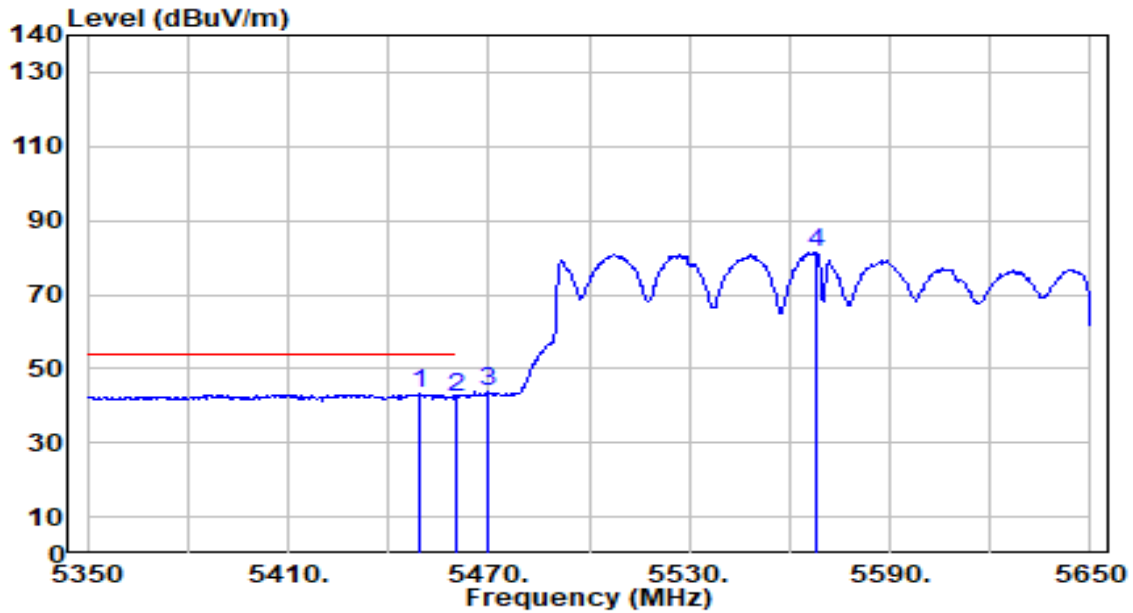


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.300	42.48	0.61	43.09	-10.91	54.00	300	98	Average
2		5460.000	41.50	0.66	42.17	-11.83	54.00	300	98	Average
3		5470.000	42.94	0.71	43.64	N/A	N/A	300	98	Average
4		5567.800	80.14	1.16	81.29	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 155_ANT 0+1	Test Voltage	By PoE

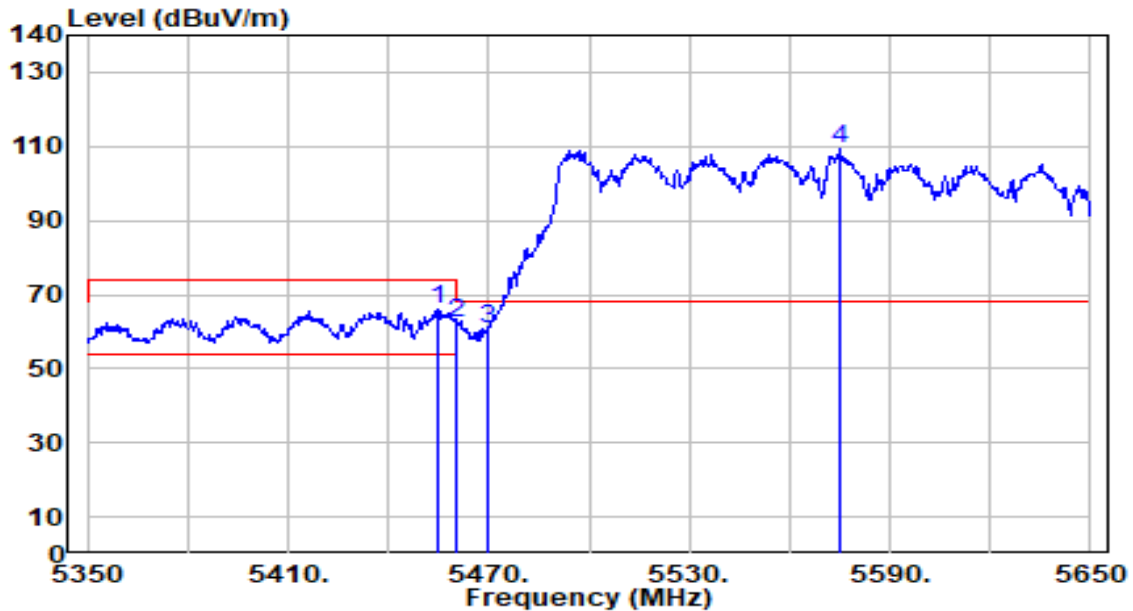


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.700	65.62	0.64	66.26	-7.74	74.00	213	148	Peak
2	5460.000	61.77	0.66	62.44	-11.56	74.00	213	148	Peak
3	* 5470.000	60.31	0.71	61.01	-7.19	68.20	213	148	Peak
4	5575.300	108.16	1.19	109.35	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 155_ANT 0+1	Test Voltage	By PoE

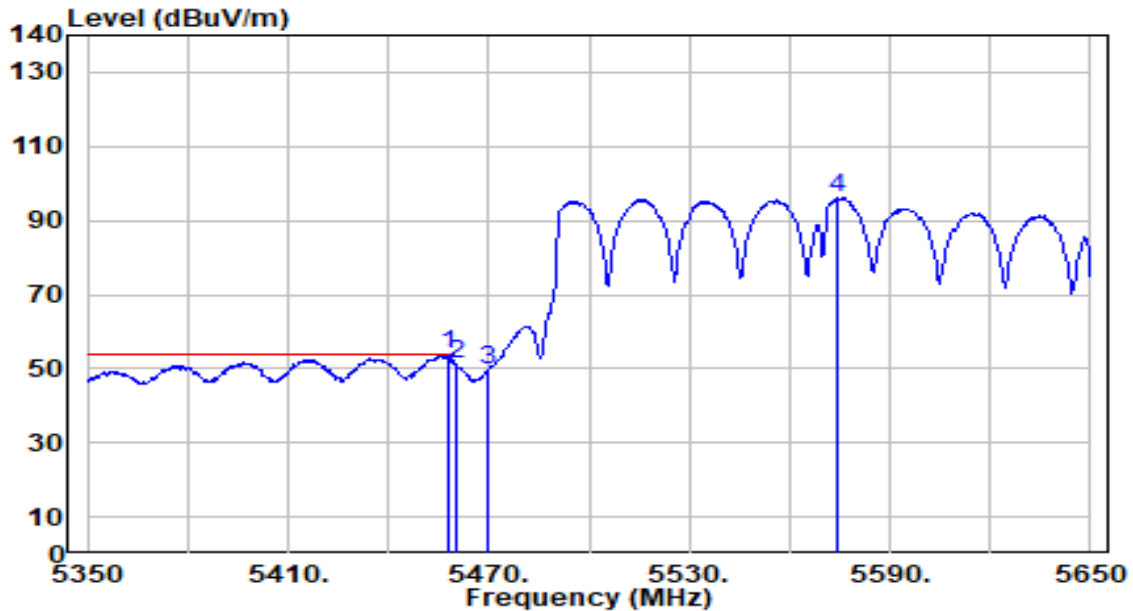


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.700	53.12	0.65	53.77	-0.23	54.00	213	148	Average
2		5460.000	50.43	0.66	51.09	-2.91	54.00	213	148	Average
3		5470.000	48.89	0.71	49.60	N/A	N/A	213	148	Average
4		5574.400	94.80	1.19	95.99	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

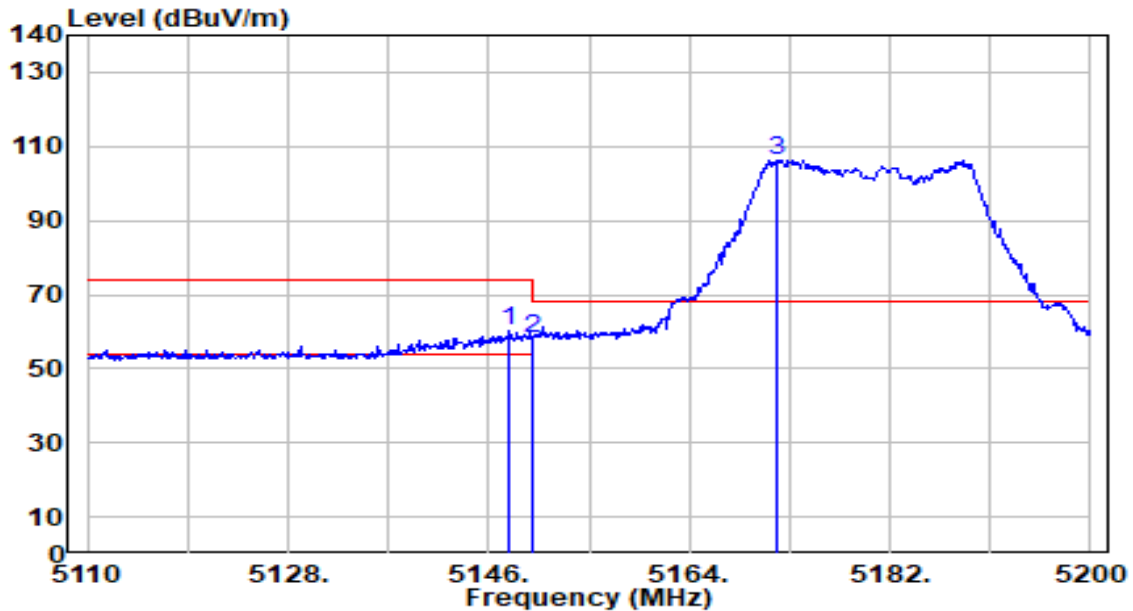


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	59.36	0.65	60.01	-13.99	74.00	100	133	Peak
2		5150.000	57.66	0.65	58.31	-15.69	74.00	100	133	Peak
3		5171.920	105.75	0.68	106.43	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

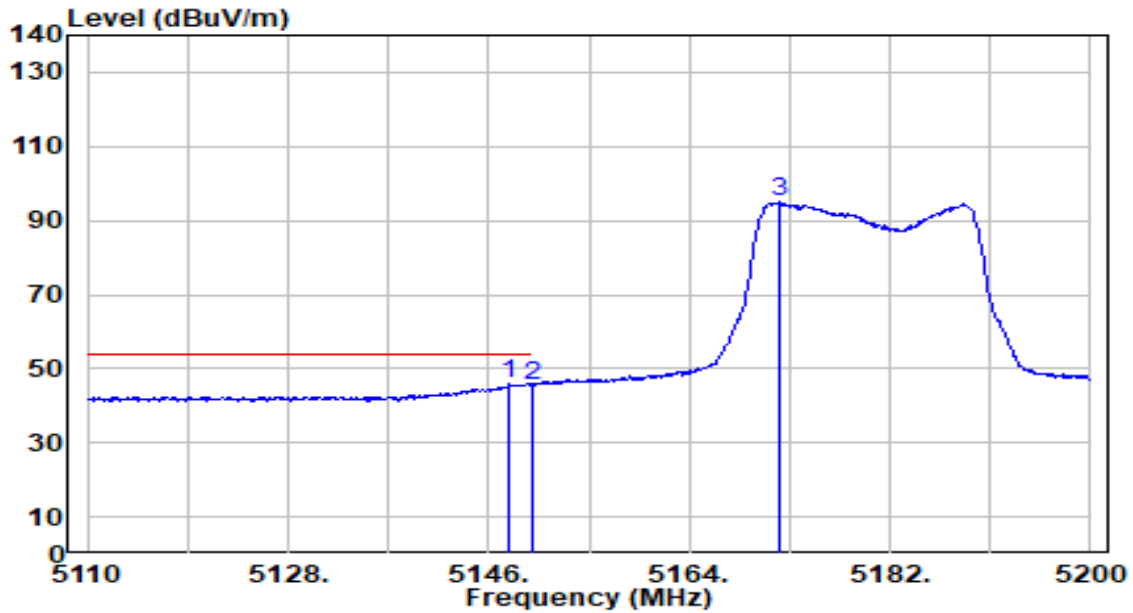


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.890	45.38	0.65	46.03	-7.97	54.00	100	133	Average
2		5150.000	44.90	0.65	45.56	-8.44	54.00	100	133	Average
3		5172.100	94.33	0.68	95.00	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

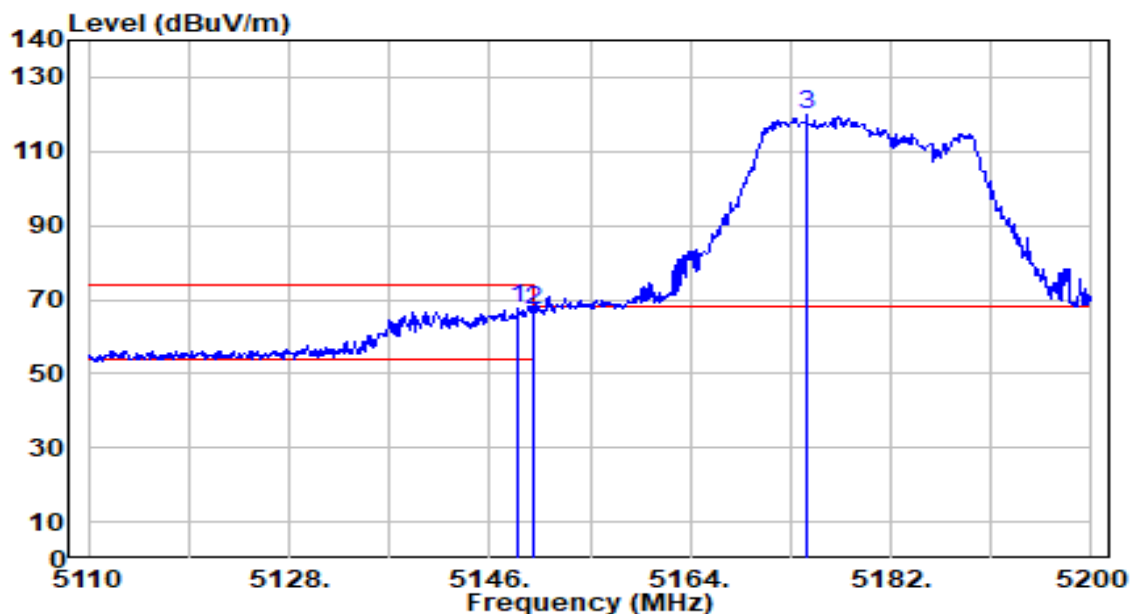


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	66.83	0.65	67.48	-6.52	74.00	219	172	Peak
2		5150.000	66.26	0.65	66.91	-7.09	74.00	219	172	Peak
3		5174.440	119.14	0.68	119.81	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

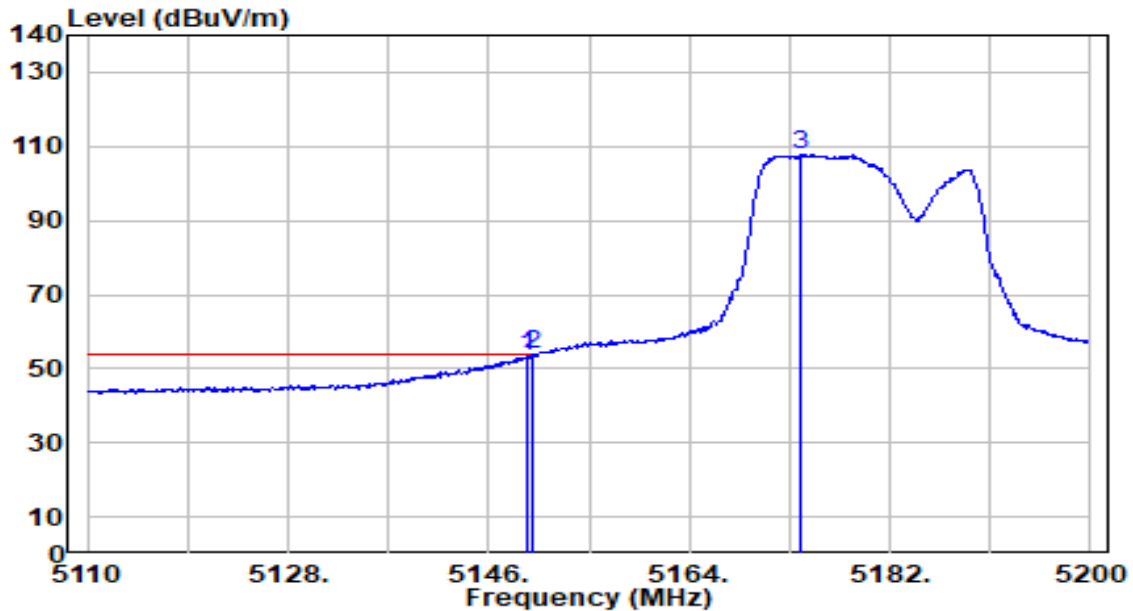


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	52.48	0.65	53.13	-0.87	54.00	219	172	Average
2	*	5150.000	53.15	0.65	53.80	-0.20	54.00	219	172	Average
3		5174.080	107.18	0.68	107.86	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

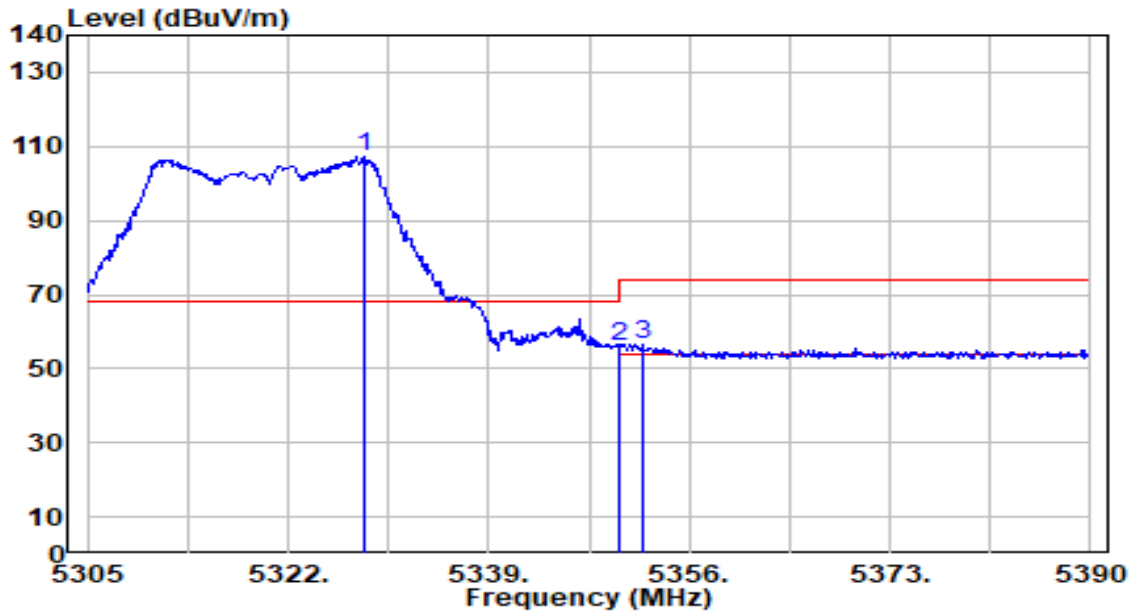


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.375	106.55	0.50	107.05	N/A	N/A	169	138	Peak
2	5350.000	55.55	0.47	56.02	-17.98	74.00	169	138	Peak
3	* 5352.090	56.24	0.47	56.70	-17.30	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

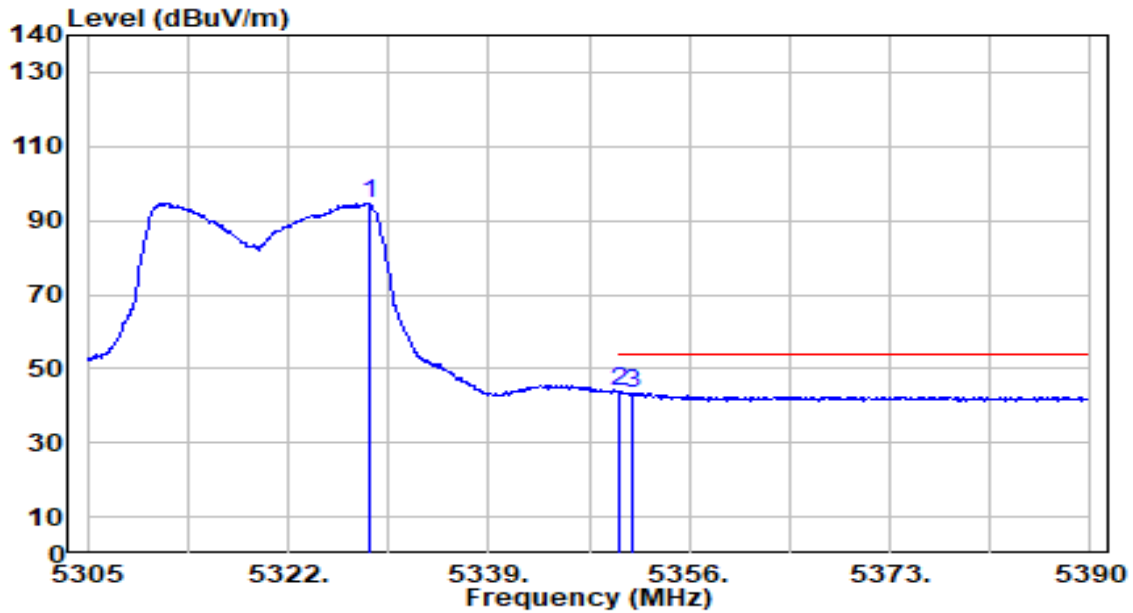


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5328.970	94.14	0.50	94.64	N/A	N/A	169	138	Average
2	*	5350.000	43.17	0.47	43.64	-10.36	54.00	169	138	Average
3		5351.240	42.95	0.47	43.42	-10.58	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

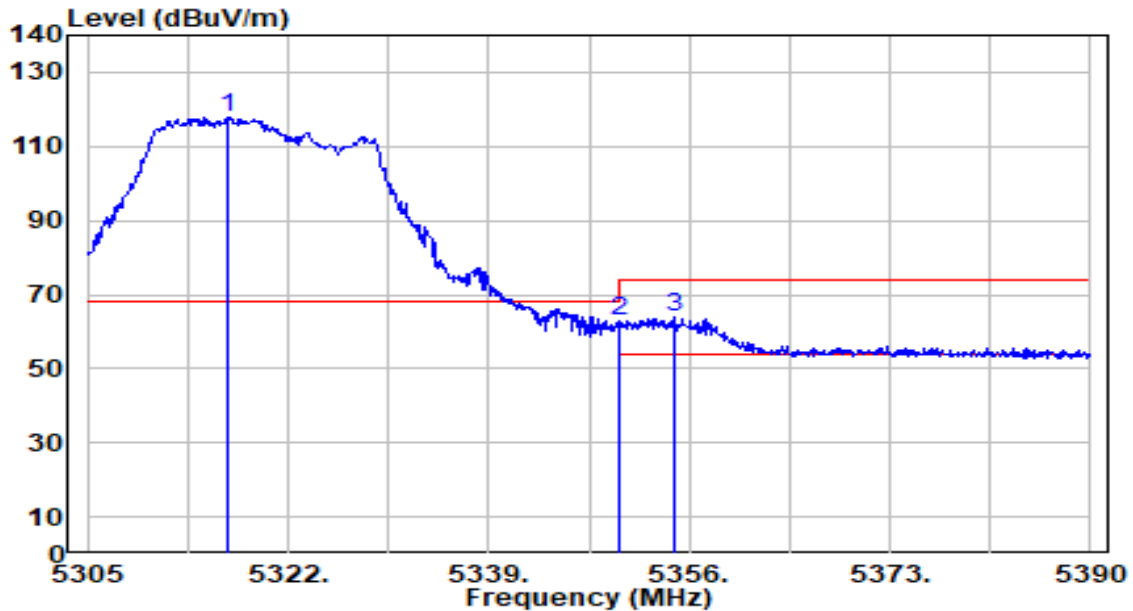


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.815	117.49	0.52	118.01	N/A	N/A	183	173	Peak
2	5350.000	62.51	0.47	62.98	-11.02	74.00	183	173	Peak
3	* 5354.725	63.40	0.46	63.86	-10.14	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

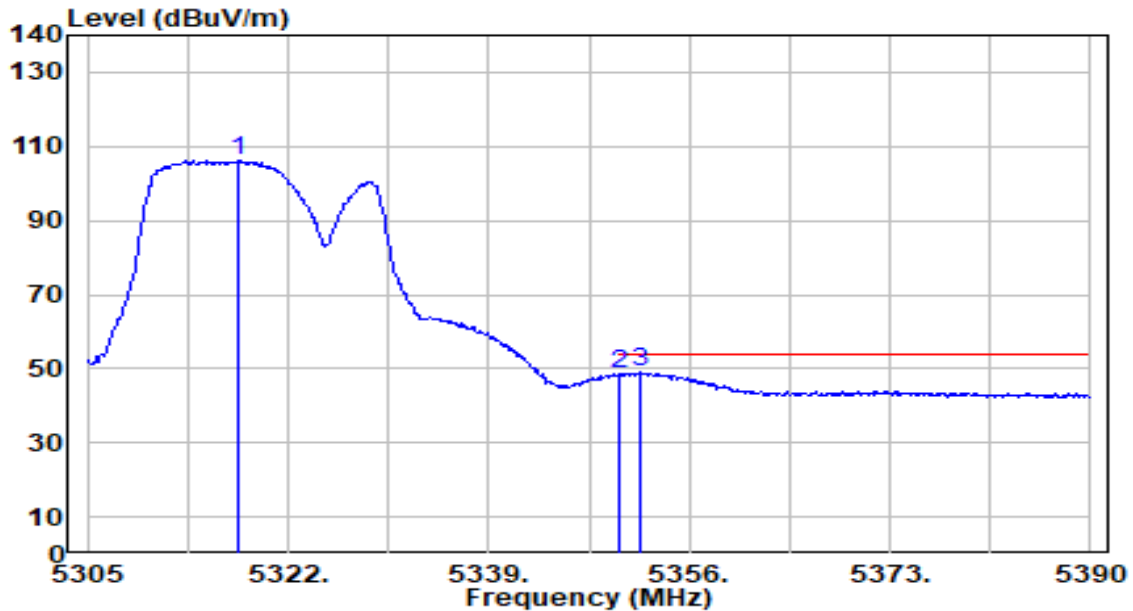


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.835	105.59	0.52	106.11	N/A	N/A	183	173	Average
2	5350.000	47.94	0.47	48.41	-5.59	54.00	183	173	Average
3	* 5351.750	48.50	0.47	48.97	-5.03	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

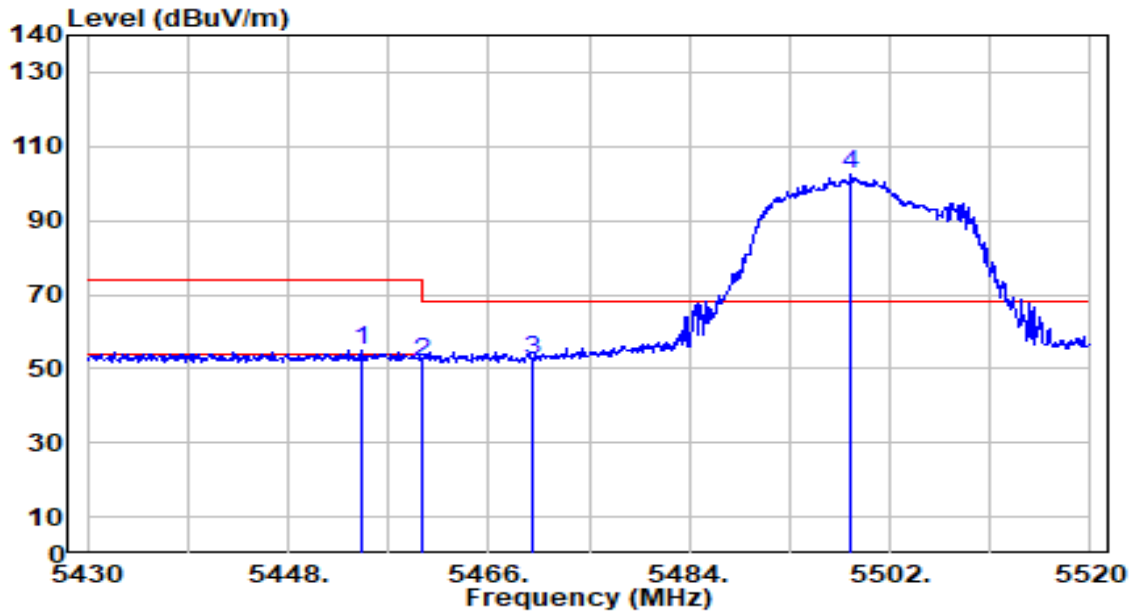


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.570	54.09	0.64	54.72	-19.28	74.00	300	98	Peak
2	5460.000	51.18	0.66	51.84	-22.16	74.00	300	98	Peak
3	* 5470.000	51.69	0.71	52.39	-15.81	68.20	300	98	Peak
4	5498.490	101.83	0.83	102.67	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

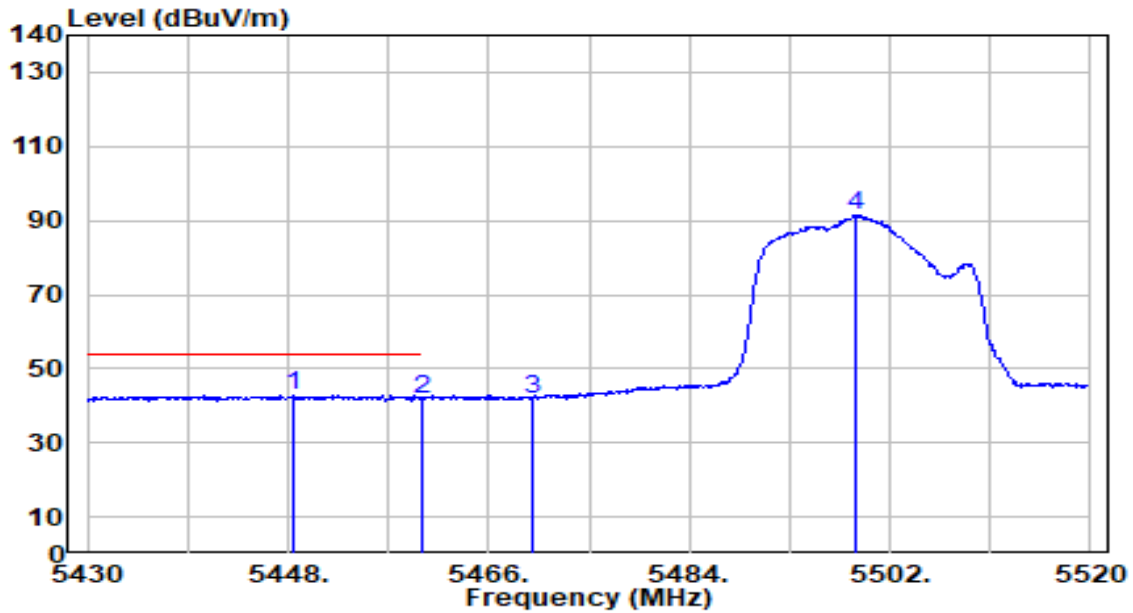


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.540	42.15	0.61	42.76	-11.24	54.00	300	98	Average
2		5460.000	41.23	0.66	41.89	-12.11	54.00	300	98	Average
3		5470.000	41.24	0.71	41.94	N/A	N/A	300	98	Average
4		5498.940	90.61	0.84	91.45	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	By PoE

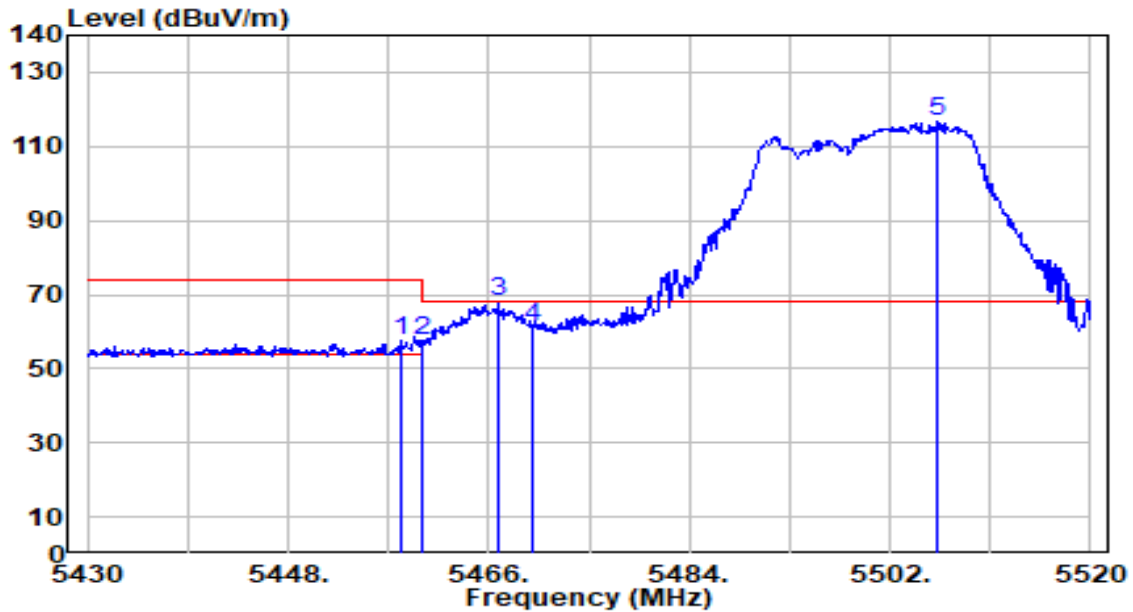


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.260	56.92	0.65	57.58	-16.42	74.00	213	148	Peak
2	5460.000	57.18	0.66	57.84	-16.16	74.00	213	148	Peak
3	5466.810	67.22	0.69	67.92	-0.28	68.20	213	148	Peak
4	5470.000	60.67	0.71	61.37	-6.83	68.20	213	148	Peak
5	* 5506.230	115.75	0.87	116.61	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

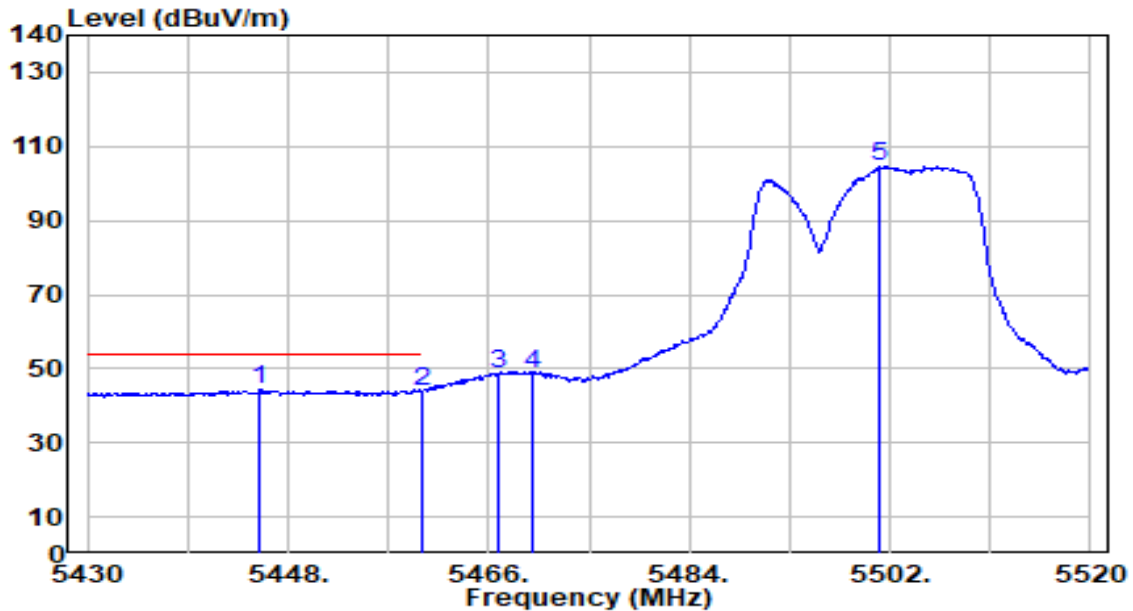


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5445.390	43.54	0.60	44.14	-9.86	54.00	213	148	Average
2		5460.000	43.22	0.66	43.88	-10.12	54.00	213	148	Average
3		5466.810	47.72	0.69	48.41	N/A	N/A	213	148	Average
4		5470.000	47.84	0.71	48.54	N/A	N/A	213	148	Average
5		5501.100	103.95	0.85	104.79	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

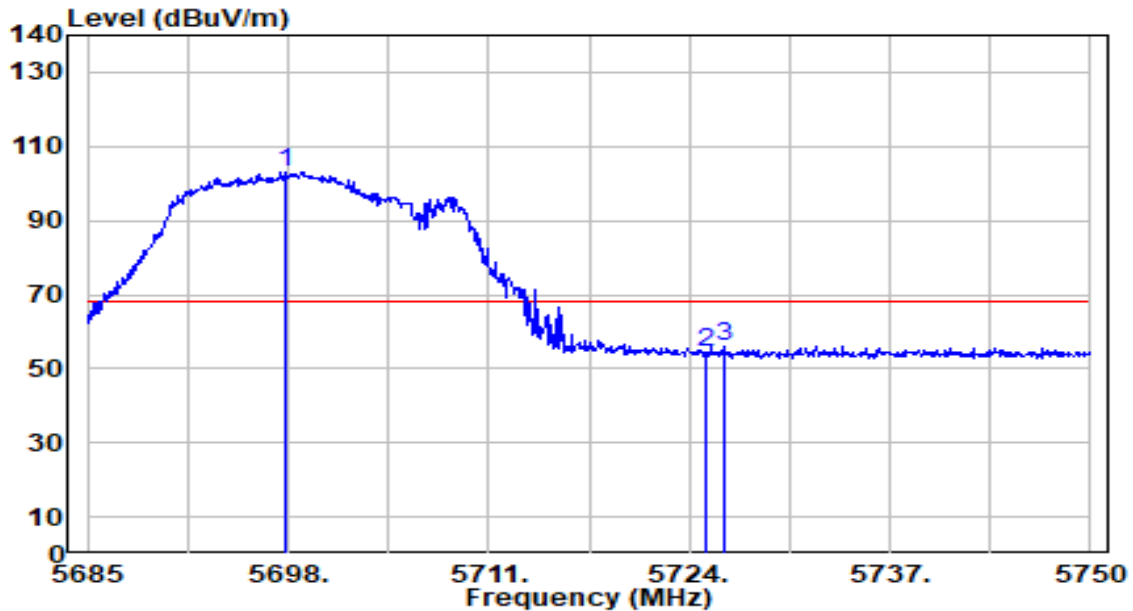


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.870	101.41	1.77	103.18	N/A	N/A	200	105	Peak
2	5725.000	52.56	1.89	54.45	-13.75	68.20	200	105	Peak
3	* 5726.275	53.98	1.90	55.88	-12.32	68.20	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

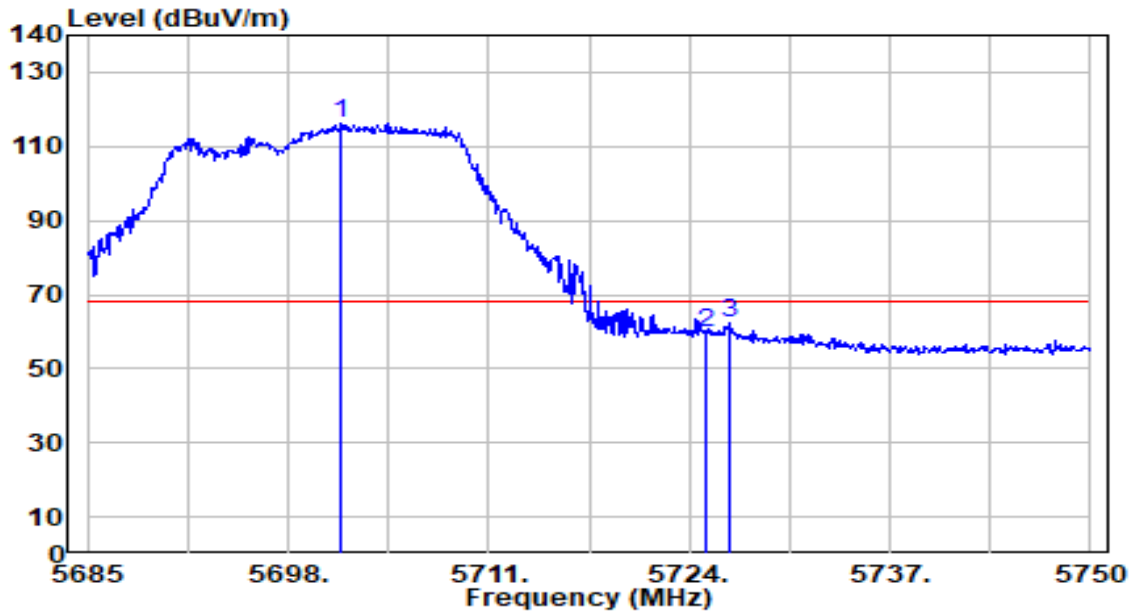


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.445	114.62	1.78	116.40	N/A	N/A	204	195	Peak
2	5725.000	57.85	1.89	59.74	-8.46	68.20	204	195	Peak
3	* 5726.665	60.18	1.90	62.09	-6.11	68.20	204	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

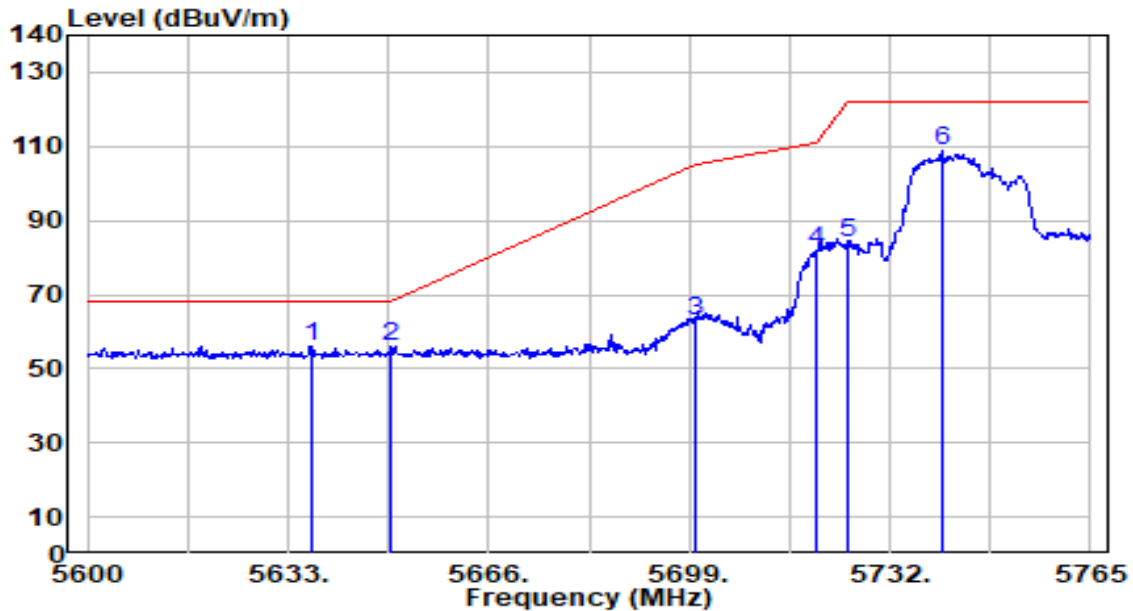


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.795	54.61	1.48	56.09	-12.11	68.20	207	99	Peak
2		5650.000	54.23	1.54	55.77	-12.43	68.20	207	99	Peak
3		5700.000	61.24	1.78	63.01	-42.19	105.20	207	99	Peak
4		5720.000	80.00	1.87	81.87	-28.93	110.80	207	99	Peak
5		5725.000	82.06	1.89	83.95	-38.25	122.20	207	99	Peak
6		5740.580	106.81	1.97	108.78	N/A	N/A	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

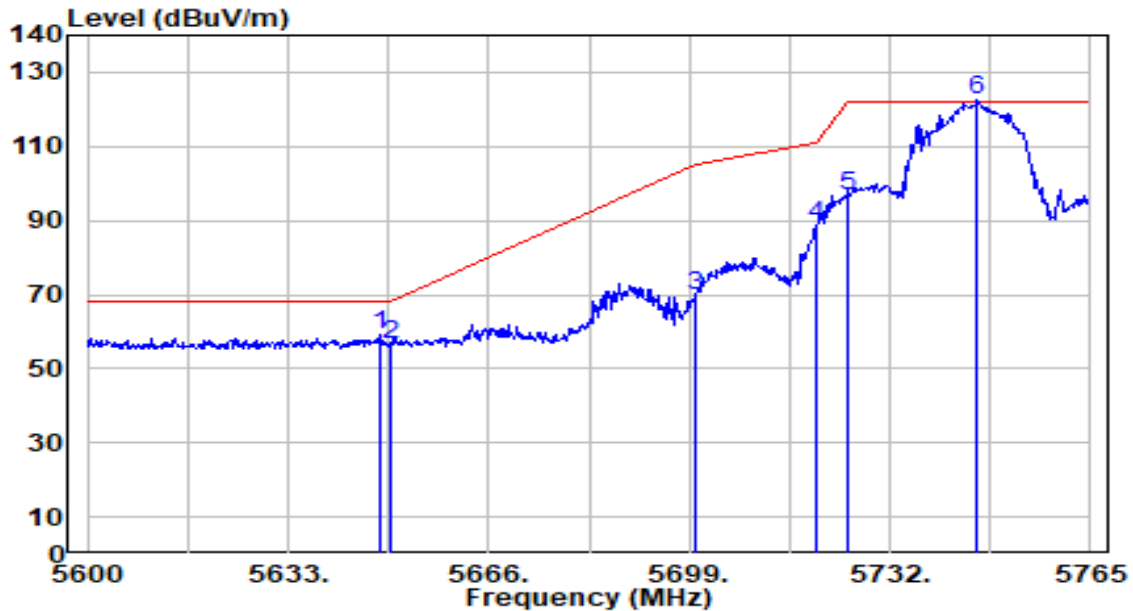


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.345	57.53	1.53	59.07	-9.13	68.20	202	188	Peak
2		5650.000	55.12	1.54	56.66	-11.54	68.20	202	188	Peak
3		5700.000	68.19	1.78	69.97	-35.23	105.20	202	188	Peak
4		5720.000	86.79	1.87	88.66	-22.14	110.80	202	188	Peak
5		5725.000	95.01	1.89	96.91	-25.29	122.20	202	188	Peak
6		5746.355	120.50	1.99	122.50	N/A	N/A	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

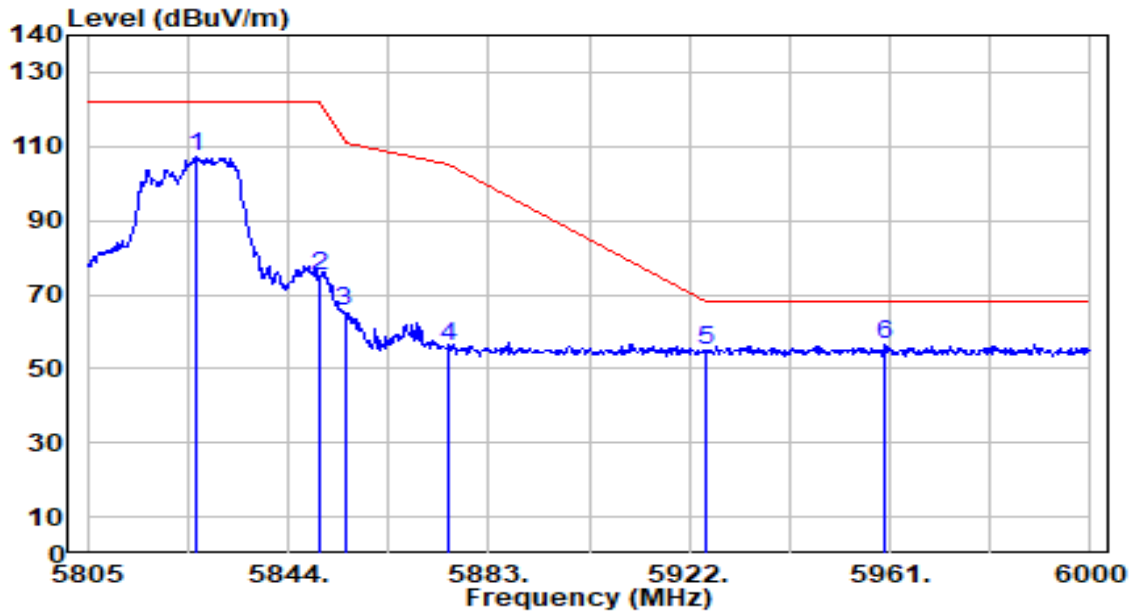


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.060	105.09	2.25	107.34	N/A	N/A	285	222	Peak
2	5850.000	72.59	2.25	74.84	-47.36	122.20	285	222	Peak
3	5855.000	63.35	2.25	65.61	-45.19	110.80	285	222	Peak
4	5875.000	53.77	2.26	56.03	-49.17	105.20	285	222	Peak
5	5925.000	52.55	2.27	54.82	-13.38	68.20	285	222	Peak
6	* 5960.025	54.40	2.27	56.68	-11.52	68.20	285	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

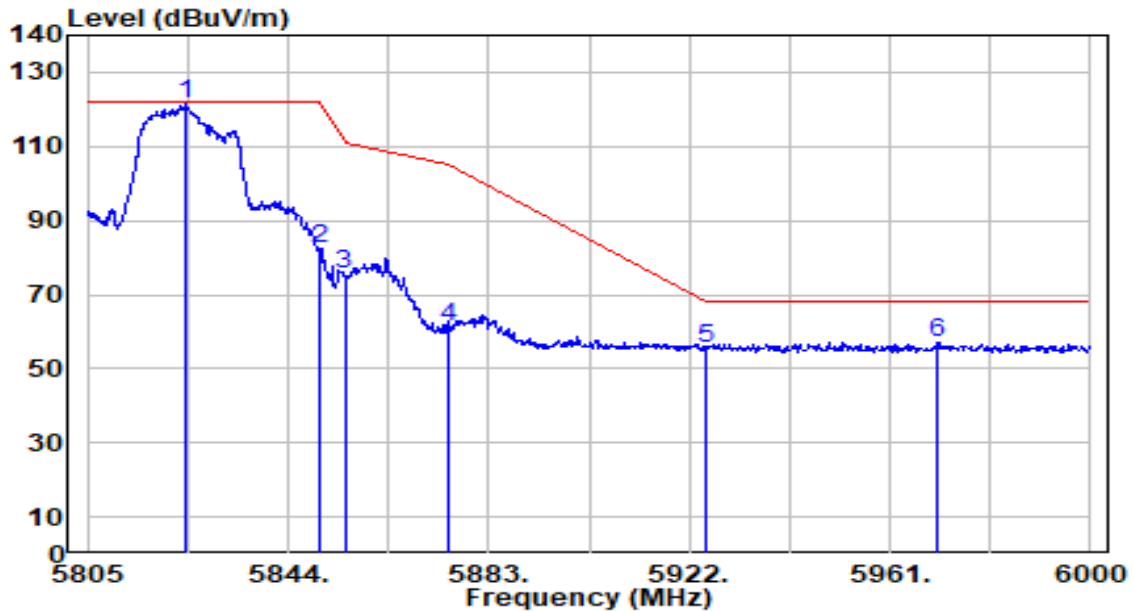


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.110	119.01	2.25	121.26	N/A	N/A	185	176	Peak
2	5850.000	80.34	2.25	82.59	-39.61	122.20	185	176	Peak
3	5855.000	73.18	2.25	75.43	-35.37	110.80	185	176	Peak
4	5875.000	58.90	2.26	61.15	-44.05	105.20	185	176	Peak
5	5925.000	52.98	2.27	55.25	-12.95	68.20	185	176	Peak
6	* 5969.970	55.00	2.27	57.28	-10.92	68.20	185	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

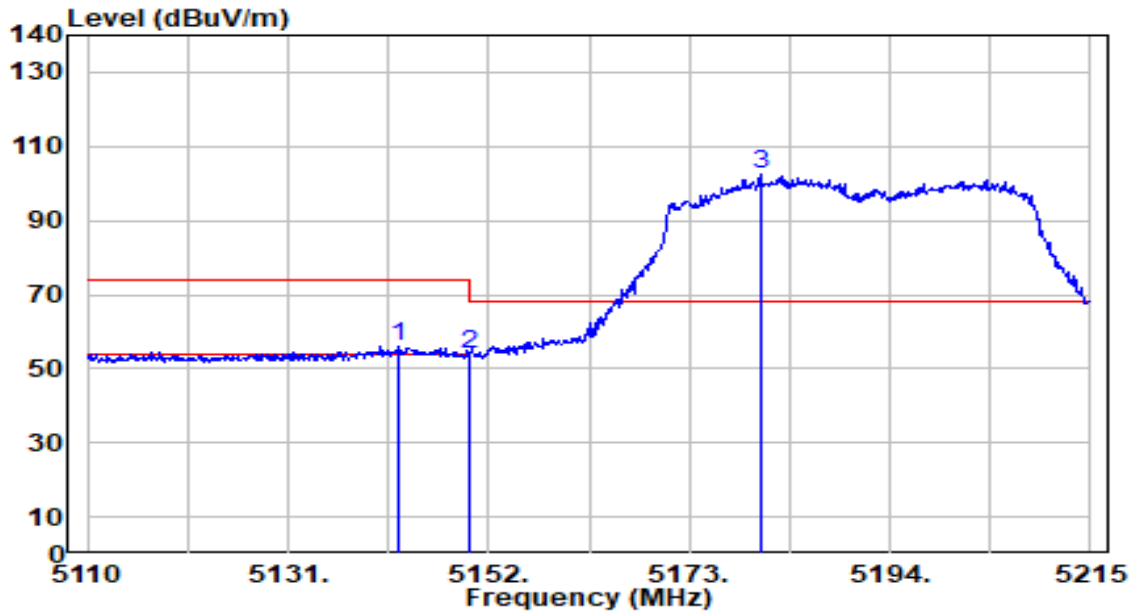


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.655	55.45	0.65	56.10	-17.90	74.00	100	133	Peak
2		5150.000	53.03	0.65	53.69	-20.31	74.00	100	133	Peak
3		5180.455	101.75	0.68	102.44	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

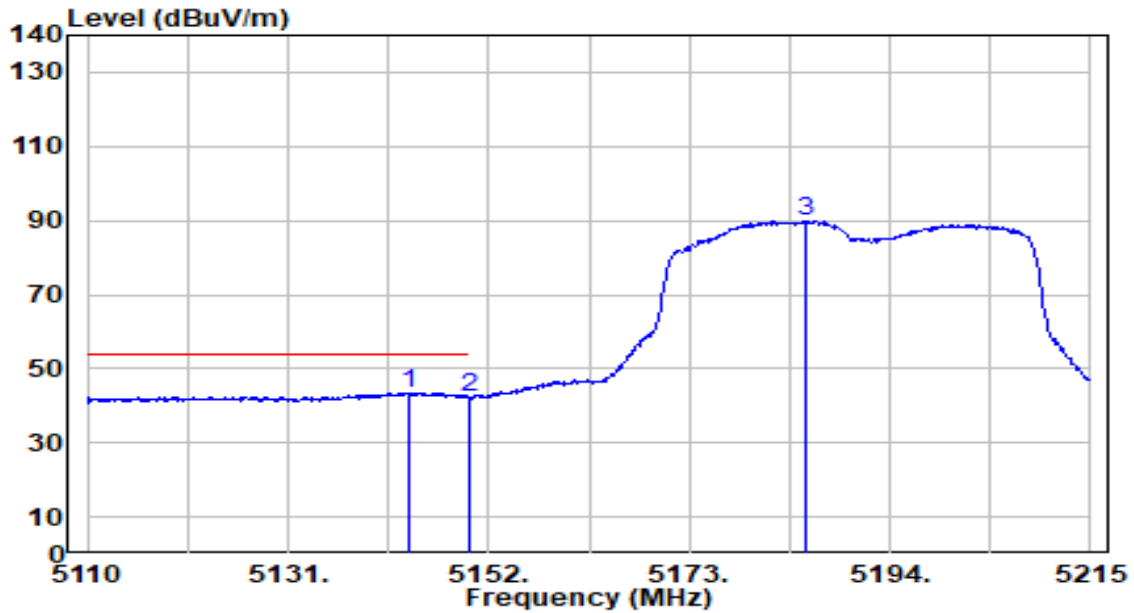


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.600	42.94	0.65	43.58	-10.42	54.00	100	133	Average
2		5150.000	41.58	0.65	42.24	-11.76	54.00	100	133	Average
3		5185.180	89.05	0.69	89.74	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

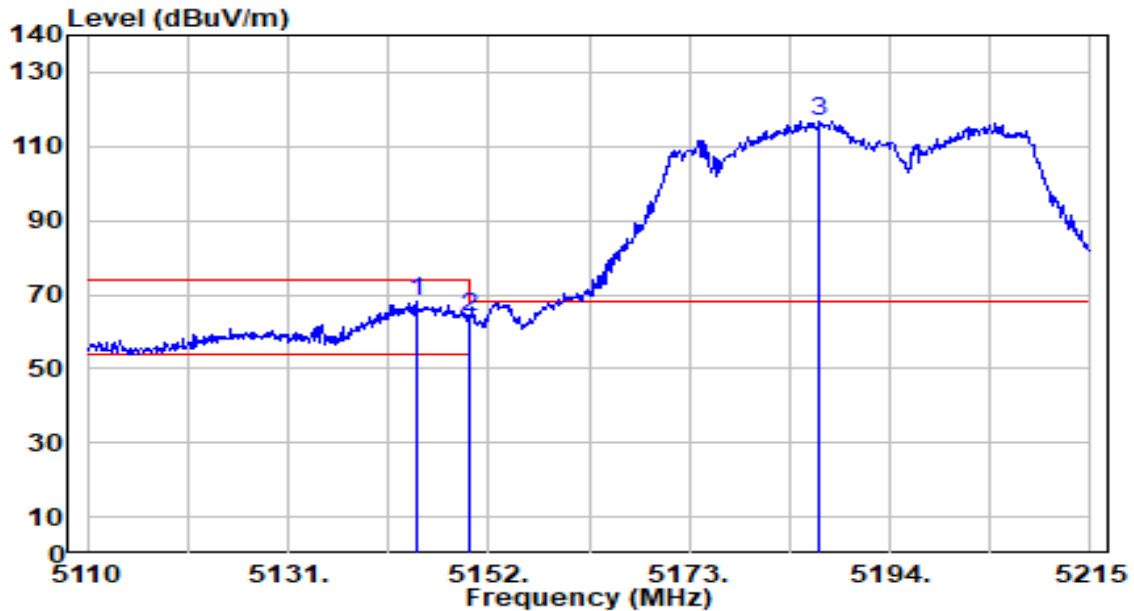


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.440	67.45	0.65	68.10	-5.90	74.00	219	172	Peak
2		5150.000	63.40	0.65	64.05	-9.95	74.00	219	172	Peak
3		5186.545	116.06	0.69	116.75	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

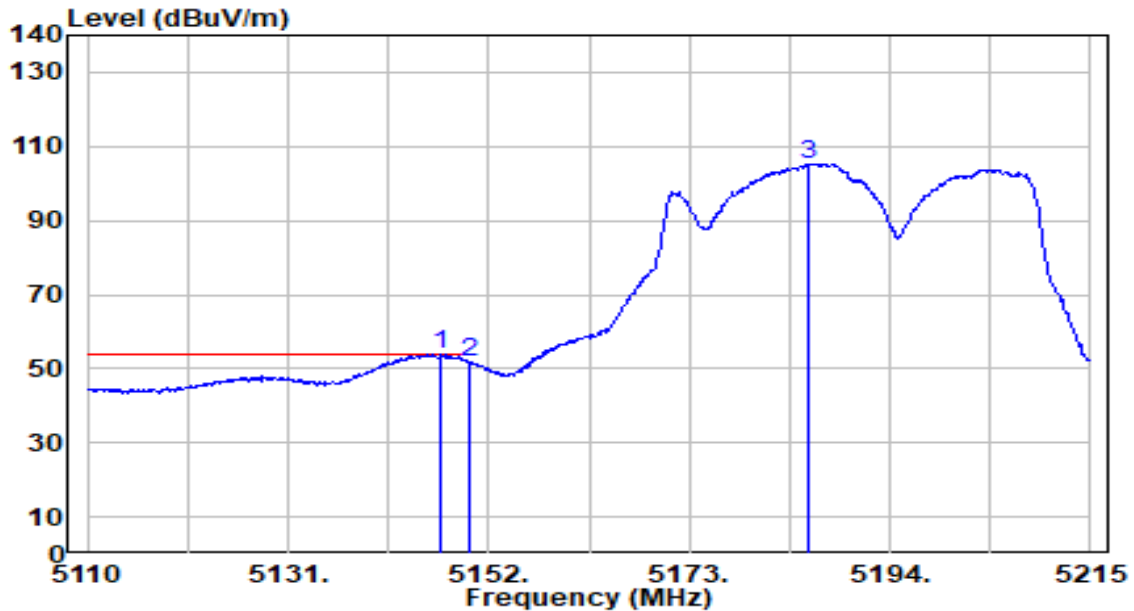


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.065	53.16	0.65	53.81	-0.19	54.00	219	172	Average
2		5150.000	51.06	0.65	51.71	-2.29	54.00	219	172	Average
3		5185.390	104.49	0.69	105.18	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

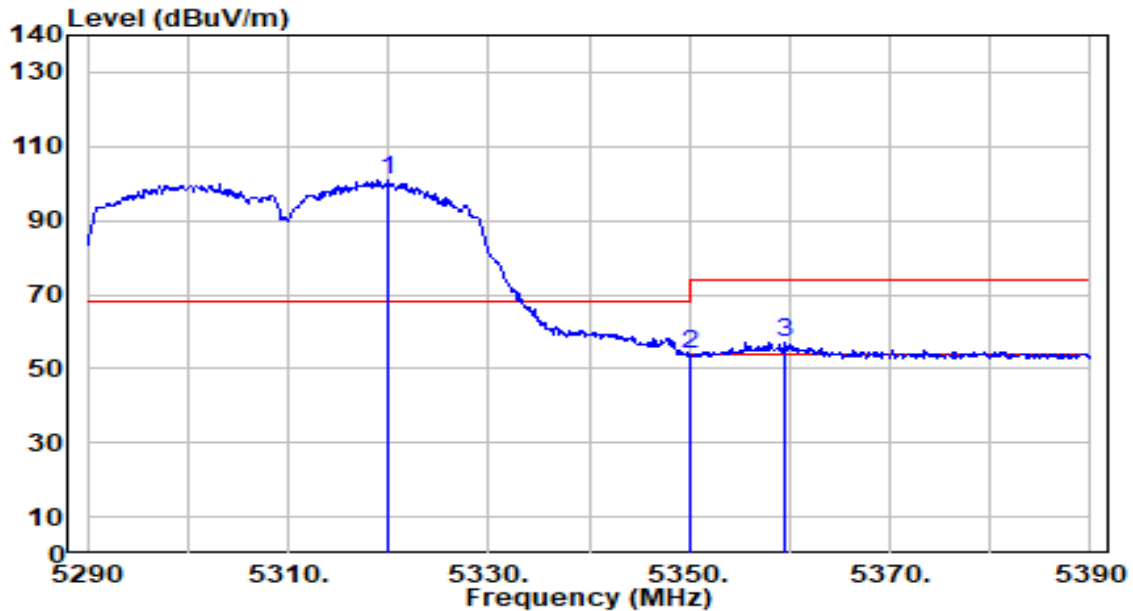


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.900	100.46	0.52	100.98	N/A	N/A	169	138	Peak
2	5350.000	53.15	0.47	53.62	-20.38	74.00	169	138	Peak
3	* 5359.500	56.63	0.46	57.09	-16.91	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

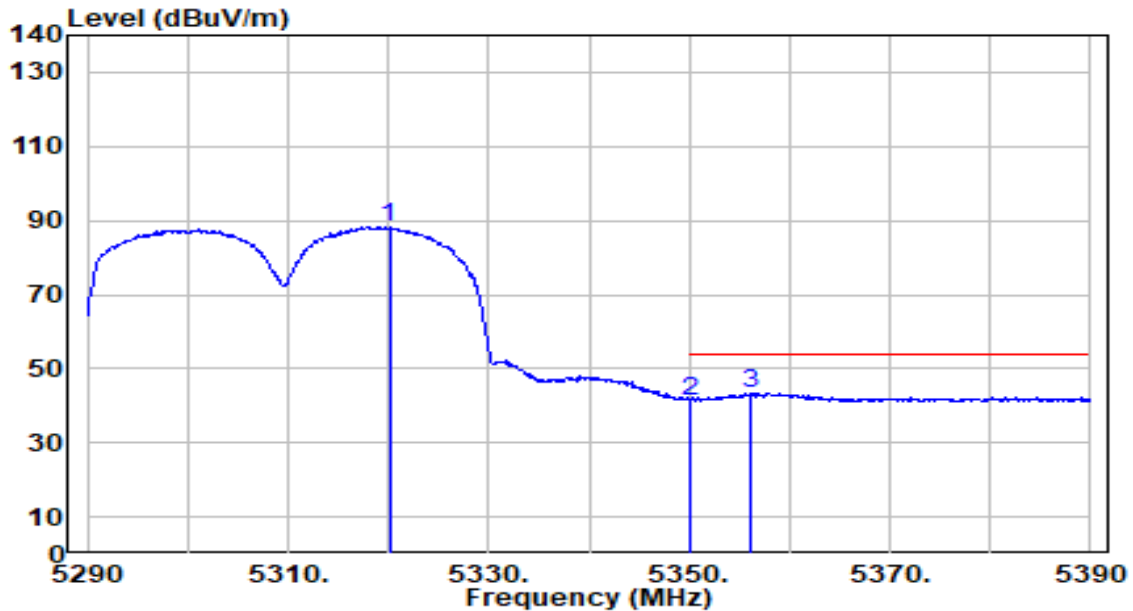


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.100	87.80	0.52	88.31	N/A	N/A	169	138	Average
2	5350.000	40.95	0.47	41.43	-12.57	54.00	169	138	Average
3	* 5356.000	42.94	0.46	43.40	-10.60	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

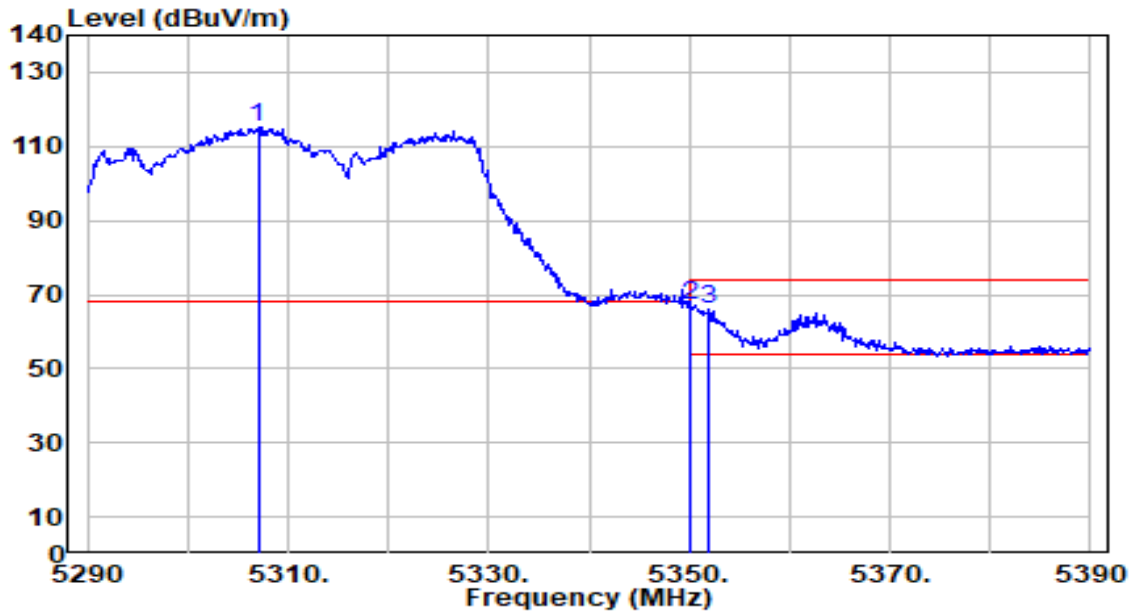


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5307.000	114.58	0.54	115.12	N/A	N/A	183	173	Peak
2	*	5350.000	66.39	0.47	66.86	-7.14	74.00	183	173	Peak
3		5352.000	65.51	0.47	65.98	-8.02	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

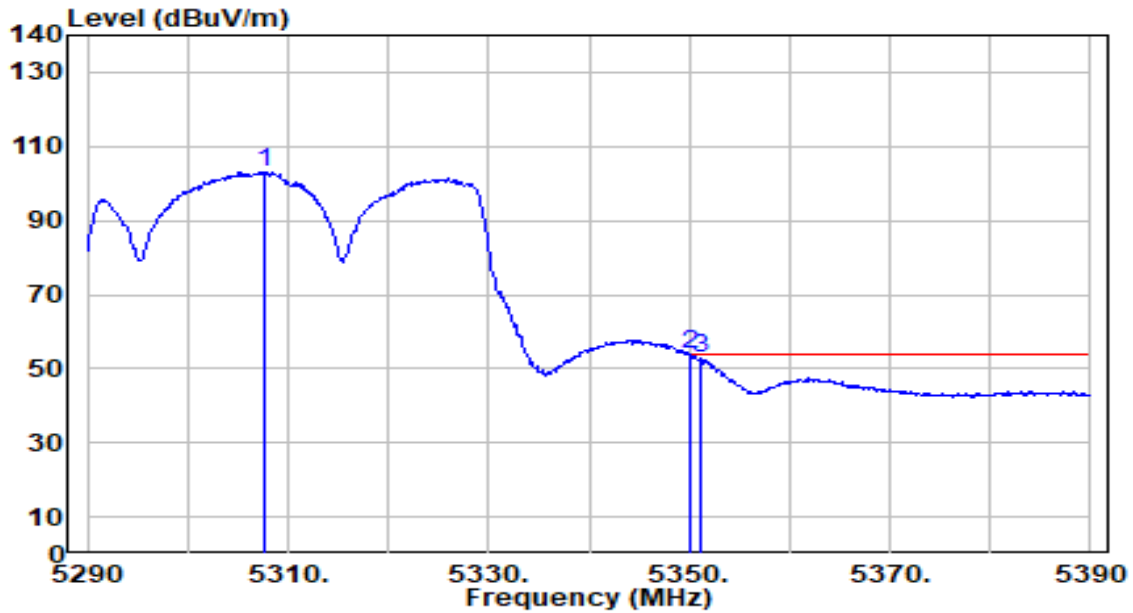


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5307.600	102.72	0.54	103.26	N/A	N/A	183	173	Average
2	*	5350.000	53.29	0.47	53.76	-0.24	54.00	183	173	Average
3		5351.200	52.25	0.47	52.72	-1.28	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

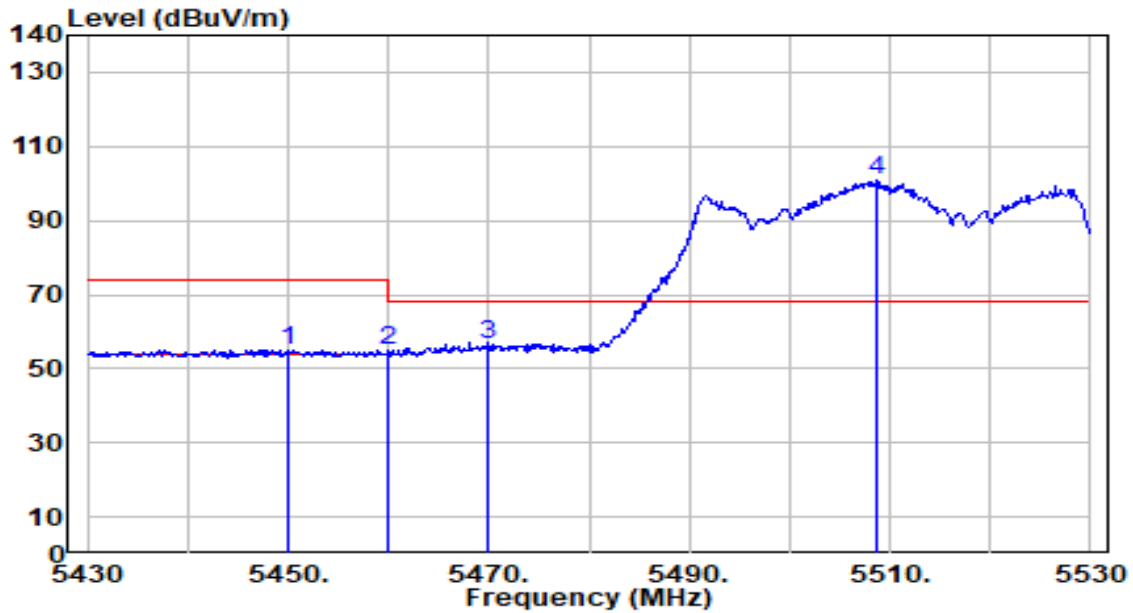


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5450.100	54.57	0.62	55.19	-18.81	74.00	300	98	Peak
2		5460.000	54.03	0.66	54.69	-19.31	74.00	300	98	Peak
3	*	5470.000	55.92	0.71	56.62	-11.58	68.20	300	98	Peak
4		5508.800	99.89	0.88	100.77	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

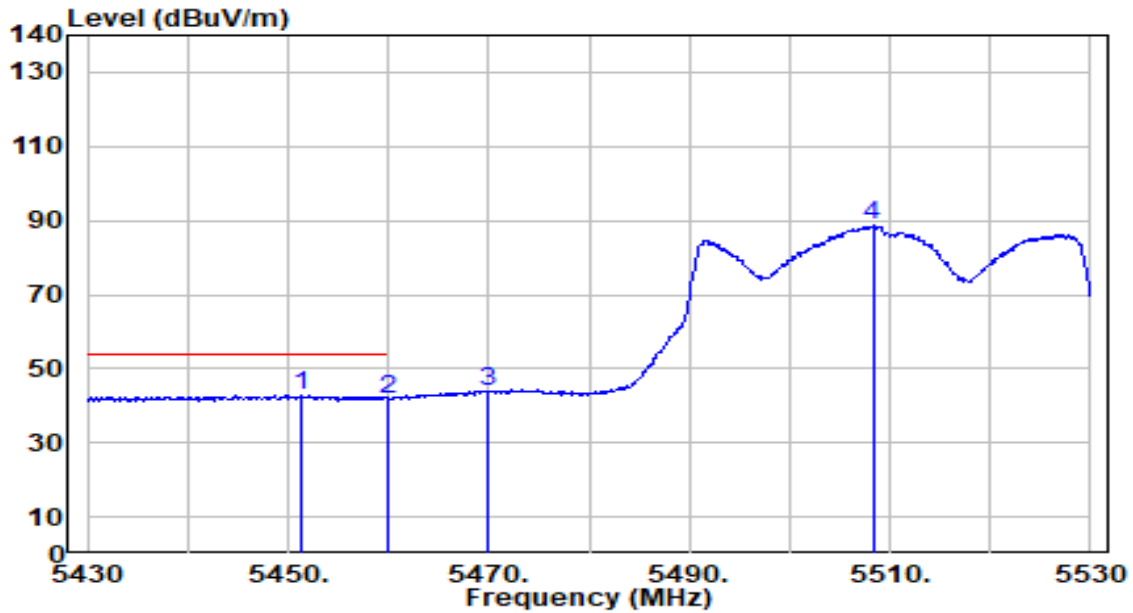


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.300	42.19	0.62	42.81	-11.19	54.00	300	98	Average
2		5460.000	40.98	0.66	41.64	-12.36	54.00	300	98	Average
3		5470.000	42.99	0.71	43.70	N/A	N/A	300	98	Average
4		5508.300	87.68	0.88	88.56	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

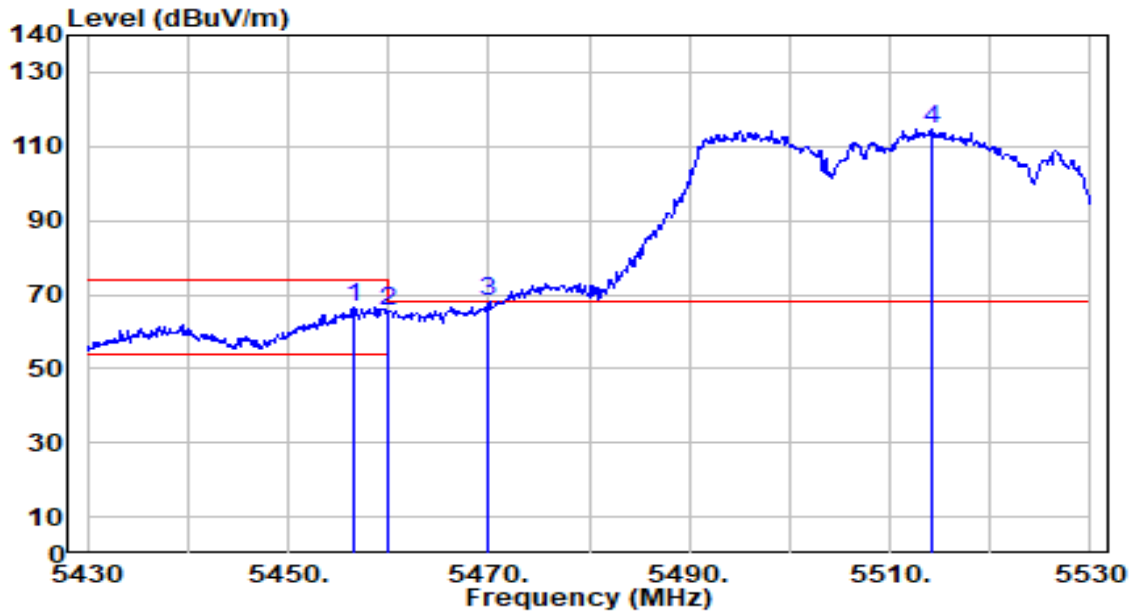


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.600	66.07	0.65	66.72	-7.28	74.00	213	148	Peak
2	5460.000	65.11	0.66	65.77	-8.23	74.00	213	148	Peak
3	* 5470.000	67.22	0.71	67.92	-0.28	68.20	213	148	Peak
4	5514.100	113.78	0.91	114.69	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

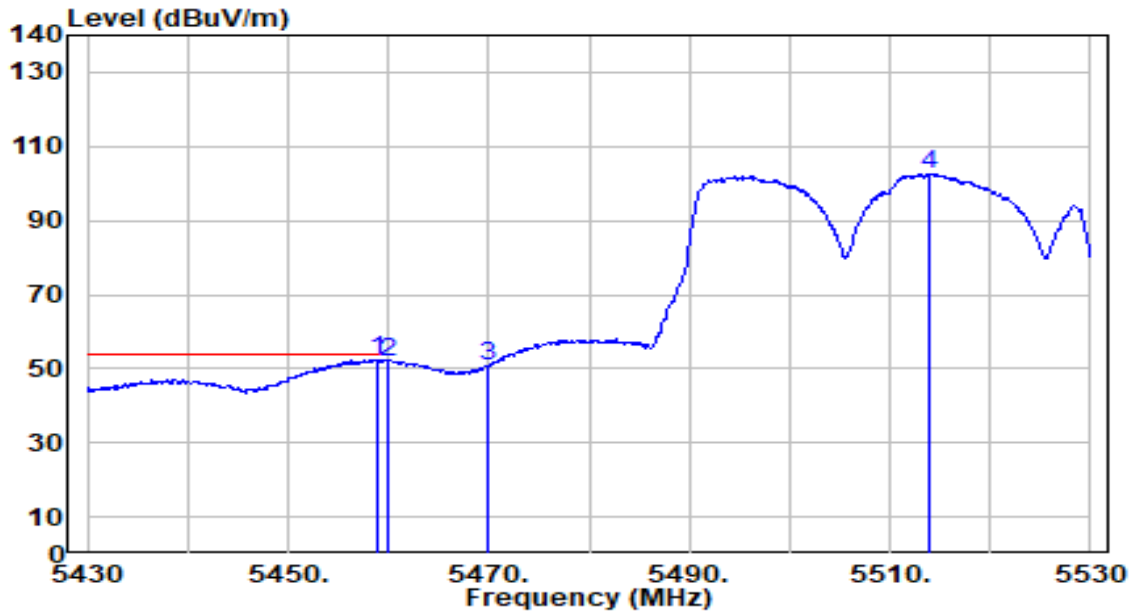


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.900	51.83	0.66	52.49	-1.51	54.00	213	148	Average
2		5460.000	51.22	0.66	51.88	-2.12	54.00	213	148	Average
3		5470.000	49.87	0.71	50.58	N/A	N/A	213	148	Average
4		5514.000	101.85	0.91	102.75	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

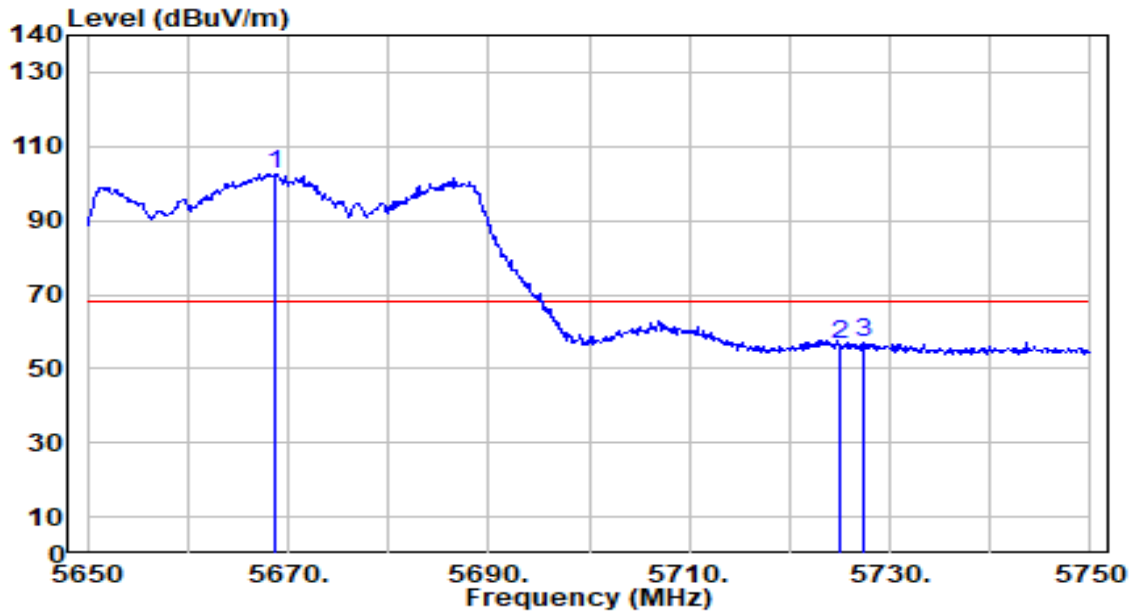


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.700	101.00	1.63	102.63	N/A	N/A	200	105	Peak
2	5725.000	54.75	1.89	56.64	-11.56	68.20	200	105	Peak
3	* 5727.400	55.33	1.90	57.24	-10.96	68.20	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

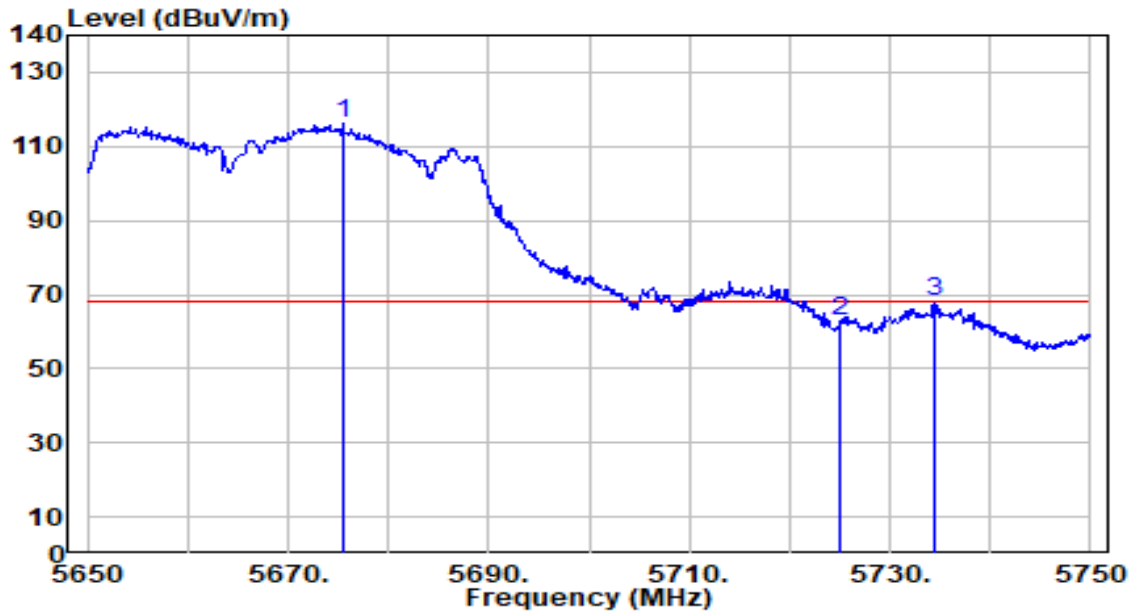


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5675.400	114.69	1.66	116.36	N/A	N/A	204	195	Peak
2	5725.000	61.11	1.89	63.00	-5.20	68.20	204	195	Peak
3	* 5734.400	66.02	1.94	67.96	-0.24	68.20	204	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

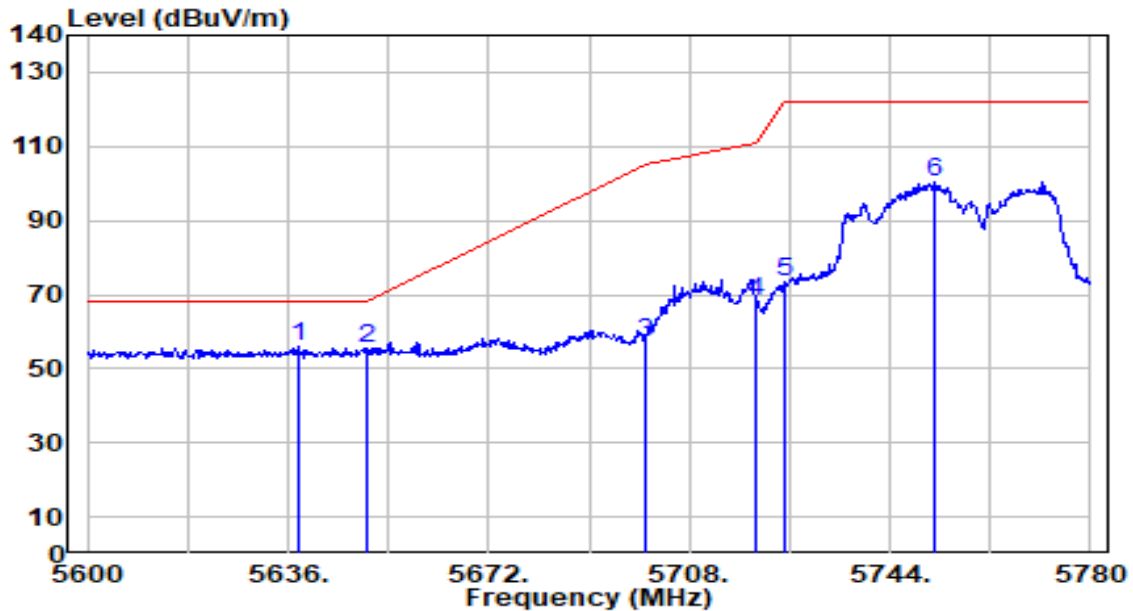


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.800	54.61	1.48	56.10	-12.10	68.20	300	99	Peak
2		5650.000	53.87	1.54	55.42	-12.78	68.20	300	99	Peak
3		5700.000	55.36	1.78	57.13	-48.07	105.20	300	99	Peak
4		5720.000	66.50	1.87	68.37	-42.43	110.80	300	99	Peak
5		5725.000	71.79	1.89	73.69	-48.51	122.20	300	99	Peak
6		5751.920	98.20	2.02	100.22	N/A	N/A	300	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

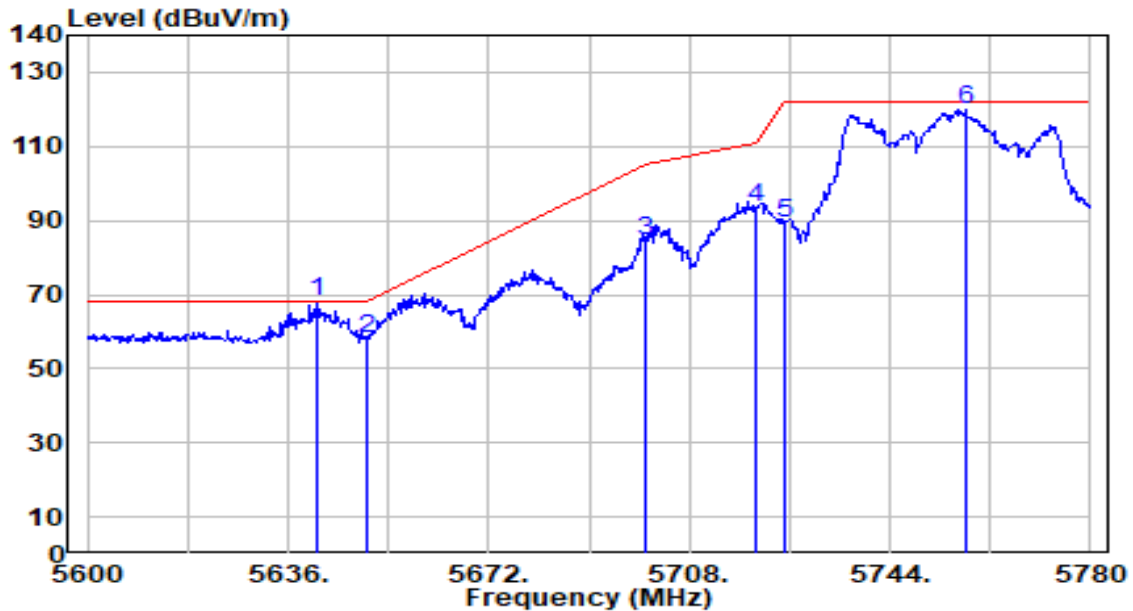


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.040	66.48	1.50	67.98	-0.22	68.20	202	188	Peak
2		5650.000	56.40	1.54	57.94	-10.26	68.20	202	188	Peak
3		5700.000	82.58	1.78	84.36	-20.84	105.20	202	188	Peak
4		5720.000	91.77	1.87	93.64	-17.16	110.80	202	188	Peak
5		5725.000	87.53	1.89	89.42	-32.78	122.20	202	188	Peak
6		5757.680	118.01	2.05	120.06	N/A	N/A	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

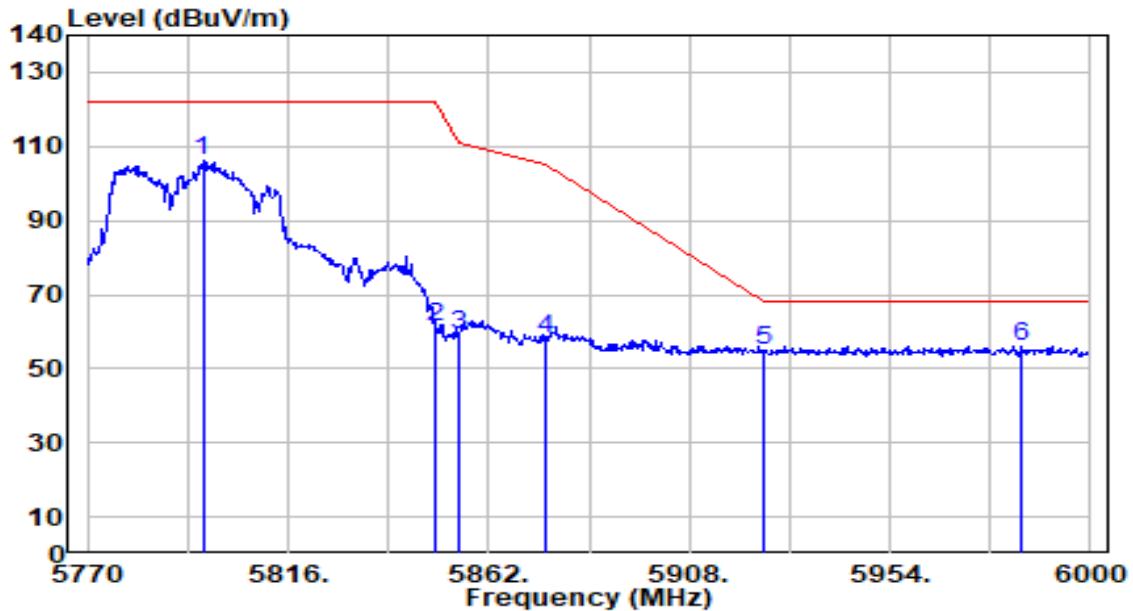


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.450	103.74	2.23	105.96	N/A	N/A	285	222	Peak
2	5850.000	59.14	2.25	61.39	-60.81	122.20	285	222	Peak
3	5855.000	57.03	2.25	59.29	-51.51	110.80	285	222	Peak
4	5875.000	55.72	2.26	57.98	-47.22	105.20	285	222	Peak
5	5925.000	52.77	2.27	55.04	-13.16	68.20	285	222	Peak
6	* 5984.360	53.97	2.28	56.25	-11.95	68.20	285	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

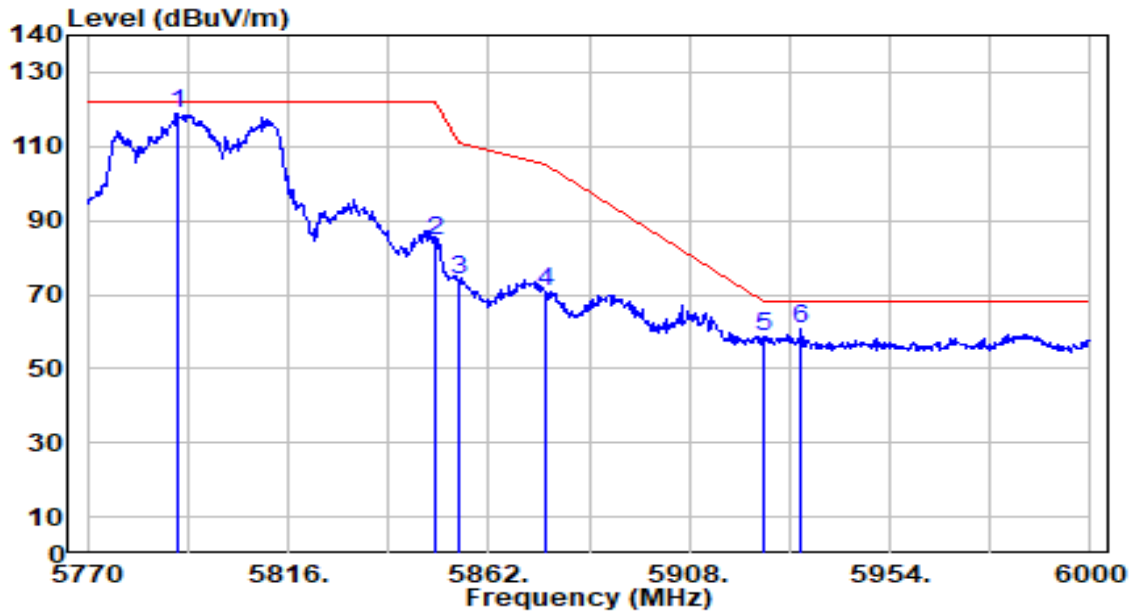


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.470	116.45	2.20	118.65	N/A	N/A	185	176	Peak
2	5850.000	82.38	2.25	84.64	-37.56	122.20	185	176	Peak
3	5855.000	71.48	2.25	73.74	-37.06	110.80	185	176	Peak
4	5875.000	68.66	2.26	70.92	-34.28	105.20	185	176	Peak
5	5925.000	56.35	2.27	58.62	-9.58	68.20	185	176	Peak
6	* 5933.760	58.53	2.27	60.80	-7.40	68.20	185	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

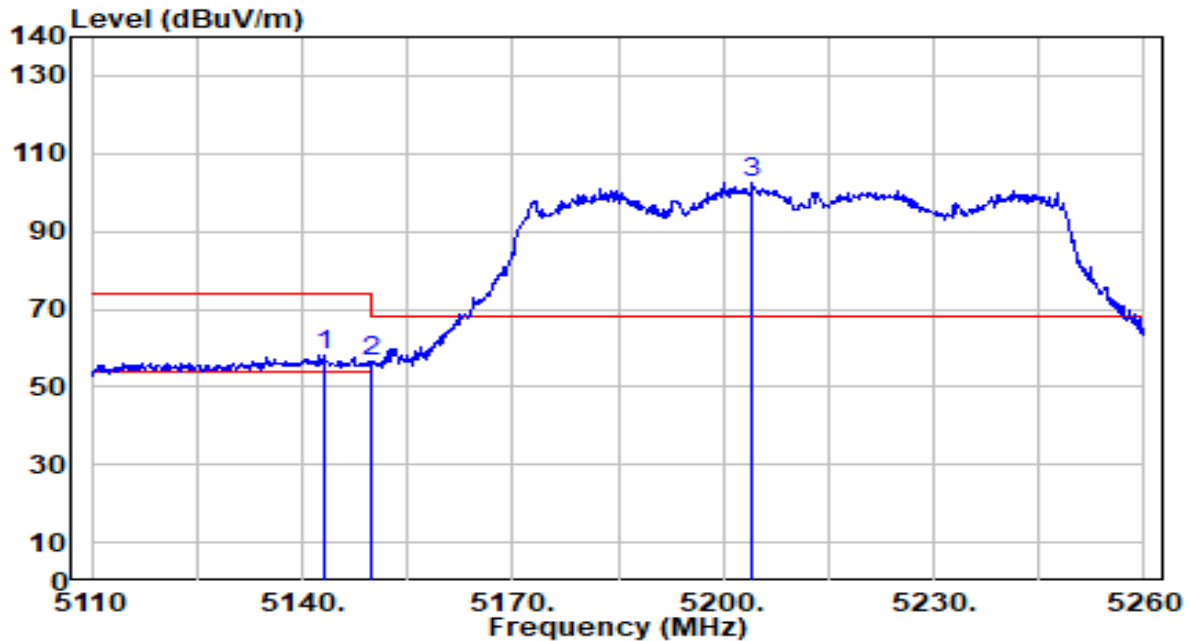


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.150	57.36	0.65	58.00	-16.00	74.00	100	133	Peak
2		5150.000	55.89	0.65	56.54	-17.46	74.00	100	133	Peak
3		5204.050	101.88	0.70	102.58	N/A	N/A	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

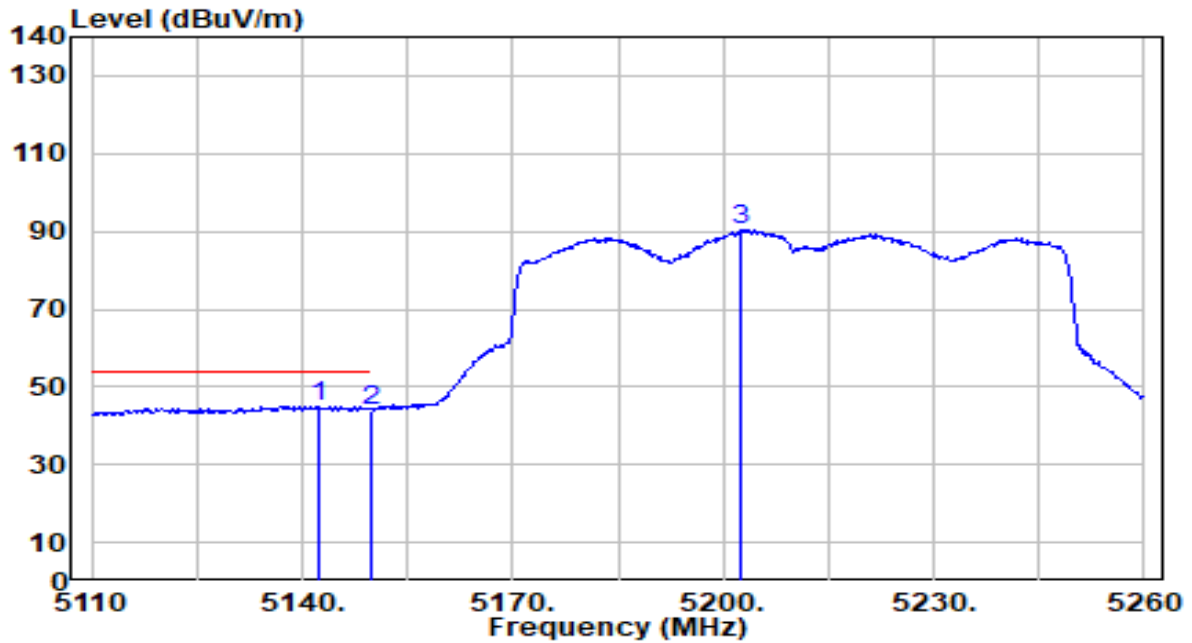


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.250	44.47	0.65	45.12	-8.88	54.00	100	133	Average
2		5150.000	43.30	0.65	43.96	-10.04	54.00	100	133	Average
3		5202.550	89.61	0.70	90.30	N/A	N/A	100	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

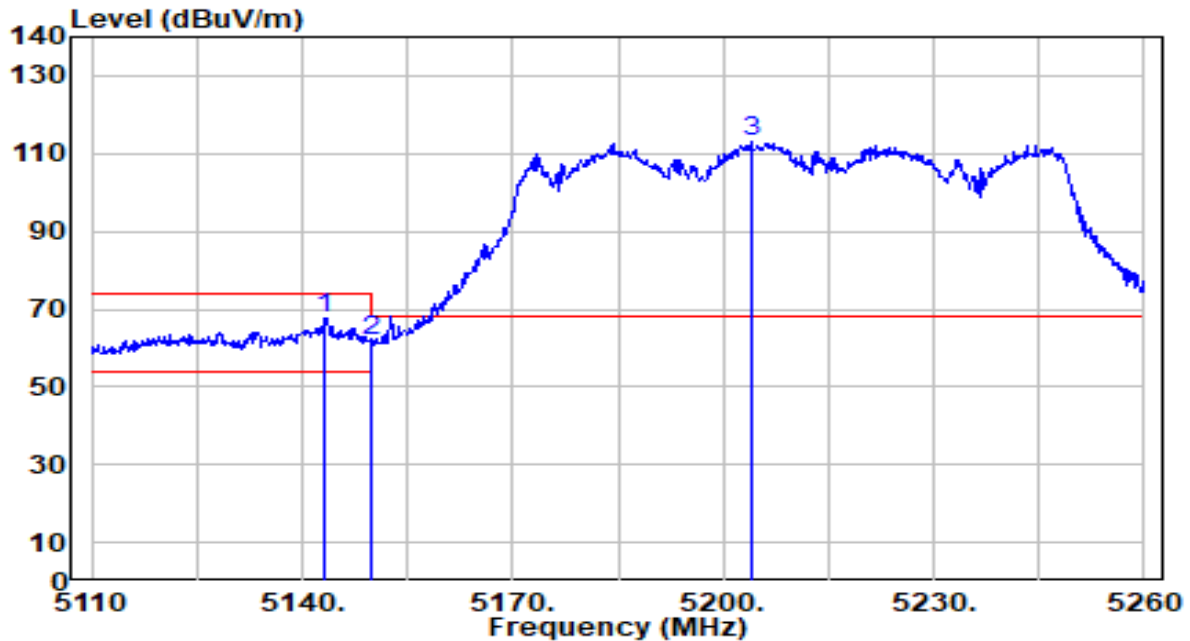


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.150	66.92	0.65	67.57	-6.43	74.00	219	172	Peak
2		5150.000	61.38	0.65	62.04	-11.96	74.00	219	172	Peak
3		5203.900	112.32	0.70	113.01	N/A	N/A	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

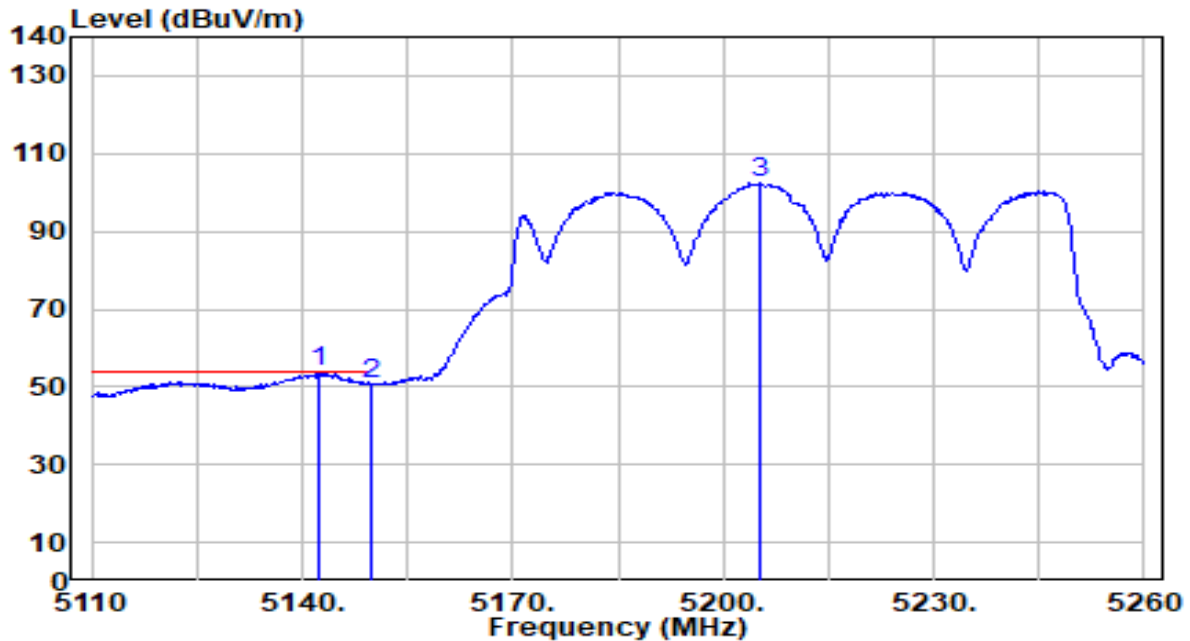


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.550	53.15	0.65	53.80	-0.20	54.00	219	172	Average
2		5150.000	50.12	0.65	50.77	-3.23	54.00	219	172	Average
3		5205.250	101.64	0.69	102.33	N/A	N/A	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

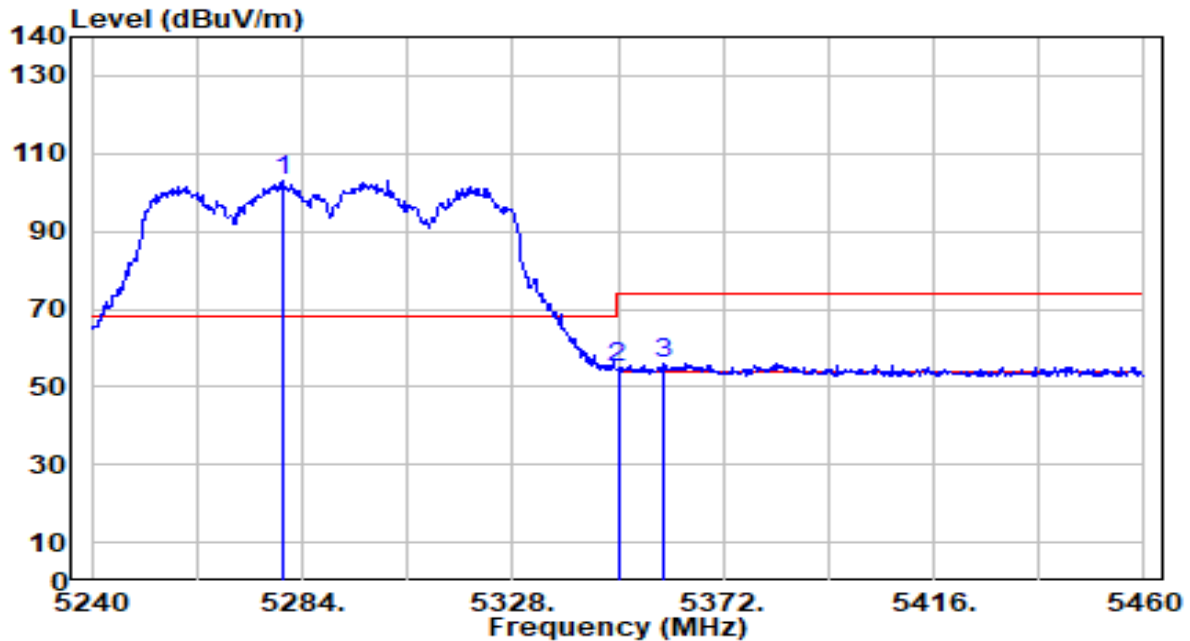


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5279.820	102.63	0.58	103.21	N/A	N/A	169	138	Peak
2	5350.000	54.34	0.47	54.81	-19.19	74.00	169	138	Peak
3	* 5359.460	55.56	0.46	56.01	-17.99	74.00	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

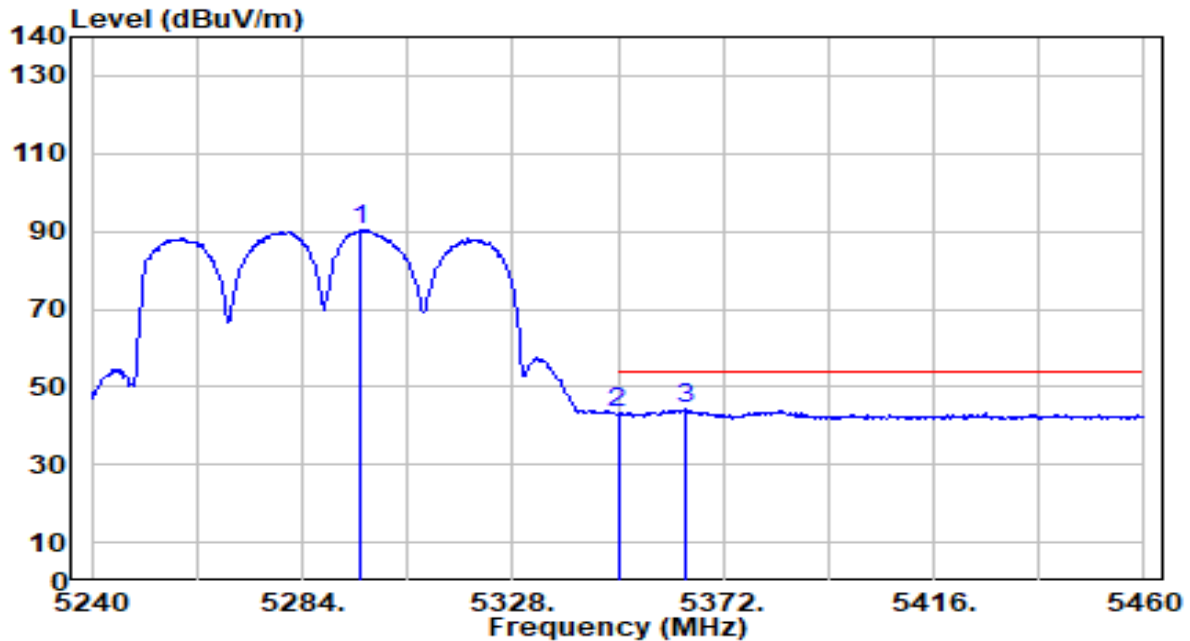


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.320	89.80	0.55	90.36	N/A	N/A	169	138	Average
2	5350.000	42.63	0.47	43.10	-10.90	54.00	169	138	Average
3	* 5364.300	43.67	0.45	44.12	-9.88	54.00	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

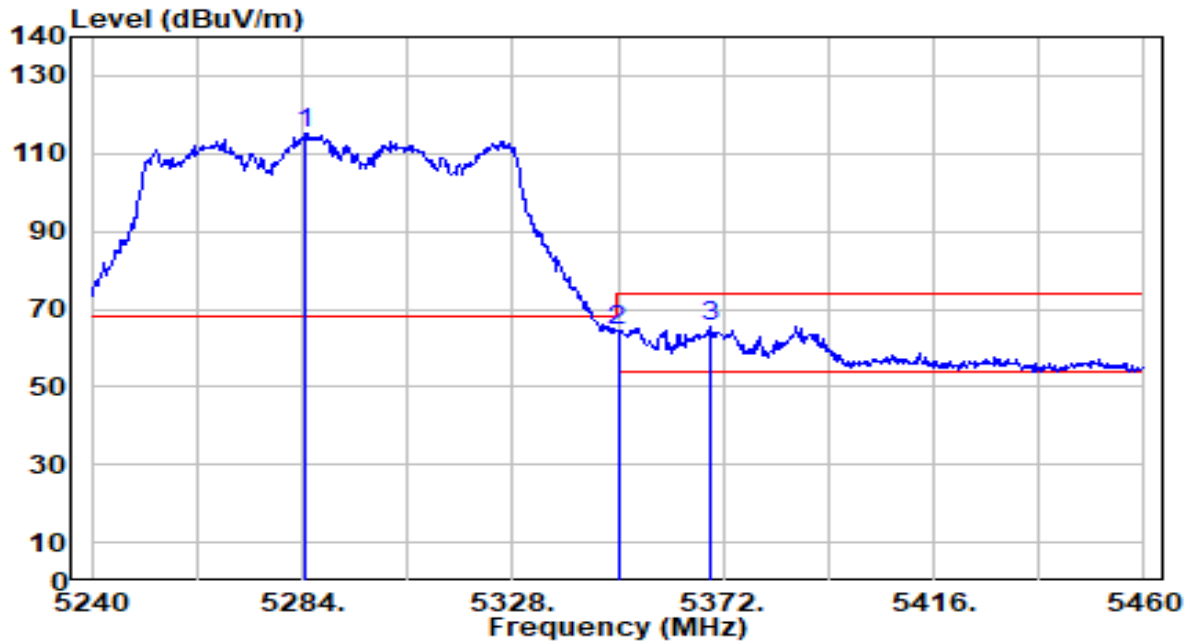


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5284.660	114.50	0.57	115.08	N/A	N/A	183	173	Peak
2	5350.000	64.00	0.47	64.48	-9.52	74.00	183	173	Peak
3	* 5369.360	65.00	0.44	65.44	-8.56	74.00	183	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

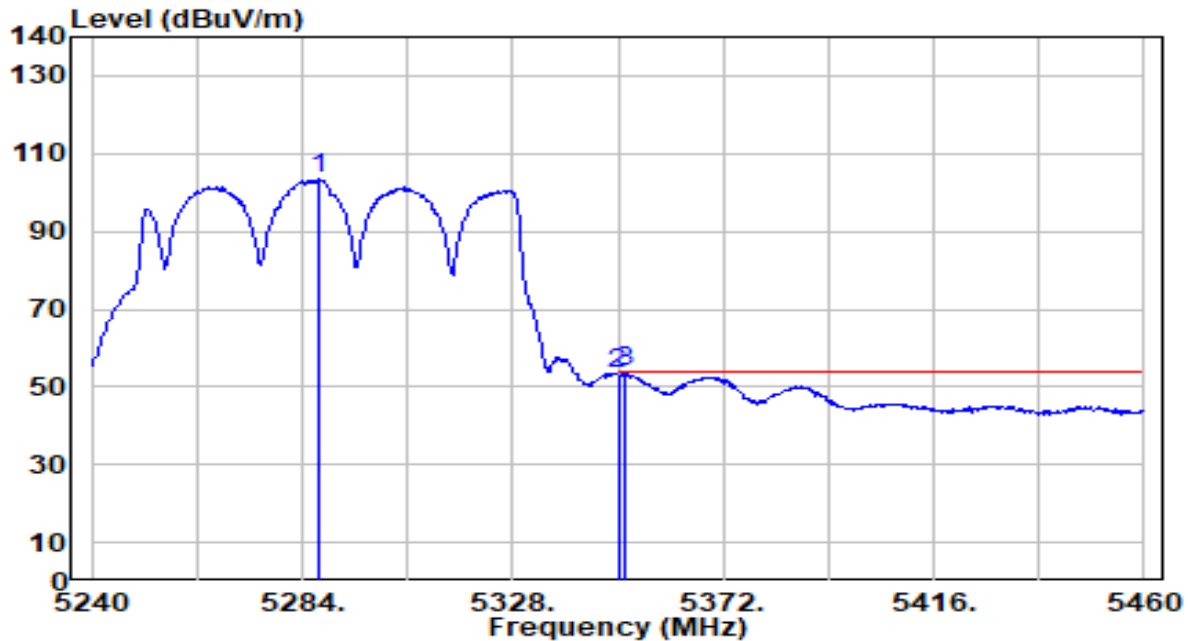


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.740	102.89	0.57	103.46	N/A	N/A	183	173	Average
2	5350.000	52.78	0.47	53.25	-0.75	54.00	183	173	Average
3	* 5351.540	53.28	0.47	53.75	-0.25	54.00	183	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

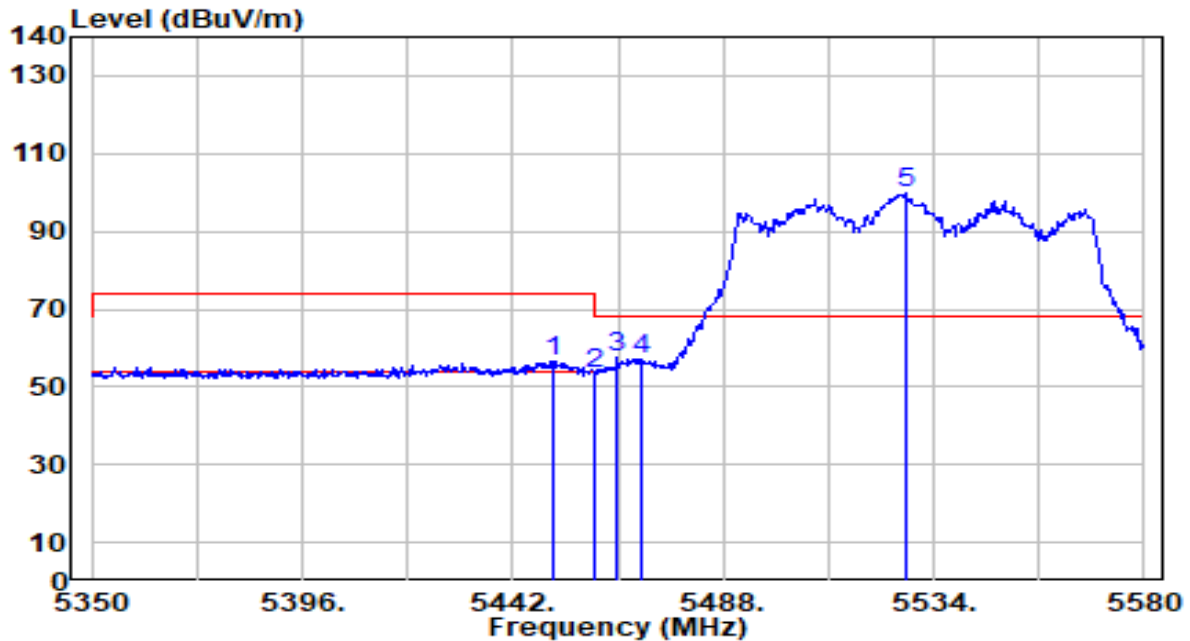


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.740	56.15	0.62	56.77	-17.23	74.00	300	98	Peak
2	5460.000	52.81	0.66	53.47	-20.53	74.00	300	98	Peak
3	* 5464.770	56.94	0.68	57.62	-10.58	68.20	300	98	Peak
4	5470.000	56.31	0.71	57.02	-11.18	68.20	300	98	Peak
5	5527.790	98.76	0.97	99.73	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

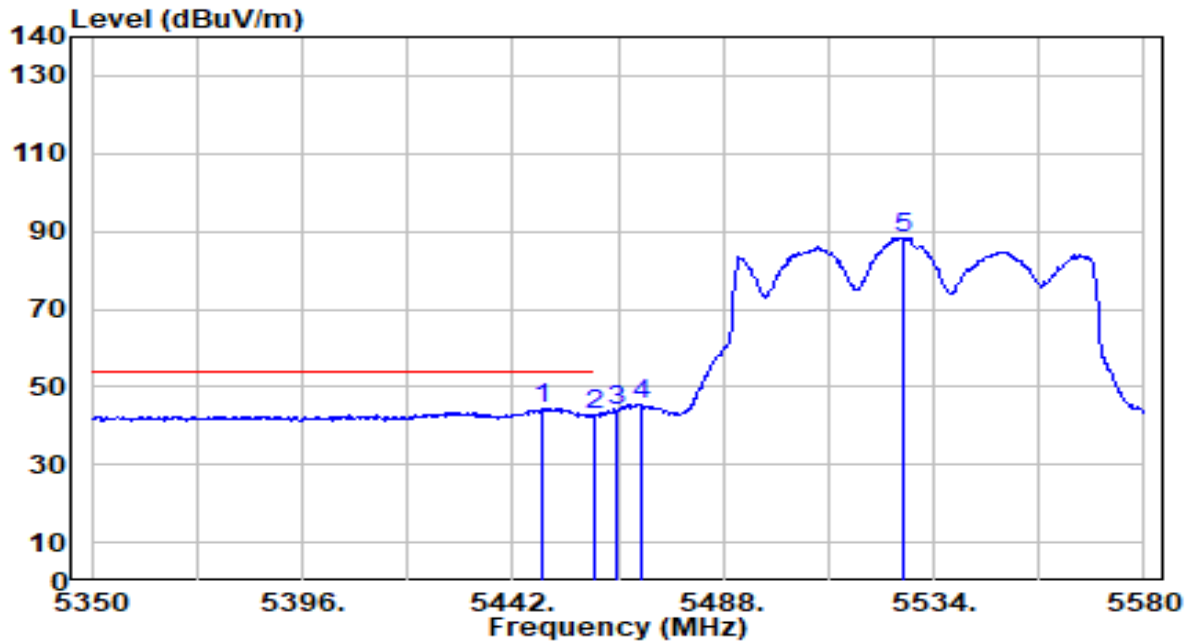


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.670	43.79	0.61	44.40	-9.60	54.00	300	98	Average
2		5460.000	41.90	0.66	42.56	-11.44	54.00	300	98	Average
3		5464.770	43.40	0.68	44.08	N/A	N/A	300	98	Average
4		5470.000	44.51	0.71	45.22	N/A	N/A	300	98	Average
5		5527.330	87.32	0.97	88.28	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

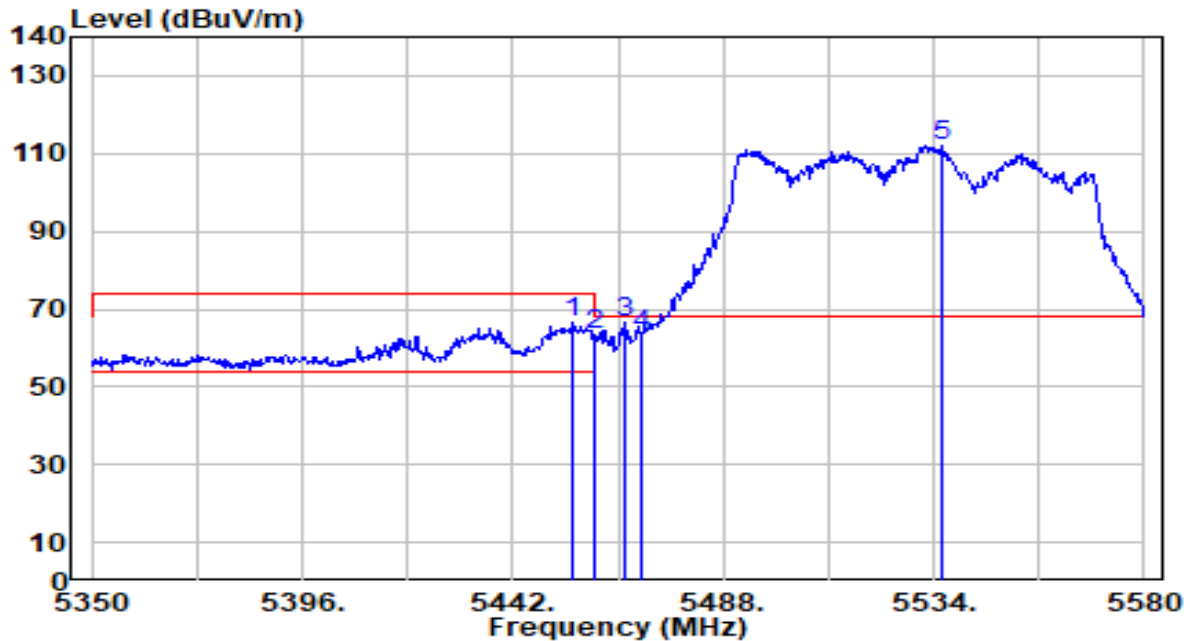


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.110	65.78	0.64	66.42	-7.58	74.00	169	138	Peak
2	5460.000	62.57	0.66	63.23	-10.77	74.00	169	138	Peak
3	* 5466.610	65.94	0.69	66.63	-1.57	68.20	169	138	Peak
4	5470.000	62.92	0.71	63.63	-4.57	68.20	169	138	Peak
5	5536.070	110.96	1.01	111.97	N/A	N/A	169	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

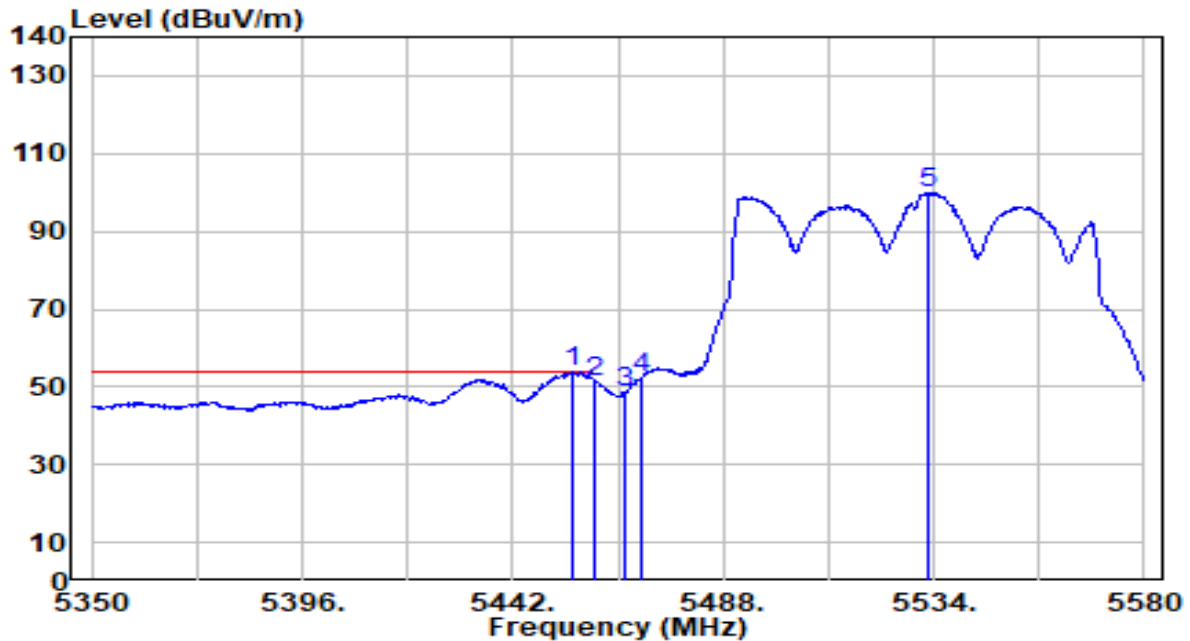


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.340	53.01	0.64	53.65	-0.35	54.00	169	138	Average
2		5460.000	50.74	0.66	51.40	-2.60	54.00	169	138	Average
3		5466.610	47.79	0.69	48.48	N/A	N/A	169	138	Average
4		5470.000	51.38	0.71	52.08	N/A	N/A	169	138	Average
5		5532.620	99.06	0.99	100.05	N/A	N/A	169	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	By PoE

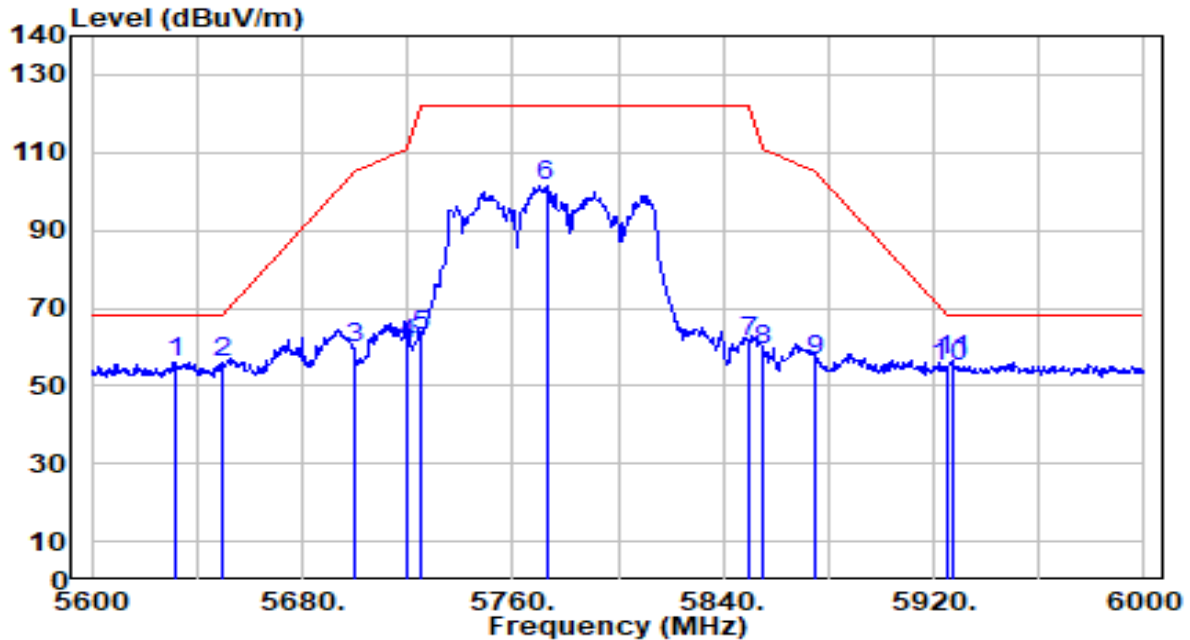


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5632.000	54.59	1.46	56.04	-12.16	68.20	207	99	Peak
2	5650.000	54.63	1.54	56.17	-12.03	68.20	207	99	Peak
3	5700.000	57.96	1.78	59.73	-45.47	105.20	207	99	Peak
4	5720.000	58.96	1.87	60.83	-49.97	110.80	207	99	Peak
5	5725.000	61.23	1.89	63.12	-59.08	122.20	207	99	Peak
6	5772.800	99.14	2.12	101.26	N/A	N/A	207	99	Peak
7	5850.000	59.20	2.25	61.45	-60.75	122.20	207	99	Peak
8	5855.000	56.75	2.25	59.00	-51.80	110.80	207	99	Peak
9	5875.000	54.13	2.26	56.39	-48.81	105.20	207	99	Peak
10	5925.000	52.75	2.27	55.02	-13.18	68.20	207	99	Peak
11	* 5926.800	54.21	2.27	56.48	-11.72	68.20	207	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	By PoE

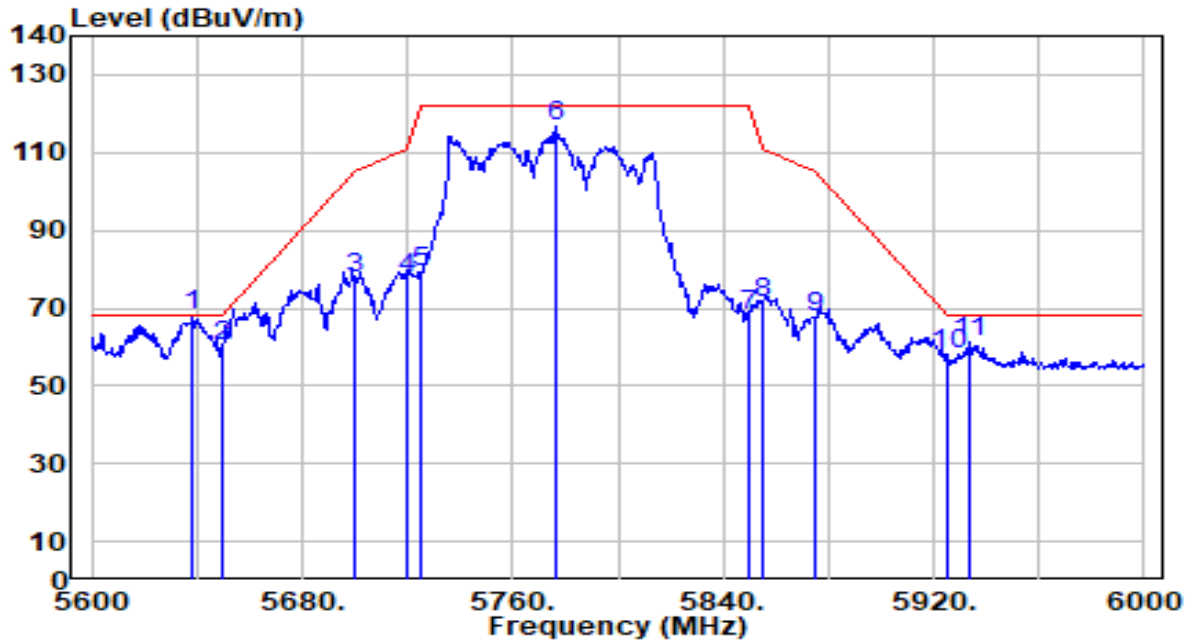


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.400	66.47	1.49	67.96	-0.24	68.20	202	188	Peak
2		5650.000	58.64	1.54	60.18	-8.02	68.20	202	188	Peak
3		5700.000	75.88	1.78	77.66	-27.54	105.20	202	188	Peak
4		5720.000	75.86	1.87	77.73	-33.07	110.80	202	188	Peak
5		5725.000	77.38	1.89	79.27	-42.93	122.20	202	188	Peak
6		5776.400	114.78	2.13	116.92	N/A	N/A	202	188	Peak
7		5850.000	65.72	2.25	67.97	-54.23	122.20	202	188	Peak
8		5855.000	68.89	2.25	71.15	-39.65	110.80	202	188	Peak
9		5875.000	65.61	2.26	67.87	-37.33	105.20	202	188	Peak
10		5925.000	55.66	2.27	57.93	-10.27	68.20	202	188	Peak
11		5933.600	59.07	2.27	61.33	-6.87	68.20	202	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

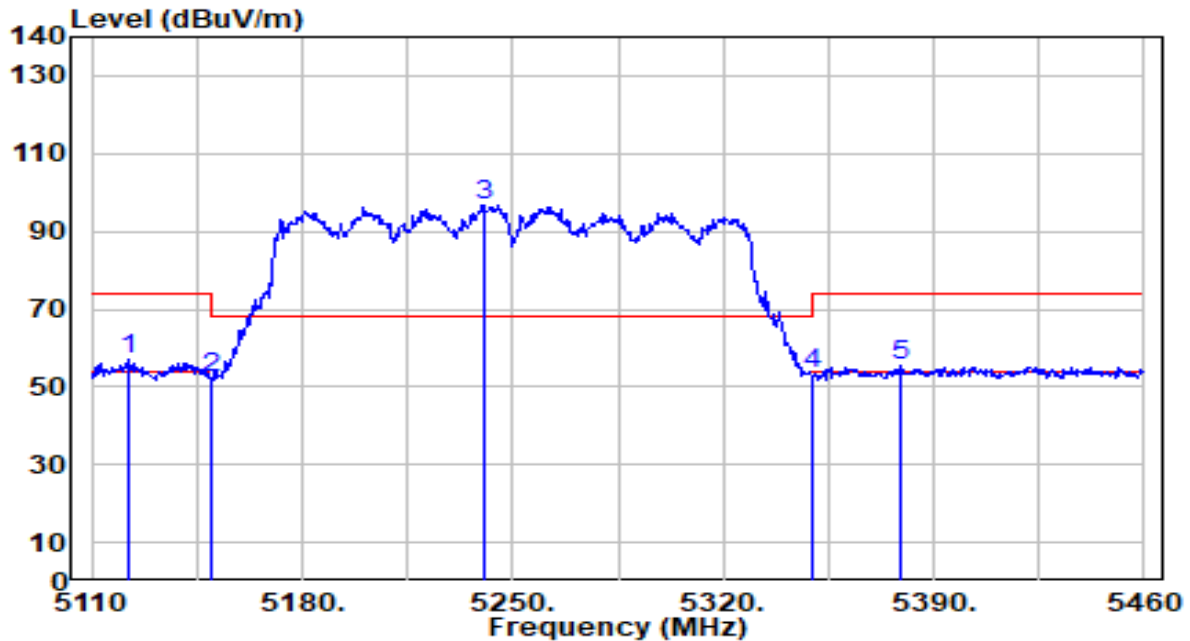


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5121.900	56.23	0.63	56.85	-17.15	74.00	100	133	Peak
2		5150.000	51.87	0.65	52.53	-21.47	74.00	100	133	Peak
3		5240.550	96.09	0.64	96.73	N/A	N/A	100	133	Peak
4		5350.000	52.69	0.47	53.16	-20.84	74.00	100	133	Peak
5		5379.150	55.18	0.43	55.61	-18.39	74.00	100	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

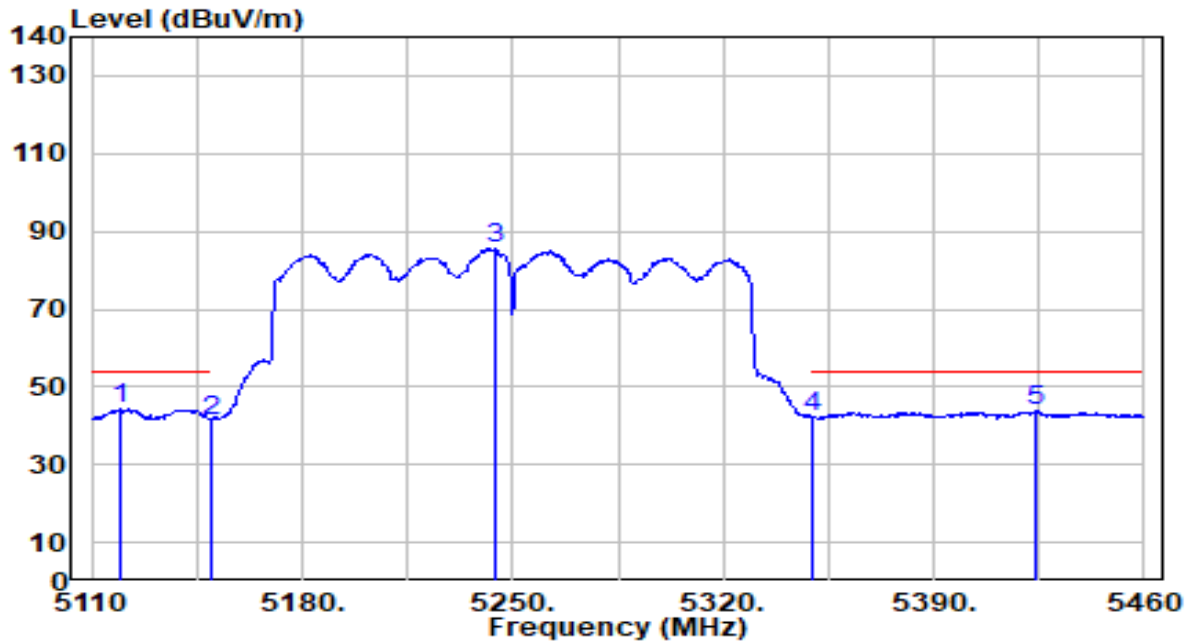


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5119.100	43.94	0.62	44.56	-9.44	54.00	100	133	Average
2		5150.000	40.53	0.65	41.18	-12.82	54.00	100	133	Average
3		5244.050	84.90	0.63	85.54	N/A	N/A	100	133	Average
4		5350.000	41.71	0.47	42.18	-11.82	54.00	100	133	Average
5		5423.950	43.19	0.50	43.69	-10.31	54.00	100	133	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

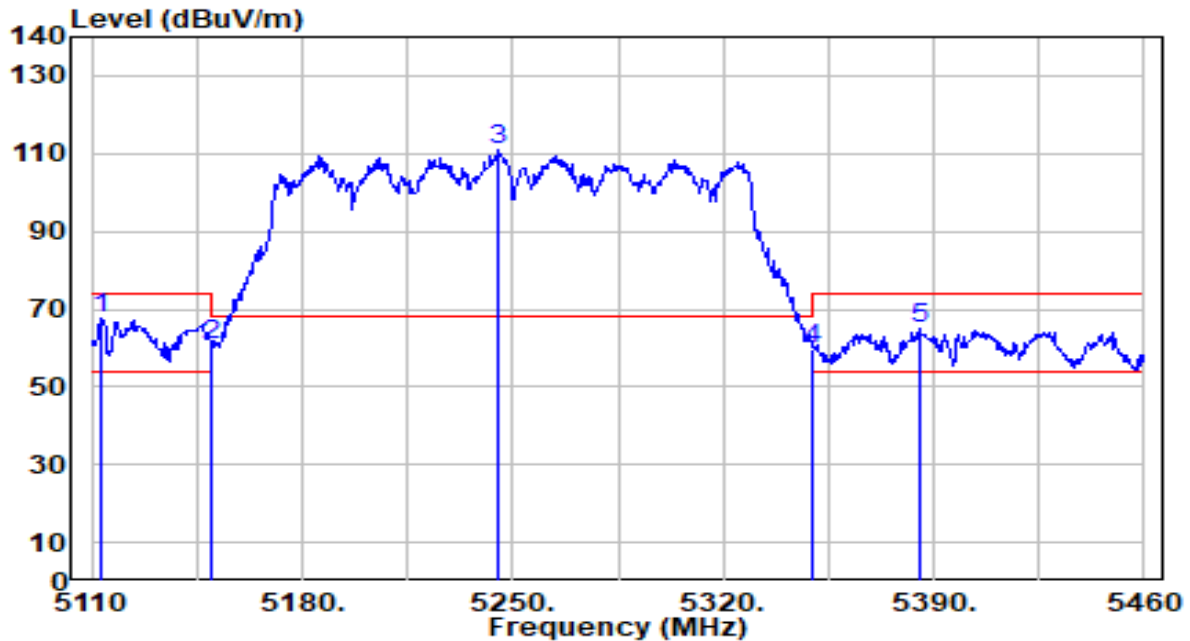


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5113.500	67.04	0.62	67.66	-6.34	74.00	219	172	Peak
2		5150.000	60.12	0.65	60.78	-13.22	74.00	219	172	Peak
3		5245.100	110.43	0.63	111.06	N/A	N/A	219	172	Peak
4		5350.000	59.35	0.47	59.82	-14.18	74.00	219	172	Peak
5		5385.450	64.49	0.42	64.91	-9.09	74.00	219	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-10-15
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

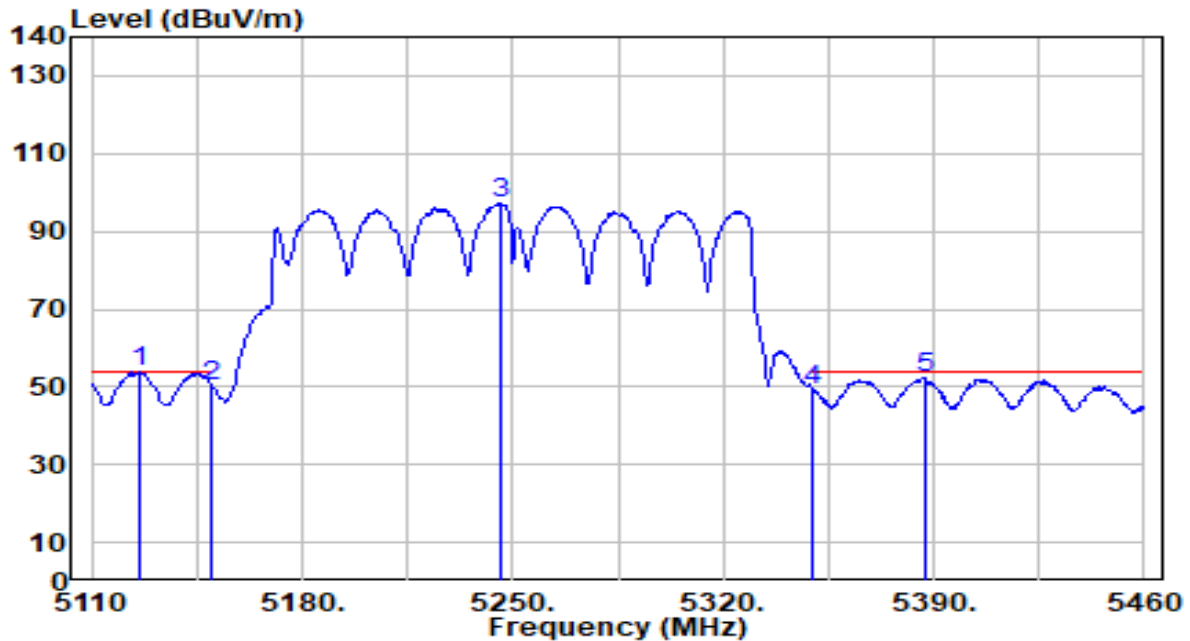


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5126.100	53.09	0.63	53.72	-0.28	54.00	219	172	Average
2		5150.000	49.58	0.65	50.23	-3.77	54.00	219	172	Average
3		5246.150	96.54	0.63	97.17	N/A	N/A	219	172	Average
4		5350.000	48.52	0.47	48.99	-5.01	54.00	219	172	Average
5		5386.850	51.84	0.41	52.25	-1.75	54.00	219	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

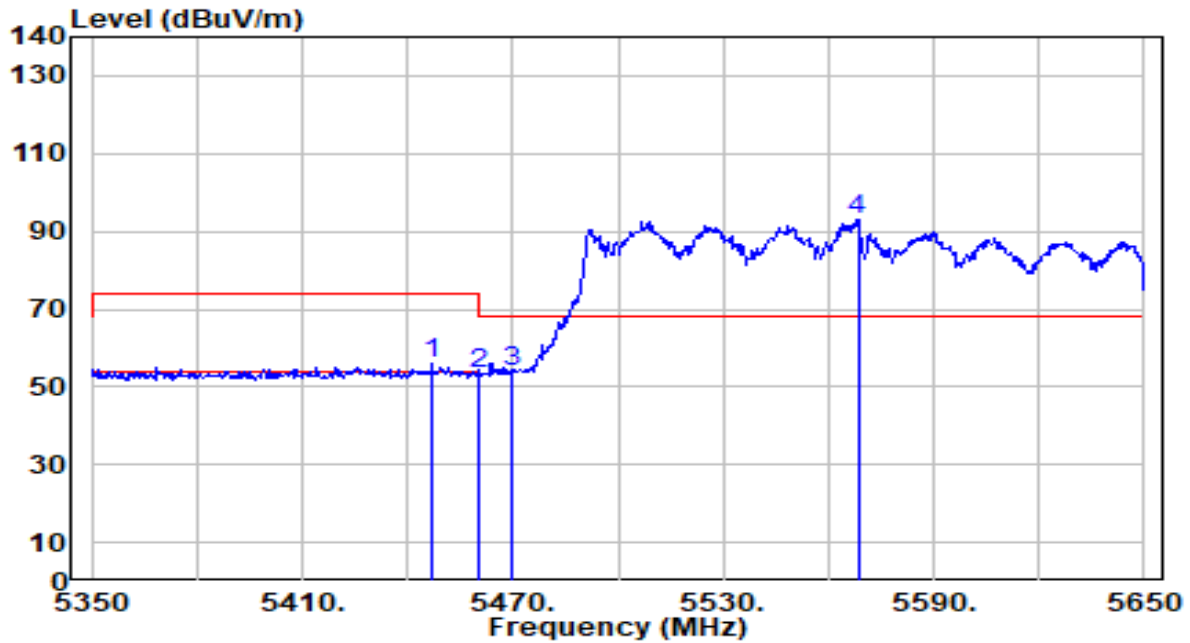


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.900	55.24	0.60	55.85	-18.15	74.00	300	98	Peak
2	5460.000	52.80	0.66	53.46	-20.54	74.00	300	98	Peak
3	* 5470.000	53.36	0.71	54.07	-14.13	68.20	300	98	Peak
4	5568.400	91.63	1.16	92.79	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

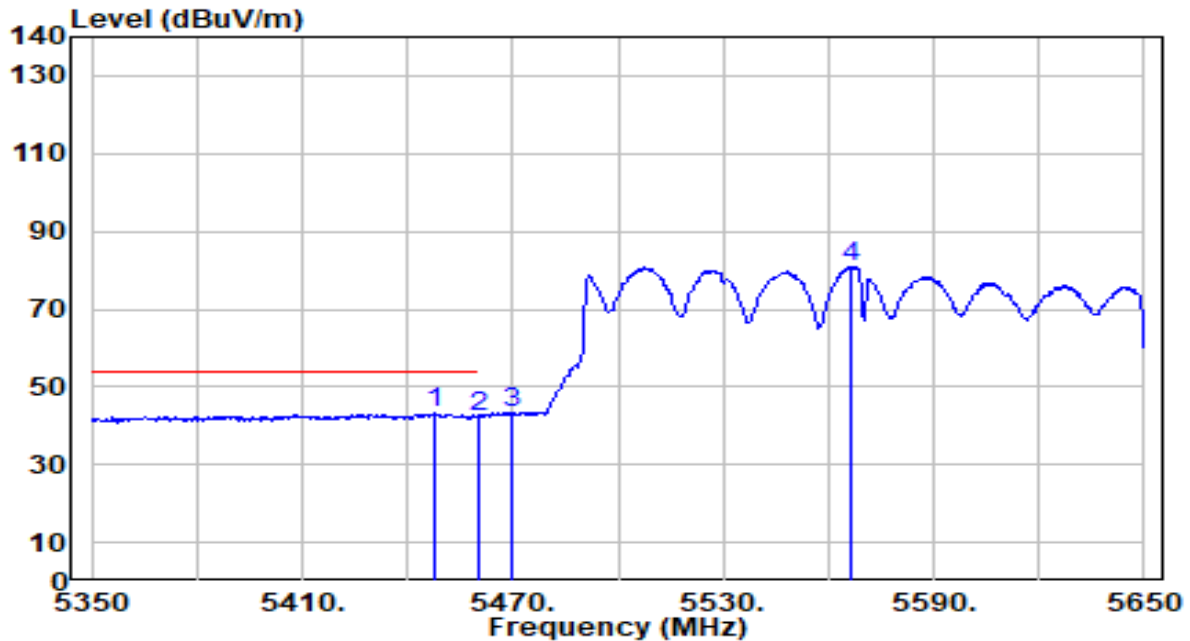


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5447.800	42.49	0.61	43.10	-10.90	54.00	300	98	Average
2		5460.000	41.72	0.66	42.38	-11.62	54.00	300	98	Average
3		5470.000	42.82	0.71	43.53	N/A	N/A	300	98	Average
4		5566.600	79.71	1.15	80.86	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

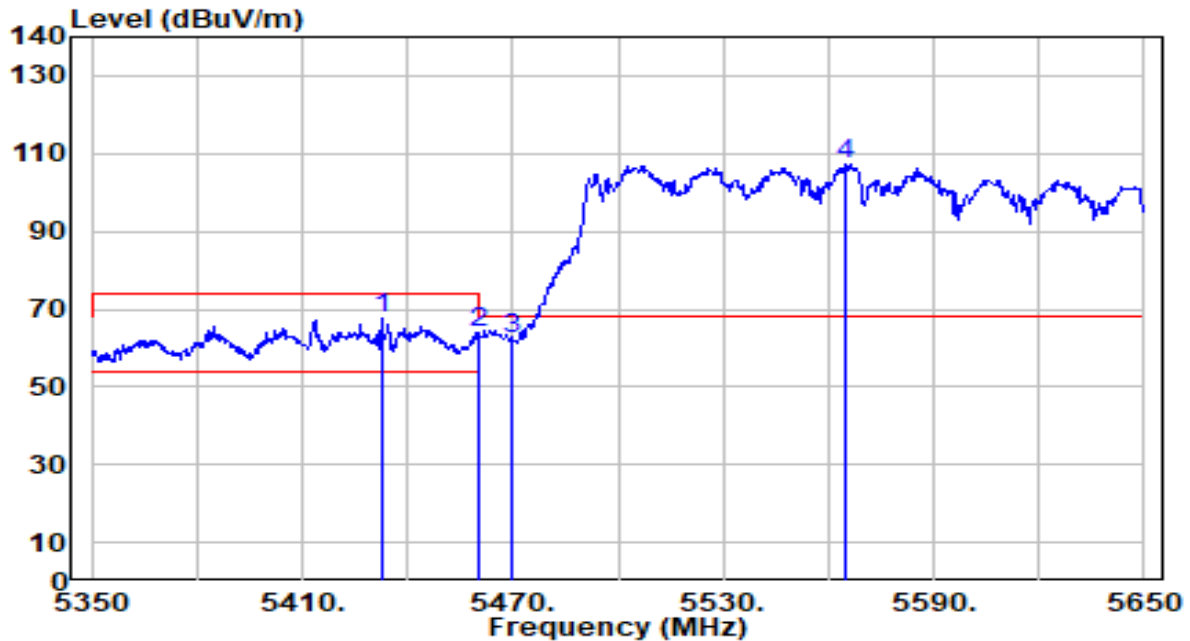


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5432.800	66.88	0.54	67.42	-6.58	74.00	213	148	Peak
2	5460.000	63.13	0.66	63.79	-10.21	74.00	213	148	Peak
3	* 5470.000	61.48	0.71	62.18	-6.02	68.20	213	148	Peak
4	5564.800	106.13	1.14	107.27	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

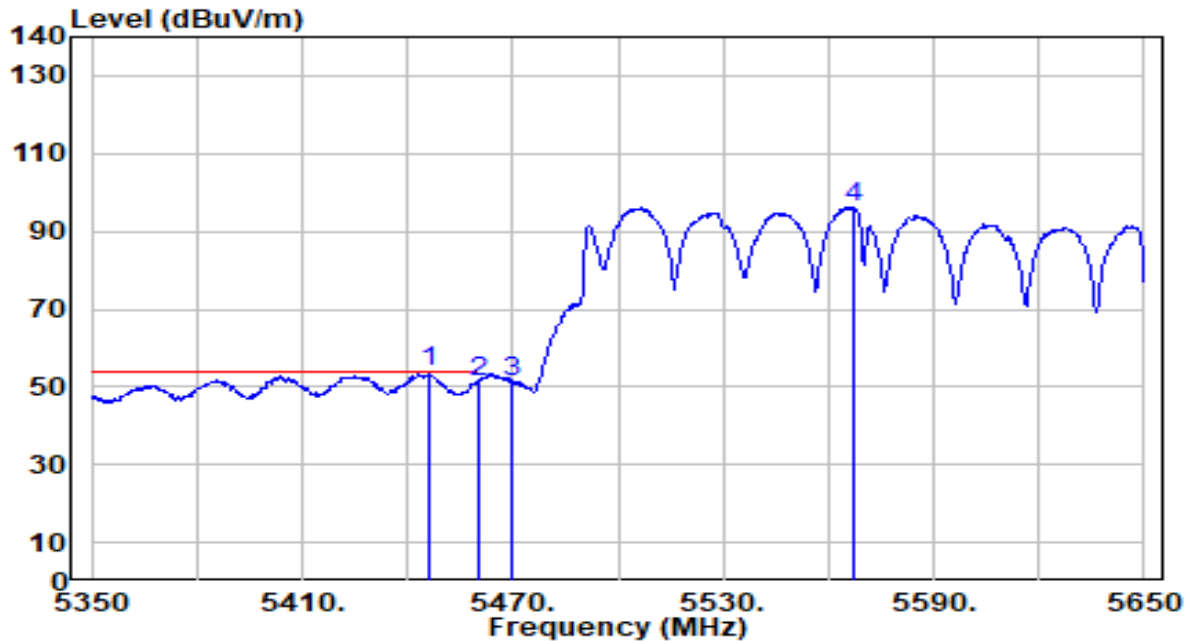


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5446.000	53.21	0.60	53.80	-0.20	54.00	213	148	Average
2		5460.000	50.64	0.66	51.30	-2.70	54.00	213	148	Average
3		5470.000	50.31	0.71	51.02	N/A	N/A	213	148	Average
4		5566.900	94.99	1.15	96.14	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

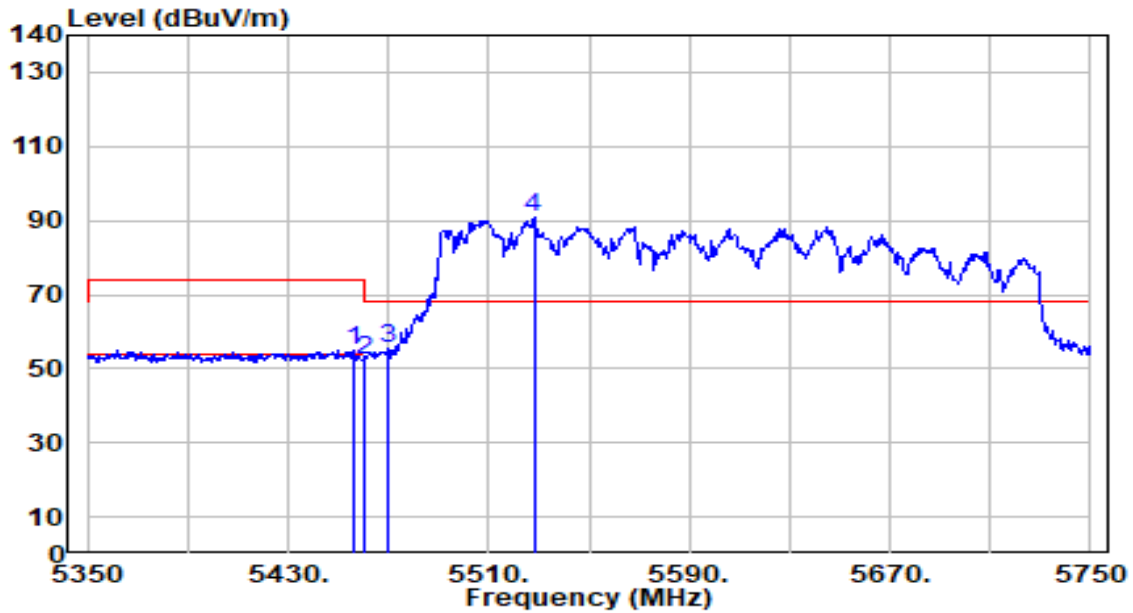


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.400	54.43	0.65	55.08	-18.92	74.00	300	98	Peak
2	5460.000	51.82	0.66	52.49	-21.51	74.00	300	98	Peak
3	* 5470.000	54.59	0.71	55.29	-12.91	68.20	300	98	Peak
4	5528.000	89.83	0.97	90.80	N/A	N/A	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

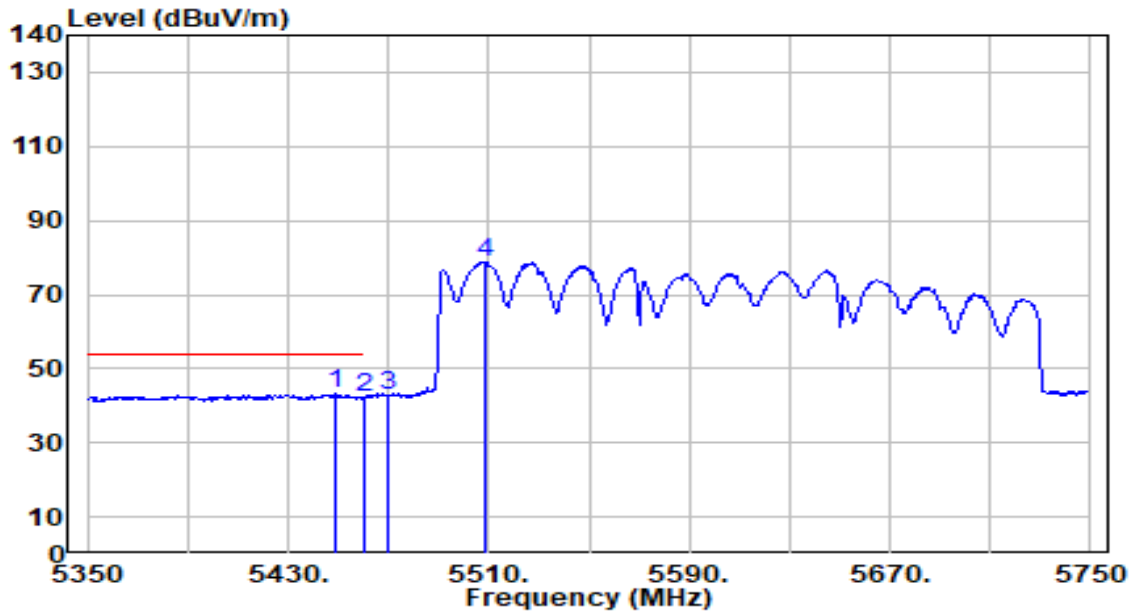


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.200	42.59	0.61	43.20	-10.80	54.00	300	98	Average
2		5460.000	41.82	0.66	42.48	-11.52	54.00	300	98	Average
3		5470.000	42.10	0.71	42.81	N/A	N/A	300	98	Average
4		5508.400	78.03	0.88	78.91	N/A	N/A	300	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

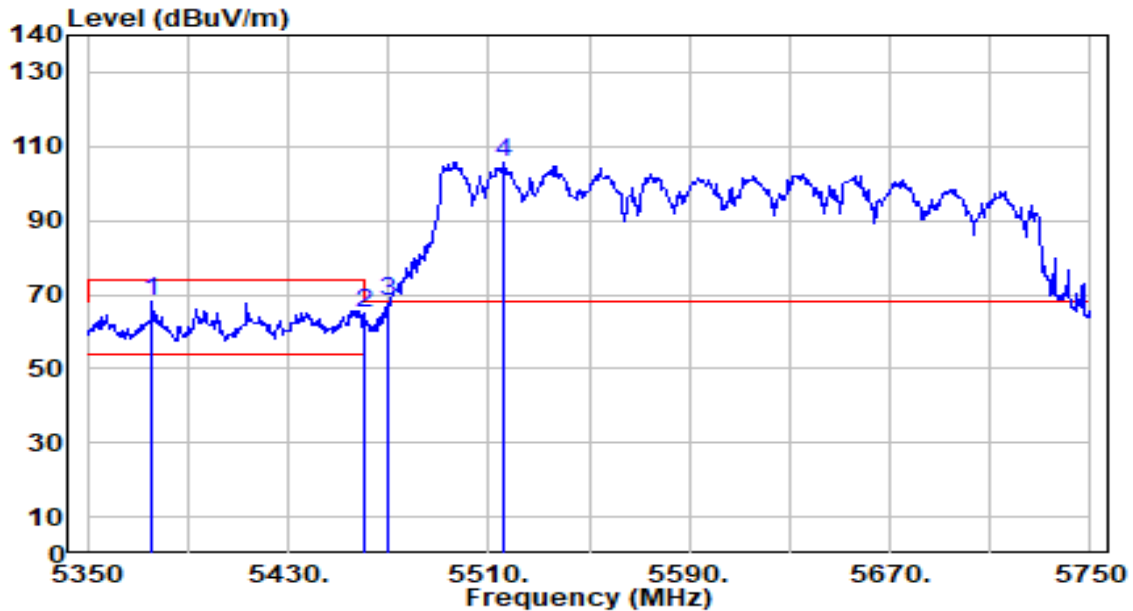


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5375.600	67.89	0.43	68.32	-5.68	74.00	213	148	Peak
2	5460.000	64.50	0.66	65.16	-8.84	74.00	213	148	Peak
3	* 5470.000	67.28	0.71	67.99	-0.21	68.20	213	148	Peak
4	5515.600	104.66	0.91	105.57	N/A	N/A	213	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-08-27
Factor	DRH18-E	Temp. / Humidity	21°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

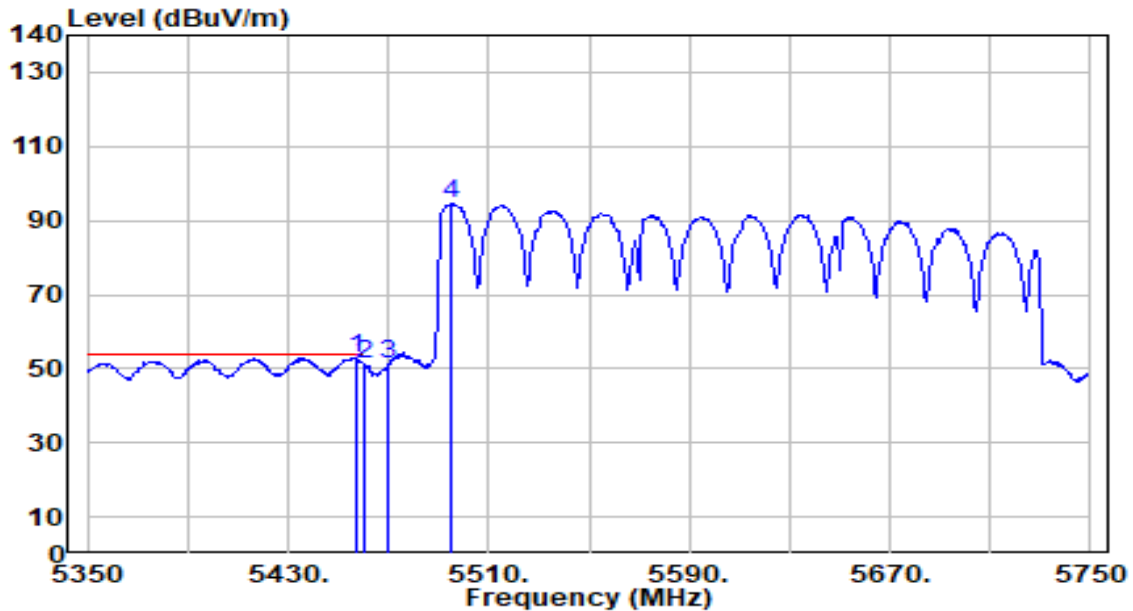

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.800	52.43	0.65	53.08	-0.92	54.00	213	148	Average
2		5460.000	50.68	0.66	51.34	-2.66	54.00	213	148	Average
3		5470.000	50.35	0.71	51.06	N/A	N/A	213	148	Average
4		5495.200	93.72	0.82	94.54	N/A	N/A	213	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

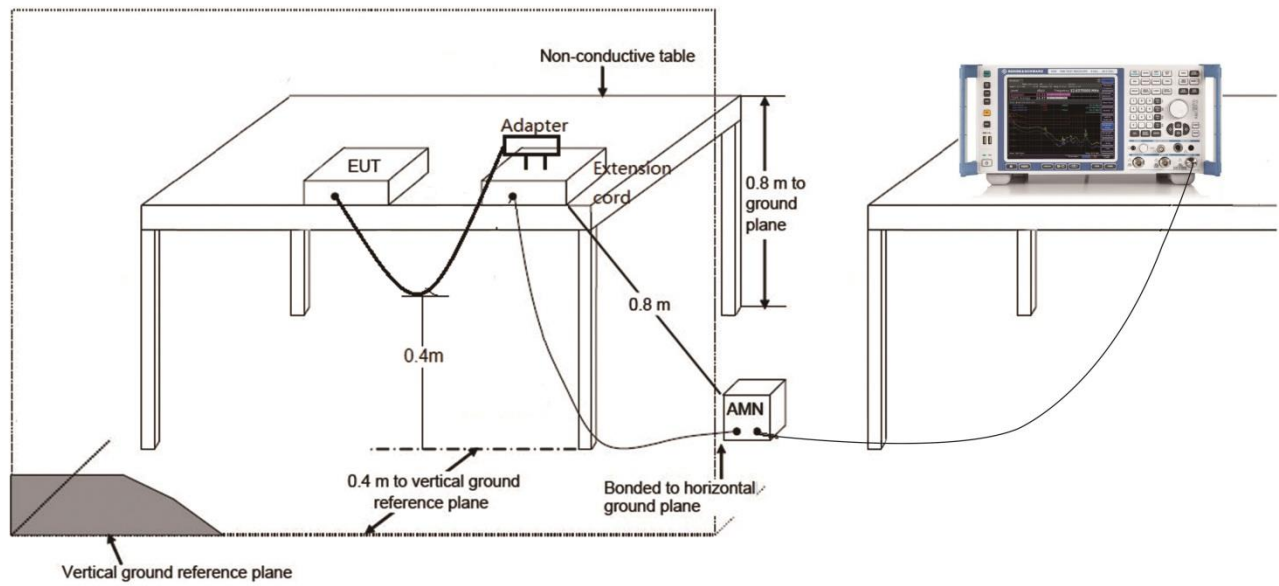

7.10.4.Test Result

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH40_Ant 0+1	Test Voltage	AC 120V/60Hz

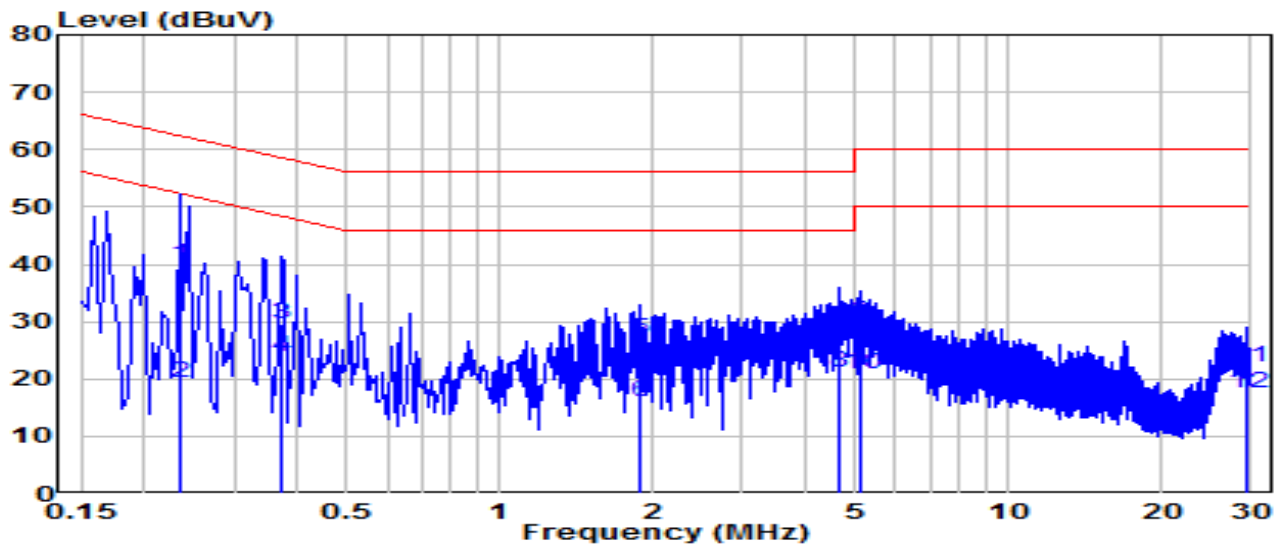


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.235	30.25	9.63	39.88	-22.37	62.25	QP
2	*	0.235	9.60	9.63	19.24	-33.02	52.25	Average
3		0.370	20.06	9.64	29.71	-28.78	58.49	QP
4		0.370	14.28	9.64	23.93	-24.56	48.49	Average
5		1.896	17.24	9.70	26.94	-29.06	56.00	QP
6		1.896	6.25	9.70	15.95	-30.05	46.00	Average
7		4.632	19.33	9.74	29.07	-26.93	56.00	QP
8		4.632	11.44	9.74	21.18	-24.82	46.00	Average
9		5.095	20.12	9.75	29.87	-30.13	60.00	QP
10		5.095	11.12	9.75	20.87	-29.13	50.00	Average
11		29.528	12.06	9.93	21.99	-38.01	60.00	QP
12		29.528	7.70	9.93	17.63	-32.37	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH40_Ant 0+1	Test Voltage	AC 120V/60Hz

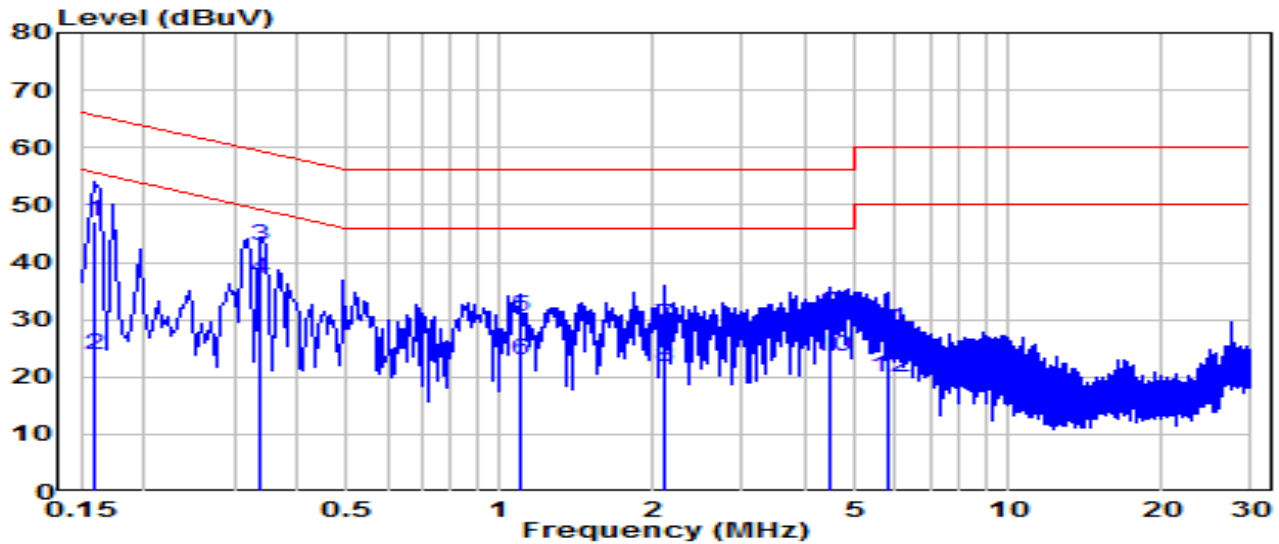


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	37.49	9.63	47.12	-18.40	65.52	QP
2	0.159	14.26	9.63	23.89	-31.62	55.52	Average
3	* 0.339	33.31	9.64	42.95	-16.28	59.23	QP
4	* 0.339	27.43	9.64	37.07	-12.16	49.23	Average
5	1.099	20.80	9.68	30.48	-25.52	56.00	QP
6	1.099	13.21	9.68	22.89	-23.11	46.00	Average
7	2.103	19.32	9.71	29.03	-26.97	56.00	QP
8	2.103	11.97	9.71	21.69	-24.31	46.00	Average
9	4.438	21.39	9.75	31.14	-24.86	56.00	QP
10	4.438	13.79	9.75	23.54	-22.46	46.00	Average
11	5.783	18.56	9.78	28.34	-31.66	60.00	QP
12	5.783	10.16	9.78	19.94	-30.06	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH40_Ant 0+1	Test Voltage	AC 240V/60Hz

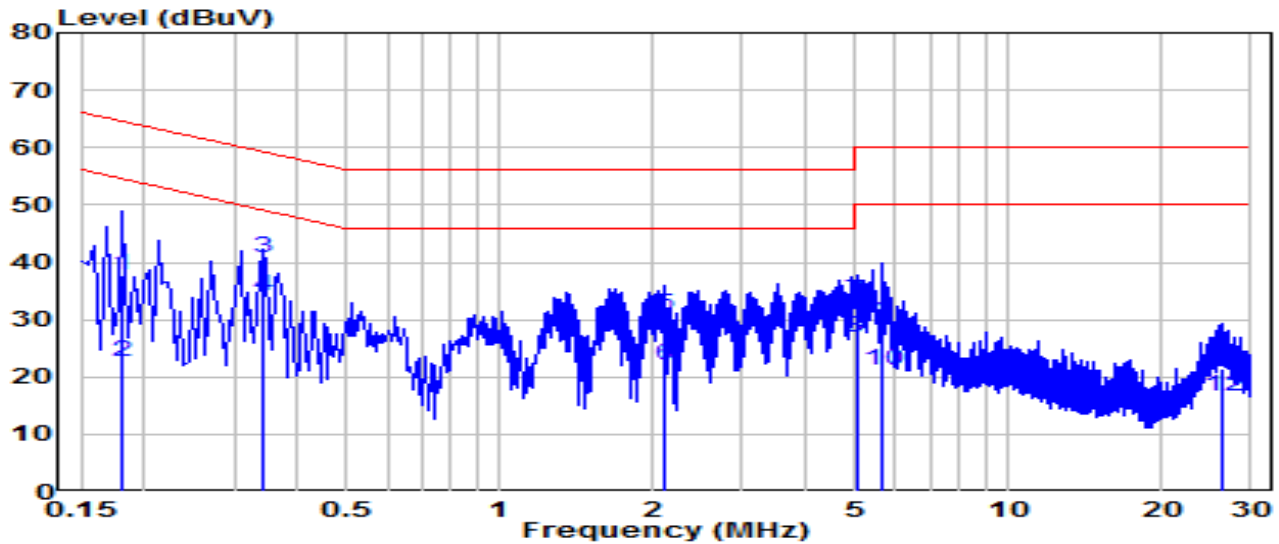


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.181	28.20	9.63	37.83	-26.58	64.42	QP
2	0.181	13.14	9.63	22.78	-31.64	54.42	Average
3	* 0.343	31.08	9.64	40.72	-18.40	59.12	QP
4	* 0.343	24.41	9.64	34.05	-15.07	49.12	Average
5	2.103	21.15	9.70	30.86	-25.14	56.00	QP
6	2.103	12.41	9.70	22.11	-23.89	46.00	Average
7	5.019	23.46	9.75	33.20	-26.80	60.00	QP
8	5.019	17.21	9.75	26.96	-23.04	50.00	Average
9	5.671	19.61	9.76	29.37	-30.63	60.00	QP
10	5.671	11.28	9.76	21.04	-28.96	50.00	Average
11	26.391	11.65	9.92	21.58	-38.42	60.00	QP
12	26.391	6.82	9.92	16.74	-33.26	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Wall Plate Wi-Fi 7 Access Point	Date of Test	2024-09-13
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_Band1_CH40_Ant 0+1	Test Voltage	AC 240V/60Hz

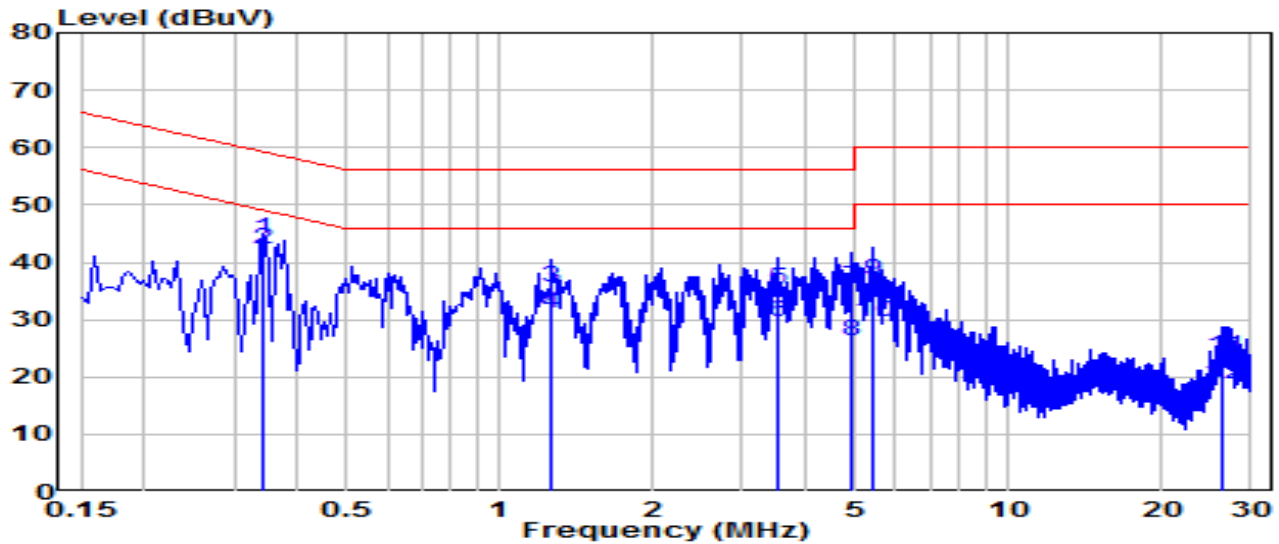

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.343	34.42	9.64	44.06	-15.06	59.12	QP
2	*	0.343	32.74	9.64	42.38	-6.74	49.12	Average
3		1.257	25.95	9.69	35.64	-20.36	56.00	QP
4		1.257	21.36	9.69	31.04	-14.96	46.00	Average
5		3.529	25.67	9.73	35.41	-20.59	56.00	QP
6		3.529	19.92	9.73	29.65	-16.35	46.00	Average
7		4.897	25.96	9.76	35.71	-20.29	56.00	QP
8		4.897	16.66	9.76	26.41	-19.59	46.00	Average
9		5.401	27.09	9.77	36.85	-23.15	60.00	QP
10		5.401	19.96	9.77	29.73	-20.27	50.00	Average
11		26.517	13.67	10.03	23.70	-36.30	60.00	QP
12		26.517	8.83	10.03	18.86	-31.14	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2408TW0107-UT” file.

Appendix B : EUT Photograph

Refer to “2408TW0107-UE” file.

Appendix C : Internal Photograph

Refer to “2408TW0107-UI” file.

_____ The End _____