


EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

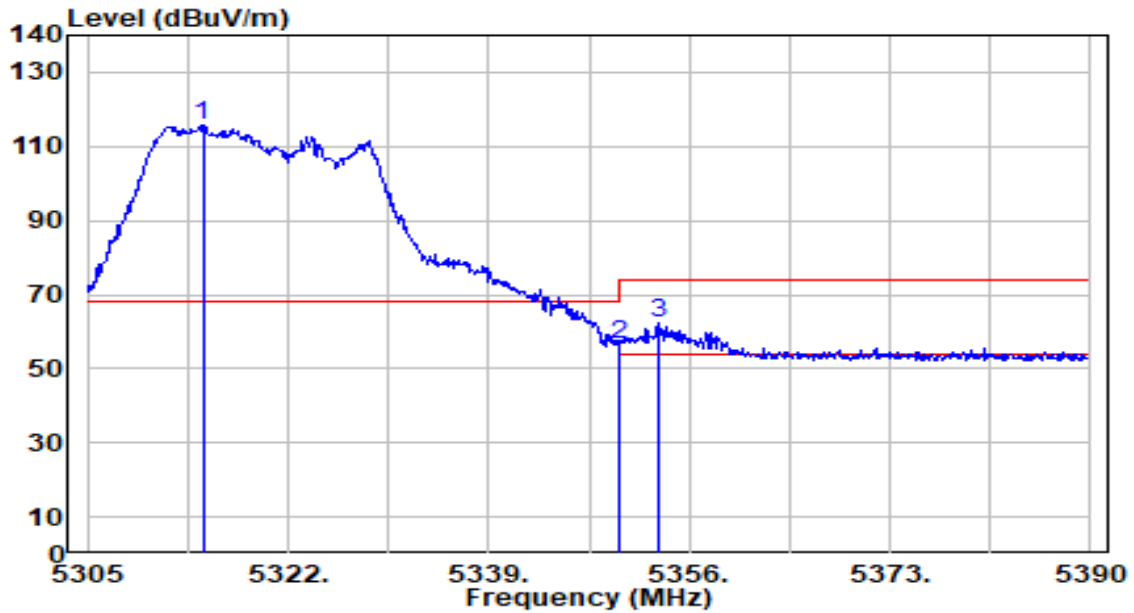


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.775	115.01	0.54	115.55	N/A	N/A	119	116	Peak
2	5350.000	56.21	0.51	56.72	-17.28	74.00	119	116	Peak
3	* 5353.365	61.86	0.50	62.37	-11.63	74.00	119	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

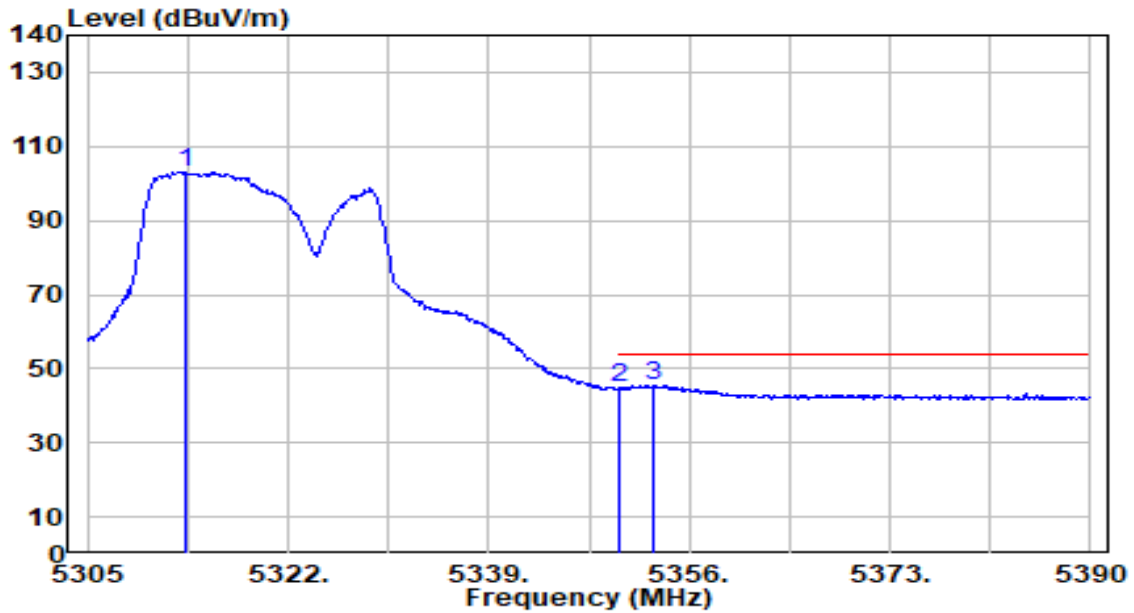


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.245	102.67	0.55	103.22	N/A	N/A	119	116	Average
2	5350.000	44.37	0.51	44.88	-9.12	54.00	119	116	Average
3	* 5352.855	44.94	0.50	45.45	-8.55	54.00	119	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

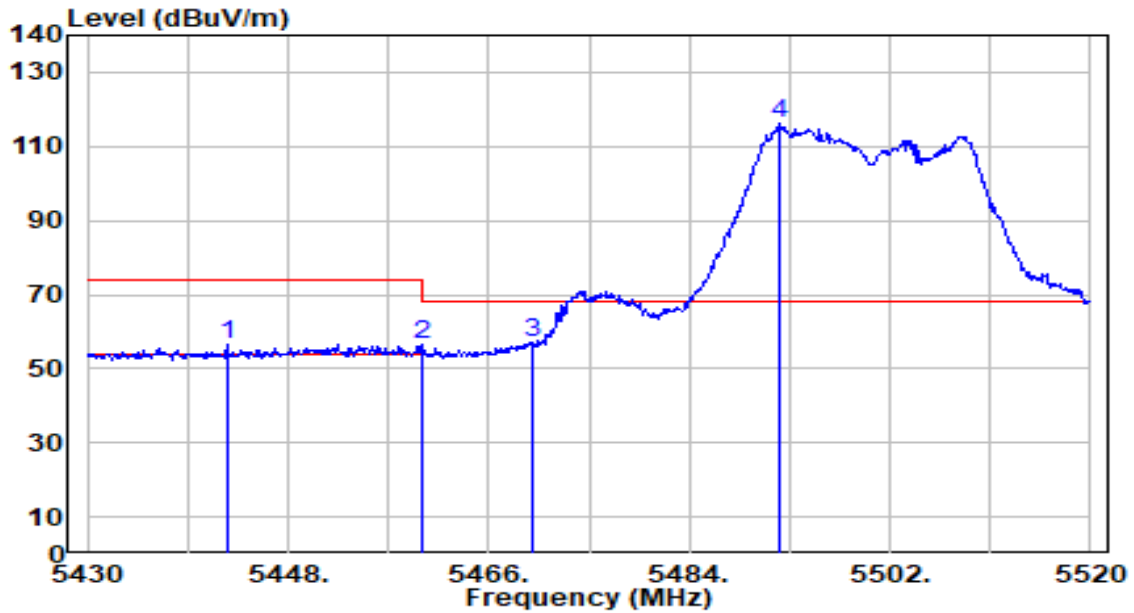


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.510	55.76	0.59	56.35	-17.65	74.00	115	183	Peak
2	5460.000	55.87	0.65	56.52	-17.48	74.00	115	183	Peak
3	* 5470.000	56.30	0.69	56.99	-11.21	68.20	115	183	Peak
4	5492.190	115.20	0.76	115.96	N/A	N/A	115	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

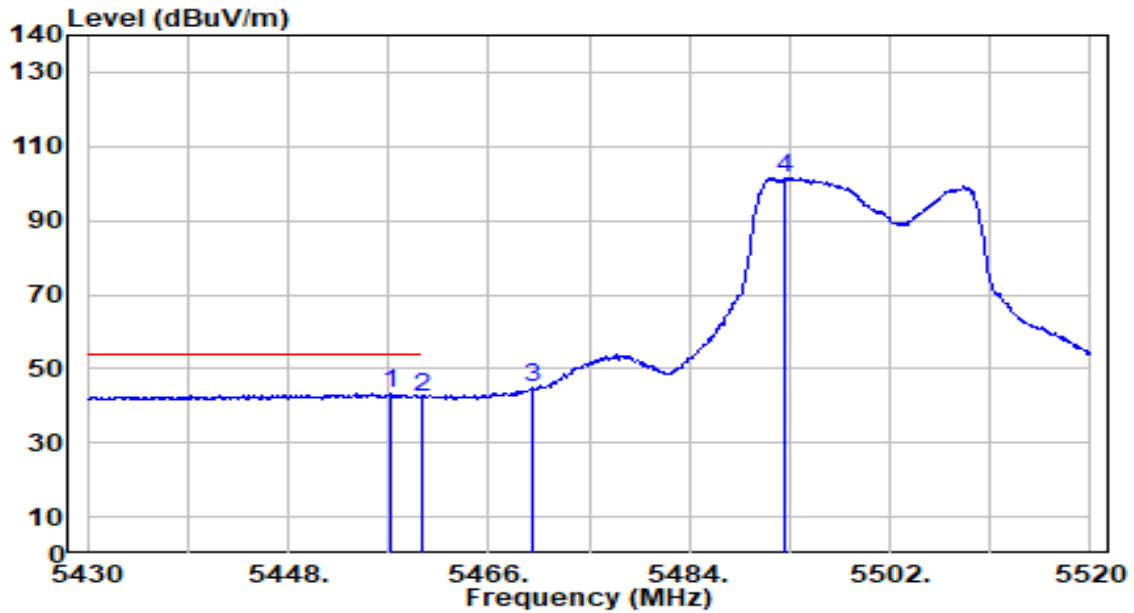


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5457.270	42.46	0.64	43.10	-10.90	54.00	115	183	Average
2		5460.000	41.79	0.65	42.44	-11.56	54.00	115	183	Average
3		5470.000	44.14	0.69	44.82	N/A	N/A	115	183	Average
4		5492.640	100.75	0.76	101.51	N/A	N/A	115	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

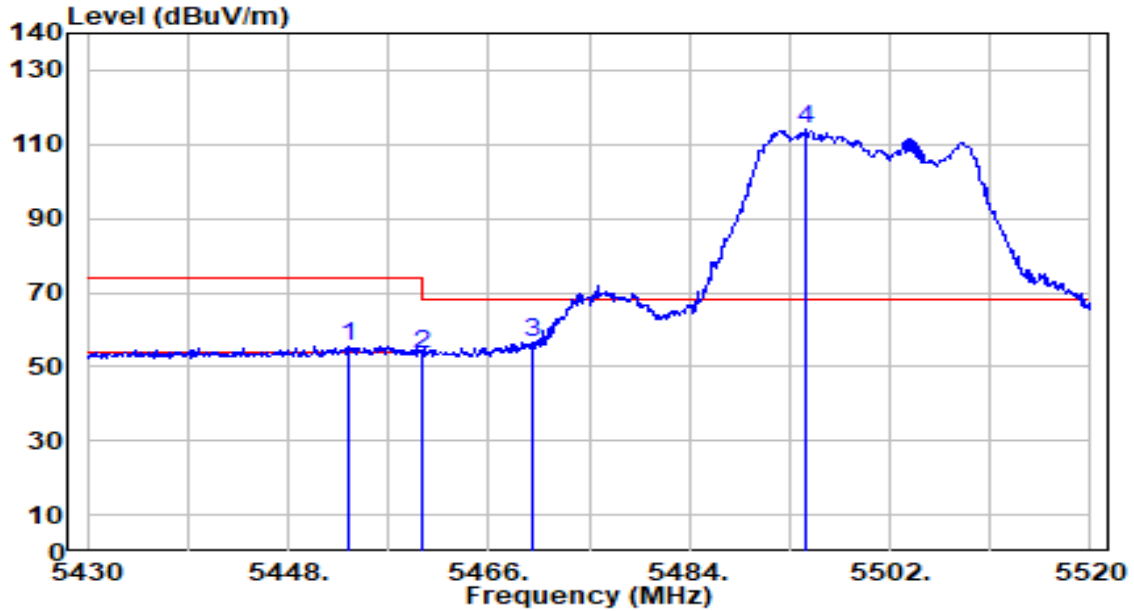


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.400	54.90	0.63	55.53	-18.47	74.00	119	116	Peak
2	5460.000	52.74	0.65	53.40	-20.60	74.00	119	116	Peak
3	* 5470.000	55.81	0.69	56.50	-11.70	68.20	119	116	Peak
4	5494.440	113.39	0.77	114.16	N/A	N/A	119	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

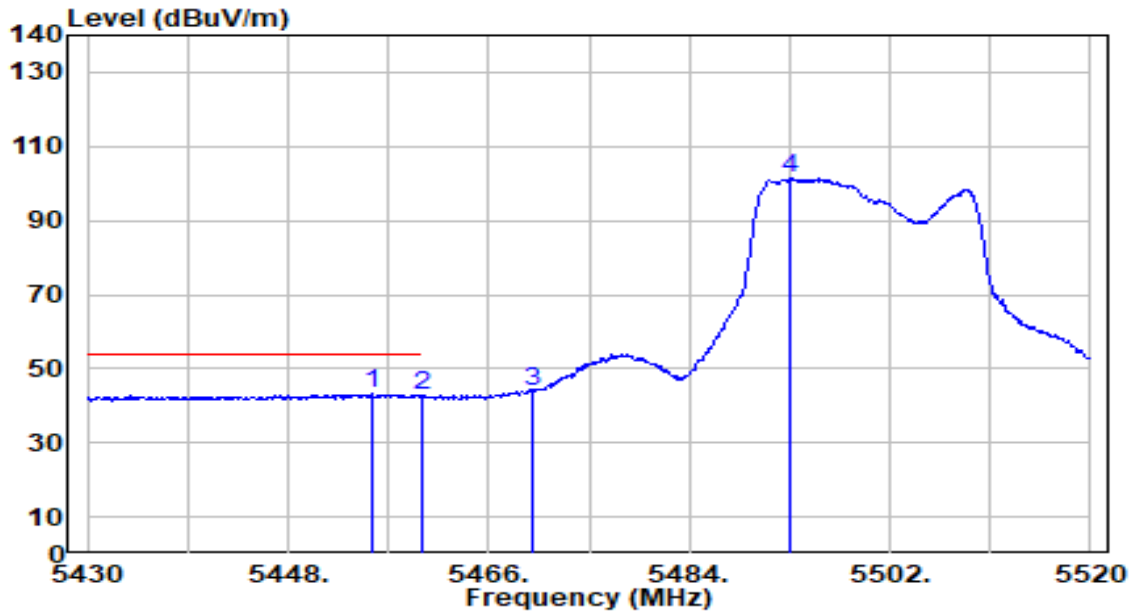


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5455.560	42.50	0.64	43.14	-10.86	54.00	119	116	Average
2		5460.000	42.39	0.65	43.04	-10.96	54.00	119	116	Average
3		5470.000	43.07	0.69	43.75	N/A	N/A	119	116	Average
4		5493.000	100.83	0.77	101.59	N/A	N/A	119	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

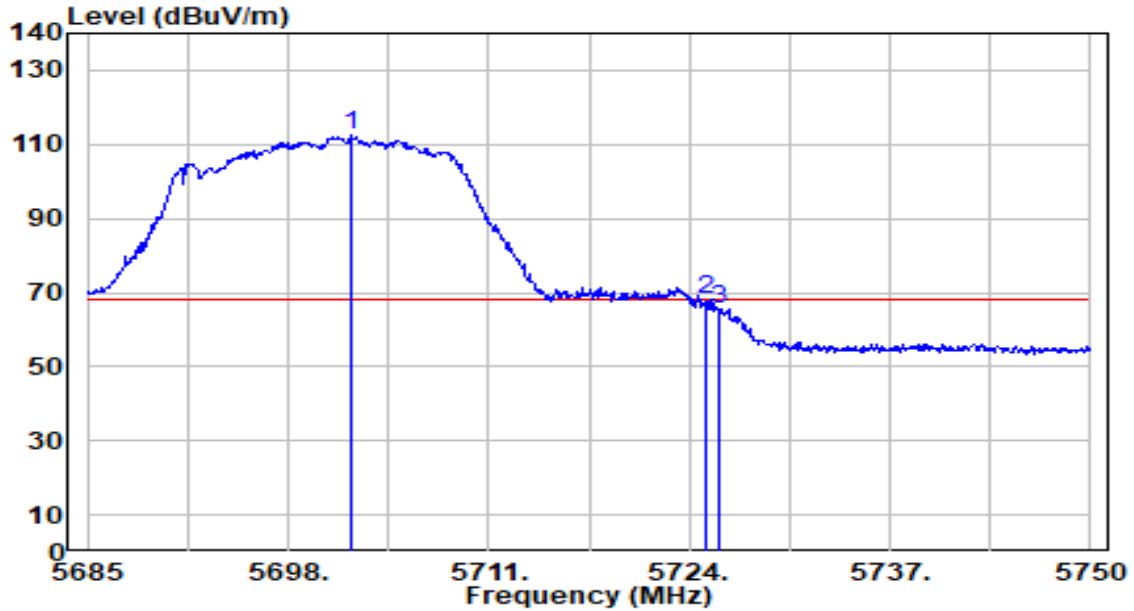


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.030	110.88	1.73	112.61	N/A	N/A	115	114	Peak
2	* 5725.000	66.18	1.86	68.04	-0.16	68.20	115	114	Peak
3	5725.950	63.84	1.87	65.71	-2.49	68.20	115	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

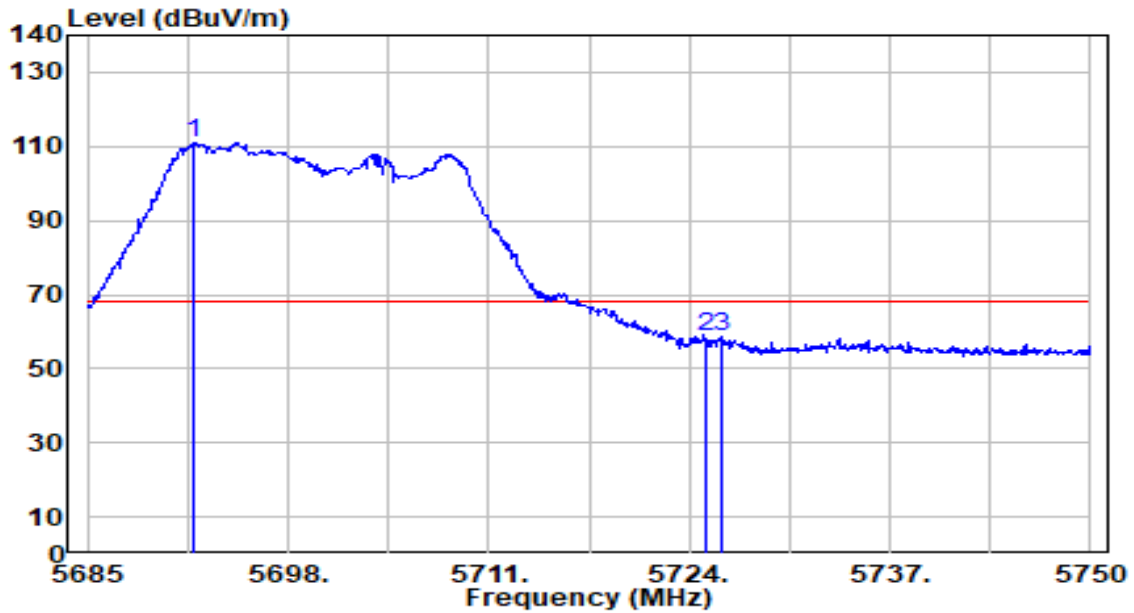


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5691.890	109.17	1.68	110.85	N/A	N/A	119	116	Peak
2	* 5725.000	56.96	1.86	58.83	-9.37	68.20	119	116	Peak
3	5726.080	56.64	1.87	58.51	-9.69	68.20	119	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

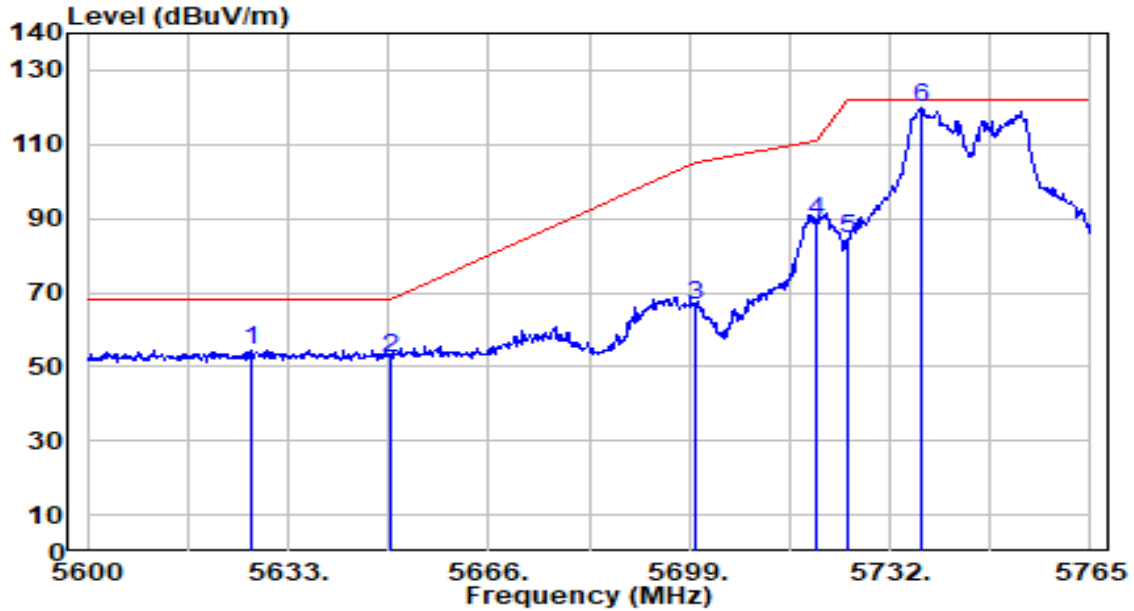


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5627.060	53.29	1.31	54.60	-13.60	68.20	100	180	Peak
2		5650.000	50.94	1.44	52.38	-15.82	68.20	100	180	Peak
3		5700.000	64.81	1.72	66.53	-38.67	105.20	100	180	Peak
4		5720.000	87.48	1.84	89.31	-21.49	110.80	100	180	Peak
5		5725.000	82.79	1.86	84.65	-37.55	122.20	100	180	Peak
6		5737.280	117.80	1.93	119.74	N/A	N/A	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

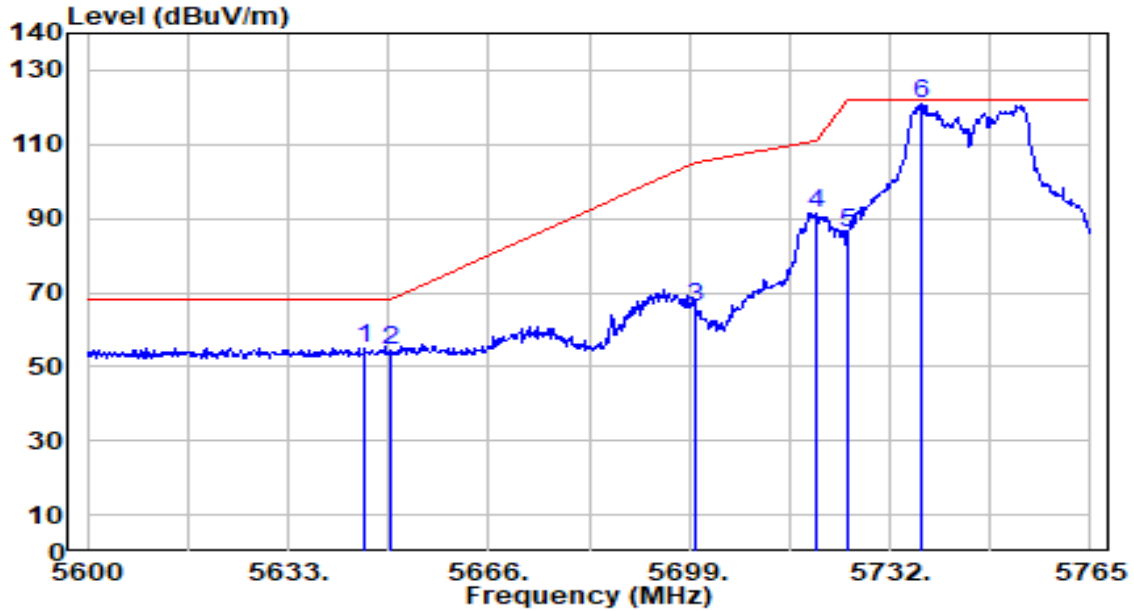


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5645.540	53.73	1.41	55.14	-13.06	68.20	320	199	Peak
2		5650.000	53.14	1.44	54.58	-13.62	68.20	320	199	Peak
3		5700.000	64.37	1.72	66.09	-39.11	105.20	320	199	Peak
4		5720.000	89.44	1.84	91.28	-19.52	110.80	320	199	Peak
5		5725.000	84.15	1.86	86.02	-36.18	122.20	320	199	Peak
6		5737.115	119.01	1.93	120.94	N/A	N/A	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

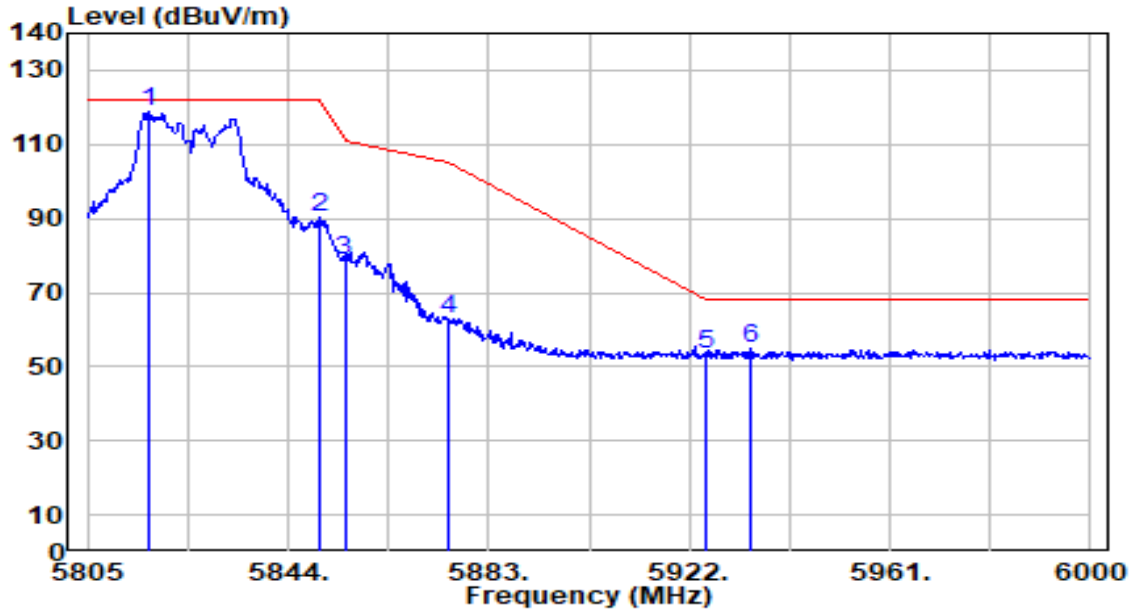


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5816.895	116.70	2.28	118.98	N/A	N/A	100	180	Peak
2	5850.000	87.91	2.27	90.18	-32.02	122.20	100	180	Peak
3	5855.000	76.64	2.27	78.91	-31.89	110.80	100	180	Peak
4	5875.000	60.83	2.26	63.09	-42.11	105.20	100	180	Peak
5	5925.000	50.90	2.25	53.15	-15.05	68.20	100	180	Peak
6	* 5934.090	52.45	2.24	54.69	-13.51	68.20	100	180	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

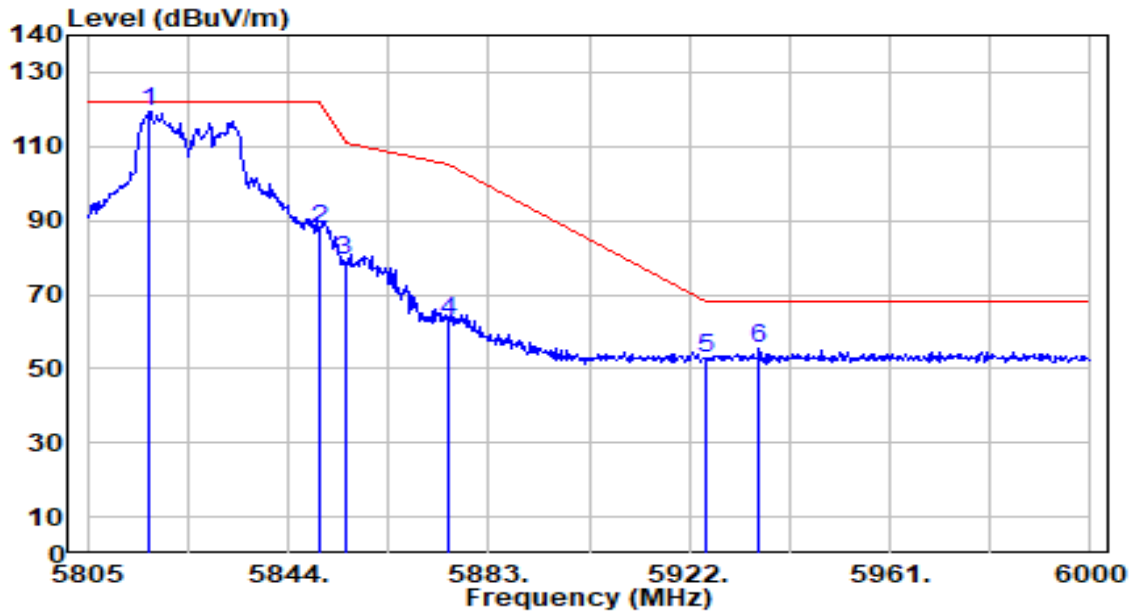


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5816.895	117.32	2.28	119.60	N/A	N/A	320	199	Peak
2	5850.000	85.49	2.27	87.76	-34.44	122.20	320	199	Peak
3	5855.000	76.97	2.27	79.24	-31.56	110.80	320	199	Peak
4	5875.000	60.80	2.26	63.06	-42.14	105.20	320	199	Peak
5	5925.000	50.69	2.25	52.94	-15.26	68.20	320	199	Peak
6	* 5935.650	53.13	2.24	55.37	-12.83	68.20	320	199	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

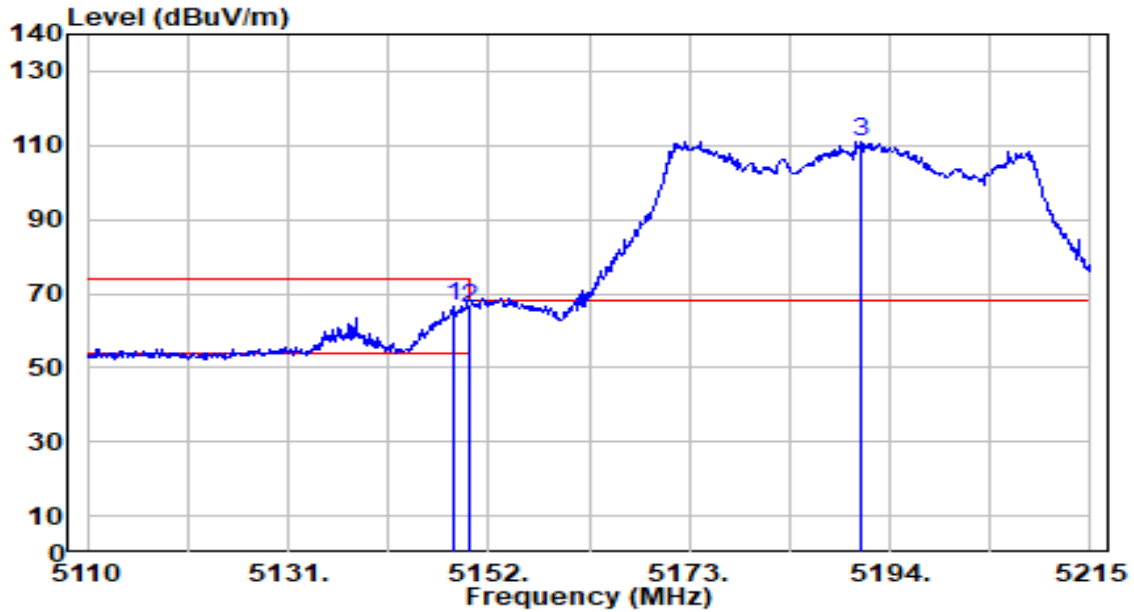


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.220	65.69	0.68	66.36	-7.64	74.00	157	170	Peak
2	5150.000	65.59	0.68	66.27	-7.73	74.00	157	170	Peak
3	5191.060	110.41	0.67	111.08	N/A	N/A	157	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

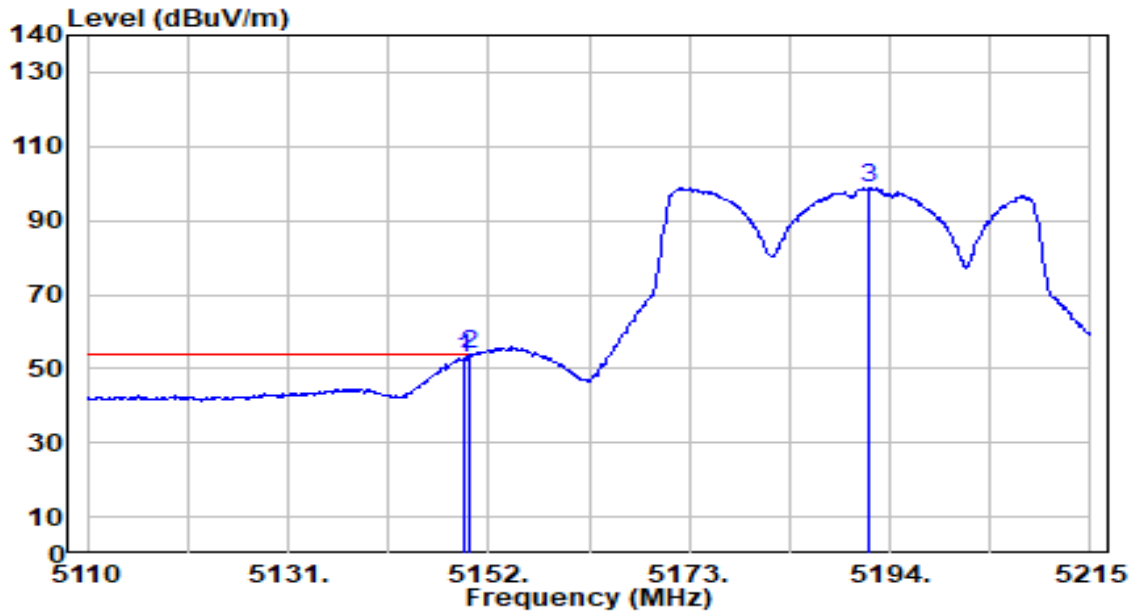


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.375	52.35	0.68	53.03	-0.97	54.00	157	170	Average
2	* 5150.000	53.02	0.68	53.70	-0.30	54.00	157	170	Average
3	5191.690	98.31	0.67	98.98	N/A	N/A	157	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

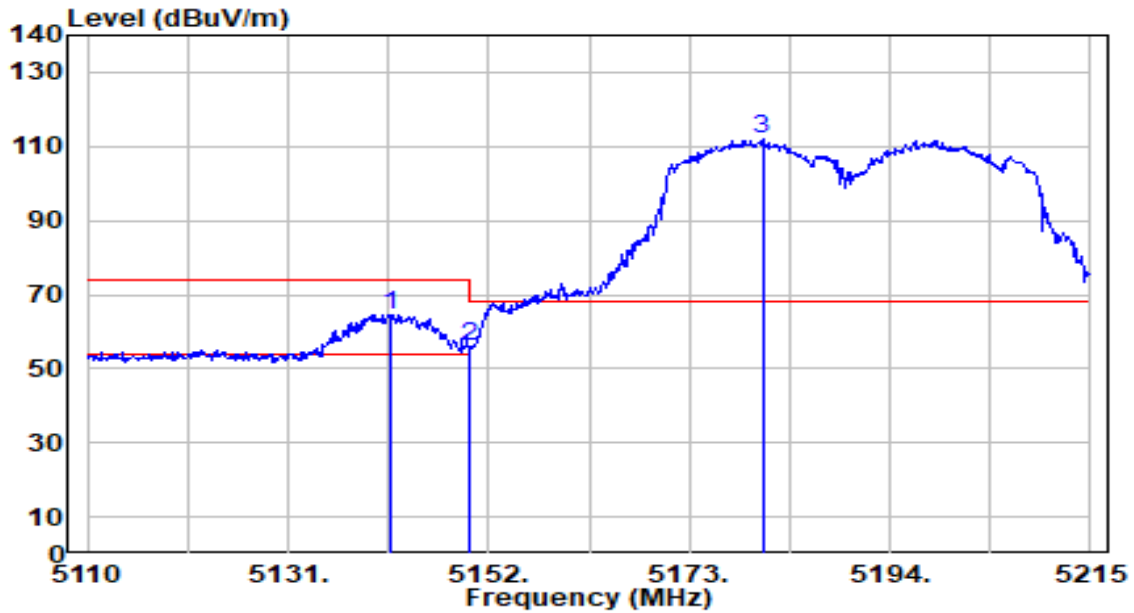


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5141.710	63.99	0.68	64.66	-9.34	74.00	116	188	Peak
2		5150.000	55.32	0.68	56.00	-18.00	74.00	116	188	Peak
3		5180.665	111.15	0.67	111.82	N/A	N/A	116	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

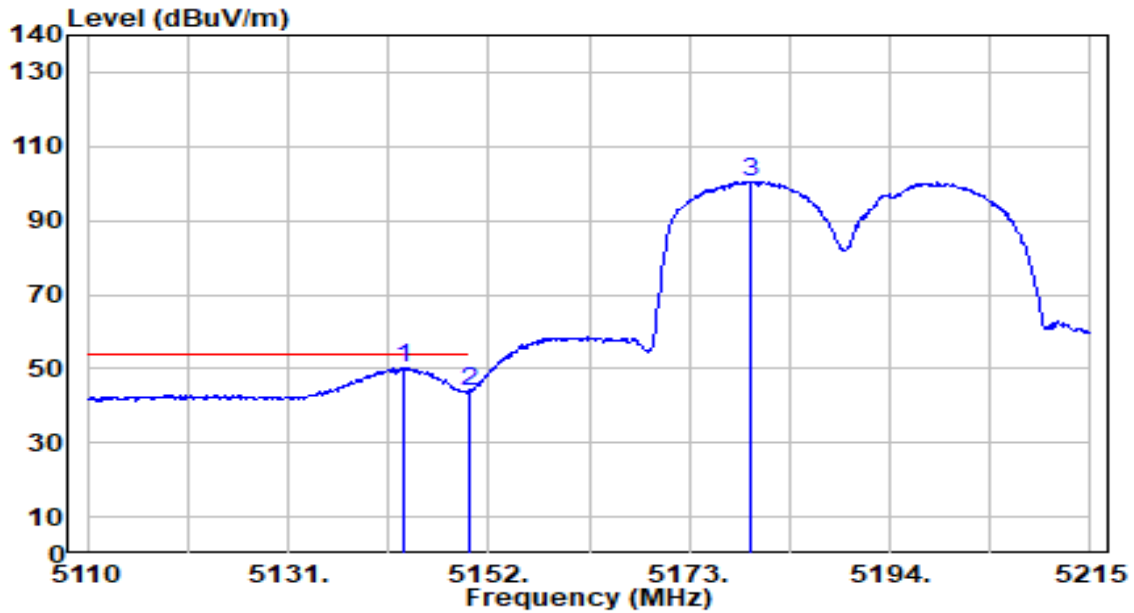


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.180	49.49	0.68	50.16	-3.84	54.00	116	188	Average
2		5150.000	43.36	0.68	44.04	-9.96	54.00	116	188	Average
3		5179.300	99.93	0.67	100.60	N/A	N/A	116	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

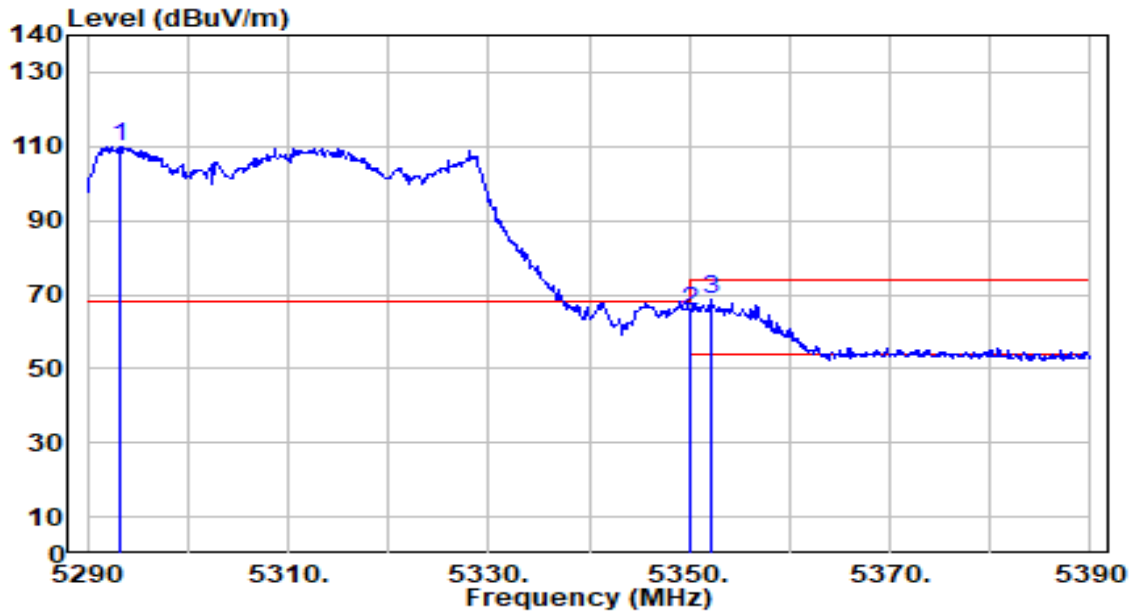


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.300	109.45	0.57	110.02	N/A	N/A	157	170	Peak
2	5350.000	65.26	0.51	65.77	-8.23	74.00	157	170	Peak
3	* 5352.100	68.24	0.50	68.74	-5.26	74.00	157	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

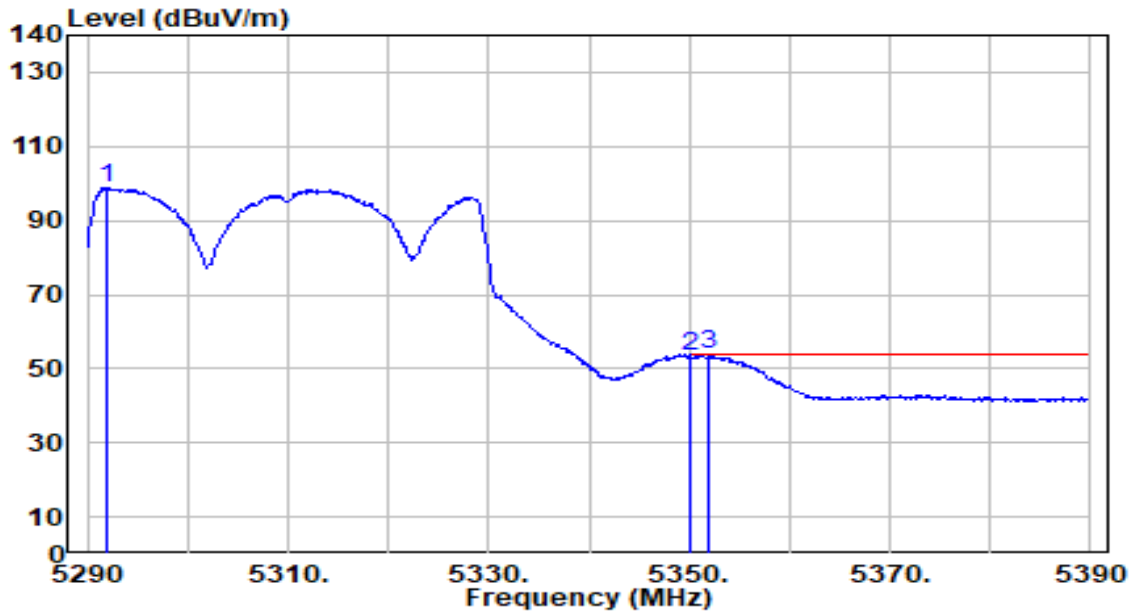


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.900	98.16	0.57	98.72	N/A	N/A	157	170	Average
2	5350.000	52.71	0.51	53.21	-0.79	54.00	157	170	Average
3	* 5351.800	53.25	0.50	53.75	-0.25	54.00	157	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

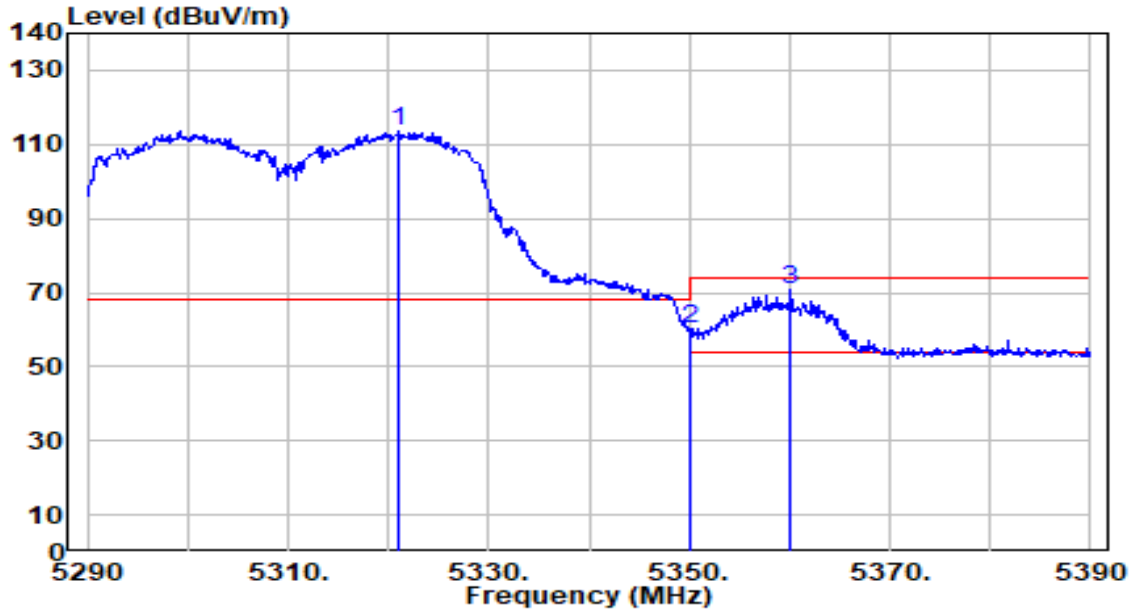


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.100	113.02	0.54	113.56	N/A	N/A	116	188	Peak
2	5350.000	59.96	0.51	60.46	-13.54	74.00	116	188	Peak
3	* 5360.100	70.30	0.49	70.80	-3.20	74.00	116	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

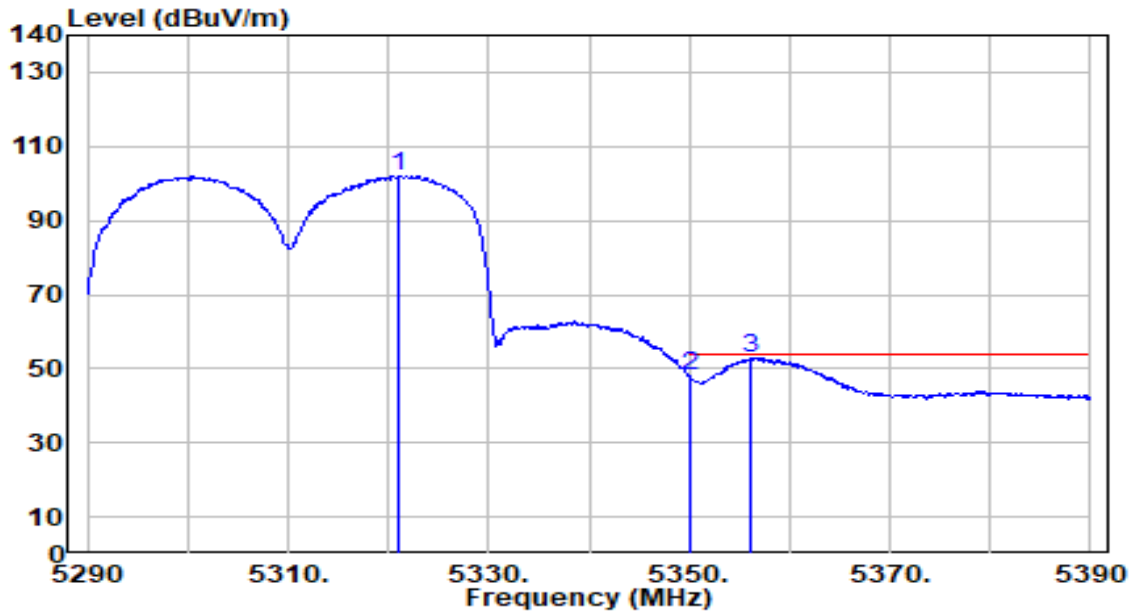


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.000	101.69	0.54	102.22	N/A	N/A	116	188	Average
2	5350.000	47.38	0.51	47.88	-6.12	54.00	116	188	Average
3	* 5356.000	52.48	0.50	52.98	-1.02	54.00	116	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

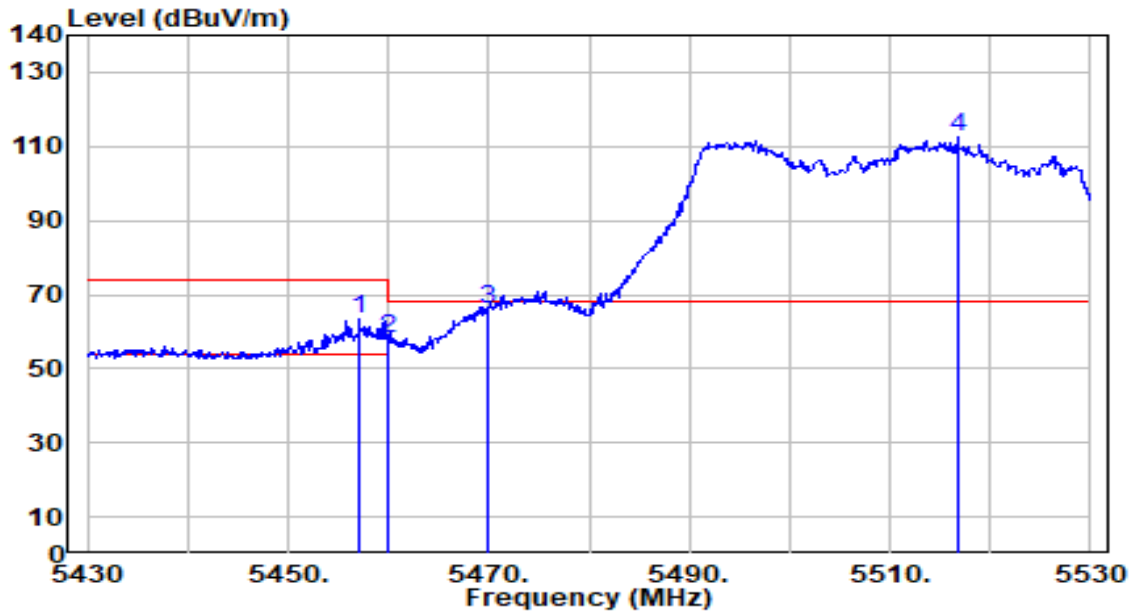


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.100	63.00	0.64	63.64	-10.36	74.00	157	170	Peak
2	5460.000	57.64	0.65	58.30	-15.70	74.00	157	170	Peak
3	* 5470.000	65.26	0.69	65.95	-2.25	68.20	157	170	Peak
4	5516.700	111.45	0.85	112.31	N/A	N/A	157	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

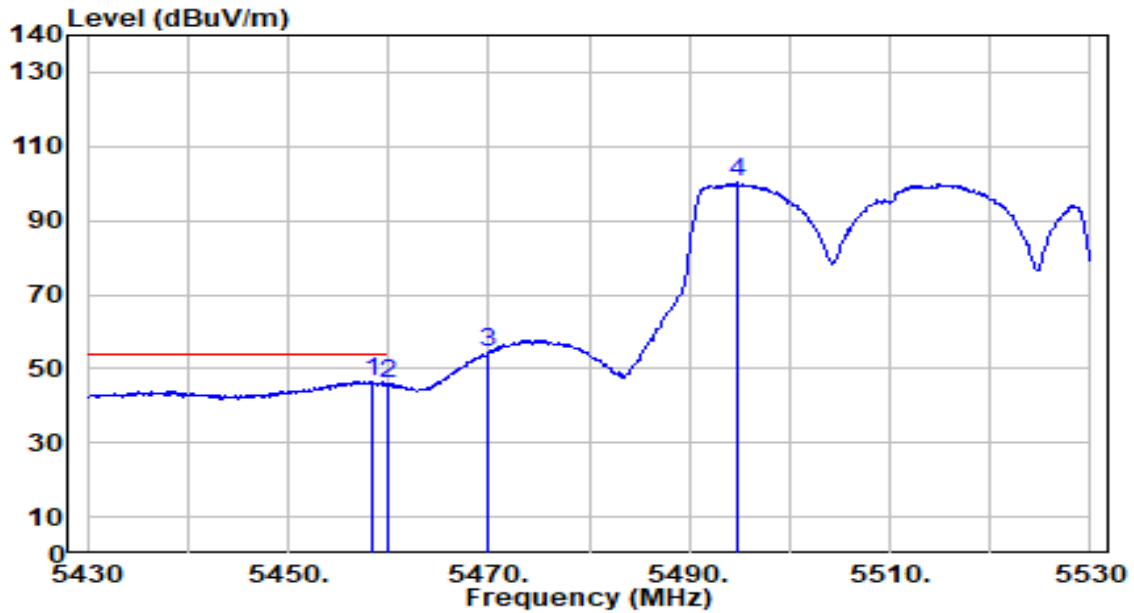


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5458.400	45.98	0.65	46.62	-7.38	54.00	157	170	Average
2		5460.000	45.28	0.65	45.94	-8.06	54.00	157	170	Average
3		5470.000	53.74	0.69	54.43	N/A	N/A	157	170	Average
4		5494.800	99.45	0.77	100.22	N/A	N/A	157	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

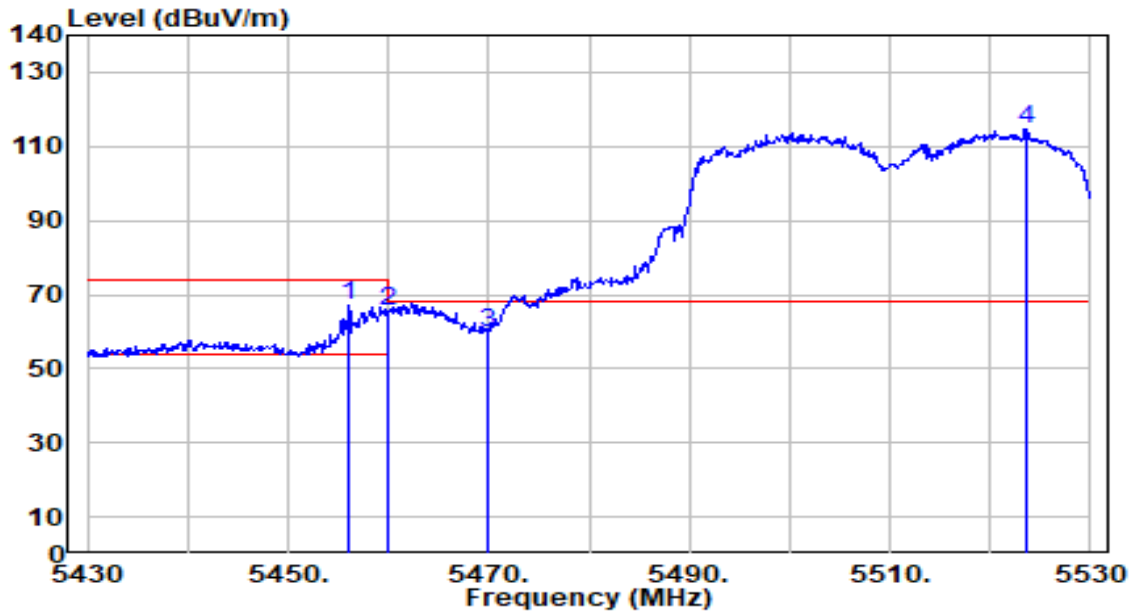


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5456.100	66.29	0.64	66.93	-7.07	74.00	116	188	Peak
2		5460.000	64.95	0.65	65.60	-8.40	74.00	116	188	Peak
3		5470.000	58.87	0.69	59.55	-8.65	68.20	116	188	Peak
4		5523.500	113.85	0.88	114.72	N/A	N/A	116	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

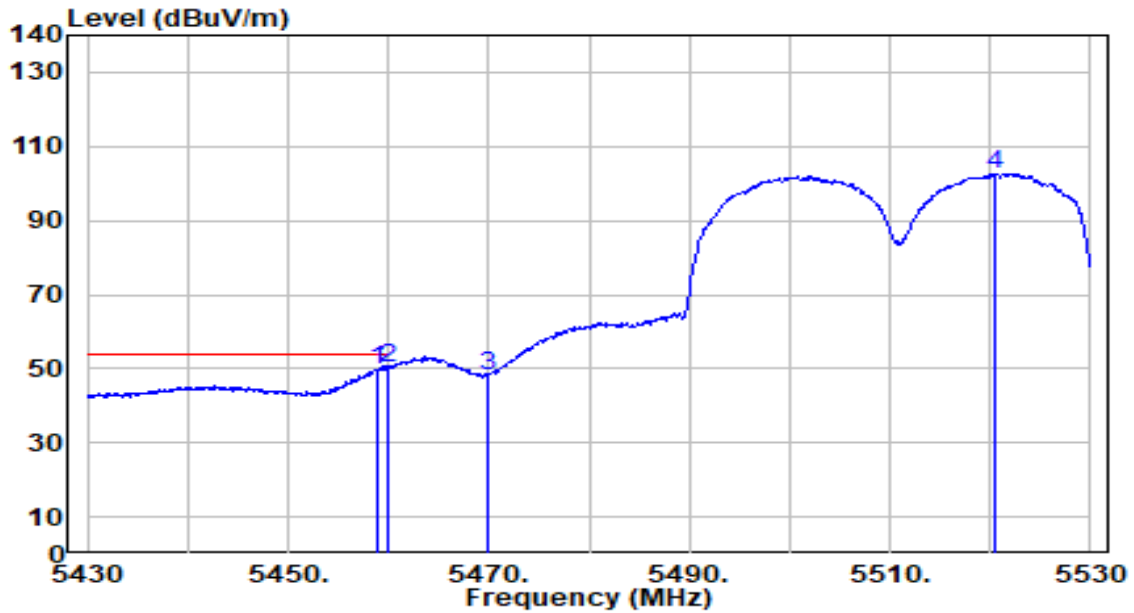


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.000	48.99	0.65	49.64	-4.36	54.00	116	188	Average
2	* 5460.000	49.77	0.65	50.43	-3.57	54.00	116	188	Average
3	5470.000	47.61	0.69	48.29	N/A	N/A	116	188	Average
4	5520.600	101.70	0.87	102.56	N/A	N/A	116	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

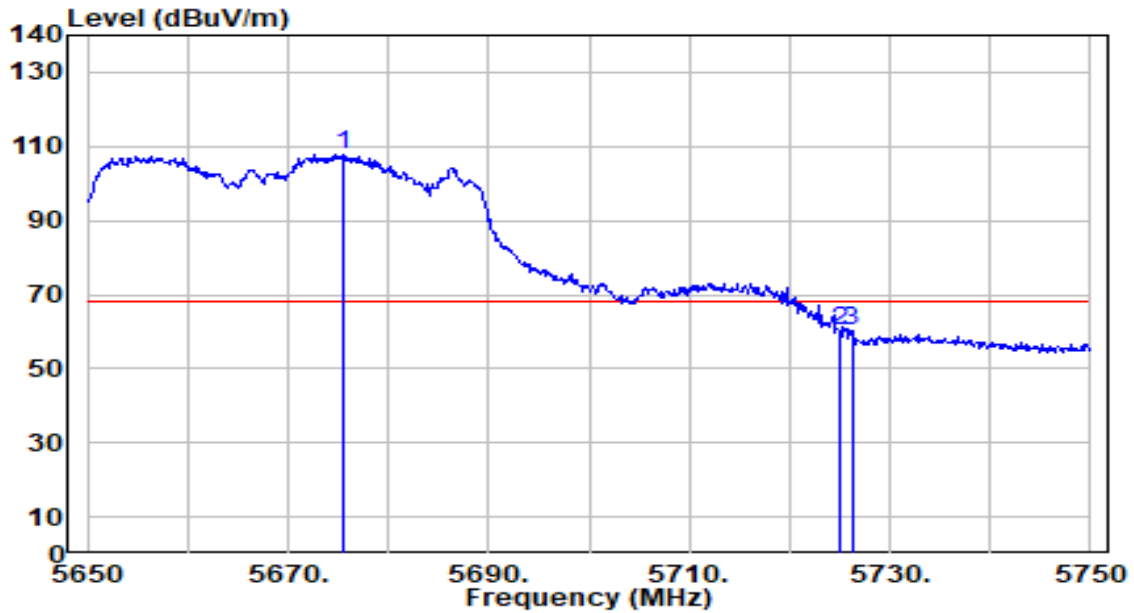


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5675.400	106.42	1.58	108.01	N/A	N/A	157	170	Peak
2	5725.000	58.48	1.86	60.34	-7.86	68.20	157	170	Peak
3	* 5726.200	58.48	1.87	60.35	-7.85	68.20	157	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

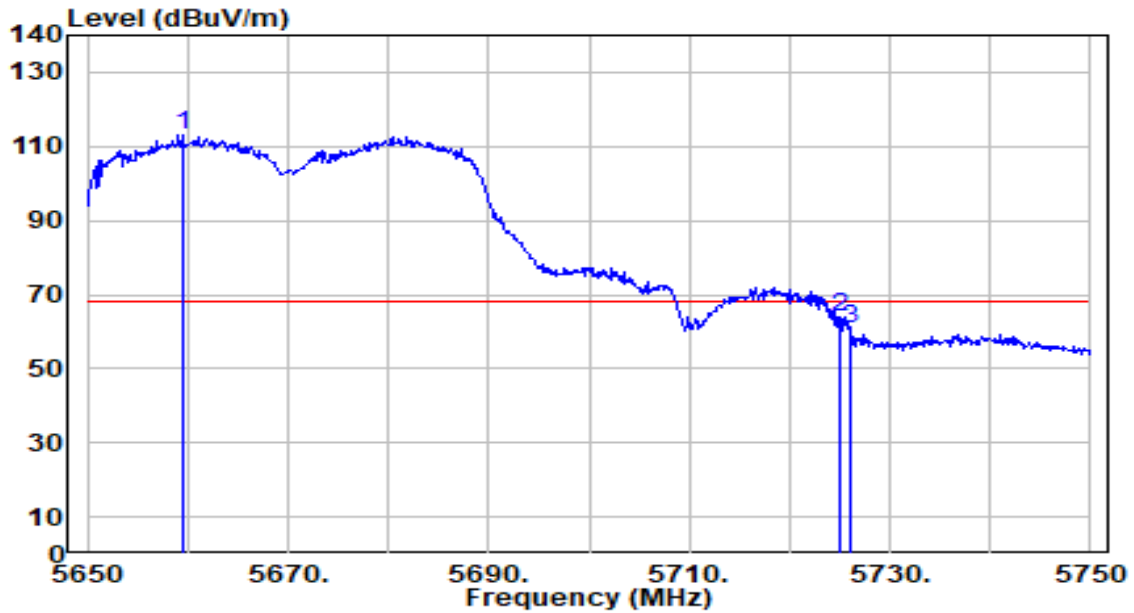


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5659.500	111.58	1.49	113.07	N/A	N/A	116	188	Peak
2	* 5725.000	62.03	1.86	63.89	-4.31	68.20	116	188	Peak
3	5726.000	58.95	1.87	60.81	-7.39	68.20	116	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

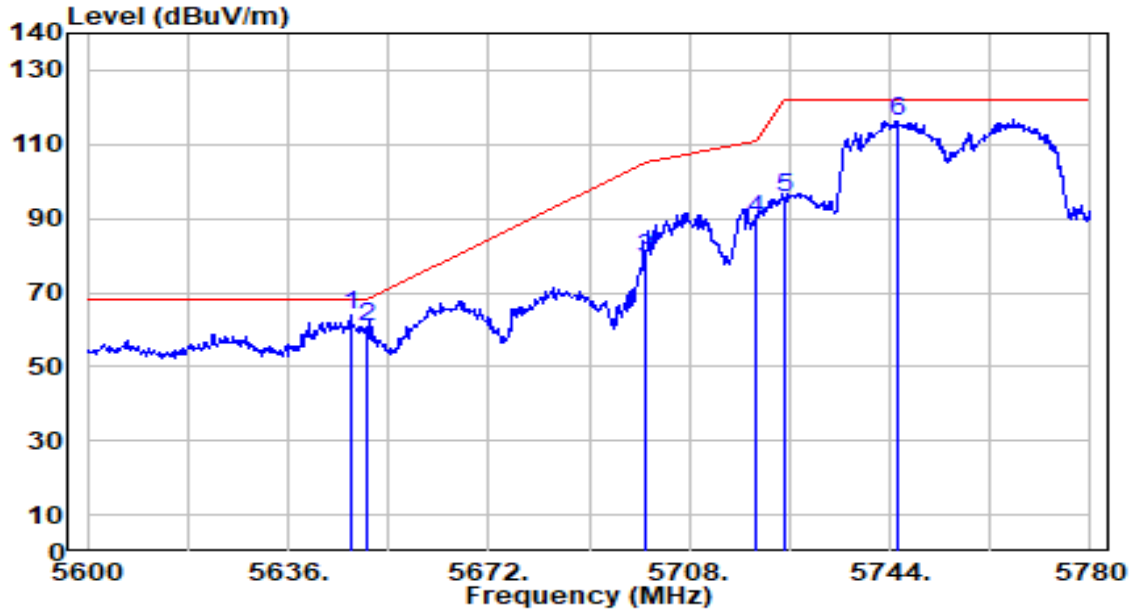


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5647.340	62.66	1.42	64.08	-4.12	68.20	100	180	Peak
2	5650.000	59.25	1.44	60.69	-7.51	68.20	100	180	Peak
3	5700.000	77.34	1.72	79.07	-26.13	105.20	100	180	Peak
4	5720.000	87.72	1.84	89.55	-21.25	110.80	100	180	Peak
5	5725.000	93.68	1.86	95.55	-26.65	122.20	100	180	Peak
6	5745.440	114.24	1.98	116.22	N/A	N/A	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

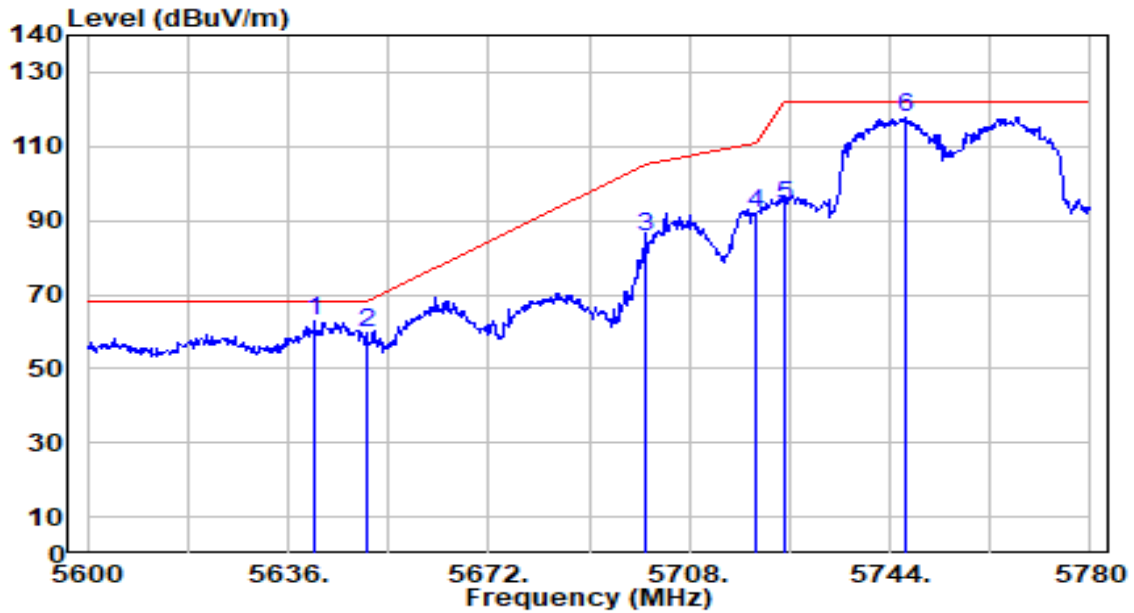


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5640.680	61.47	1.39	62.86	-5.34	68.20	320	199	Peak
2		5650.000	58.39	1.44	59.83	-8.37	68.20	320	199	Peak
3		5700.000	83.74	1.72	85.46	-19.74	105.20	320	199	Peak
4		5720.000	89.89	1.84	91.73	-19.07	110.80	320	199	Peak
5		5725.000	92.18	1.86	94.04	-28.16	122.20	320	199	Peak
6		5746.700	115.57	1.99	117.56	N/A	N/A	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

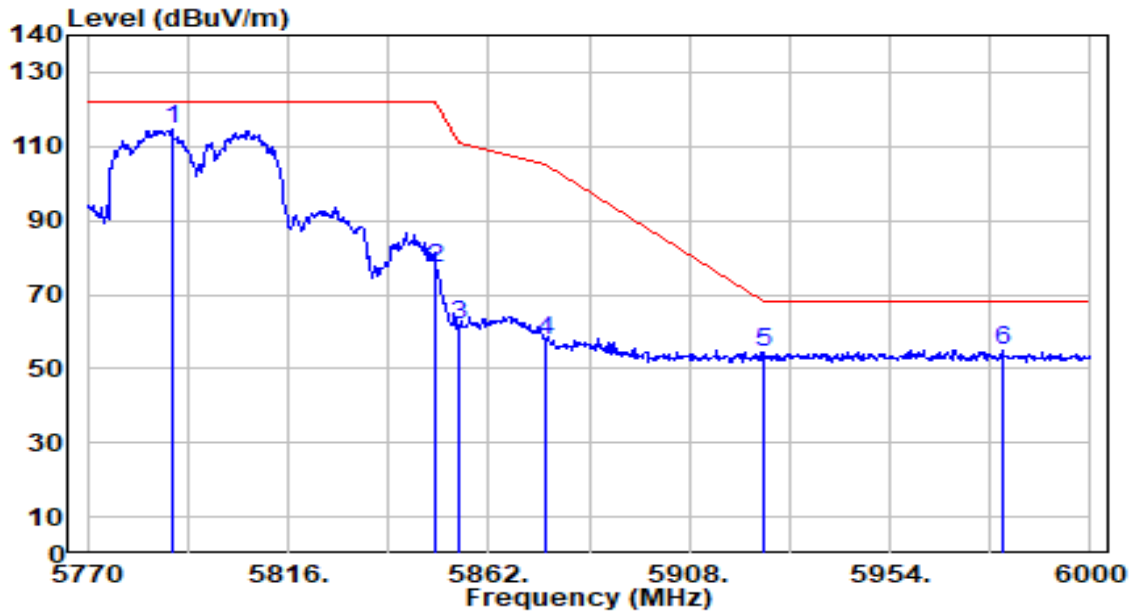


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5789.320	112.24	2.23	114.47	N/A	N/A	100	180	Peak
2	5850.000	74.75	2.27	77.02	-45.18	122.20	100	180	Peak
3	5855.000	59.74	2.27	62.01	-48.79	110.80	100	180	Peak
4	5875.000	55.38	2.26	57.64	-47.56	105.20	100	180	Peak
5	5925.000	51.92	2.25	54.16	-14.04	68.20	100	180	Peak
6	* 5979.760	52.74	2.23	54.96	-13.24	68.20	100	180	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

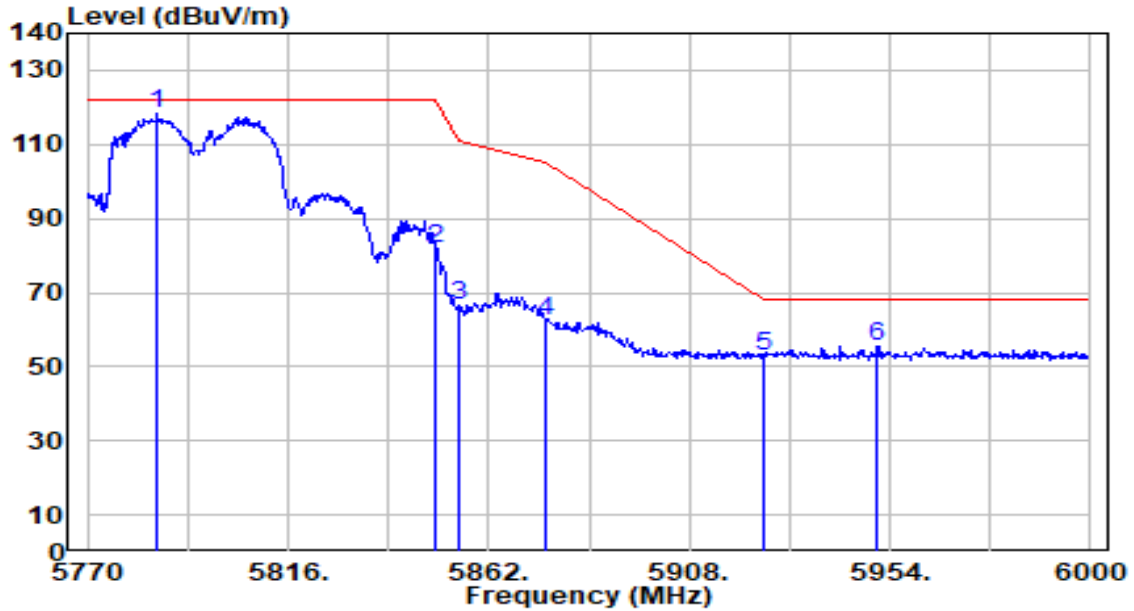


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5785.870	115.99	2.21	118.19	N/A	N/A	320	199	Peak
2	5850.000	79.49	2.27	81.76	-40.44	122.20	320	199	Peak
3	5855.000	64.08	2.27	66.34	-44.46	110.80	320	199	Peak
4	5875.000	60.24	2.26	62.50	-42.70	105.20	320	199	Peak
5	5925.000	50.41	2.25	52.65	-15.55	68.20	320	199	Peak
6	* 5951.240	53.35	2.24	55.59	-12.61	68.20	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

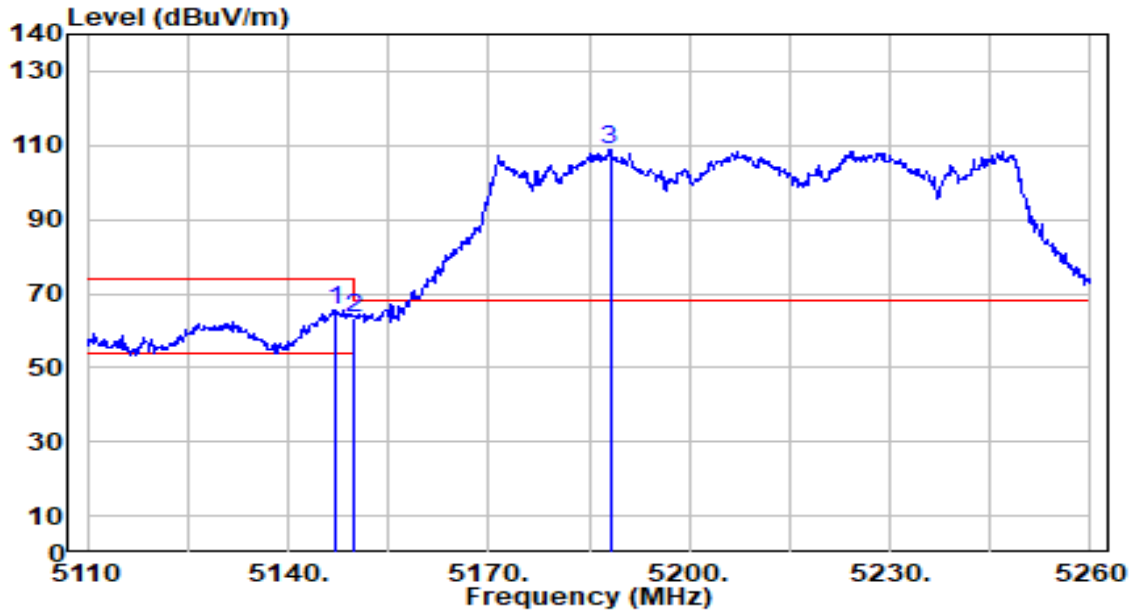


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5147.200	64.93	0.68	65.60	-8.40	74.00	238	197	Peak
2		5150.000	62.49	0.68	63.16	-10.84	74.00	238	197	Peak
3		5188.150	108.34	0.67	109.01	N/A	N/A	238	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

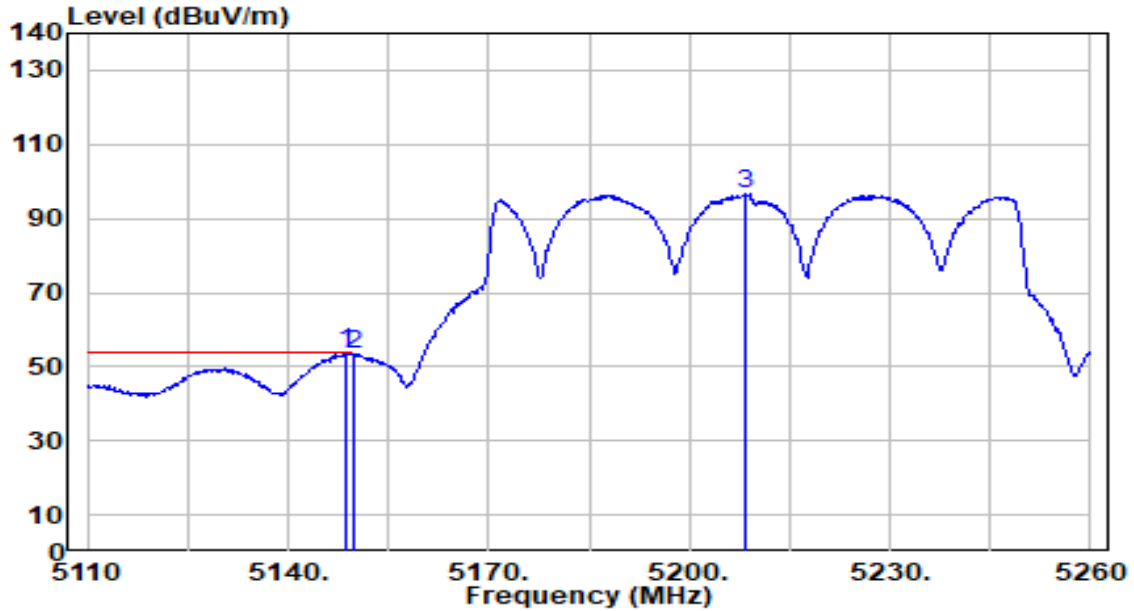


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.700	53.04	0.68	53.71	-0.29	54.00	238	197	Average
2		5150.000	52.93	0.68	53.61	-0.39	54.00	238	197	Average
3		5208.250	96.08	0.66	96.74	N/A	N/A	238	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

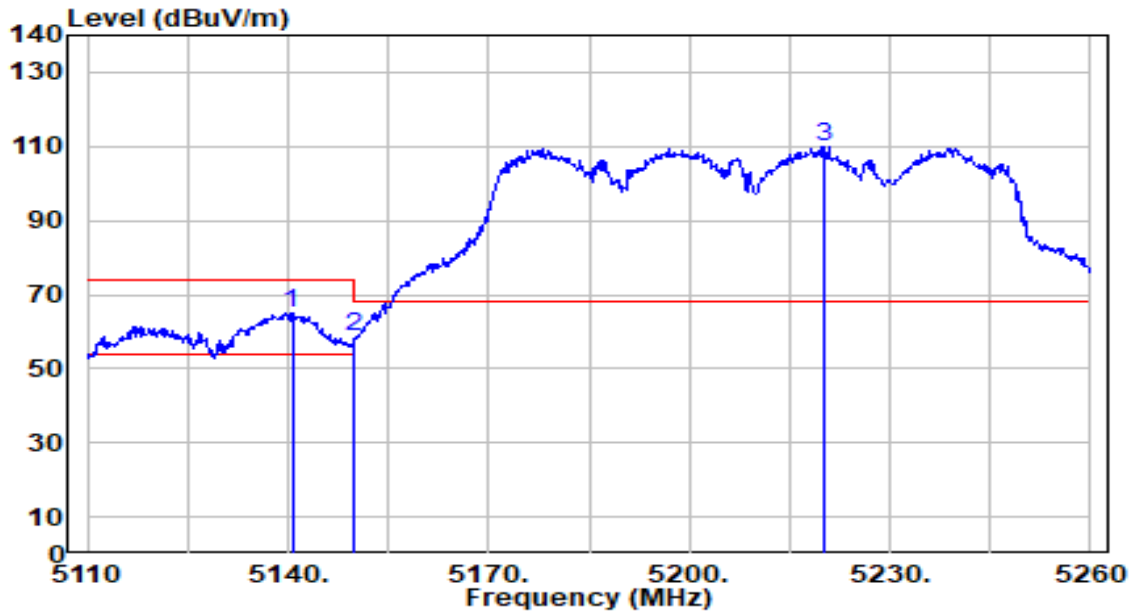


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5140.600	64.37	0.68	65.05	-8.95	74.00	263	210	Peak
2		5150.000	57.85	0.68	58.52	-15.48	74.00	263	210	Peak
3		5220.100	109.34	0.65	109.99	N/A	N/A	263	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

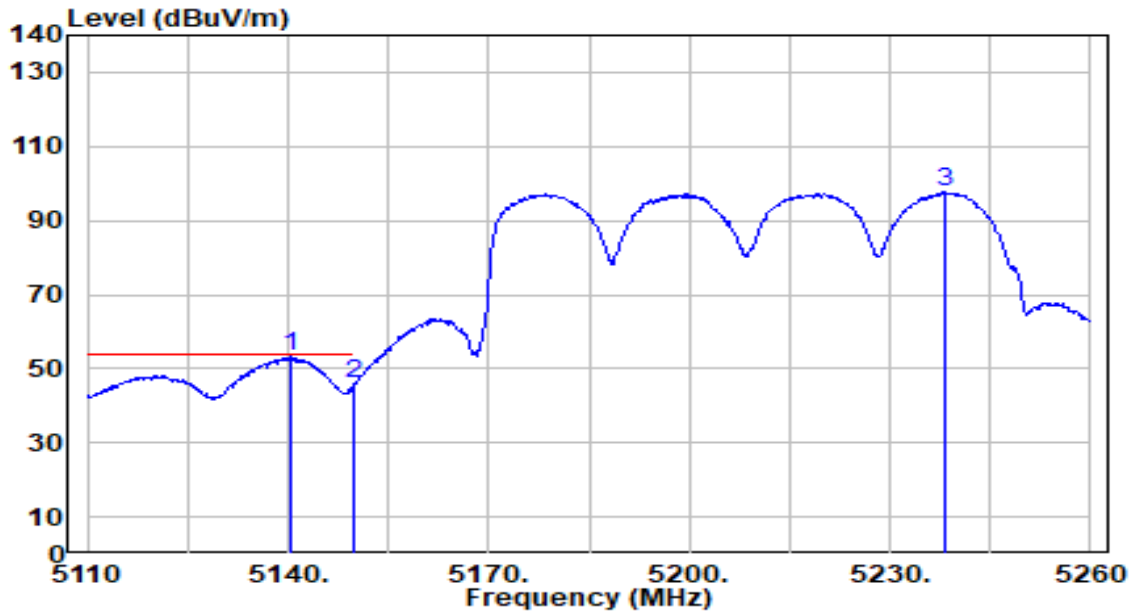


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	52.47	0.68	53.14	-0.86	54.00	263	210	Average
2		45.40	0.68	46.07	-7.93	54.00	263	210	Average
3		97.08	0.63	97.71	N/A	N/A	263	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

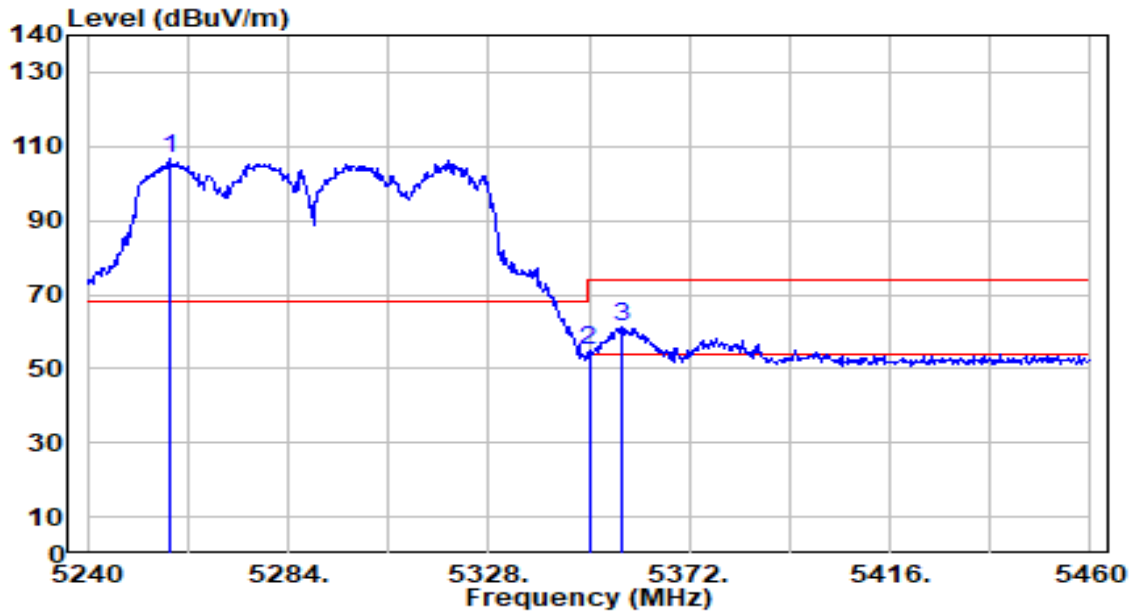


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5258.260	105.98	0.61	106.58	N/A	N/A	238	182	Peak
2	5350.000	54.31	0.51	54.81	-19.19	74.00	238	182	Peak
3	* 5357.480	60.52	0.50	61.02	-12.98	74.00	238	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

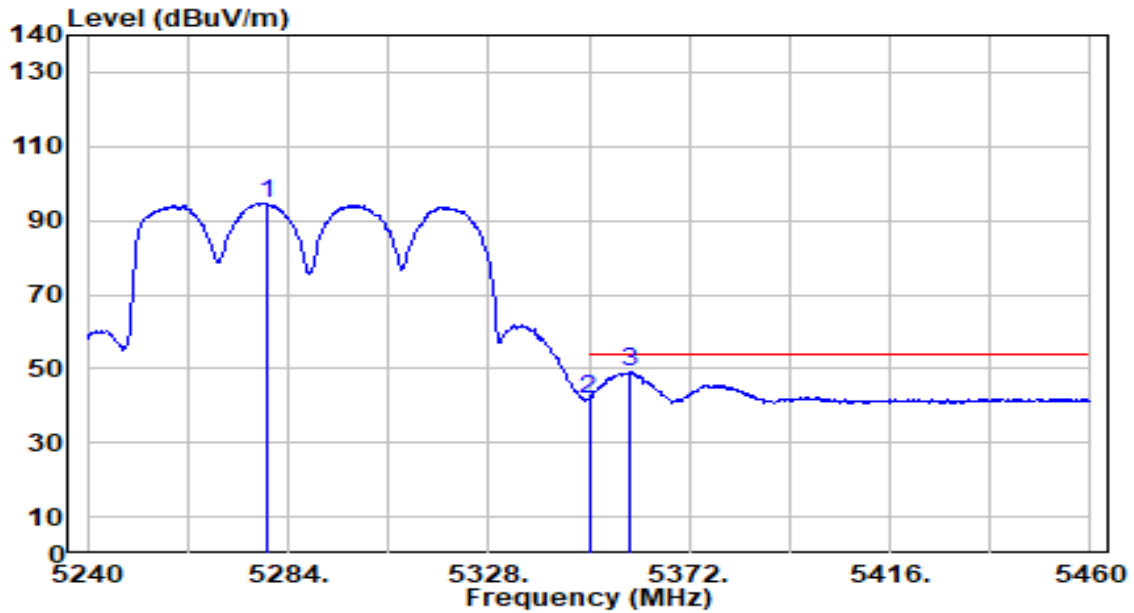


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5279.160	94.24	0.58	94.82	N/A	N/A	238	182	Average
2	5350.000	41.26	0.51	41.76	-12.24	54.00	238	182	Average
3	* 5359.020	48.66	0.50	49.16	-4.84	54.00	238	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

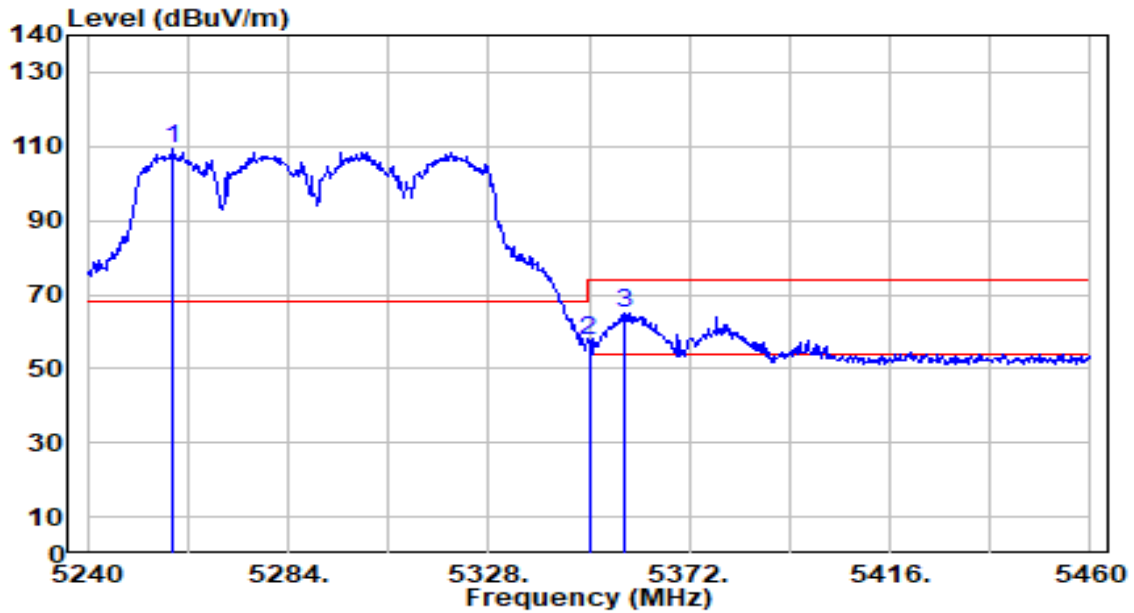


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5258.700	108.64	0.61	109.24	N/A	N/A	263	210	Peak
2	5350.000	57.22	0.51	57.72	-16.28	74.00	263	210	Peak
3	* 5357.700	64.39	0.50	64.88	-9.12	74.00	263	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

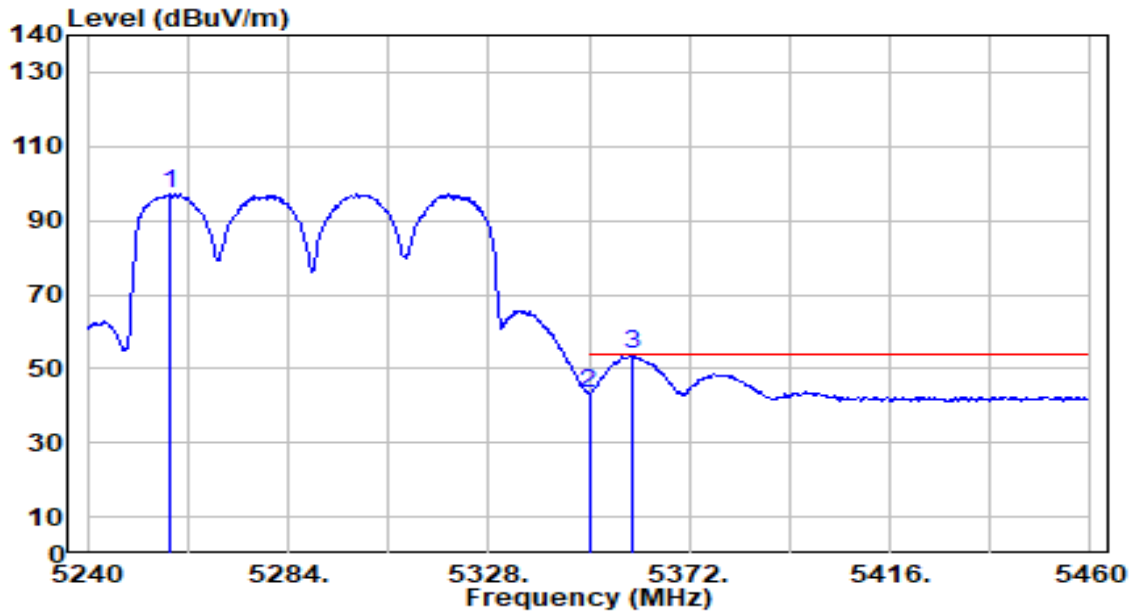


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5257.820	96.60	0.61	97.20	N/A	N/A	263	210	Average
2	5350.000	42.70	0.51	43.21	-10.79	54.00	263	210	Average
3	* 5359.460	53.21	0.49	53.71	-0.29	54.00	263	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

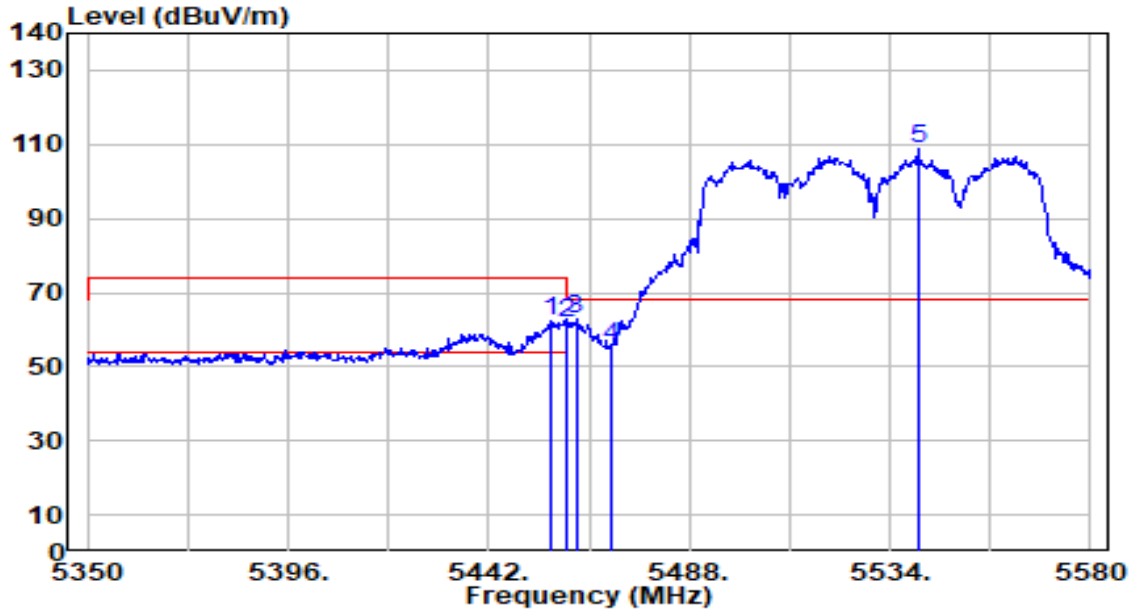


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.030	61.53	0.64	62.17	-11.83	74.00	238	182	Peak
2	5460.000	61.08	0.65	61.73	-12.27	74.00	238	182	Peak
3	* 5462.010	62.46	0.66	63.12	-5.08	68.20	238	182	Peak
4	5470.000	54.61	0.69	55.30	-12.90	68.20	238	182	Peak
5	5540.670	107.99	0.94	108.93	N/A	N/A	238	182	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

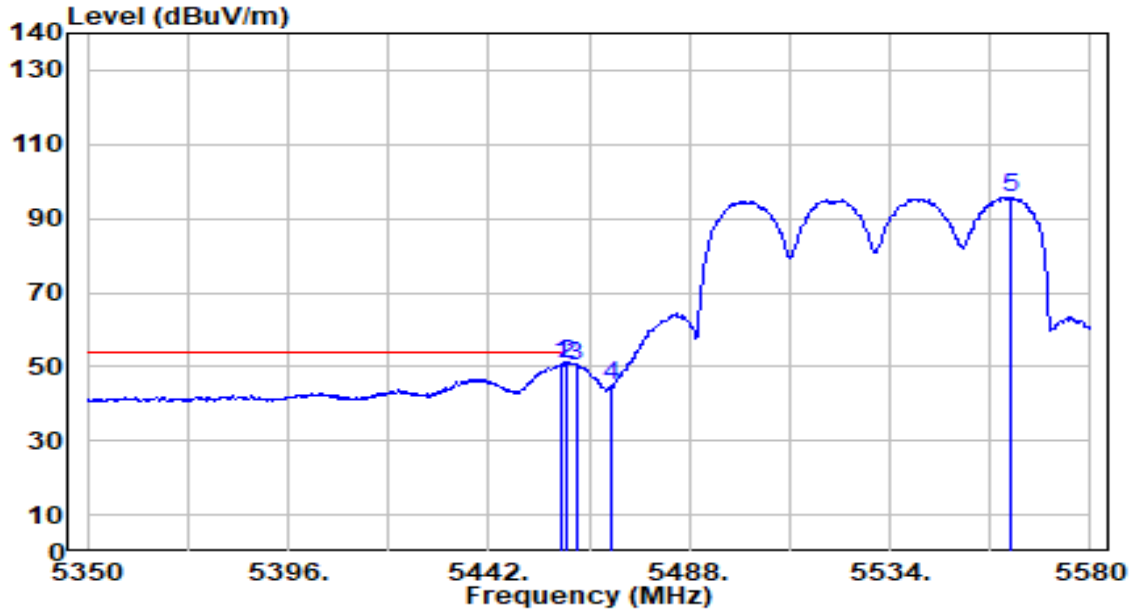


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.790	49.84	0.65	50.49	-3.51	54.00	238	182	Average
2	* 5460.000	50.27	0.65	50.92	-3.08	54.00	238	182	Average
3	5462.010	49.77	0.66	50.43	N/A	N/A	238	182	Average
4	5470.000	44.09	0.69	44.78	N/A	N/A	238	182	Average
5	5561.830	94.72	1.02	95.74	N/A	N/A	238	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

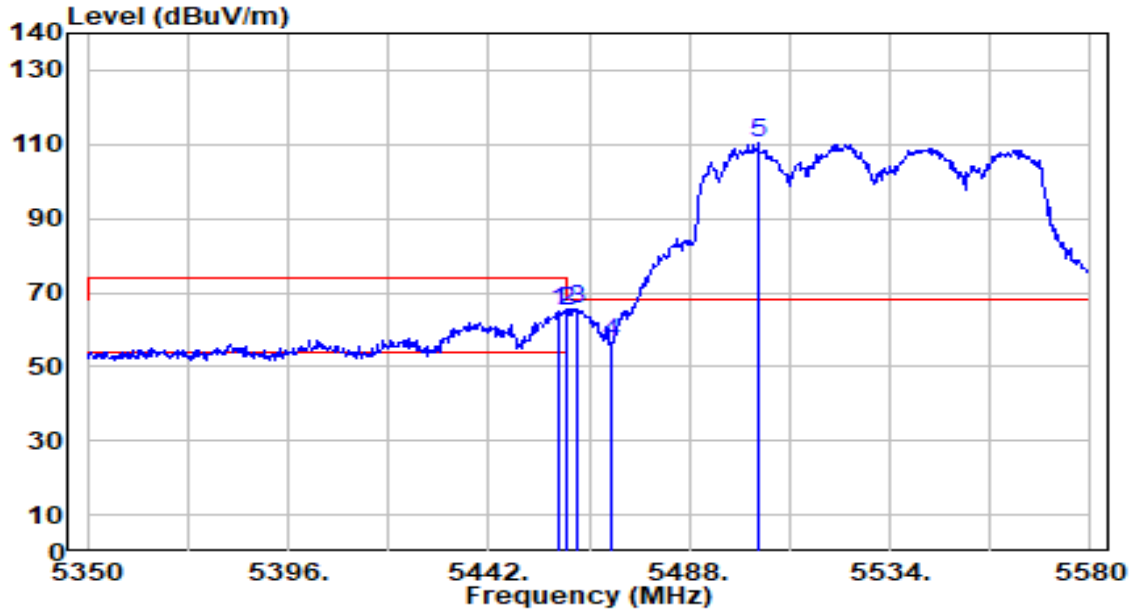


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.330	64.22	0.65	64.87	-9.13	74.00	263	210	Peak
2	5460.000	64.51	0.65	65.17	-8.83	74.00	263	210	Peak
3	* 5462.470	65.07	0.66	65.73	-2.47	68.20	263	210	Peak
4	5470.000	55.76	0.69	56.45	-11.75	68.20	263	210	Peak
5	5503.870	109.82	0.80	110.62	N/A	N/A	263	210	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

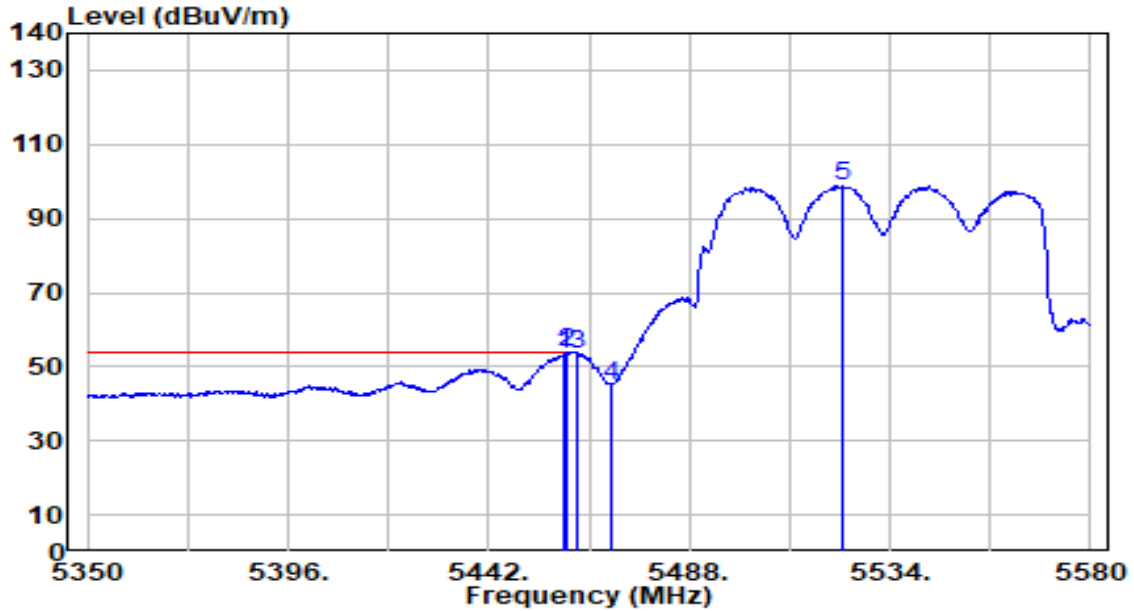


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.020	52.49	0.65	53.14	-0.86	54.00	263	210	Average
2	* 5460.000	53.12	0.65	53.77	-0.23	54.00	263	210	Average
3	5462.470	52.67	0.66	53.34	N/A	N/A	263	210	Average
4	5470.000	44.13	0.69	44.82	N/A	N/A	263	210	Average
5	5523.190	98.05	0.87	98.93	N/A	N/A	263	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band4_TX_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

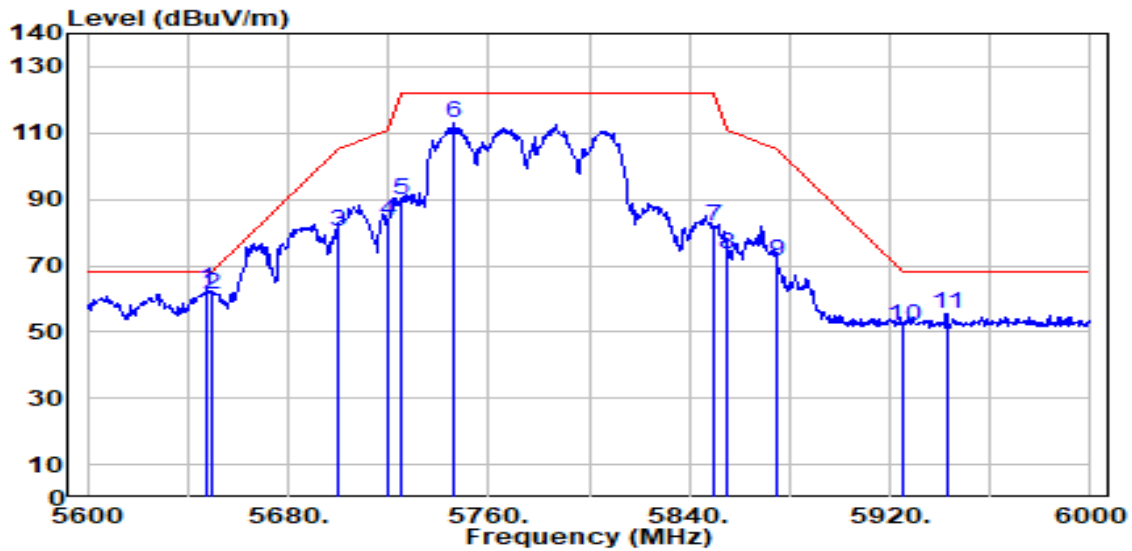


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5648.000	61.61	1.43	63.04	-5.16	68.20	100	180	Peak
2		5650.000	59.73	1.44	61.17	-7.03	68.20	100	180	Peak
3		5700.000	78.59	1.72	80.31	-24.89	105.20	100	180	Peak
4		5720.000	81.69	1.84	83.53	-27.27	110.80	100	180	Peak
5		5725.000	88.03	1.86	89.89	-32.31	122.20	100	180	Peak
6		5745.600	110.82	1.98	112.80	N/A	N/A	100	180	Peak
7		5850.000	79.49	2.27	81.76	-40.44	122.20	100	180	Peak
8		5855.000	71.37	2.27	73.64	-37.16	110.80	100	180	Peak
9		5875.000	69.16	2.26	71.43	-33.77	105.20	100	180	Peak
10		5925.000	49.76	2.25	52.01	-16.19	68.20	100	180	Peak
11		5942.800	53.28	2.24	55.51	-12.69	68.20	100	180	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band4_TX_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

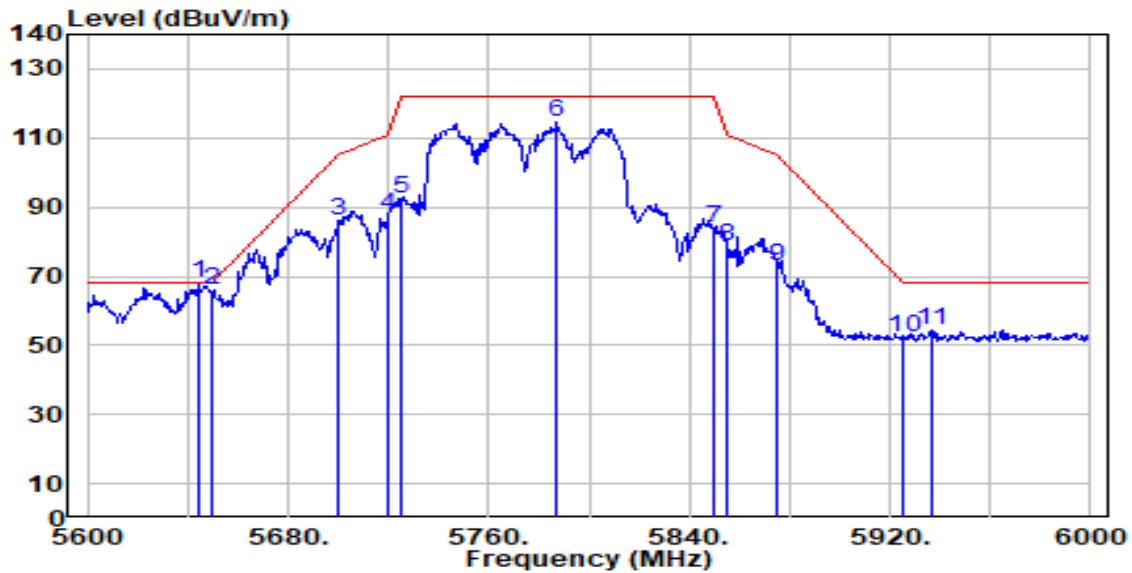


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5644.400	66.54	1.41	67.95	-0.25	68.20	320	199	Peak
2	5650.000	64.41	1.44	65.85	-2.35	68.20	320	199	Peak
3	5700.000	84.31	1.72	86.03	-19.17	105.20	320	199	Peak
4	5720.000	85.94	1.84	87.77	-23.03	110.80	320	199	Peak
5	5725.000	90.44	1.86	92.30	-29.90	122.20	320	199	Peak
6	5787.200	112.21	2.22	114.43	N/A	N/A	320	199	Peak
7	5850.000	81.71	2.27	83.98	-38.22	122.20	320	199	Peak
8	5855.000	76.68	2.27	78.95	-31.85	110.80	320	199	Peak
9	5875.000	70.46	2.26	72.72	-32.48	105.20	320	199	Peak
10	5925.000	49.97	2.25	52.22	-15.98	68.20	320	199	Peak
11	5936.400	51.96	2.24	54.20	-14.00	68.20	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

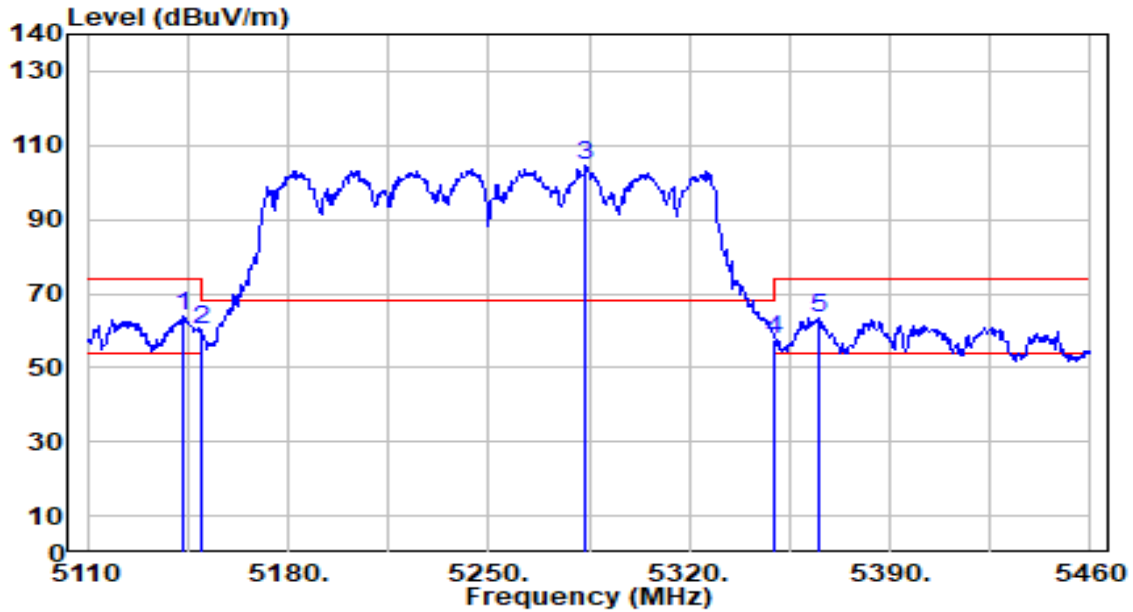


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.250	63.03	0.68	63.70	-10.30	74.00	168	187	Peak
2		5150.000	59.71	0.68	60.38	-13.62	74.00	168	187	Peak
3		5283.950	104.08	0.58	104.66	N/A	N/A	168	187	Peak
4		5350.000	57.11	0.51	57.61	-16.39	74.00	168	187	Peak
5		5365.150	62.91	0.49	63.40	-10.60	74.00	168	187	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

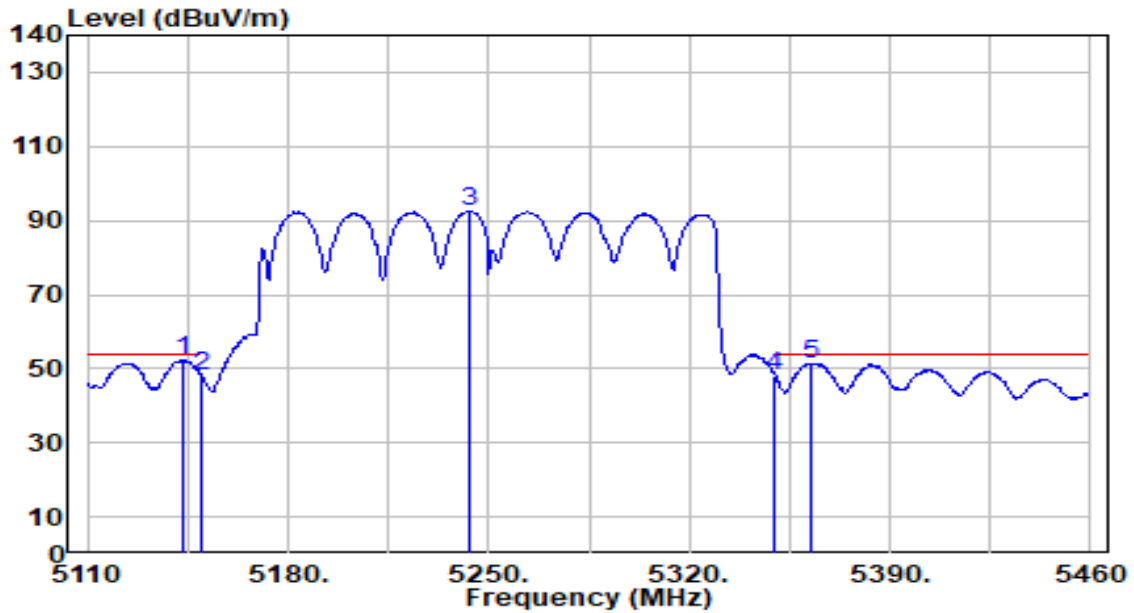


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	51.65	0.68	52.32	-1.68	54.00	168	187	Average
2		47.20	0.68	47.88	-6.12	54.00	168	187	Average
3		91.80	0.62	92.42	N/A	N/A	168	187	Average
4		47.35	0.51	47.85	-6.15	54.00	168	187	Average
5		51.00	0.49	51.49	-2.51	54.00	168	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

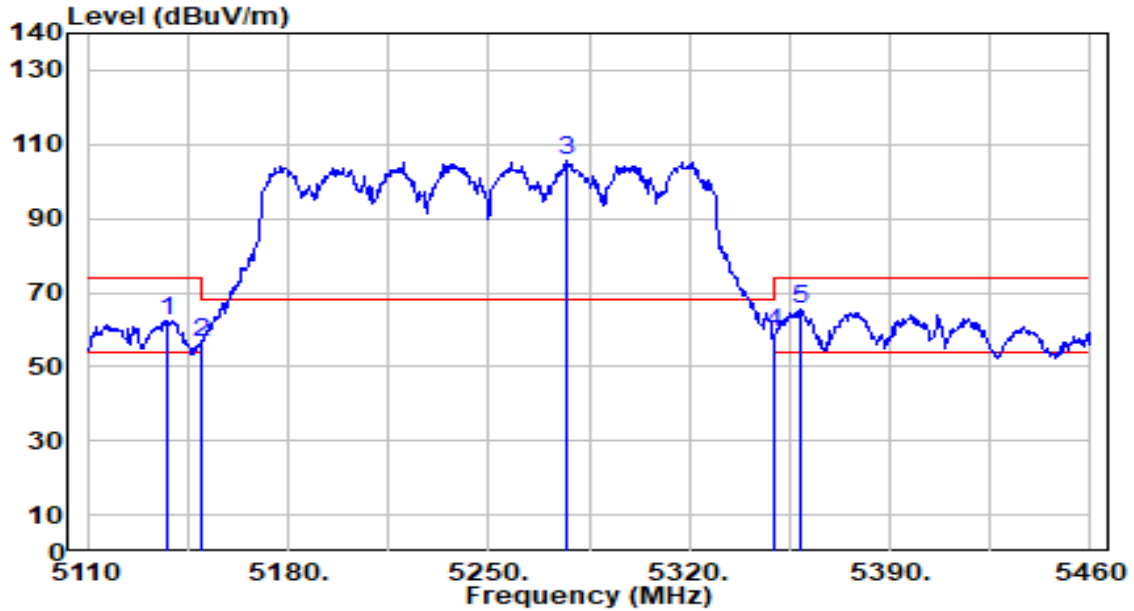


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5138.000	61.80	0.68	62.48	-11.52	74.00	140	215	Peak
2	5150.000	55.79	0.68	56.47	-17.53	74.00	140	215	Peak
3	5277.300	105.21	0.58	105.79	N/A	N/A	140	215	Peak
4	5350.000	58.41	0.51	58.92	-15.08	74.00	140	215	Peak
5	* 5359.200	64.85	0.49	65.34	-8.66	74.00	140	215	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

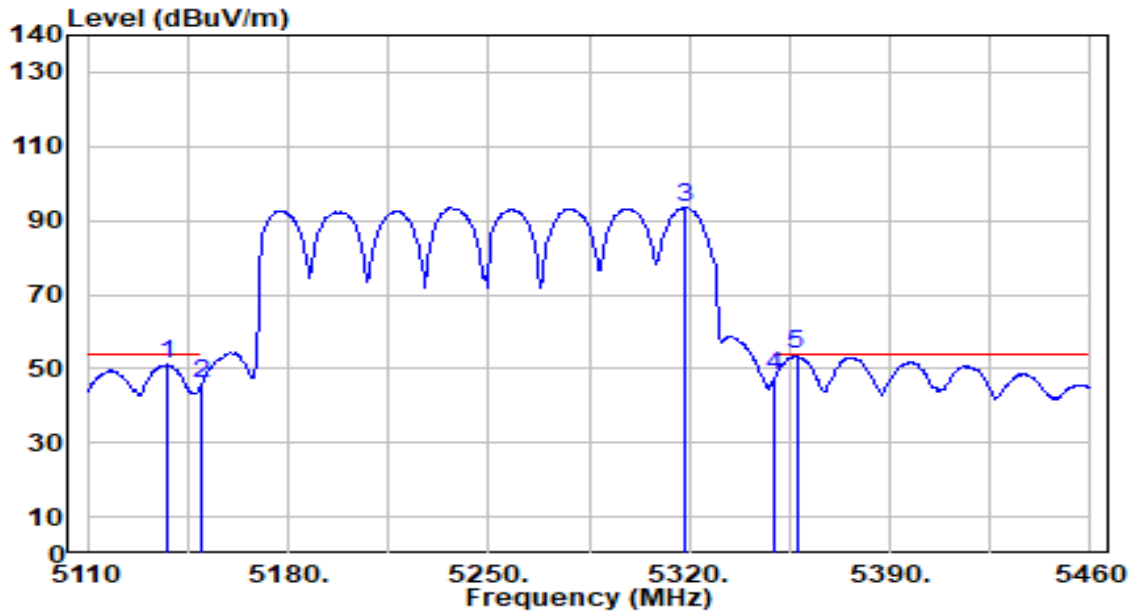


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5137.650	50.39	0.68	51.07	-2.93	54.00	140	215	Average
2	5150.000	45.26	0.68	45.94	-8.06	54.00	140	215	Average
3	5318.600	93.01	0.54	93.55	N/A	N/A	140	215	Average
4	5350.000	47.61	0.51	48.11	-5.89	54.00	140	215	Average
5	* 5357.450	53.21	0.50	53.71	-0.29	54.00	140	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

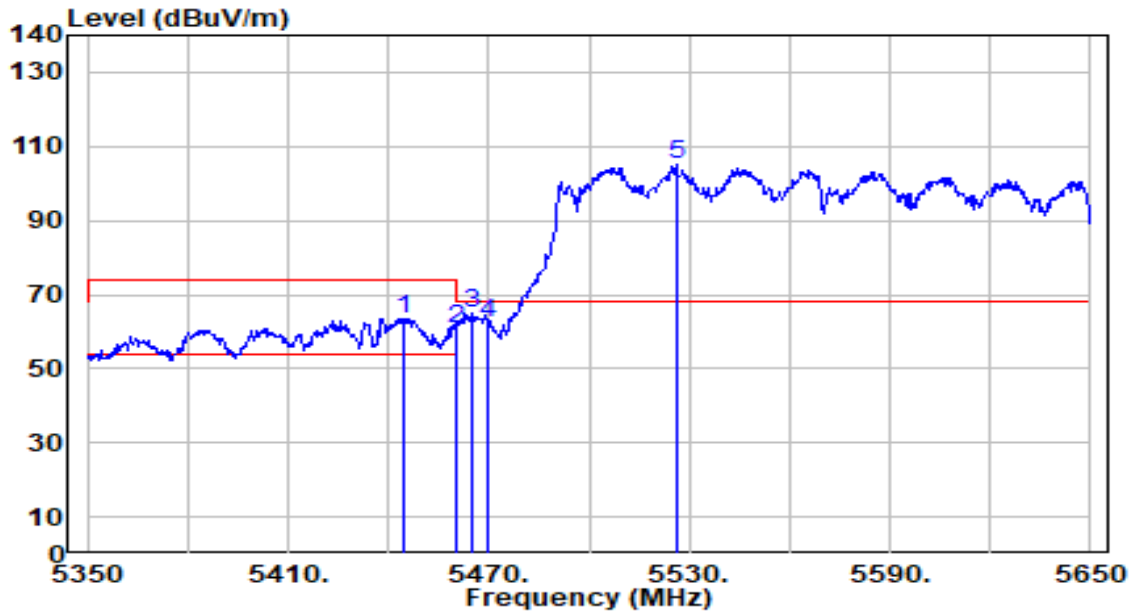


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.500	63.03	0.60	63.63	-10.37	74.00	168	187	Peak
2	5460.000	60.27	0.65	60.93	-13.07	74.00	168	187	Peak
3	* 5464.900	64.19	0.67	64.86	-3.34	68.20	168	187	Peak
4	5470.000	61.66	0.69	62.34	-5.86	68.20	168	187	Peak
5	5526.400	104.32	0.89	105.20	N/A	N/A	168	187	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

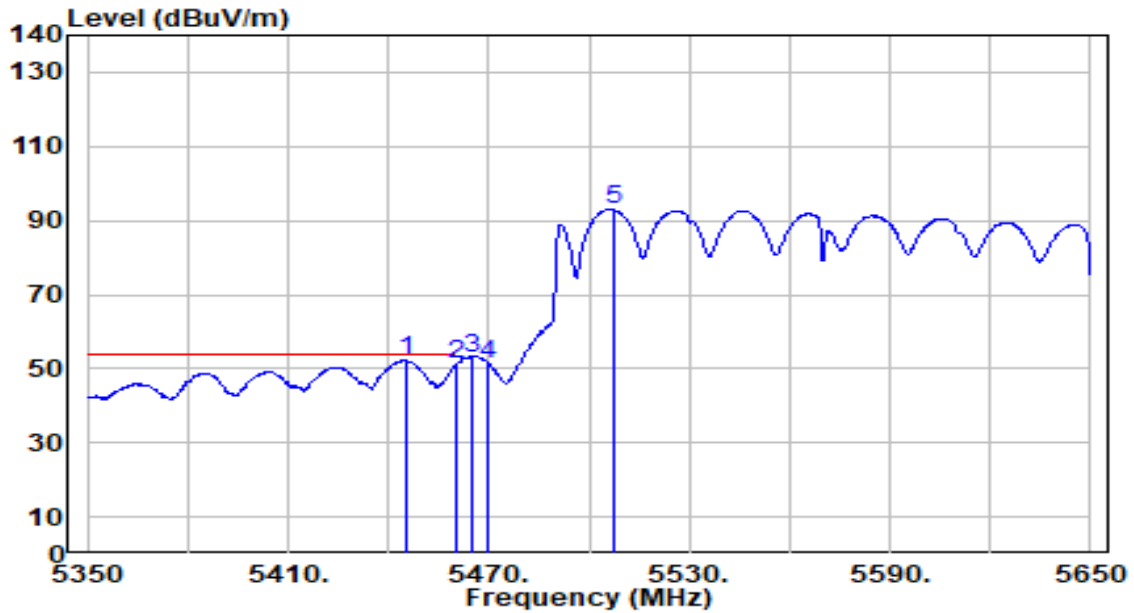


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5445.100	51.68	0.60	52.28	-1.72	54.00	168	187	Average
2	5460.000	50.43	0.65	51.08	-2.92	54.00	168	187	Average
3	5464.900	52.42	0.67	53.09	N/A	N/A	168	187	Average
4	5470.000	50.78	0.69	51.47	N/A	N/A	168	187	Average
5	5507.200	92.12	0.82	92.94	N/A	N/A	168	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

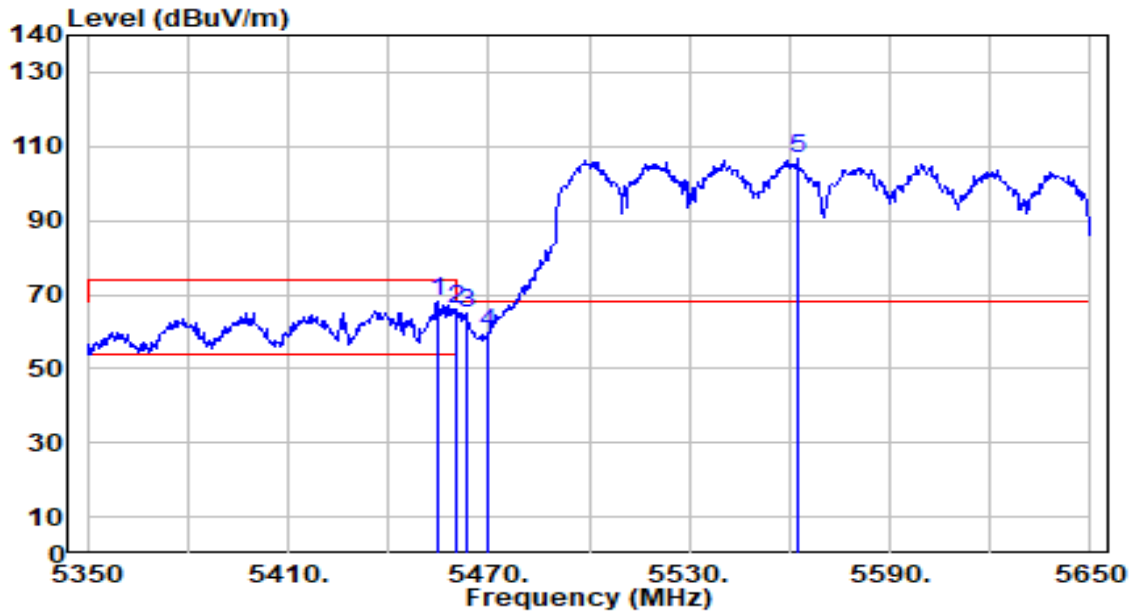


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.700	67.26	0.64	67.90	-6.10	74.00	140	215	Peak
2	5460.000	65.22	0.65	65.87	-8.13	74.00	140	215	Peak
3	* 5463.100	64.17	0.66	64.84	-3.36	68.20	140	215	Peak
4	5470.000	58.86	0.69	59.55	-8.65	68.20	140	215	Peak
5	5562.400	105.87	1.02	106.88	N/A	N/A	140	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

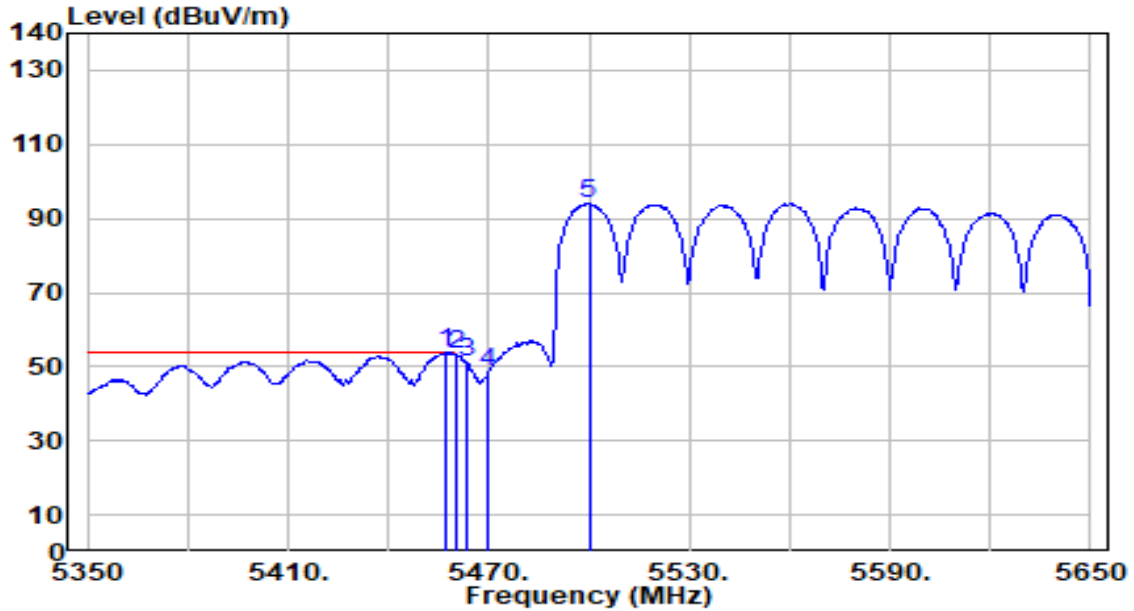


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5457.100	53.23	0.64	53.87	-0.13	54.00	140	215	Average
2		5460.000	52.64	0.65	53.29	-0.71	54.00	140	215	Average
3		5463.100	50.83	0.66	51.50	N/A	N/A	140	215	Average
4		5470.000	47.81	0.69	48.50	N/A	N/A	140	215	Average
5		5500.000	93.26	0.79	94.05	N/A	N/A	140	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

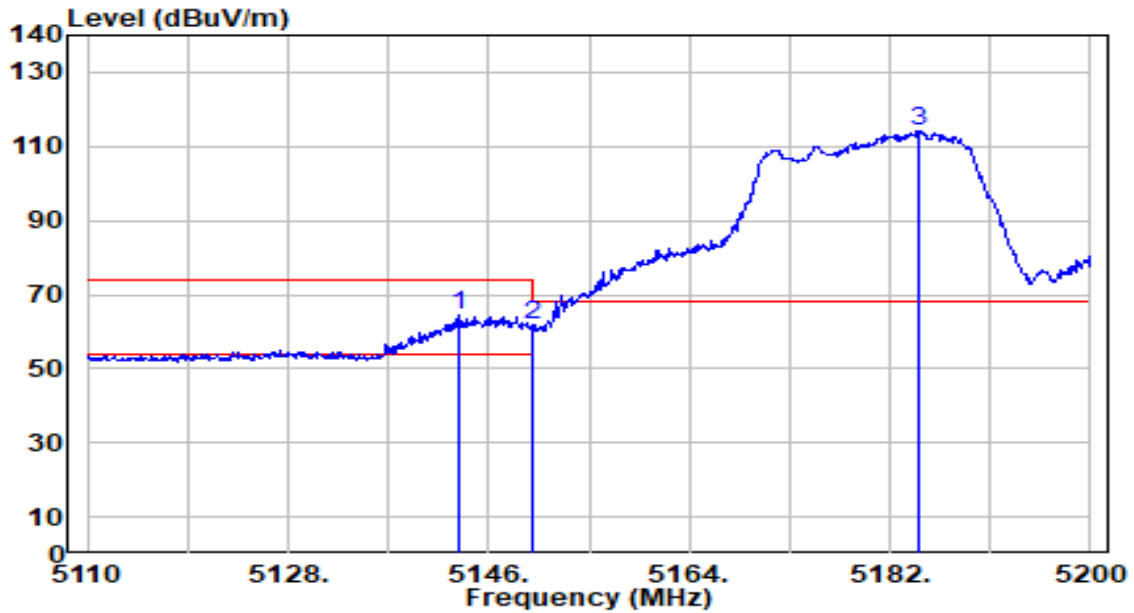


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.390	63.70	0.68	64.38	-9.62	74.00	115	114	Peak
2		5150.000	61.04	0.68	61.72	-12.28	74.00	115	114	Peak
3		5184.700	113.69	0.67	114.36	N/A	N/A	115	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

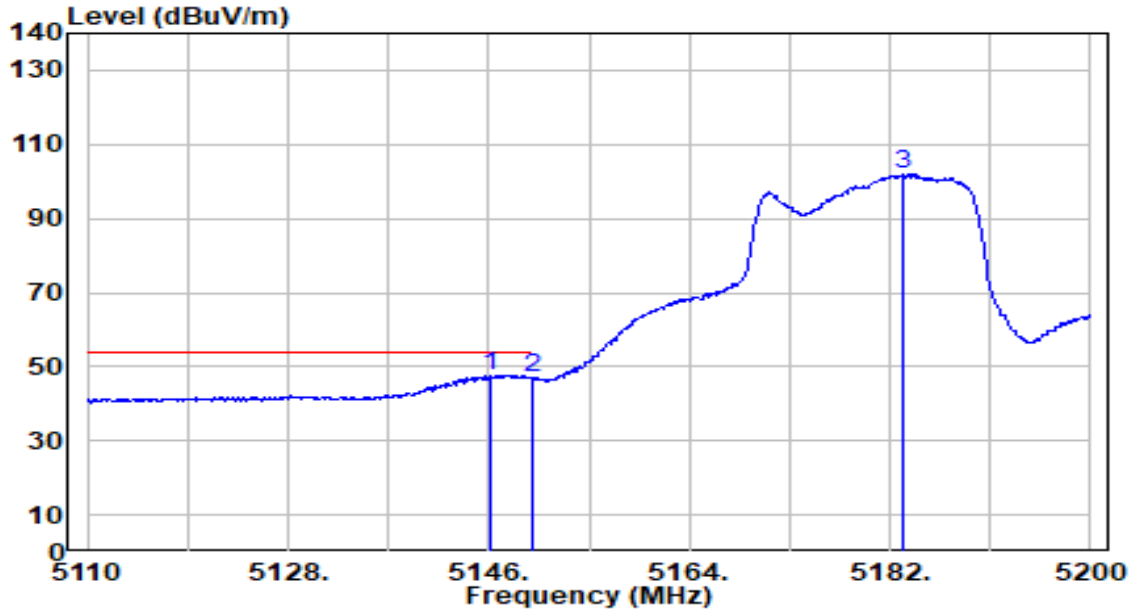


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5146.090	47.13	0.68	47.80	-6.20	54.00	115	114	Average
2		5150.000	46.12	0.68	46.79	-7.21	54.00	115	114	Average
3		5183.170	101.20	0.67	101.87	N/A	N/A	115	114	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

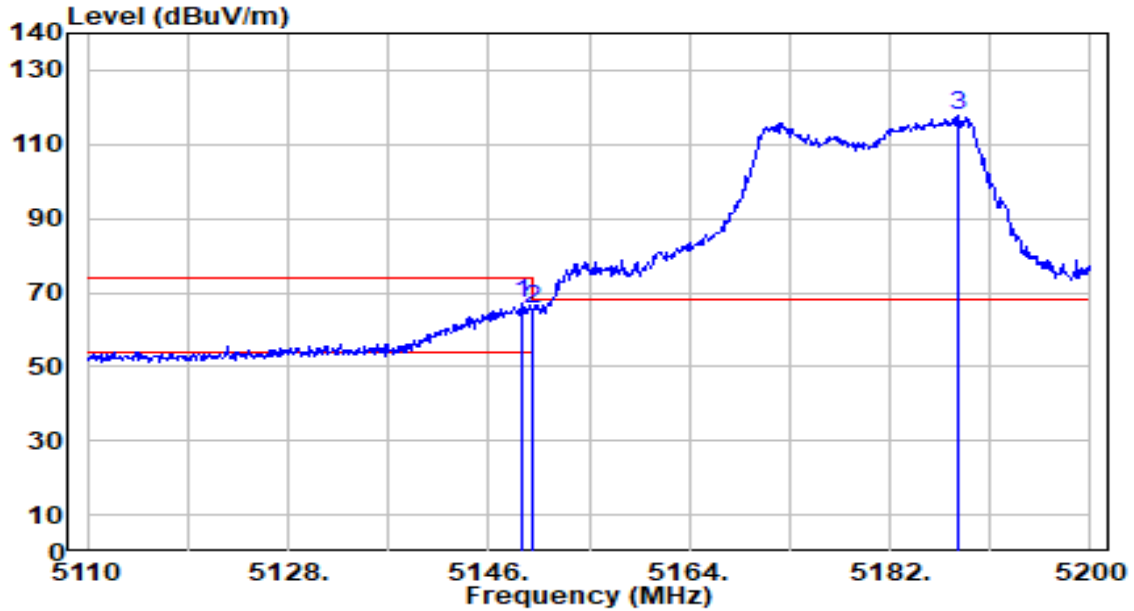


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.060	66.54	0.68	67.21	-6.79	74.00	200	215	Peak
2		5150.000	64.66	0.68	65.33	-8.67	74.00	200	215	Peak
3		5188.120	117.14	0.67	117.81	N/A	N/A	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

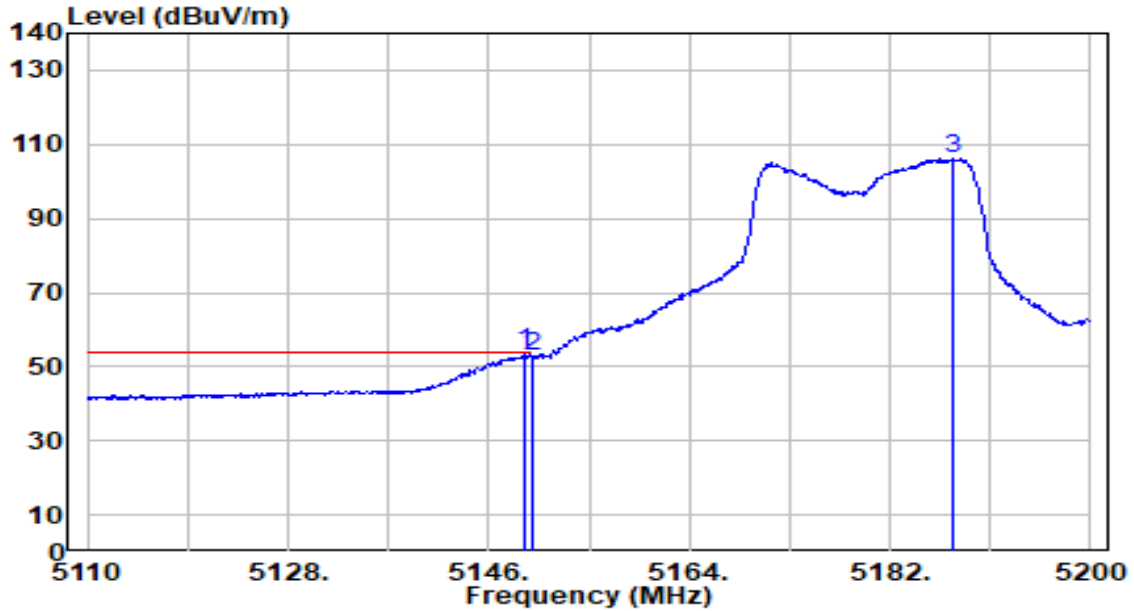


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.150	53.03	0.68	53.71	-0.29	54.00	200	215	Average
2		5150.000	52.07	0.68	52.74	-1.26	54.00	200	215	Average
3		5187.580	105.38	0.67	106.05	N/A	N/A	200	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

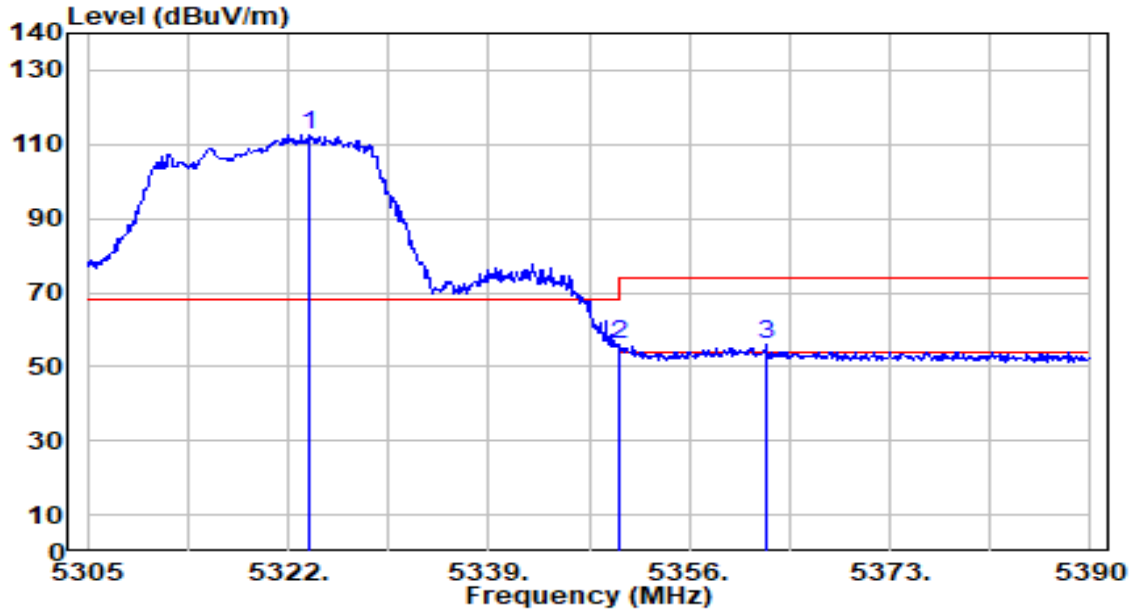


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.700	112.01	0.53	112.55	N/A	N/A	115	114	Peak
2	* 5350.000	55.73	0.51	56.23	-17.77	74.00	115	114	Peak
3	5362.545	55.25	0.49	55.74	-18.26	74.00	115	114	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

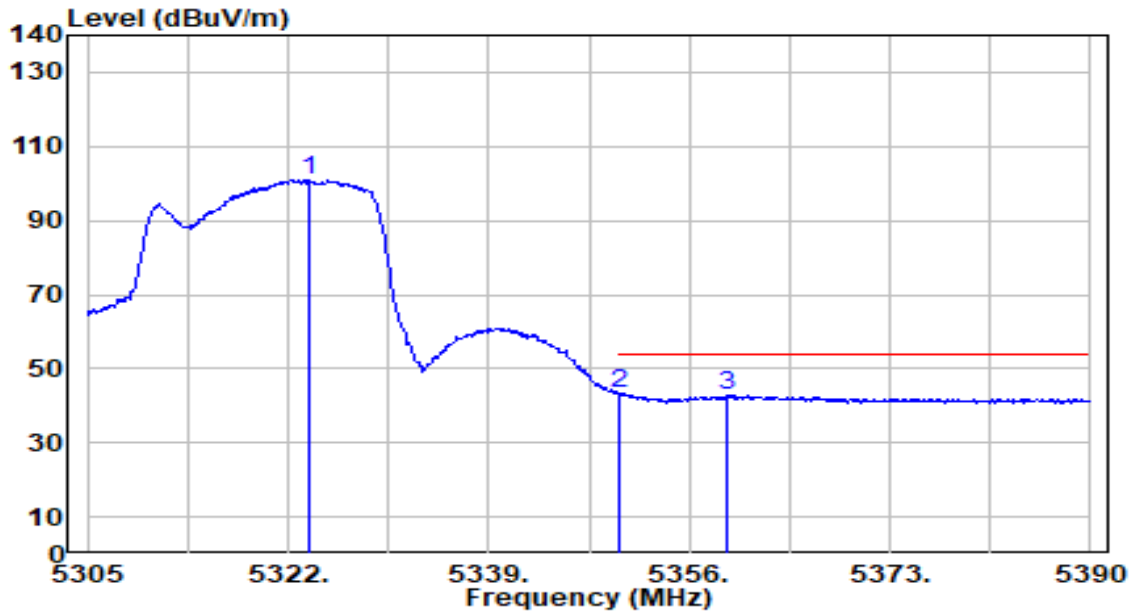


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.700	100.45	0.53	100.99	N/A	N/A	115	114	Average
2	* 5350.000	42.97	0.51	43.47	-10.53	54.00	115	114	Average
3	5359.145	42.51	0.49	43.00	-11.00	54.00	115	114	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

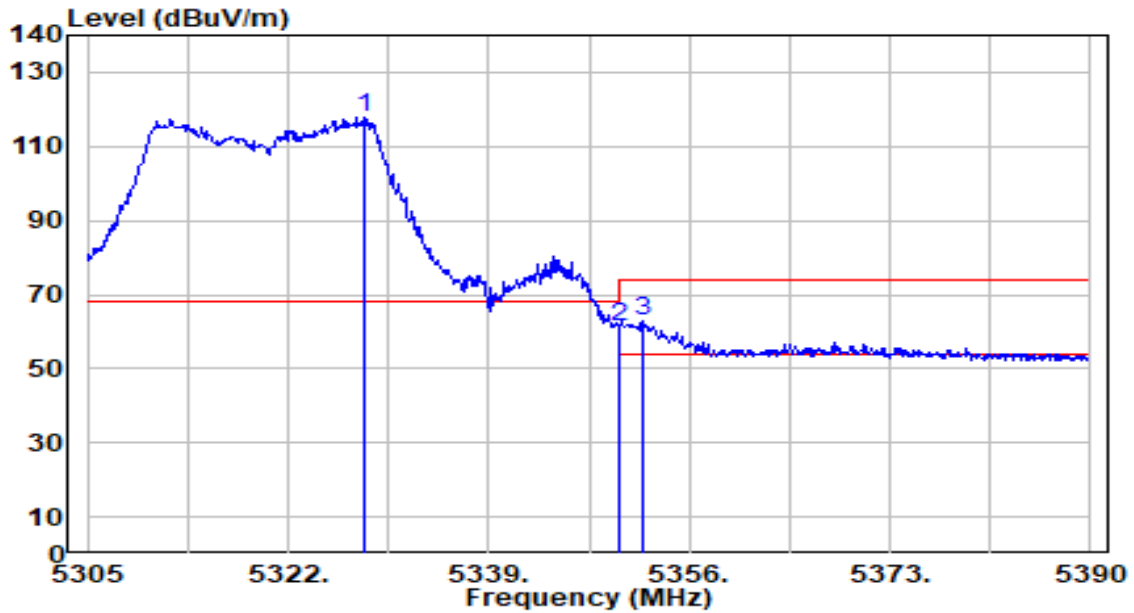


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.545	117.51	0.53	118.04	N/A	N/A	200	215	Peak
2	5350.000	61.03	0.51	61.53	-12.47	74.00	200	215	Peak
3	* 5352.005	62.27	0.50	62.77	-11.23	74.00	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

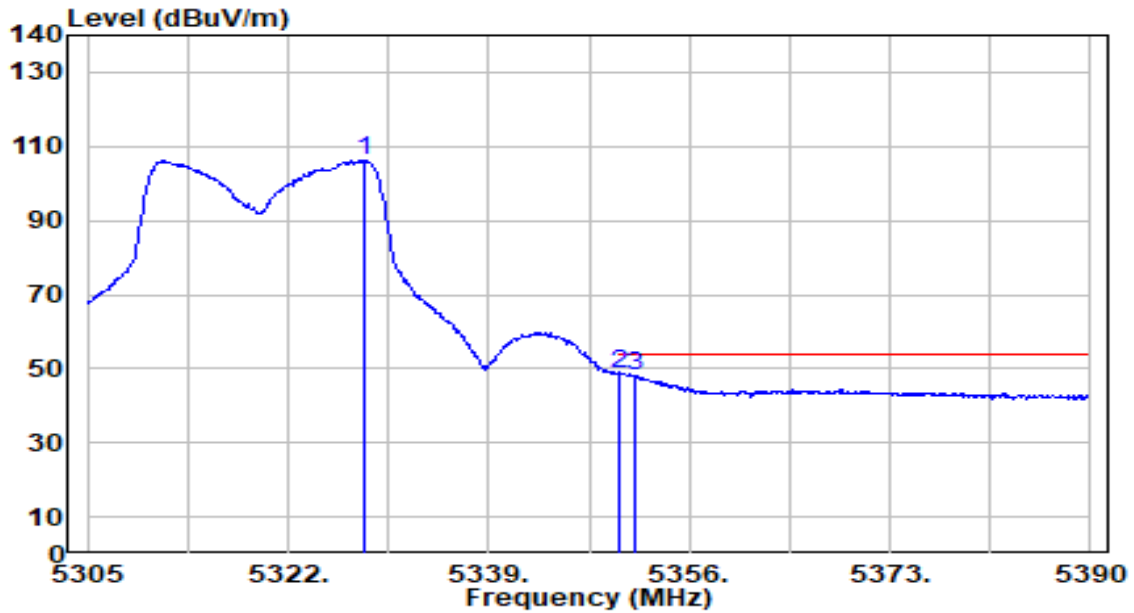


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.375	105.83	0.53	106.36	N/A	N/A	200	215	Average
2	* 5350.000	48.28	0.51	48.78	-5.22	54.00	200	215	Average
3	5351.410	47.80	0.50	48.30	-5.70	54.00	200	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

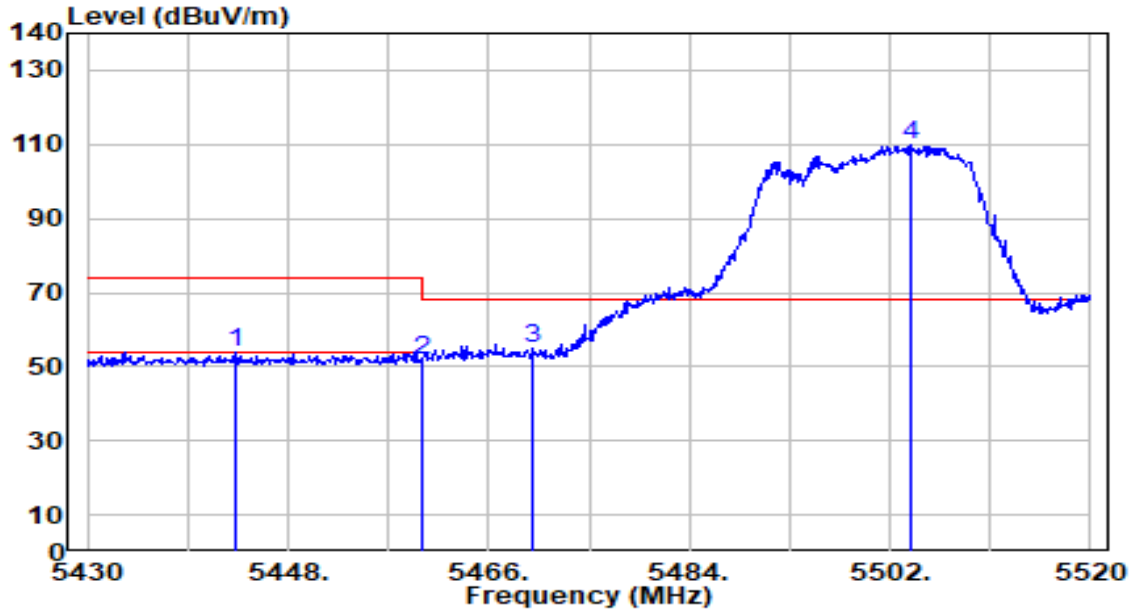


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5443.230	53.10	0.60	53.70	-20.30	74.00	115	114	Peak
2	5460.000	51.29	0.65	51.94	-22.06	74.00	115	114	Peak
3	* 5470.000	54.27	0.69	54.96	-13.24	68.20	115	114	Peak
4	5503.890	109.06	0.80	109.86	N/A	N/A	115	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

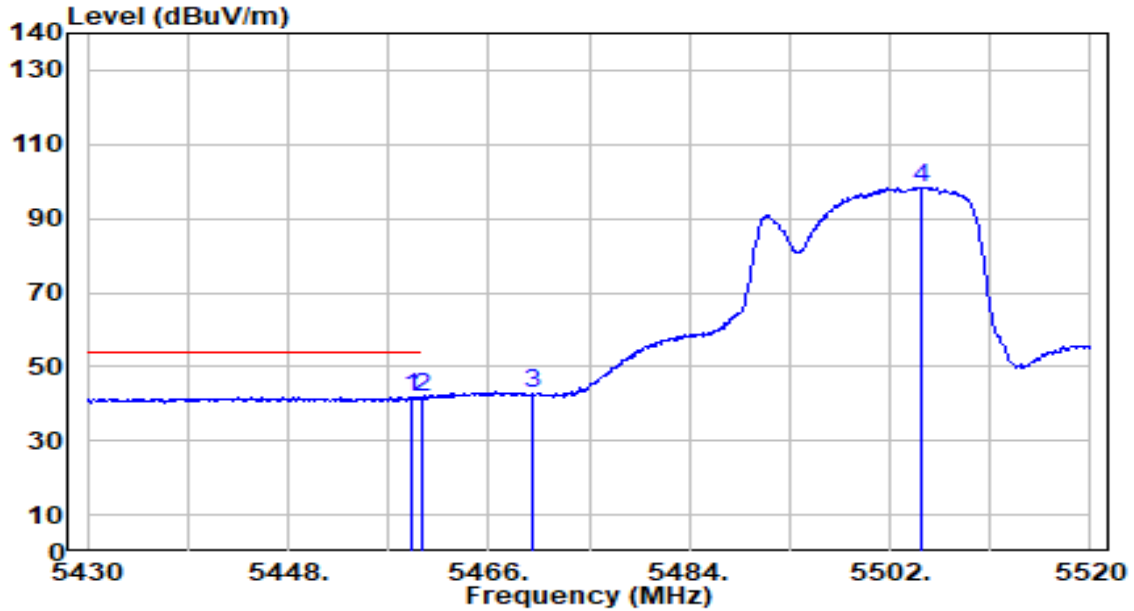


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5458.980	41.30	0.65	41.95	-12.05	54.00	115	114	Average
2		5460.000	40.89	0.65	41.54	-12.46	54.00	115	114	Average
3		5470.000	41.95	0.69	42.64	N/A	N/A	115	114	Average
4		5504.880	97.59	0.81	98.40	N/A	N/A	115	114	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

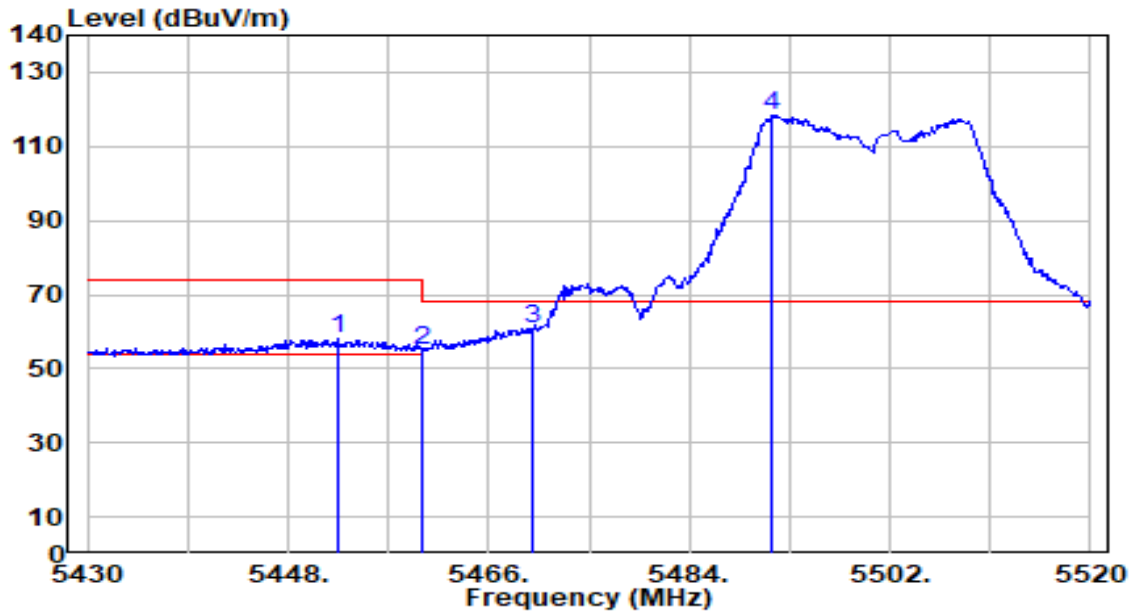


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.410	57.27	0.63	57.89	-16.11	74.00	200	214	Peak
2	5460.000	54.33	0.65	54.98	-19.02	74.00	200	214	Peak
3	* 5470.000	60.16	0.69	60.85	-7.35	68.20	200	214	Peak
4	5491.380	117.46	0.76	118.22	N/A	N/A	200	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

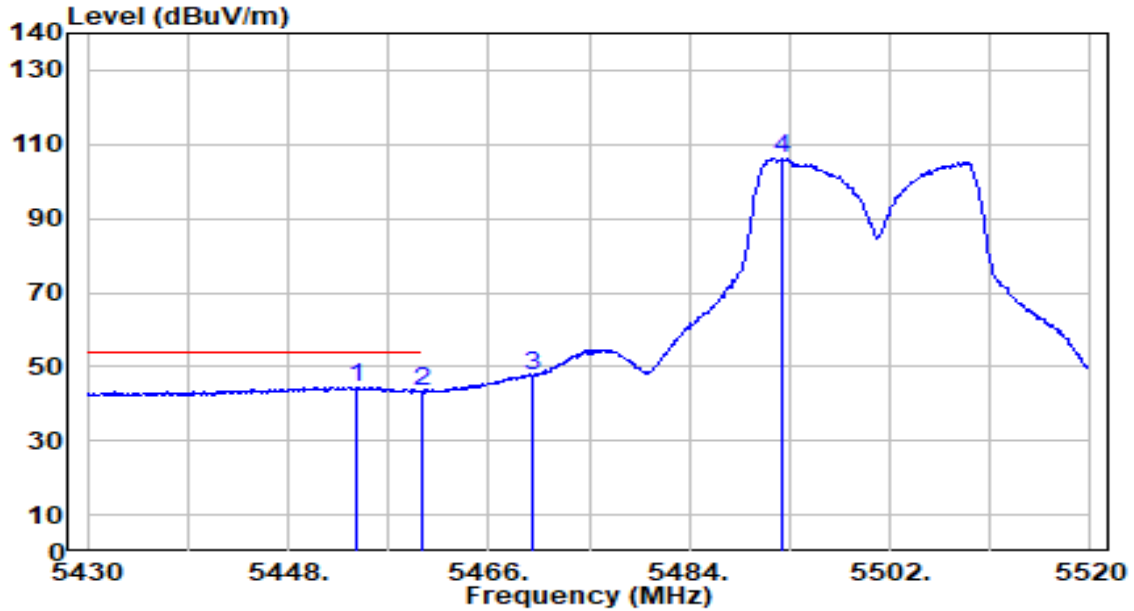


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5454.120	43.92	0.63	44.55	-9.45	54.00	200	214	Average
2	5460.000	42.43	0.65	43.08	-10.92	54.00	200	214	Average
3	5470.000	47.06	0.69	47.75	N/A	N/A	200	214	Average
4	5492.280	105.51	0.76	106.27	N/A	N/A	200	214	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

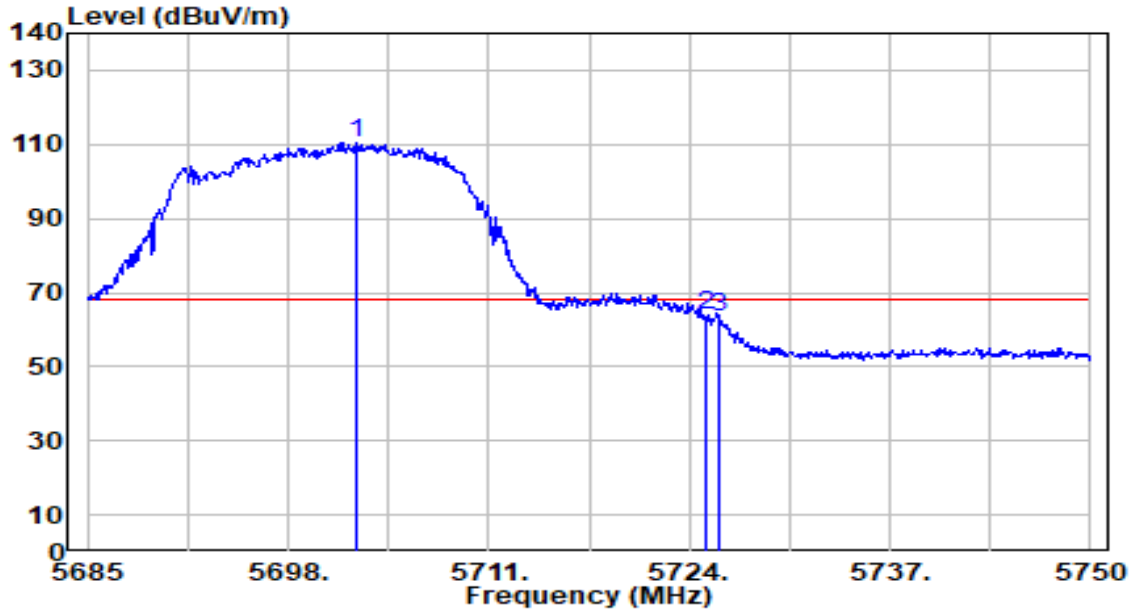


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.355	108.70	1.74	110.44	N/A	N/A	115	114	Peak
2	* 5725.000	62.12	1.86	63.98	-4.22	68.20	115	114	Peak
3	5725.950	61.57	1.87	63.43	-4.77	68.20	115	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

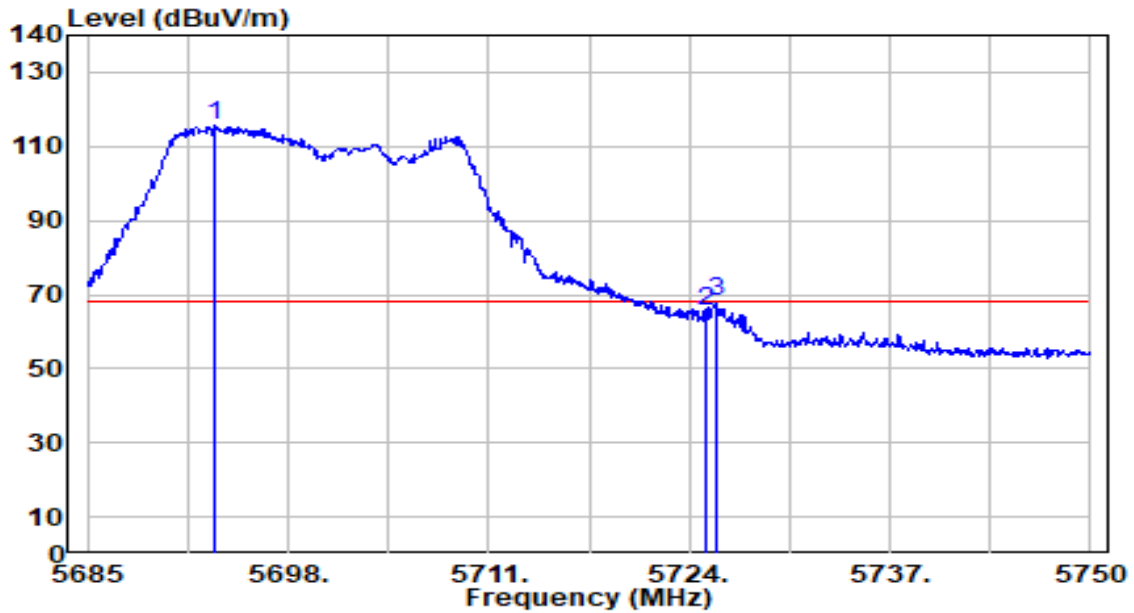


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.190	114.26	1.68	115.94	N/A	N/A	200	214	Peak
2	5725.000	63.47	1.86	65.34	-2.86	68.20	200	214	Peak
3	* 5725.820	66.15	1.87	68.02	-0.18	68.20	200	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

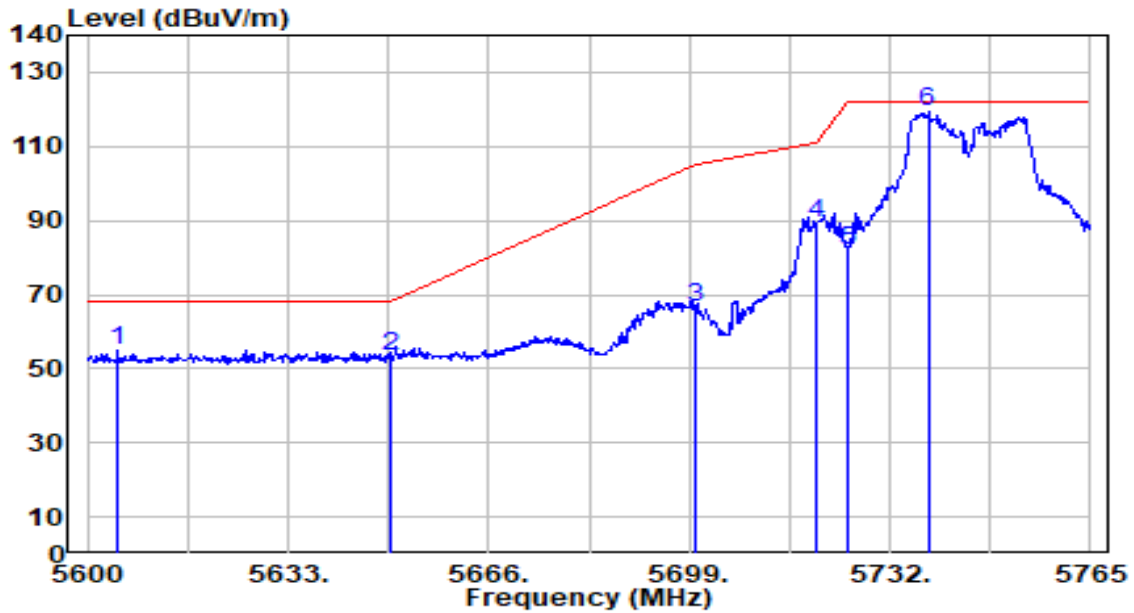


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5604.950	53.70	1.18	54.89	-13.31	68.20	100	180	Peak
2		5650.000	51.67	1.44	53.10	-15.10	68.20	100	180	Peak
3		5700.000	64.64	1.72	66.36	-38.84	105.20	100	180	Peak
4		5720.000	87.51	1.84	89.34	-21.46	110.80	100	180	Peak
5		5725.000	80.27	1.86	82.14	-40.06	122.20	100	180	Peak
6		5738.270	117.22	1.94	119.16	N/A	N/A	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

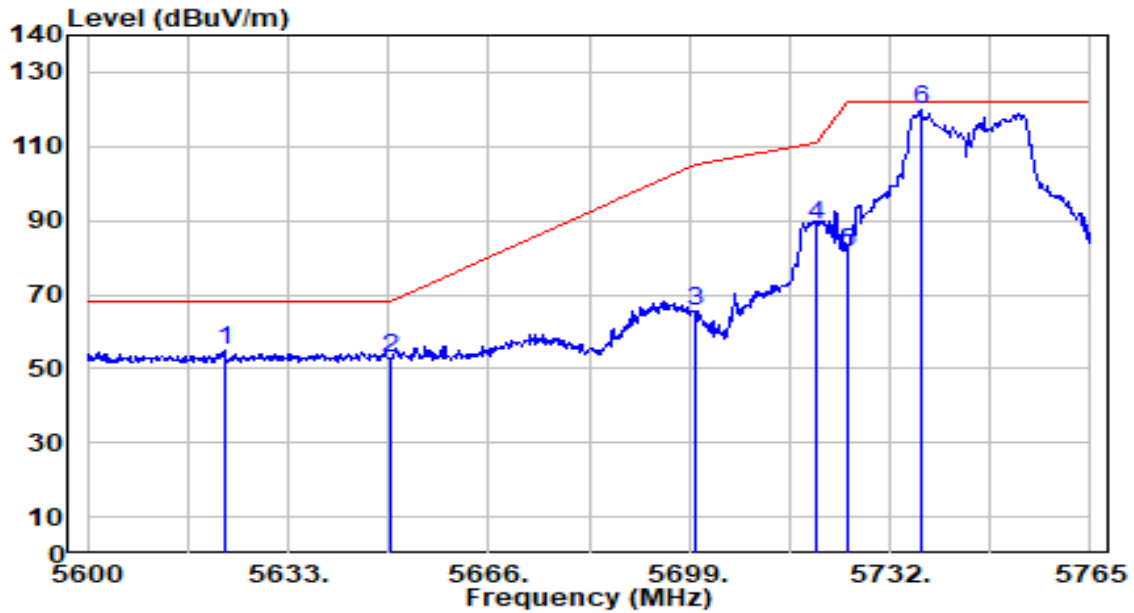


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5622.440	53.49	1.28	54.77	-13.43	68.20	320	199	Peak
2		5650.000	51.53	1.44	52.97	-15.23	68.20	320	199	Peak
3		5700.000	64.05	1.72	65.77	-39.43	105.20	320	199	Peak
4		5720.000	86.93	1.84	88.77	-22.03	110.80	320	199	Peak
5		5725.000	79.36	1.86	81.23	-40.97	122.20	320	199	Peak
6		5737.115	117.86	1.93	119.79	N/A	N/A	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

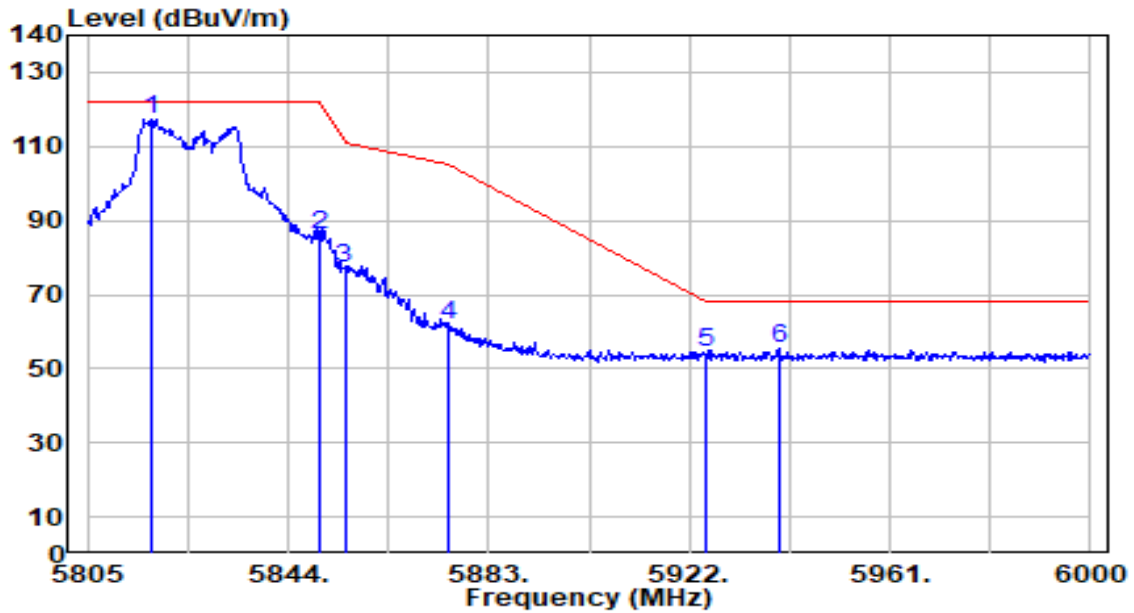


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.480	114.87	2.28	117.15	N/A	N/A	100	180	Peak
2	5850.000	84.10	2.27	86.37	-35.83	122.20	100	180	Peak
3	5855.000	74.78	2.27	77.05	-33.75	110.80	100	180	Peak
4	5875.000	59.80	2.26	62.07	-43.13	105.20	100	180	Peak
5	5925.000	52.14	2.25	54.38	-13.82	68.20	100	180	Peak
6	* 5939.745	53.21	2.24	55.45	-12.75	68.20	100	180	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

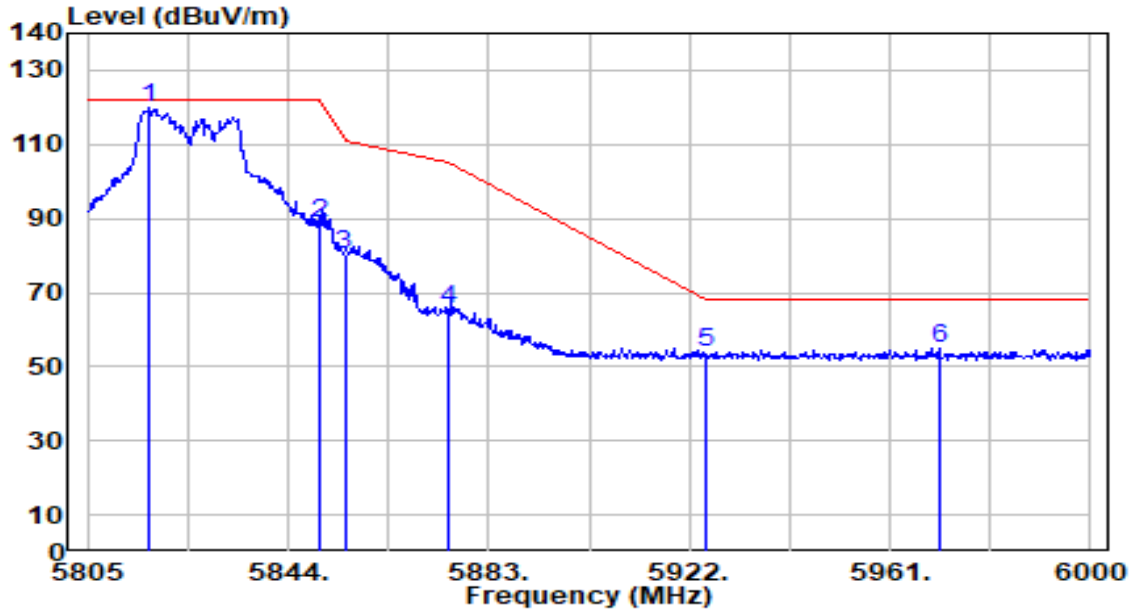


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.090	117.56	2.28	119.85	N/A	N/A	320	199	Peak
2	5850.000	86.40	2.27	88.68	-33.52	122.20	320	199	Peak
3	5855.000	78.12	2.27	80.38	-30.42	110.80	320	199	Peak
4	5875.000	63.03	2.26	65.29	-39.91	105.20	320	199	Peak
5	5925.000	51.52	2.25	53.76	-14.44	68.20	320	199	Peak
6	* 5970.750	52.65	2.23	54.88	-13.32	68.20	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

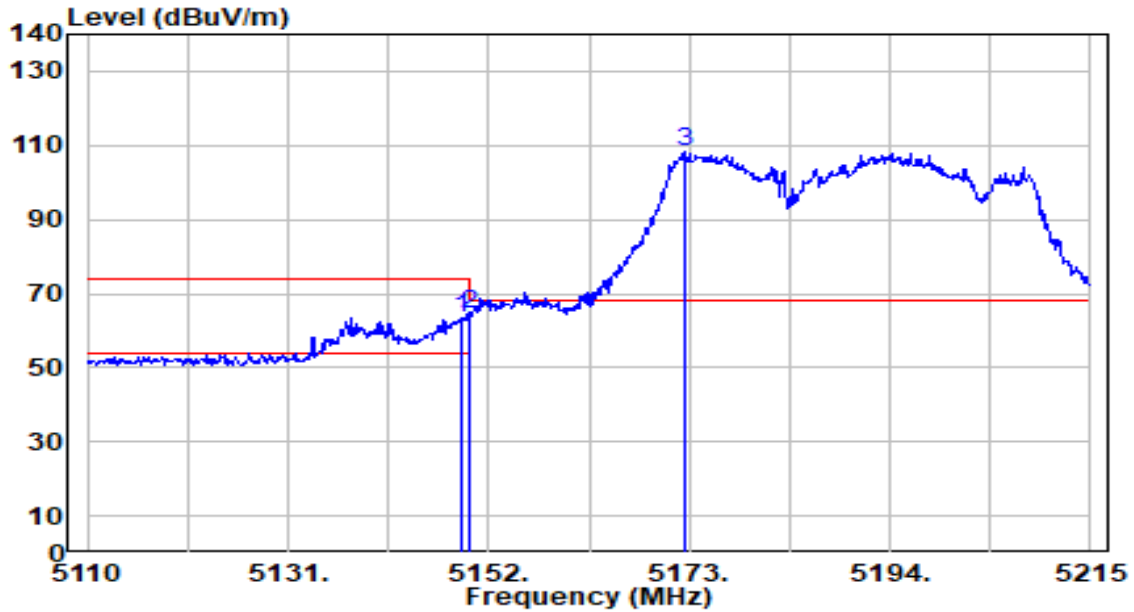


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.060	62.80	0.68	63.47	-10.53	74.00	115	114	Peak
2	* 5150.000	63.95	0.68	64.62	-9.38	74.00	115	114	Peak
3	5172.580	107.55	0.67	108.22	N/A	N/A	115	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

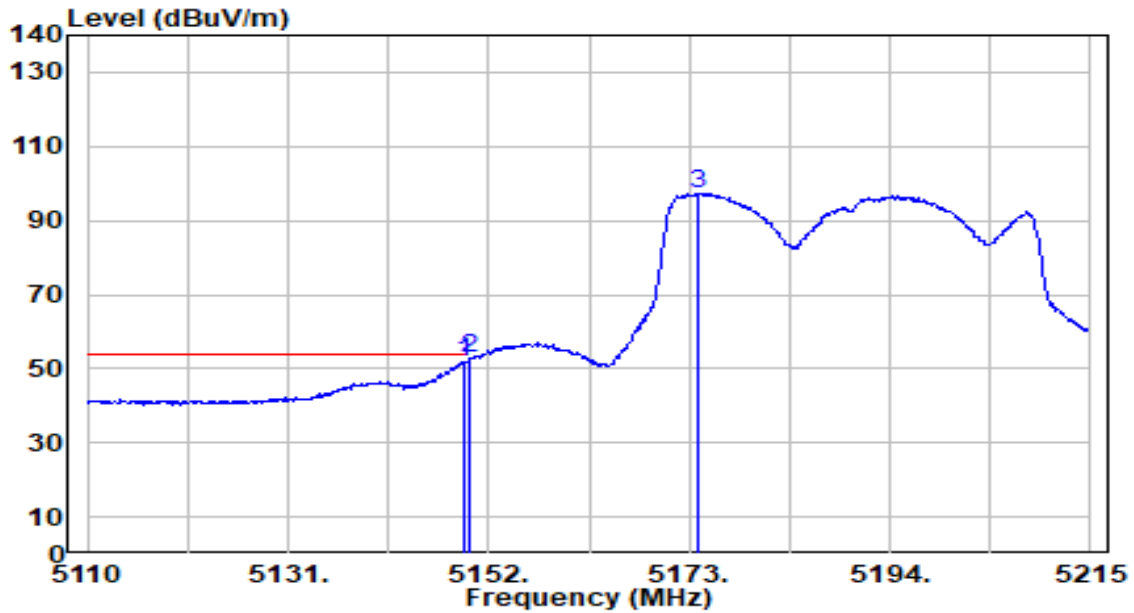


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.480	51.29	0.68	51.97	-2.03	54.00	115	114	Average
2	* 5150.000	52.01	0.68	52.68	-1.32	54.00	115	114	Average
3	5173.840	96.61	0.67	97.29	N/A	N/A	115	114	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

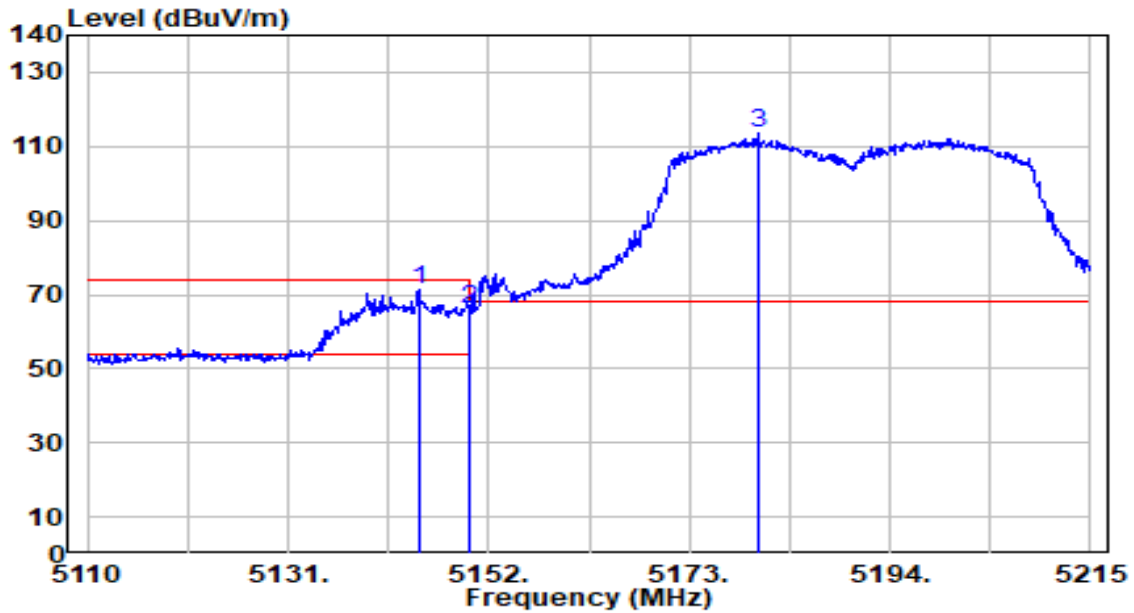


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5144.650	70.76	0.68	71.44	-2.56	74.00	200	180	Peak
2		5150.000	65.13	0.68	65.81	-8.19	74.00	200	180	Peak
3		5180.245	112.92	0.67	113.59	N/A	N/A	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

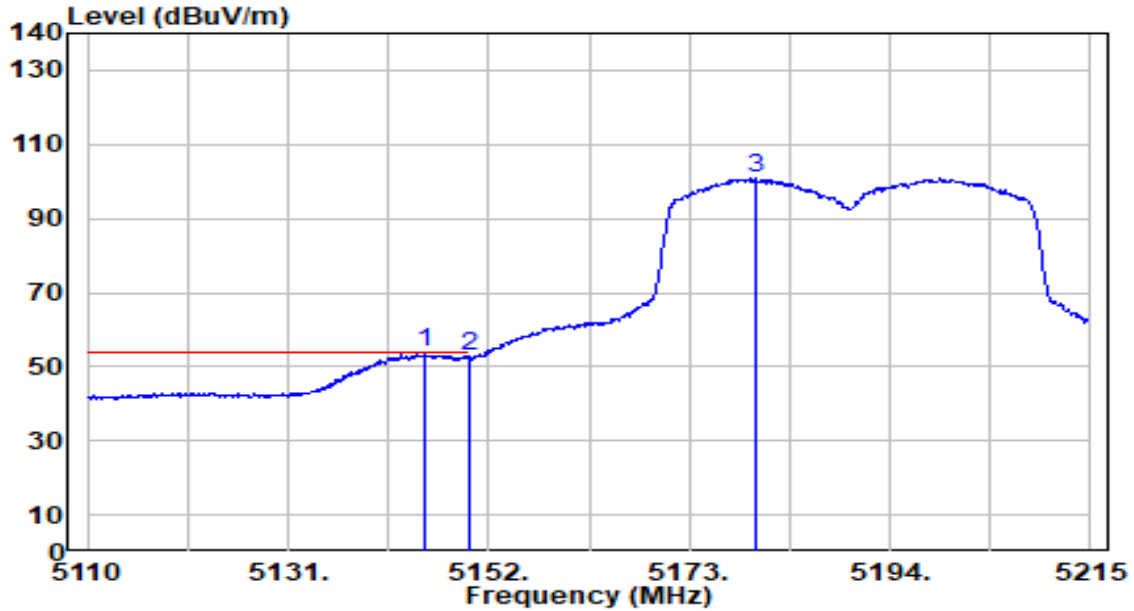


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5145.385	53.12	0.68	53.80	-0.20	54.00	200	180	Average
2		5150.000	51.96	0.68	52.64	-1.36	54.00	200	180	Average
3		5180.035	100.28	0.67	100.96	N/A	N/A	200	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

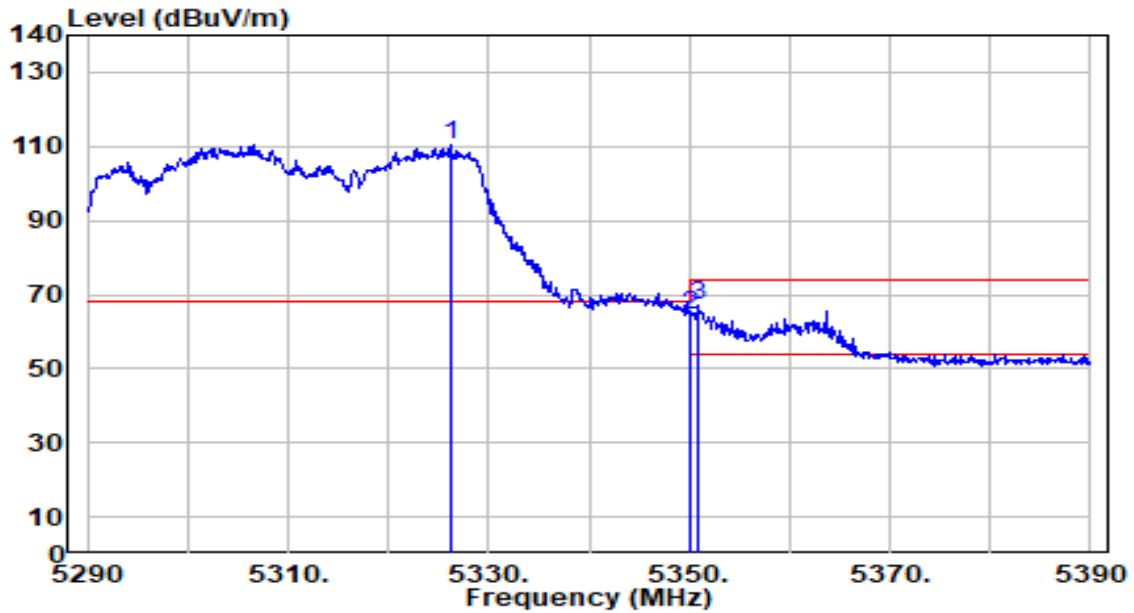


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.200	109.98	0.53	110.51	N/A	N/A	136	189	Peak
2	5350.000	64.03	0.51	64.54	-9.46	74.00	136	189	Peak
3	* 5351.000	66.56	0.50	67.07	-6.93	74.00	136	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

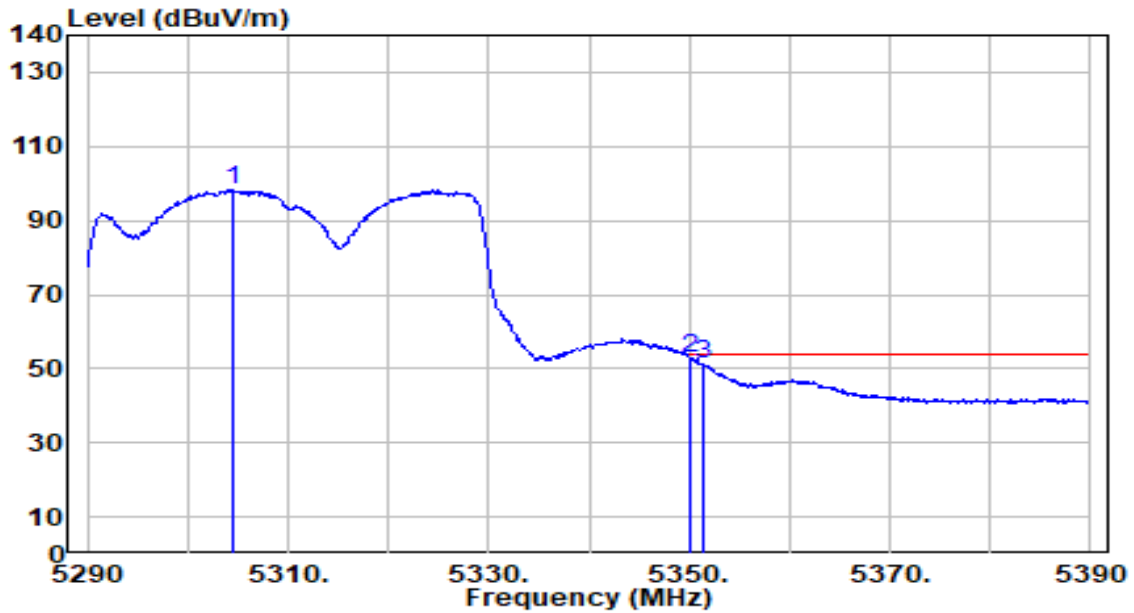


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.500	97.83	0.56	98.38	N/A	N/A	136	189	Average
2	* 5350.000	52.49	0.51	52.99	-1.01	54.00	136	189	Average
3	5351.300	50.88	0.50	51.38	-2.62	54.00	136	189	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

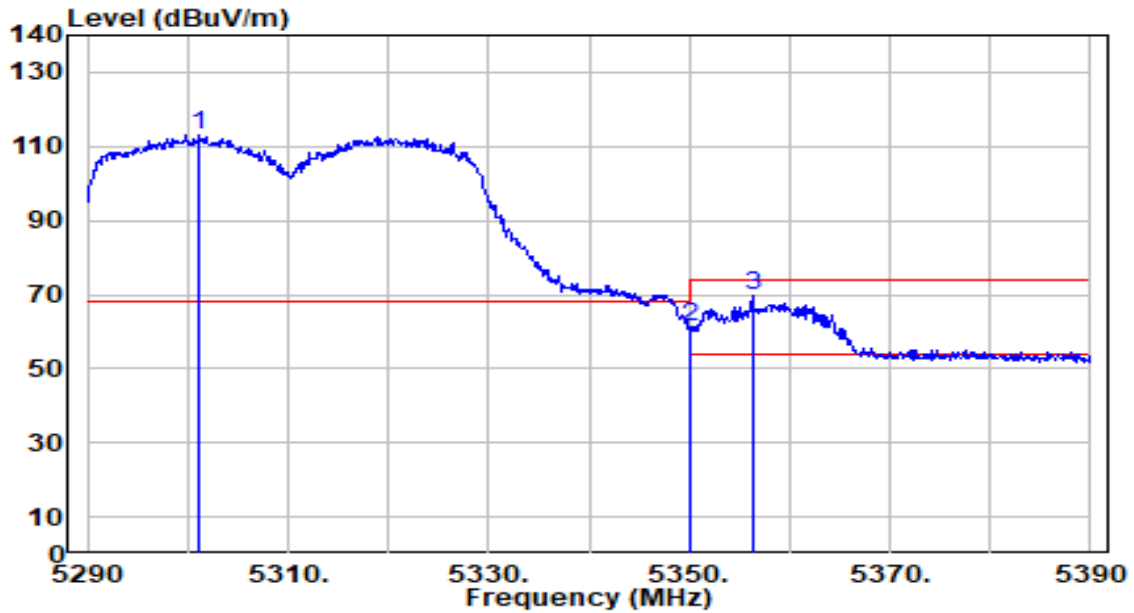


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.100	112.38	0.56	112.93	N/A	N/A	200	180	Peak
2	5350.000	60.87	0.51	61.37	-12.63	74.00	200	180	Peak
3	* 5356.400	69.01	0.50	69.50	-4.50	74.00	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

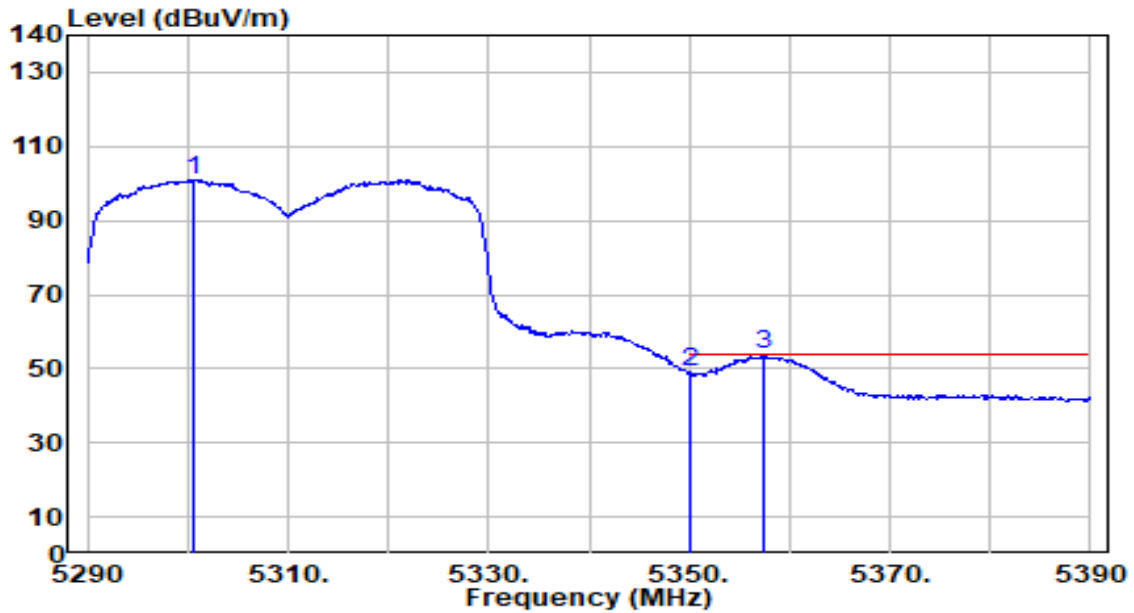


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.600	100.43	0.56	100.99	N/A	N/A	200	180	Average
2	5350.000	48.43	0.51	48.94	-5.06	54.00	200	180	Average
3	* 5357.500	53.39	0.50	53.88	-0.12	54.00	200	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

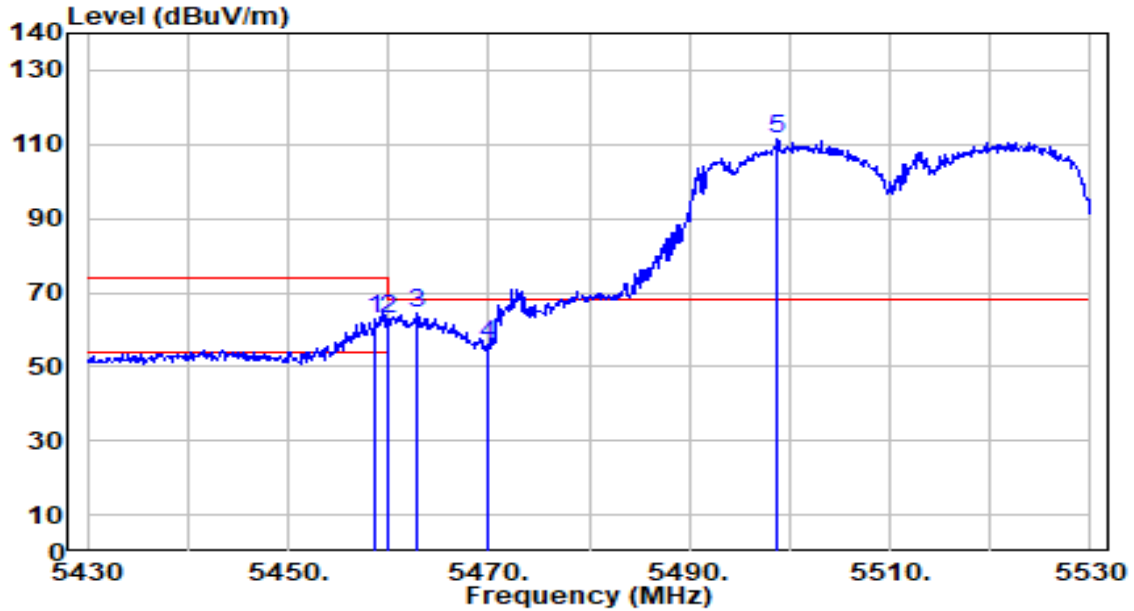


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.700	62.13	0.65	62.78	-11.22	74.00	112	180	Peak
2	5460.000	62.29	0.65	62.95	-11.05	74.00	112	180	Peak
3	* 5462.900	63.98	0.66	64.64	-3.56	68.20	112	180	Peak
4	5470.000	55.58	0.69	56.26	-11.94	68.20	112	180	Peak
5	5498.800	110.45	0.79	111.23	N/A	N/A	112	180	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

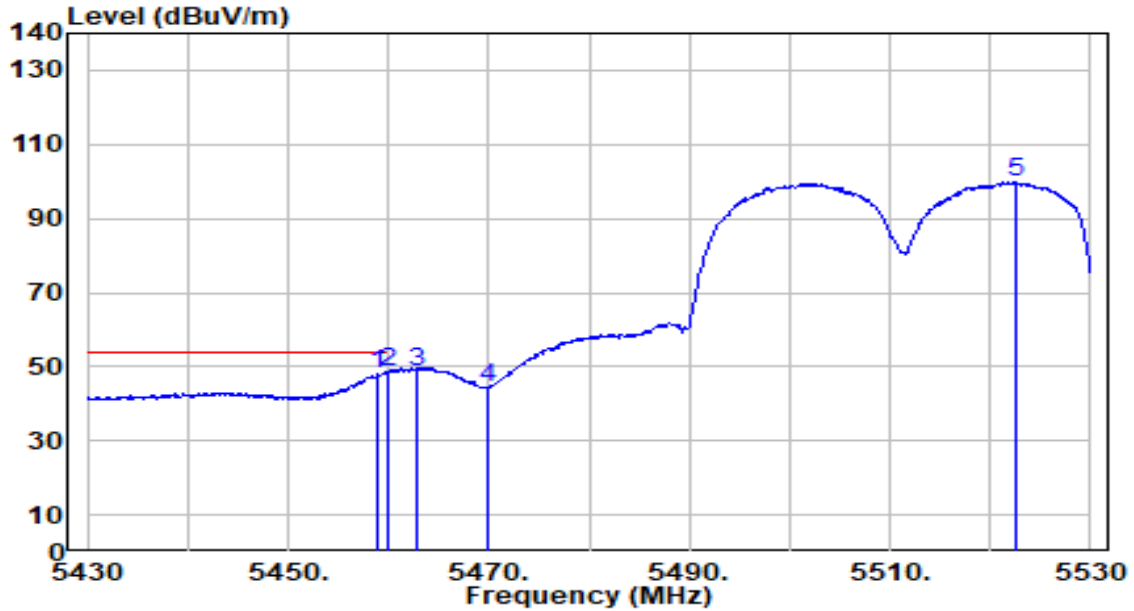


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.000	47.43	0.65	48.08	-5.92	54.00	112	180	Average
2	* 5460.000	48.21	0.65	48.86	-5.14	54.00	112	180	Average
3	5462.900	48.20	0.66	48.87	N/A	N/A	112	180	Average
4	5470.000	43.73	0.69	44.42	N/A	N/A	112	180	Average
5	5522.600	99.06	0.87	99.93	N/A	N/A	112	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

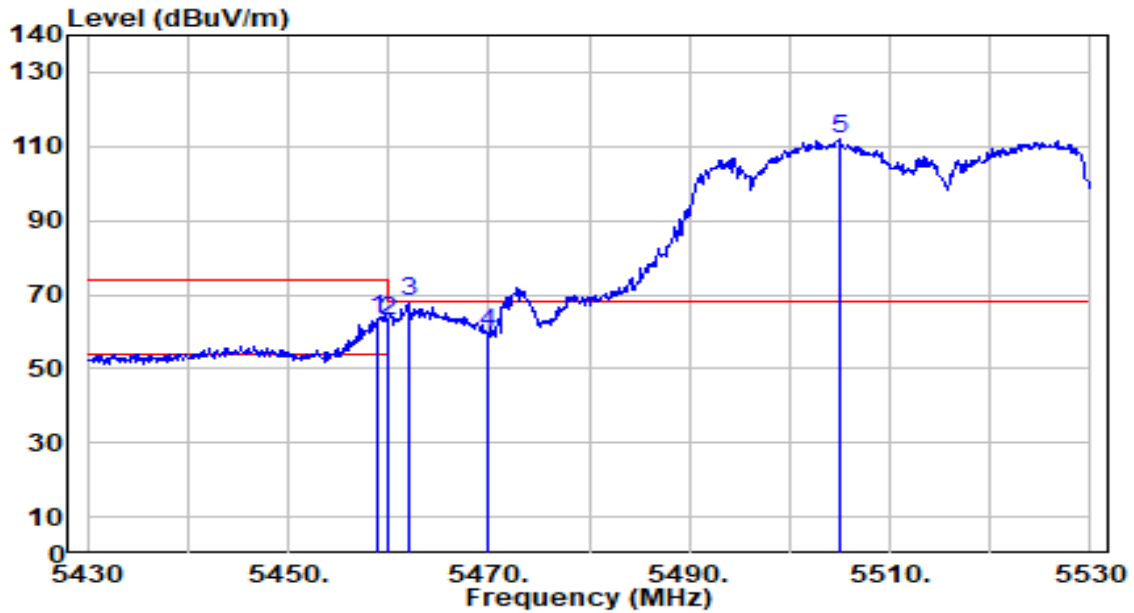


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.000	62.62	0.65	63.27	-10.73	74.00	177	223	Peak
2	5460.000	62.09	0.65	62.74	-11.26	74.00	177	223	Peak
3	* 5462.000	67.25	0.66	67.91	-0.29	68.20	177	223	Peak
4	5470.000	58.80	0.69	59.48	-8.72	68.20	177	223	Peak
5	5504.900	111.30	0.81	112.10	N/A	N/A	177	223	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

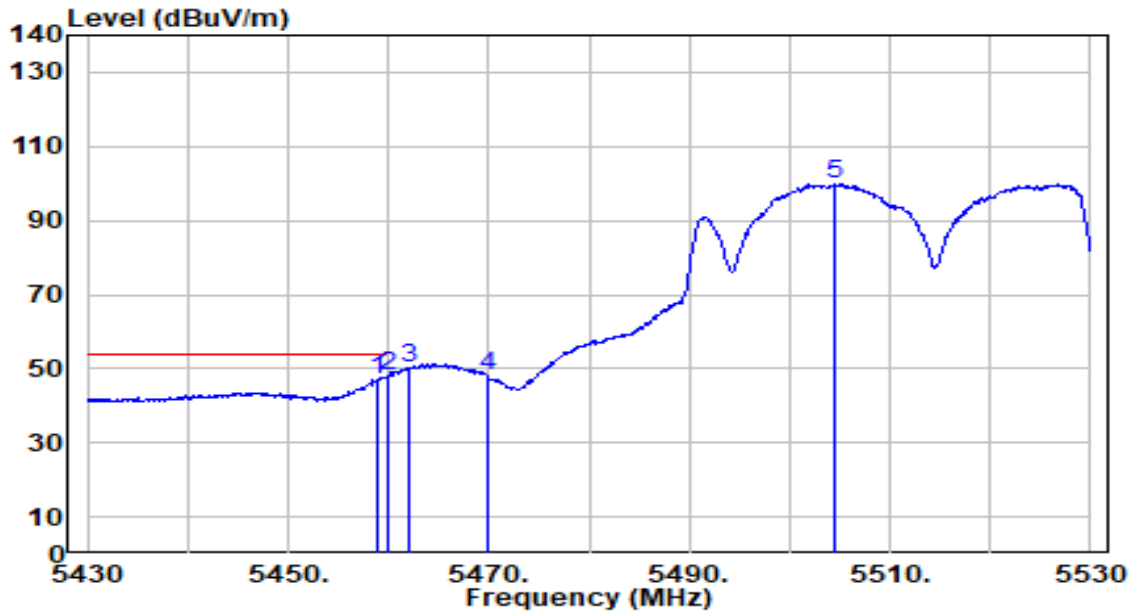


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.000	46.26	0.65	46.91	-7.09	54.00	177	223	Average
2	* 5460.000	47.32	0.65	47.98	-6.02	54.00	177	223	Average
3	5462.000	49.40	0.66	50.06	N/A	N/A	177	223	Average
4	5470.000	47.34	0.69	48.02	N/A	N/A	177	223	Average
5	5504.600	99.04	0.81	99.85	N/A	N/A	177	223	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

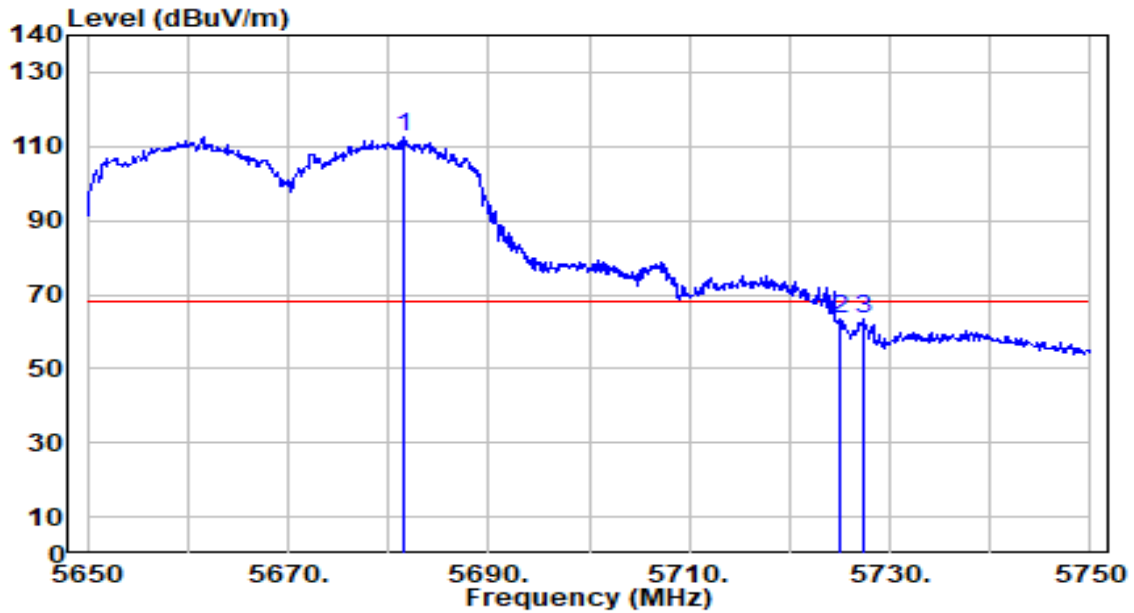


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5681.500	110.93	1.62	112.54	N/A	N/A	112	180	Peak
2	* 5725.000	61.43	1.86	63.29	-4.91	68.20	112	180	Peak
3	5727.400	61.34	1.88	63.22	-4.98	68.20	112	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

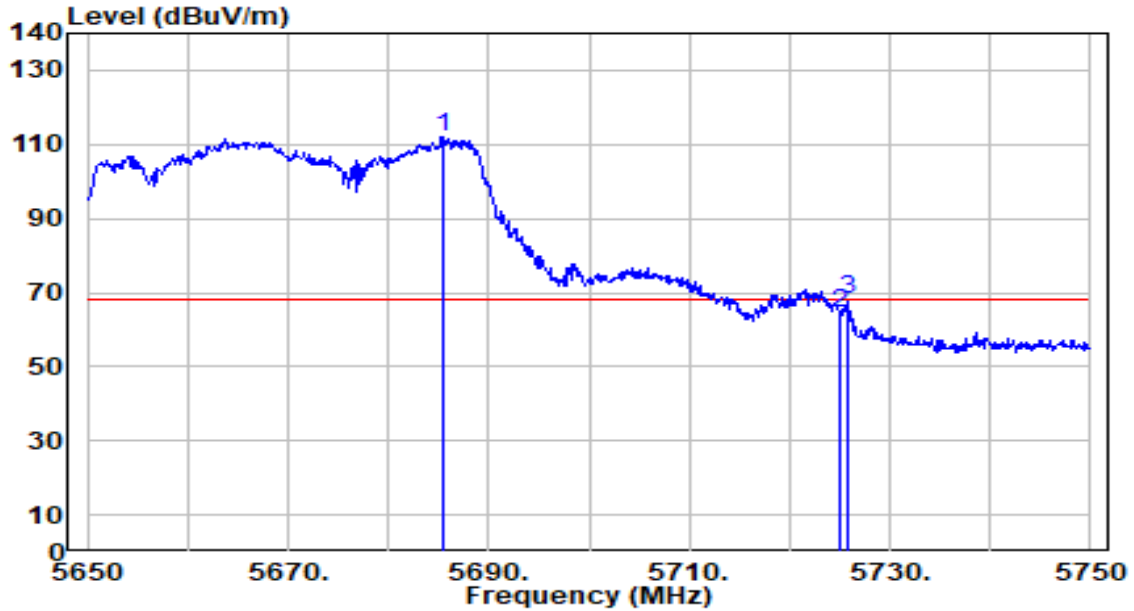


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5685.400	110.19	1.64	111.83	N/A	N/A	177	223	Peak
2	5725.000	62.78	1.86	64.64	-3.56	68.20	177	223	Peak
3	* 5725.700	66.08	1.87	67.95	-0.25	68.20	177	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

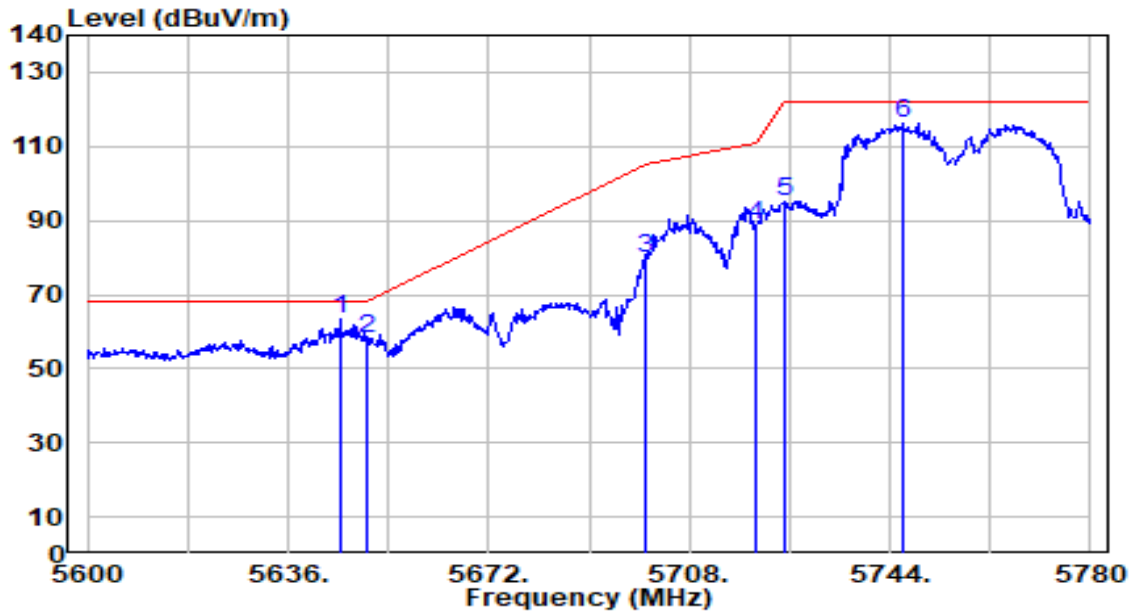


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.360	62.15	1.41	63.56	-4.64	68.20	100	180	Peak
2	5650.000	56.93	1.44	58.37	-9.83	68.20	100	180	Peak
3	5700.000	77.96	1.72	79.69	-25.51	105.20	100	180	Peak
4	5720.000	87.13	1.84	88.96	-21.84	110.80	100	180	Peak
5	5725.000	92.98	1.86	94.84	-27.36	122.20	100	180	Peak
6	5746.160	114.44	1.98	116.43	N/A	N/A	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

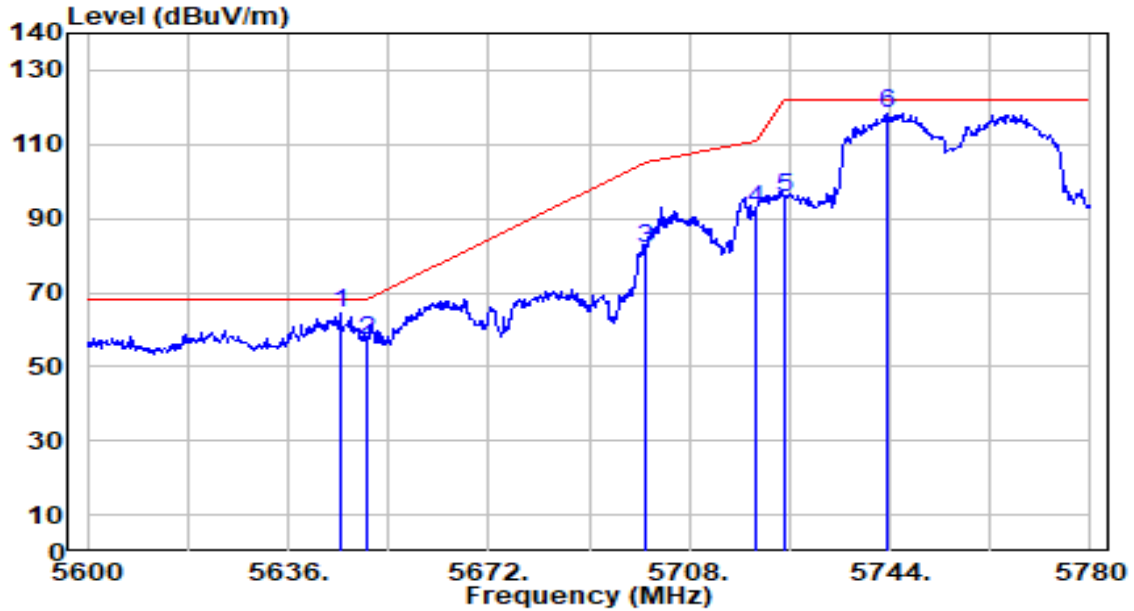


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5645.360	63.02	1.41	64.44	-3.76	68.20	320	199	Peak
2		5650.000	55.43	1.44	56.87	-11.33	68.20	320	199	Peak
3		5700.000	80.18	1.72	81.90	-23.30	105.20	320	199	Peak
4		5720.000	90.73	1.84	92.56	-18.24	110.80	320	199	Peak
5		5725.000	93.54	1.86	95.40	-26.80	122.20	320	199	Peak
6		5743.460	116.46	1.97	118.43	N/A	N/A	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

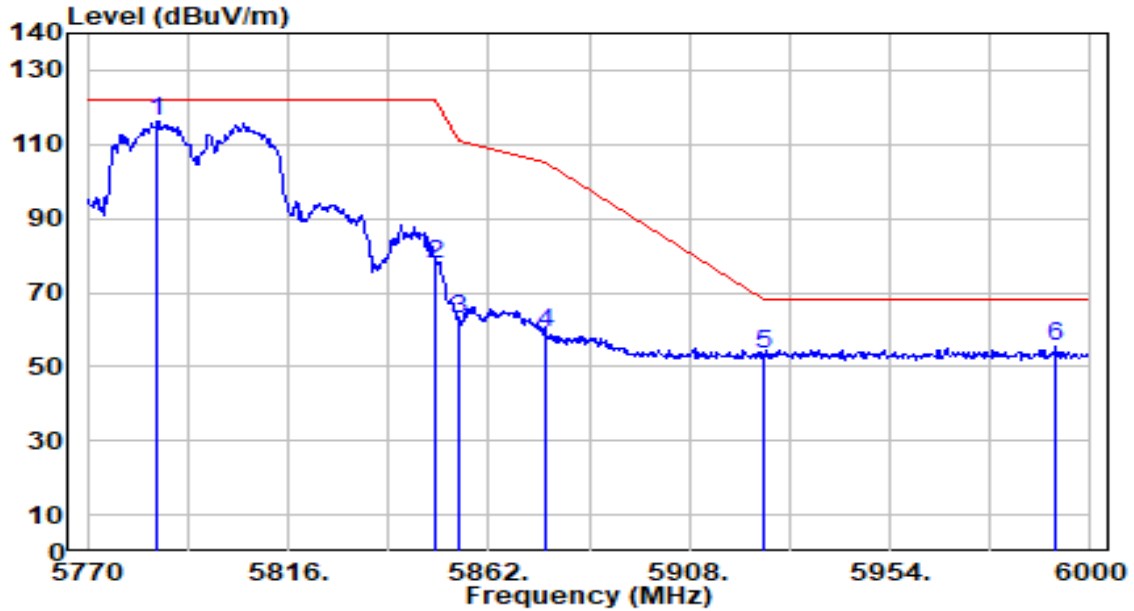


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5786.100	113.98	2.21	116.19	N/A	N/A	100	180	Peak
2	5850.000	75.59	2.27	77.86	-44.34	122.20	100	180	Peak
3	5855.000	60.57	2.27	62.84	-47.96	110.80	100	180	Peak
4	5875.000	56.91	2.26	59.17	-46.03	105.20	100	180	Peak
5	5925.000	51.04	2.25	53.29	-14.91	68.20	100	180	Peak
6	* 5992.180	53.46	2.22	55.68	-12.52	68.20	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

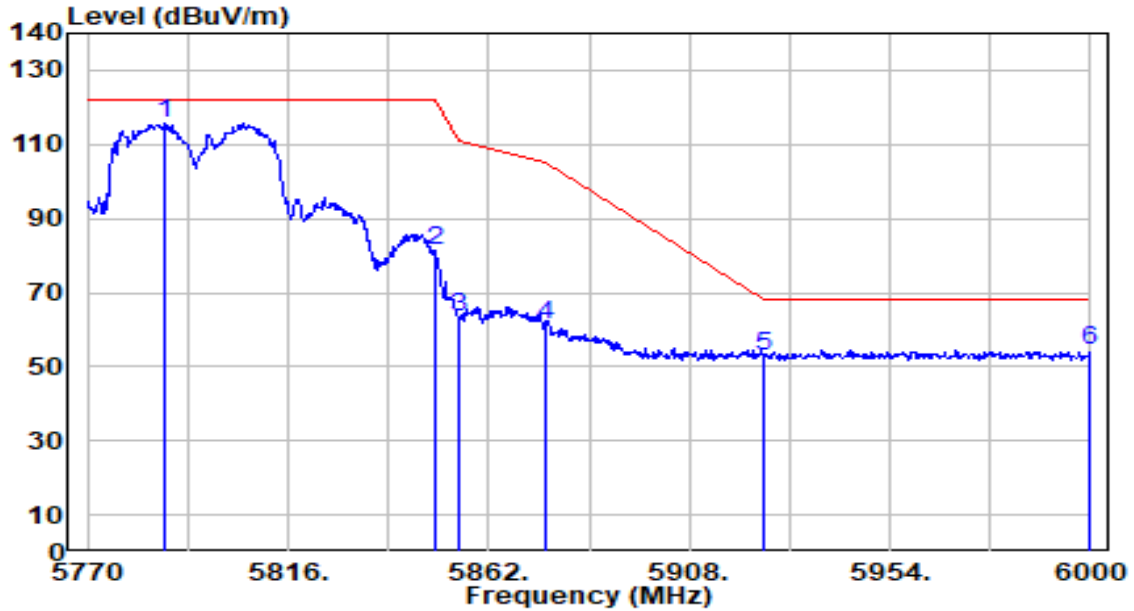


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5787.710	113.66	2.22	115.88	N/A	N/A	320	199	Peak
2	5850.000	78.93	2.27	81.20	-41.00	122.20	320	199	Peak
3	5855.000	61.21	2.27	63.48	-47.32	110.80	320	199	Peak
4	5875.000	59.01	2.26	61.28	-43.92	105.20	320	199	Peak
5	5925.000	50.42	2.25	52.66	-15.54	68.20	320	199	Peak
6	* 6000.000	52.36	2.22	54.58	-13.62	68.20	320	199	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

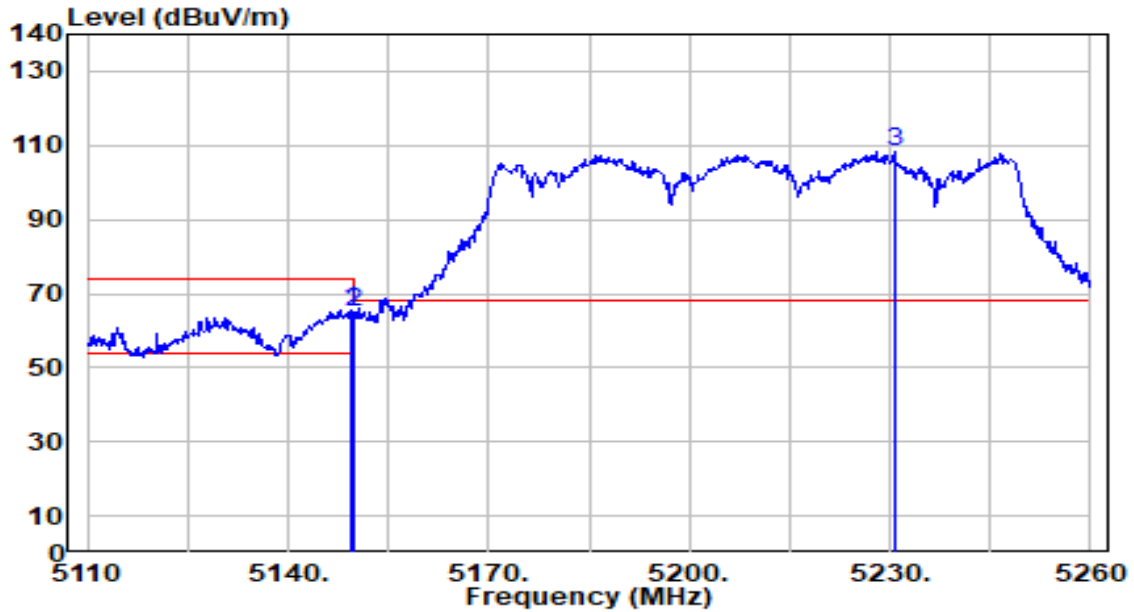


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.300	64.79	0.68	65.47	-8.53	74.00	238	197	Peak
2		5150.000	64.22	0.68	64.90	-9.10	74.00	238	197	Peak
3		5230.600	107.67	0.64	108.31	N/A	N/A	238	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

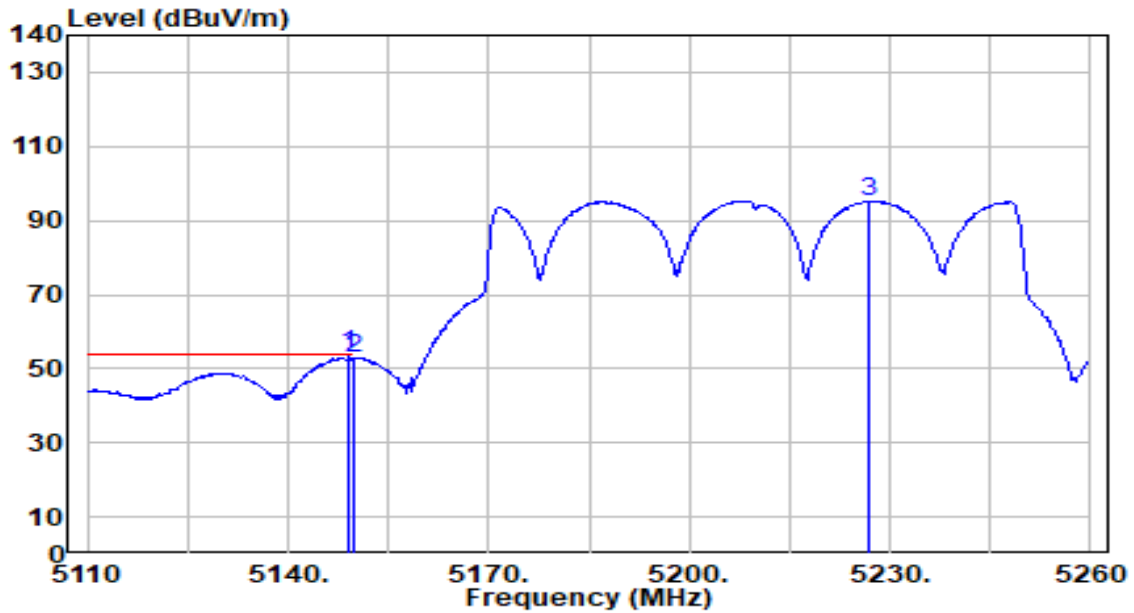


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.000	53.04	0.68	53.72	-0.28	54.00	238	197	Average
2		5150.000	52.38	0.68	53.06	-0.94	54.00	238	197	Average
3		5227.000	94.65	0.64	95.29	N/A	N/A	238	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

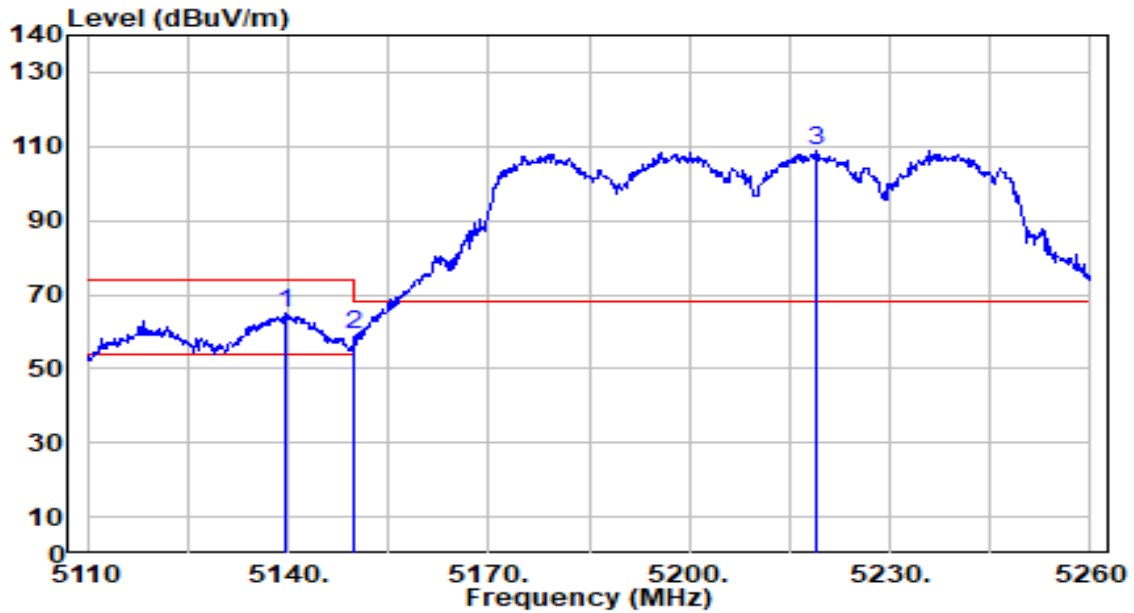


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	64.05	0.68	64.73	-9.27	74.00	263	210	Peak
2		58.50	0.68	59.17	-14.83	74.00	263	210	Peak
3		108.36	0.65	109.01	N/A	N/A	263	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

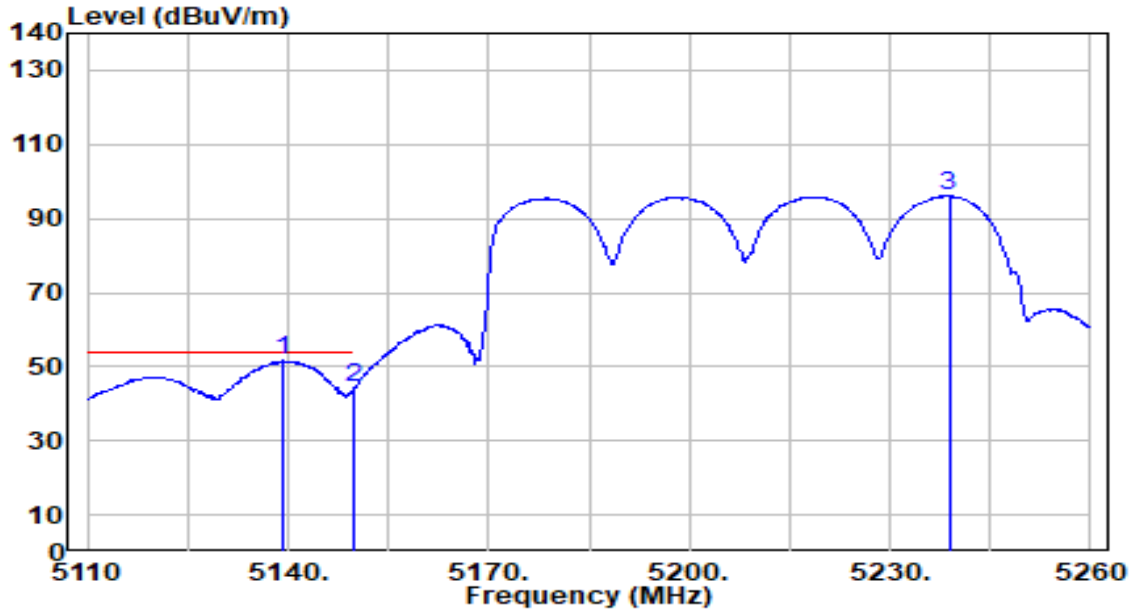


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5139.400	50.96	0.68	51.63	-2.37	54.00	263	210	Average
2		5150.000	43.63	0.68	44.31	-9.69	54.00	263	210	Average
3		5238.850	95.39	0.63	96.02	N/A	N/A	263	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

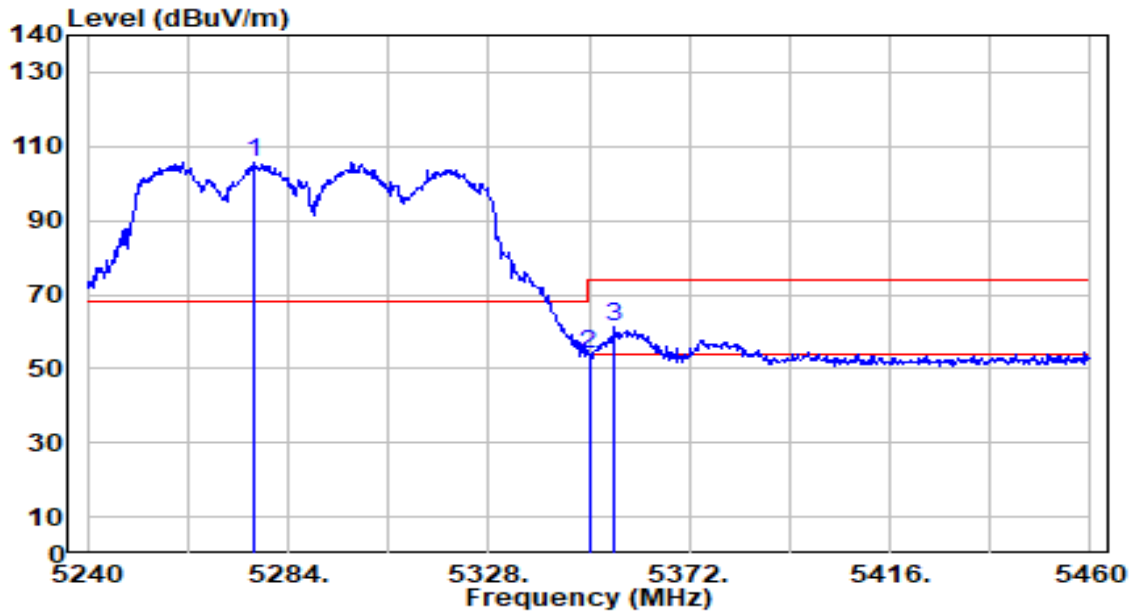


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5276.520	105.02	0.59	105.61	N/A	N/A	238	182	Peak
2	5350.000	53.42	0.51	53.92	-20.08	74.00	238	182	Peak
3	* 5355.500	60.70	0.50	61.19	-12.81	74.00	238	182	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

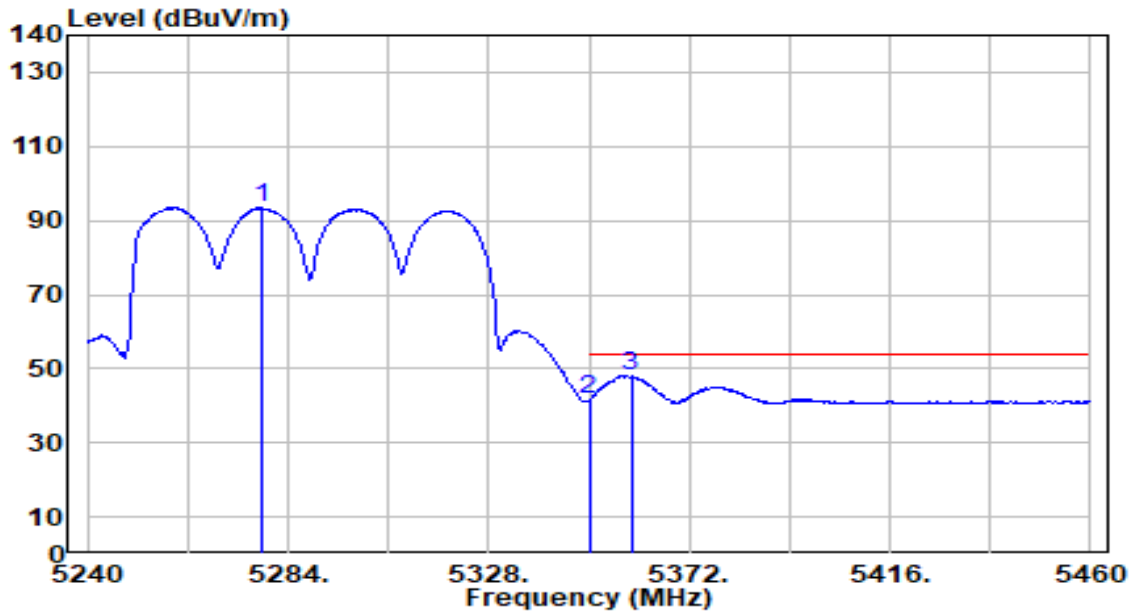


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.500	92.85	0.58	93.44	N/A	N/A	238	182	Average
2	5350.000	41.02	0.51	41.52	-12.48	54.00	238	182	Average
3	* 5359.240	47.46	0.49	47.96	-6.04	54.00	238	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

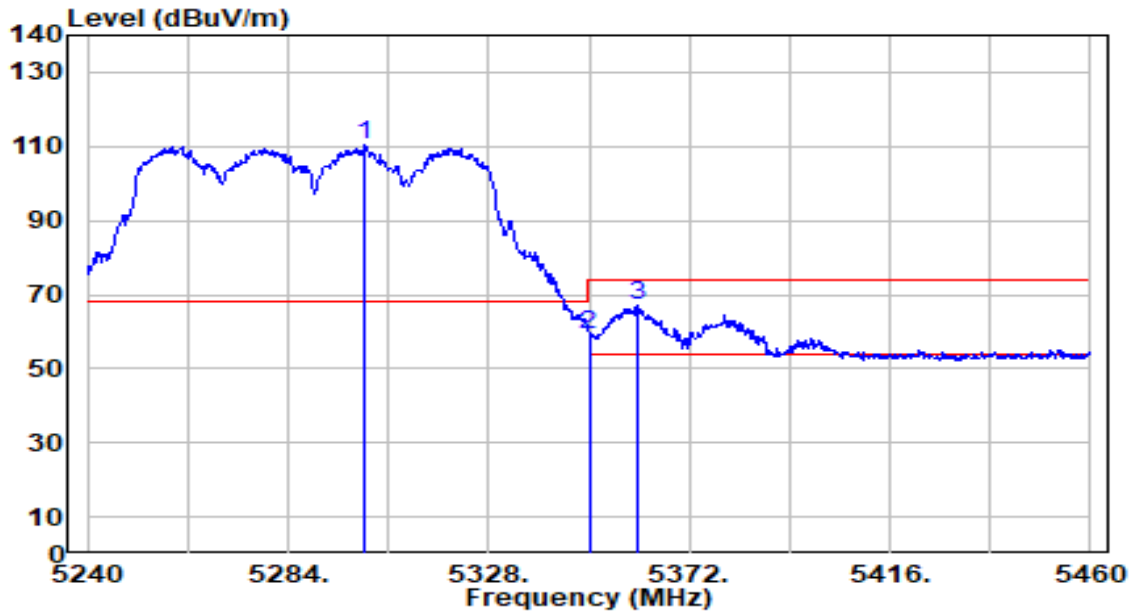


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.500	109.73	0.56	110.29	N/A	N/A	263	210	Peak
2	5350.000	58.72	0.51	59.22	-14.78	74.00	263	210	Peak
3	* 5360.560	66.56	0.49	67.06	-6.94	74.00	263	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

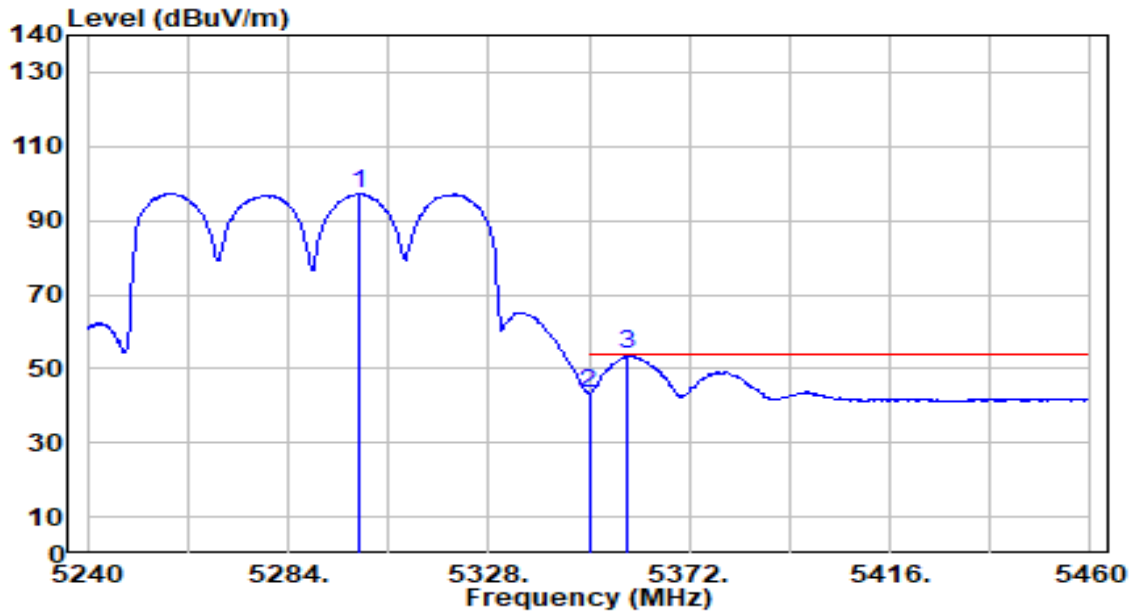


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.620	96.62	0.56	97.18	N/A	N/A	263	210	Average
2	5350.000	42.59	0.51	43.10	-10.90	54.00	263	210	Average
3	* 5358.360	53.21	0.50	53.71	-0.29	54.00	263	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

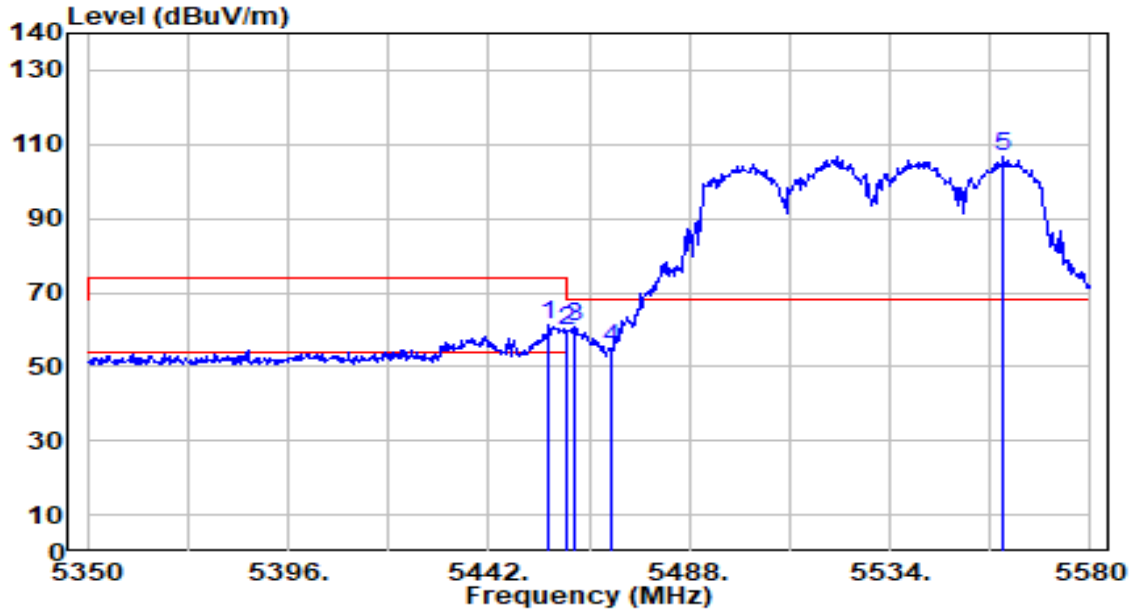


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.800	60.39	0.64	61.02	-12.98	74.00	238	182	Peak
2	5460.000	59.12	0.65	59.77	-14.23	74.00	238	182	Peak
3	* 5461.550	59.91	0.66	60.57	-7.63	68.20	238	182	Peak
4	5470.000	54.23	0.69	54.92	-13.28	68.20	238	182	Peak
5	5559.990	105.88	1.01	106.89	N/A	N/A	238	182	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

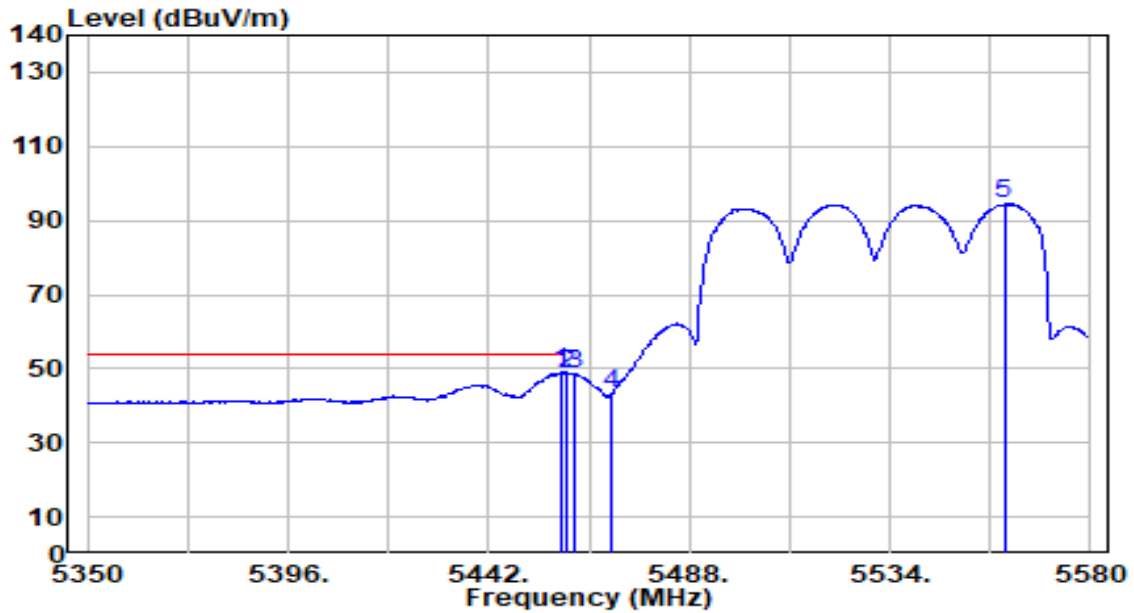


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5458.790	48.27	0.65	48.92	-5.08	54.00	238	182	Average
2		5460.000	48.11	0.65	48.76	-5.24	54.00	238	182	Average
3		5461.550	47.97	0.66	48.62	N/A	N/A	238	182	Average
4		5470.000	42.39	0.69	43.07	N/A	N/A	238	182	Average
5		5560.220	93.36	1.01	94.37	N/A	N/A	238	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

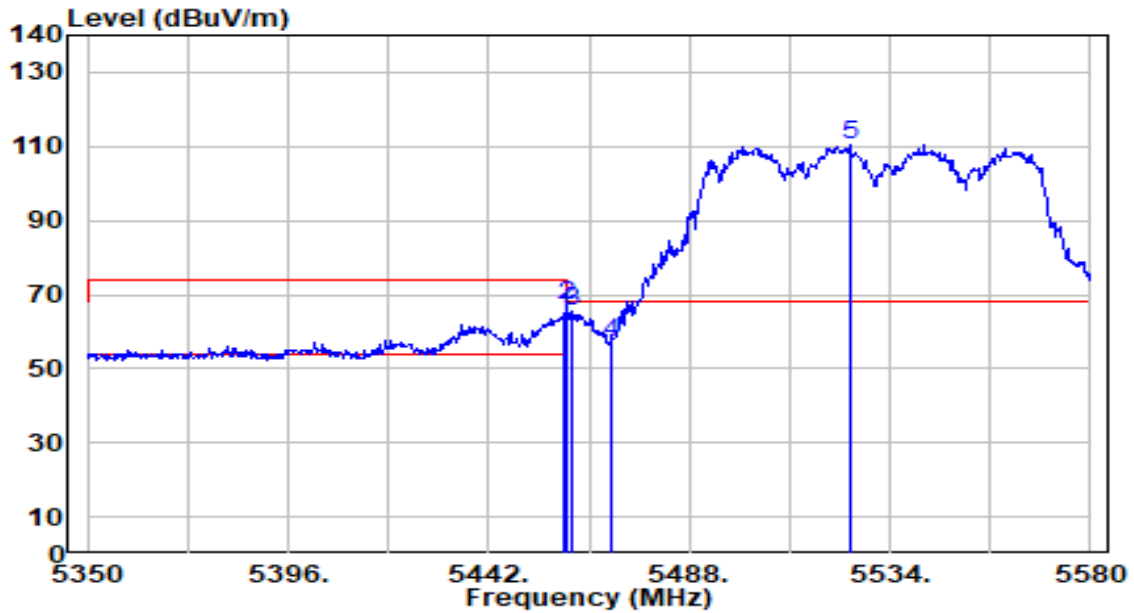


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.020	63.46	0.65	64.11	-9.89	74.00	263	210	Peak
2	5460.000	66.24	0.65	66.89	-7.11	74.00	263	210	Peak
3	* 5460.860	64.74	0.66	65.39	-2.81	68.20	263	210	Peak
4	5470.000	56.57	0.69	57.26	-10.94	68.20	263	210	Peak
5	5524.800	109.60	0.88	110.48	N/A	N/A	263	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

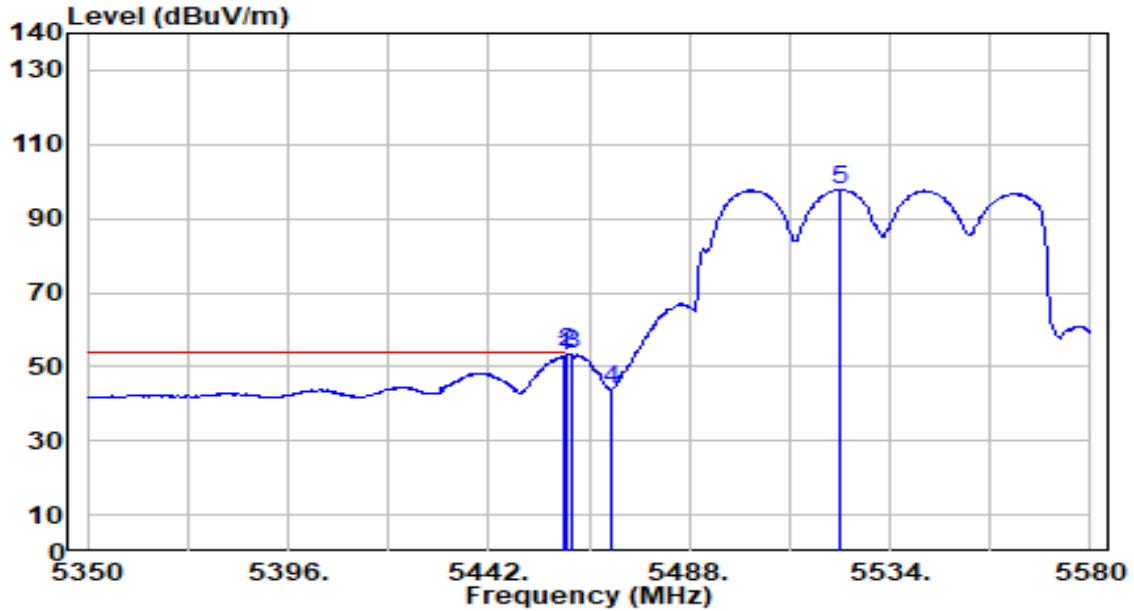


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.020	52.08	0.65	52.73	-1.27	54.00	263	210	Average
2	* 5460.000	53.12	0.65	53.77	-0.23	54.00	263	210	Average
3	5460.860	52.61	0.66	53.26	N/A	N/A	263	210	Average
4	5470.000	43.11	0.69	43.79	N/A	N/A	263	210	Average
5	5522.270	96.96	0.87	97.83	N/A	N/A	263	210	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C / 61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band4_TX_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

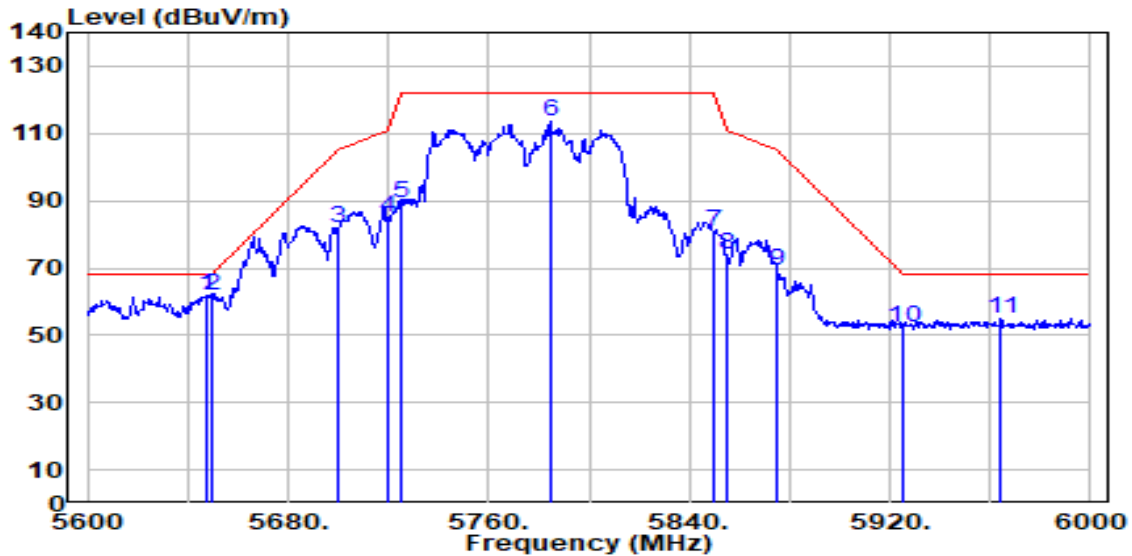


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5647.600	60.64	1.43	62.07	-6.13	68.20	100	180	Peak
2		5650.000	60.27	1.44	61.71	-6.49	68.20	100	180	Peak
3		5700.000	79.98	1.72	81.70	-23.50	105.20	100	180	Peak
4		5720.000	83.06	1.84	84.90	-25.90	110.80	100	180	Peak
5		5725.000	87.61	1.86	89.48	-32.72	122.20	100	180	Peak
6		5784.400	111.59	2.20	113.79	N/A	N/A	100	180	Peak
7		5850.000	78.44	2.27	80.71	-41.49	122.20	100	180	Peak
8		5855.000	71.63	2.27	73.89	-36.91	110.80	100	180	Peak
9		5875.000	67.17	2.26	69.43	-35.77	105.20	100	180	Peak
10		5925.000	50.00	2.25	52.25	-15.95	68.20	100	180	Peak
11		5964.400	52.53	2.23	54.77	-13.43	68.20	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band4_TX_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

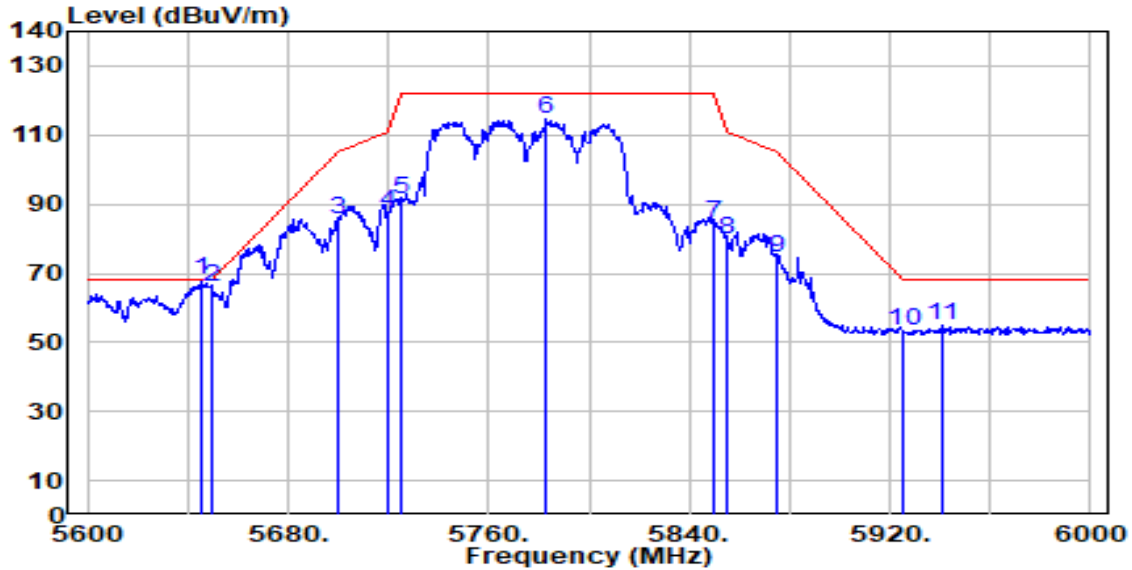


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.600	66.58	1.41	68.00	-0.20	68.20	320	199	Peak
2	5650.000	64.74	1.44	66.18	-2.02	68.20	320	199	Peak
3	5700.000	83.83	1.72	85.56	-19.64	105.20	320	199	Peak
4	5720.000	85.75	1.84	87.58	-23.22	110.80	320	199	Peak
5	5725.000	89.59	1.86	91.45	-30.75	122.20	320	199	Peak
6	5783.200	112.30	2.19	114.49	N/A	N/A	320	199	Peak
7	5850.000	82.08	2.27	84.35	-37.85	122.20	320	199	Peak
8	5855.000	77.75	2.27	80.02	-30.78	110.80	320	199	Peak
9	5875.000	72.40	2.26	74.66	-30.54	105.20	320	199	Peak
10	5925.000	51.06	2.25	53.30	-14.90	68.20	320	199	Peak
11	5940.800	52.48	2.24	54.72	-13.48	68.20	320	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

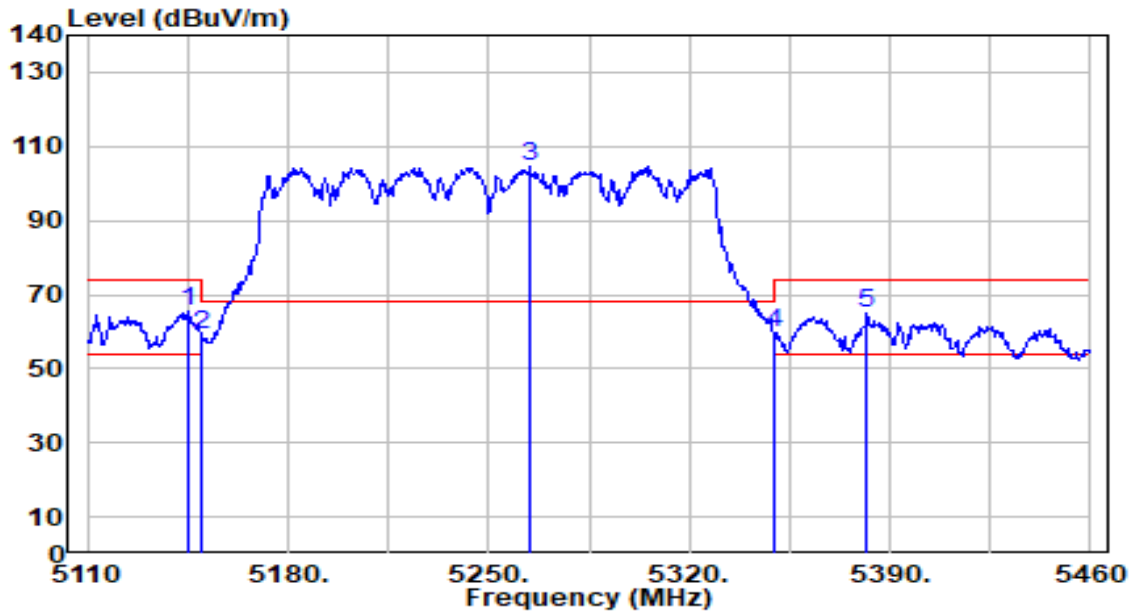


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5145.350	65.02	0.68	65.69	-8.31	74.00	168	187	Peak
2		5150.000	58.61	0.68	59.28	-14.72	74.00	168	187	Peak
3		5264.350	104.04	0.60	104.64	N/A	N/A	168	187	Peak
4		5350.000	59.14	0.51	59.64	-14.36	74.00	168	187	Peak
5		5381.950	64.61	0.47	65.08	-8.92	74.00	168	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

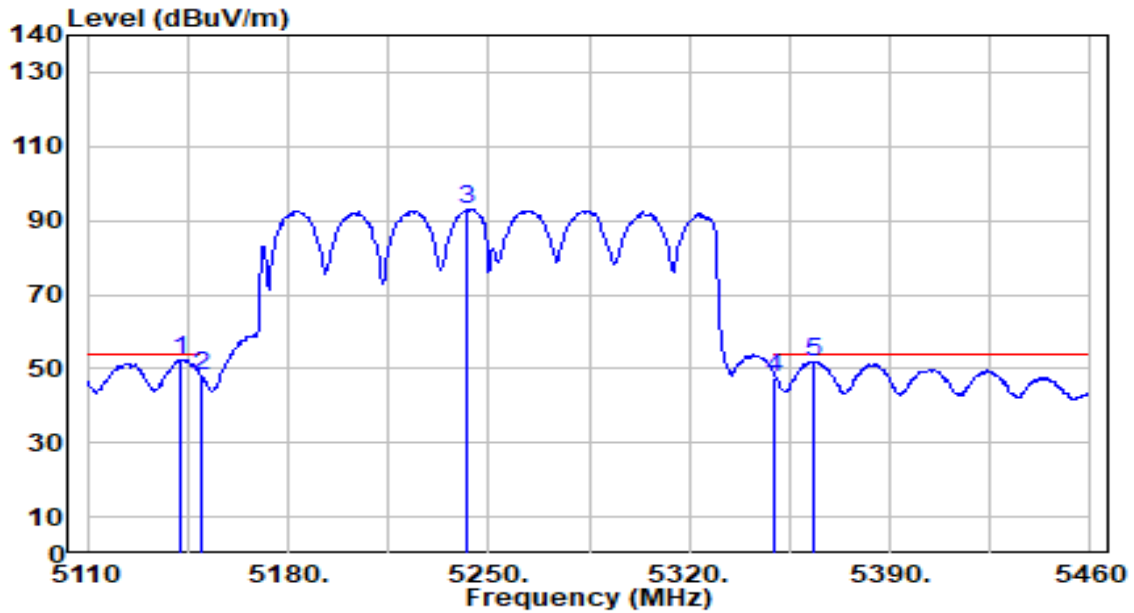


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5142.550	51.75	0.68	52.42	-1.58	54.00	168	187	Average
2	5150.000	47.42	0.68	48.10	-5.90	54.00	168	187	Average
3	5242.650	92.53	0.62	93.15	N/A	N/A	168	187	Average
4	5350.000	47.21	0.51	47.71	-6.29	54.00	168	187	Average
5	5363.400	51.42	0.49	51.91	-2.09	54.00	168	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

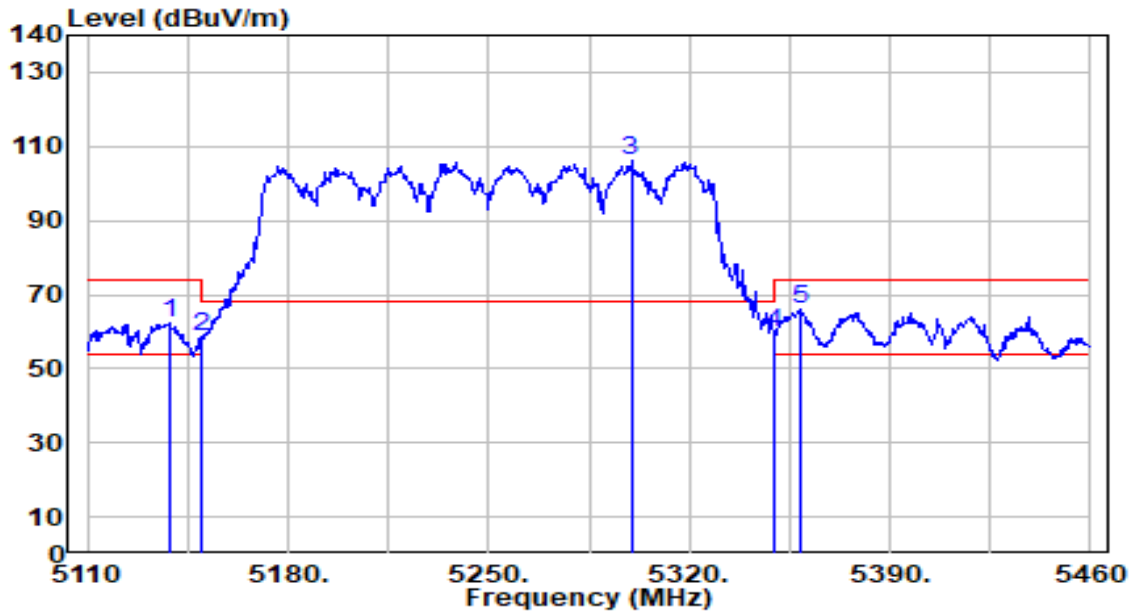


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5138.350	61.67	0.68	62.35	-11.65	74.00	140	215	Peak
2	5150.000	57.88	0.68	58.56	-15.44	74.00	140	215	Peak
3	5299.700	105.55	0.56	106.11	N/A	N/A	140	215	Peak
4	5350.000	59.31	0.51	59.81	-14.19	74.00	140	215	Peak
5	* 5358.500	65.62	0.50	66.12	-7.88	74.00	140	215	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

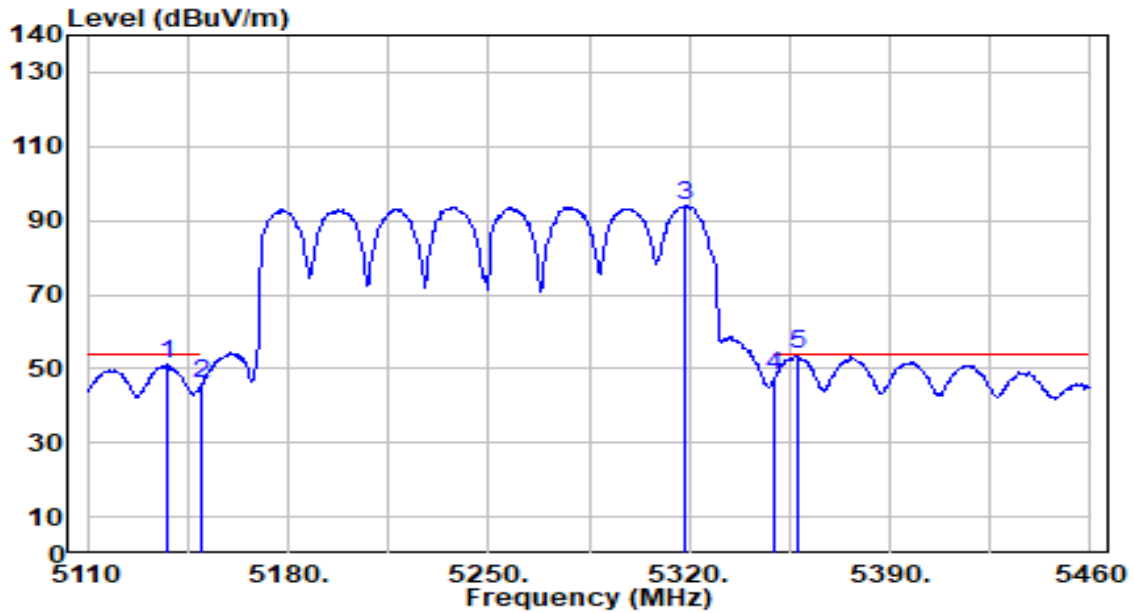


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5137.650	50.39	0.68	51.07	-2.93	54.00	140	215	Average
2	5150.000	45.27	0.68	45.94	-8.06	54.00	140	215	Average
3	5318.600	93.54	0.54	94.08	N/A	N/A	140	215	Average
4	5350.000	47.40	0.51	47.91	-6.09	54.00	140	215	Average
5	* 5358.150	53.23	0.50	53.73	-0.27	54.00	140	215	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

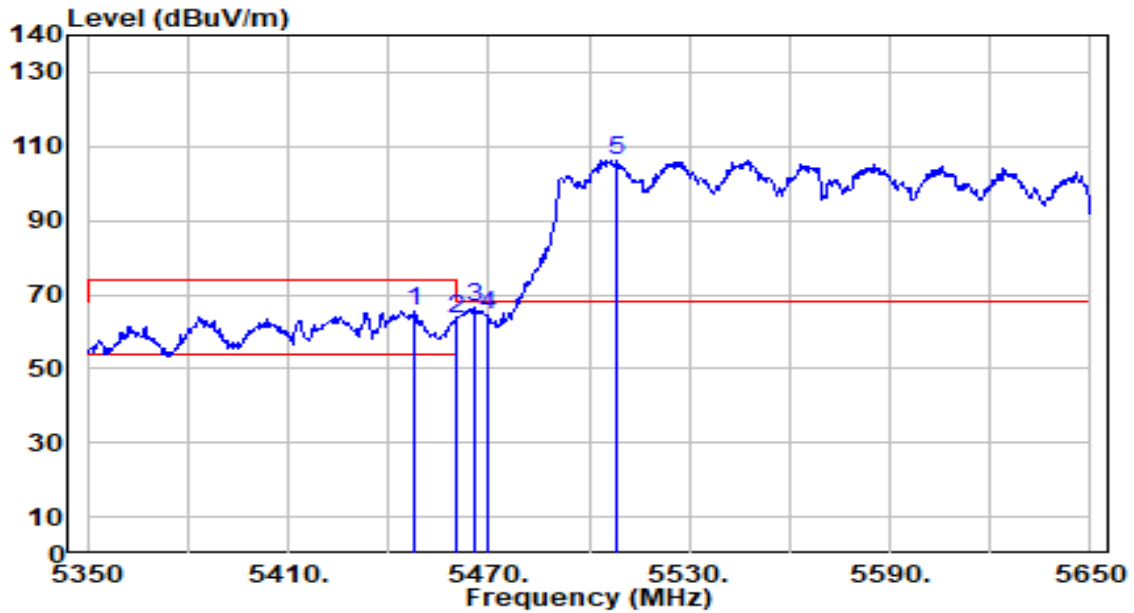


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.800	65.06	0.61	65.67	-8.33	74.00	168	187	Peak
2	5460.000	62.74	0.65	63.39	-10.61	74.00	168	187	Peak
3	* 5466.100	66.04	0.67	66.72	-1.48	68.20	168	187	Peak
4	5470.000	64.02	0.69	64.70	-3.50	68.20	168	187	Peak
5	5508.100	105.57	0.82	106.39	N/A	N/A	168	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

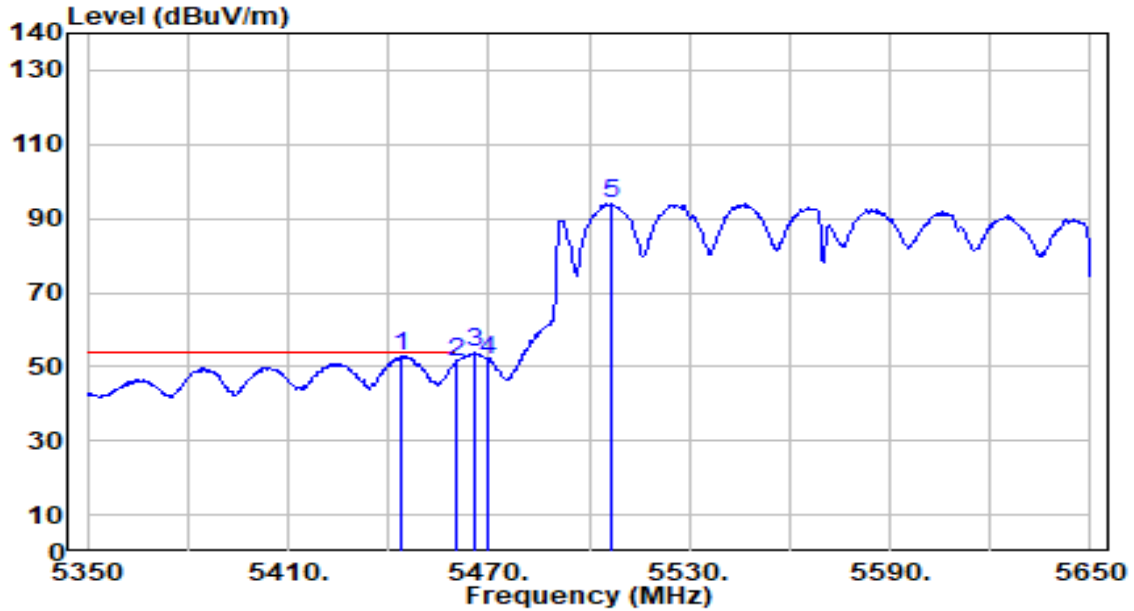


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	52.13	0.60	52.73	-1.27	54.00	168	187	Average
2		50.38	0.65	51.04	-2.96	54.00	168	187	Average
3		53.02	0.67	53.70	N/A	N/A	168	187	Average
4		51.26	0.69	51.95	N/A	N/A	168	187	Average
5		93.19	0.82	94.00	N/A	N/A	168	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

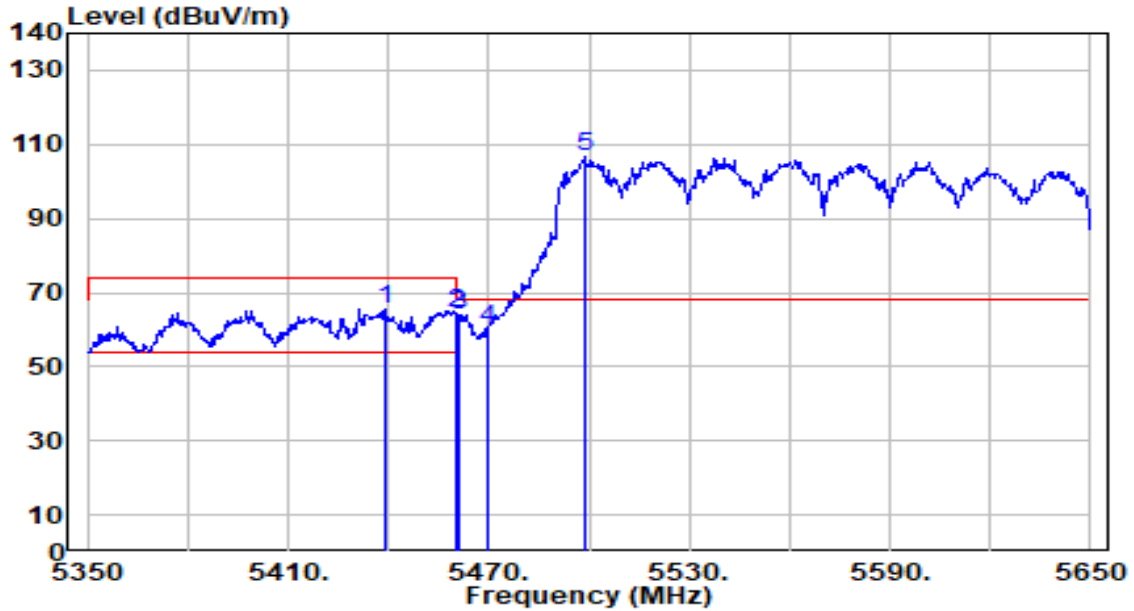


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5438.800	64.87	0.58	65.45	-8.55	74.00	140	215	Peak
2	5460.000	63.95	0.65	64.61	-9.39	74.00	140	215	Peak
3	* 5461.000	63.31	0.66	63.96	-4.24	68.20	140	215	Peak
4	5470.000	59.63	0.69	60.32	-7.88	68.20	140	215	Peak
5	5498.500	105.79	0.78	106.58	N/A	N/A	140	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

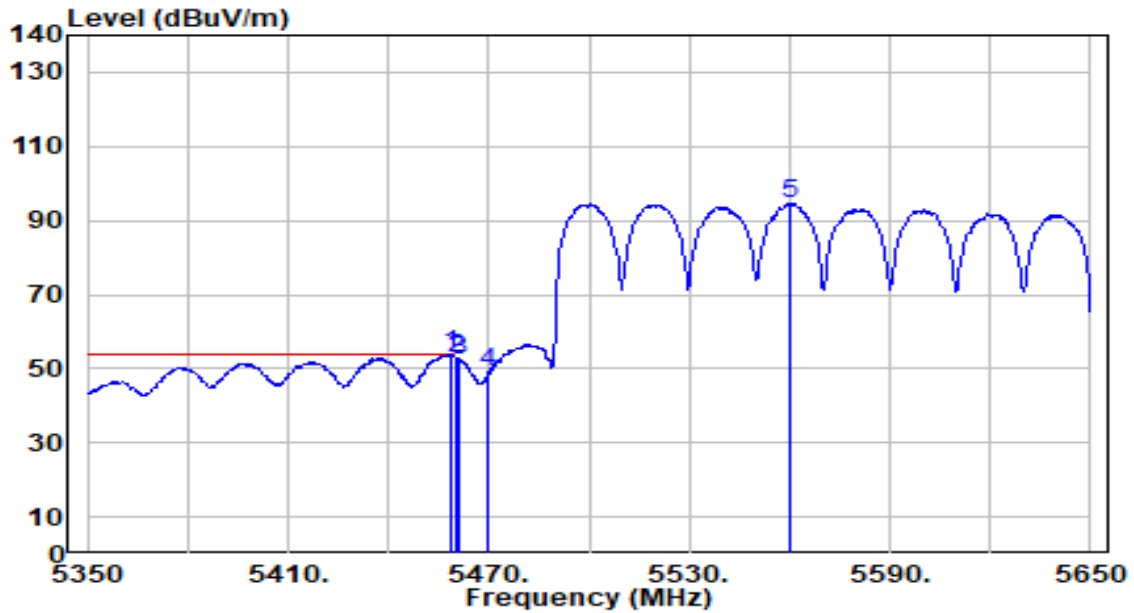


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5458.900	53.08	0.65	53.73	-0.27	54.00	140	215	Average
2		5460.000	52.44	0.65	53.09	-0.91	54.00	140	215	Average
3		5461.000	51.89	0.66	52.54	N/A	N/A	140	215	Average
4		5470.000	48.21	0.69	48.90	N/A	N/A	140	215	Average
5		5560.300	93.59	1.01	94.61	N/A	N/A	140	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-240MHz_Band3_TX_CH 130_ANT 0+1	Test Voltage	AC 120V/60Hz

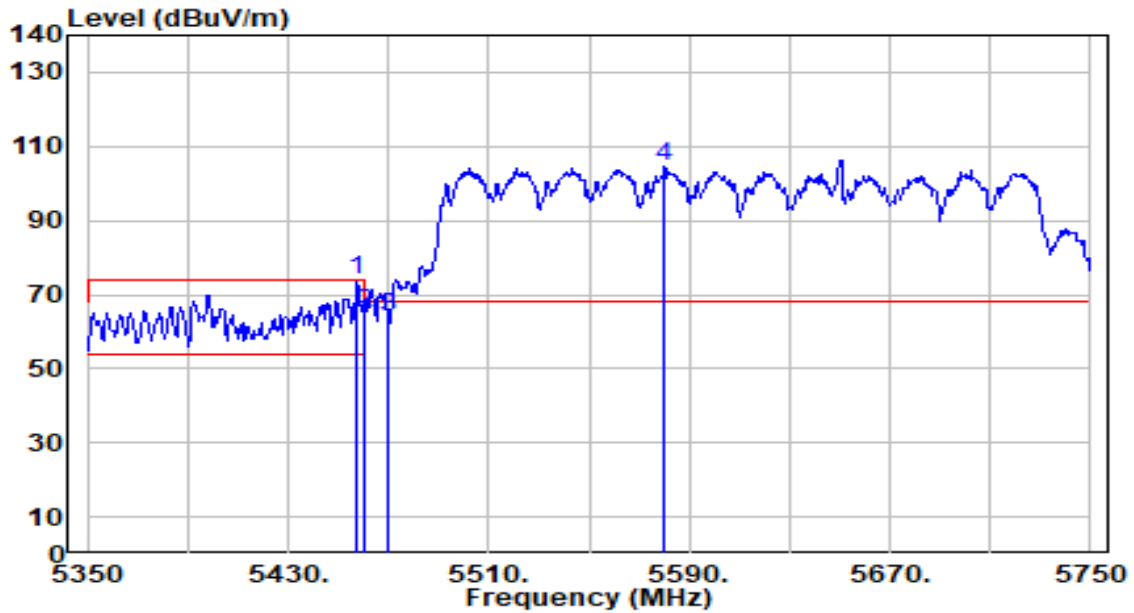


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5457.600	73.12	0.65	73.77	-0.23	74.00	168	187	Peak
2	5460.000	64.39	0.65	65.05	-8.95	74.00	168	187	Peak
3	5470.000	63.30	0.69	63.99	-4.21	68.20	168	187	Peak
4	5580.000	103.52	1.08	104.61	N/A	N/A	168	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-240MHz_Band3_TX_CH 130_ANT 0+1	Test Voltage	AC 120V/60Hz

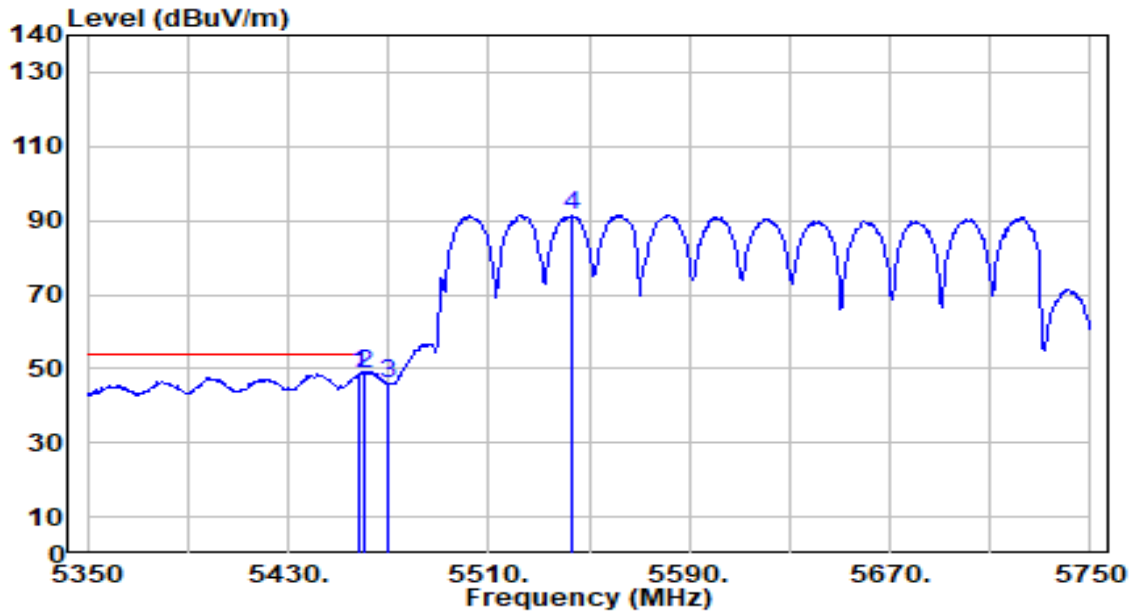


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5458.000	48.08	0.65	48.73	-5.27	54.00	168	187	Average
2		5460.000	47.96	0.65	48.61	-5.39	54.00	168	187	Average
3		5470.000	45.29	0.69	45.98	N/A	N/A	168	187	Average
4		5543.600	90.70	0.95	91.65	N/A	N/A	168	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-240MHz_Band3_TX_CH 130_ANT 0+1	Test Voltage	AC 120V/60Hz

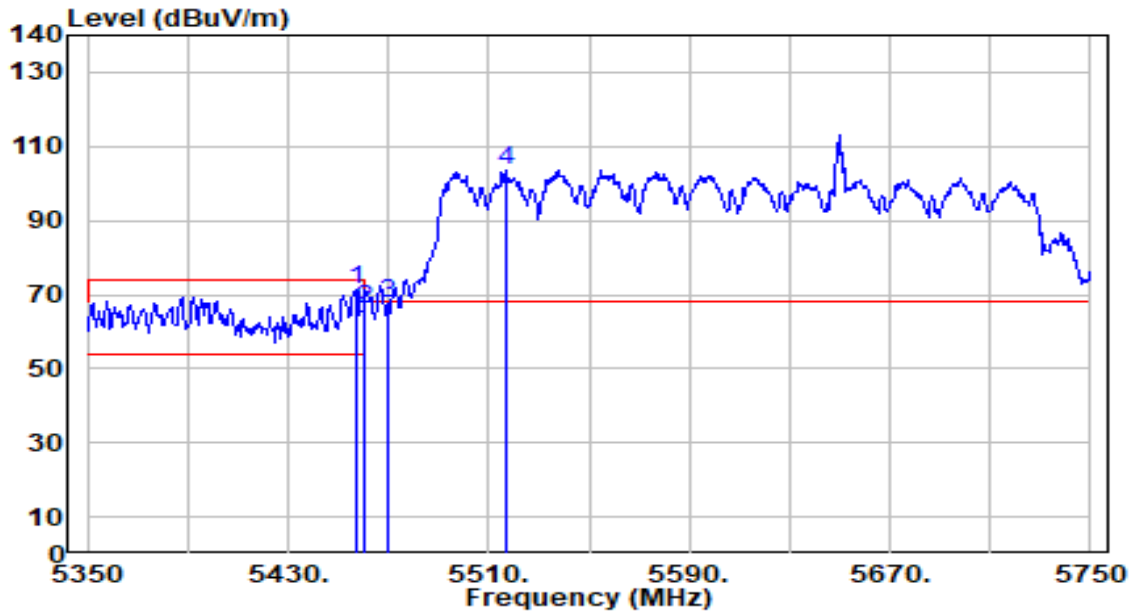


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.200	70.45	0.64	71.09	-2.91	74.00	140	215	Peak
2	5460.000	65.56	0.65	66.21	-7.79	74.00	140	215	Peak
3	* 5470.000	67.10	0.69	67.78	-0.42	68.20	140	215	Peak
4	5516.800	102.77	0.85	103.62	N/A	N/A	140	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-06-07
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-240MHz_Band3_TX_CH 130_ANT 0+1	Test Voltage	AC 120V/60Hz

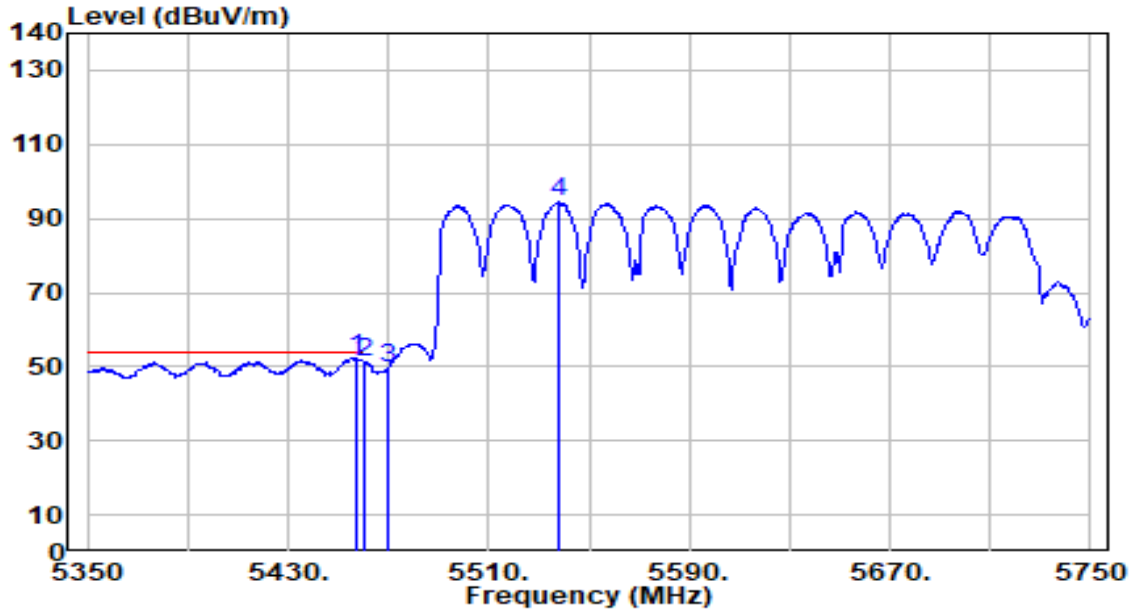

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5457.600	51.88	0.65	52.53	-1.47	54.00	140	215	Average
2		5460.000	50.79	0.65	51.45	-2.55	54.00	140	215	Average
3		5470.000	49.23	0.69	49.92	N/A	N/A	140	215	Average
4		5538.400	93.42	0.93	94.35	N/A	N/A	140	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

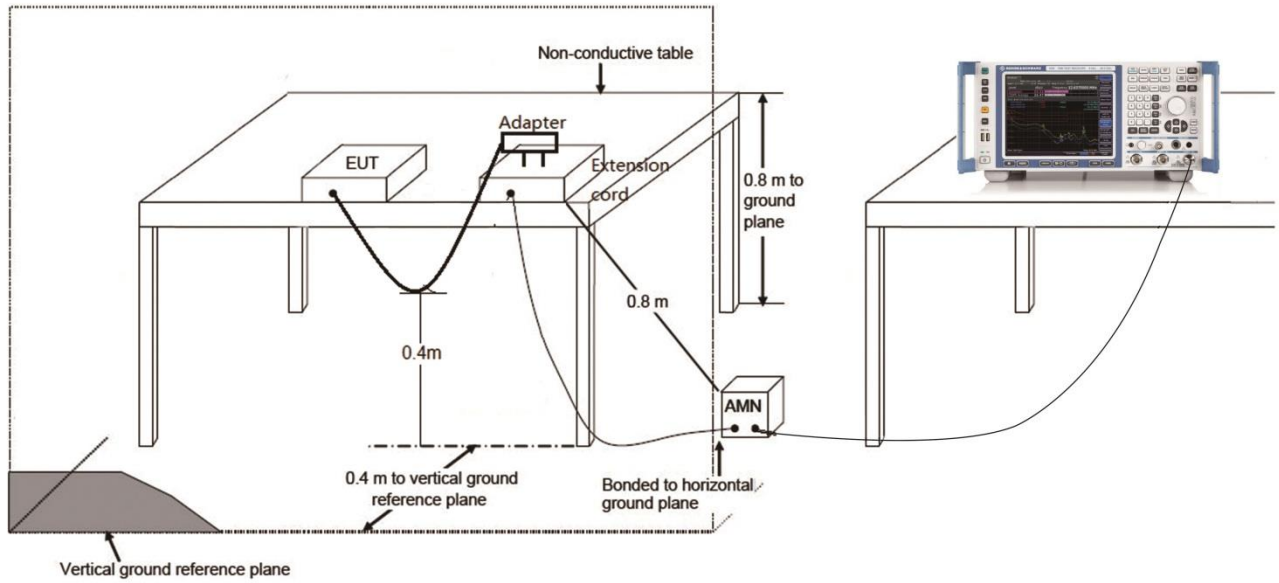

7.10.4. Test Result

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-02
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

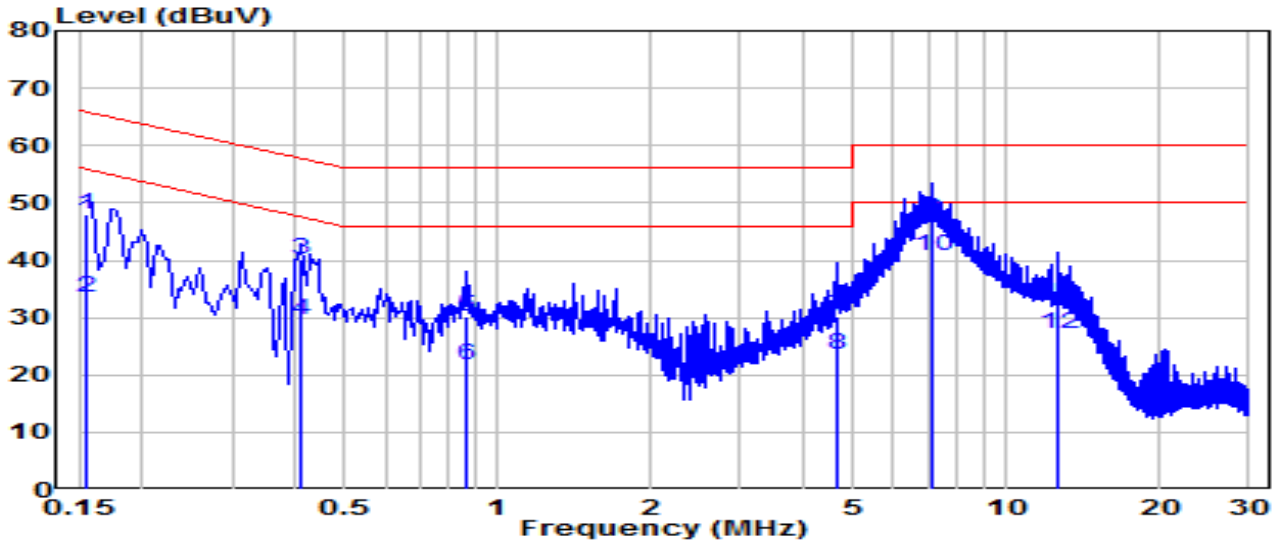


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.154	38.49	9.63	48.12	-17.64	65.75	QP
2	0.154	23.97	9.63	33.60	-22.15	55.75	Average
3	0.411	30.59	9.65	40.24	-17.39	57.63	QP
4	0.411	19.91	9.65	29.56	-18.07	47.63	Average
5	0.870	20.62	9.67	30.29	-25.71	56.00	QP
6	0.870	12.12	9.67	21.80	-24.20	46.00	Average
7	4.618	20.35	9.74	30.09	-25.91	56.00	QP
8	4.618	13.80	9.74	23.54	-22.46	46.00	Average
9	* 7.151	37.28	9.80	47.08	-12.92	60.00	QP
10	* 7.151	31.01	9.80	40.81	-9.19	50.00	Average
11	12.609	22.34	9.89	32.23	-27.77	60.00	QP
12	12.609	17.21	9.89	27.10	-22.90	50.00	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-02
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

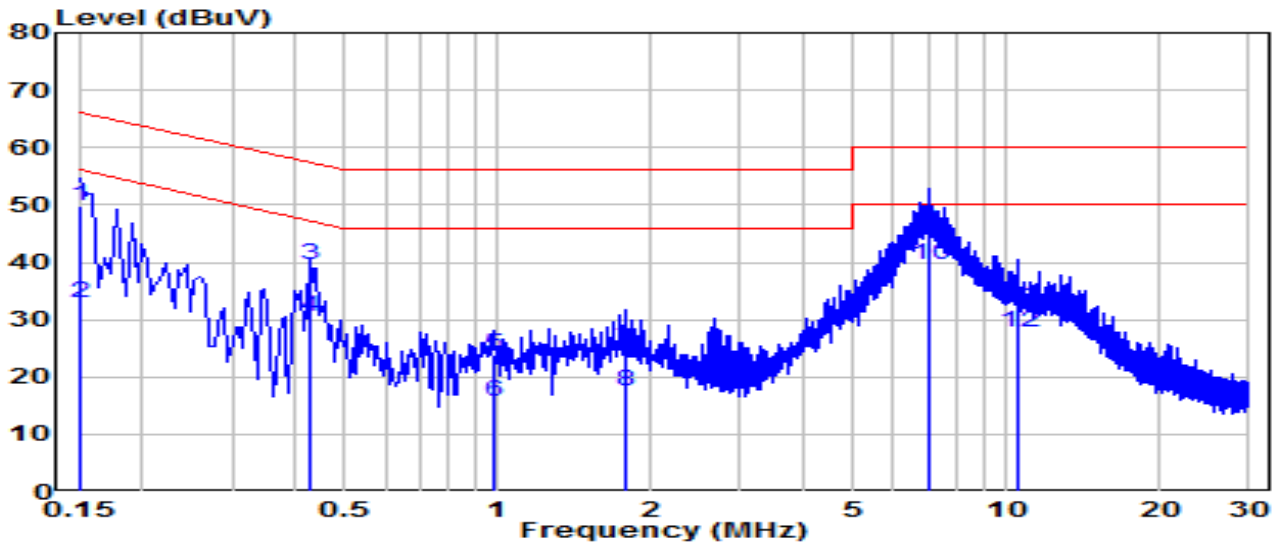


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	40.04	9.63	49.67	-16.33	66.00	QP
2	0.150	23.26	9.63	32.89	-23.11	56.00	Average
3	0.424	29.76	9.65	39.41	-17.95	57.36	QP
4	0.424	20.93	9.65	30.57	-16.79	47.36	Average
5	0.982	14.14	9.68	23.82	-32.18	56.00	QP
6	0.982	6.13	9.68	15.80	-30.20	46.00	Average
7	1.774	15.15	9.70	24.85	-31.15	56.00	QP
8	1.774	7.73	9.70	17.43	-28.57	46.00	Average
9	*	7.061	9.81	45.54	-14.46	60.00	QP
10	*	7.061	9.81	39.56	-10.44	50.00	Average
11	10.571	22.55	9.90	32.45	-27.55	60.00	QP
12	10.571	17.95	9.90	27.85	-22.15	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-02
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

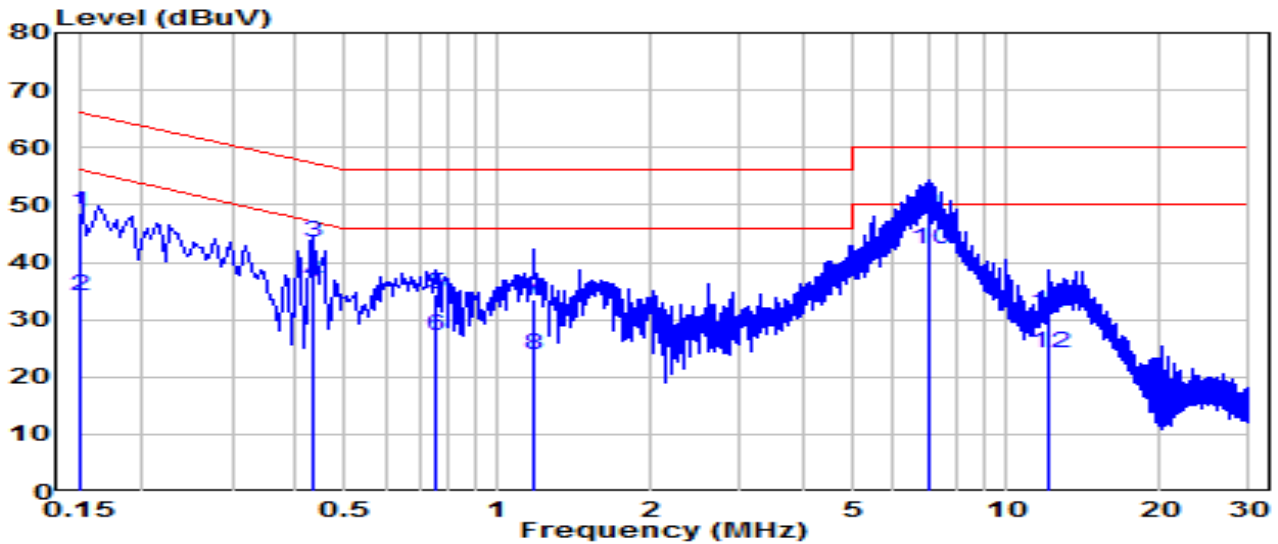


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.150	39.00	9.63	48.63	-17.37	66.00	QP
2	0.150	24.46	9.63	34.09	-21.91	56.00	Average
3	0.433	33.79	9.65	43.44	-13.75	57.19	QP
4	0.433	26.96	9.65	36.61	-10.58	47.19	Average
5	0.753	24.90	9.67	34.56	-21.44	56.00	QP
6	0.753	17.62	9.67	27.28	-18.72	46.00	Average
7	1.176	23.75	9.68	33.43	-22.57	56.00	QP
8	1.176	14.19	9.68	23.87	-22.13	46.00	Average
9	* 7.016	38.66	9.80	48.46	-11.54	60.00	QP
10	* 7.016	32.50	9.80	42.29	-7.71	50.00	Average
11	12.087	21.24	9.88	31.12	-28.88	60.00	QP
12	12.087	14.24	9.88	24.12	-25.88	50.00	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-02
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.1°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

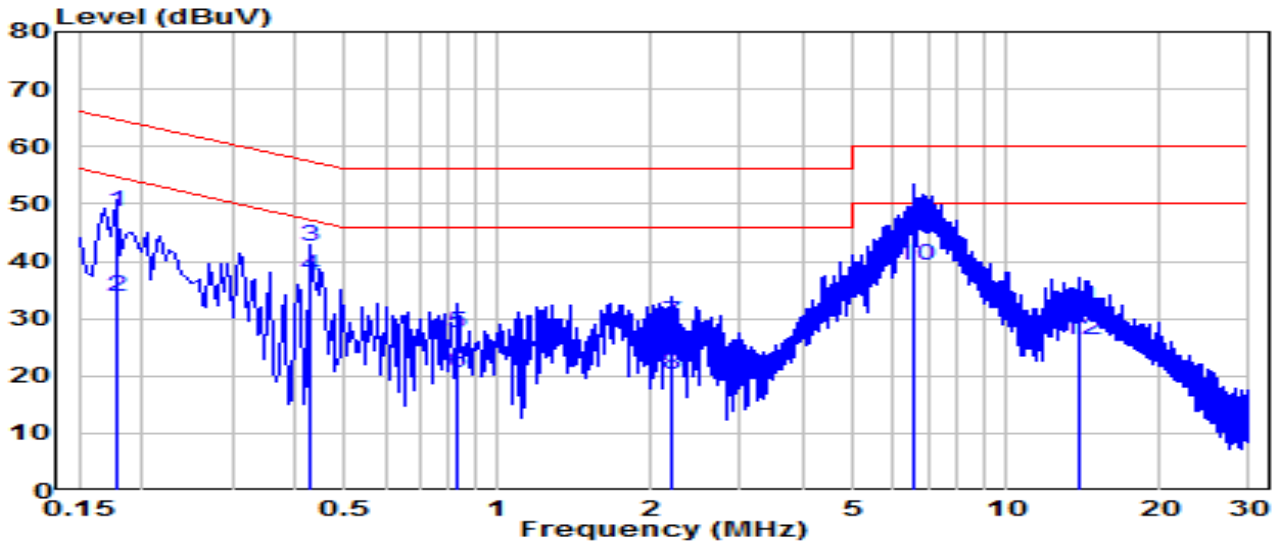

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.177	38.84	9.63	48.47	-16.16	64.63	QP
2	0.177	24.19	9.63	33.83	-20.80	54.63	Average
3	* 0.429	32.82	9.65	42.46	-14.81	57.27	QP
4	* 0.429	27.69	9.65	37.33	-9.94	47.27	Average
5	0.834	17.86	9.67	27.53	-28.47	56.00	QP
6	0.834	10.96	9.67	20.63	-25.37	46.00	Average
7	2.197	19.72	9.71	29.43	-26.57	56.00	QP
8	2.197	10.53	9.71	20.25	-25.75	46.00	Average
9	6.566	36.07	9.80	45.87	-14.13	60.00	QP
10	6.566	29.43	9.80	39.23	-10.77	50.00	Average
11	13.874	21.83	9.93	31.76	-28.24	60.00	QP
12	13.874	16.47	9.93	26.40	-23.60	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2405TW0113-UT” file.

Appendix B : EUT Photograph

Refer to “2405TW0113-UE” file.

Appendix C : Internal Photograph

Refer to “2405TW0113-UI” file.

————— The End —————