

## RF MEASUREMENT REPORT

---

**FCC ID** : 2BCGWGE550  
**Applicant** : TP-LINK CORPORATION PTE. LTD.  
**Application Type** : Certification  
**Product** : BE11000 Tri-Band Wi-Fi 7 Gaming Router  
BE9300 Tri-Band Wi-Fi 7 Gaming Router  
**Model No.** : Archer GE650, Archer GE550  
**Brand Name** : tp-link  
**FCC Classification** : Unlicensed National Information Infrastructure (NII)  
**FCC Rule Part(s)** : Part15 Subpart E (Section 15.407)  
**Received Date** : January 5, 2024  
**Test Date** : January 9, 2024 ~ April 2, 2024

**Test By** : Owen Tsai  
( Owen Tsai )

**Reviewed By** : Paddy Chen  
( Paddy Chen )

**Approved By** : Chenz Ker  
( Chenz Ker )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2401TW0104-U3	1.0	Original Report	2024-06-14	Valid

---

## CONTENTS

Description	Page
<b>General Information</b> .....	<b>6</b>
<b>1. INTRODUCTION</b> .....	<b>7</b>
1.1. Scope .....	7
1.2. MRT Test Location .....	7
<b>2. PRODUCT INFORMATION</b> .....	<b>8</b>
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	9
2.3. Working Frequencies for this report .....	10
2.4. Description of Available Antennas .....	11
2.5. Test Mode .....	12
2.6. Configuration of Test System.....	13
2.7. Test System Details.....	14
2.8. Description of Test Software .....	14
2.9. Applied Standards .....	14
2.10. Duty Cycle .....	15
2.11. Test Configuration .....	17
2.12. EMI Suppression Device(s)/Modifications .....	17
2.13. Labeling Requirements.....	17
<b>3. DESCRIPTION OF TEST</b> .....	<b>18</b>
3.1. Evaluation Procedure .....	18
3.2. AC Line Conducted Emissions .....	18
3.3. Radiated Emissions .....	19
<b>4. ANTENNA REQUIREMENTS</b> .....	<b>20</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE</b> .....	<b>21</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>23</b>
<b>7. TEST RESULT</b> .....	<b>24</b>
7.1. Summary .....	24
7.2. 26dB Bandwidth Measurement.....	25
7.2.1. Test Limit .....	25
7.2.2. Test Procedure used.....	25
7.2.3. Test Setting.....	25
7.2.4. Test Setup .....	25
7.2.5. Test Result.....	26

---

7.3.	6dB Bandwidth Measurement.....	48
7.3.1.	Test Limit .....	48
7.3.2.	Test Procedure used.....	48
7.3.3.	Test Setting.....	48
7.3.4.	Test Setup .....	48
7.3.5.	Test Result.....	49
7.4.	Output Power Measurement.....	56
7.4.1.	Test Limit .....	56
7.4.2.	Test Procedure Used .....	56
7.4.3.	Test Setting.....	56
7.4.4.	Test Setup .....	56
7.4.5.	Test Result.....	57
7.5.	Transmit Power Control .....	65
7.5.1.	Test Limit .....	65
7.5.2.	Test Procedure Used .....	65
7.5.3.	Test Setting.....	65
7.5.4.	Test Setup .....	65
7.5.5.	Test Result.....	65
7.6.	Power Spectral Density Measurement.....	66
7.6.1.	Test Limit .....	66
7.6.2.	Test Procedure Used .....	66
7.6.3.	Test Setting.....	66
7.6.4.	Test Setup .....	67
7.6.5.	Test Result.....	68
7.7.	Frequency Stability Measurement.....	108
7.7.1.	Test Limit .....	108
7.7.2.	Test Limit .....	108
7.7.3.	Test Setup .....	109
7.7.4.	Test Result.....	109
7.8.	Radiated Spurious Emission Measurement .....	110
7.8.1.	Test Limit .....	110
7.8.2.	Test Procedure Used .....	110
7.8.3.	Test Setting.....	110
7.8.4.	Test Setup .....	112
7.8.5.	Test Result.....	113
7.9.	Radiated Restricted Band Edge Measurement .....	331
7.9.1.	Test Limit .....	331
7.9.2.	Test Procedure Used .....	332
7.9.3.	Test Setting.....	332

7.9.4. Test Setup .....	333
7.9.5. Test Result.....	334
7.10. AC Conducted Emissions Measurement.....	530
7.10.1. Test Limit .....	530
7.10.2. Test Procedure .....	530
7.10.3. Test Setup .....	531
7.10.4. Test Result.....	532
<b>8. CONCLUSION.....</b>	<b>536</b>
<b>Appendix A : Test Setup Photograph .....</b>	<b>537</b>
<b>Appendix B : EUT Photograph.....</b>	<b>537</b>
<b>Appendix C : Internal Photograph .....</b>	<b>537</b>

## General Information

<b>Applicant</b>	TP-LINK CORPORATION PTE. LTD.
<b>Applicant Address</b>	7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987
<b>Manufacturer</b>	TP-LINK CORPORATION PTE. LTD.
<b>Manufacturer Address</b>	7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987
<b>Test Site</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
<b>MRT FCC Registration No.</b>	291082
<b>FCC Rule Part(s)</b>	Part 15.407

## Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

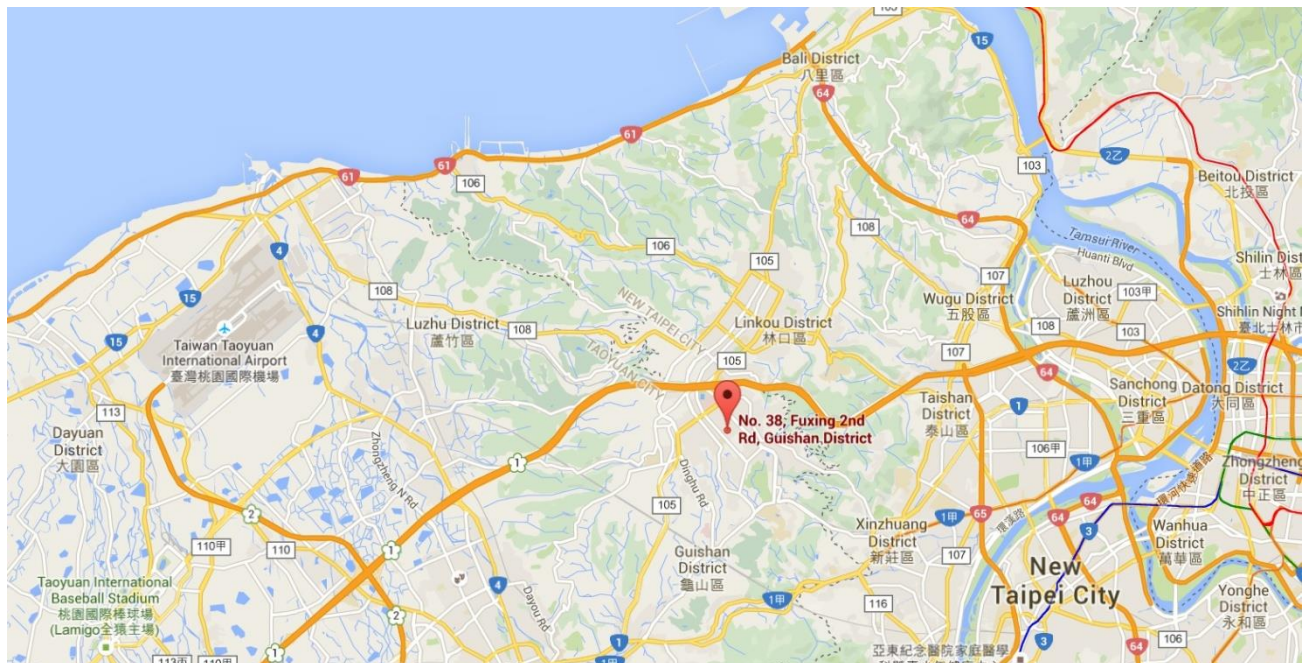

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	BE11000 Tri-Band Wi-Fi 7 Gaming Router BE9300 Tri-Band Wi-Fi 7 Gaming Router
Model No.:	Archer GE650, Archer GE550
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac/ax/be
EUT Identification No.:	#1-1 (Conducted) #1-2 (Radiated)
Accessory	
Power Adapter	Brand: tp-link Model No: T120330-2B4 Input: AC 100-240V~1A, 50-60Hz Output: 12.0V=3.3A DC Cable Out: Non-Shielded, 1.5m

Note: Archer GE650 supports 802.11be-ETH240 at Wi-Fi 5GHz, but Archer GE550 does not support, and it's closed by the software based on the Archer GE650. Others are exactly the same. So only Archer GE650 was accessed in this report.



## 2.2. Product Specification Subjective to this Report

<p>Frequency Range:</p>	<p>For 802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80/be-EHT80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160/be-EHT160: 5250MHz, 5570MHz For 802.11be-EHT240: 5650MHz</p>
<p>Type of Modulation:</p>	<p>802.11a/n/ac: OFDM 802.11ax/be: OFDMA</p>
<p>Data Rate:</p>	<p>802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2402Mbps 802.11be: up to 4320Mbps</p>

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Working Frequencies for this report

#### 802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

#### 802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

#### 802.11ac-VHT80/ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

#### 802.11ac-VHT160/ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250MHz	114	5570 MHz	--	--

#### 802.11be-EHT240

Channel	Frequency	Channel	Frequency	Channel	Frequency
130	5650 MHz	--	--	--	--

## 2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	Tx Paths	Number of spatial streams	Antenna Gain (dBi)		Beamforming Directional Gain(dBi)	CDD Directional Gain (dBi)	
				Ant 0	Ant 1		For Power	For PSD
Dipole	5180 ~ 5825	2	1	3.0	3.0	6.01	3.0	6.01

Remark:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.  
If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.
  - For power spectral density (PSD) measurements on all devices,  
Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;
  - For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax/be, not include 802.11a/b/g/n. BF Directional gain =  $G_{ANT} + 10 \log (N_{ANT})$ .
- The information as above is from the antenna report.

Test Mode	Tx Paths	CDD Mode	Beamforming Mode
802.11a/n (NII)	2	√	X
802.11ac/ax/be (NII)	2	√	√


## 2.5. Test Mode

<b>CDD Mode</b>
Mode 1: Transmit by 802.11a_Nss=1 (6Mbps)
Mode 2: Transmit by 802.11ac-VHT20_Nss=1 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40_Nss=1 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80_Nss=1 (MCS0)
Mode 5: Transmit by 802.11ac-VHT160_Nss=1 (MCS0)
Mode 6: Transmit by 802.11ax-HE20_Nss=1 (MCS0)
Mode 7: Transmit by 802.11ax-HE40_Nss=1 (MCS0)
Mode 8: Transmit by 802.11ax-HE80_Nss=1 (MCS0)
Mode 9: Transmit by 802.11ax-HE160_Nss=1 (MCS0)
Mode 10: Transmit by 802.11be-EHT20_Nss=1 (MCS0)
Mode 11: Transmit by 802.11be-EHT40_Nss=1 (MCS0)
Mode 12: Transmit by 802.11be-EHT80_Nss=1 (MCS0)
Mode 13: Transmit by 802.11be-EHT160_Nss=1 (MCS0)
Mode 14: Transmit by 802.11be-EHT240_Nss=1 (MCS0)
<b>Beamforming Mode</b>
Mode 15: Transmit by 802.11ac-VHT20_Nss=1 (MCS0)
Mode 16: Transmit by 802.11ac-VHT40_Nss=1 (MCS0)
Mode 17: Transmit by 802.11ac-VHT80_Nss=1 (MCS0)
Mode 18: Transmit by 802.11ac-VHT160_Nss=1 (MCS0)
Mode 19: Transmit by 802.11ax-HE20_Nss=1 (MCS0)
Mode 20: Transmit by 802.11ax-HE40_Nss=1 (MCS0)
Mode 21: Transmit by 802.11ax-HE80_Nss=1 (MCS0)
Mode 22: Transmit by 802.11ax-HE160_Nss=1 (MCS0)
Mode 23: Transmit by 802.11be-EHT20_Nss=1 (MCS0)
Mode 24: Transmit by 802.11be-EHT40_Nss=1 (MCS0)
Mode 25: Transmit by 802.11be-EHT80_Nss=1 (MCS0)
Mode 26: Transmit by 802.11be-EHT160_Nss=1 (MCS0)
Mode 27: Transmit by 802.11be-EHT240_Nss=1 (MCS0)
Remark:
<ol style="list-style-type: none"> <li>For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.</li> <li>This device supports 2 N<sub>ss</sub> and power level of 2 N<sub>ss</sub> is less than or equal to the power of 1 N<sub>ss</sub>. The worst case is N<sub>ss</sub>=1.</li> <li>Due to CDD mode was the worst mode, so all test items were evaluated in this report. The beamforming mode only evaluated the RF output power.</li> </ol>

4. EUT supports one configuration only in 802.11ax/be full RU mode.
5. 802.11n and 802.11ac have same modulation type and same power value, so we only show 802.11ac test data in report.
6. As Designated by manufacturer, the lowest data rate was the worst condition, so all the tests were done with lowest data rate.

## 2.6. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

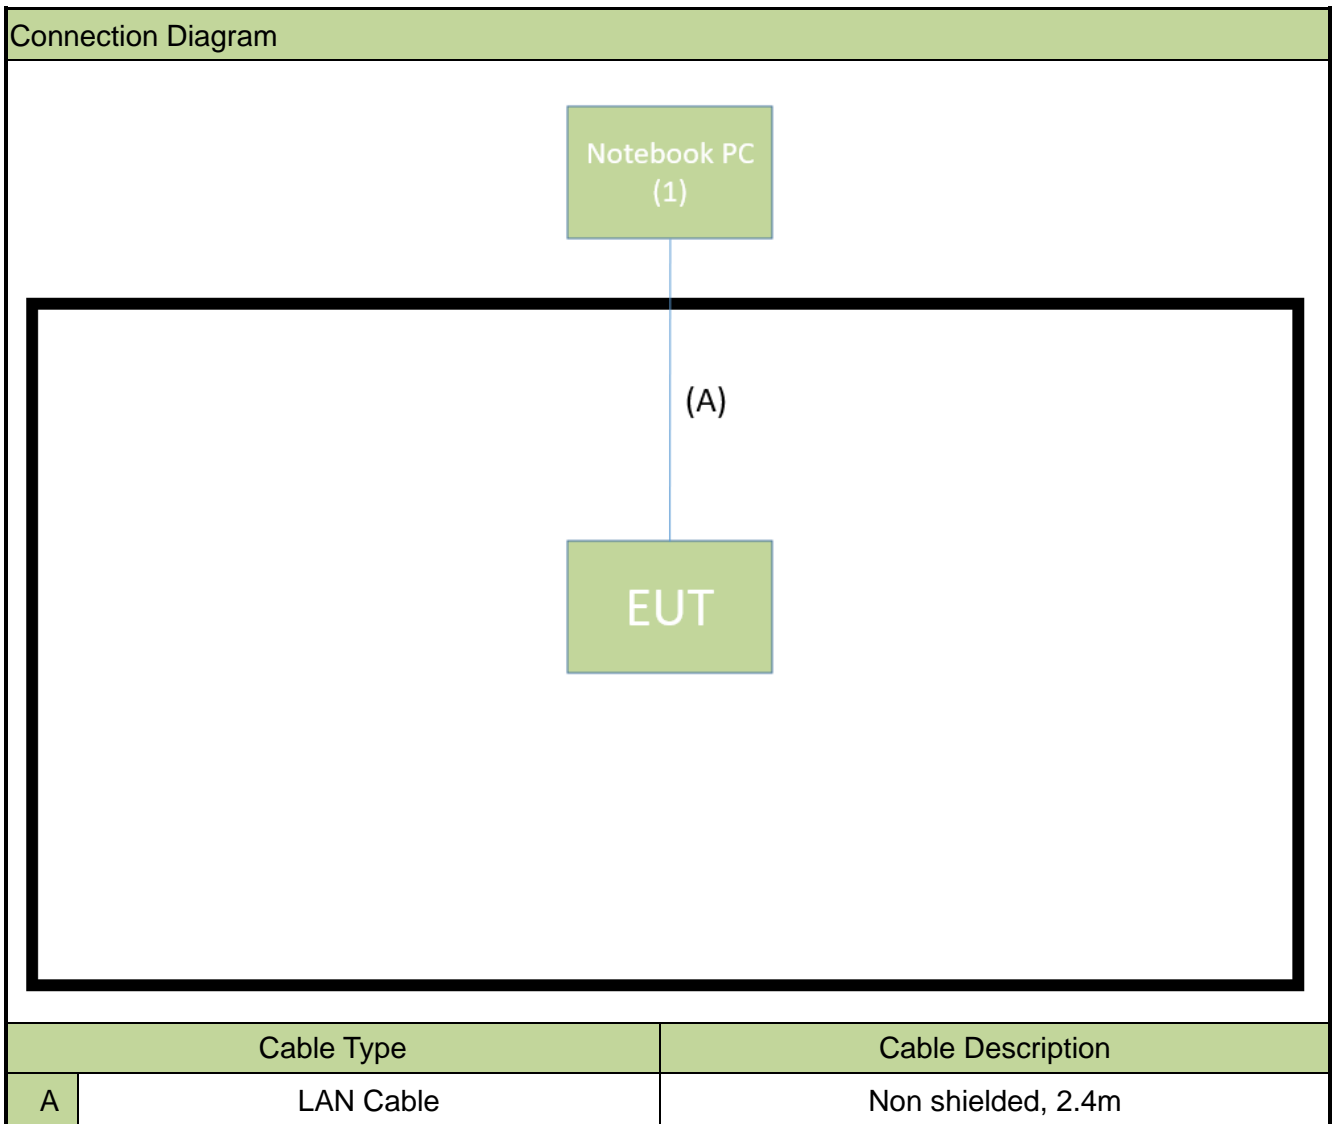

## 2.7. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	Lenovo	MP25ZAKY	N/A	Non-Shielded, 0.8m

## 2.8. Description of Test Software

The test utility software used during testing was "QSPR", the version is ver5.0-00202.

Note: Final power setting please refer to operational description.

## 2.9. Applied Standards


According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01,
- KDB 662911 D01v02r01
- ANSI C63.10-2013

## 2.10. Duty Cycle


5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz, 160MHz and 240MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	95.75%
802.11ac-VHT20	94.44%
802.11ac-VHT40	95.70%
802.11ac-VHT80	95.54%
802.11ac-VHT160	91.72%
802.11ax-HE20	92.63%
802.11ax-HE40	96.62%
802.11ax-HE80	94.62%
802.11ax-HE160	94.00%
802.11be-EHT20	92.36%
802.11be-EHT 40	96.57%
802.11be-EHT 80	91.74%
802.11be-EHT 160	91.51%
802.11be-EHT 240	93.04%

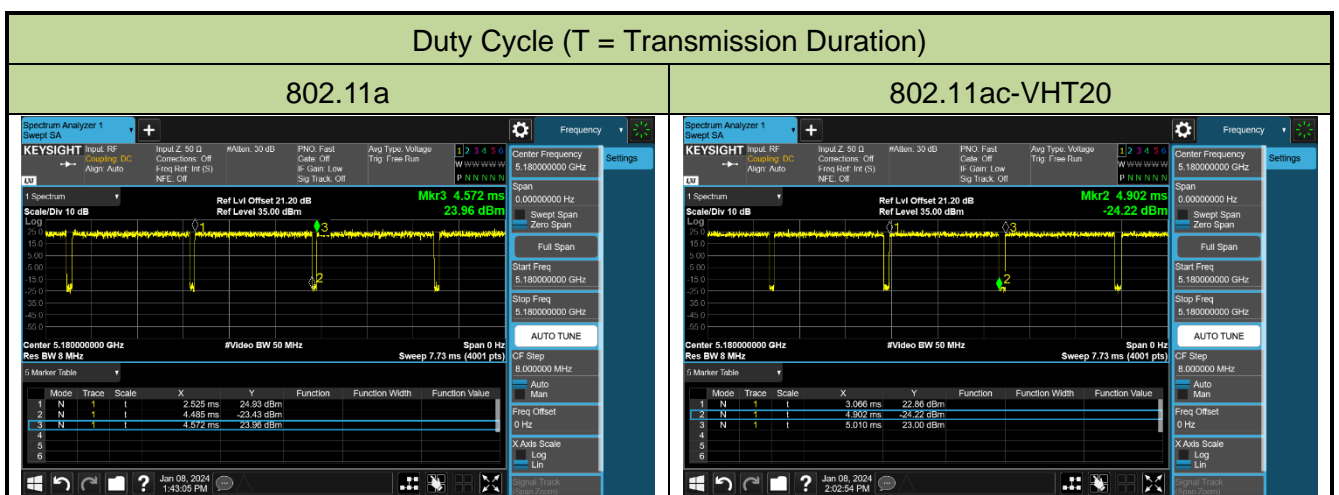


### Duty Cycle (T = Transmission Duration)


#### 802.11ac-VHT40

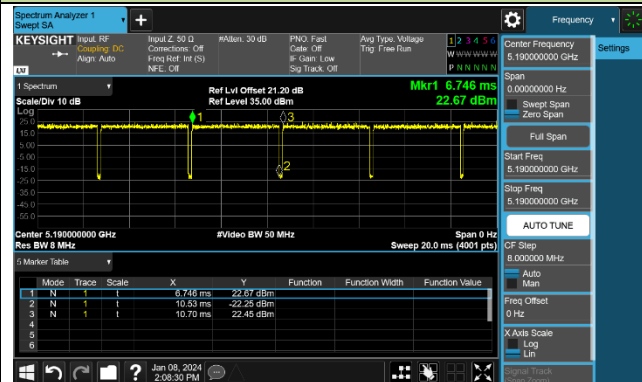


#### 802.11ac-VHT80

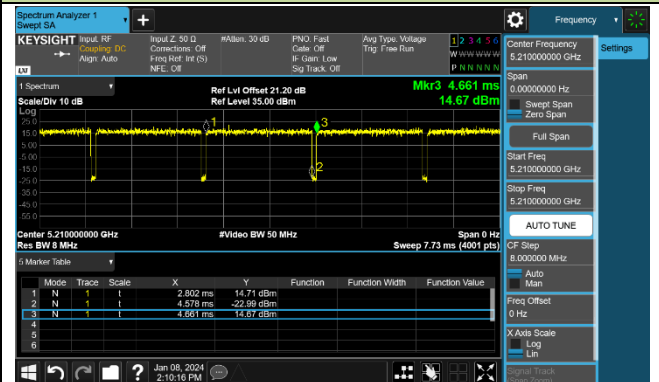


#### 802.11ac-VHT160

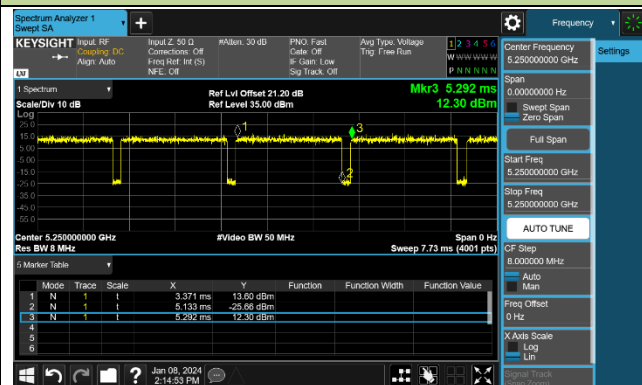


#### 802.11ax-HE20

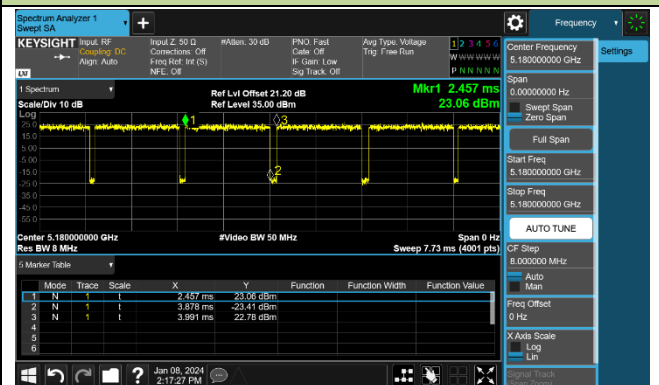


#### 802.11ax-HE40

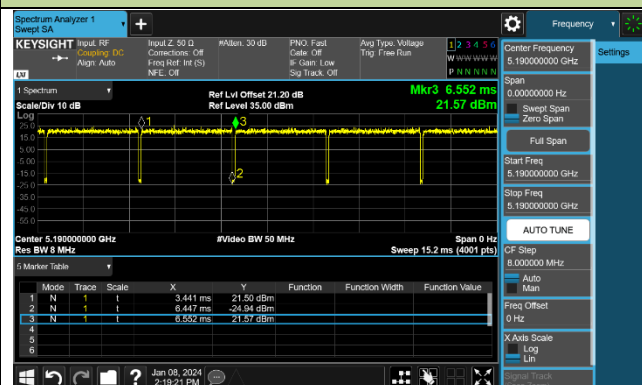


#### 802.11ax-HE80

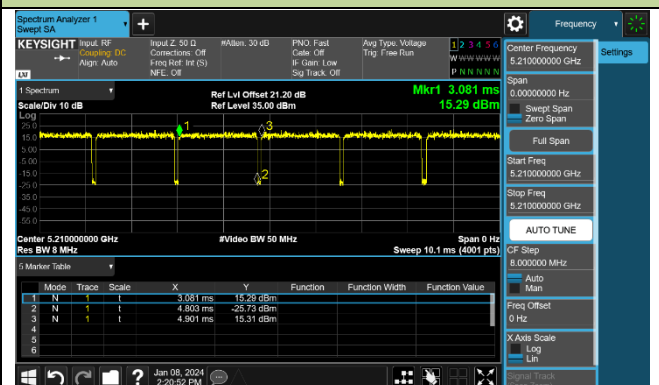


#### 802.11ax-HE160

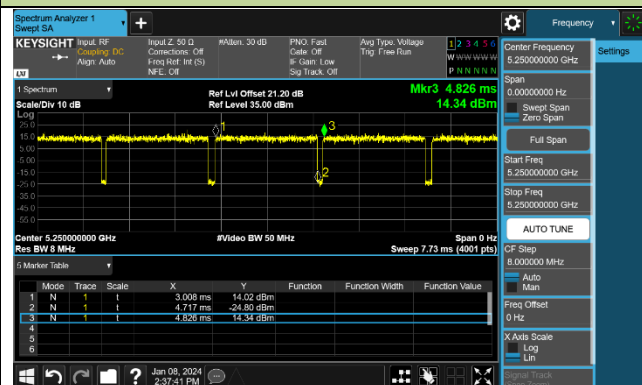

#### 802.11be-EHT20

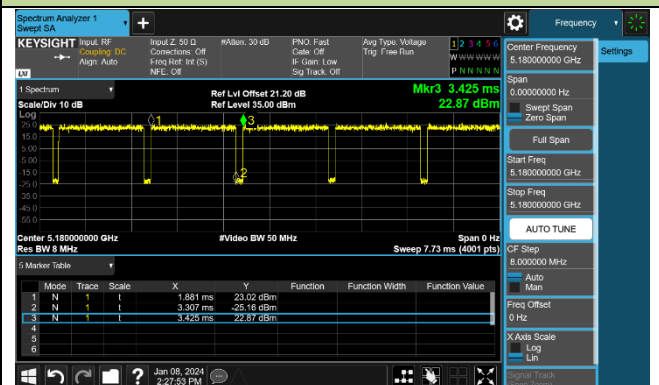



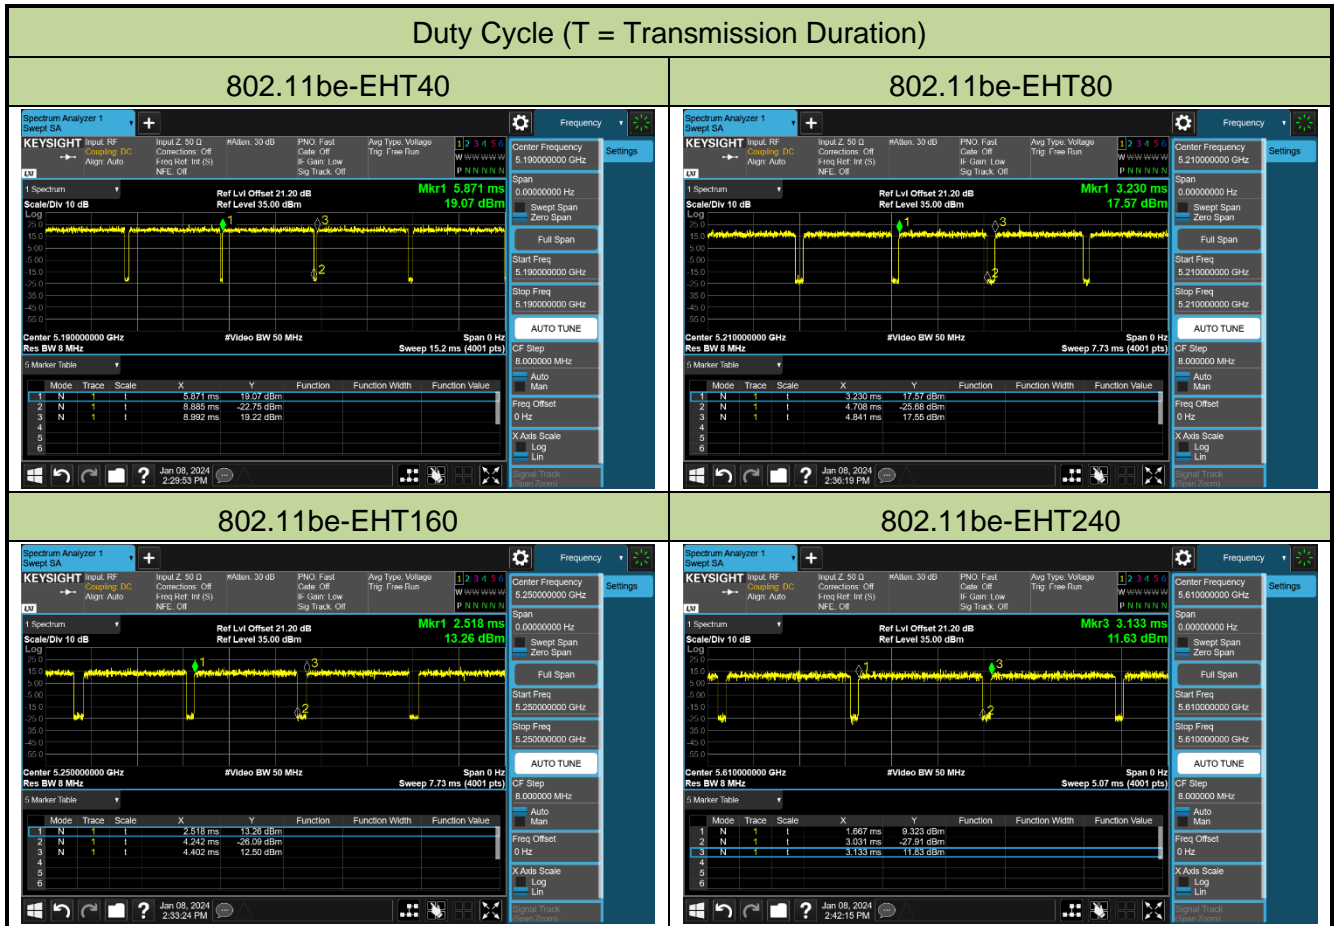

## 2.11. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.12. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.13. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### **3. DESCRIPTION OF TEST**

#### **3.1. Evaluation Procedure**

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

#### **3.2. AC Line Conducted Emissions**

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2025/3/5
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2024/4/17
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2024/5/10
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2024/6/15

### Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2024/5/22
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2024/10/31
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2024/5/17
Broadband Preampfier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2024/5/17
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2025/3/26
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2025/3/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2024/6/29
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2024/6/26
Cable	HUBERSUHNER	EMC105-NM-N M-3000	MRTTWE00035	1 year	2024/6/26
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2024/6/4

### Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2024/4/19
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2024/10/17
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2024/7/19
Attenuator	WTI	218FS-20	MRTTWE00026	1 year	2024/11/1
Attenuator	WTI	218FS-10	MRTTWE00027	1 year	2024/6/14
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2024/6/11
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2024/6/15

Software	Version	Function
e3	9.160520a	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: $\pm 2.53\text{dB}$
<b>Radiated Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
<b>Conducted Power (Carrier Power / Power Density)</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.84\text{dB}$
<b>Conducted Spurious Emission</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 2.65\text{ dB}$
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 3.3\%$
<b>Temp. / Humidity</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.82^\circ\text{C} / \pm 3\%$
<b>Frequency Error</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 78.4\text{Hz}$

## 7. TEST RESULT

### 7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	$\leq 24 \text{ dBm}$		Pass	Section 7.5
15.407(a)(1)(ii), (2), (3), (12)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet theradiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

#### Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.



## 7.2. 26dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure used

KDB 789033 D02v02r01- Section C.1

### 7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.

### 7.2.4. Test Setup

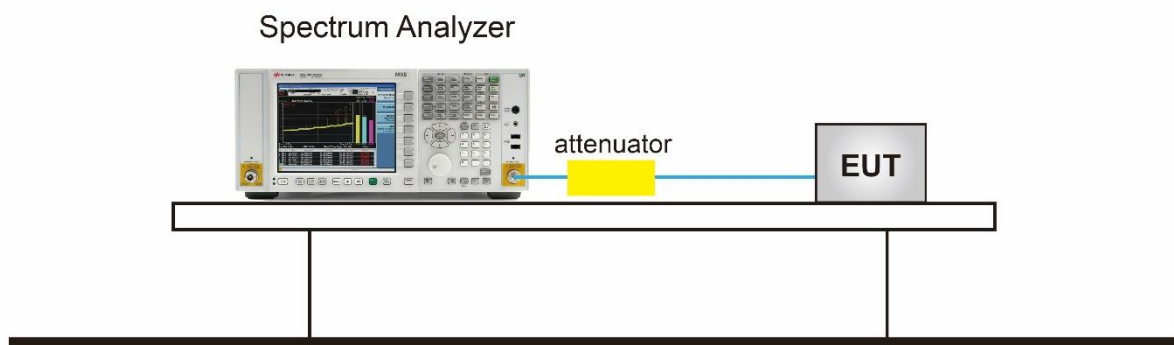

**7.2.5. Test Result**

Product	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Test Engineer	Owen
Test Site	SR6	Test Date	2024/3/27~2024/4/2

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1					
802.11a	6Mbps	36	5180	21.920	16.713
802.11a	6Mbps	44	5220	21.900	16.722
802.11a	6Mbps	48	5240	22.250	16.727
802.11a	6Mbps	52	5260	22.110	16.736
802.11a	6Mbps	60	5300	21.750	16.730
802.11a	6Mbps	64	5320	22.210	16.716
802.11a	6Mbps	100	5500	22.180	16.725
802.11a	6Mbps	116	5580	21.990	16.758
802.11a	6Mbps	140	5700	21.820	16.688
802.11a	6Mbps	144	5720	21.710	16.725
802.11a	6Mbps	149	5745	21.950	16.761
802.11a	6Mbps	157	5785	21.790	16.691
802.11a	6Mbps	165	5825	22.690	16.690
802.11ac-VHT20	MCS0	36	5180	22.780	17.836
802.11ac-VHT20	MCS0	44	5220	22.490	17.840
802.11ac-VHT20	MCS0	48	5240	21.930	17.838
802.11ac-VHT20	MCS0	52	5260	22.030	17.840
802.11ac-VHT20	MCS0	60	5300	22.580	17.822
802.11ac-VHT20	MCS0	64	5320	23.130	17.833
802.11ac-VHT20	MCS0	100	5500	21.750	17.857
802.11ac-VHT20	MCS0	116	5580	22.580	17.820
802.11ac-VHT20	MCS0	140	5700	22.110	17.835
802.11ac-VHT20	MCS0	144	5720	23.170	17.862
802.11ac-VHT20	MCS0	149	5745	22.040	17.829
802.11ac-VHT20	MCS0	157	5785	21.960	17.804
802.11ac-VHT20	MCS0	165	5825	27.370	18.057


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1					
802.11ac-VHT40	MCS0	38	5190	44.230	36.370
802.11ac-VHT40	MCS0	46	5230	45.900	36.556
802.11ac-VHT40	MCS0	54	5270	44.060	36.378
802.11ac-VHT40	MCS0	62	5310	42.920	36.447
802.11ac-VHT40	MCS0	102	5510	44.340	36.442
802.11ac-VHT40	MCS0	110	5550	43.320	36.404
802.11ac-VHT40	MCS0	134	5670	43.390	36.332
802.11ac-VHT40	MCS0	142	5710	44.740	36.424
802.11ac-VHT40	MCS0	151	5755	45.540	36.549
802.11ac-VHT40	MCS0	159	5795	44.090	36.414
802.11ac-VHT80	MCS0	42	5210	90.010	76.033
802.11ac-VHT80	MCS0	58	5290	89.460	76.051
802.11ac-VHT80	MCS0	106	5530	88.730	76.242
802.11ac-VHT80	MCS0	122	5610	92.750	76.011
802.11ac-VHT80	MCS0	138	5690	91.120	76.044
802.11ac-VHT80	MCS0	155	5775	90.720	76.136
802.11ac-VHT160	MCS0	50	5250	169.300	155.450
802.11ac-VHT160	MCS0	114	5570	169.500	155.410
802.11ax-HE20	MCS0	36	5180	22.860	19.081
802.11ax-HE20	MCS0	44	5220	22.900	19.113
802.11ax-HE20	MCS0	48	5240	23.270	19.085
802.11ax-HE20	MCS0	52	5260	21.580	19.127
802.11ax-HE20	MCS0	60	5300	21.820	19.035
802.11ax-HE20	MCS0	64	5320	22.200	19.029
802.11ax-HE20	MCS0	100	5500	21.550	19.055
802.11ax-HE20	MCS0	116	5580	21.810	19.028
802.11ax-HE20	MCS0	140	5700	22.120	19.045
802.11ax-HE20	MCS0	144	5720	21.820	19.063
802.11ax-HE20	MCS0	149	5745	21.300	19.046
802.11ax-HE20	MCS0	157	5785	22.660	19.079
802.11ax-HE20	MCS0	165	5825	31.350	19.163

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1					
802.11ax-HE40	MCS0	38	5190	42.960	37.998
802.11ax-HE40	MCS0	46	5230	51.760	38.116
802.11ax-HE40	MCS0	54	5270	42.720	37.887
802.11ax-HE40	MCS0	62	5310	42.430	37.958
802.11ax-HE40	MCS0	102	5510	41.820	38.002
802.11ax-HE40	MCS0	110	5550	42.300	37.907
802.11ax-HE40	MCS0	134	5670	43.510	37.952
802.11ax-HE40	MCS0	142	5710	43.400	37.936
802.11ax-HE40	MCS0	151	5755	44.220	38.102
802.11ax-HE40	MCS0	159	5795	42.050	37.917
802.11ax-HE80	MCS0	42	5210	86.460	77.612
802.11ax-HE80	MCS0	58	5290	86.540	77.587
802.11ax-HE80	MCS0	106	5530	86.900	77.763
802.11ax-HE80	MCS0	122	5610	86.190	77.639
802.11ax-HE80	MCS0	138	5690	87.960	77.640
802.11ax-HE80	MCS0	155	5775	93.700	77.690
802.11ax-HE160	MCS0	50	5250	165.600	157.150
802.11ax-HE160	MCS0	114	5570	166.600	157.030
802.11be-EHT20	MCS0	36	5180	22.310	19.047
802.11be-EHT20	MCS0	44	5220	22.800	19.146
802.11be-EHT20	MCS0	48	5240	22.550	19.111
802.11be-EHT20	MCS0	52	5260	21.760	19.005
802.11be-EHT20	MCS0	60	5300	22.870	19.123
802.11be-EHT20	MCS0	64	5320	22.000	19.039
802.11be-EHT20	MCS0	100	5500	21.940	19.078
802.11be-EHT20	MCS0	116	5580	21.810	19.018
802.11be-EHT20	MCS0	140	5700	22.770	19.072
802.11be-EHT20	MCS0	144	5720	22.850	19.039
802.11be-EHT20	MCS0	149	5745	23.290	19.121
802.11be-EHT20	MCS0	157	5785	22.300	19.046
802.11be-EHT20	MCS0	165	5825	33.610	19.244


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1					
802.11be-EHT40	MCS0	38	5190	42.730	37.952
802.11be-EHT40	MCS0	46	5230	47.150	38.104
802.11be-EHT40	MCS0	54	5270	43.640	37.893
802.11be-EHT40	MCS0	62	5310	44.210	37.970
802.11be-EHT40	MCS0	102	5510	42.550	38.041
802.11be-EHT40	MCS0	110	5550	42.790	37.931
802.11be-EHT40	MCS0	134	5670	42.670	37.983
802.11be-EHT40	MCS0	142	5710	42.790	37.918
802.11be-EHT40	MCS0	151	5755	43.470	38.017
802.11be-EHT40	MCS0	159	5795	46.120	38.099
802.11be-EHT80	MCS0	42	5210	85.110	77.637
802.11be-EHT80	MCS0	58	5290	85.240	77.539
802.11be-EHT80	MCS0	106	5530	85.610	77.716
802.11be-EHT80	MCS0	122	5610	86.950	77.608
802.11be-EHT80	MCS0	138	5690	86.190	77.521
802.11be-EHT80	MCS0	155	5775	88.000	77.838
802.11be-EHT160	MCS0	50	5250	166.600	156.920
802.11be-EHT160	MCS0	114	5570	166.500	157.160
802.11be-EHT240	MCS0	130	5650	295.600	237.070

80.211a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

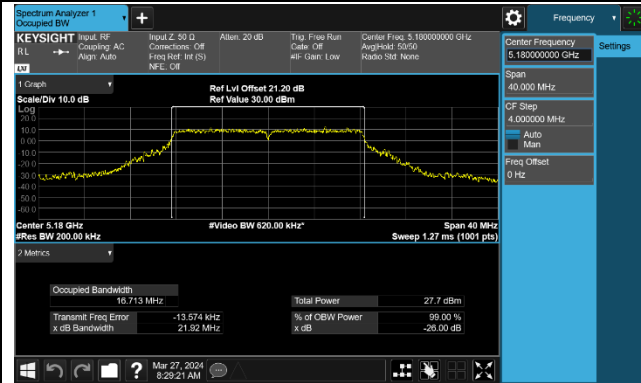


Channel 44 (5220MHz)

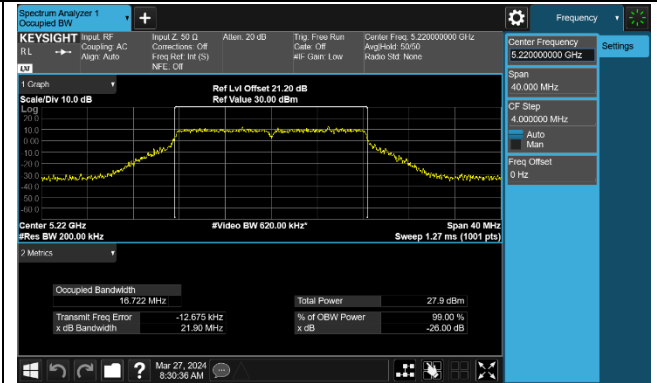


Channel 48 (5240MHz)

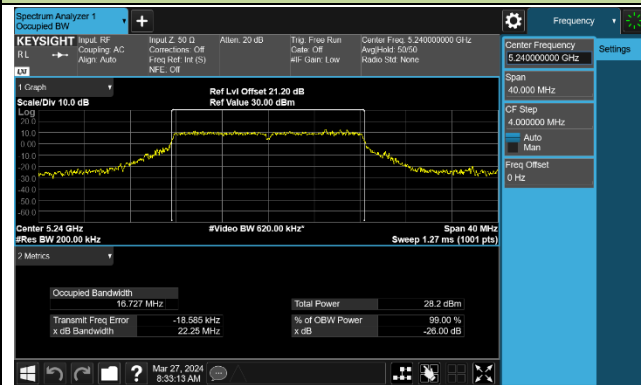


Channel 52 (5260MHz)

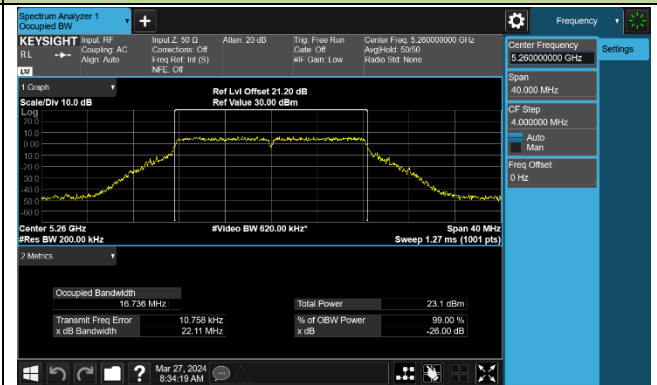


Channel 60 (5300MHz)

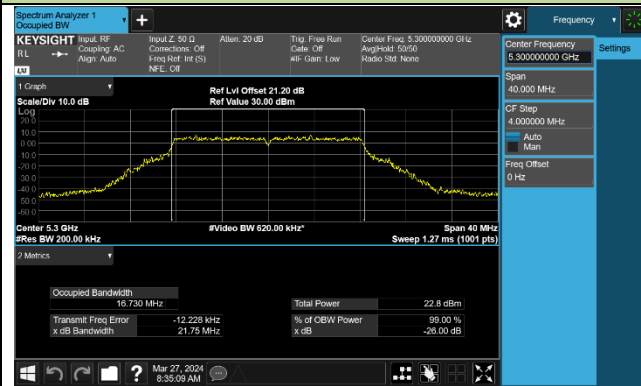


Channel 64 (5320MHz)

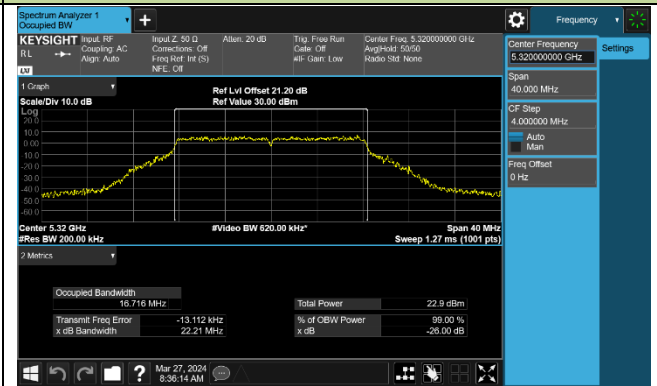


Channel 100 (5500MHz)

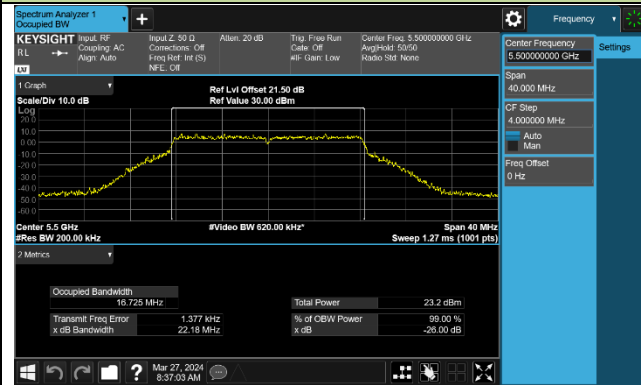


Channel 116 (5580MHz)

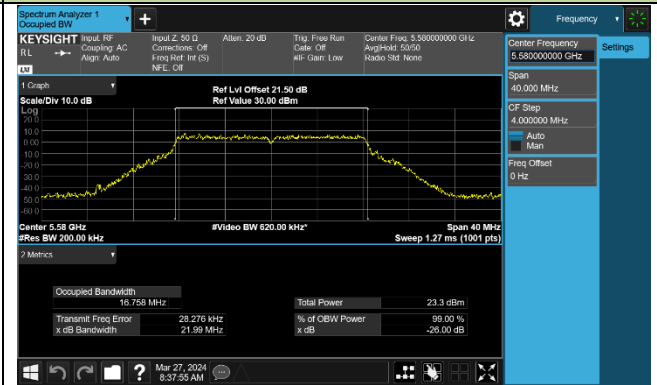

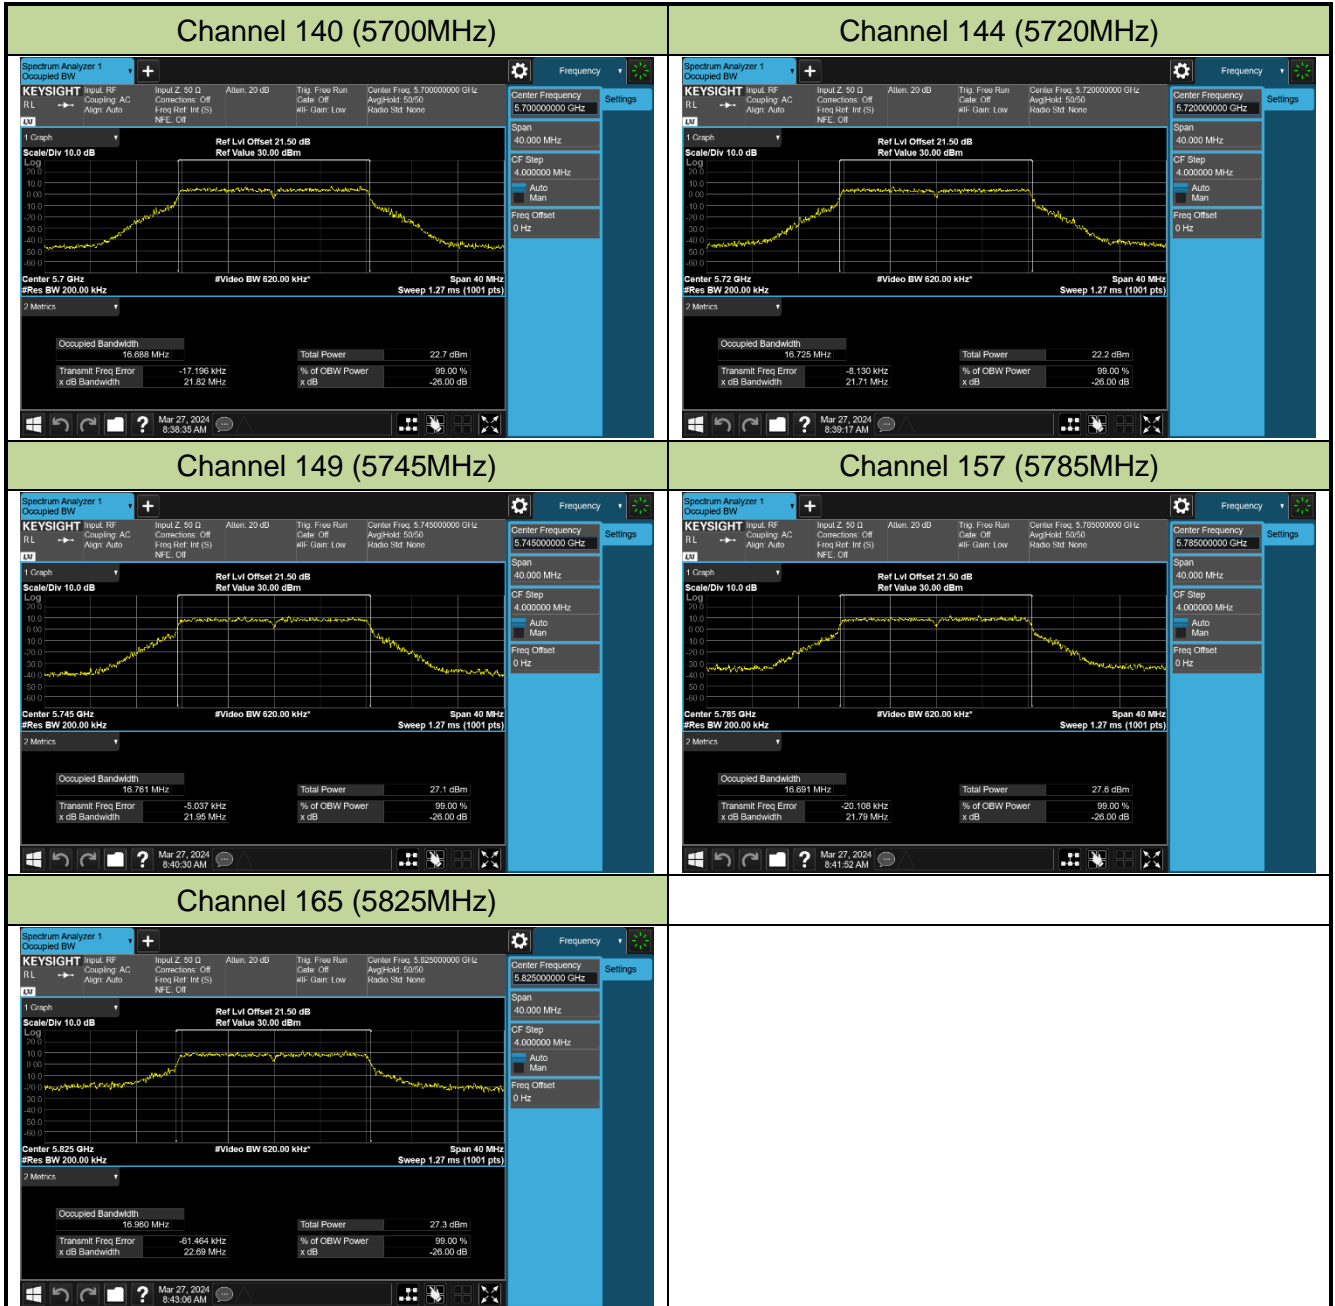


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

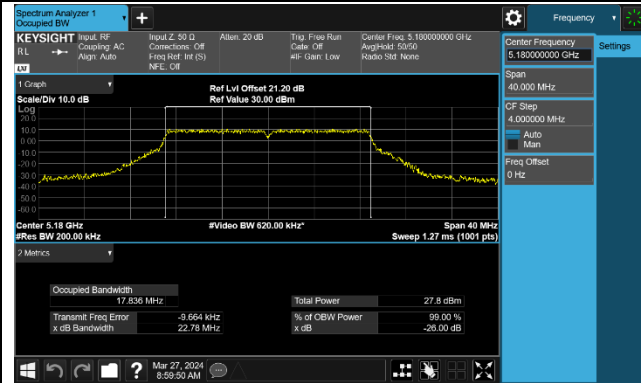


Channel 44 (5220MHz)

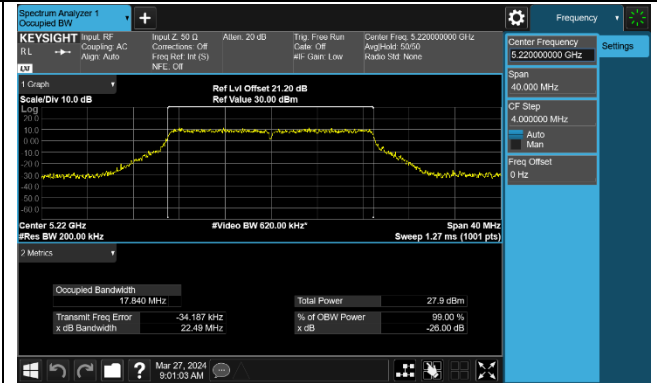


Channel 48 (5240MHz)

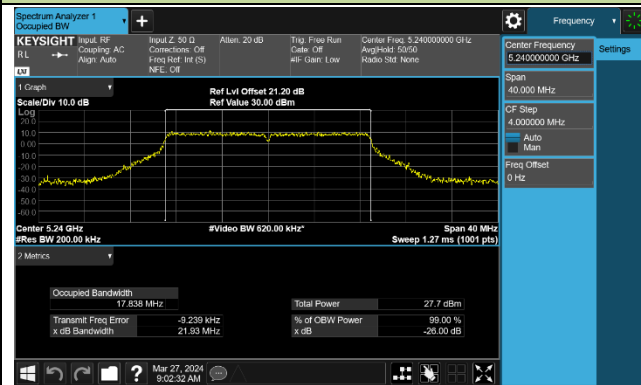


Channel 52 (5260MHz)

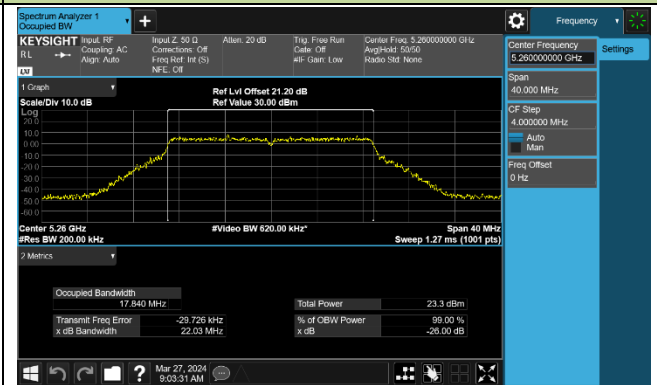


Channel 60 (5300MHz)

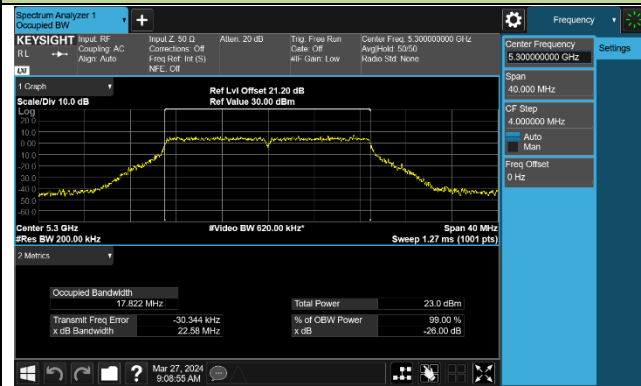


Channel 64 (5320MHz)

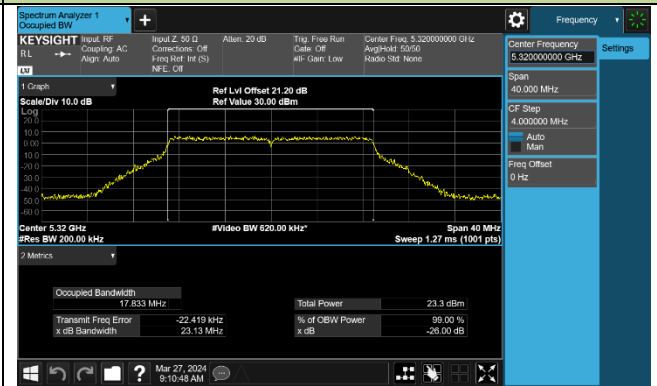


Channel 100 (5500MHz)

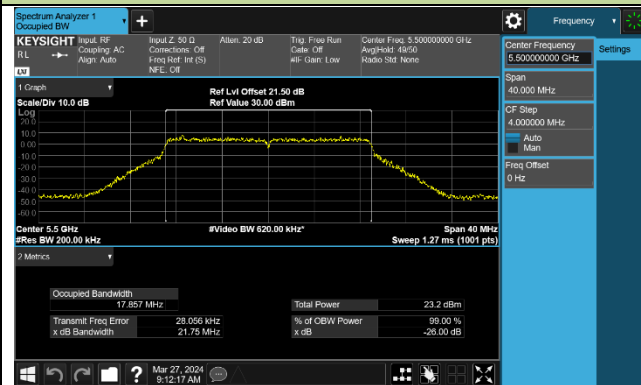

Channel 116 (5580MHz)

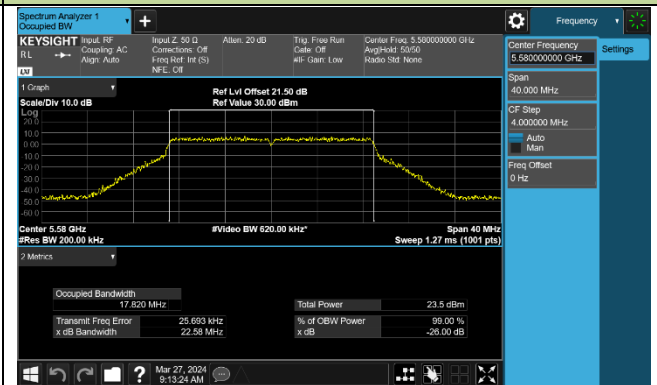




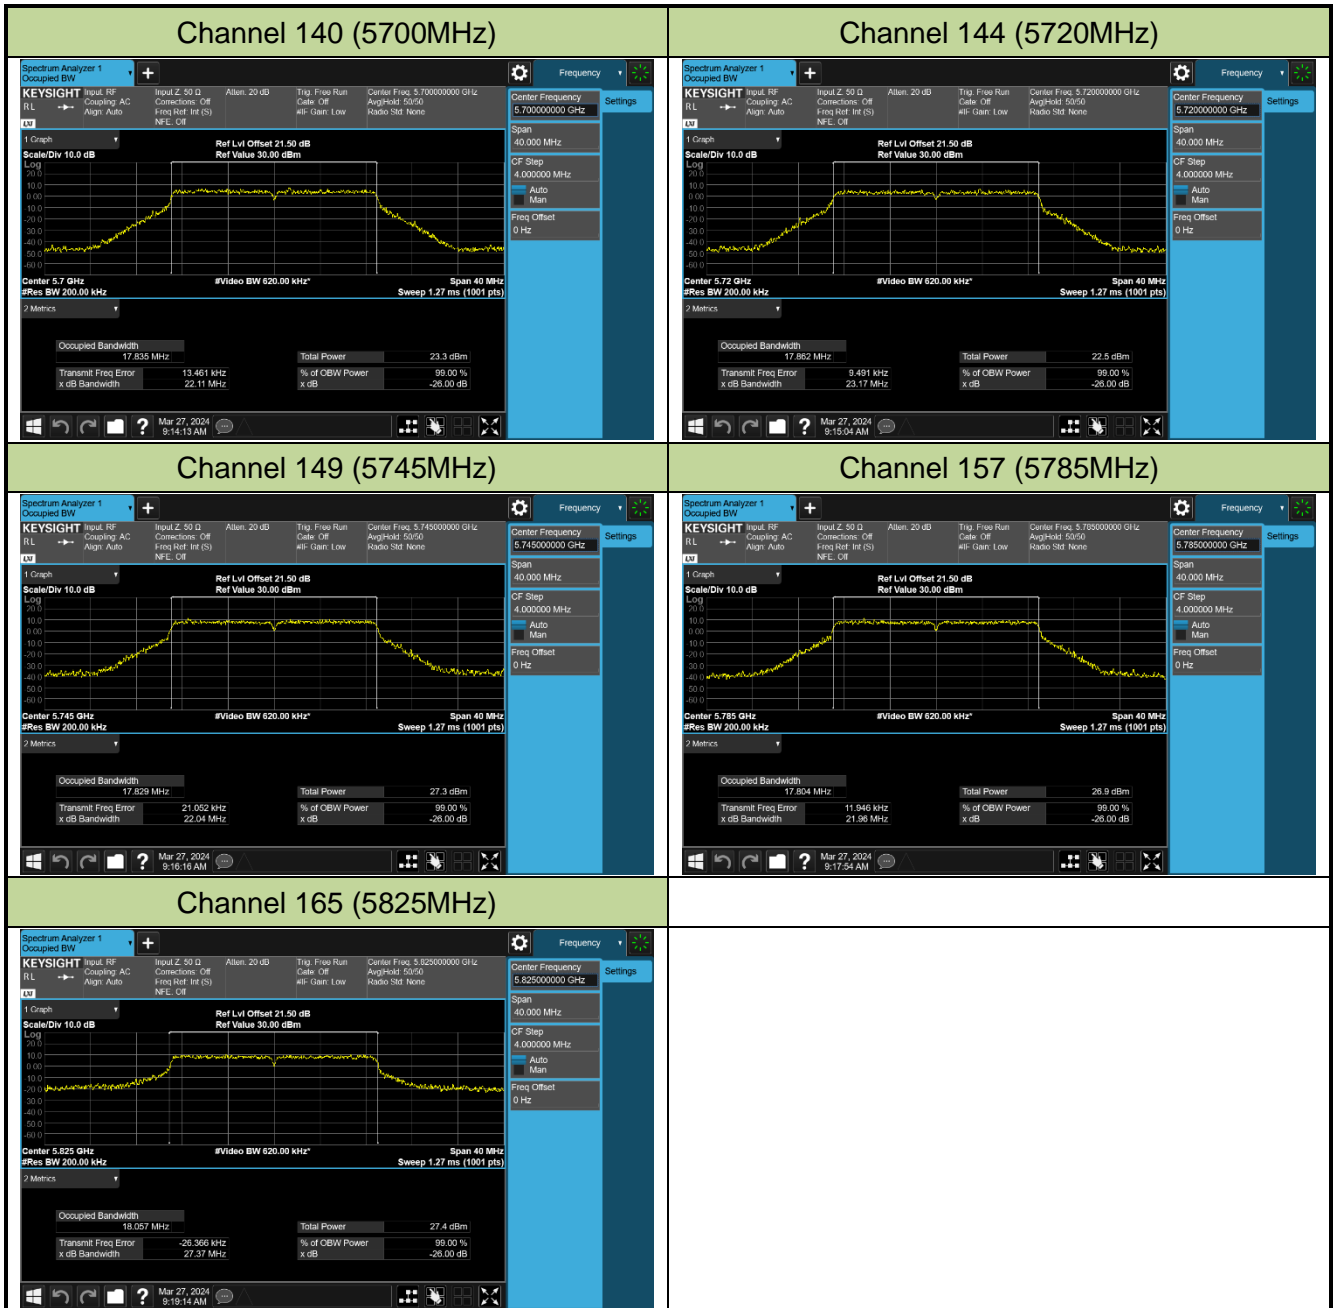


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

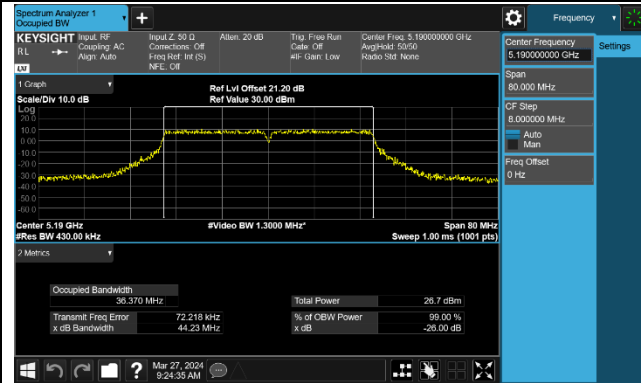


Channel 46 (5230MHz)

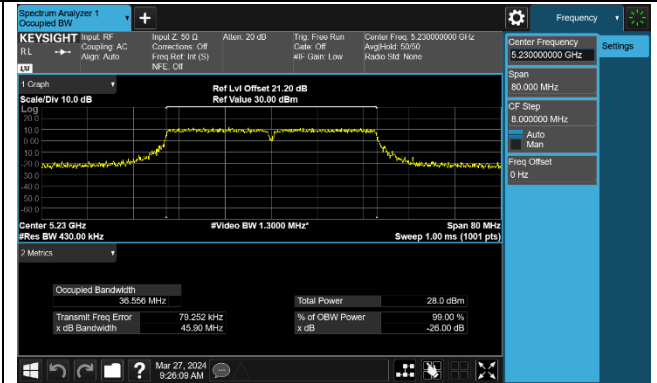


Channel 54 (5270MHz)

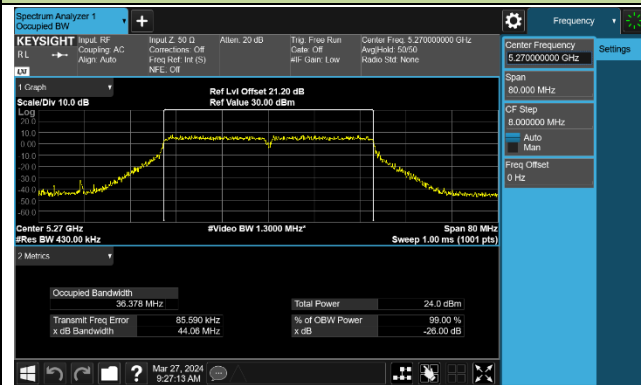


Channel 62 (5310MHz)

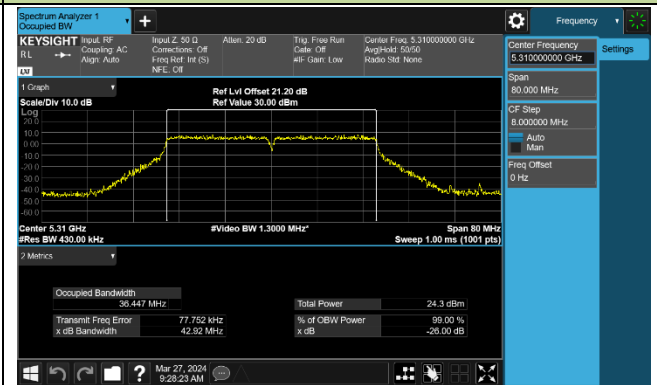


Channel 102 (5510MHz)

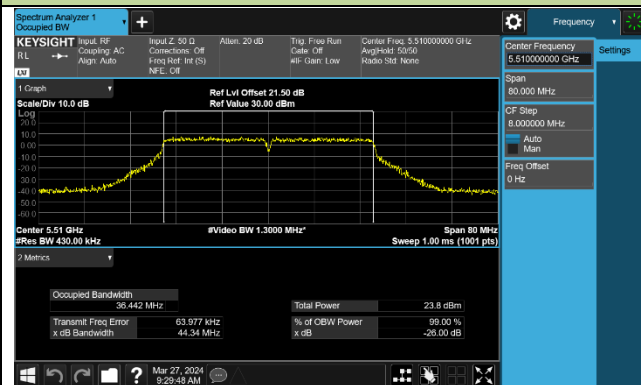


Channel 110 (5550MHz)

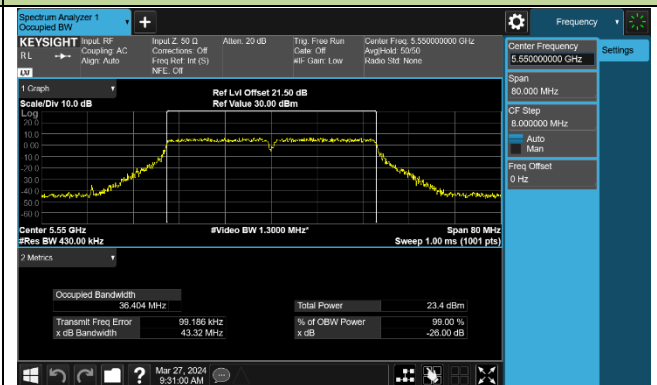


Channel 134 (5670MHz)

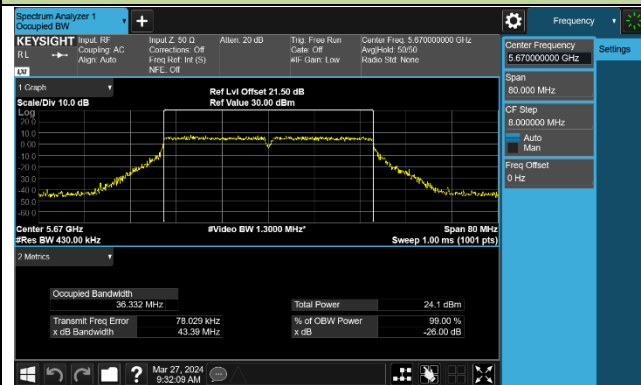

Channel 142 (5710MHz)


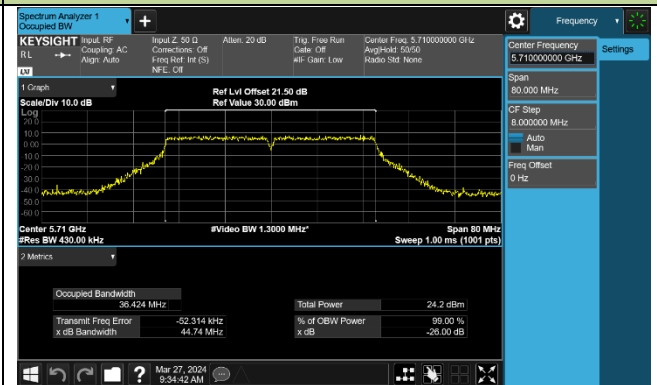


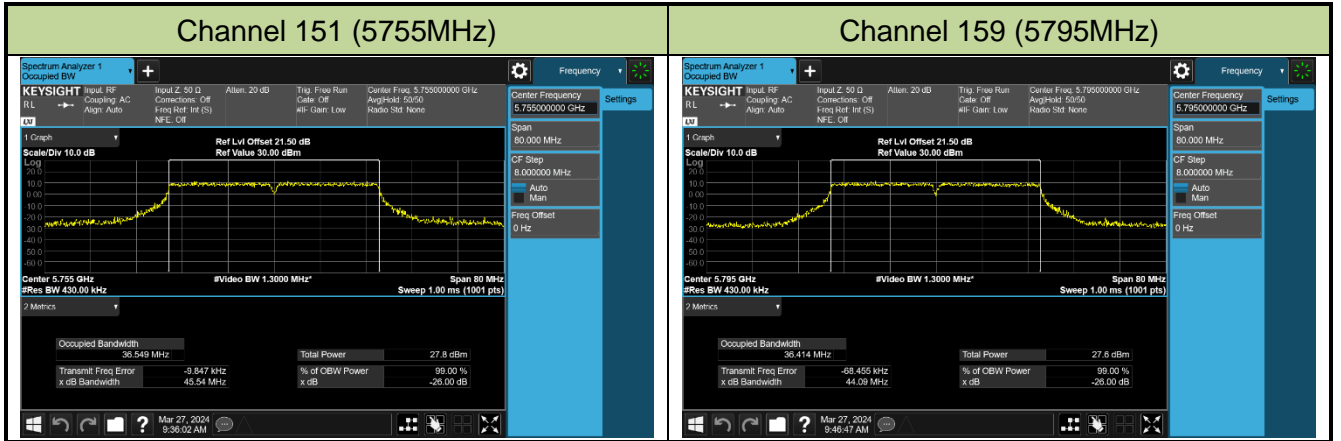

802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth



Channel 42 (5210MHz)

Channel 58 (5290MHz)

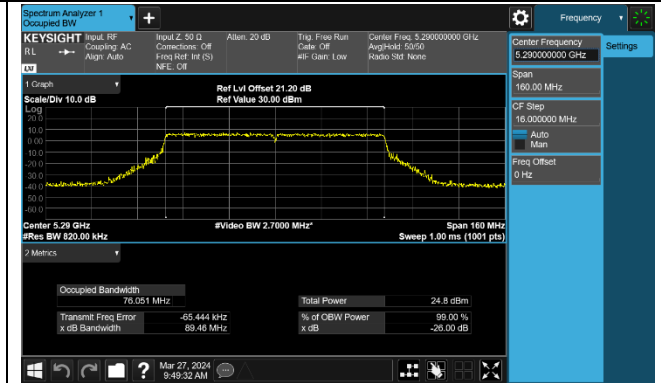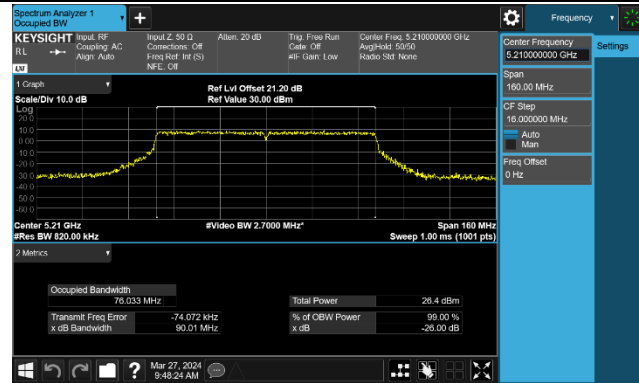



Channel 106 (5530MHz)

Channel 122 (5610MHz)

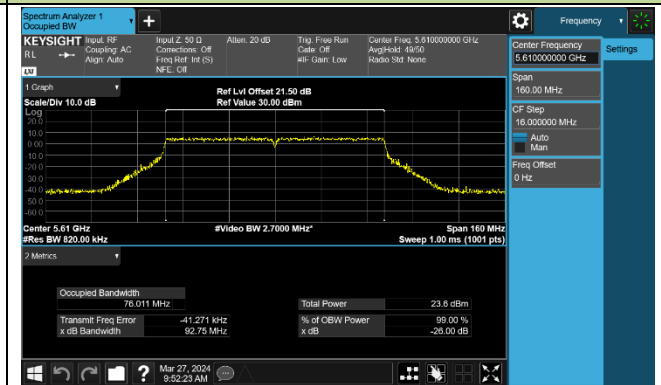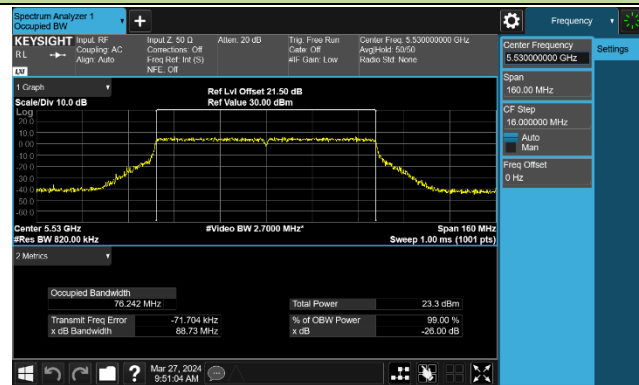

Channel 138 (5690MHz)



Channel 155 (5775MHz)

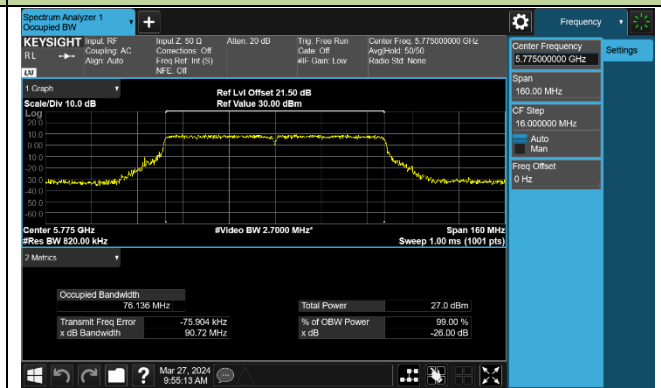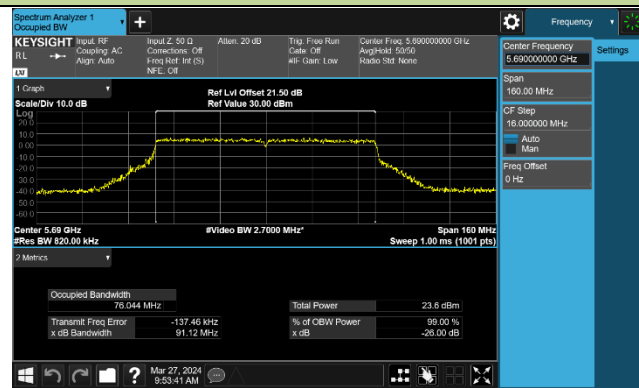

802.11ac-VHT160 26dB Bandwidth & 99% Bandwidth


Channel 50 (5250MHz)

Channel 114 (5570MHz)

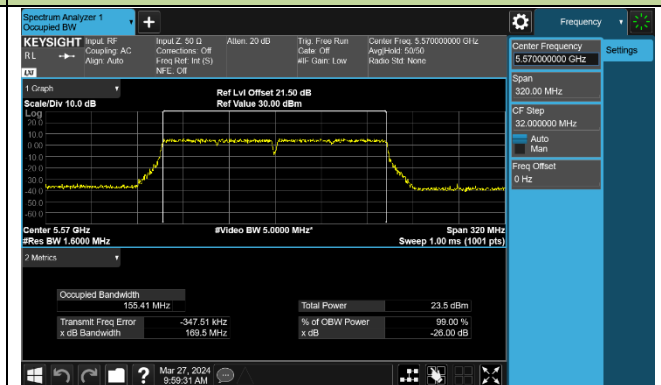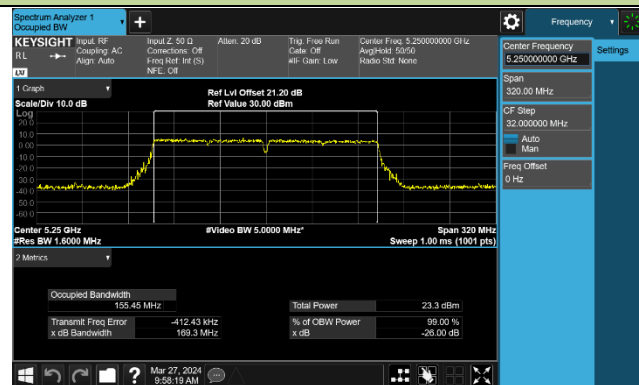


802.11ax-HE20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

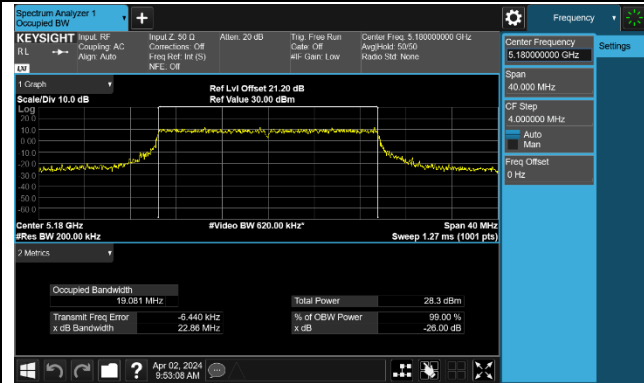


Channel 44 (5220MHz)

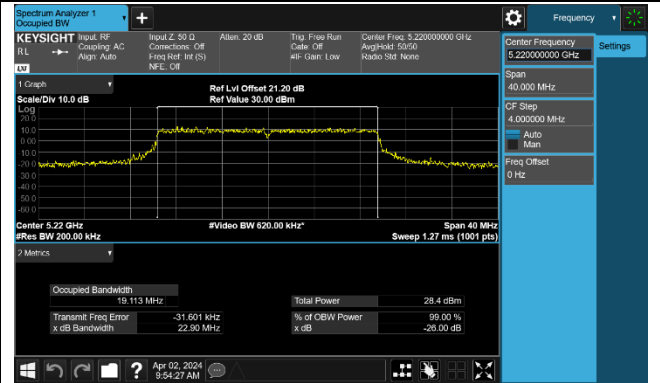


Channel 48 (5240MHz)

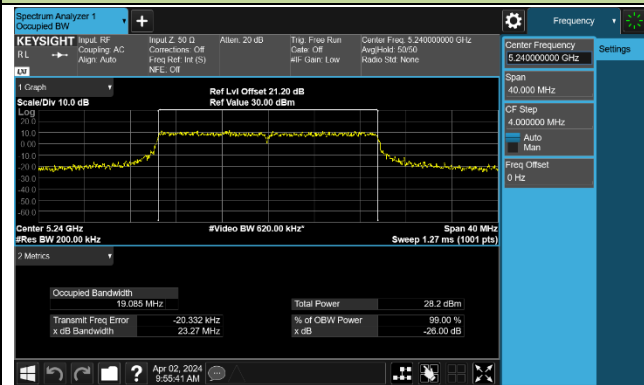


Channel 52 (5260MHz)

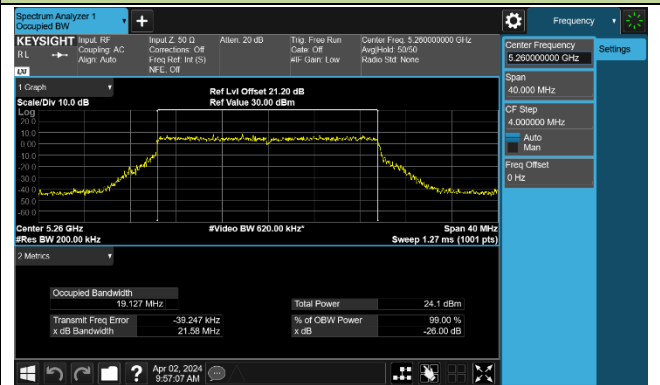


Channel 60 (5300MHz)

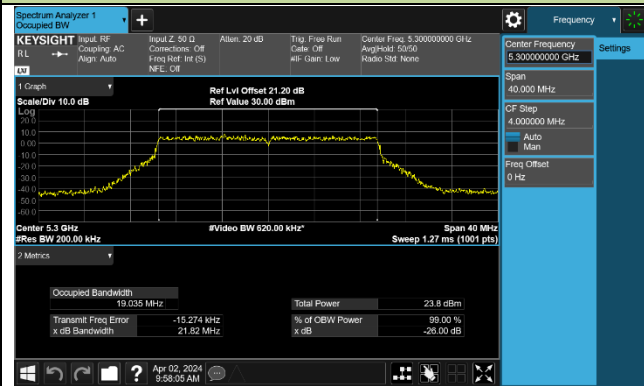


Channel 64 (5320MHz)

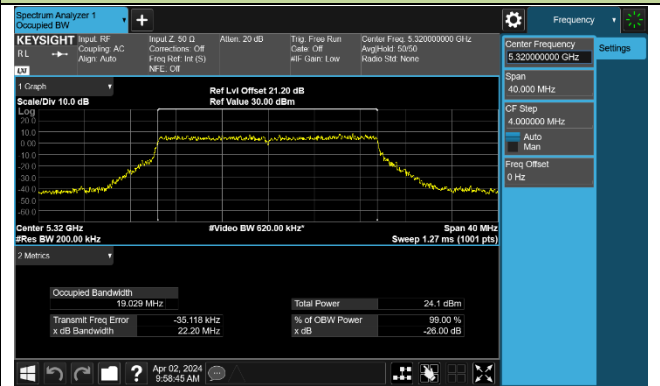


Channel 100 (5500MHz)

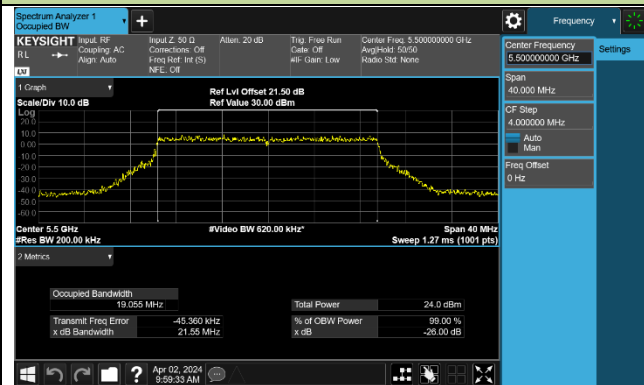


Channel 116 (5580MHz)

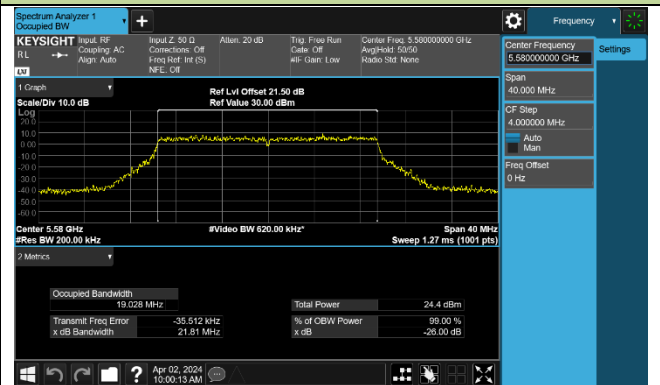

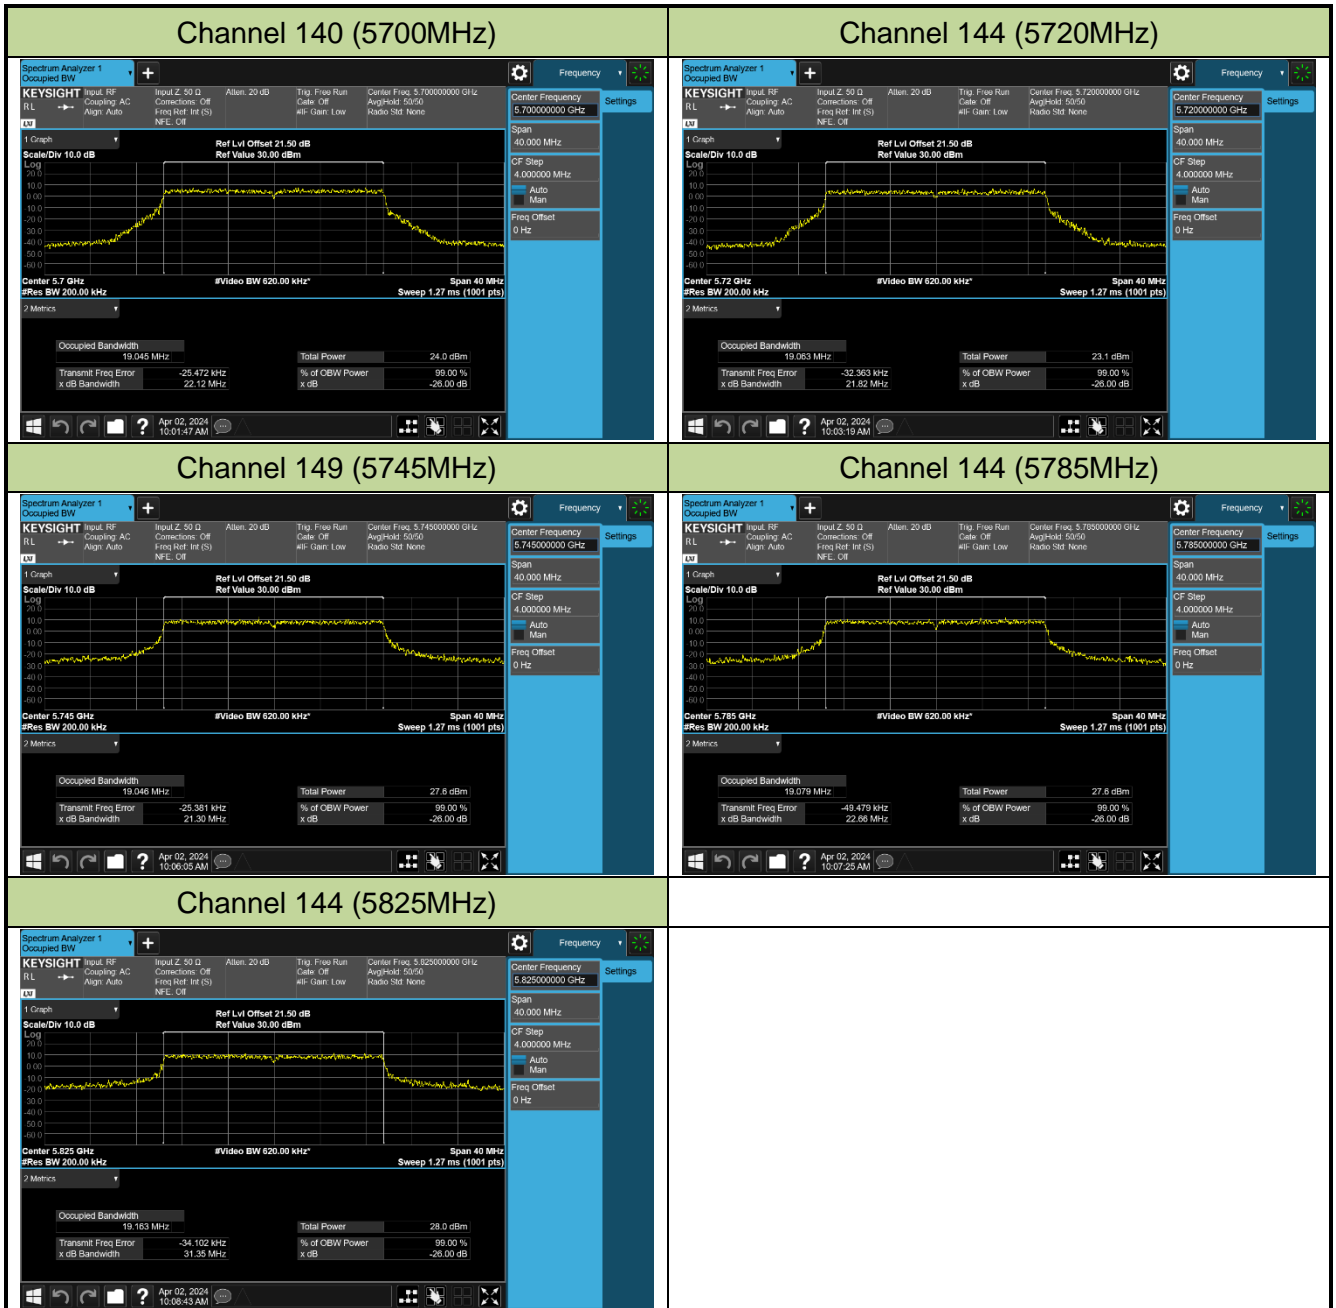


802.11ax-HE40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

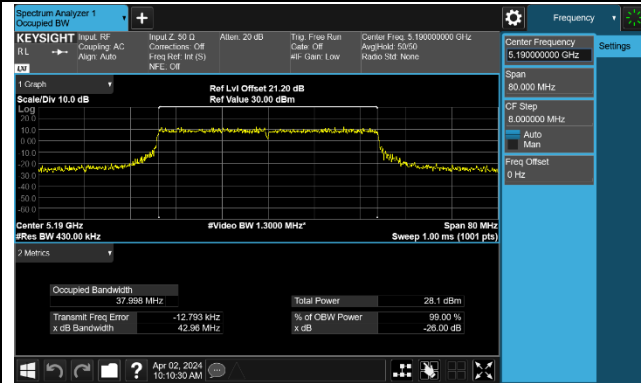


Channel 46 (5230MHz)

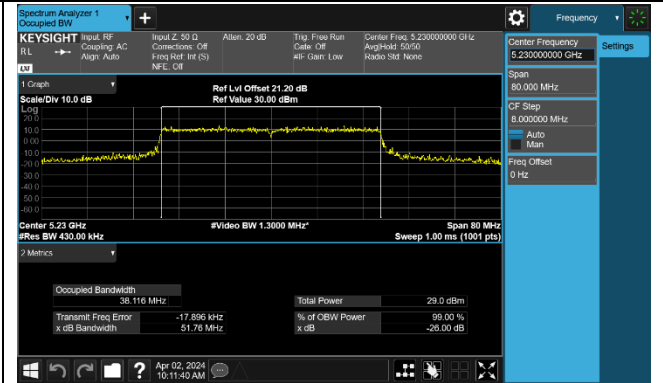


Channel 54 (5270MHz)

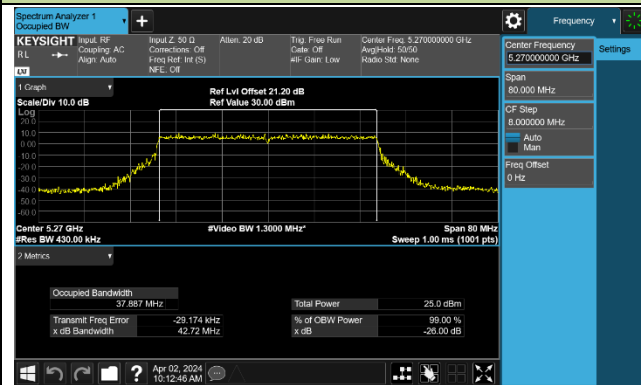


Channel 62 (5310MHz)

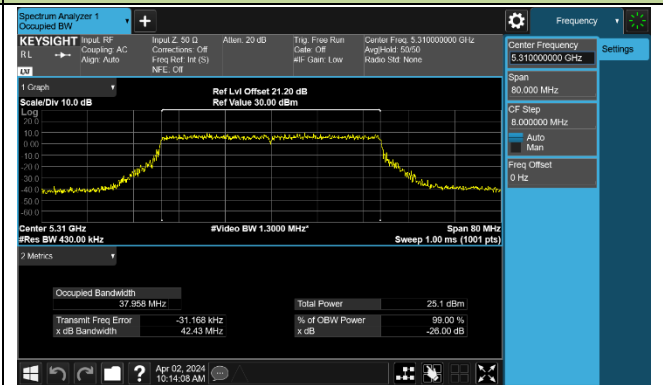


Channel 102 (5510MHz)

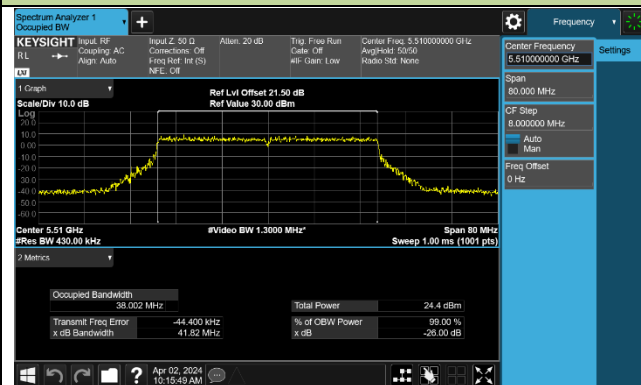

Channel 110 (5550MHz)

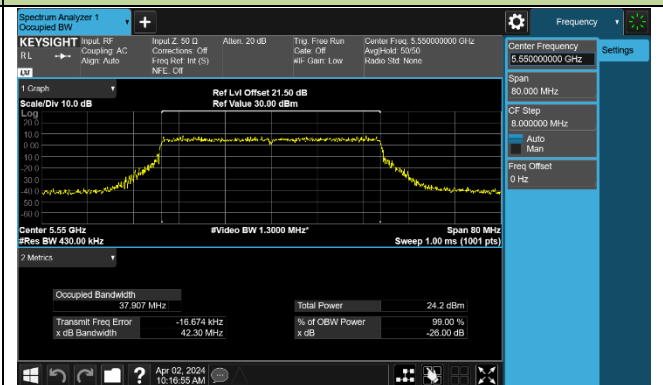

Channel 134 (5670MHz)

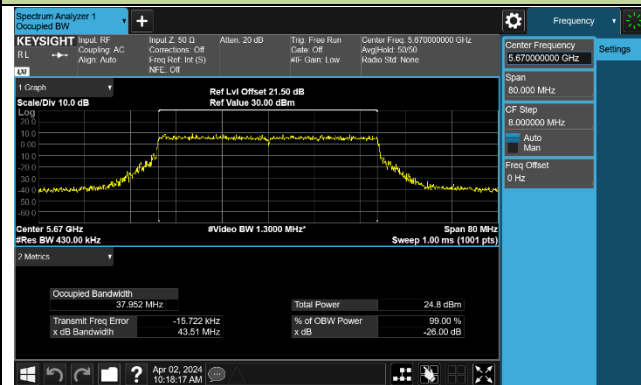

Channel 142 (5710MHz)

