



Test Mode	IEEE 802.11ax (HE160)_ Ant 1
-----------	------------------------------


Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6025	2.99	0.46	3.45	5.00	Pass
6345	1.94	0.46	2.40	5.00	Pass

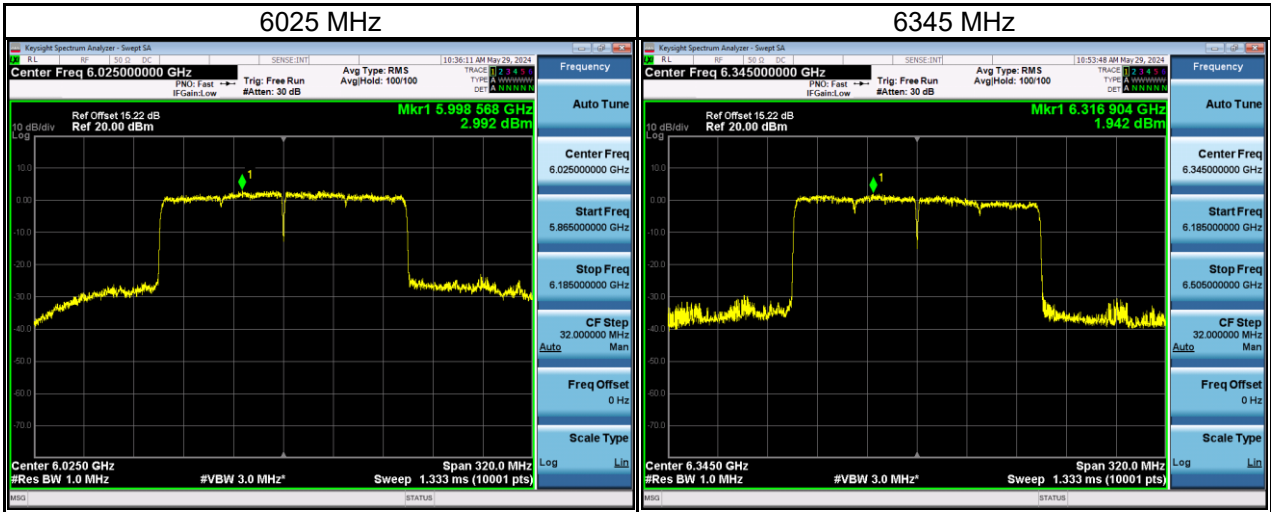


Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6505	1.73	0.46	2.19	5.00	Pass

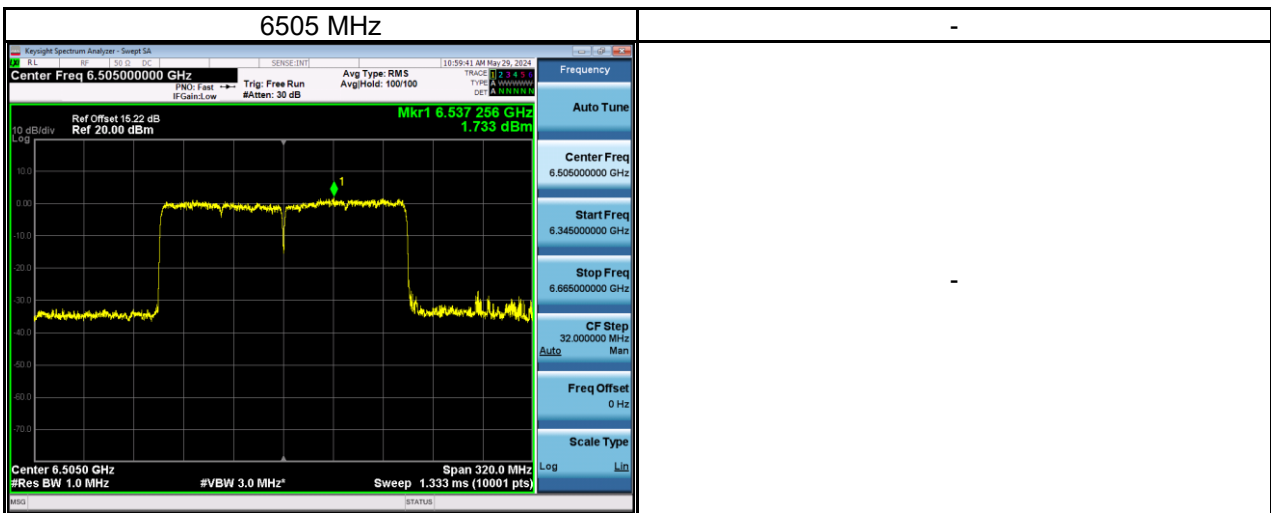

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6665	2.22	0.46	2.68	5.00	Pass
6825	1.37	0.46	1.82	5.00	Pass

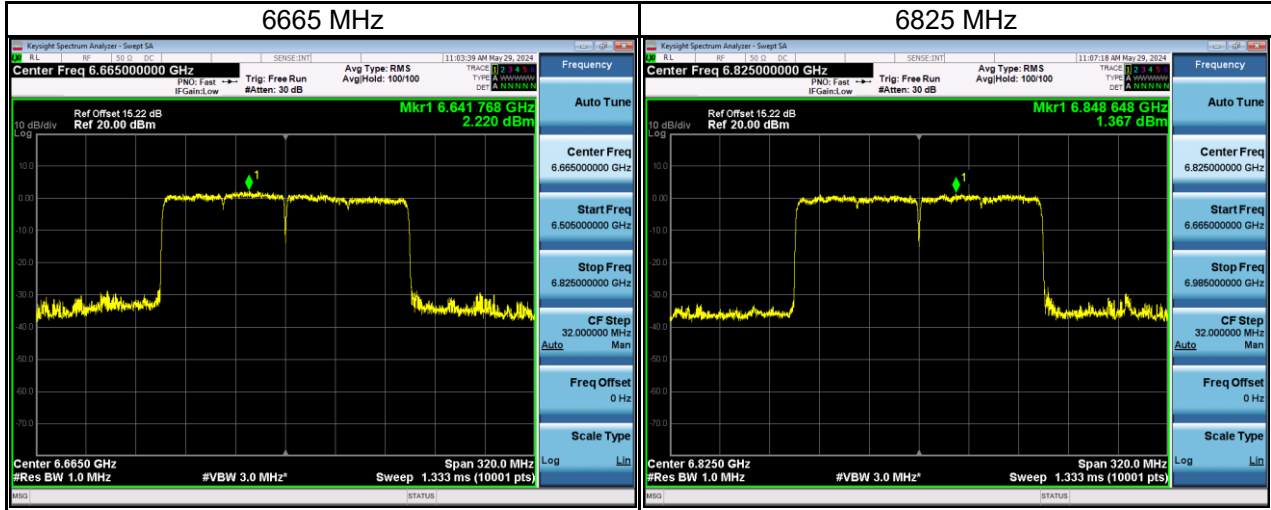


Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6985	1.89	0.46	2.34	5.00	Pass

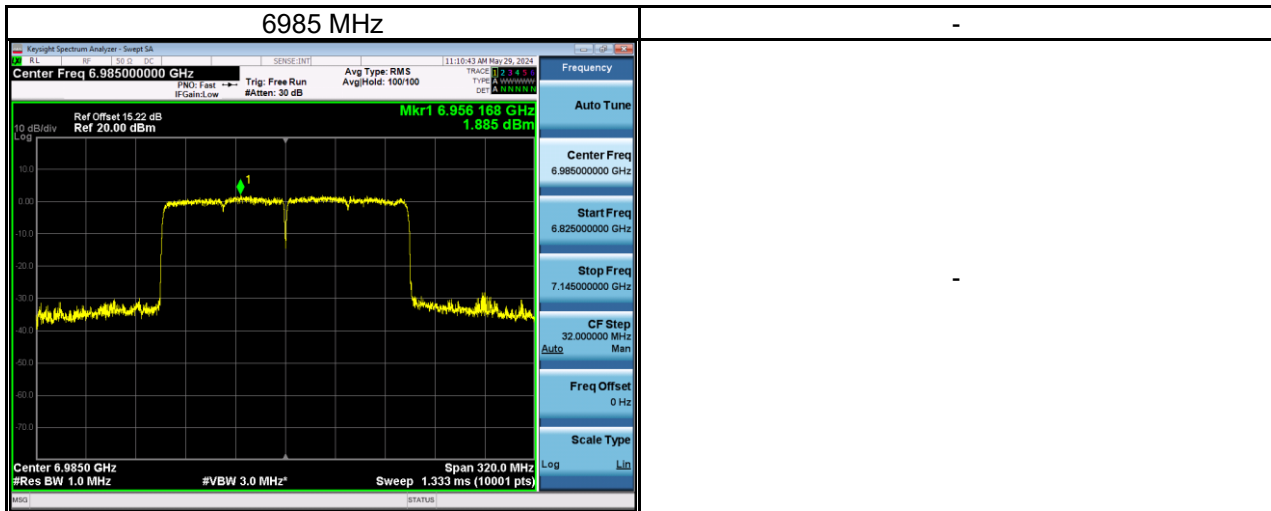


Test Mode	IEEE 802.11ax (HE160)_Ant 2
-----------	-----------------------------



Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6025	-1.86	0.46	-1.41	5.00	Pass
6345	0.83	0.46	1.29	5.00	Pass

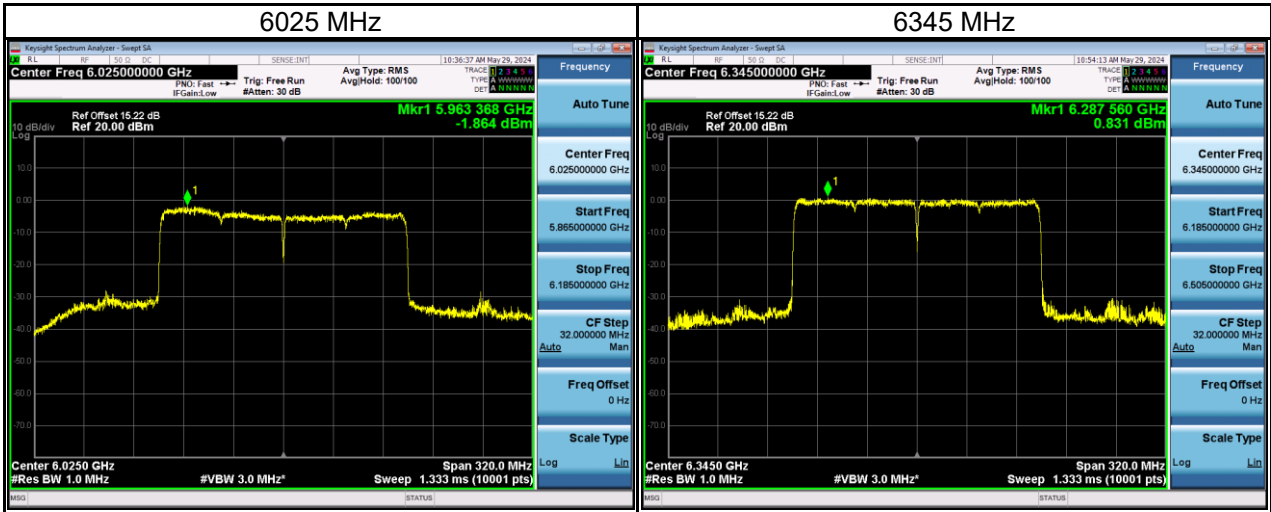


Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6505	1.22	0.46	1.68	5.00	Pass

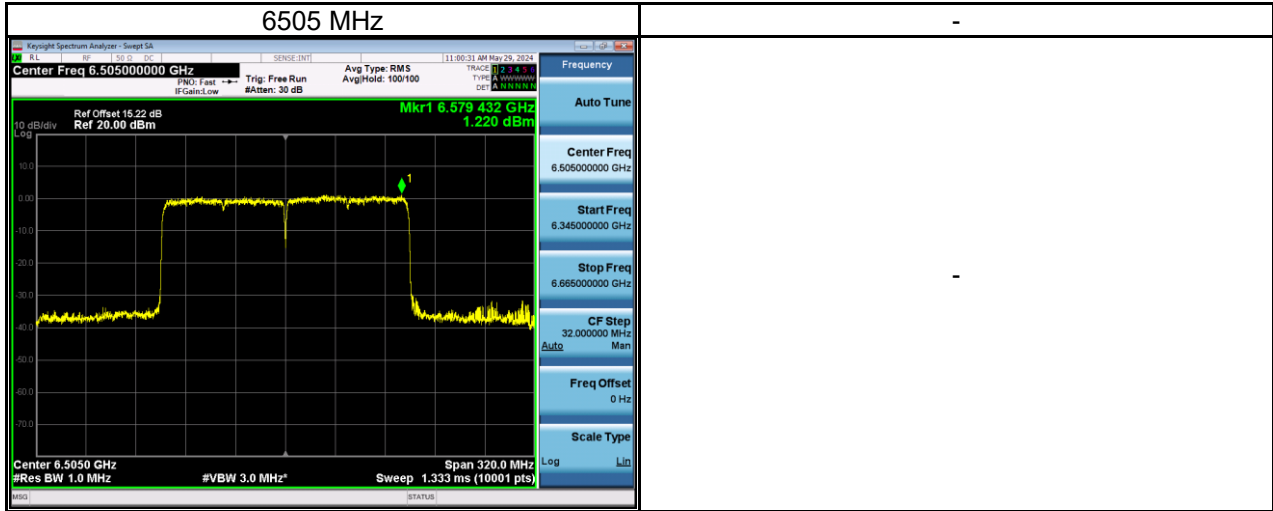

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6665	0.67	0.46	1.13	5.00	Pass
6825	1.04	0.46	1.50	5.00	Pass

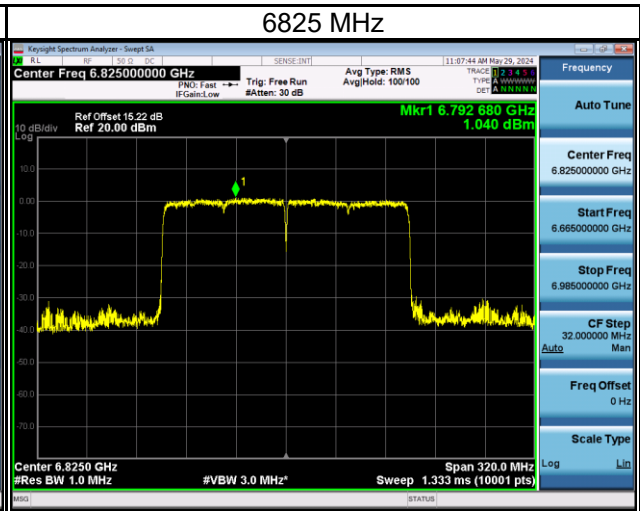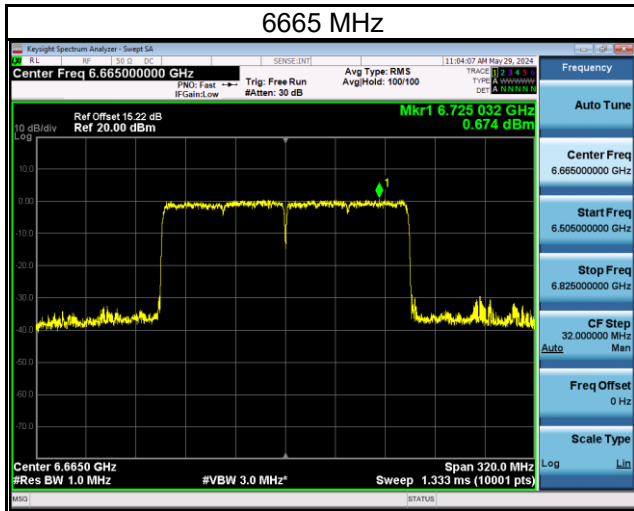

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6985	1.04	0.46	1.49	5.00	Pass

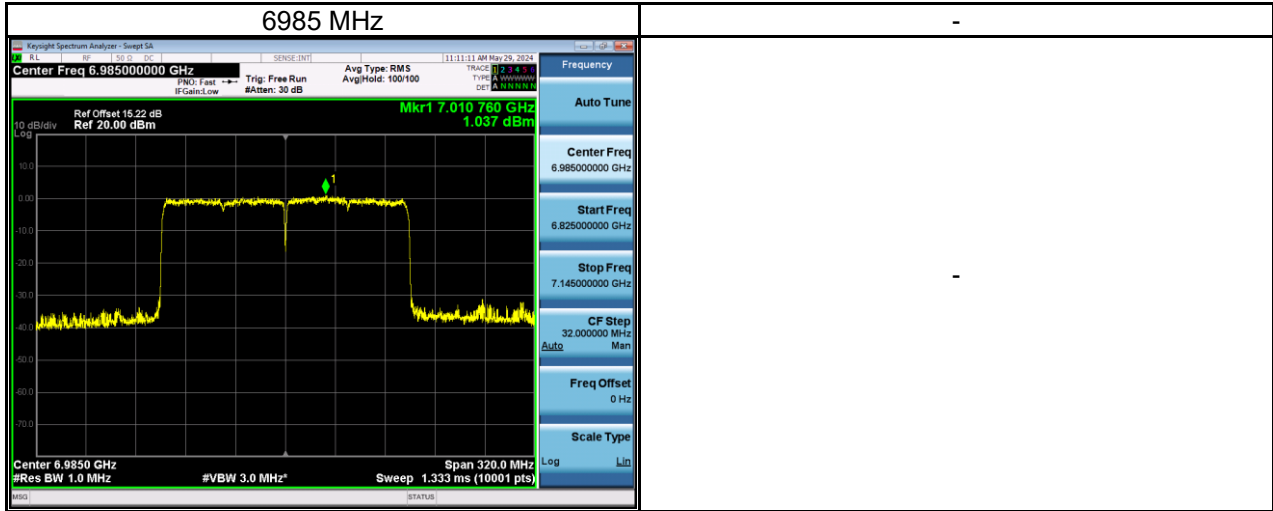


Test Mode	IEEE 802.11ax (HE160)_ Total
-----------	------------------------------

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6025	4.22	0.46	4.68	5.00	Pass
6345	4.43	0.46	4.89	5.00	Pass
6505	4.49	0.46	4.95	5.00	Pass
6665	4.53	0.46	4.98	5.00	Pass
6825	4.22	0.46	4.67	5.00	Pass
6985	4.49	0.46	4.95	5.00	Pass

**APPENDIX D UNDESIRABLE EMISSIONS - 9 KHZ TO 30 MHZ**

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/14
Test Frequency	6665MHz	Polarization	Vertical
Temp	23°C	Hum.	66%

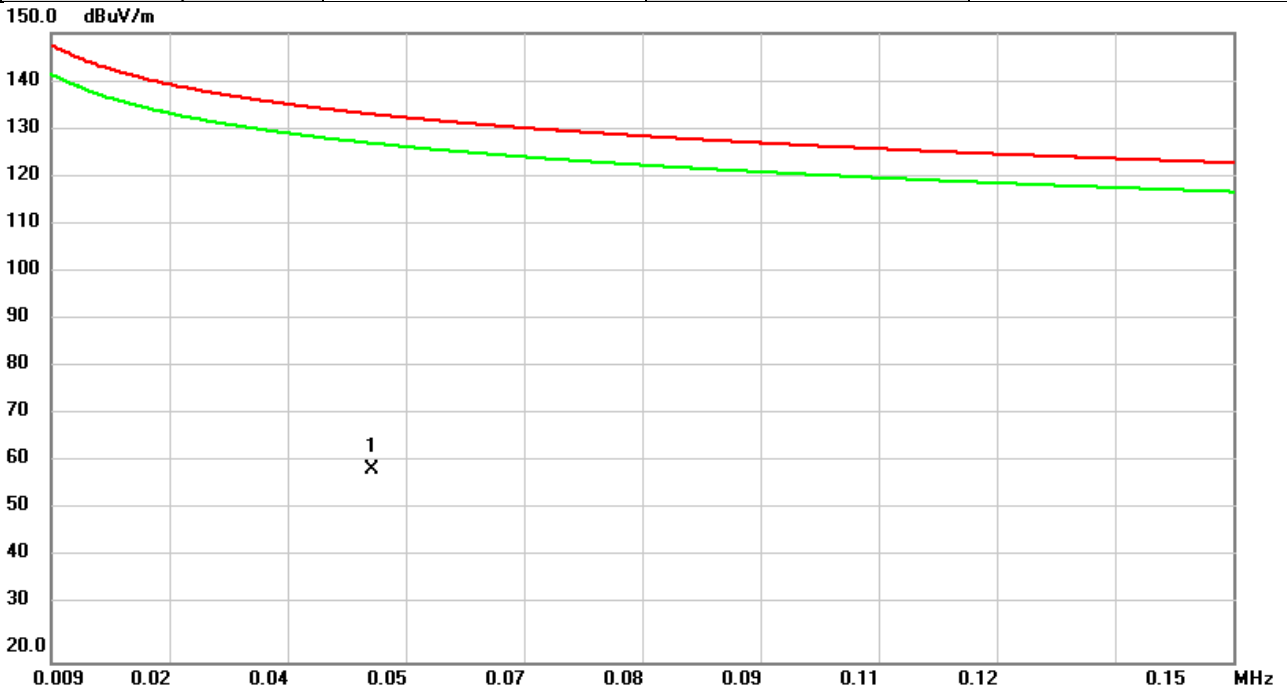


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0473	35.81	24.03	59.84	133.19	-73.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/14
Test Frequency	6665MHz	Polarization	Vertical
Temp	23°C	Hum.	66%

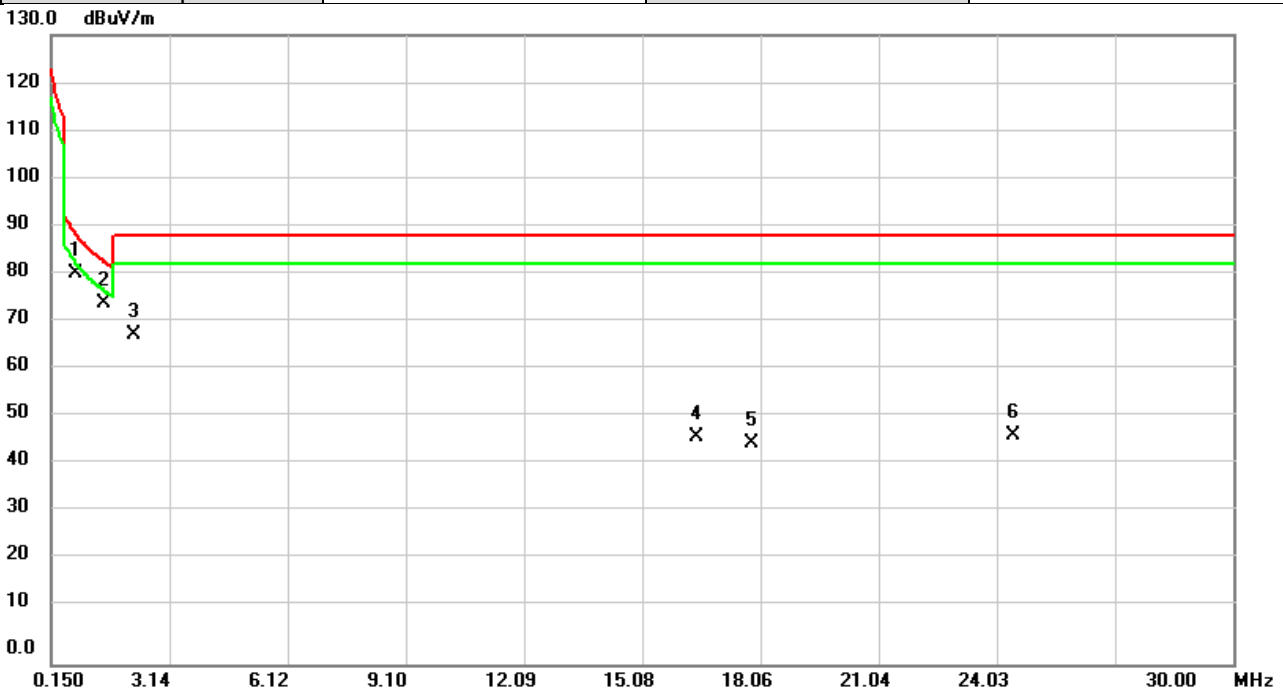


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.7470	77.68	3.10	80.78	89.21	-8.43	QP	
2		1.4932	75.07	-0.42	74.65	83.19	-8.54	QP	
3		2.2395	70.46	-2.22	68.24	88.62	-20.38	QP	
4		16.4481	50.59	-3.76	46.83	88.62	-41.79	QP	
5		17.8212	49.59	-3.89	45.70	88.62	-42.92	QP	
6		24.4480	49.36	-1.97	47.39	88.62	-41.23	QP	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/14
Test Frequency	6665MHz	Polarization	Horizontal
Temp	23°C	Hum.	66%

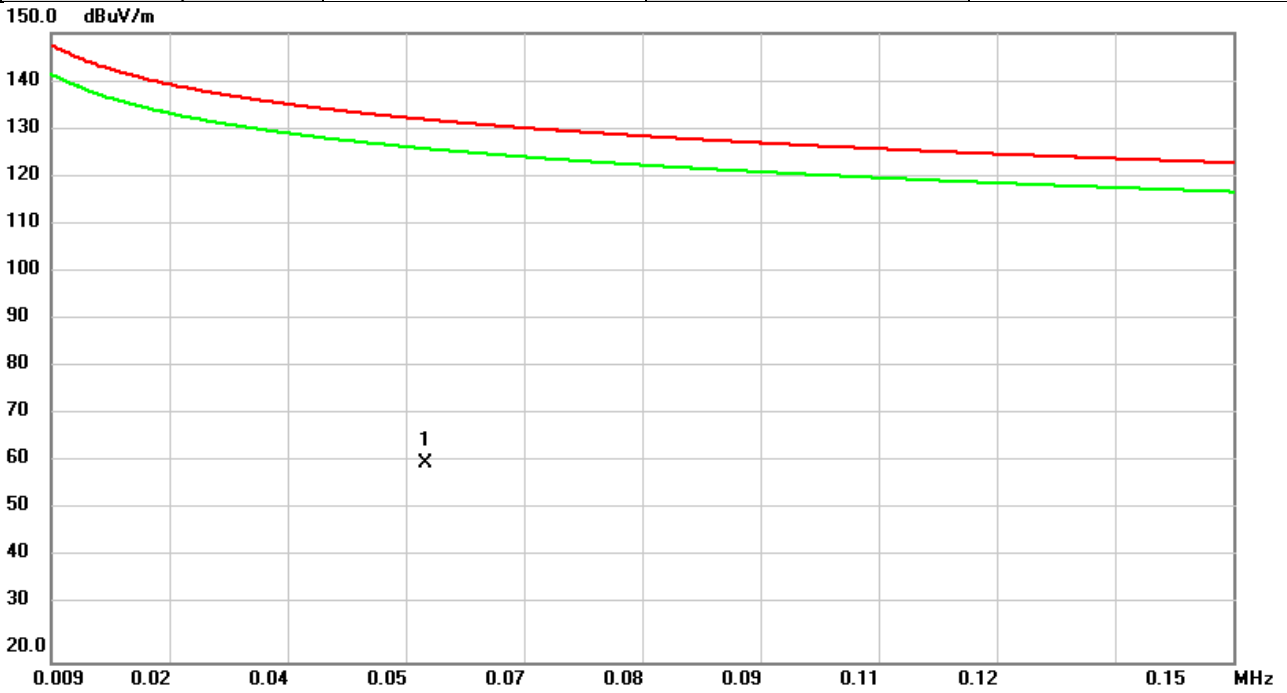


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0536	38.11	22.89	61.00	132.10	-71.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/14
Test Frequency	6665MHz	Polarization	Horizontal
Temp	23°C	Hum.	66%

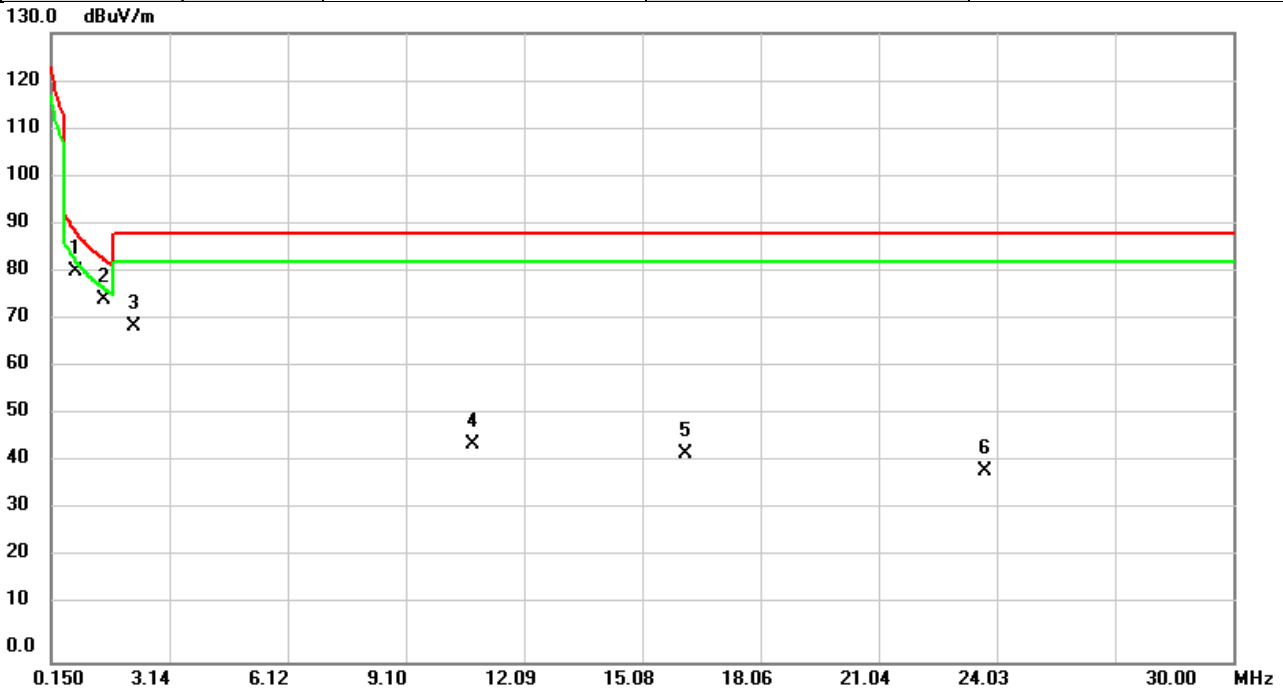


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.7470	77.81	3.10	80.91	89.21	-8.30	QP	
2	*	1.4932	75.48	-0.42	75.06	83.19	-8.13	QP	
3		2.2395	71.45	-2.22	69.23	88.62	-19.39	QP	
4		10.7766	48.14	-3.24	44.90	88.62	-43.72	QP	
5		16.1794	46.68	-3.75	42.93	88.62	-45.69	QP	
6		23.7314	41.78	-2.32	39.46	88.62	-49.16	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX E UNDESIRABLE EMISSIONS - 30 MHZ TO 1 GHZ**

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024-5-13
Test Frequency	6665MHz	Polarization	Vertical
Temp	23°C	Hum.	66%

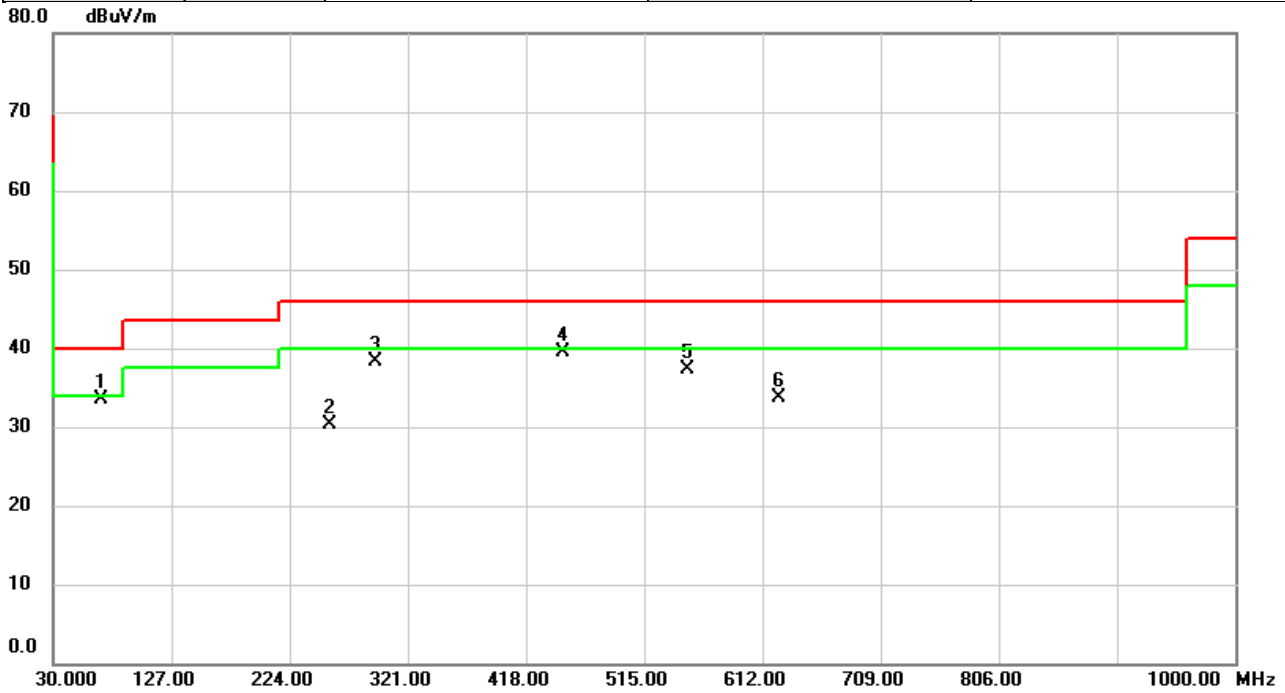


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	69.4790	48.75	-15.25	33.50	40.00	-6.50	peak	
2		257.4650	44.13	-13.85	30.28	46.00	-15.72	peak	
3		295.1010	50.70	-12.43	38.27	46.00	-7.73	peak	
4		448.6843	47.74	-8.24	39.50	46.00	-6.50	peak	
5		550.2757	43.95	-6.64	37.31	46.00	-8.69	peak	
6		624.9980	38.55	-4.78	33.77	46.00	-12.23	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024-5-13
Test Frequency	6665MHz	Polarization	Horizontal
Temp	23°C	Hum.	66%

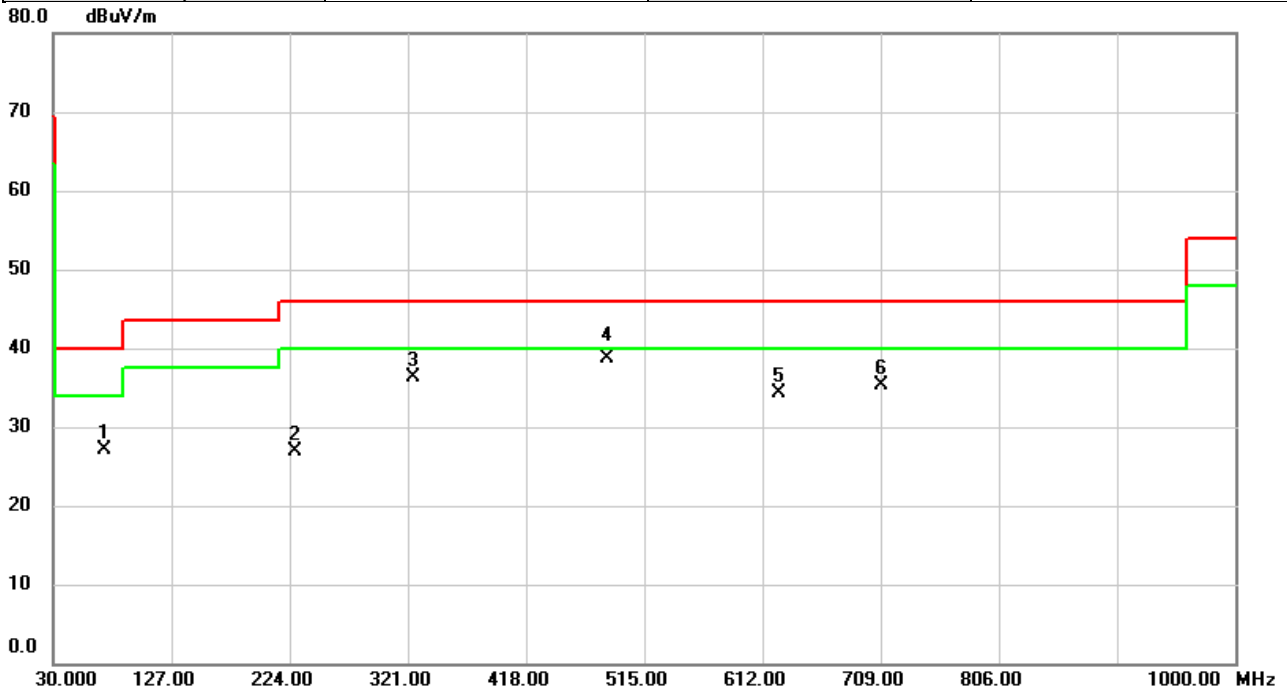


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		72.2596	42.82	-15.81	27.01	40.00	-12.99	peak	
2		228.3973	42.94	-16.06	26.88	46.00	-19.12	peak	
3		324.8800	48.12	-11.76	36.36	46.00	-9.64	peak	
4	*	484.0893	46.47	-7.70	38.77	46.00	-7.23	QP	
5		624.9980	39.14	-4.78	34.36	46.00	-11.64	peak	
6		710.0346	38.97	-3.63	35.34	46.00	-10.66	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX F UNDESIRABLE EMISSIONS - ABOVE 1 GHZ**

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/29
Test Frequency	5955MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

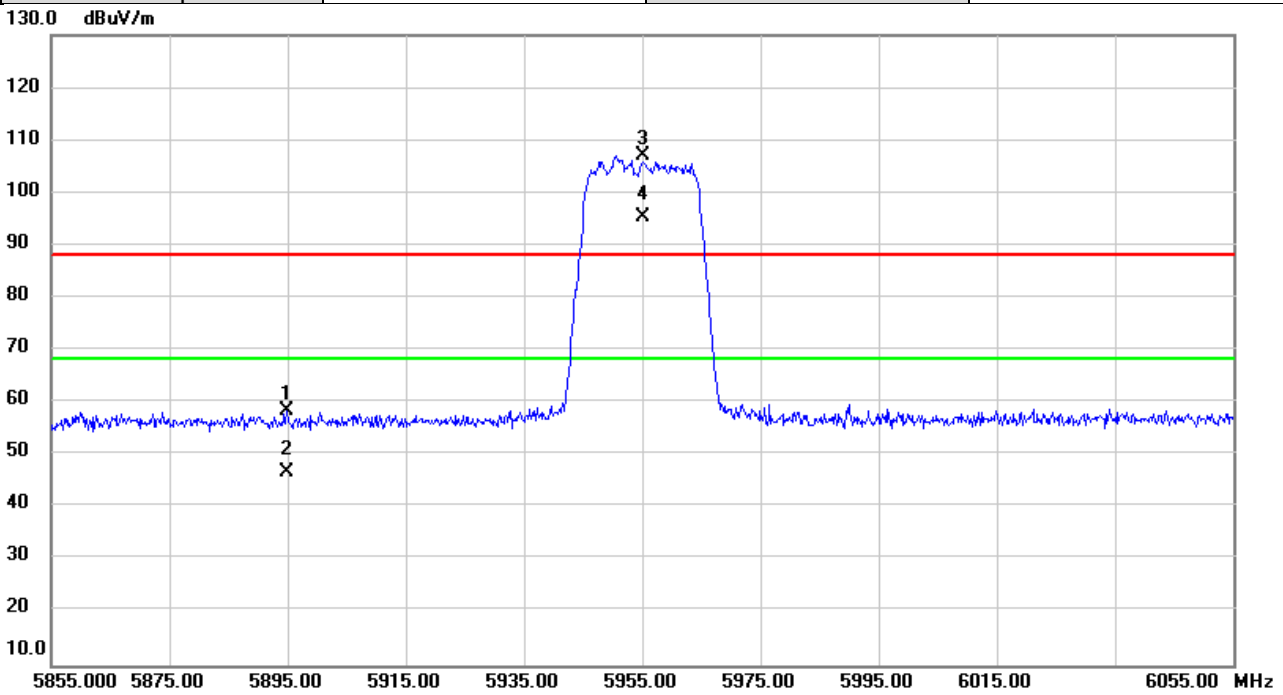


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5894.927	55.52	2.88	58.40	88.20	-29.80	peak	
2		5894.927	43.88	2.88	46.76	68.20	-21.44	AVG	
3	X	5955.000	104.06	3.07	107.13	88.20	18.93	peak	No Limit
4	*	5955.000	92.14	3.07	95.21	68.20	27.01	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024-5-30
Test Frequency	6415MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

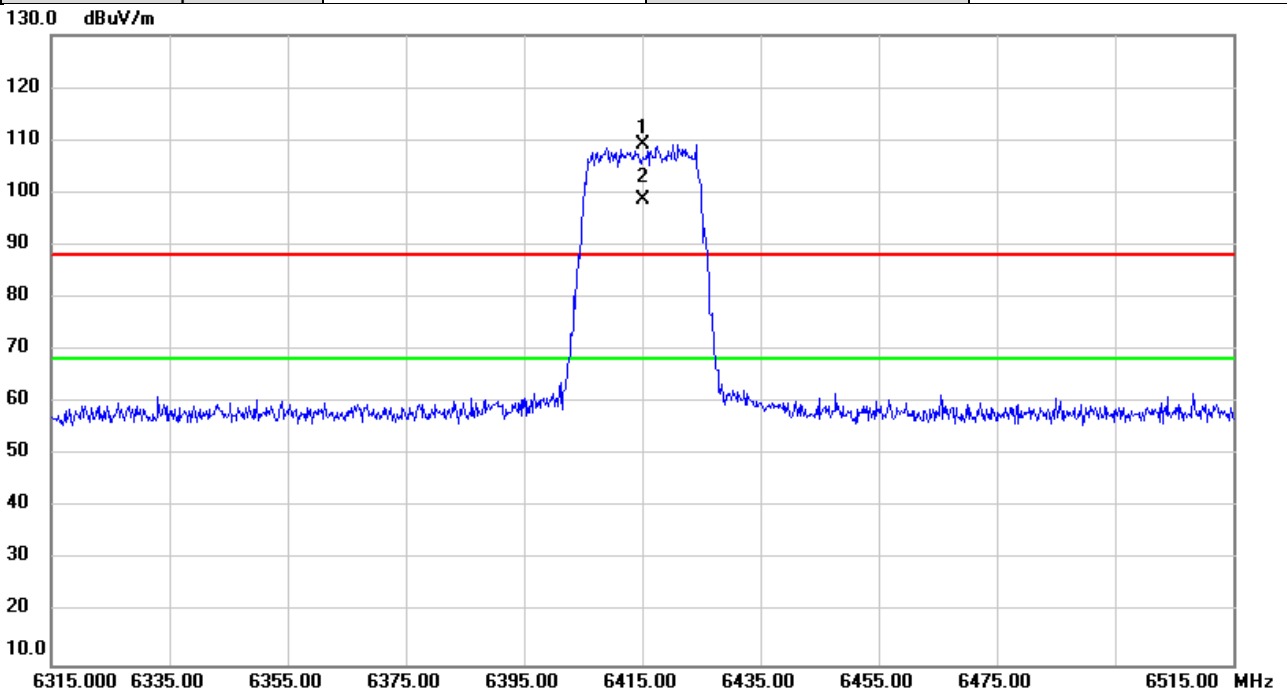


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6415.000	103.58	5.56	109.14	88.20	20.94	peak	No Limit
2	*	6415.000	93.23	5.56	98.79	68.20	30.59	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2024-5-30
Test Frequency	6435MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

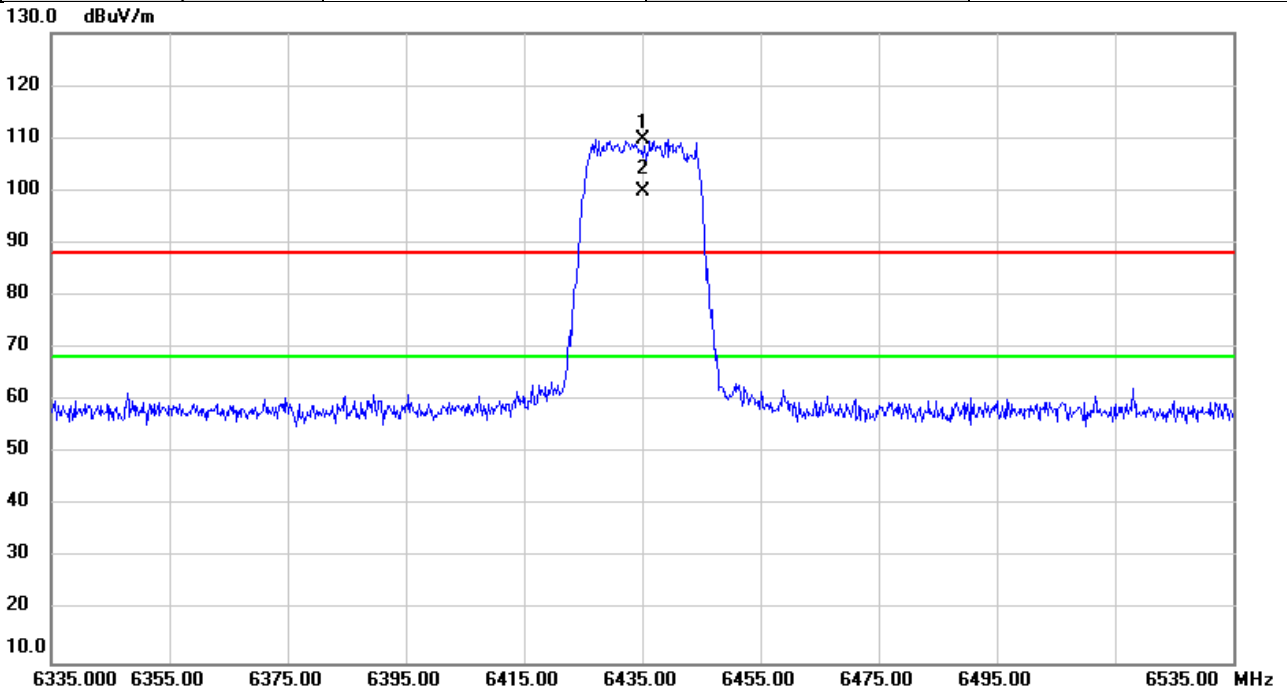


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6435.000	104.07	5.68	109.75	88.20	21.55	peak	No Limit
2	*	6435.000	94.13	5.68	99.81	68.20	31.61	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024-5-30
Test Frequency	6515MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

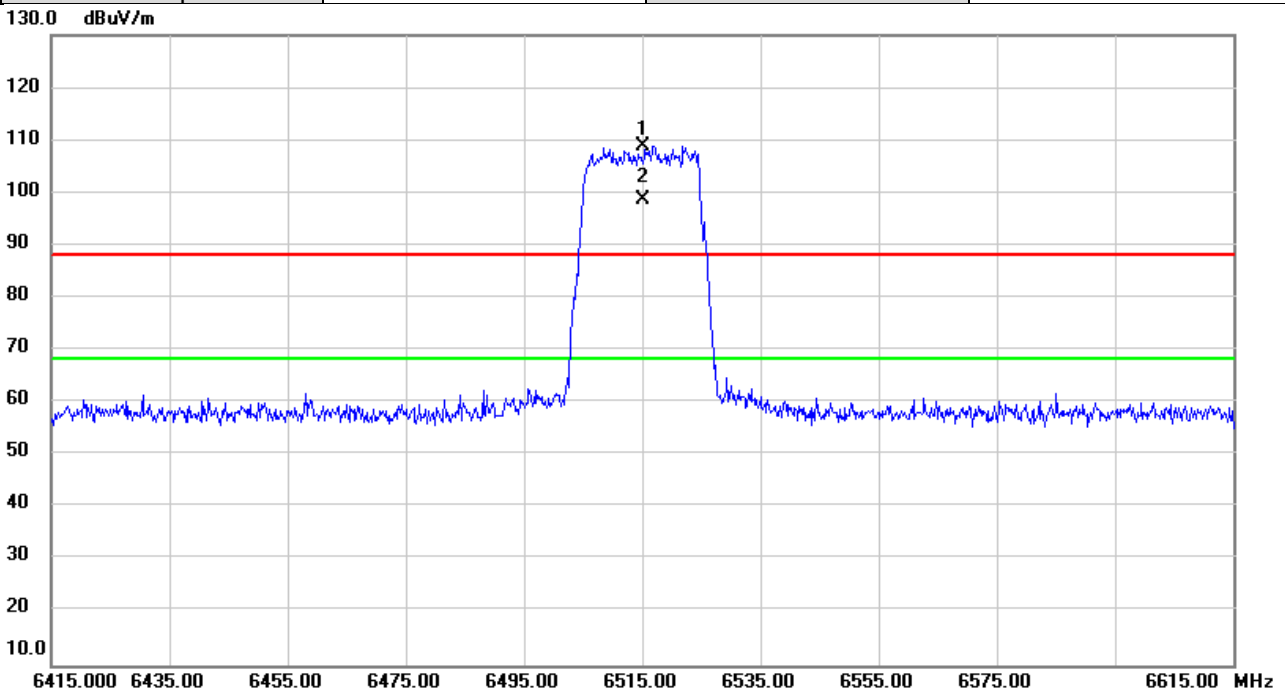


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6515.000	102.77	6.07	108.84	88.20	20.64	peak	No Limit
2	*	6515.000	92.57	6.07	98.64	68.20	30.44	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024-5-30
Test Frequency	6535MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

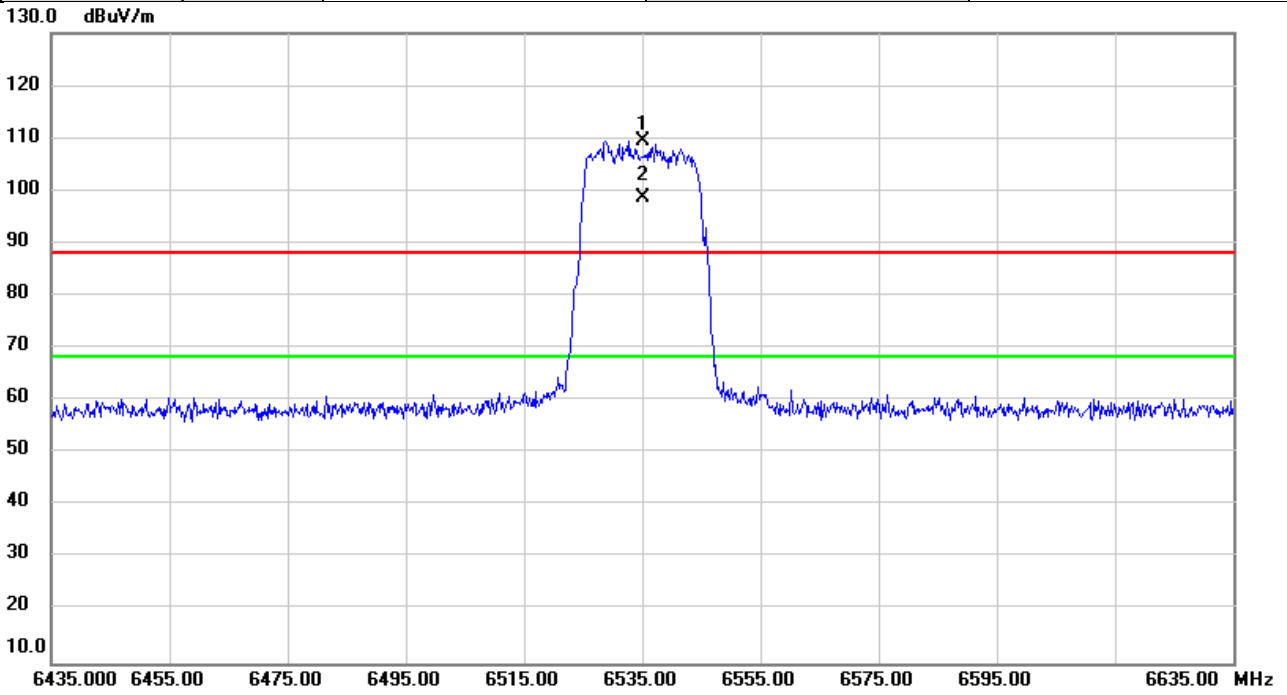


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6535.000	103.44	6.11	109.55	88.20	21.35	peak	No Limit
2	*	6535.000	92.45	6.11	98.56	68.20	30.36	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024-5-30
Test Frequency	6855MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

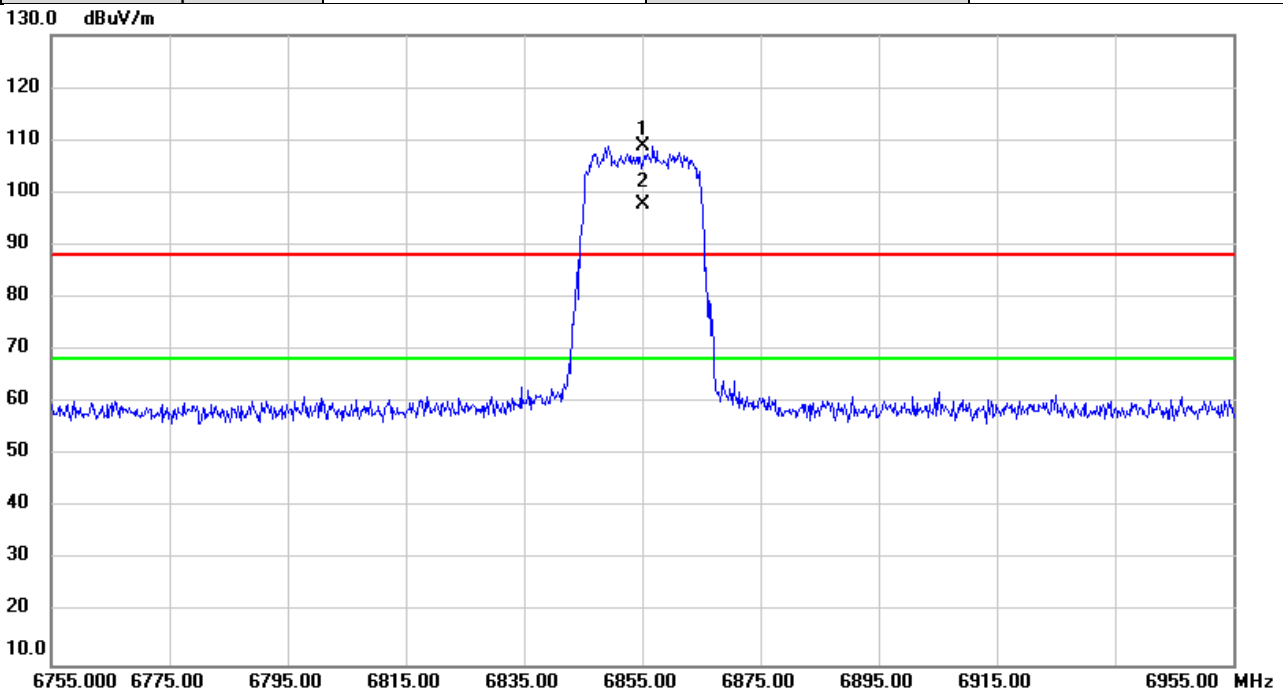


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6855.000	102.25	6.59	108.84	88.20	20.64	peak	No Limit
2	*	6855.000	91.10	6.59	97.69	68.20	29.49	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024-5-30
Test Frequency	6875MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

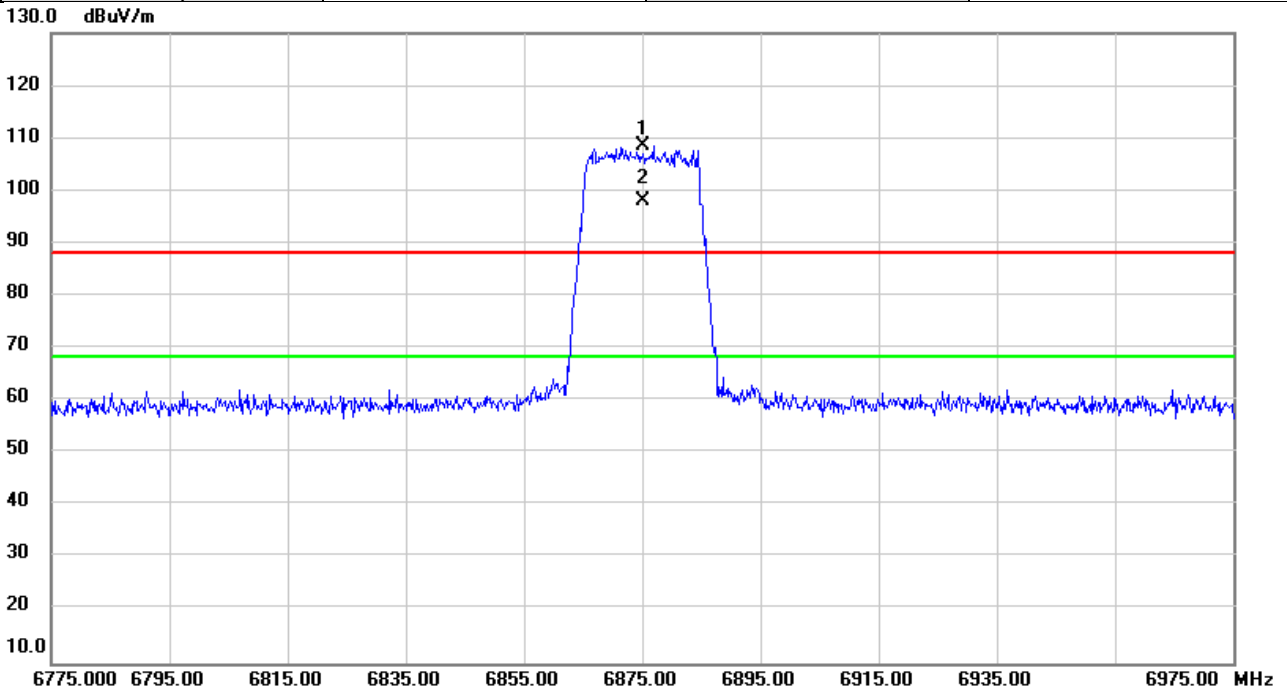


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6875.000	101.86	6.61	108.47	88.20	20.27	peak	No Limit
2	*	6875.000	91.52	6.61	98.13	68.20	29.93	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/29
Test Frequency	7095MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

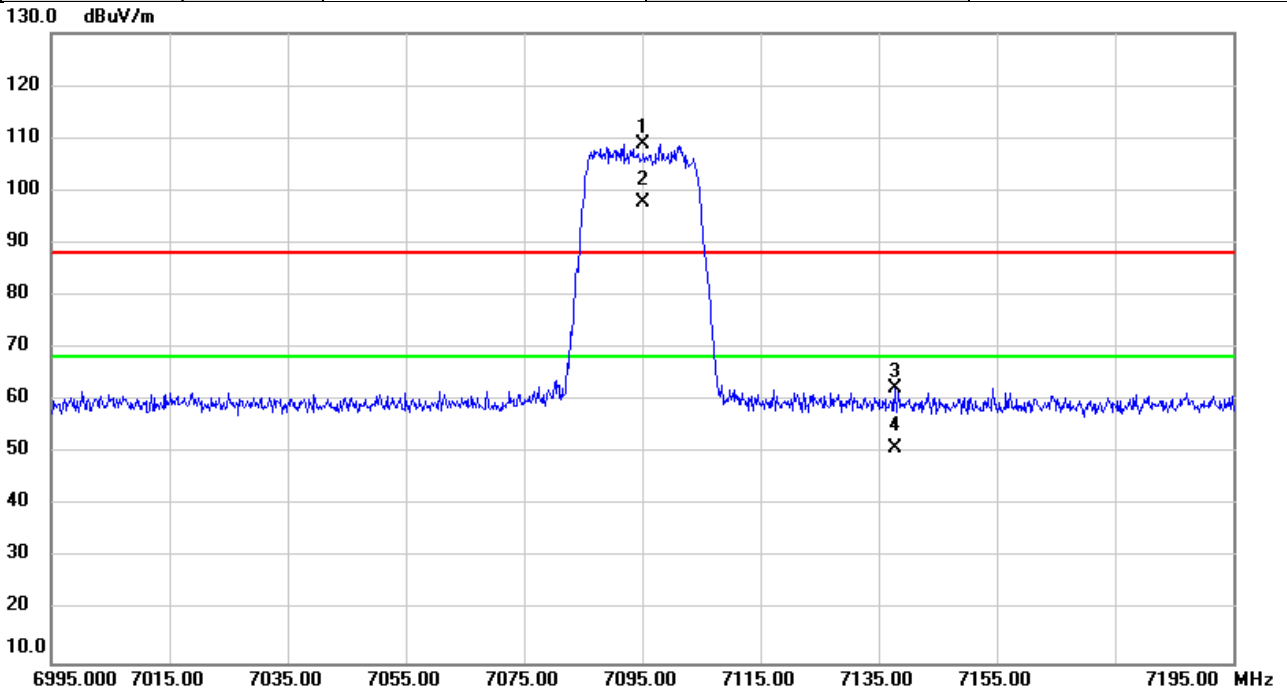


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	7095.000	102.04	6.79	108.83	88.20	20.63	peak	No Limit
2	*	7095.000	91.01	6.79	97.80	68.20	29.60	AVG	No Limit
3		7137.773	55.56	6.80	62.36	88.20	-25.84	peak	
4		7137.773	44.09	6.80	50.89	68.20	-17.31	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/29
Test Frequency	5965MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

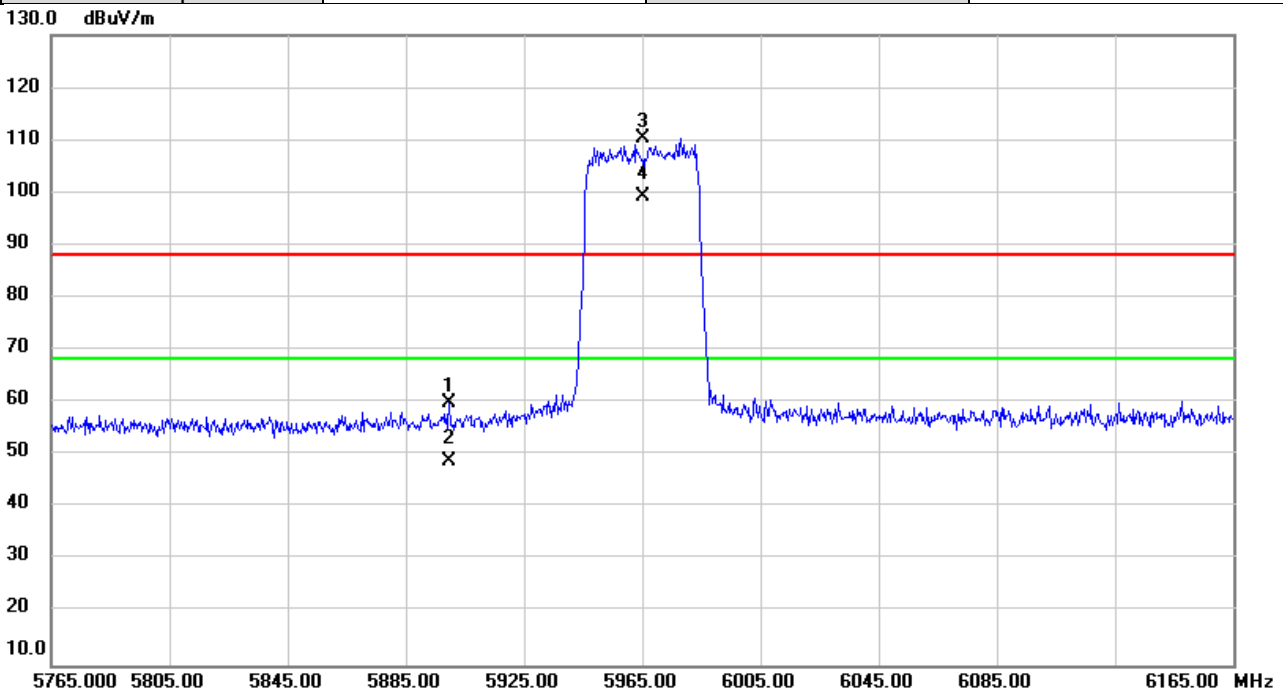


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5899.693	56.96	2.90	59.86	88.20	-28.34	peak	
2		5899.693	45.99	2.90	48.89	68.20	-19.31	AVG	
3	X	5965.000	107.34	3.10	110.44	88.20	22.24	peak	No Limit
4	*	5965.000	96.06	3.10	99.16	68.20	30.96	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024-5-30
Test Frequency	6405MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

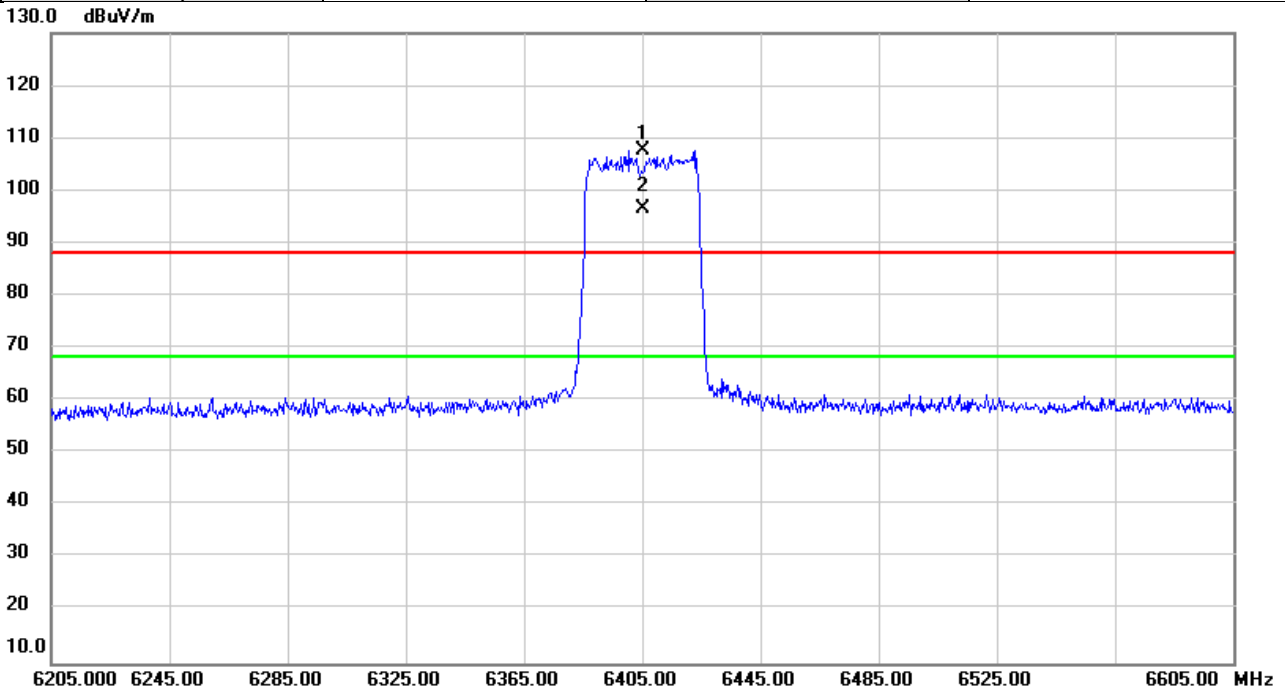


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6405.000	102.25	5.51	107.76	88.20	19.56	peak	No Limit
2	*	6405.000	90.97	5.51	96.48	68.20	28.28	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2024-5-30
Test Frequency	6445MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

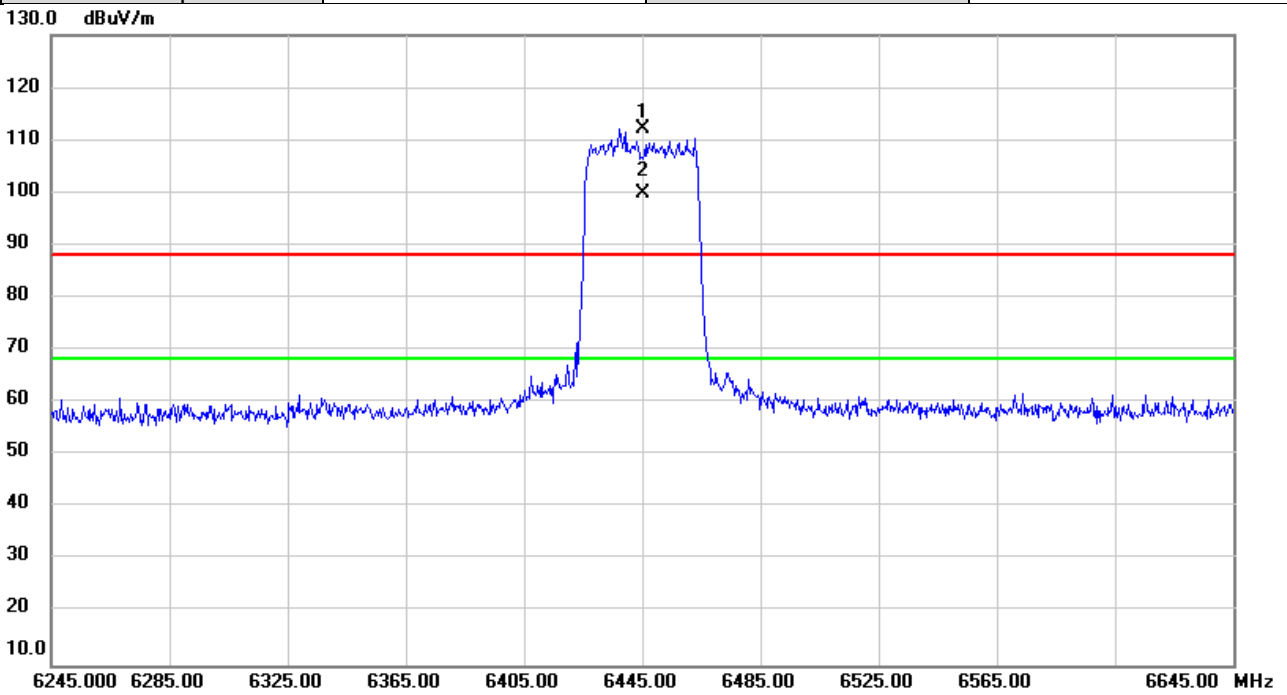


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6445.000	106.29	5.74	112.03	88.20	23.83	peak	No Limit
2	*	6445.000	94.24	5.74	99.98	68.20	31.78	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024-5-30
Test Frequency	6485MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

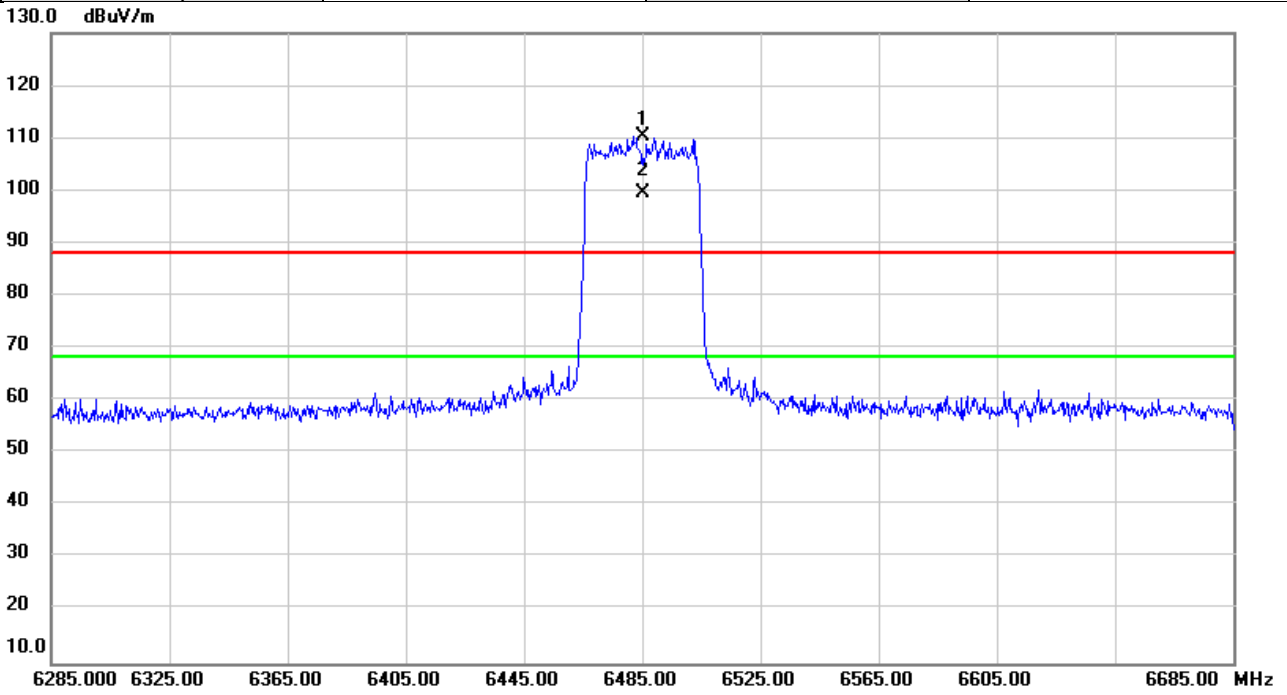


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6485.000	104.41	5.96	110.37	88.20	22.17	peak	No Limit
2	*	6485.000	93.65	5.96	99.61	68.20	31.41	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024-5-30
Test Frequency	6525MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

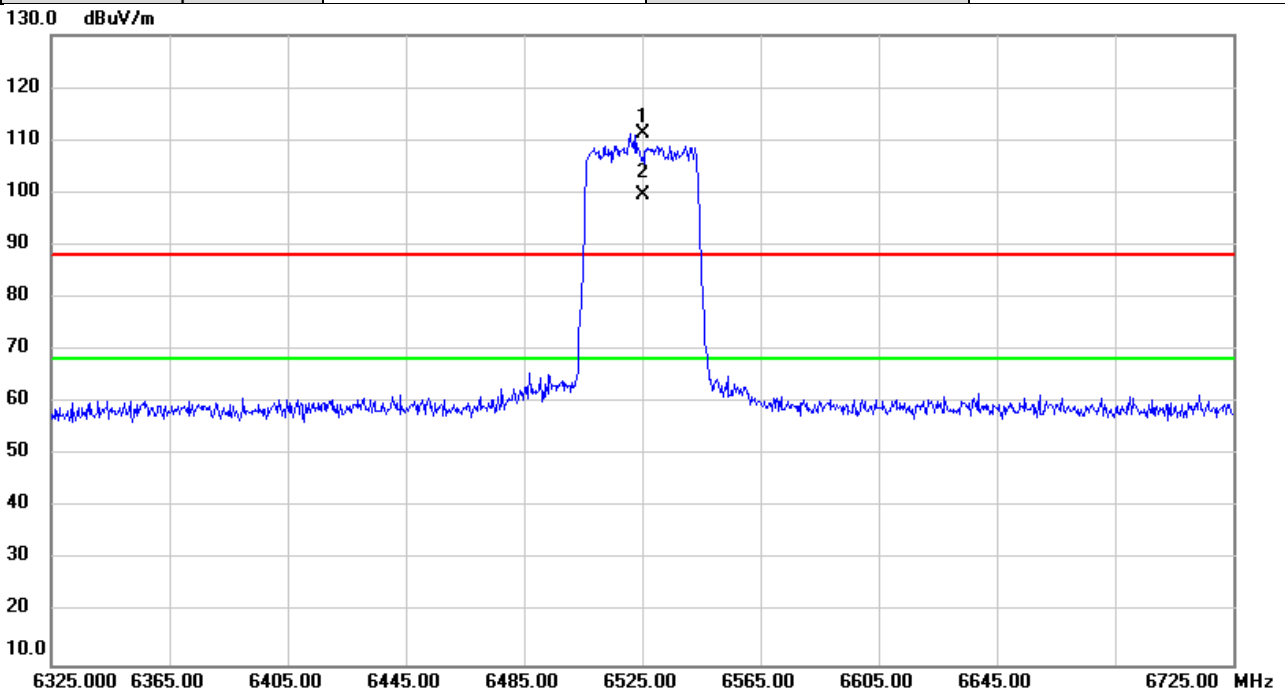


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6525.000	105.17	6.10	111.27	88.20	23.07	peak	No Limit
2	*	6525.000	93.45	6.10	99.55	68.20	31.35	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024-5-30
Test Frequency	6845MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

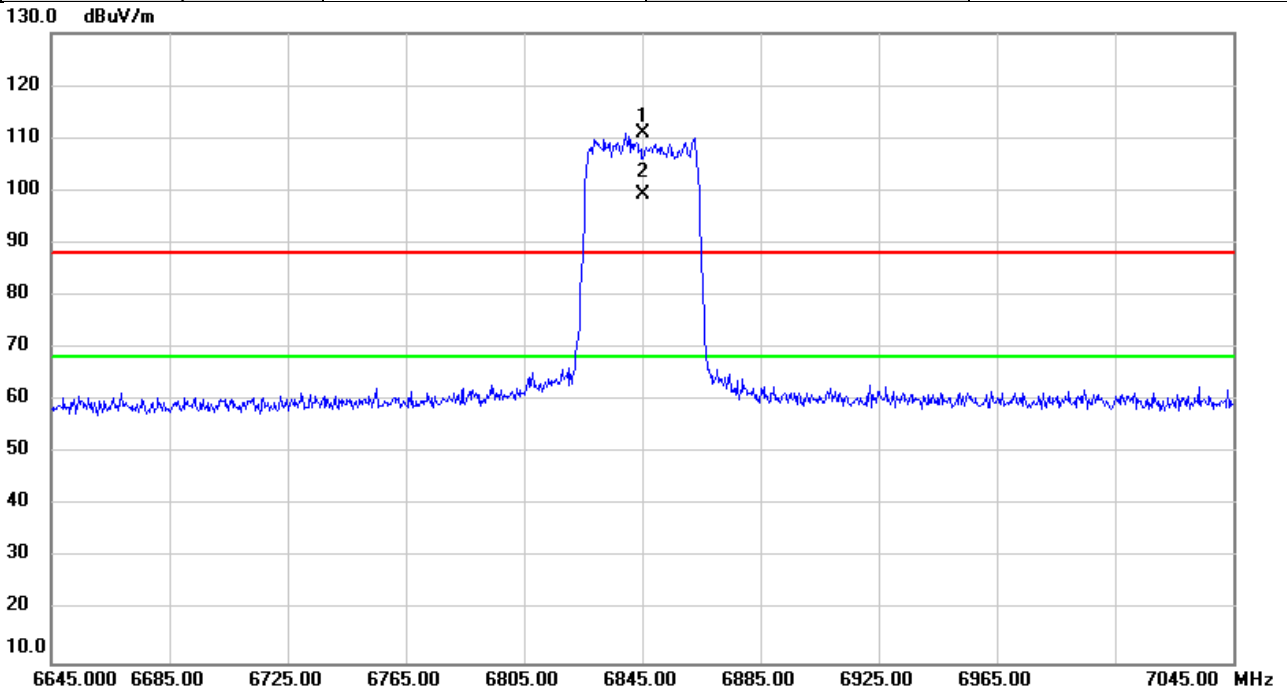


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6845.000	104.49	6.57	111.06	88.20	22.86	peak	No Limit
2	*	6845.000	92.80	6.57	99.37	68.20	31.17	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024-5-30
Test Frequency	6885MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

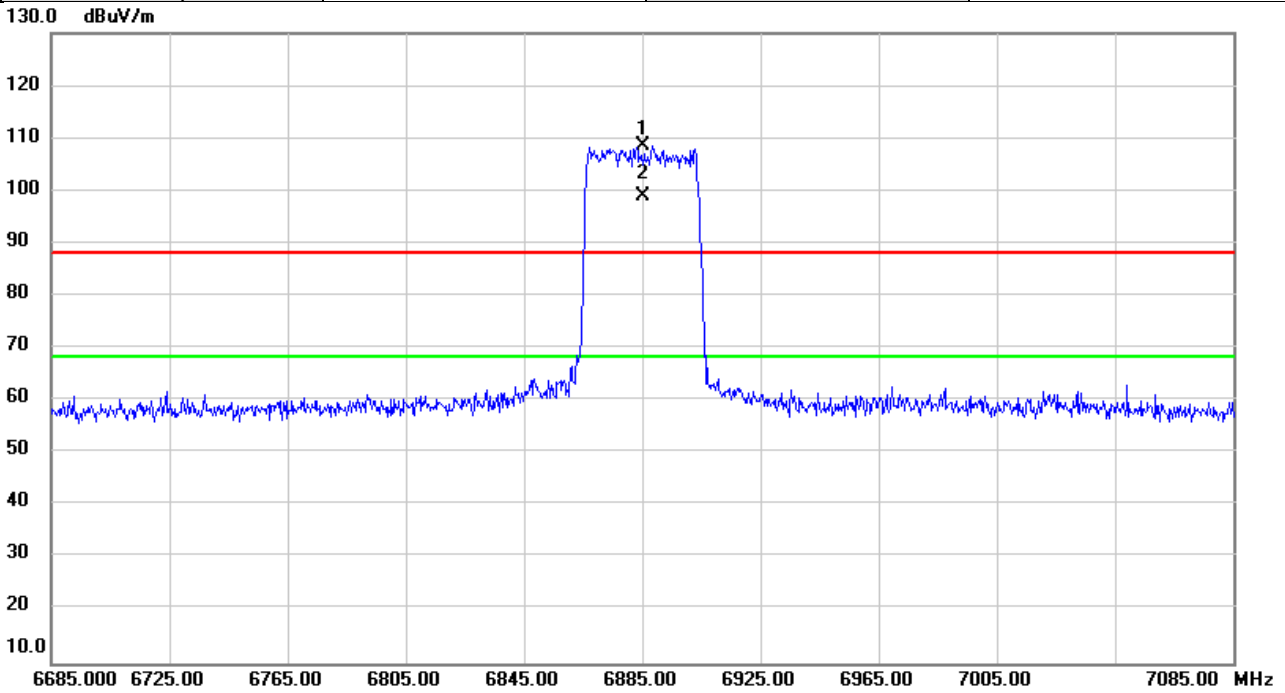


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6885.000	102.07	6.62	108.69	88.20	20.49	peak	No Limit
2	*	6885.000	92.33	6.62	98.95	68.20	30.75	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/29
Test Frequency	7085MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

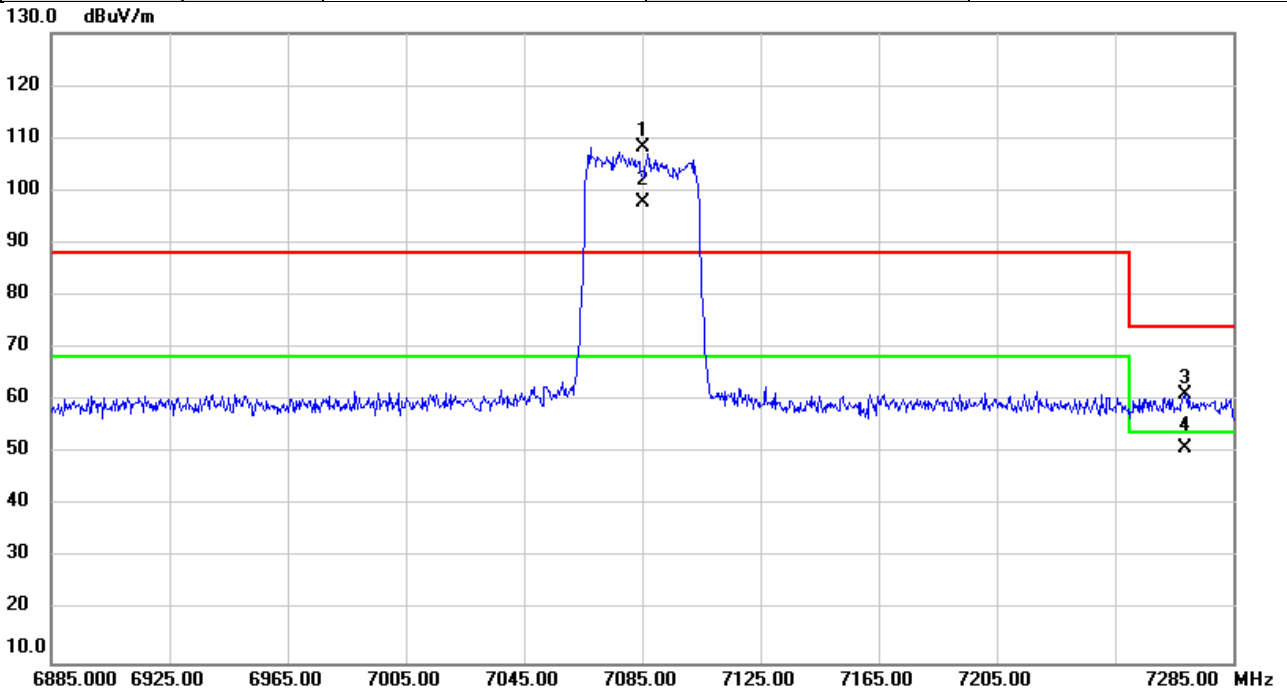


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	7085.000	101.39	6.79	108.18	88.20	19.98	peak	No Limit
2	*	7085.000	91.06	6.79	97.85	68.20	29.65	AVG	No Limit
3		7268.480	54.30	6.79	61.09	74.00	-12.91	peak	
4		7268.480	44.28	6.79	51.07	54.00	-2.93	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/29
Test Frequency	5985MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

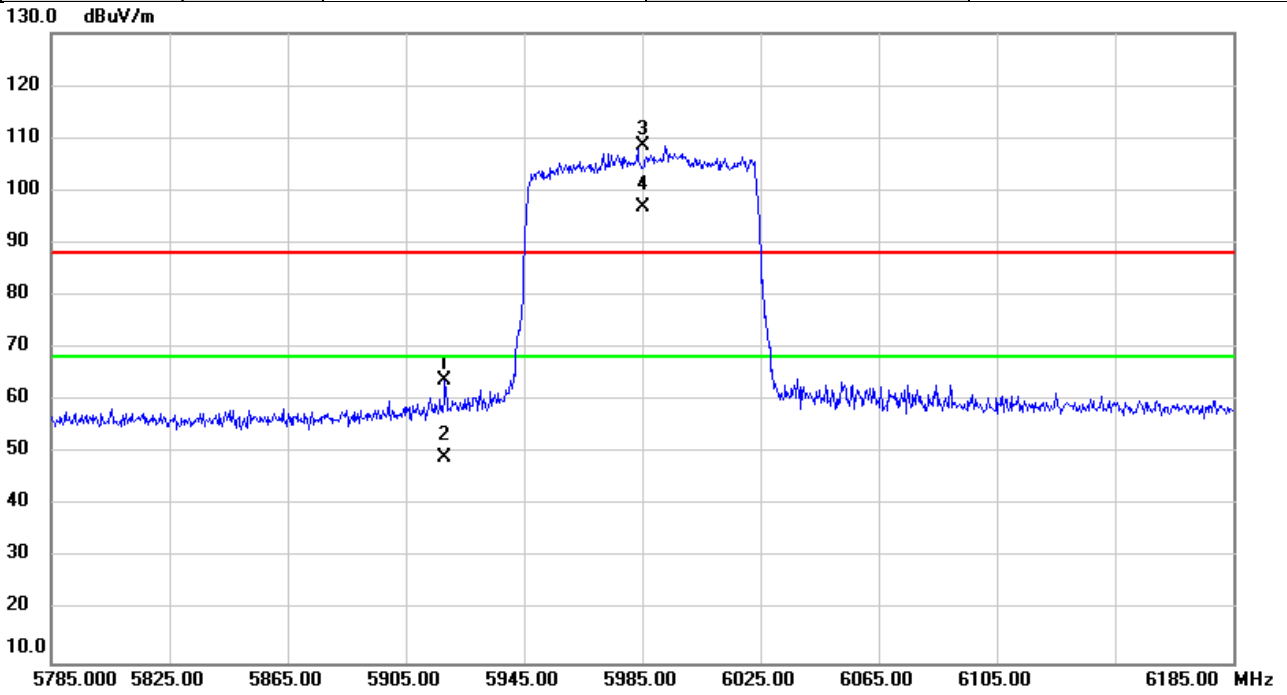


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5918.240	60.86	2.95	63.81	88.20	-24.39	peak	
2		5918.240	46.19	2.95	49.14	68.20	-19.06	AVG	
3	X	5985.000	105.26	3.17	108.43	88.20	20.23	peak	No Limit
4	*	5985.000	93.61	3.17	96.78	68.20	28.58	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024-5-30
Test Frequency	6385MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

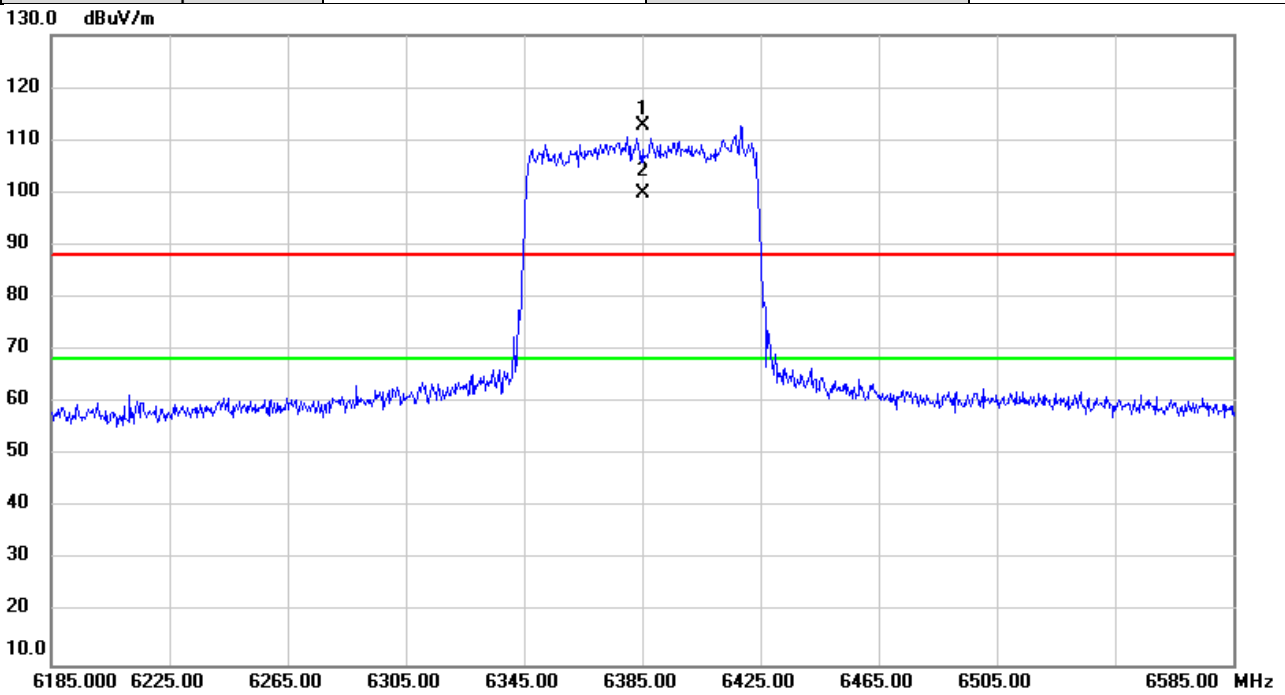


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6385.000	107.26	5.40	112.66	88.20	24.46	peak	No Limit
2	*	6385.000	94.51	5.40	99.91	68.20	31.71	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2024-5-30
Test Frequency	6465MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

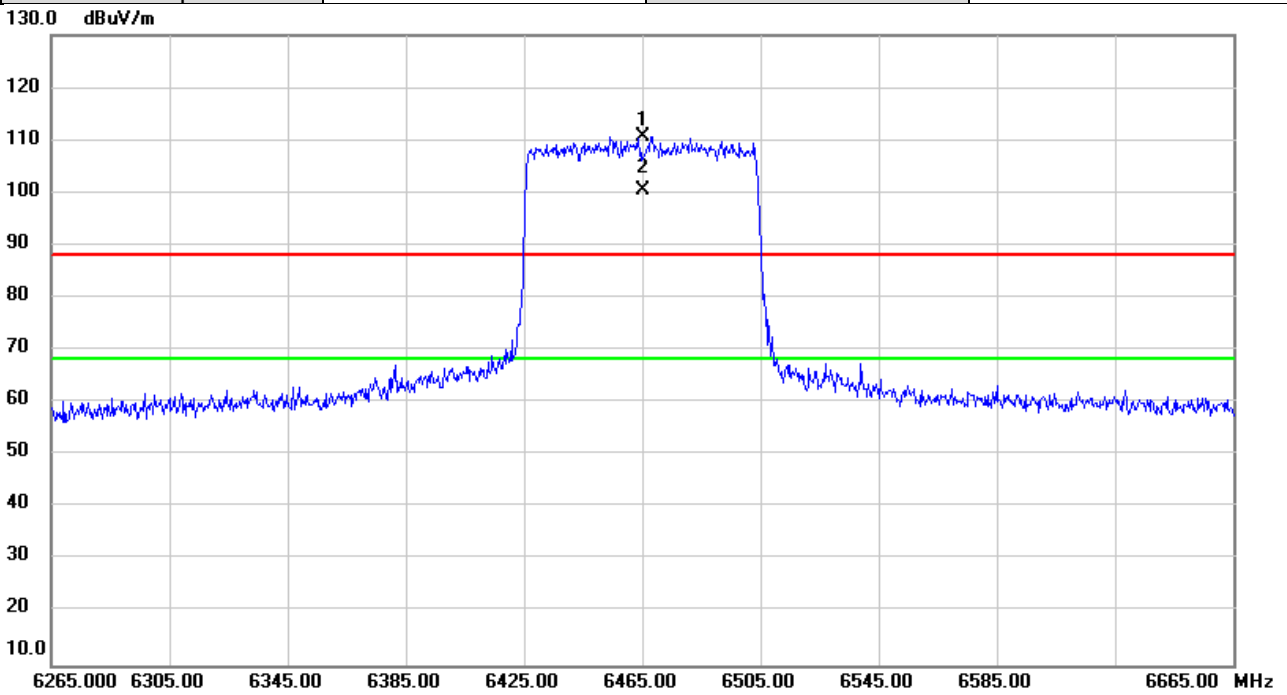


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6465.000	104.90	5.86	110.76	88.20	22.56	peak	No Limit
2	*	6465.000	94.59	5.86	100.45	68.20	32.25	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024-5-30
Test Frequency	6545MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

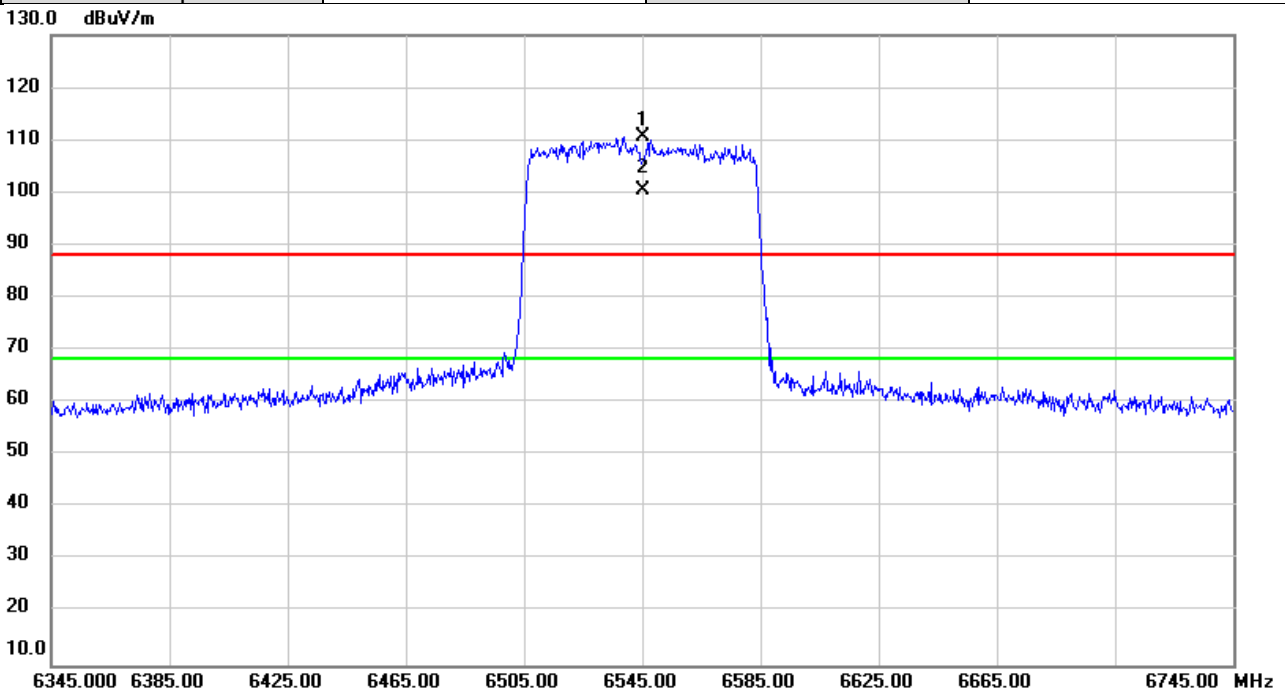


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6545.000	104.60	6.11	110.71	88.20	22.51	peak	No Limit
2	*	6545.000	94.32	6.11	100.43	68.20	32.23	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024-5-30
Test Frequency	6625MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

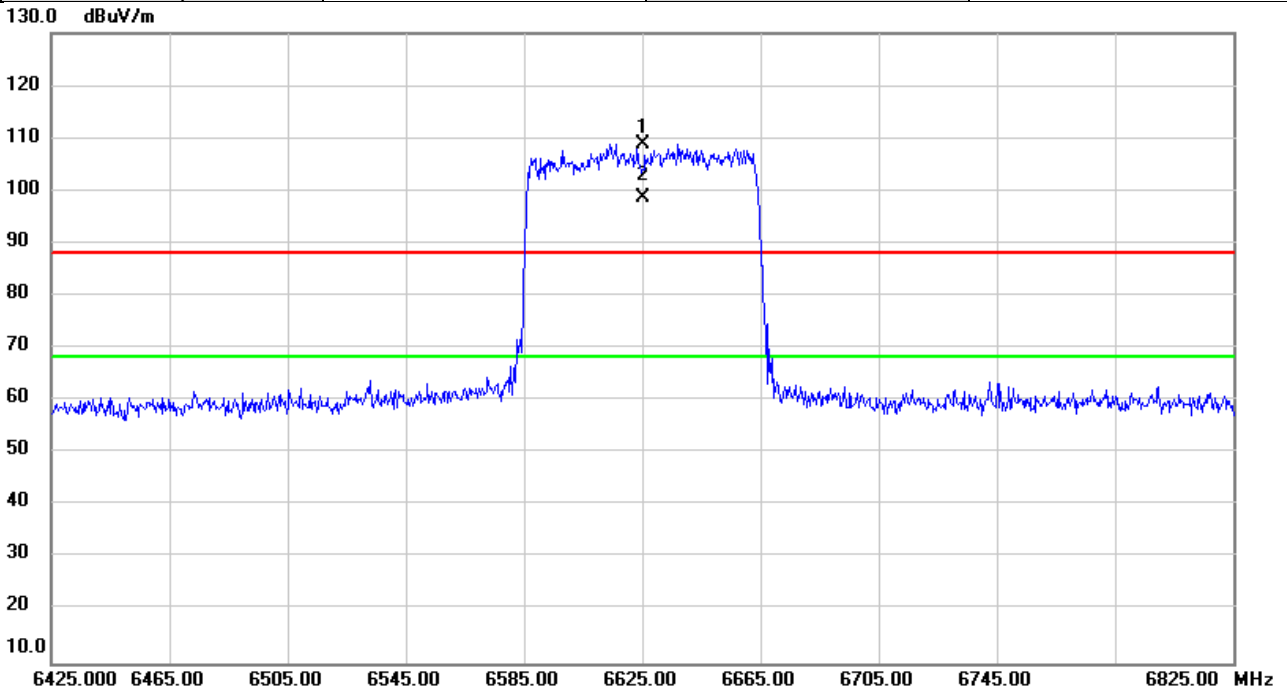


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6625.000	102.53	6.25	108.78	88.20	20.58	peak	No Limit
2	*	6625.000	92.39	6.25	98.64	68.20	30.44	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024-5-30
Test Frequency	6785MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

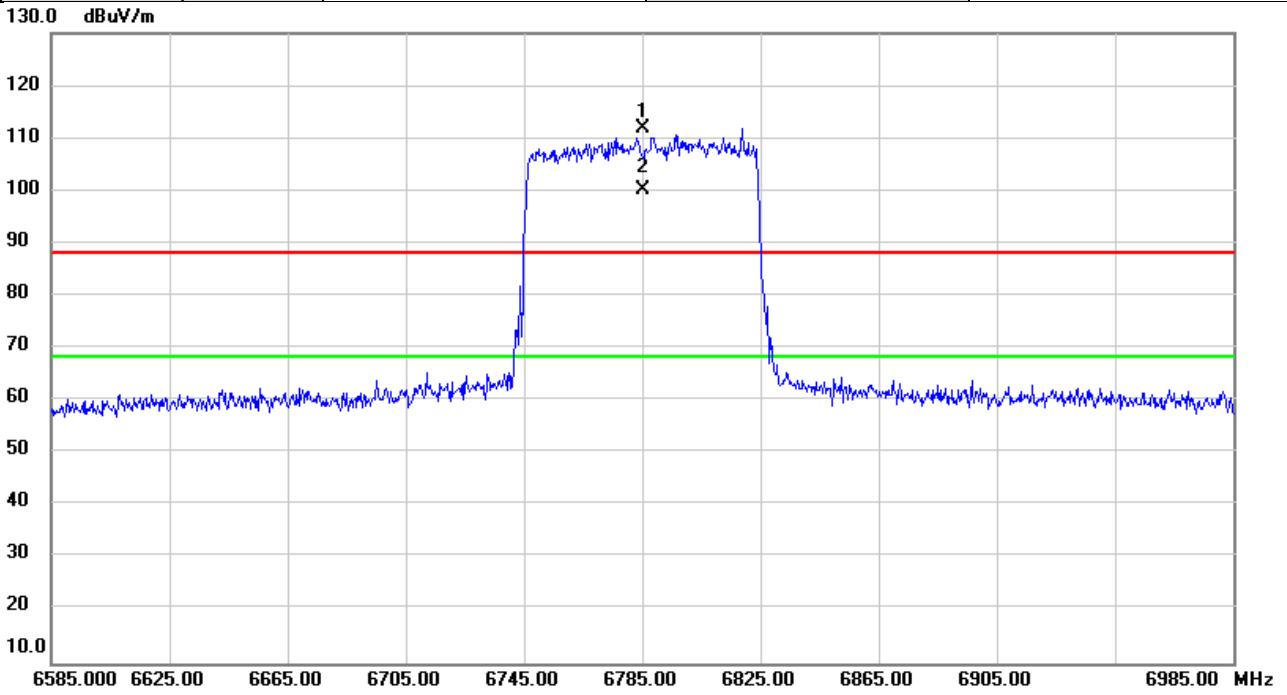


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6785.000	105.31	6.48	111.79	88.20	23.59	peak	No Limit
2	*	6785.000	93.60	6.48	100.08	68.20	31.88	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024-5-30
Test Frequency	6865MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

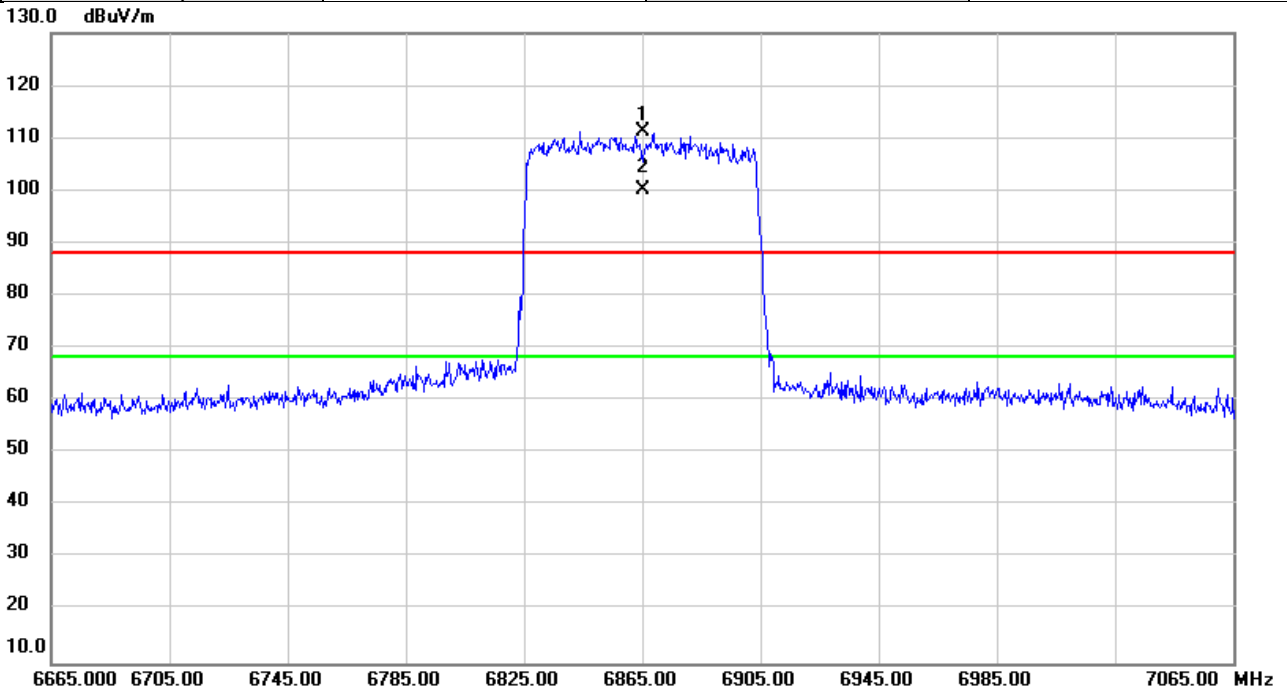


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6865.000	104.52	6.60	111.12	88.20	22.92	peak	No Limit
2	*	6865.000	93.65	6.60	100.25	68.20	32.05	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/29
Test Frequency	7025MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

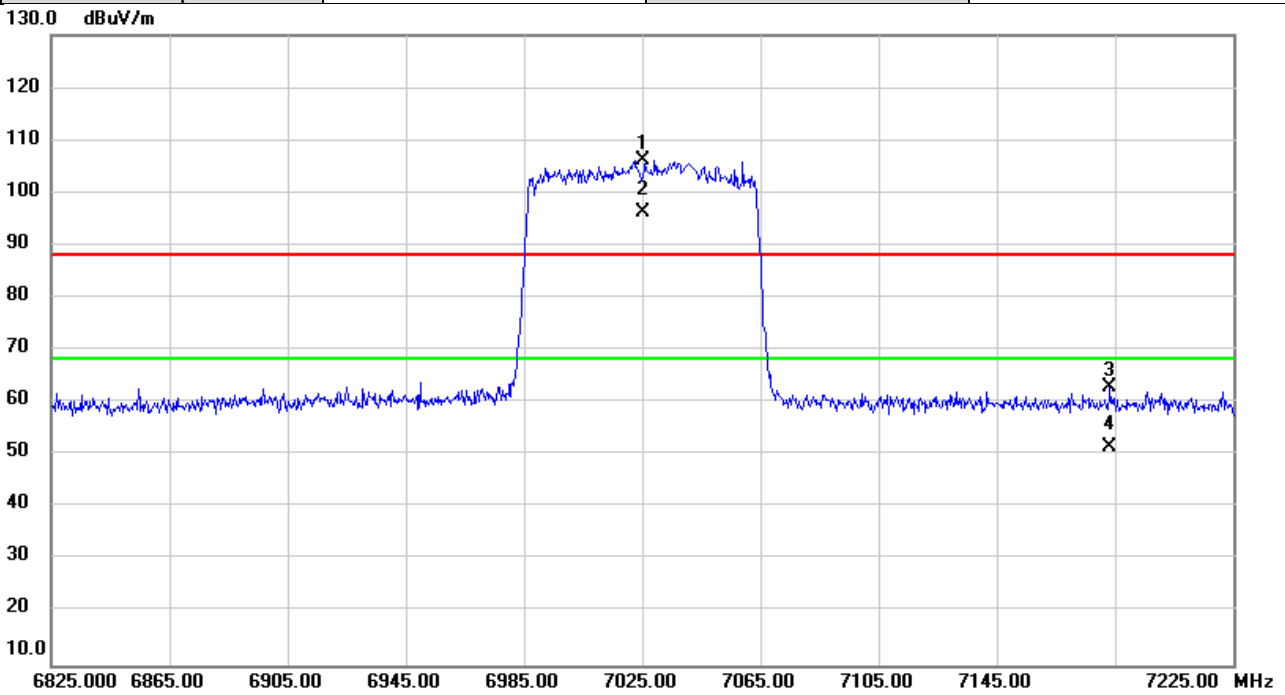


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	7025.000	99.37	6.80	106.17	88.20	17.97	peak	No Limit
2	*	7025.000	89.58	6.80	96.38	68.20	28.18	AVG	No Limit
3		7183.120	56.26	6.78	63.04	88.20	-25.16	peak	
4		7183.120	44.67	6.78	51.45	68.20	-16.75	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/29
Test Frequency	6025MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

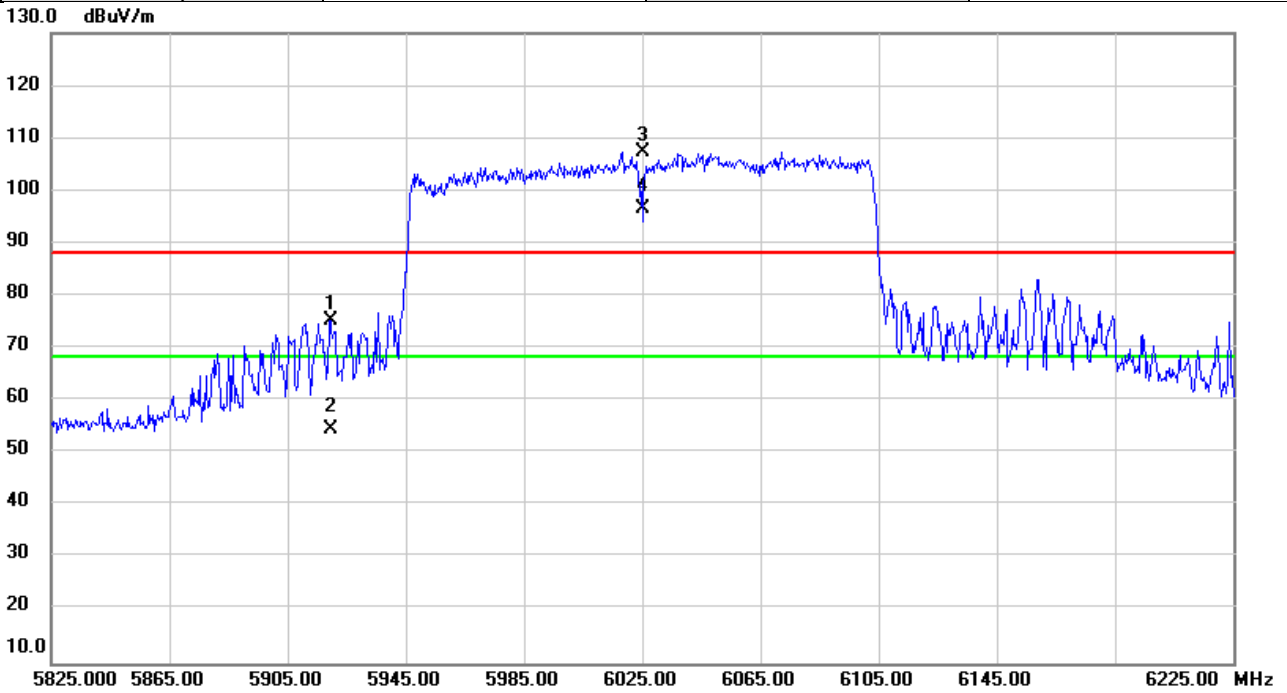


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5919.733	72.29	2.96	75.25	88.20	-12.95	peak	
2		5919.733	51.51	2.96	54.47	68.20	-13.73	AVG	
3	X	6025.000	104.05	3.36	107.41	88.20	19.21	peak	No Limit
4	*	6025.000	93.05	3.36	96.41	68.20	28.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/30
Test Frequency	6345MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

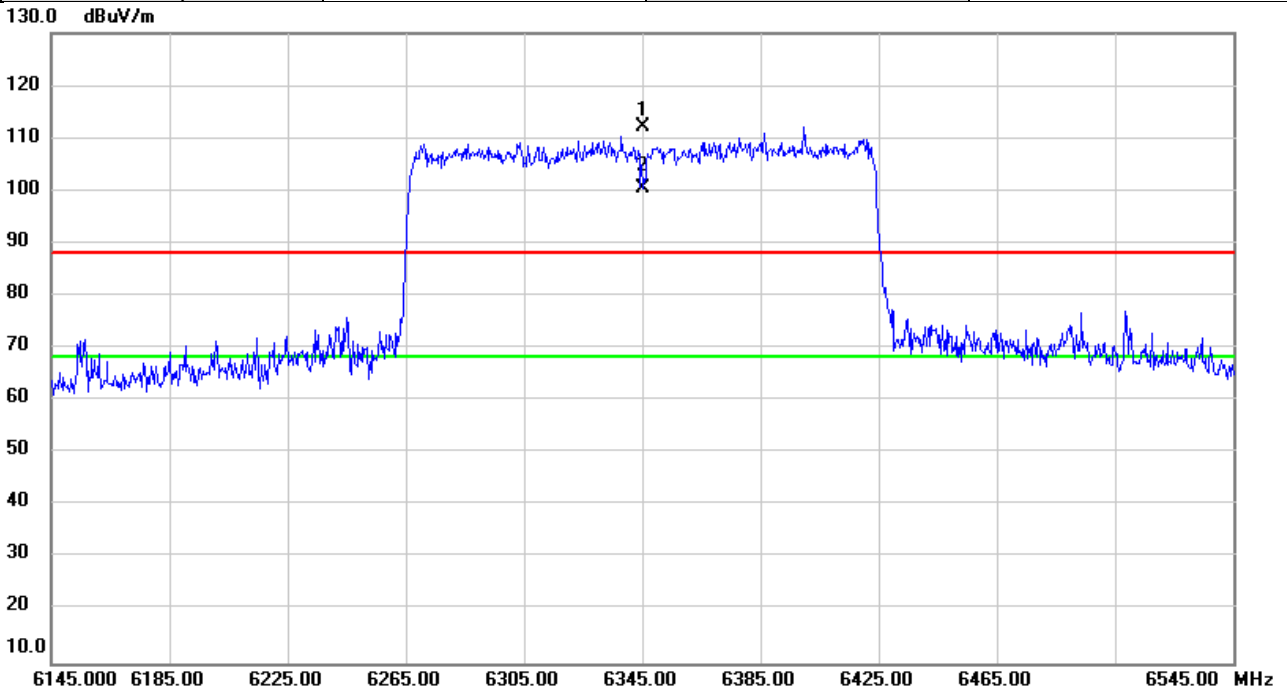


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6345.000	106.92	5.17	112.09	88.20	23.89	peak	No Limit
2	*	6345.000	95.33	5.17	100.50	68.20	32.30	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/30
Test Frequency	6505MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

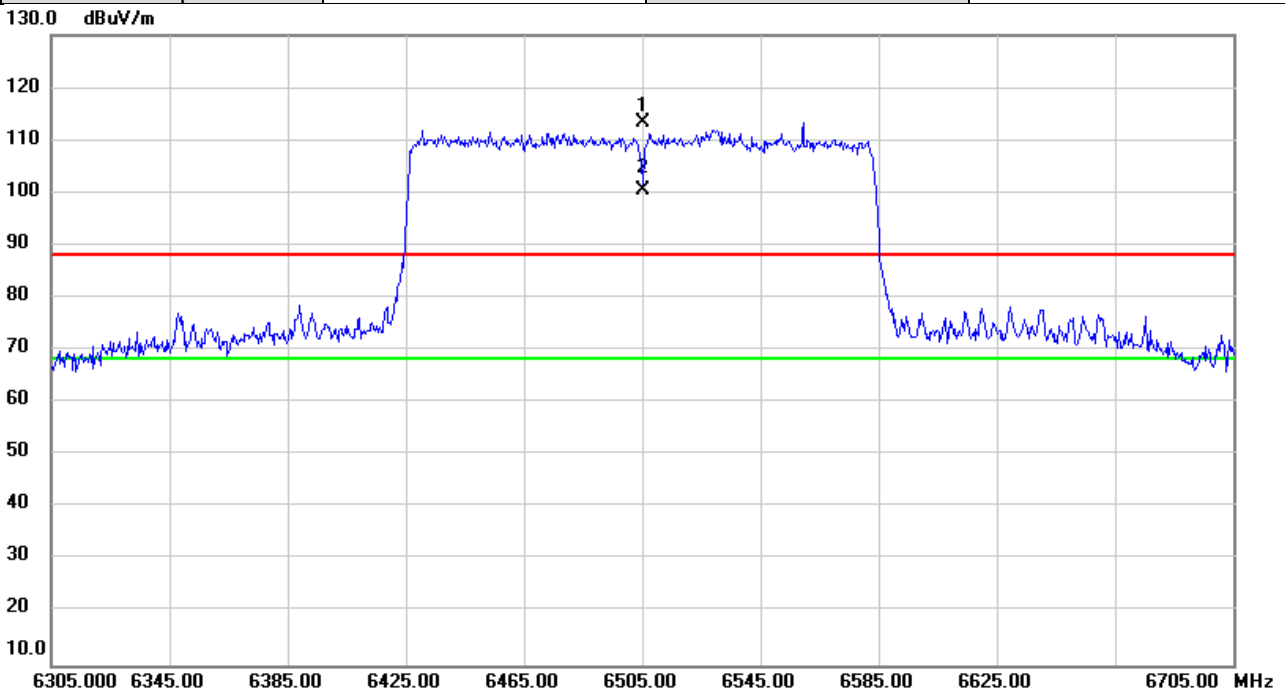


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6505.000	107.21	6.06	113.27	88.20	25.07	peak	No Limit
2	*	6505.000	94.44	6.06	100.50	68.20	32.30	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/30
Test Frequency	6665MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

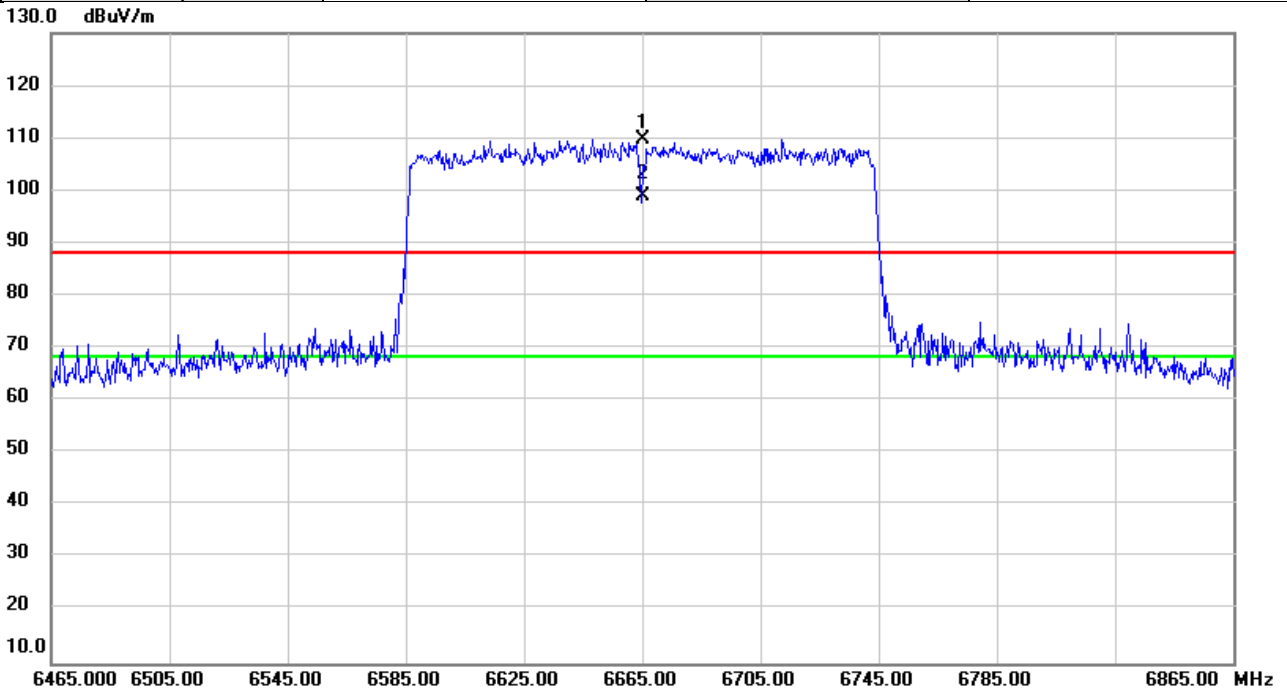


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6665.000	103.39	6.30	109.69	88.20	21.49	peak	No Limit
2	*	6665.000	92.80	6.30	99.10	68.20	30.90	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/30
Test Frequency	6825MHz	Polarization	Vertical
Temp	22°C	Hum.	66%

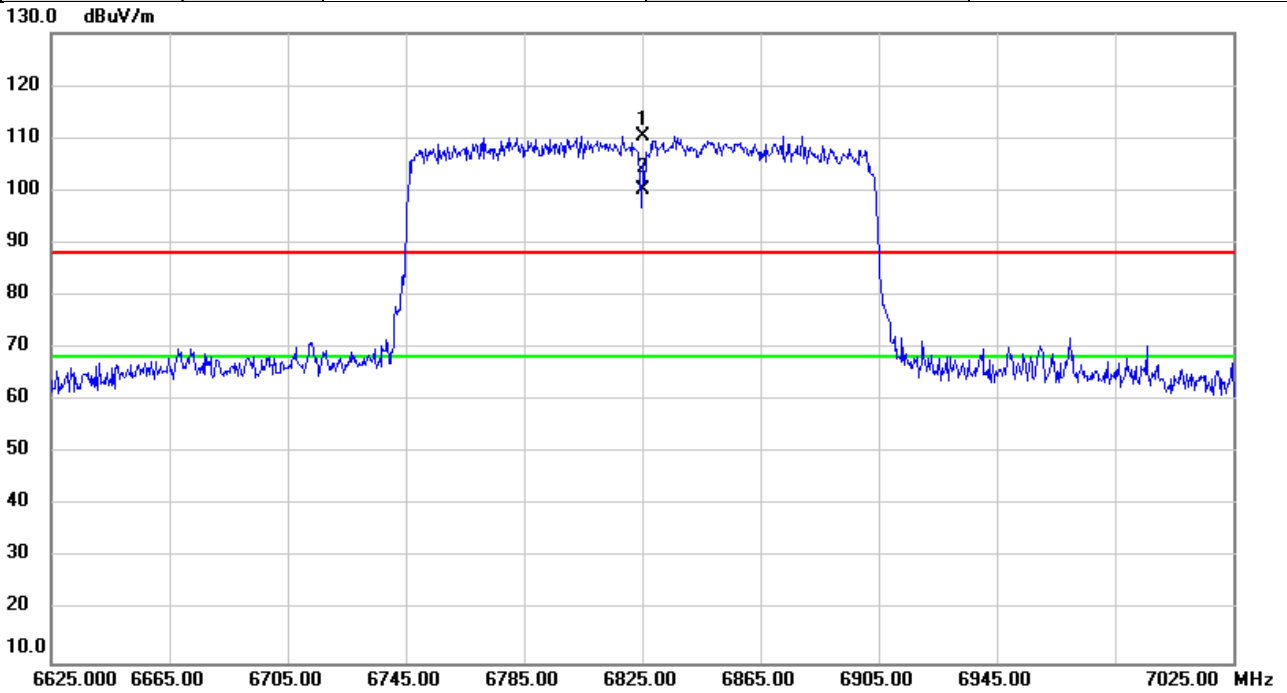


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6825.000	103.90	6.54	110.44	88.20	22.24	peak	No Limit
2	*	6825.000	93.56	6.54	100.10	68.20	31.90	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/29
Test Frequency	6985MHz	Polarization	Vertical
Temp	20°C	Hum.	68%

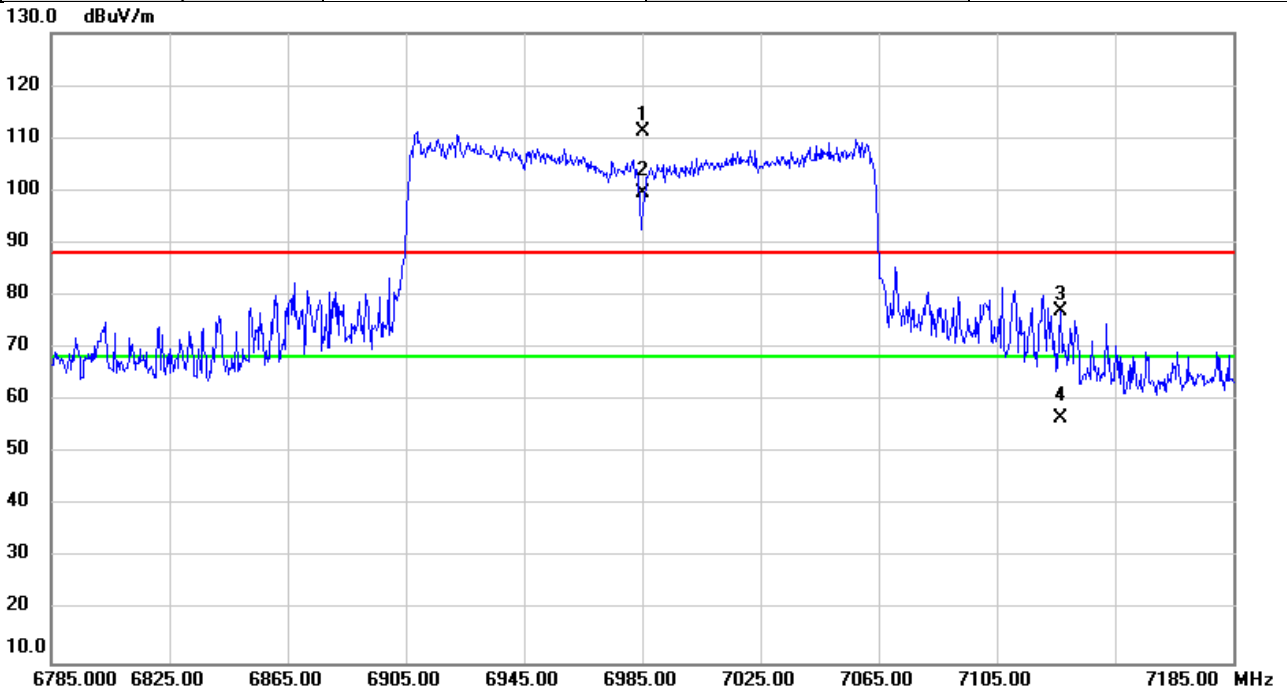


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6985.000	104.56	6.78	111.34	88.20	23.14	peak	No Limit
2	*	6985.000	92.81	6.78	99.59	68.20	31.39	AVG	No Limit
3		7126.373	70.30	6.79	77.09	88.20	-11.11	peak	
4		7126.373	49.99	6.79	56.78	68.20	-11.42	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	5955MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

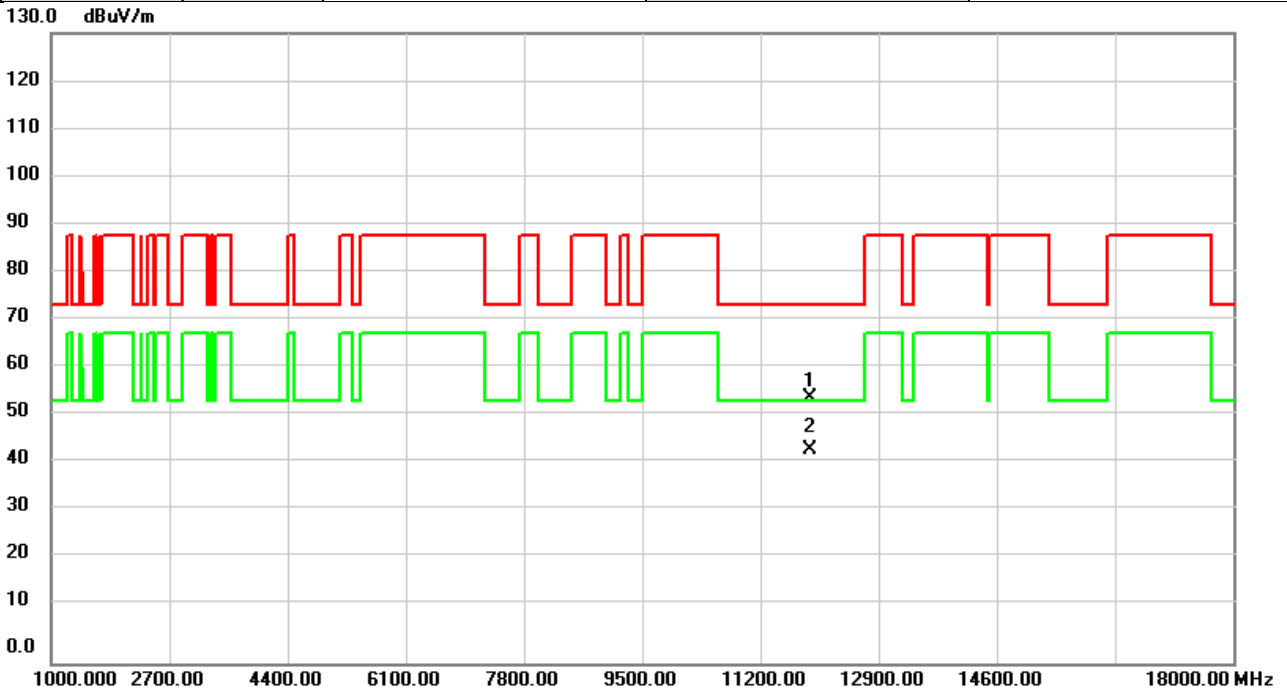


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11910.00	47.06	7.70	54.76	74.00	-19.24	peak	
2	*	11910.00	36.38	7.70	44.08	54.00	-9.92	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	5955MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

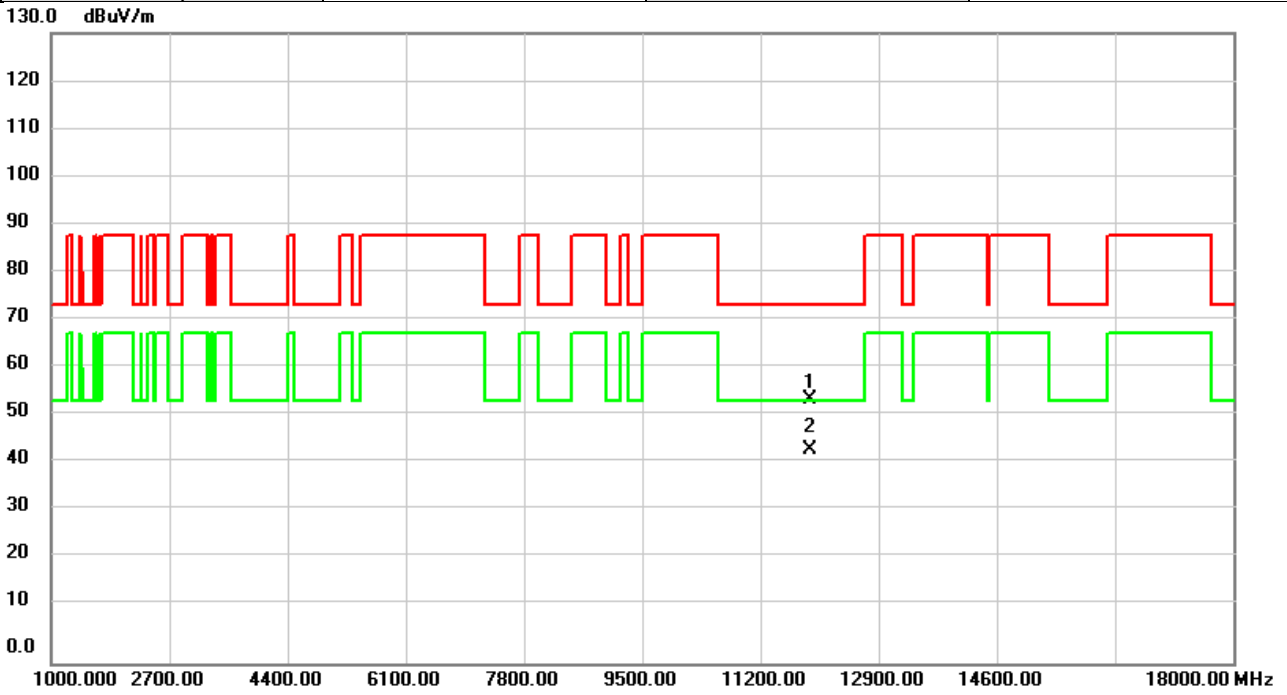


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11910.00	46.60	7.70	54.30	74.00	-19.70	peak	
2	*	11910.00	36.20	7.70	43.90	54.00	-10.10	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6175MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

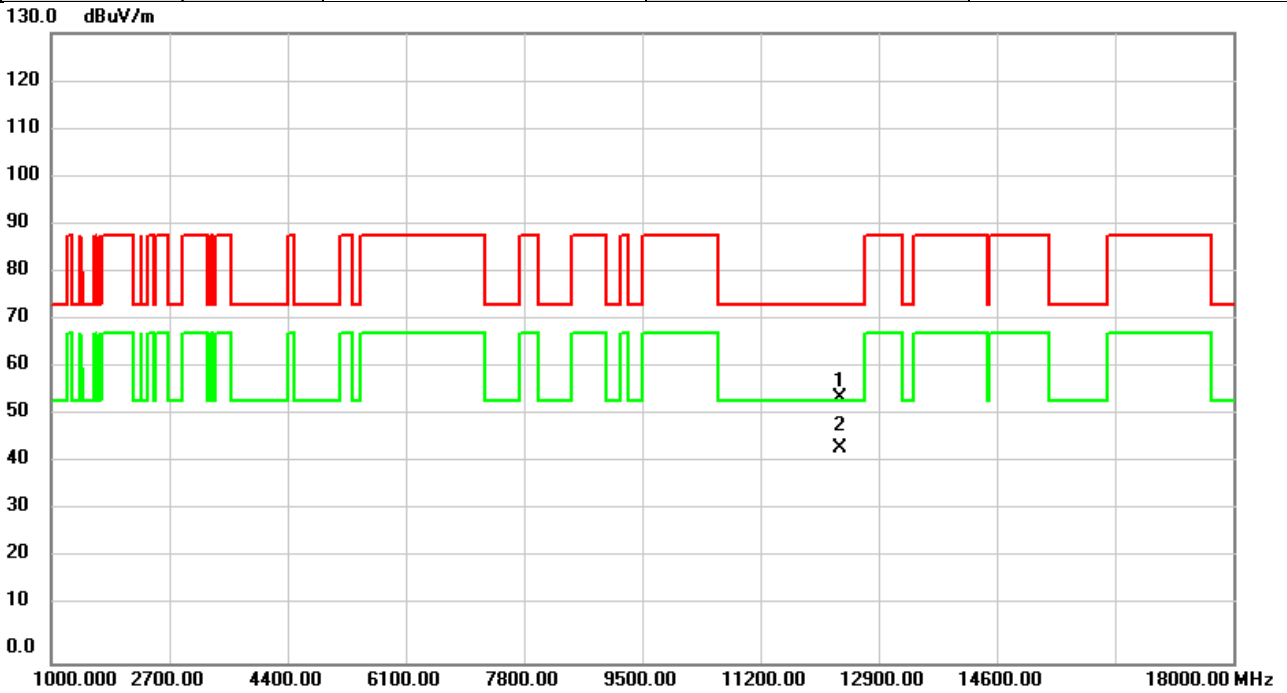


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12350.00	47.04	7.79	54.83	74.00	-19.17	peak	
2	*	12350.00	36.67	7.79	44.46	54.00	-9.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6175MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

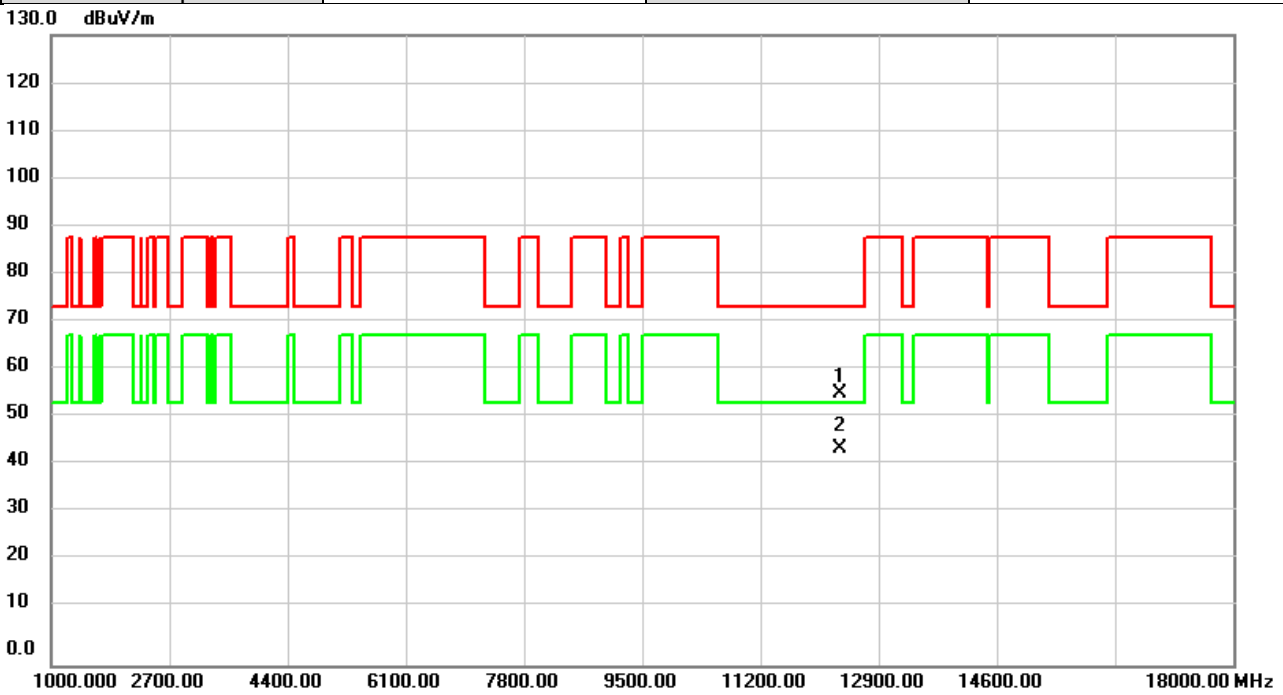


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12350.00	48.27	7.79	56.06	74.00	-17.94	peak	
2	*	12350.00	36.97	7.79	44.76	54.00	-9.24	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6415MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

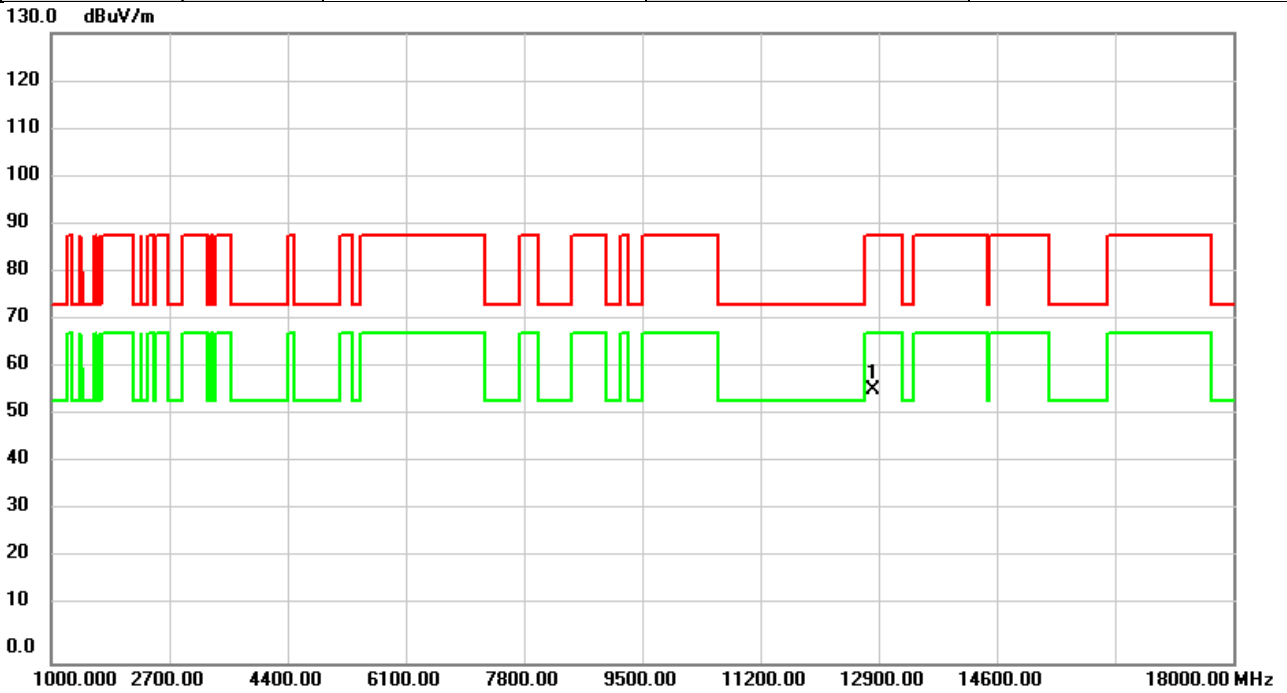


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12830.00	47.93	8.43	56.36	88.20	-31.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6415MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

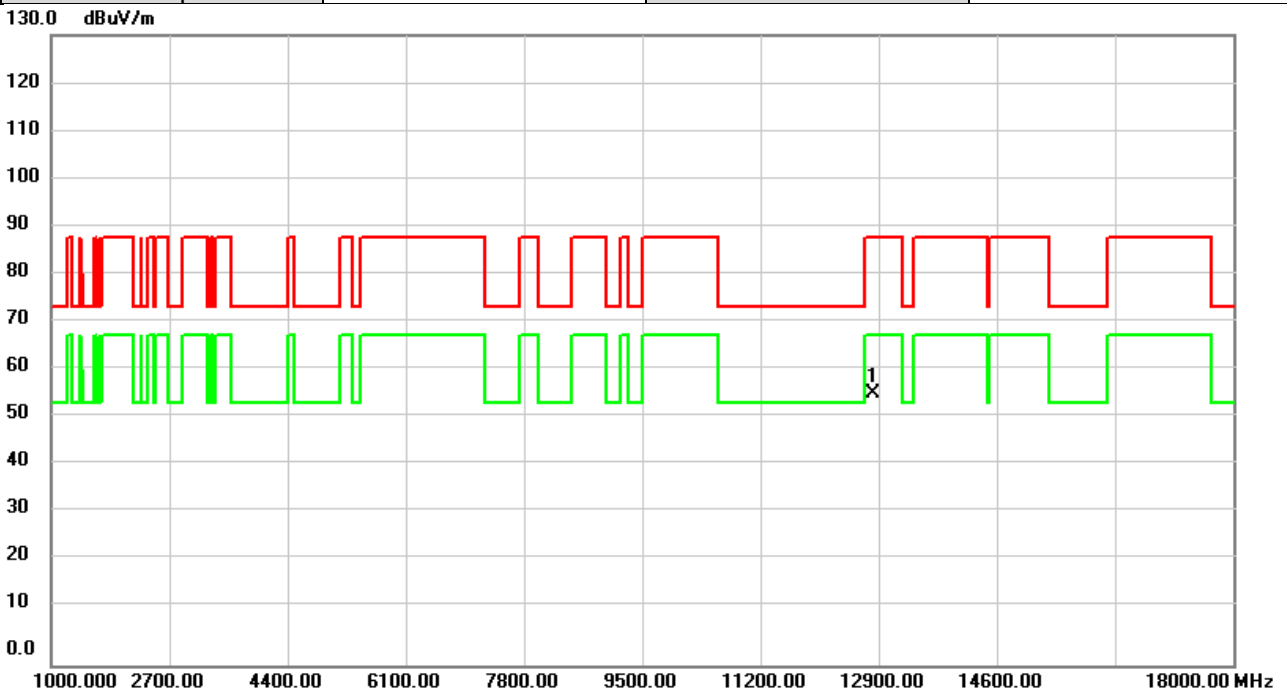


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12830.00	47.75	8.43	56.18	88.20	-32.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6435MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

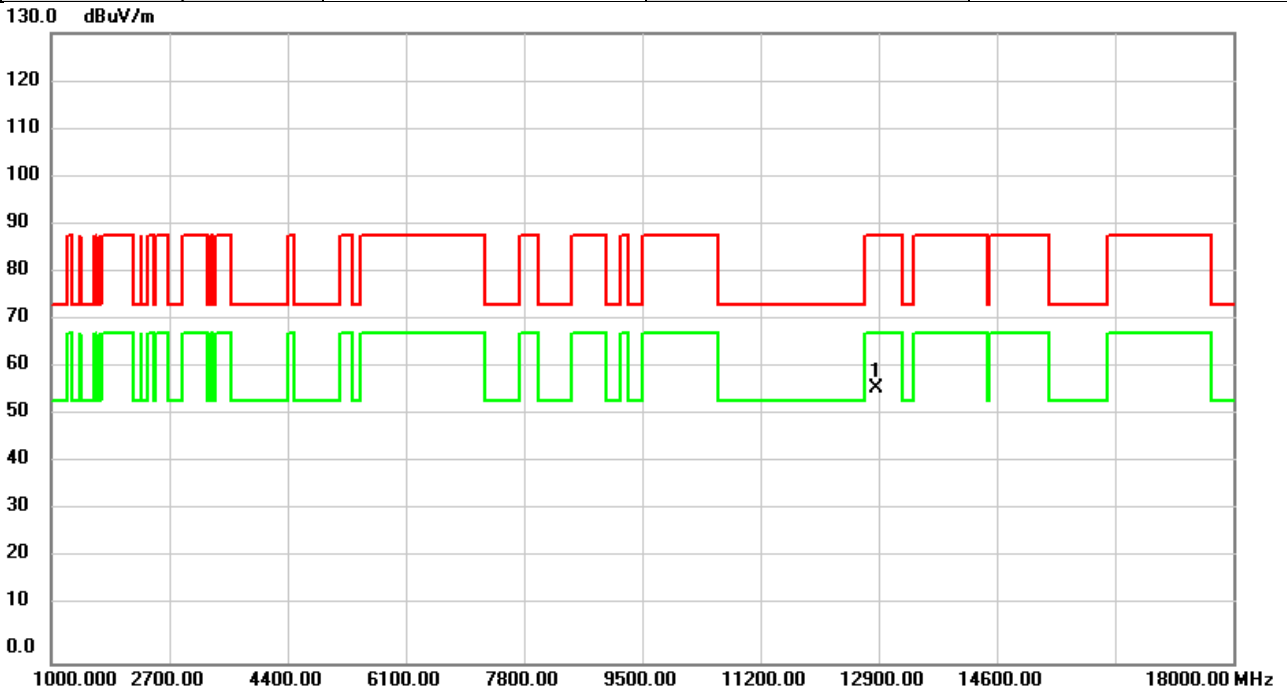


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12870.00	48.23	8.49	56.72	88.20	-31.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6435MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

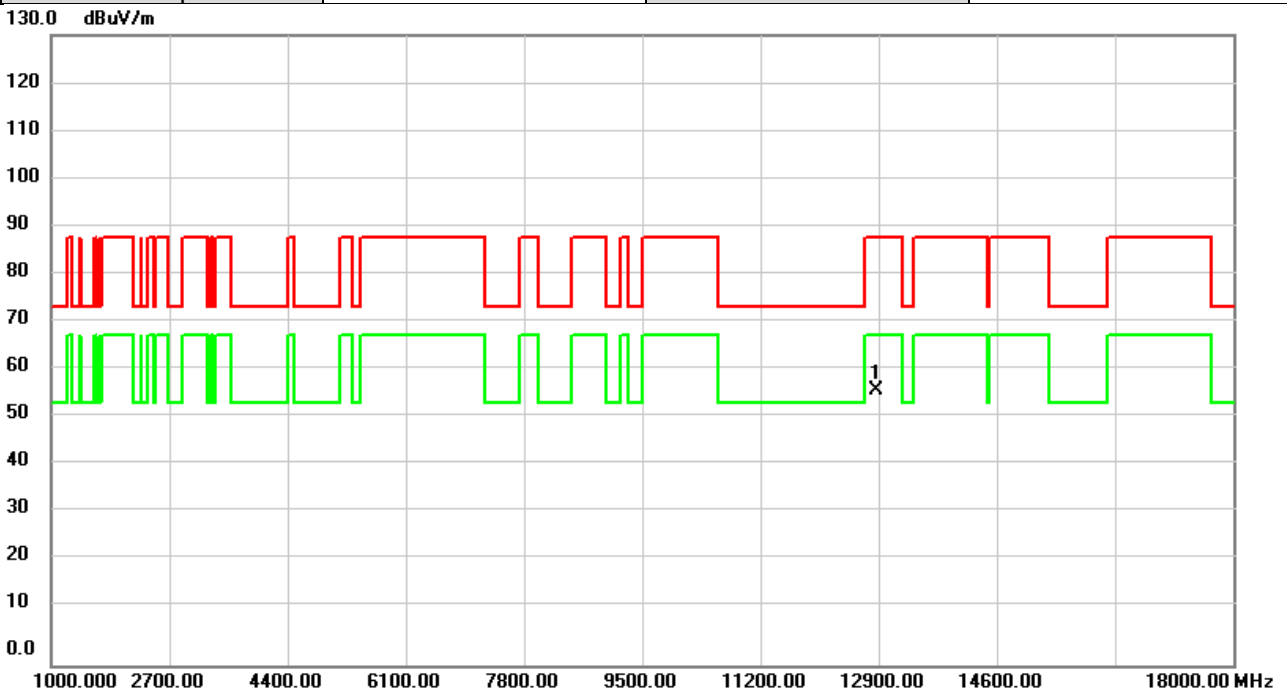


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12870.00	48.19	8.49	56.68	88.20	-31.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6475MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

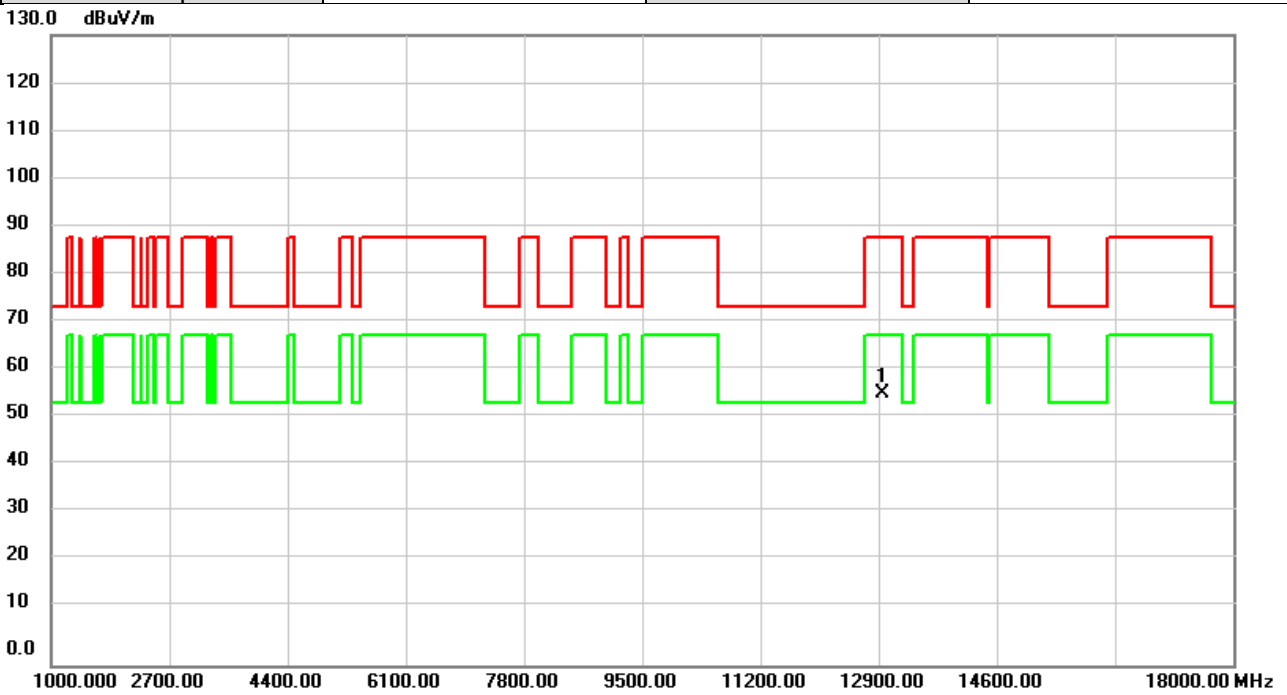


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12950.00	47.42	8.65	56.07	88.20	-32.13	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6475MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

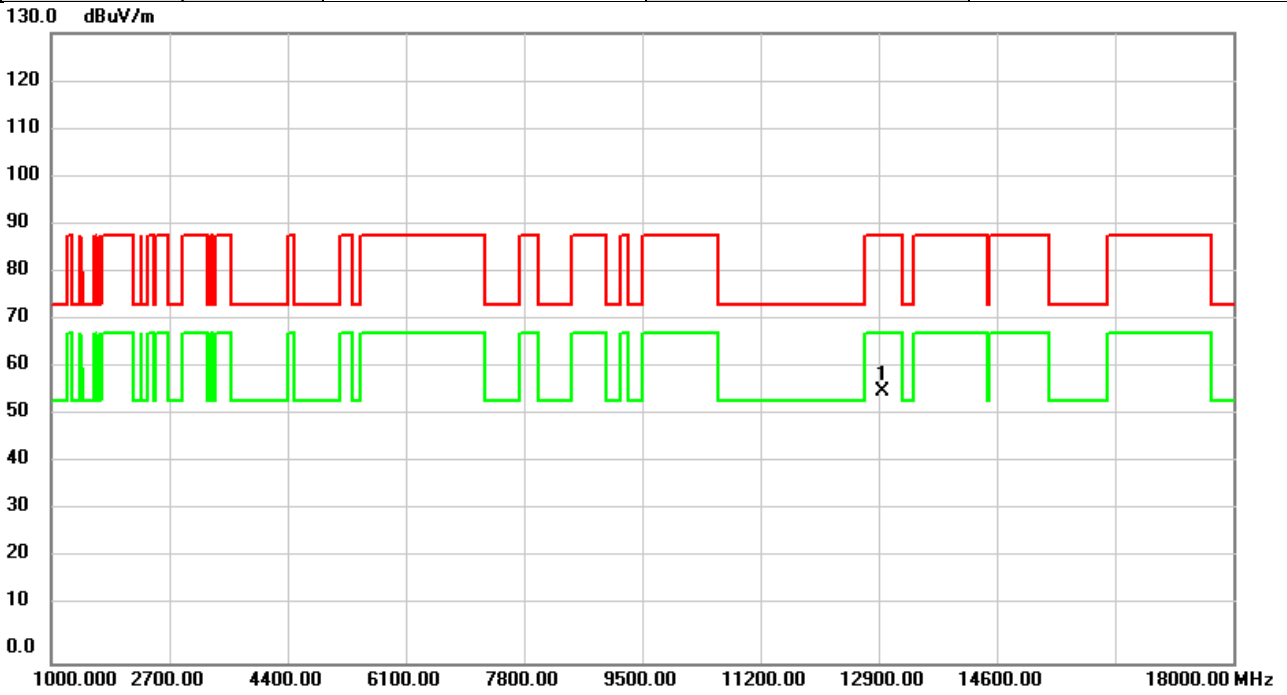


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12950.00	47.28	8.65	55.93	88.20	-32.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6515MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

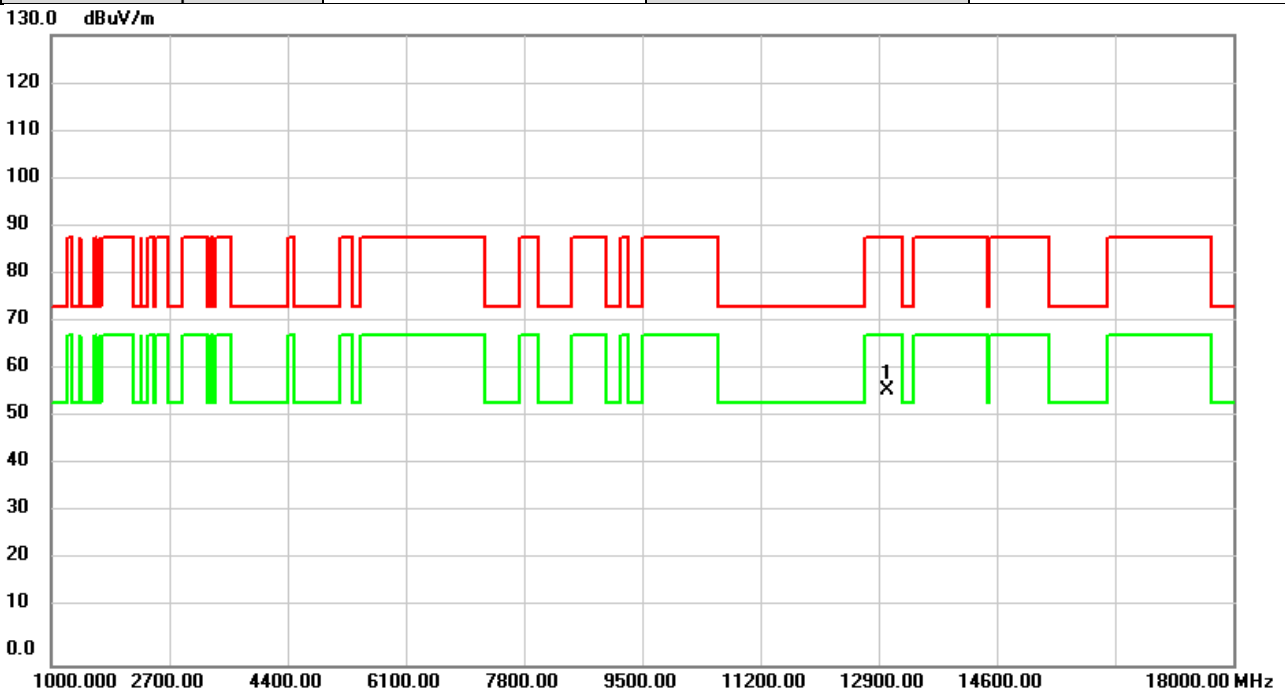


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13030.00	48.11	8.73	56.84	88.20	-31.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6515MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

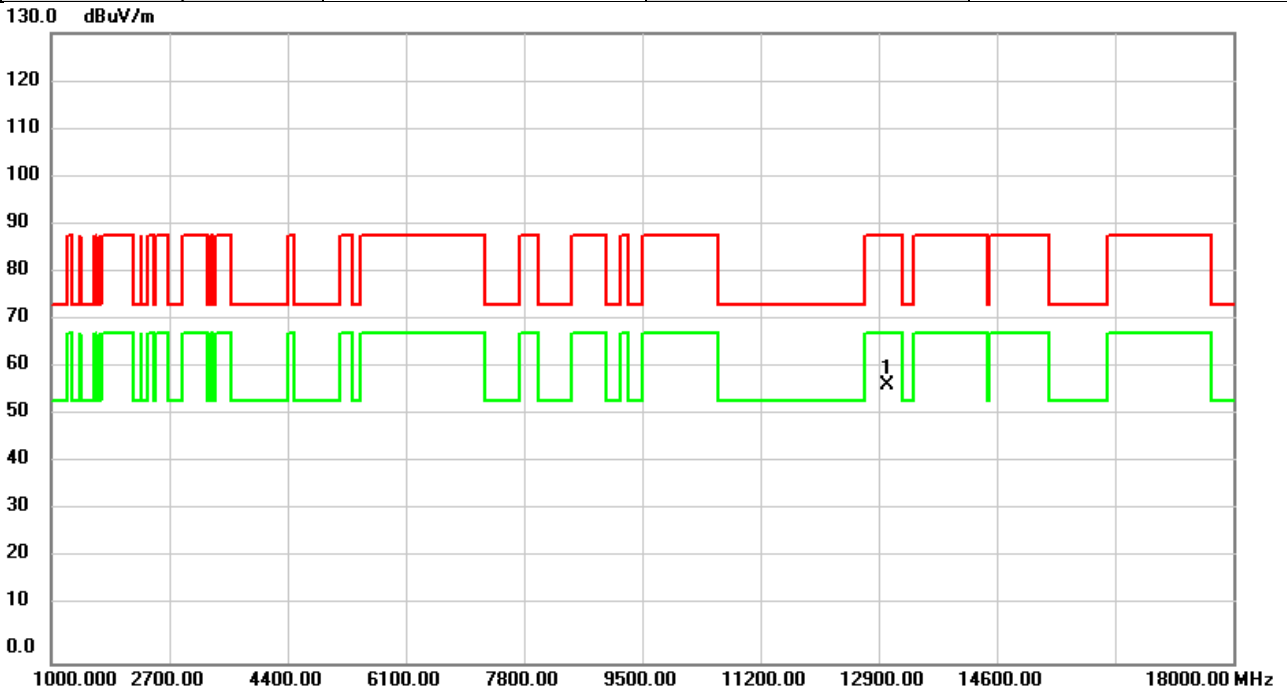


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13030.00	48.47	8.73	57.20	88.20	-31.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6535MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

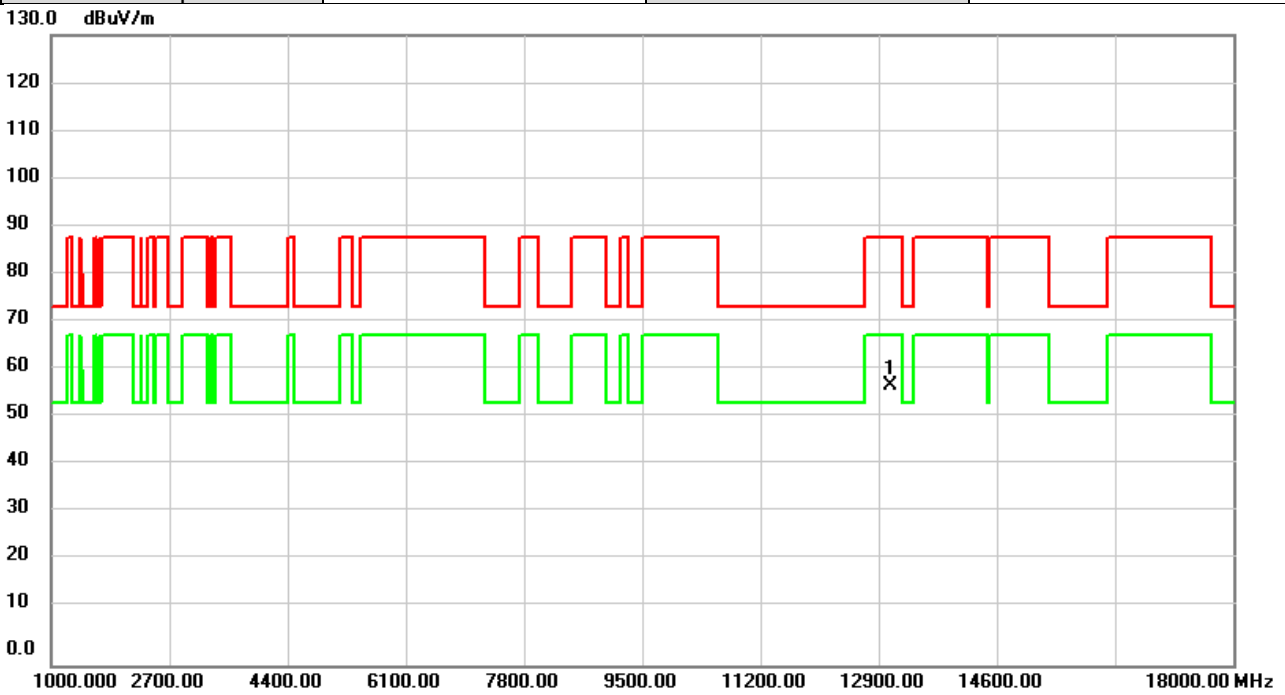


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13070.00	49.03	8.72	57.75	88.20	-30.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6535MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

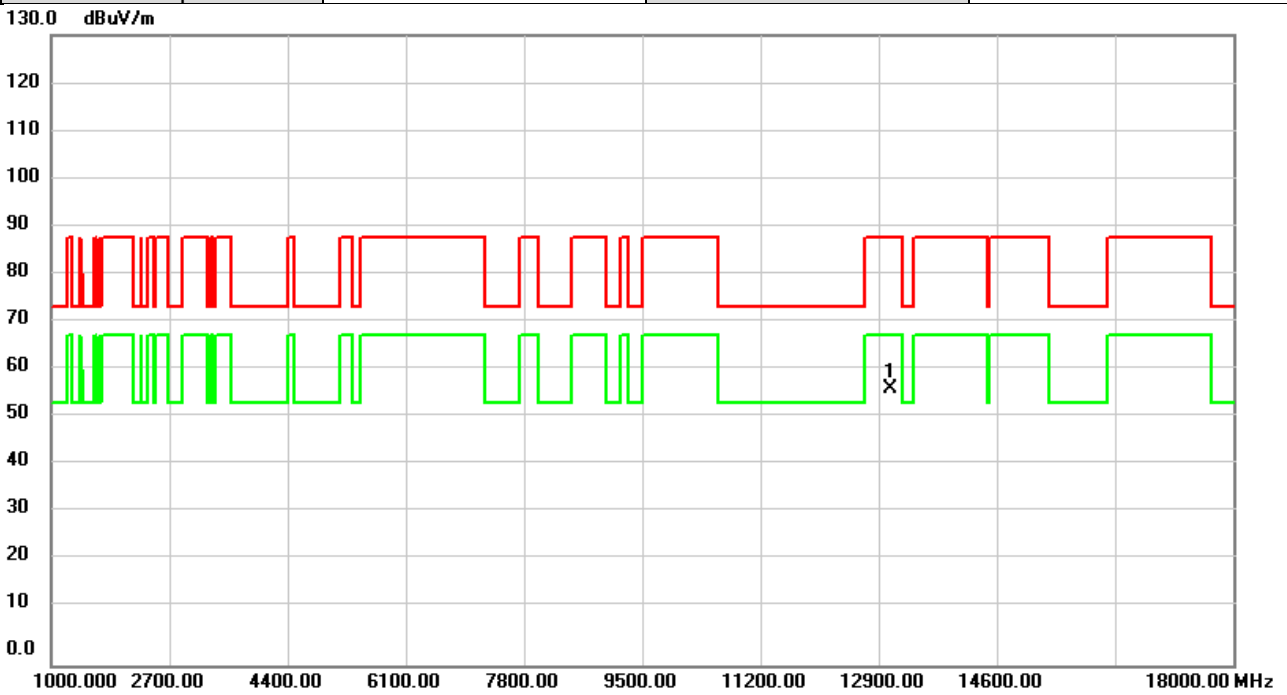


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13070.00	48.26	8.72	56.98	88.20	-31.22	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6695MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

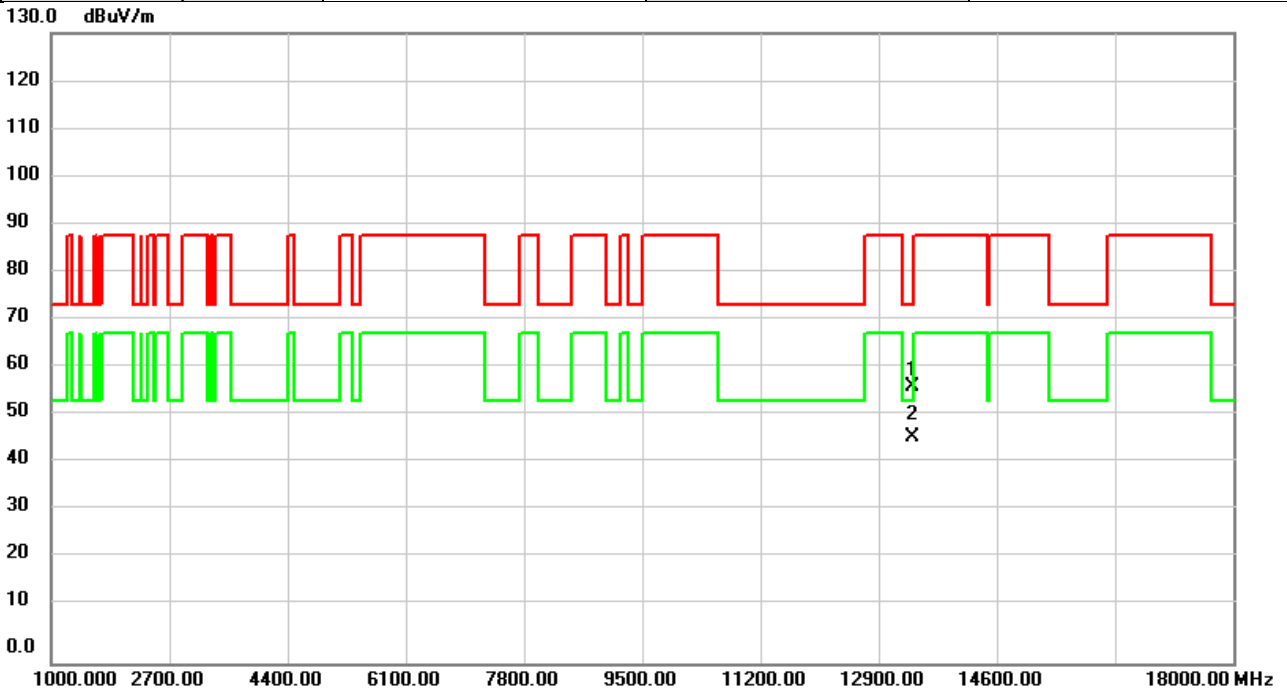


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13390.00	48.34	8.61	56.95	74.00	-17.05	peak	
2	*	13390.00	37.93	8.61	46.54	54.00	-7.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6695MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

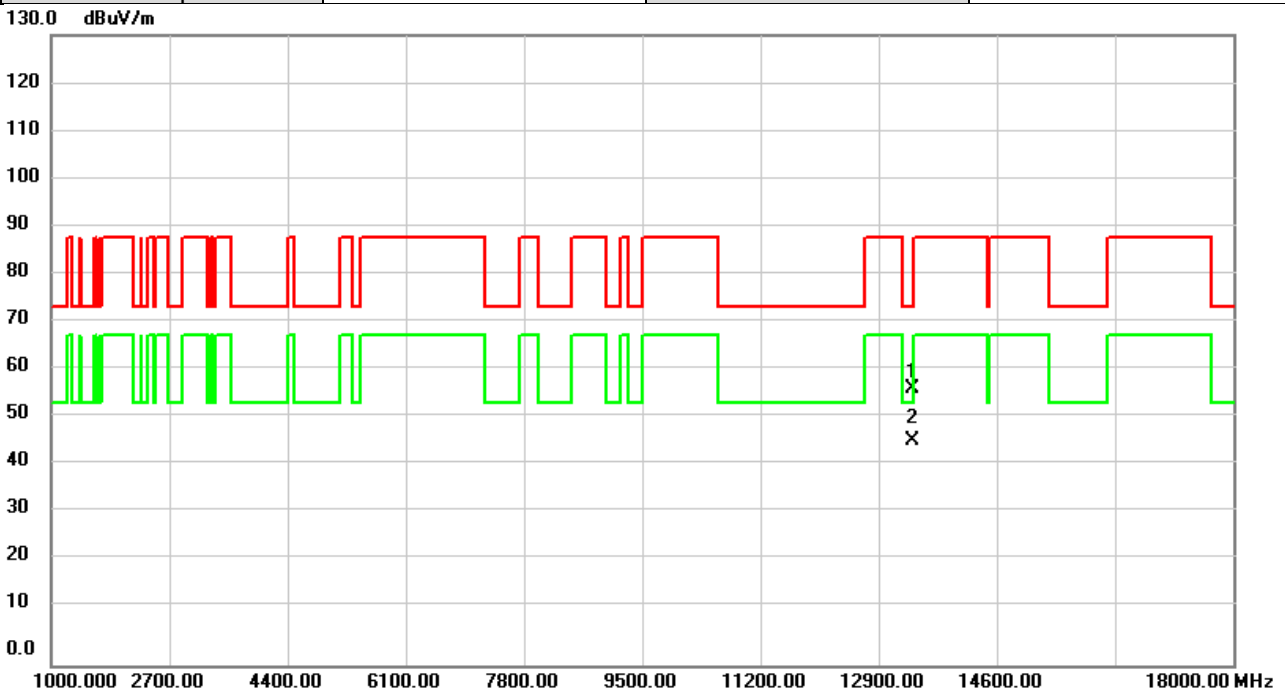


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13390.00	48.49	8.61	57.10	74.00	-16.90	peak	
2	*	13390.00	37.75	8.61	46.36	54.00	-7.64	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6855MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

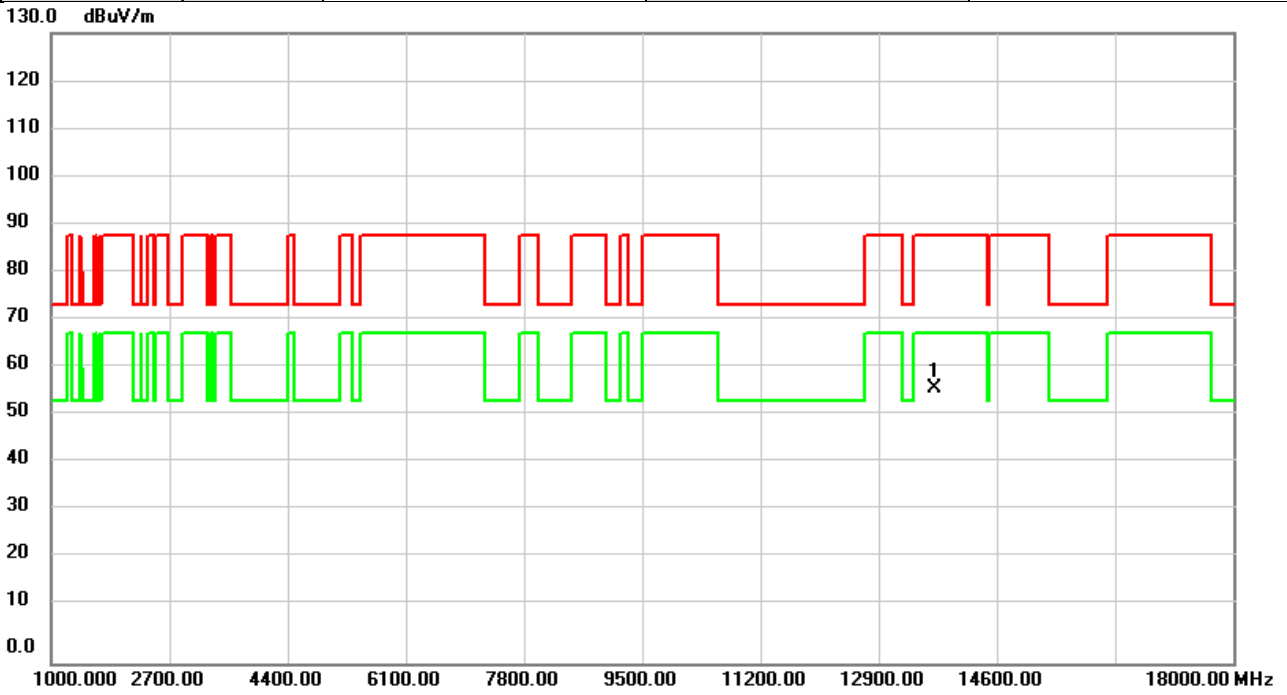


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13710.00	48.15	8.43	56.58	88.20	-31.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6855MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

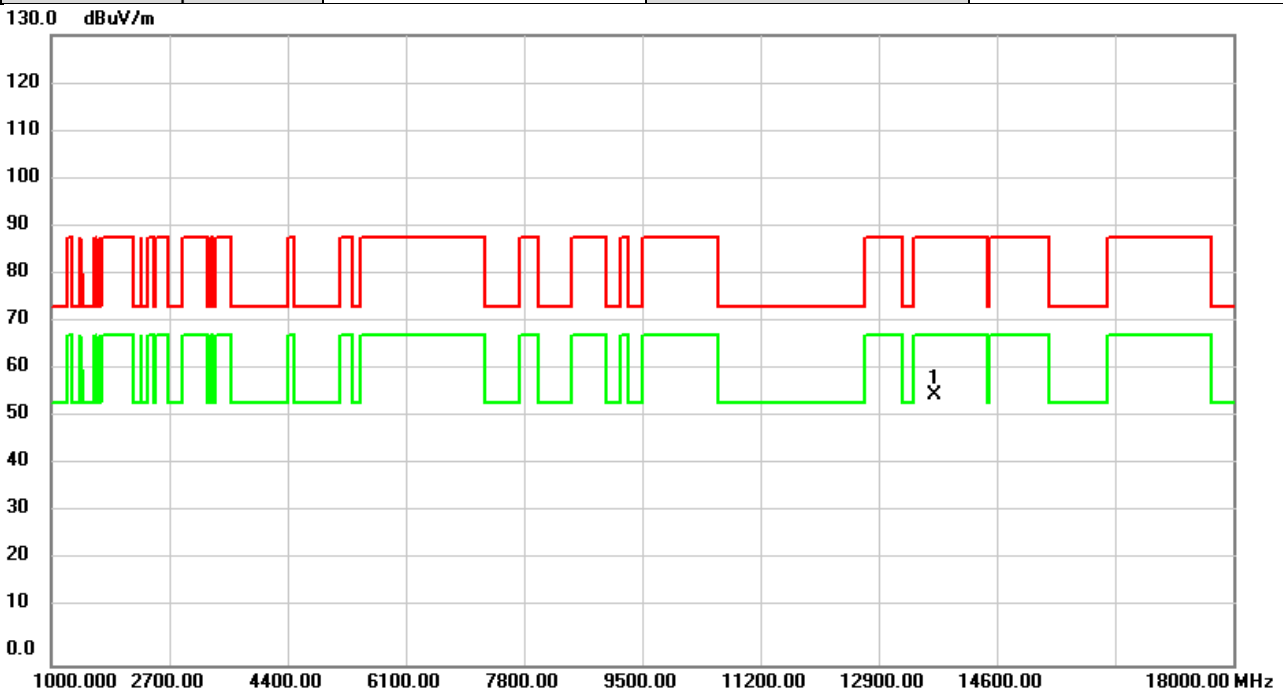


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13710.00	47.39	8.43	55.82	88.20	-32.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6875MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

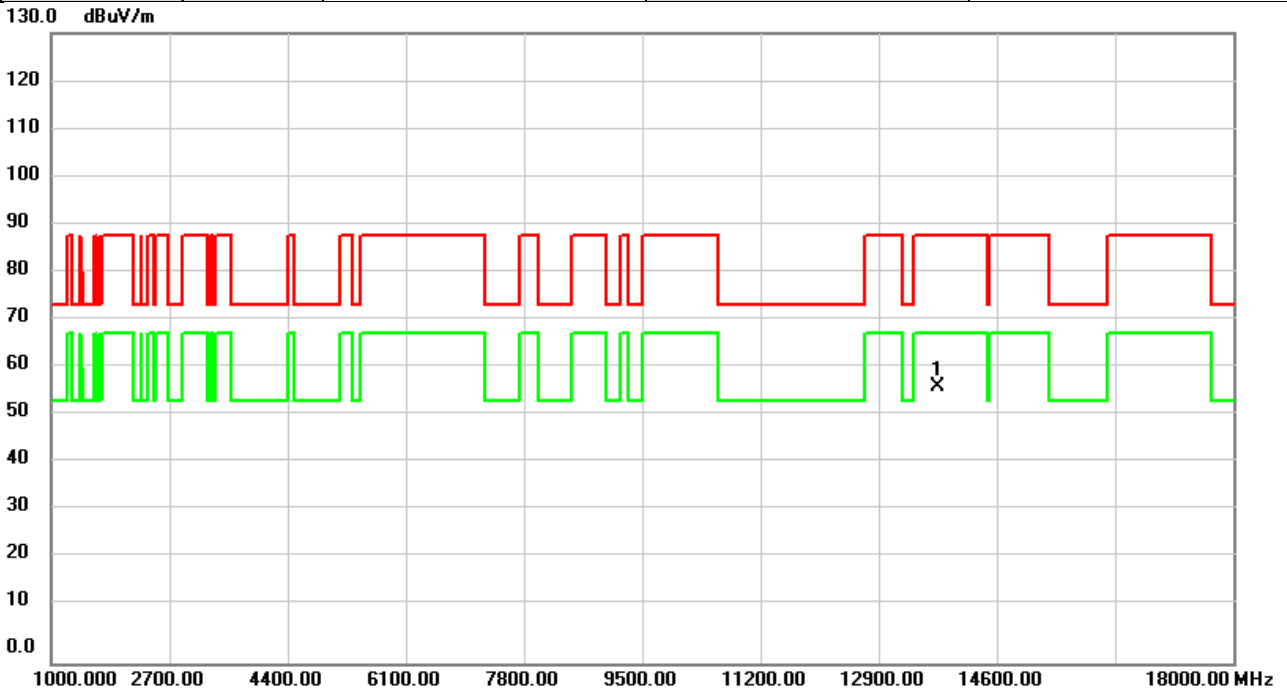


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13750.00	48.77	8.39	57.16	88.20	-31.04	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6875MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

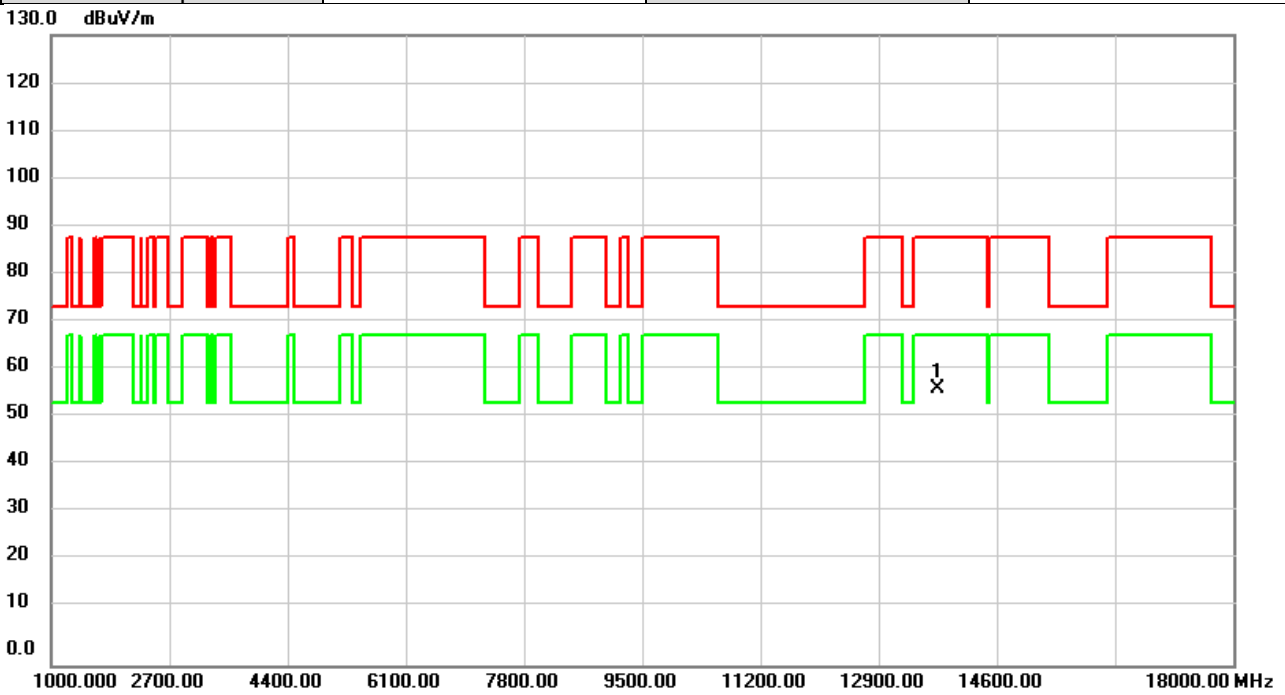


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13750.00	48.75	8.39	57.14	88.20	-31.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6995MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

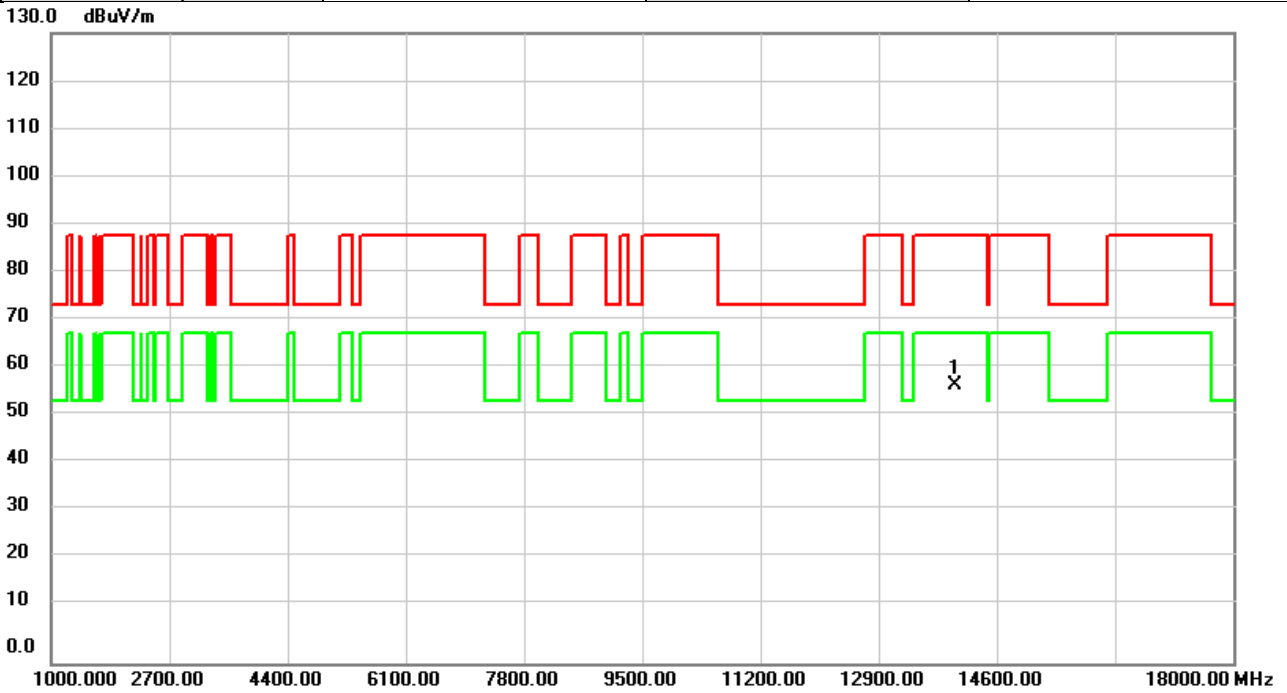


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13990.00	49.12	8.21	57.33	88.20	-30.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	6995MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

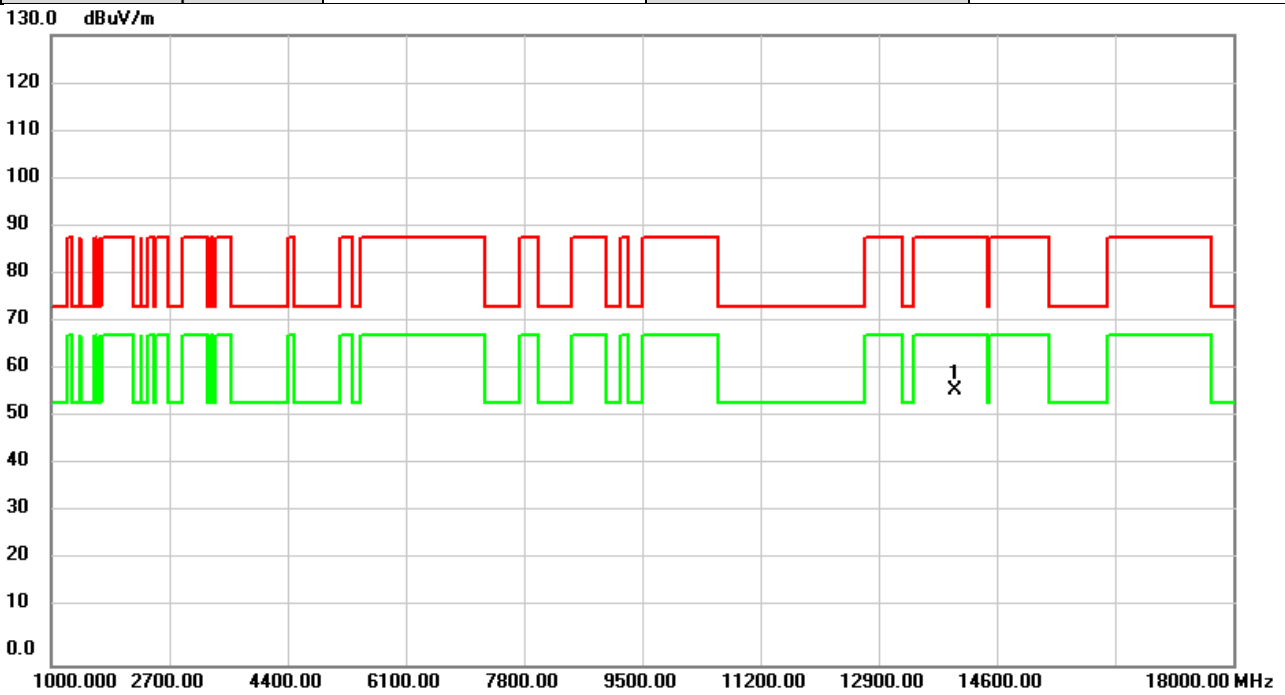


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13990.00	48.49	8.21	56.70	88.20	-31.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	7095MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

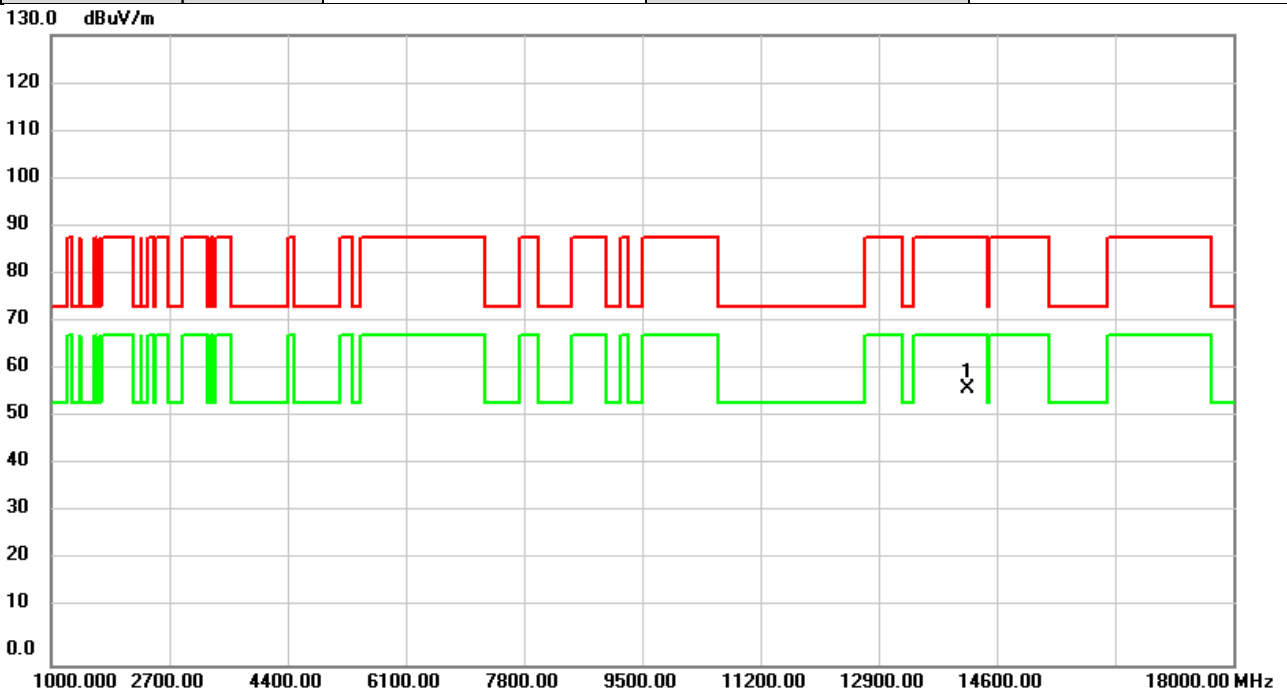


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14190.00	48.99	8.18	57.17	88.20	-31.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/16
Test Frequency	7095MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

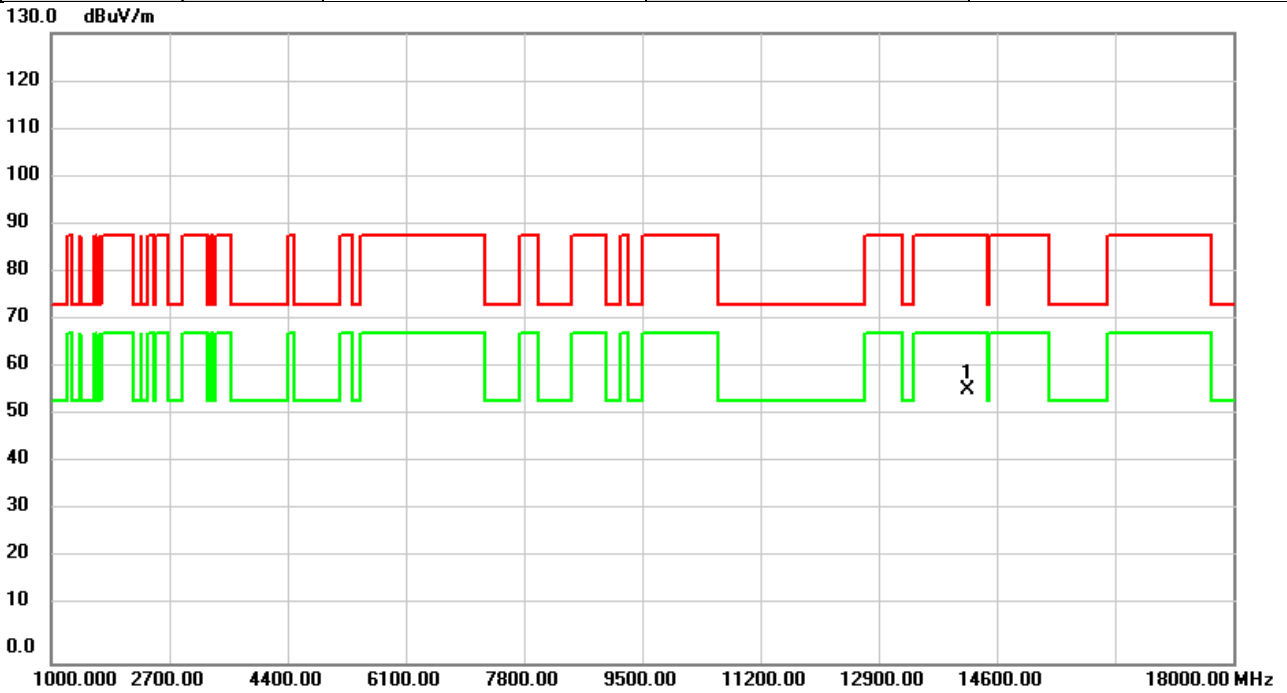


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14190.00	48.27	8.18	56.45	88.20	-31.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	5965MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

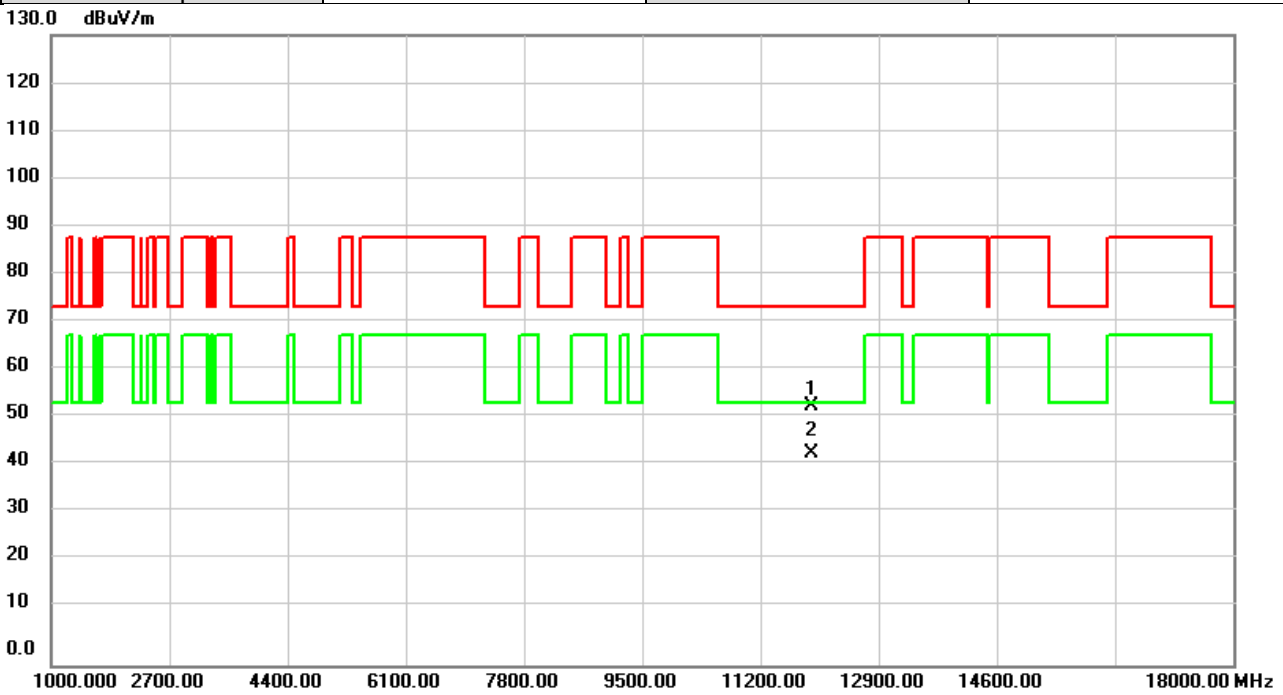


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11930.00	45.80	7.72	53.52	74.00	-20.48	peak	
2	*	11930.00	35.94	7.72	43.66	54.00	-10.34	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	5965MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

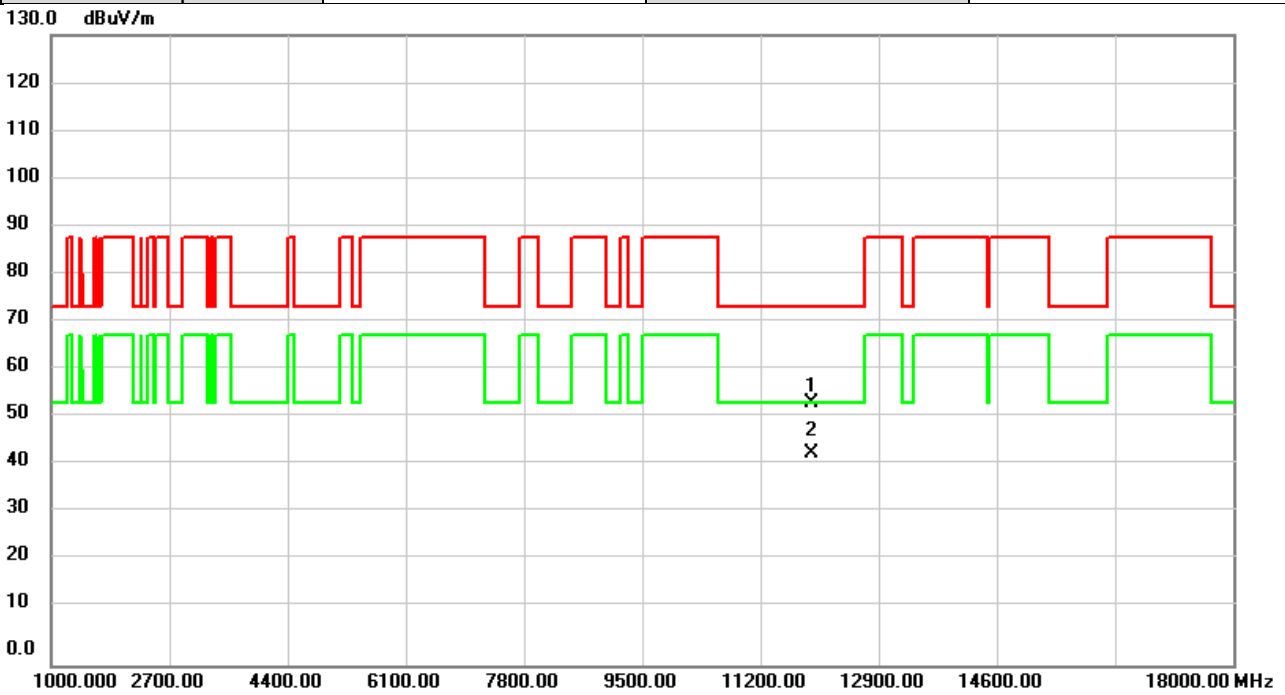


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11930.00	46.37	7.72	54.09	74.00	-19.91	peak	
2	*	11930.00	36.02	7.72	43.74	54.00	-10.26	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6165MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

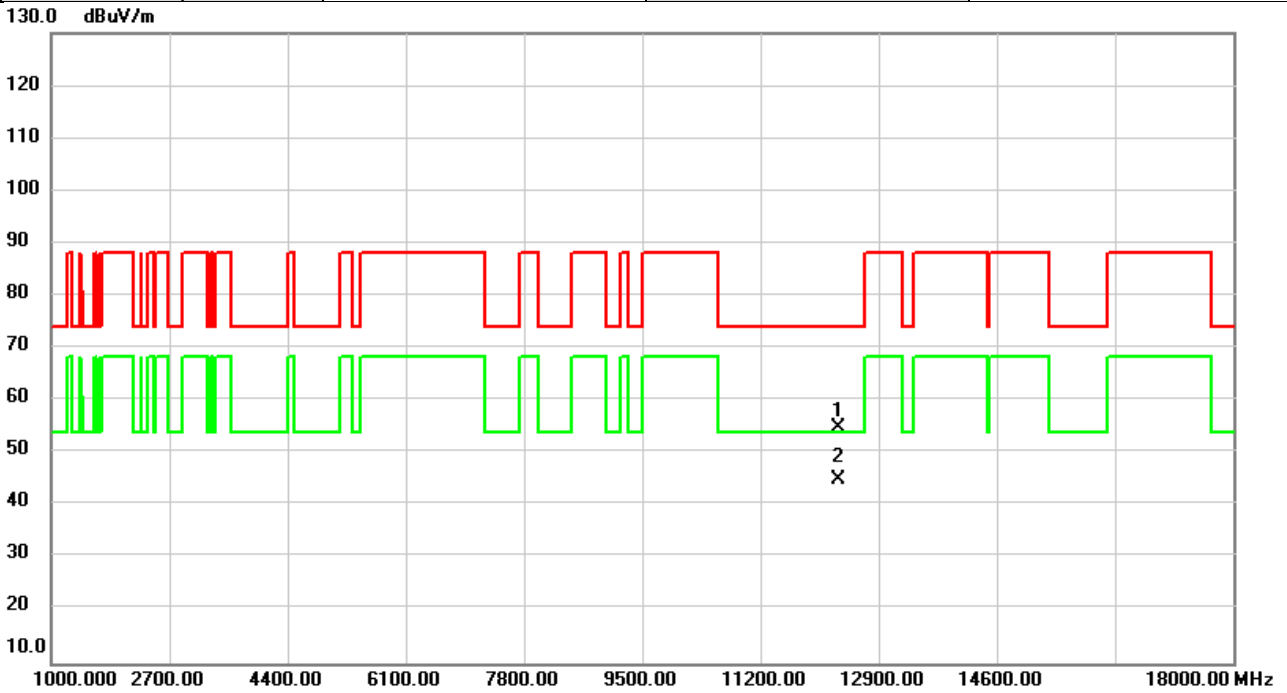


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12330.00	47.04	7.79	54.83	74.00	-19.17	peak	
2	*	12330.00	37.05	7.79	44.84	54.00	-9.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6165MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

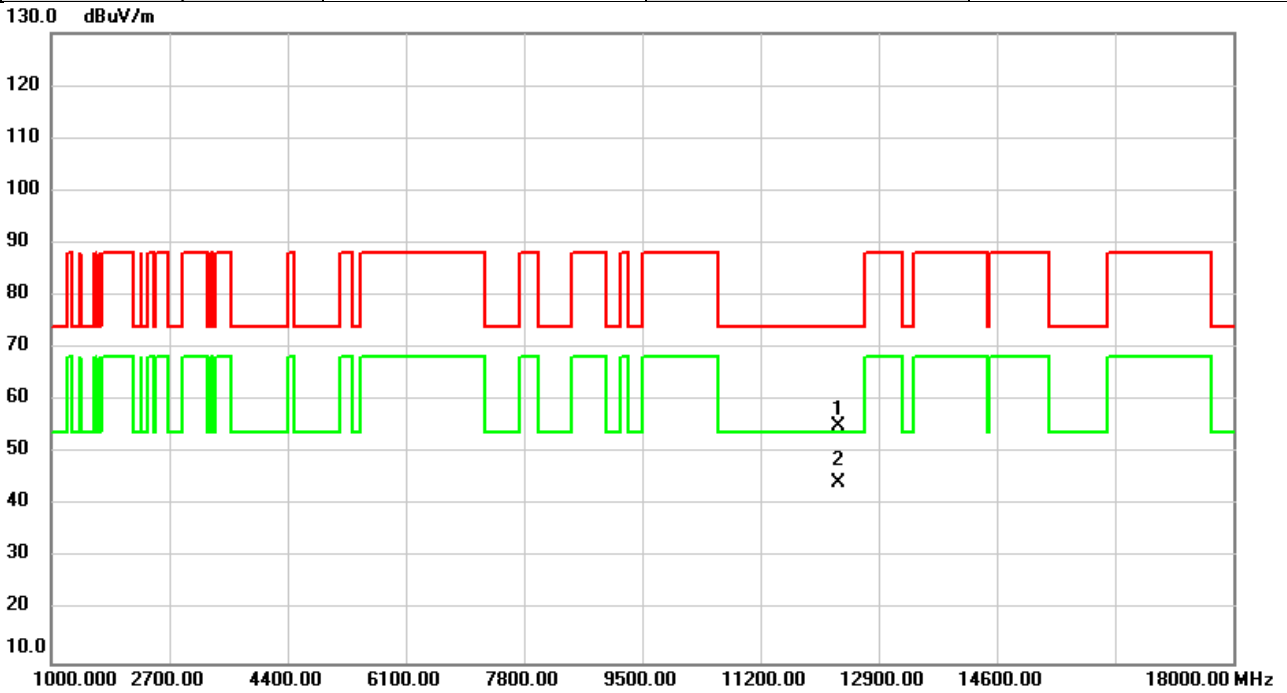


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12330.00	47.28	7.79	55.07	74.00	-18.93	peak	
2	*	12330.00	36.54	7.79	44.33	54.00	-9.67	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6405MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

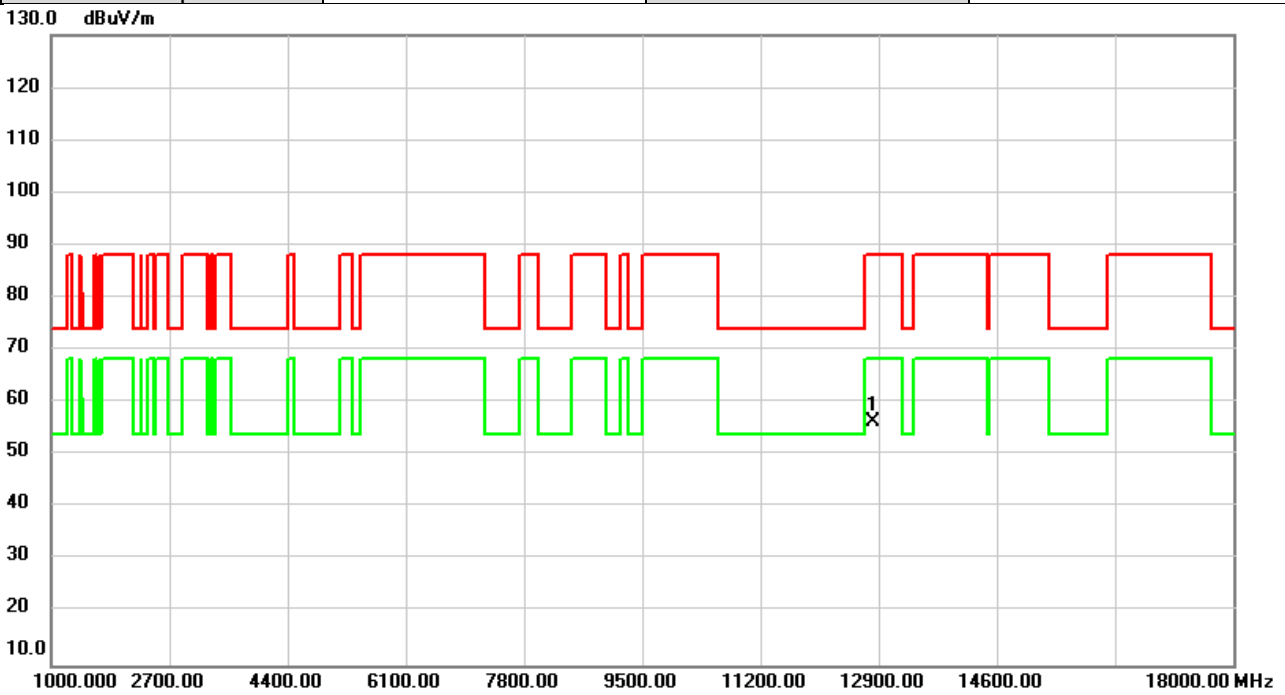


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12810.00	48.06	8.38	56.44	88.20	-31.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6405MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

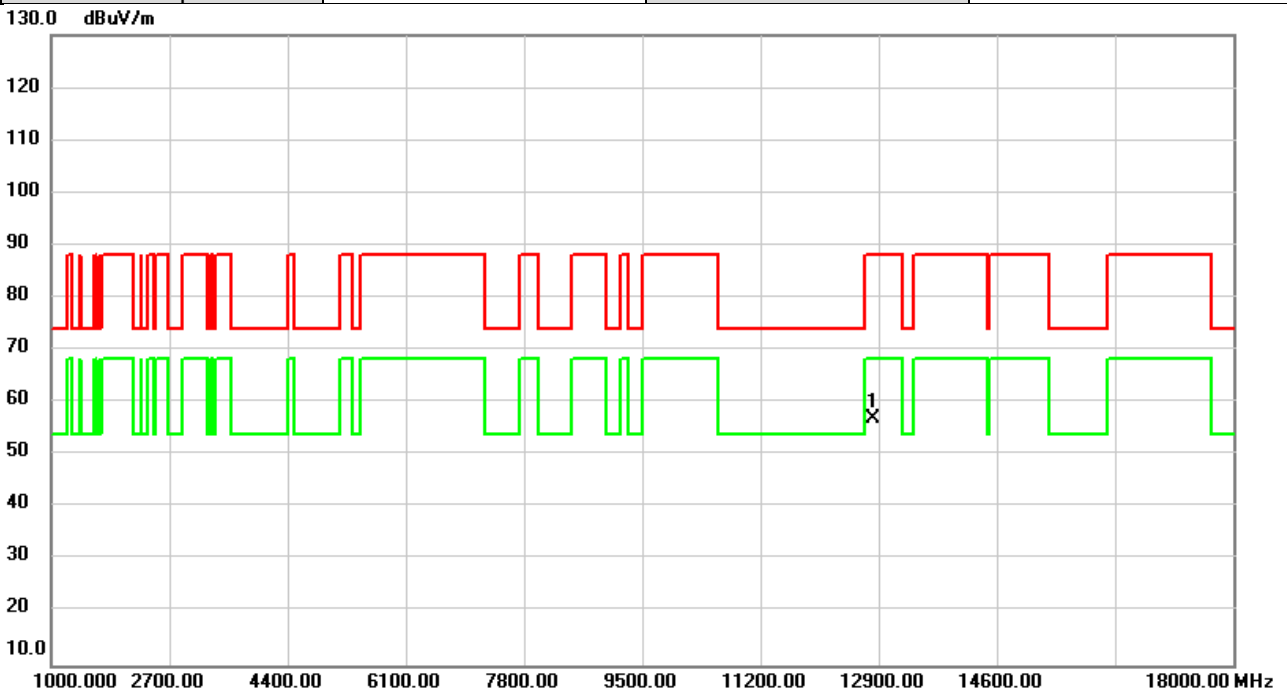


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12810.00	48.71	8.38	57.09	88.20	-31.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6445MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

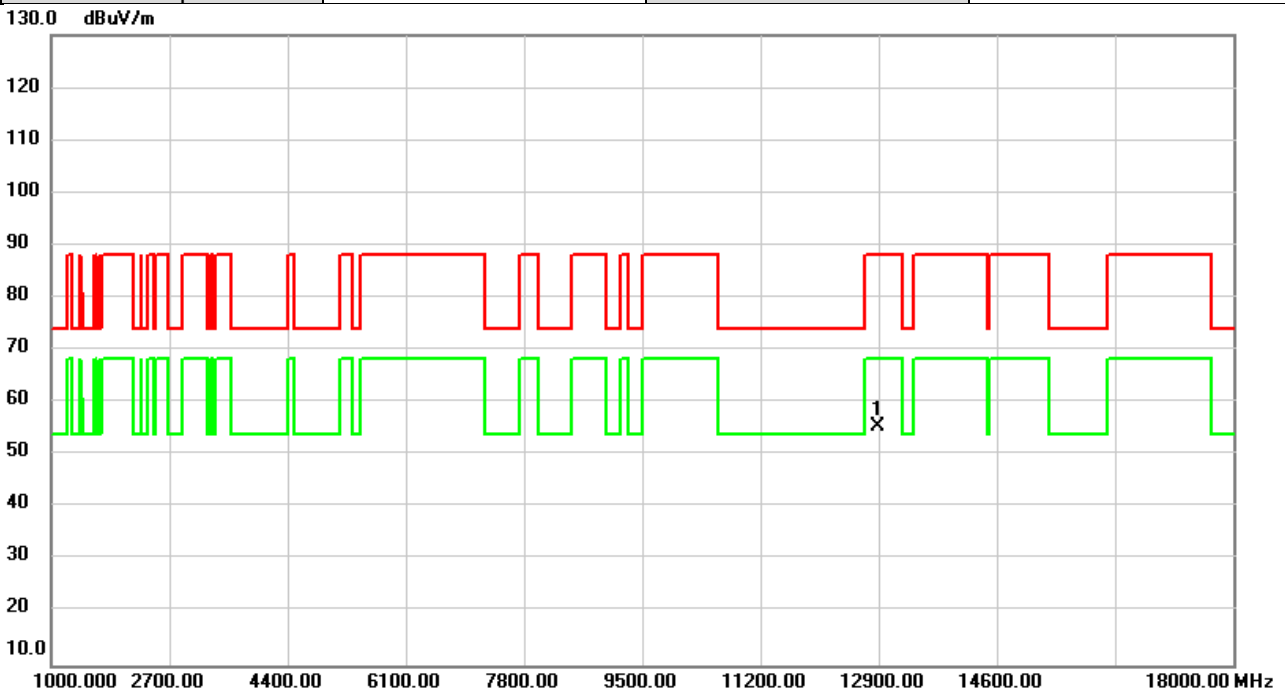


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12890.00	46.98	8.54	55.52	88.20	-32.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6445MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

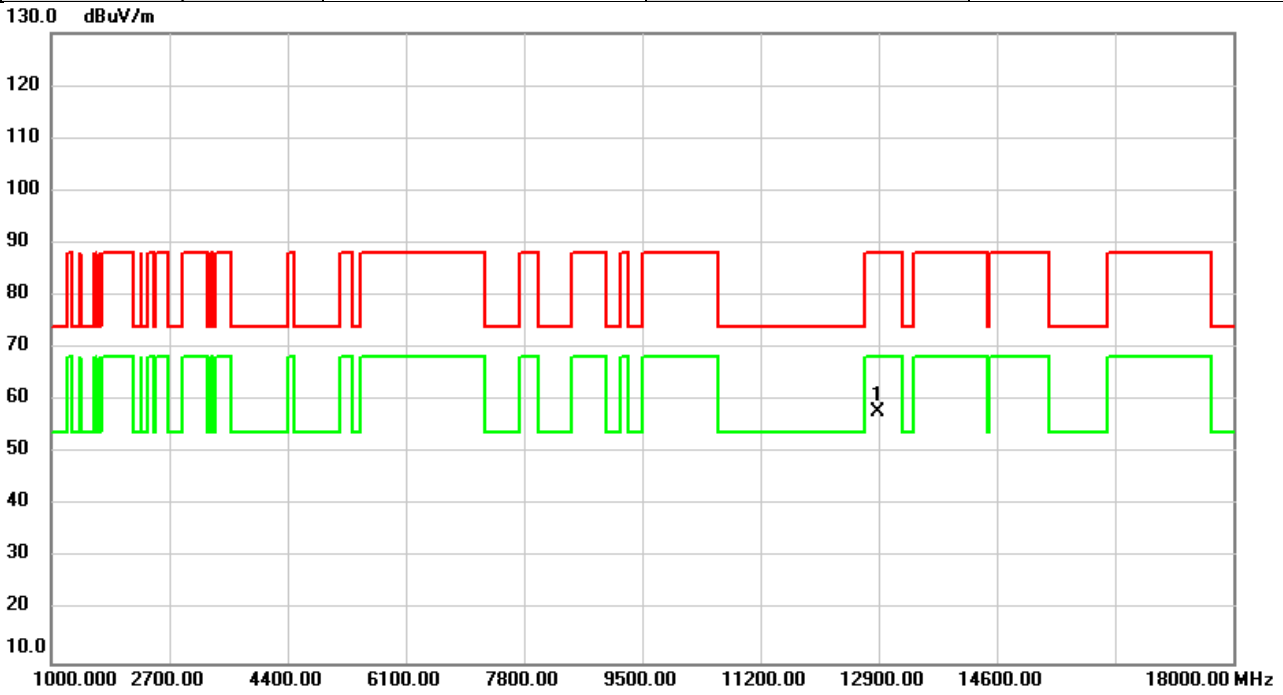


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12890.00	49.18	8.54	57.72	88.20	-30.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6485MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

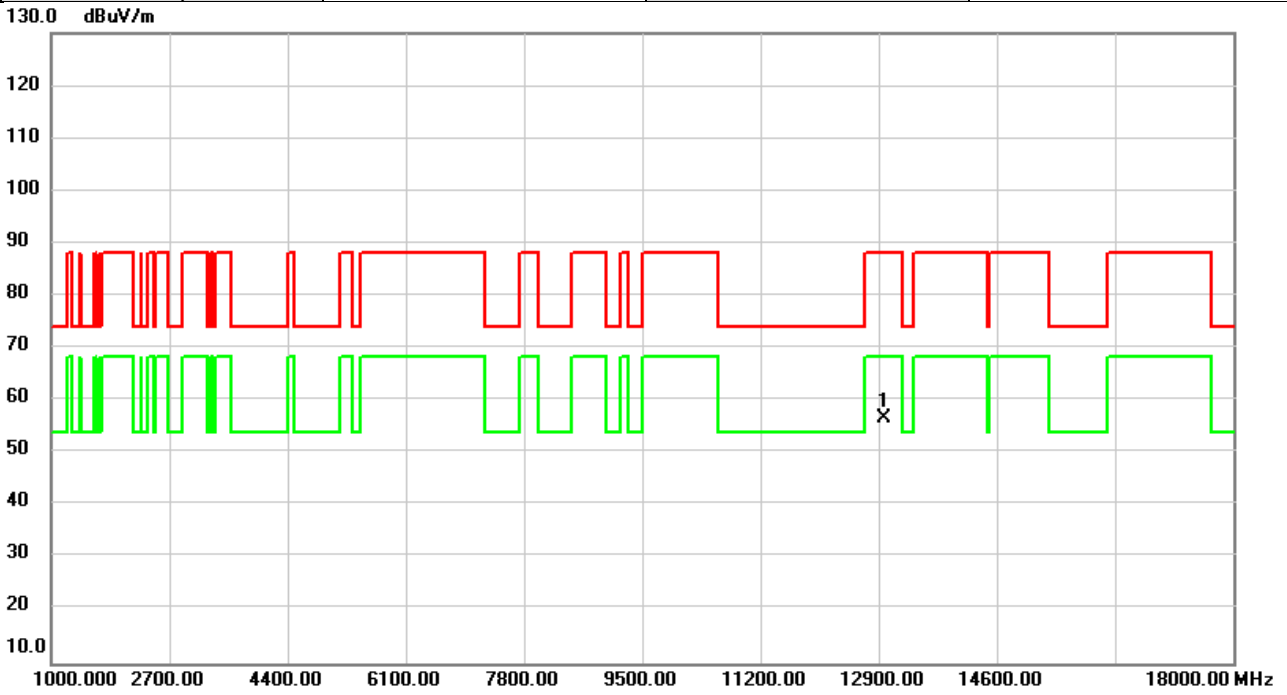


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12970.00	48.05	8.68	56.73	88.20	-31.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6485MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

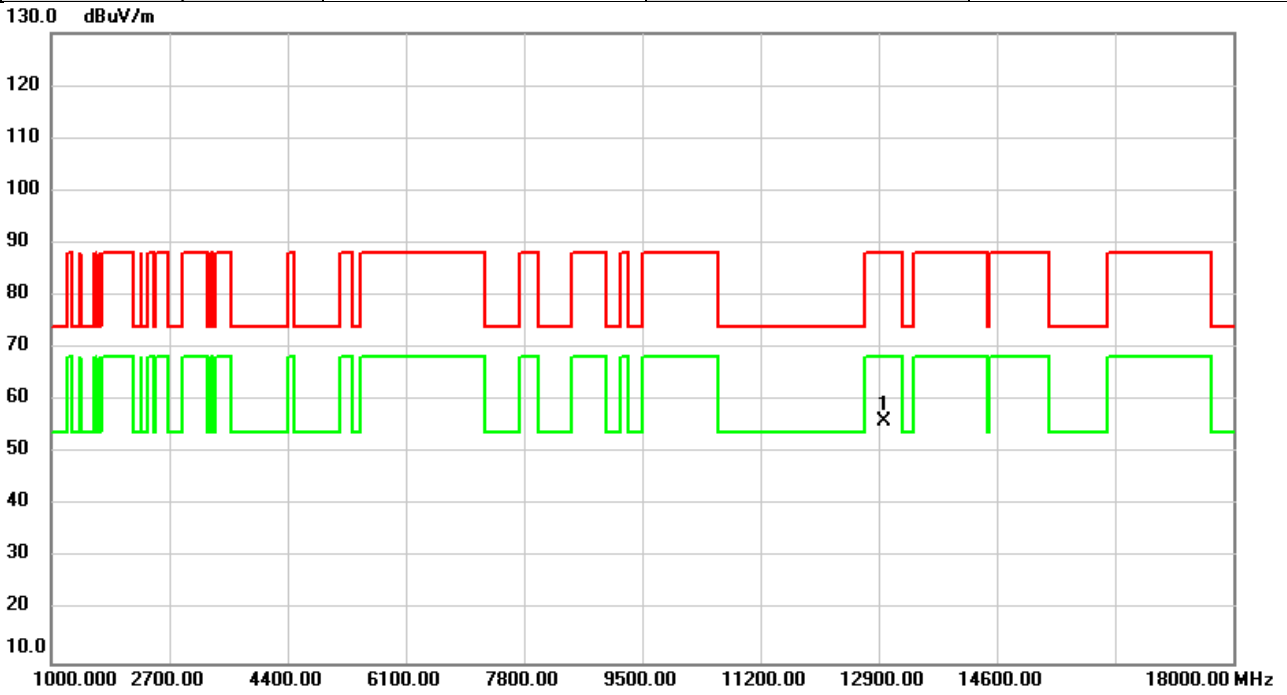


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12970.00	47.49	8.68	56.17	88.20	-32.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6525MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

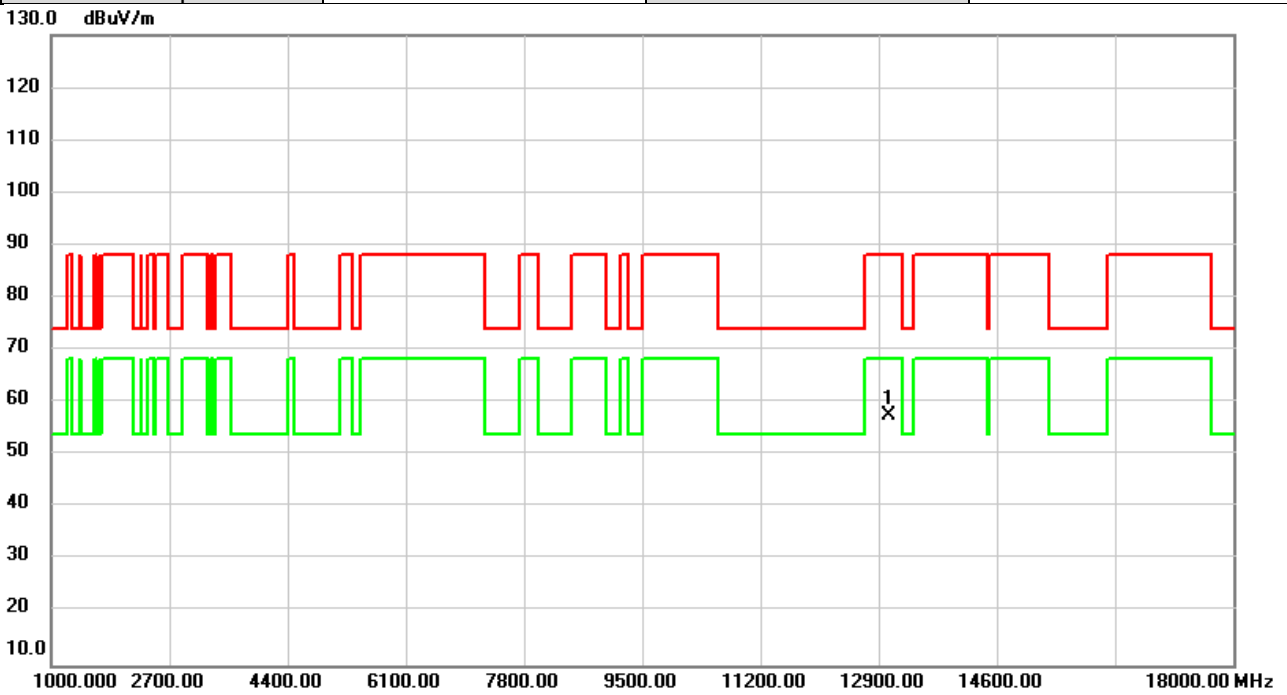


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13050.00	48.78	8.72	57.50	88.20	-30.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6525MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

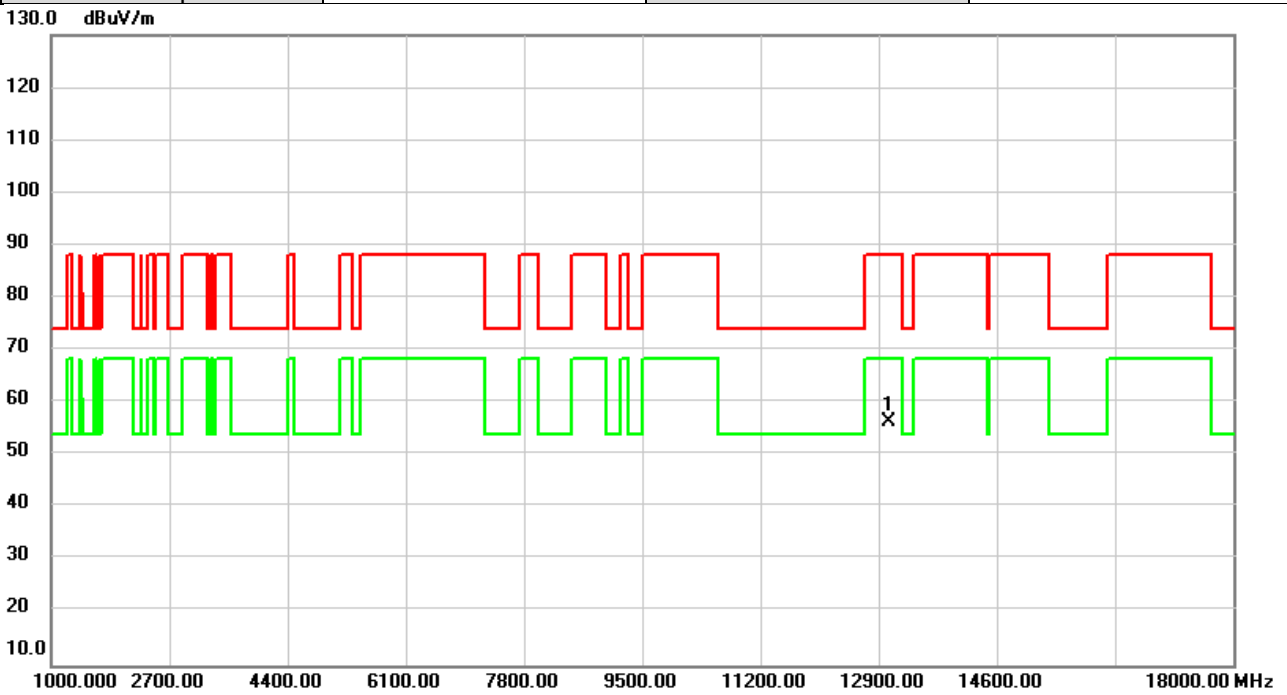


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13050.00	47.61	8.72	56.33	88.20	-31.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6685MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

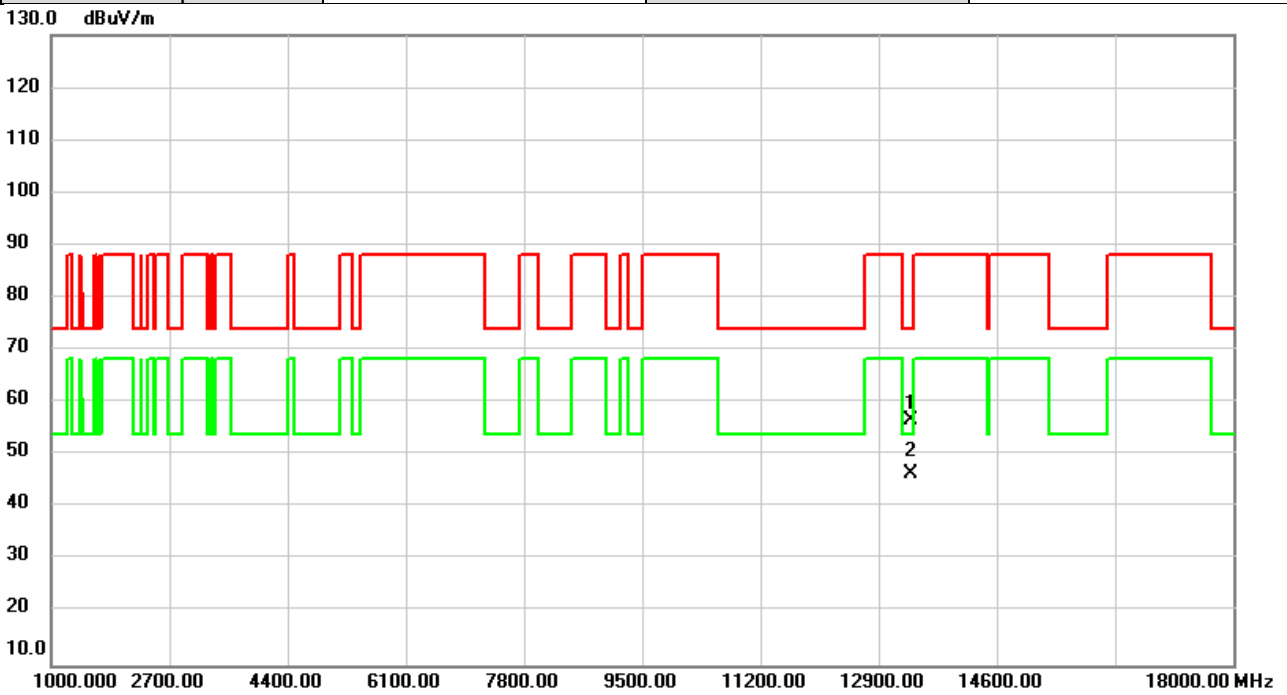


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13370.00	48.07	8.62	56.69	74.00	-17.31	peak	
2	*	13370.00	37.93	8.62	46.55	54.00	-7.45	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6685MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

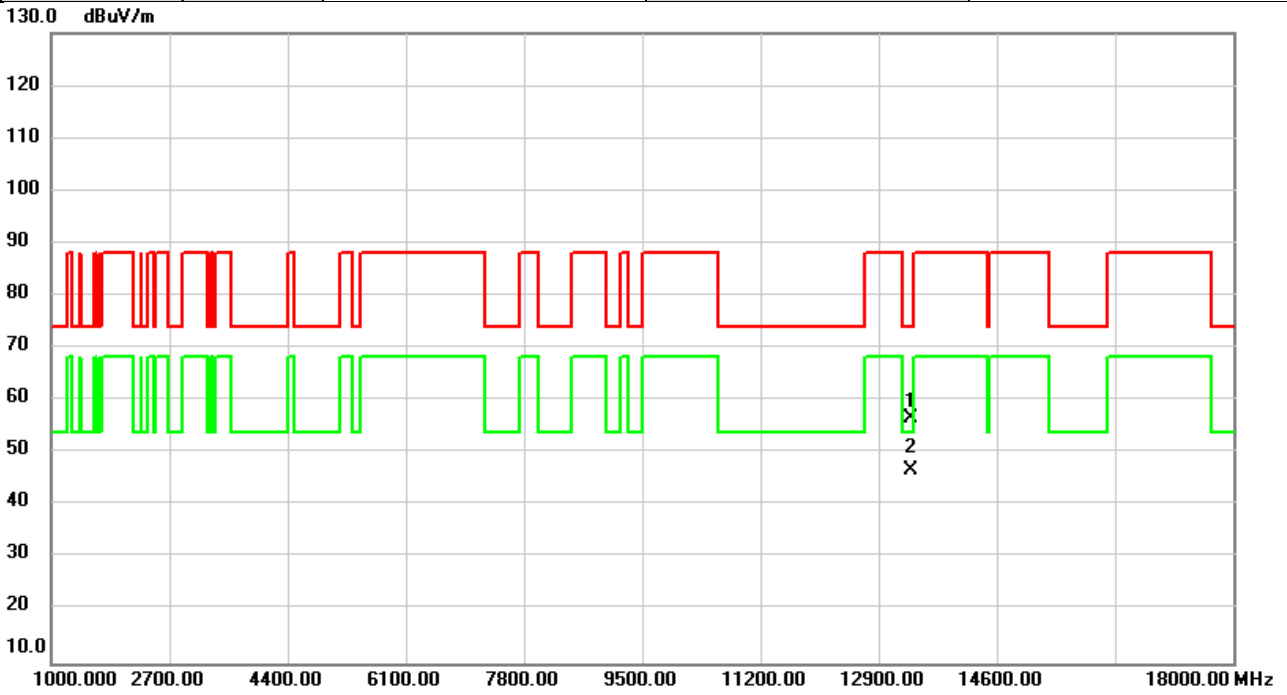


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13370.00	48.06	8.62	56.68	74.00	-17.32	peak	
2	*	13370.00	38.15	8.62	46.77	54.00	-7.23	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6845MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

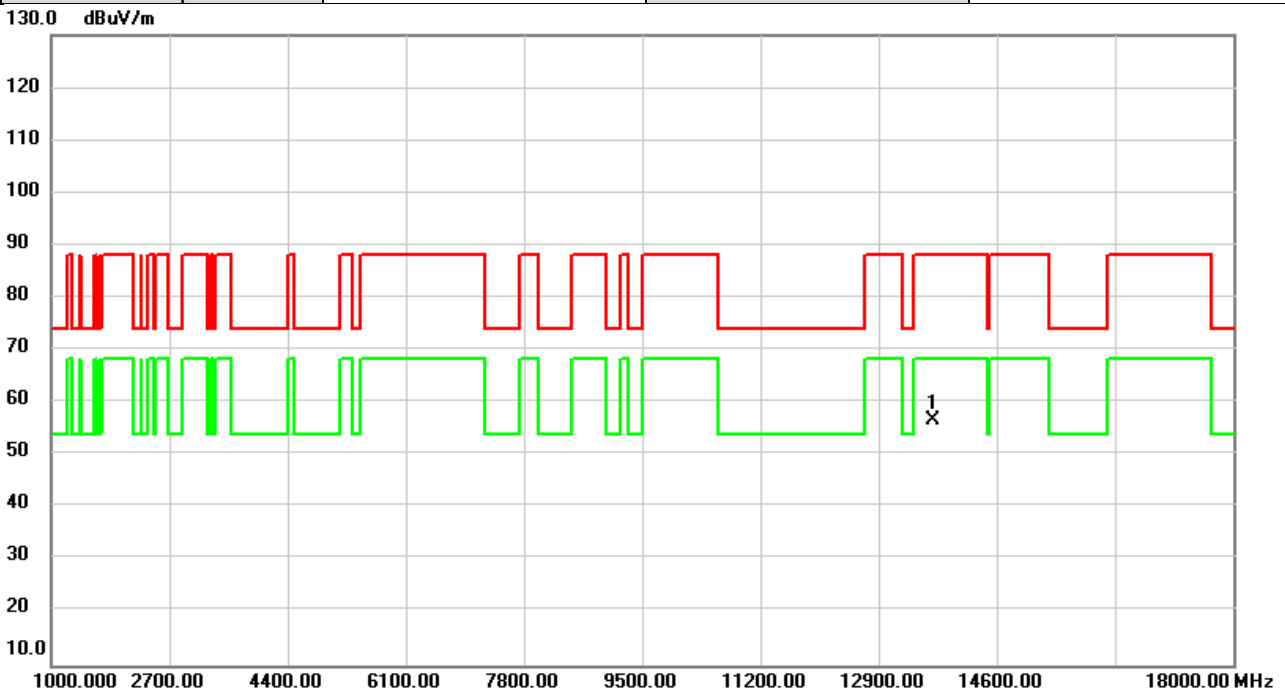


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13690.00	48.19	8.43	56.62	88.20	-31.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6845MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

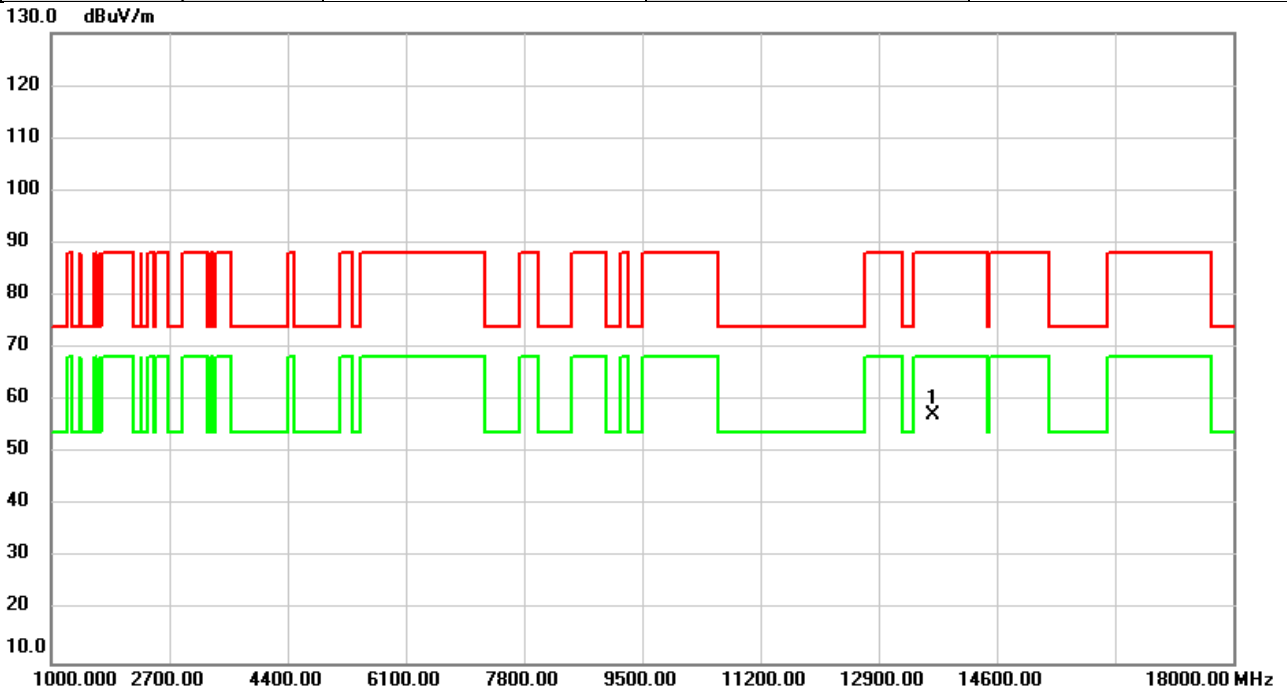


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13690.00	48.81	8.43	57.24	88.20	-30.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6885MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

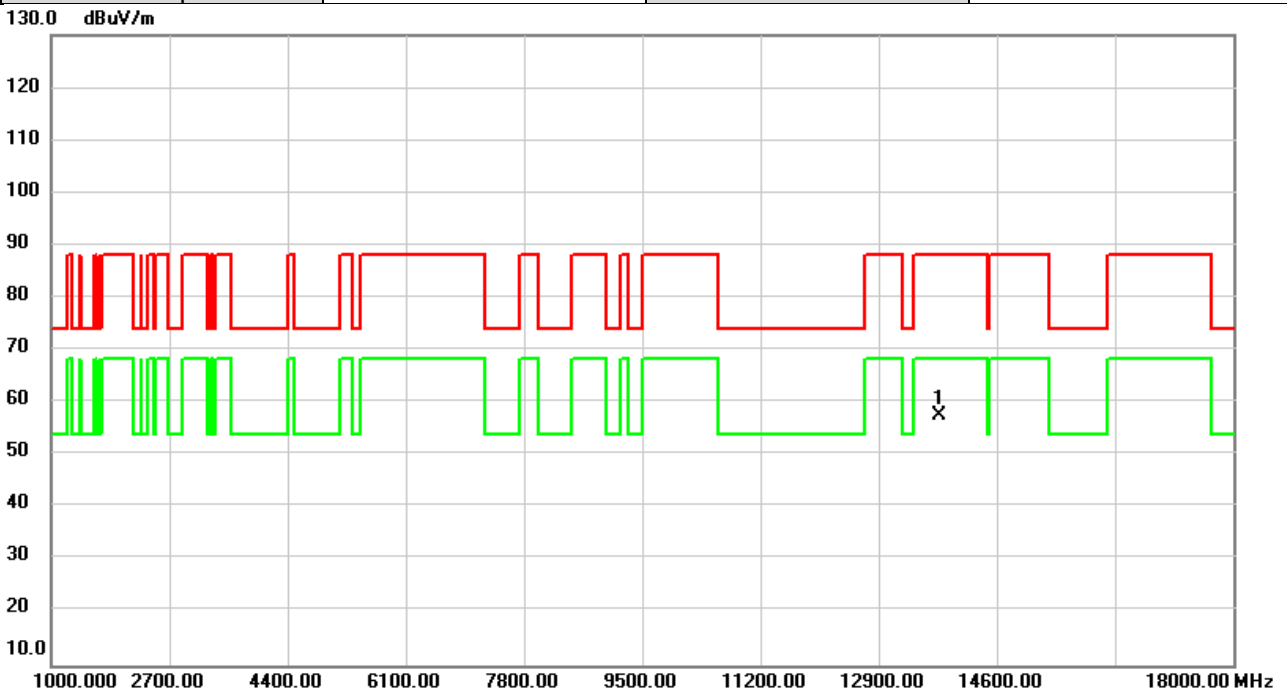


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13770.00	49.03	8.38	57.41	88.20	-30.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	6885MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

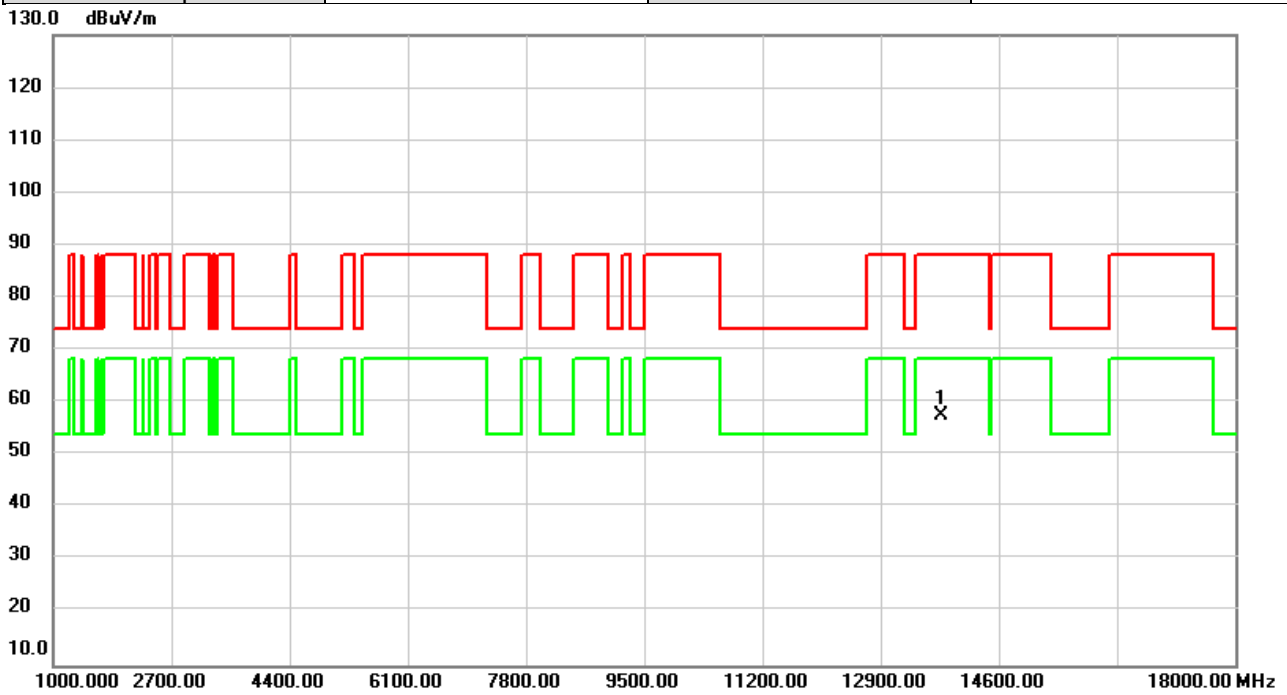


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13770.00	49.04	8.38	57.42	88.20	-30.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	7085MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

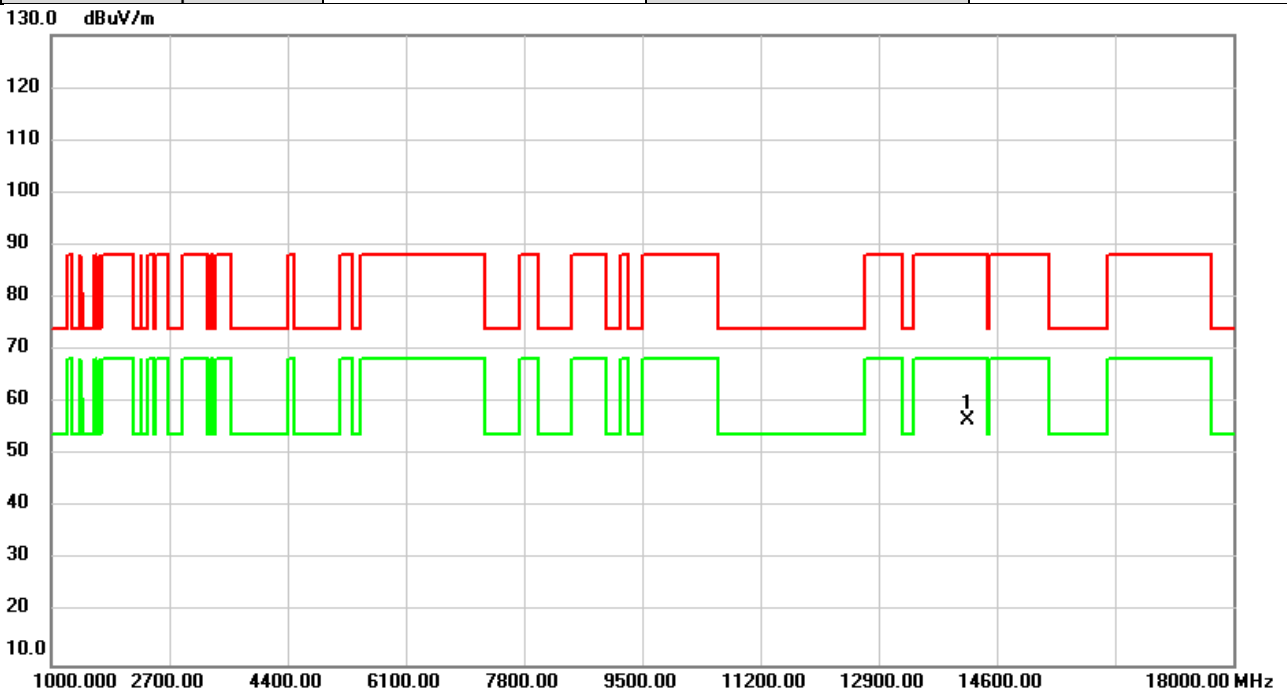


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14170.00	48.60	8.19	56.79	88.20	-31.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/16
Test Frequency	7085MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

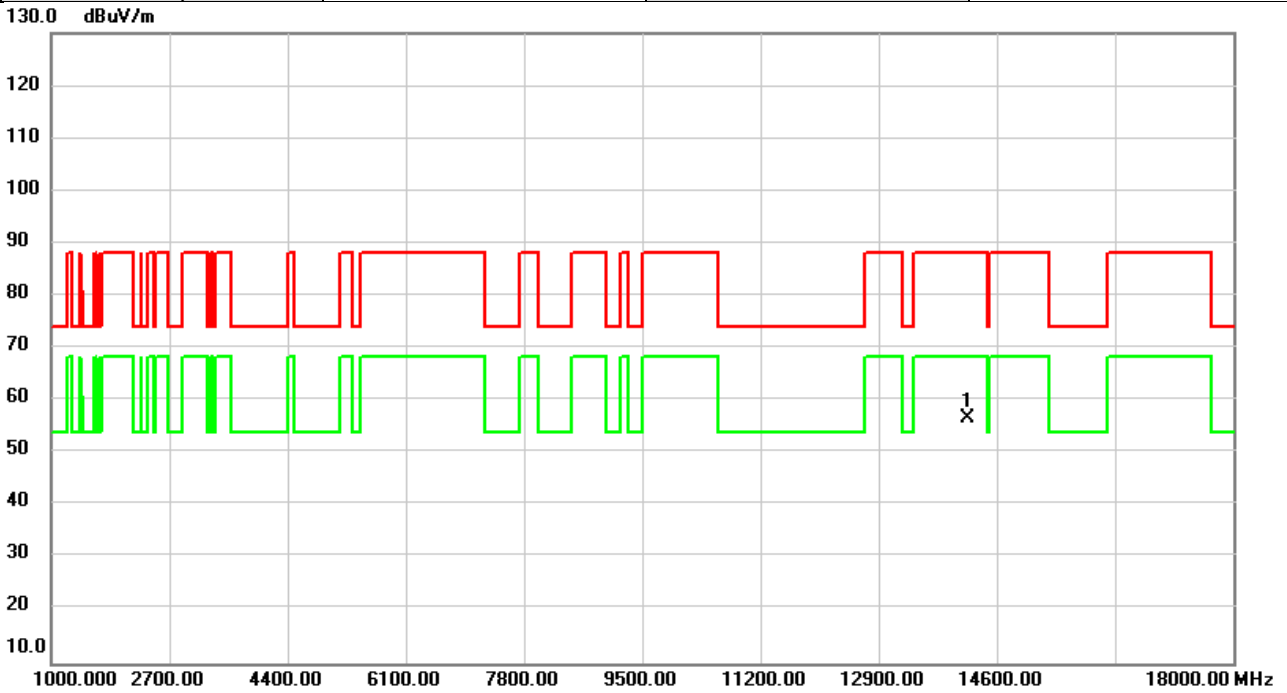


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14170.00	48.47	8.19	56.66	88.20	-31.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	5985MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

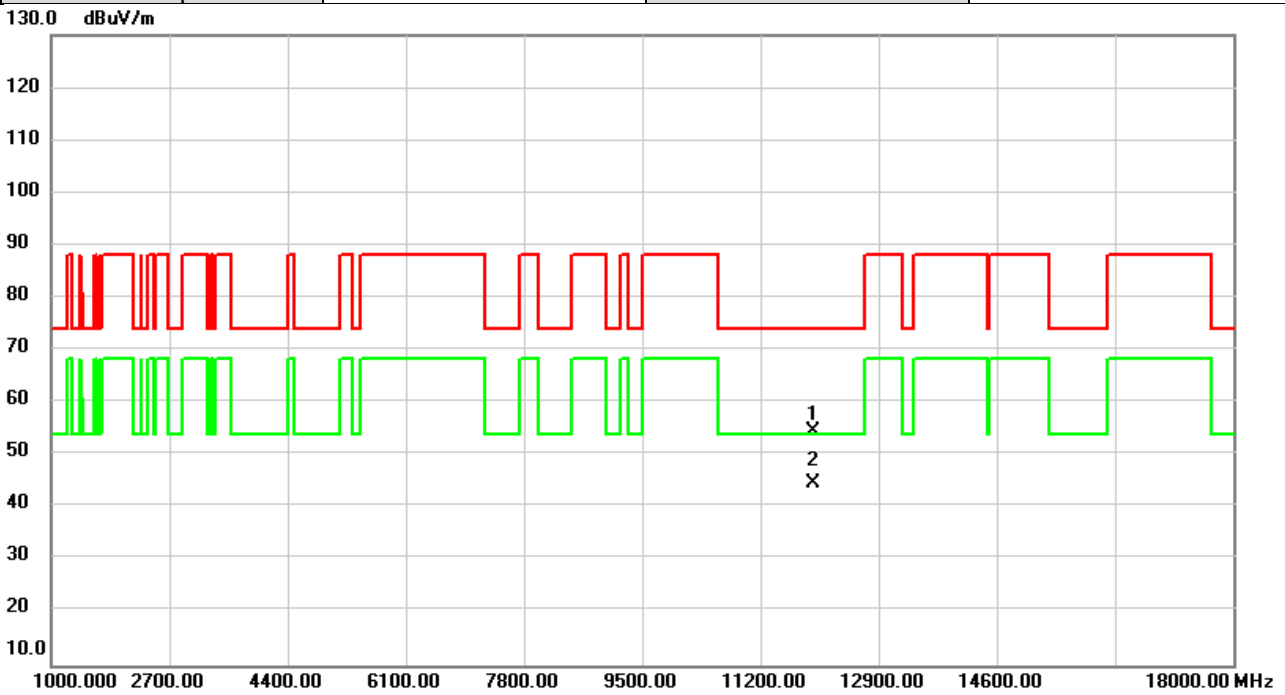


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11970.00	46.95	7.72	54.67	74.00	-19.33	peak	
2	*	11970.00	36.87	7.72	44.59	54.00	-9.41	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	5985MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

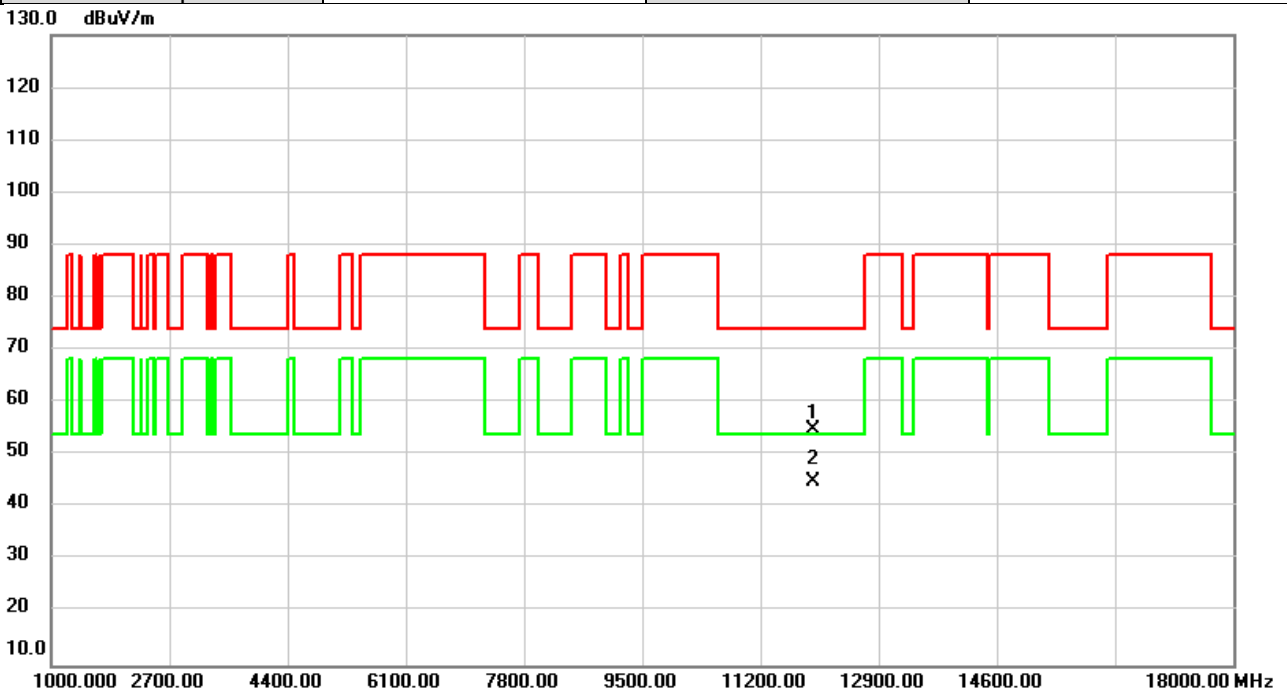


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11970.00	47.01	7.72	54.73	74.00	-19.27	peak	
2	*	11970.00	37.22	7.72	44.94	54.00	-9.06	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6145MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

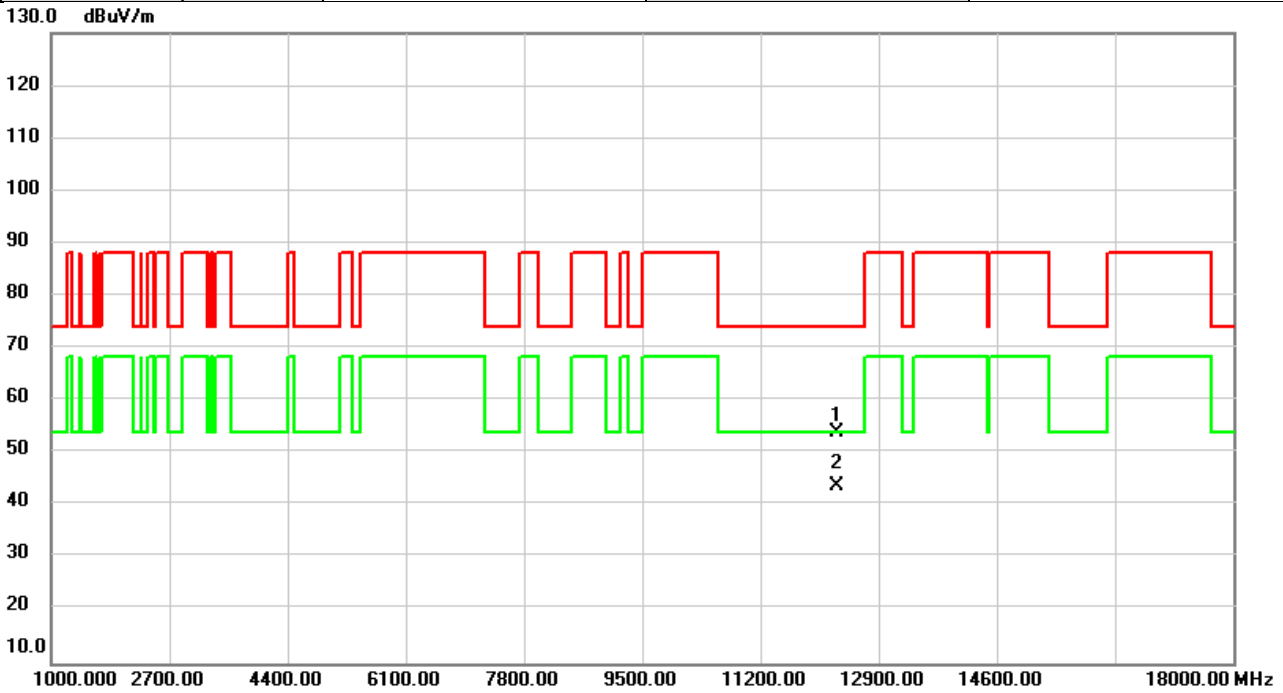


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12290.00	46.18	7.79	53.97	74.00	-20.03	peak	
2	*	12290.00	35.99	7.79	43.78	54.00	-10.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6145MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

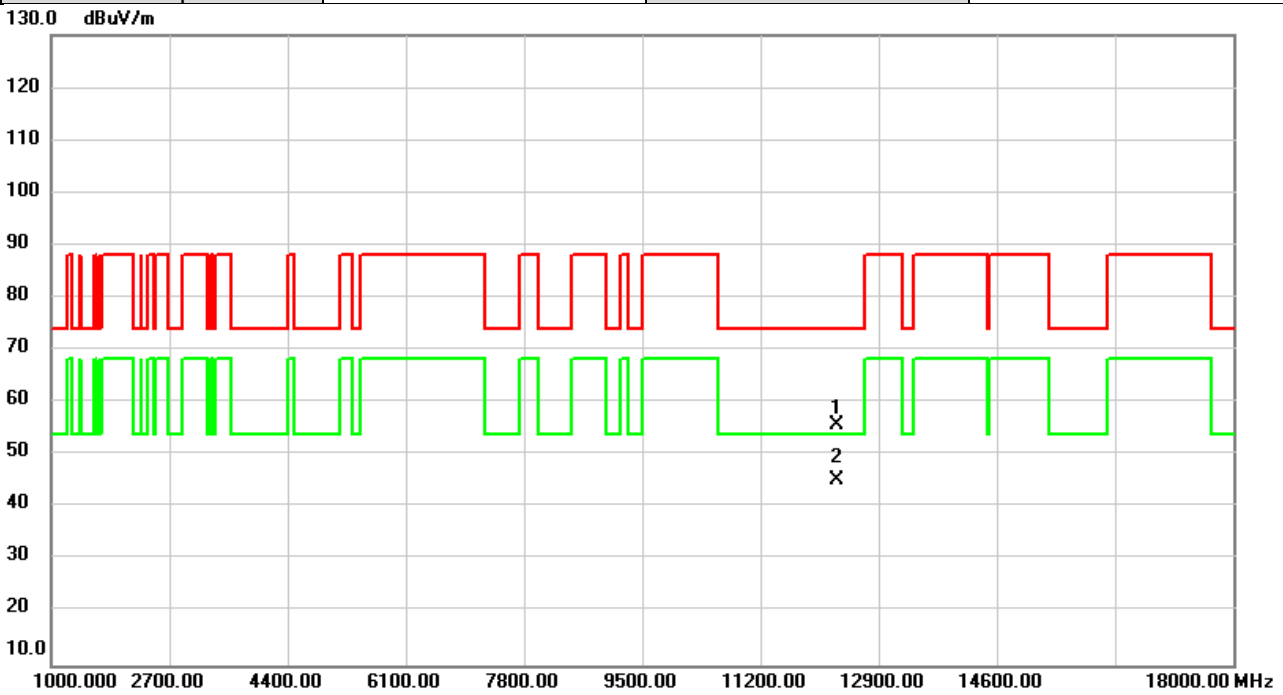


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12290.00	47.93	7.79	55.72	74.00	-18.28	peak	
2	*	12290.00	37.56	7.79	45.35	54.00	-8.65	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6385MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

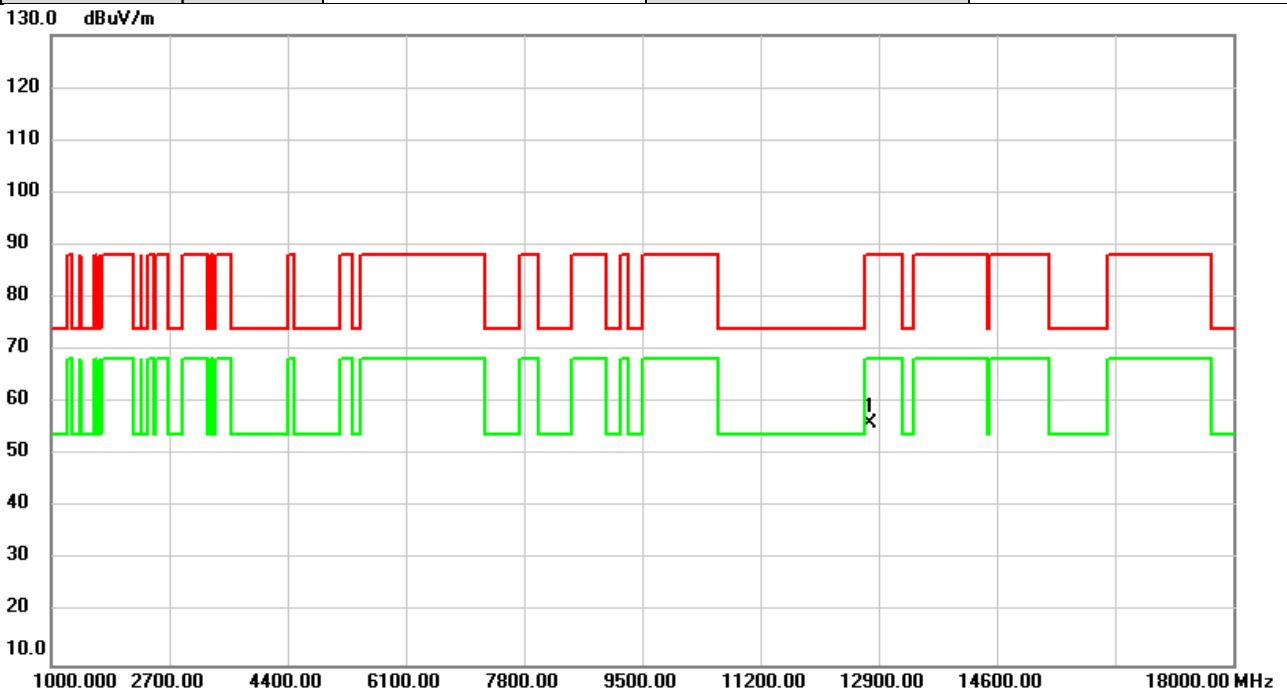


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12770.00	47.65	8.31	55.96	88.20	-32.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6385MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

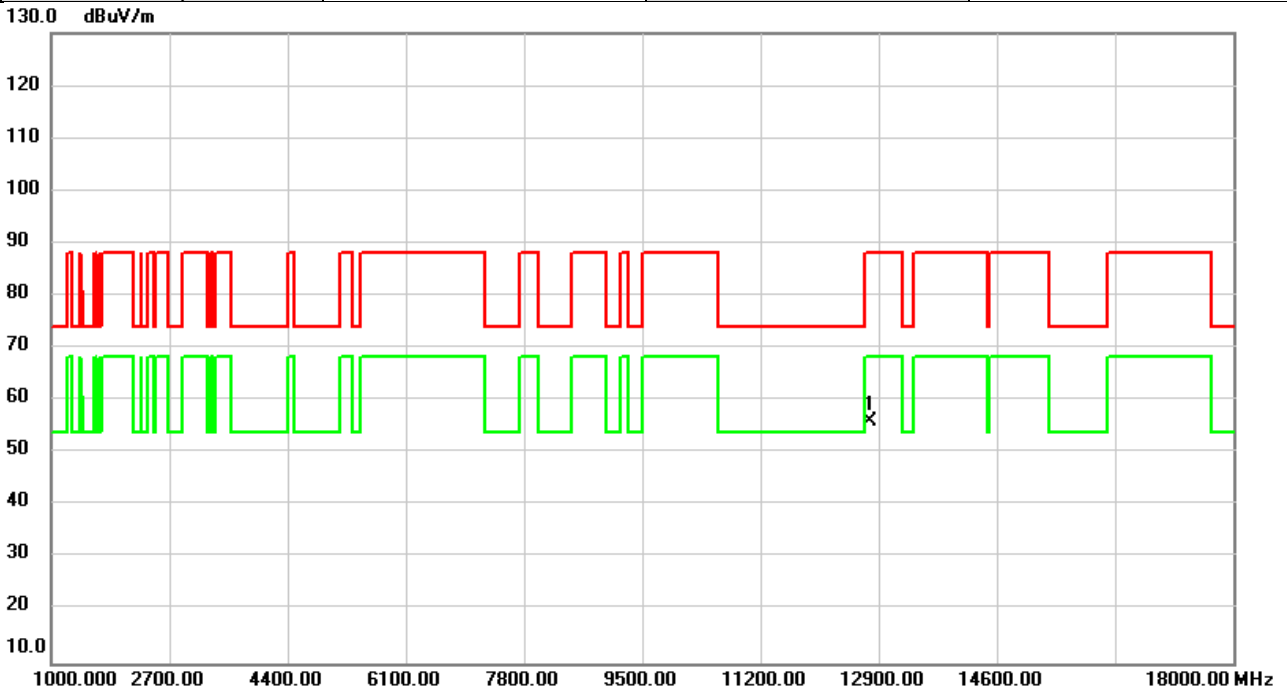


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12770.00	47.74	8.31	56.05	88.20	-32.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6465MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

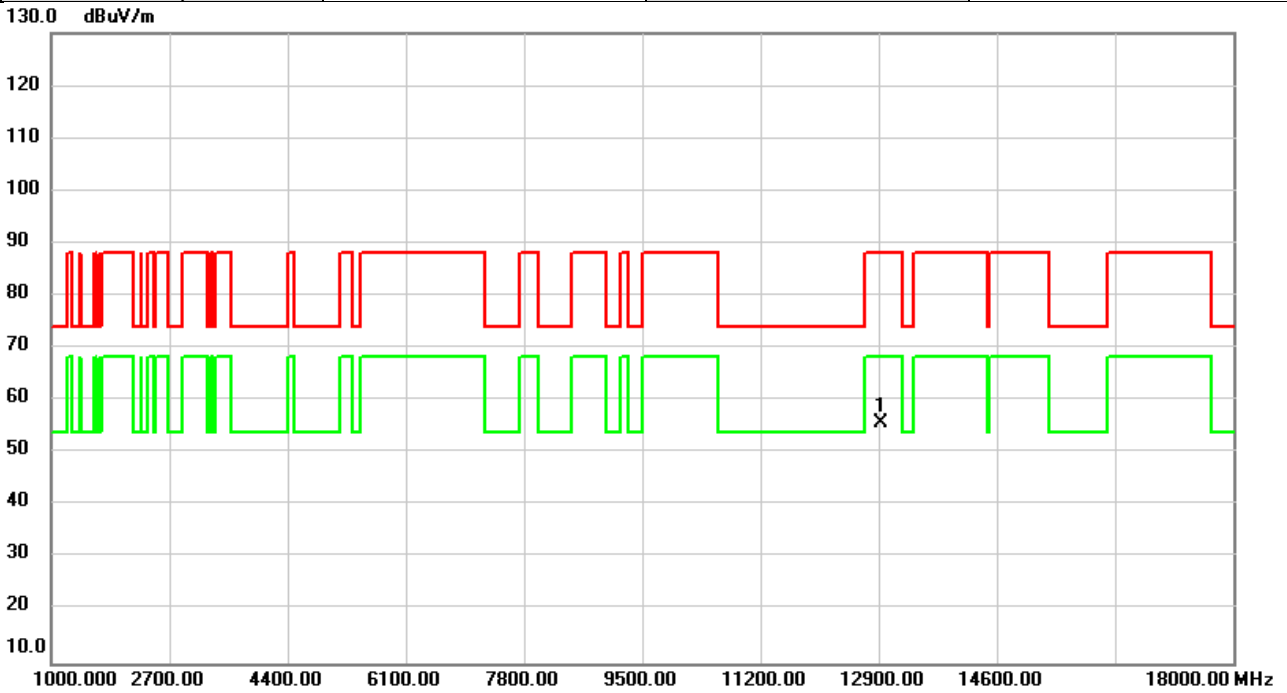


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12930.00	47.17	8.61	55.78	88.20	-32.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6465MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

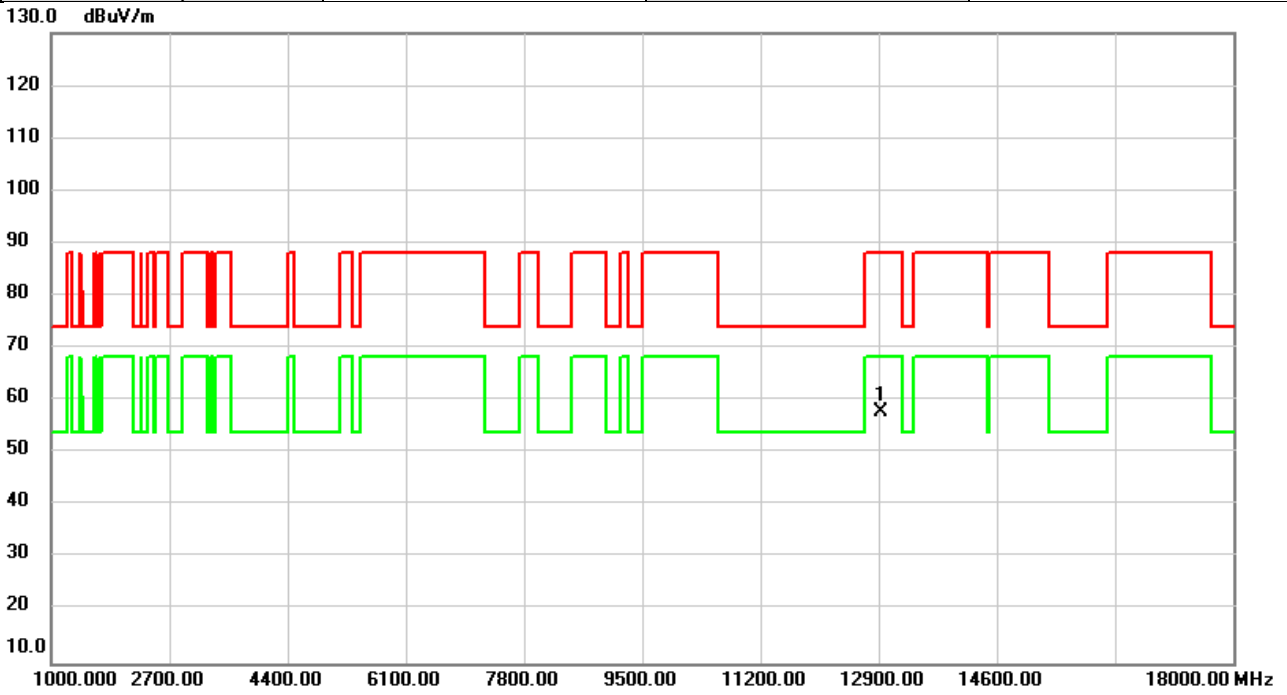


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12930.00	49.30	8.61	57.91	88.20	-30.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6545MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

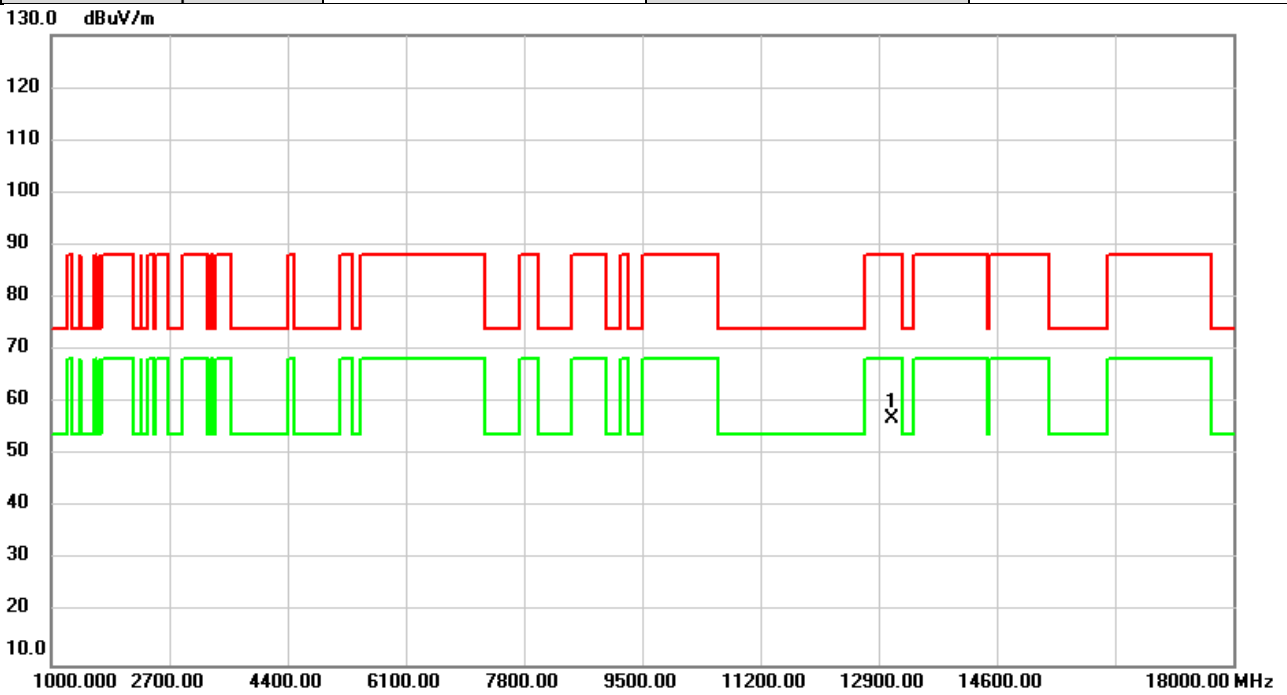


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13090.00	48.28	8.71	56.99	88.20	-31.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6545MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

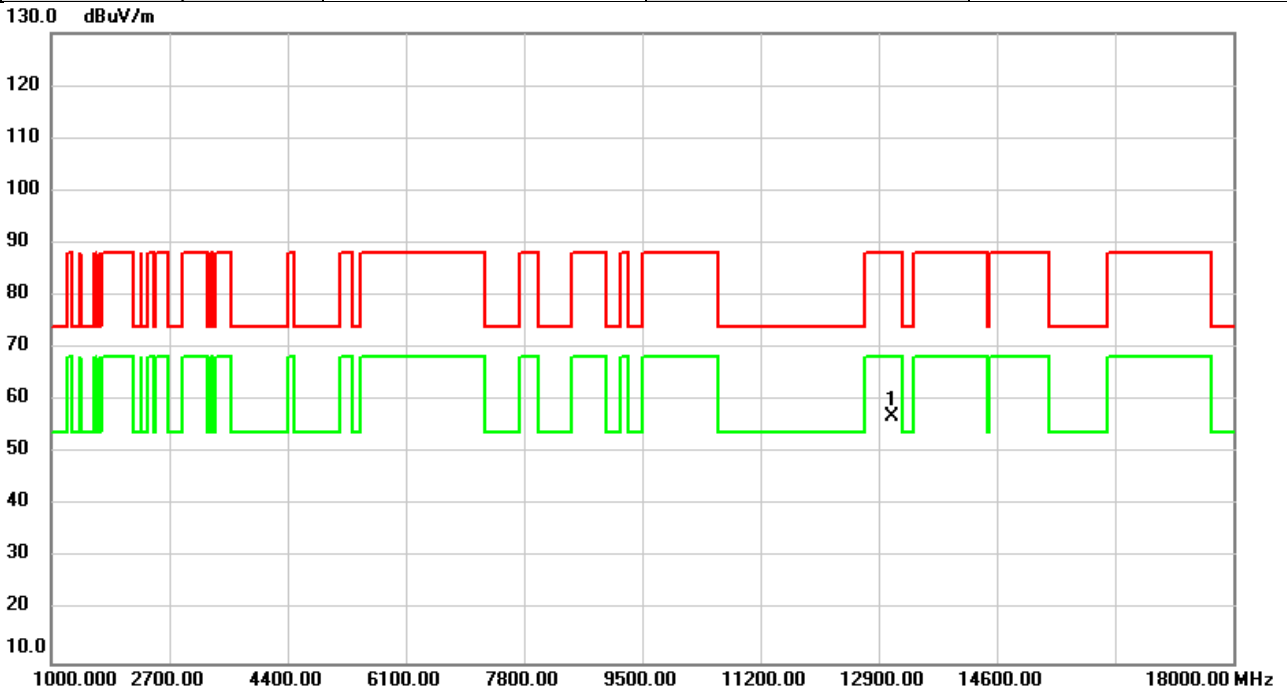


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13090.00	48.15	8.71	56.86	88.20	-31.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6625MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

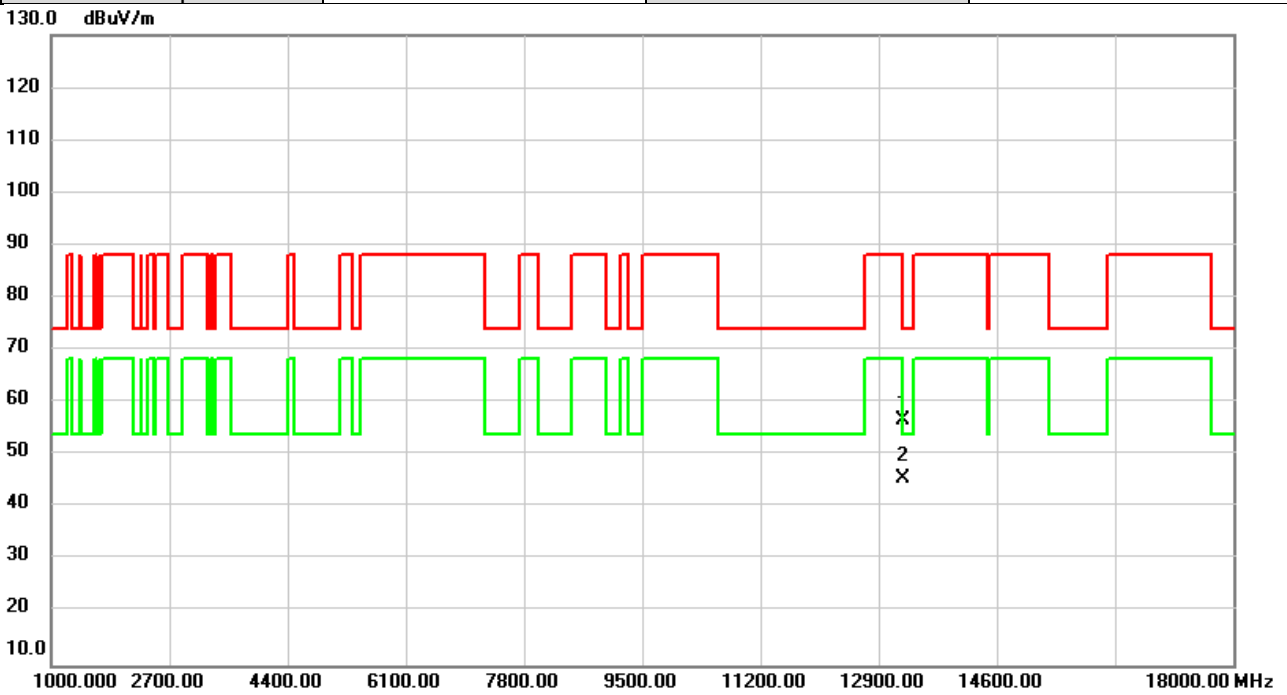


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13250.00	47.93	8.66	56.59	74.00	-17.41	peak	
2	*	13250.00	36.83	8.66	45.49	54.00	-8.51	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6625MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

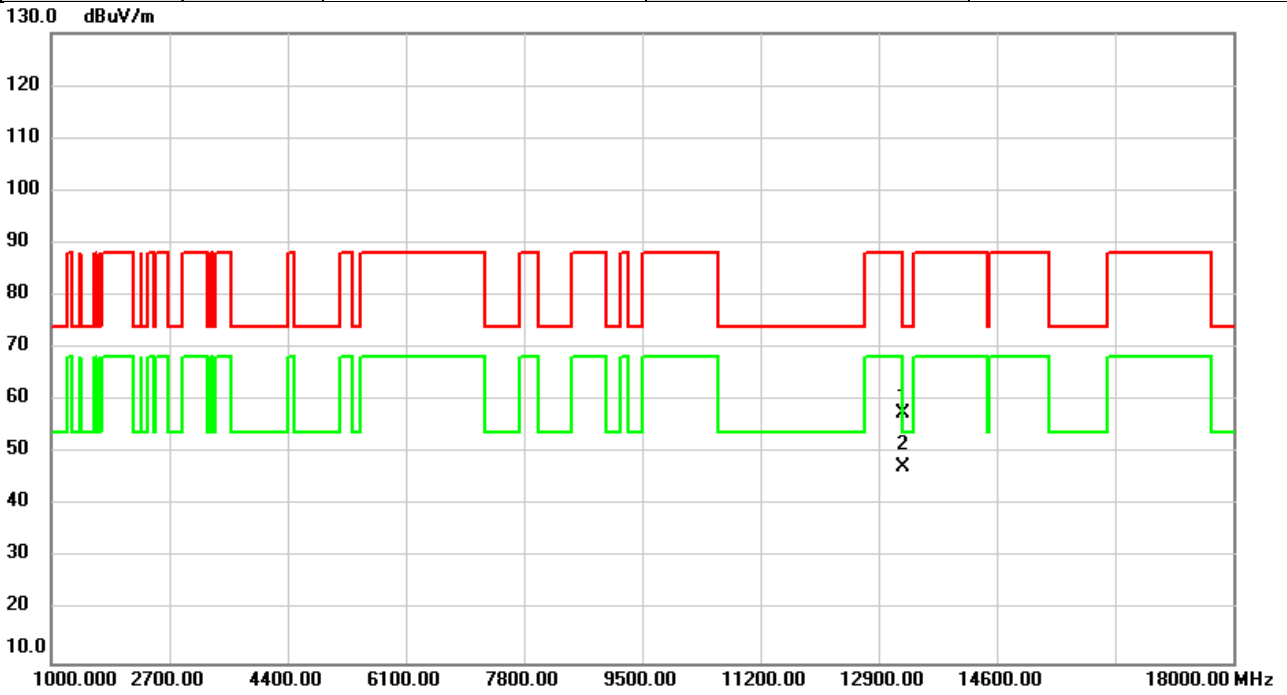


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13250.00	48.75	8.66	57.41	74.00	-16.59	peak	
2	*	13250.00	38.59	8.66	47.25	54.00	-6.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6785MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

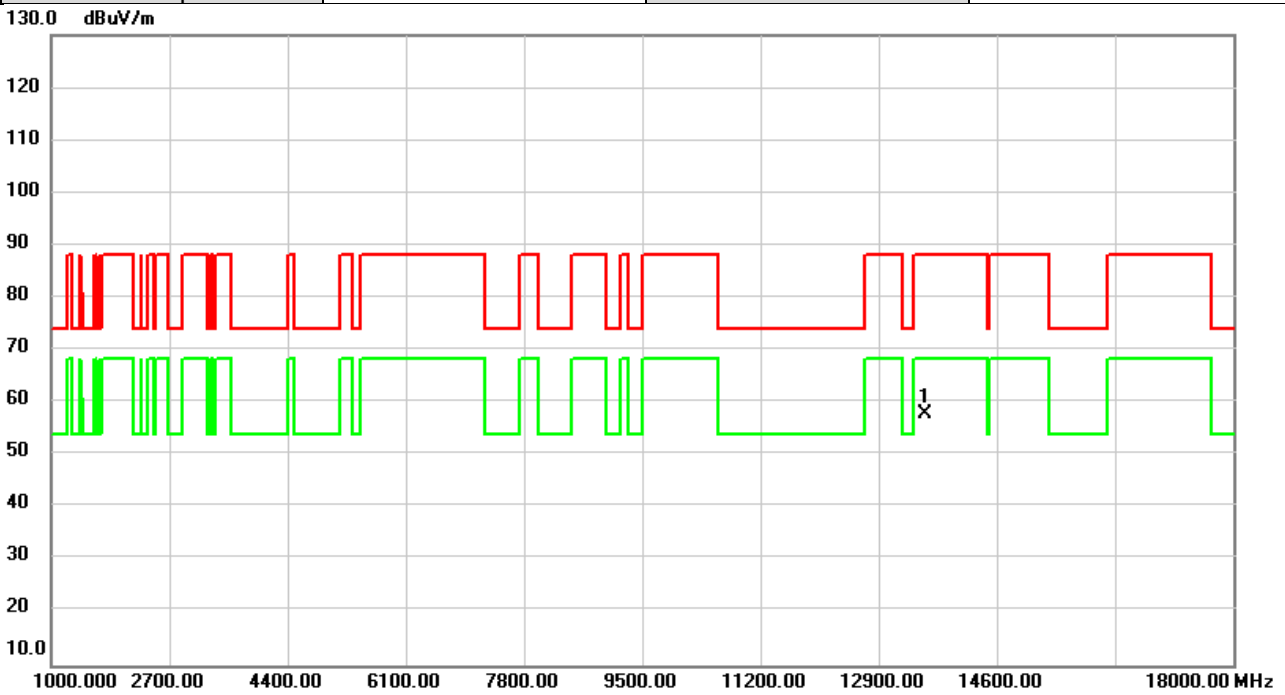


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13570.00	49.30	8.53	57.83	88.20	-30.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6785MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

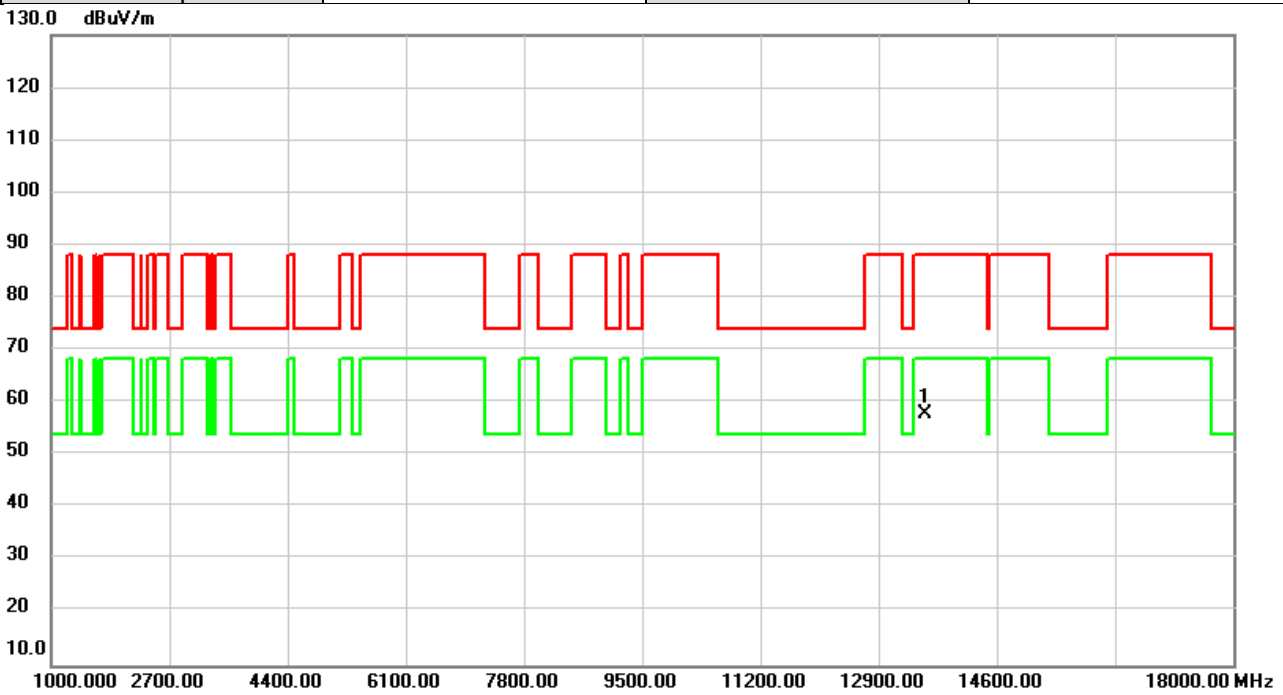


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13570.00	49.39	8.53	57.92	88.20	-30.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6865MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

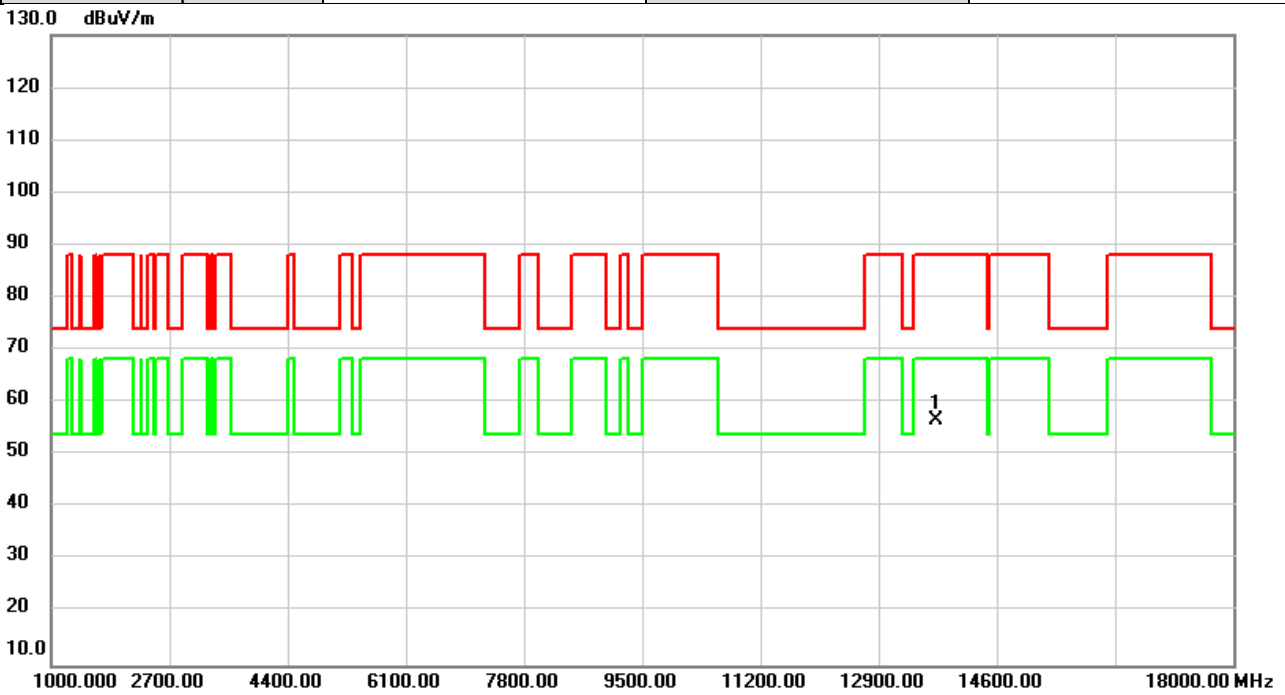


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13730.00	48.21	8.41	56.62	88.20	-31.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6865MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

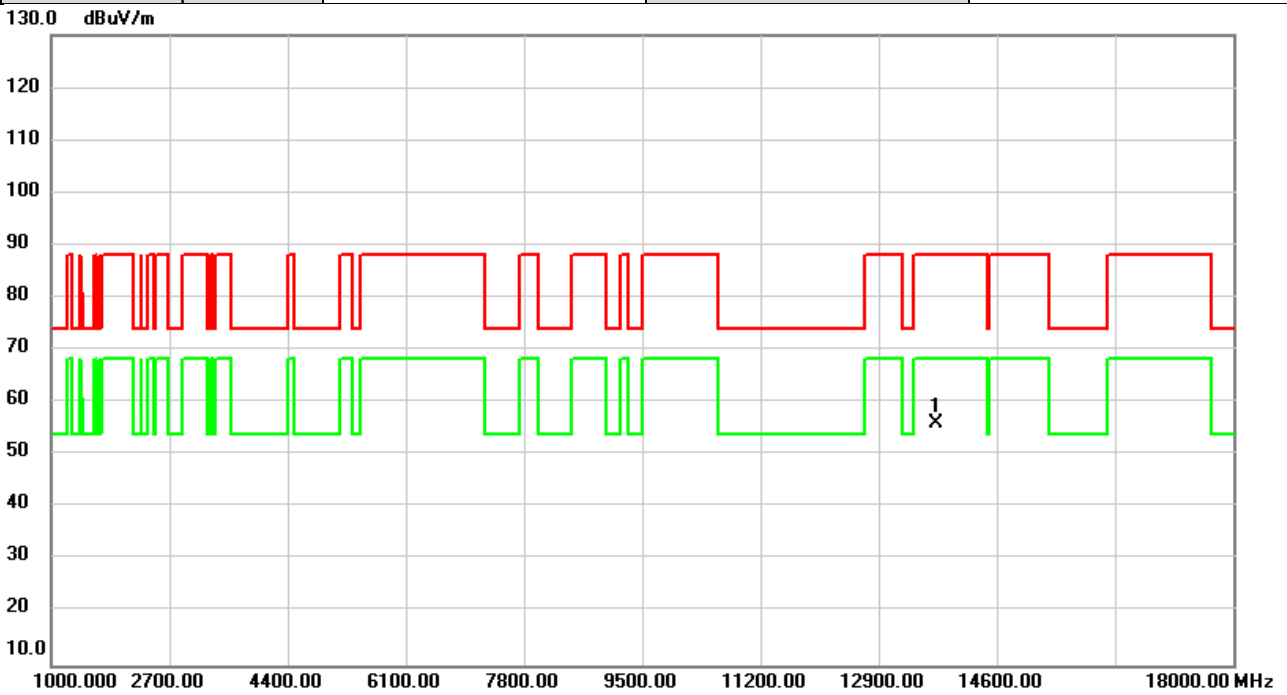


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13730.00	47.72	8.41	56.13	88.20	-32.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6945MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

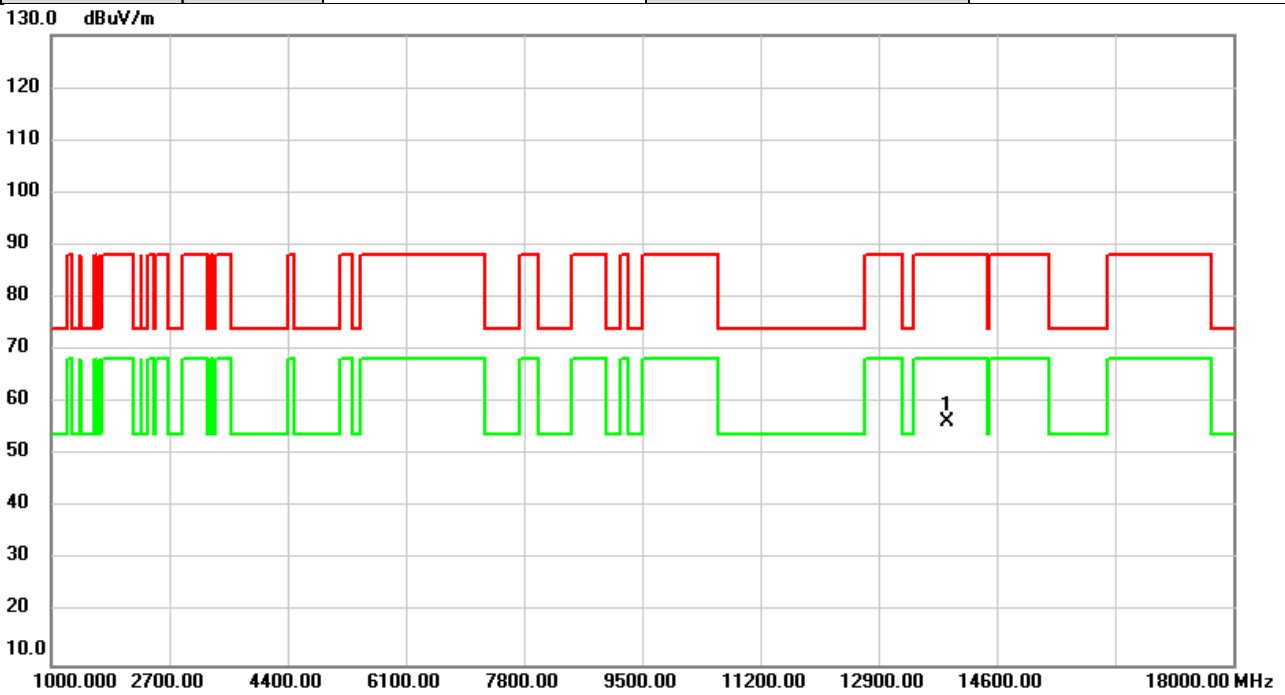


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13890.00	47.97	8.29	56.26	88.20	-31.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	6945MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

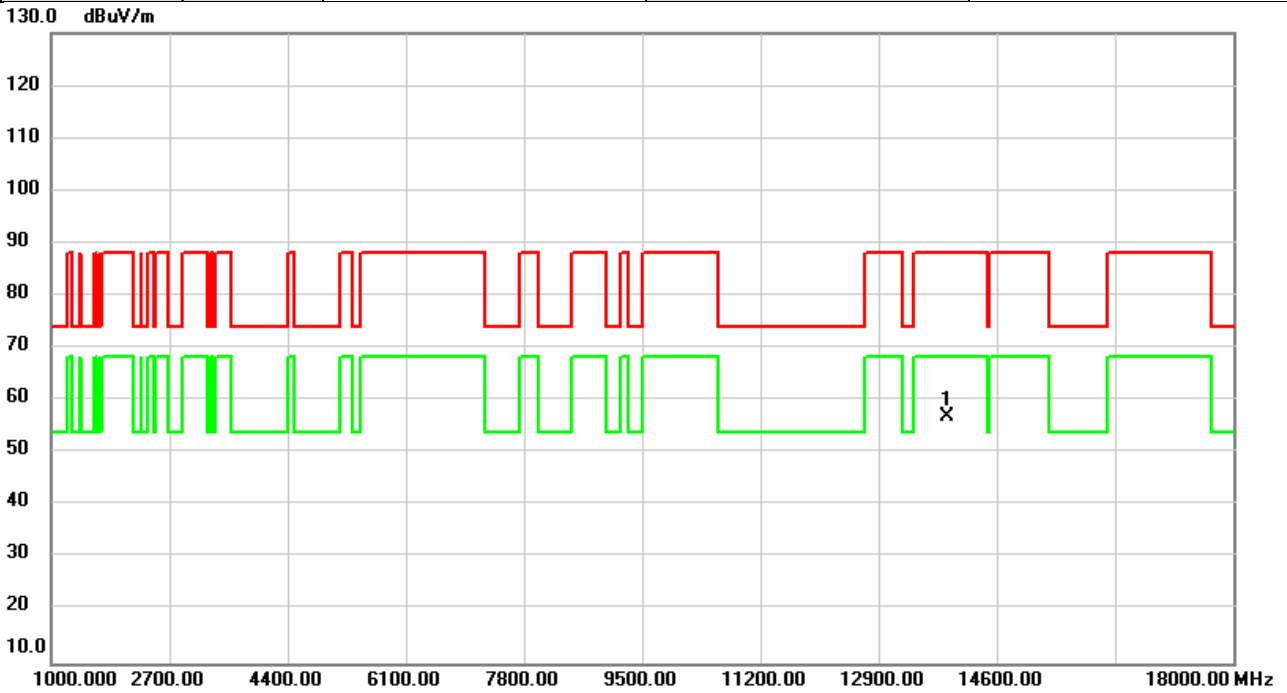


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13890.00	48.76	8.29	57.05	88.20	-31.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	7025MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

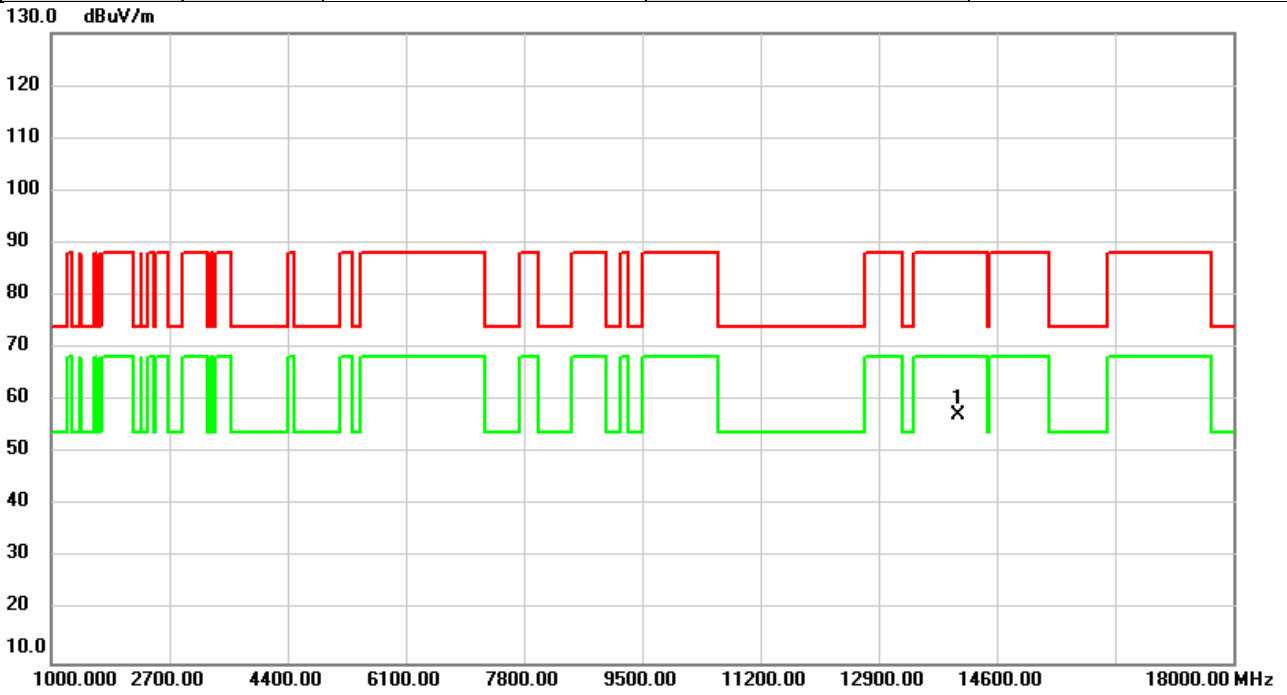


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14050.00	49.17	8.20	57.37	88.20	-30.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/16
Test Frequency	7025MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

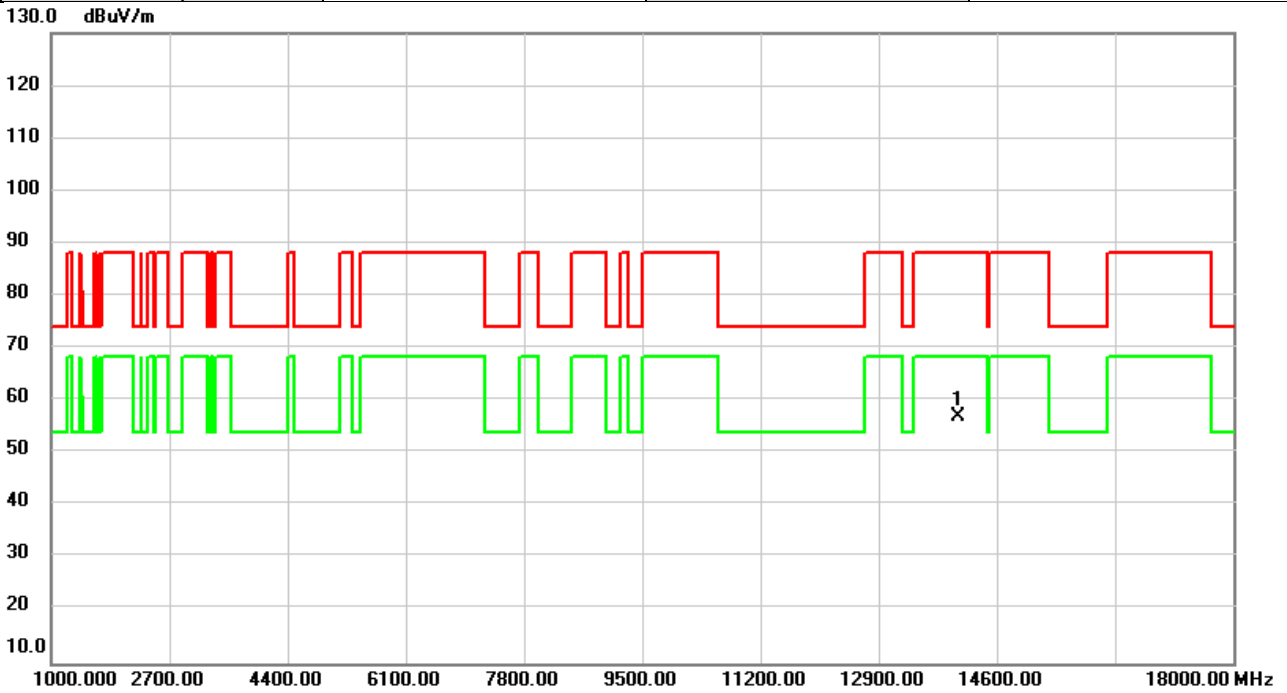


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14050.00	48.87	8.20	57.07	88.20	-31.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6025MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

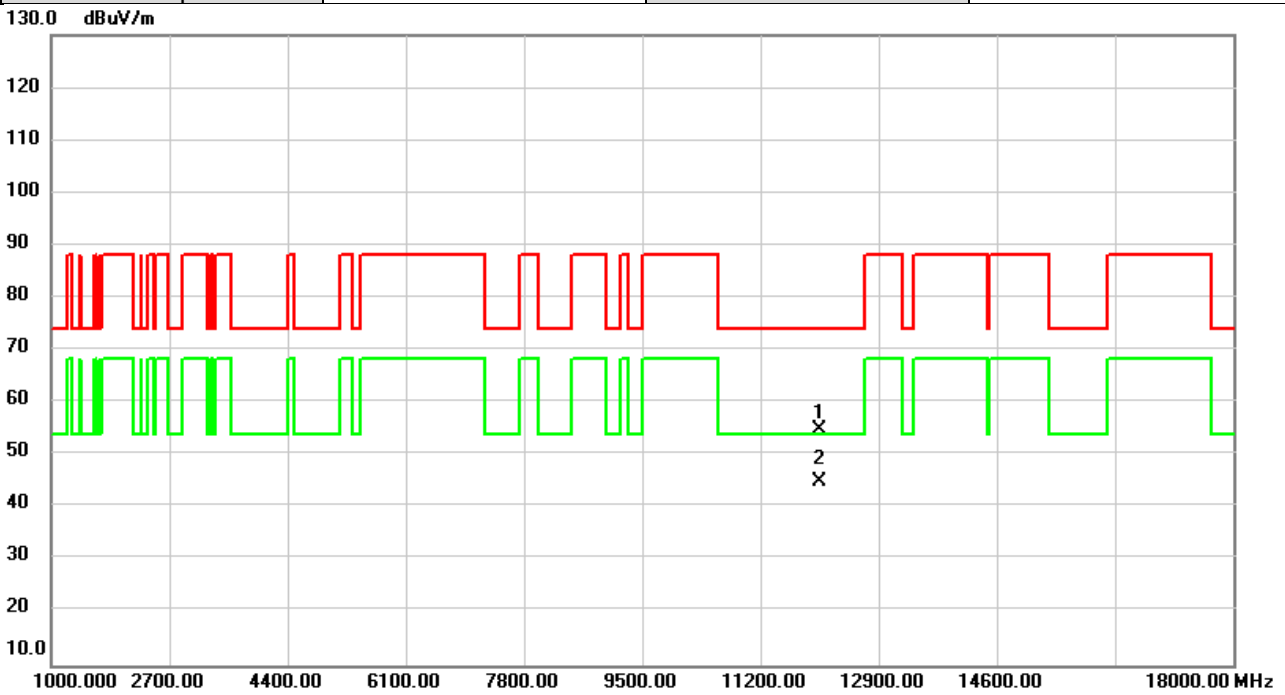


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12050.00	46.95	7.75	54.70	74.00	-19.30	peak	
2	*	12050.00	37.08	7.75	44.83	54.00	-9.17	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6025MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

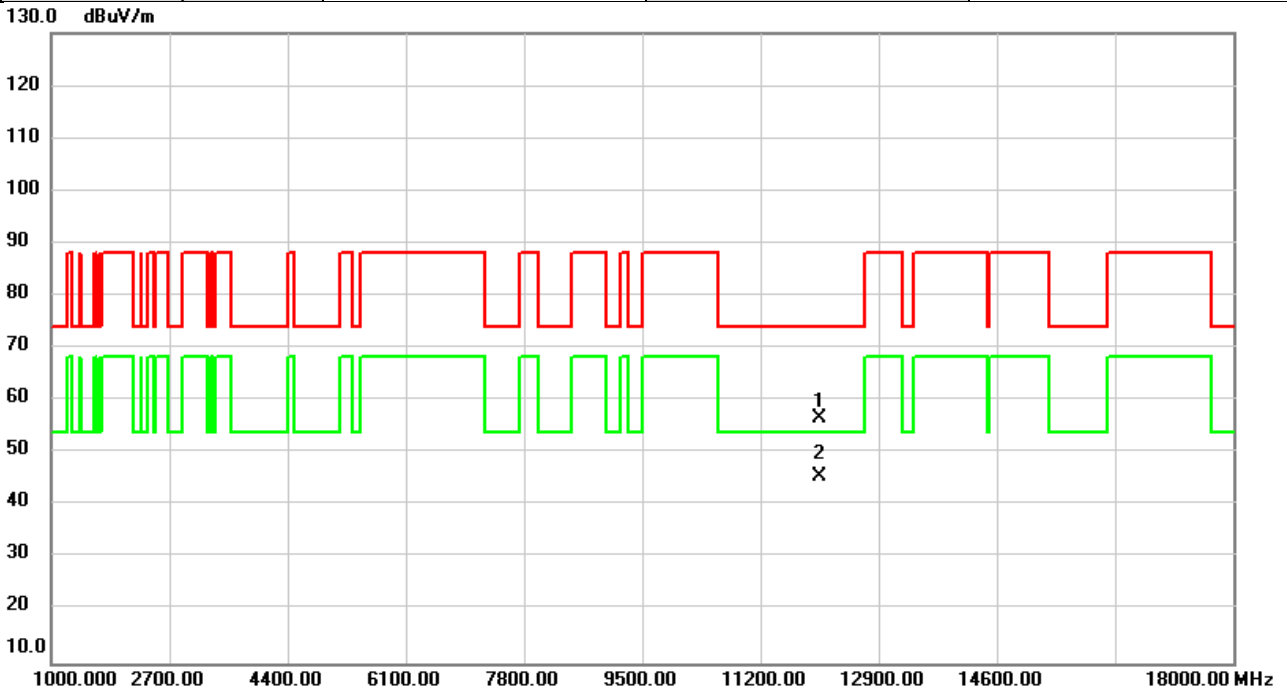


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12050.00	48.83	7.75	56.58	74.00	-17.42	peak	
2	*	12050.00	37.68	7.75	45.43	54.00	-8.57	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6345MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

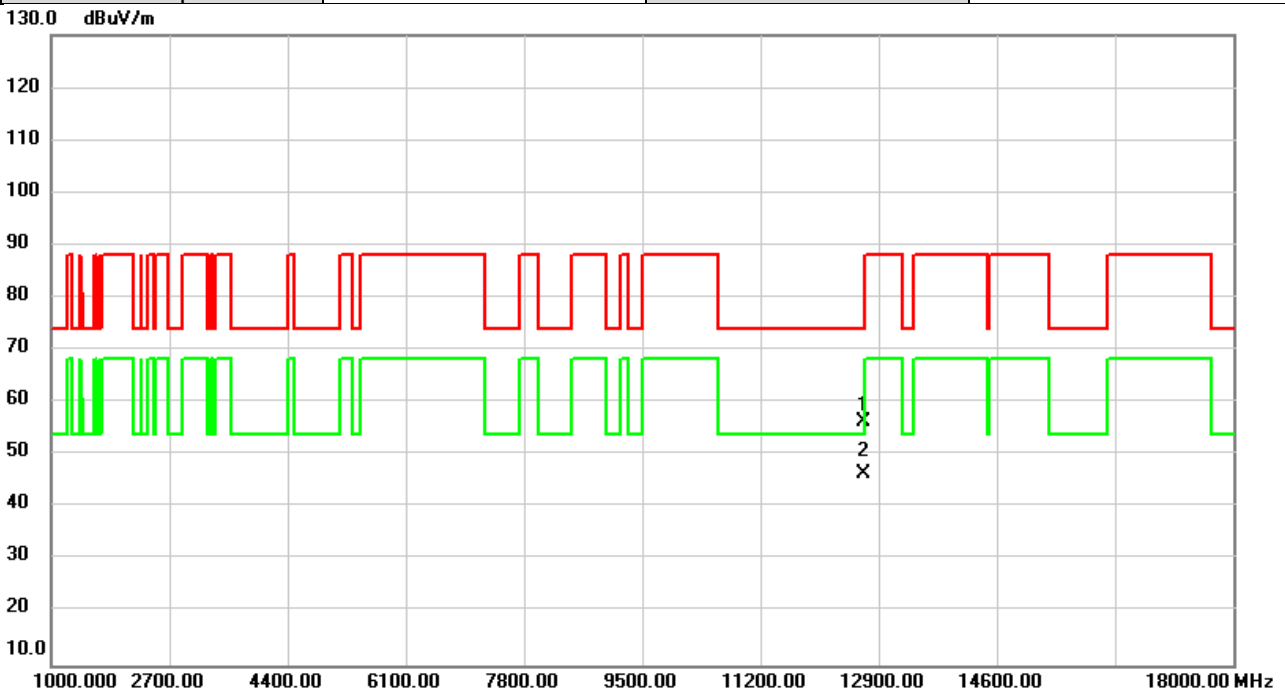


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12690.00	48.28	8.17	56.45	74.00	-17.55	peak	
2	*	12690.00	38.37	8.17	46.54	54.00	-7.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6345MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

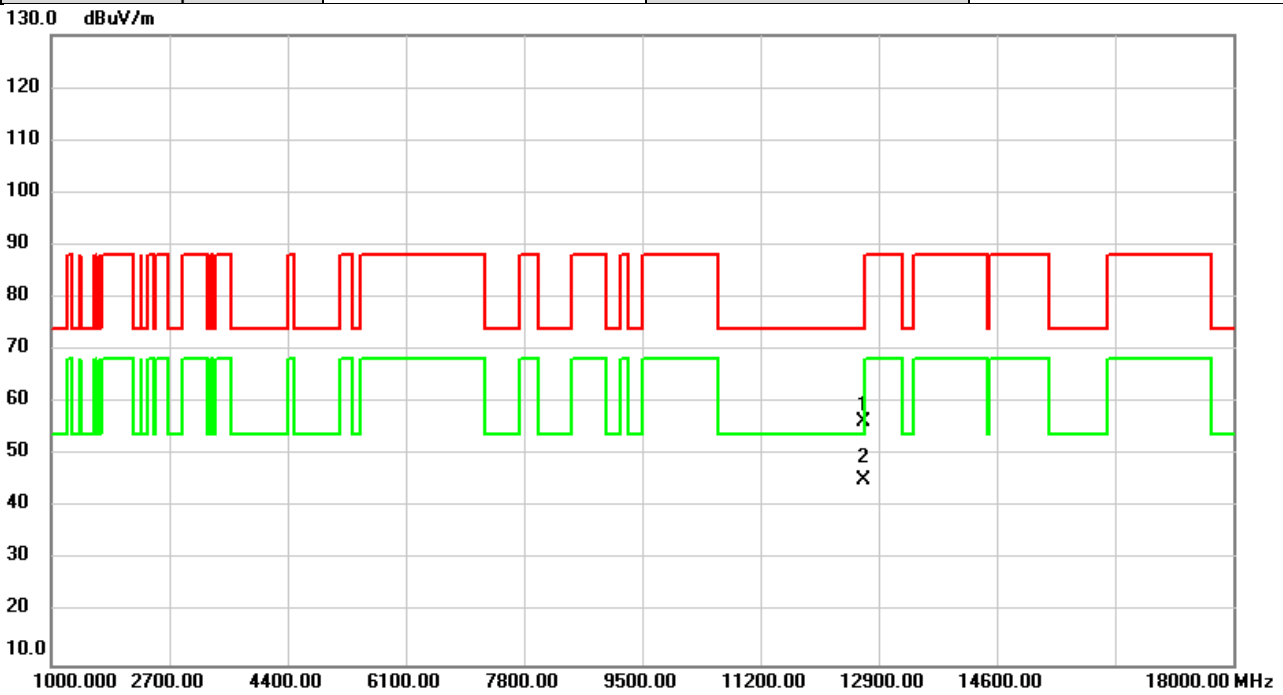


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12690.00	48.29	8.17	56.46	74.00	-17.54	peak	
2	*	12690.00	37.14	8.17	45.31	54.00	-8.69	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6505MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

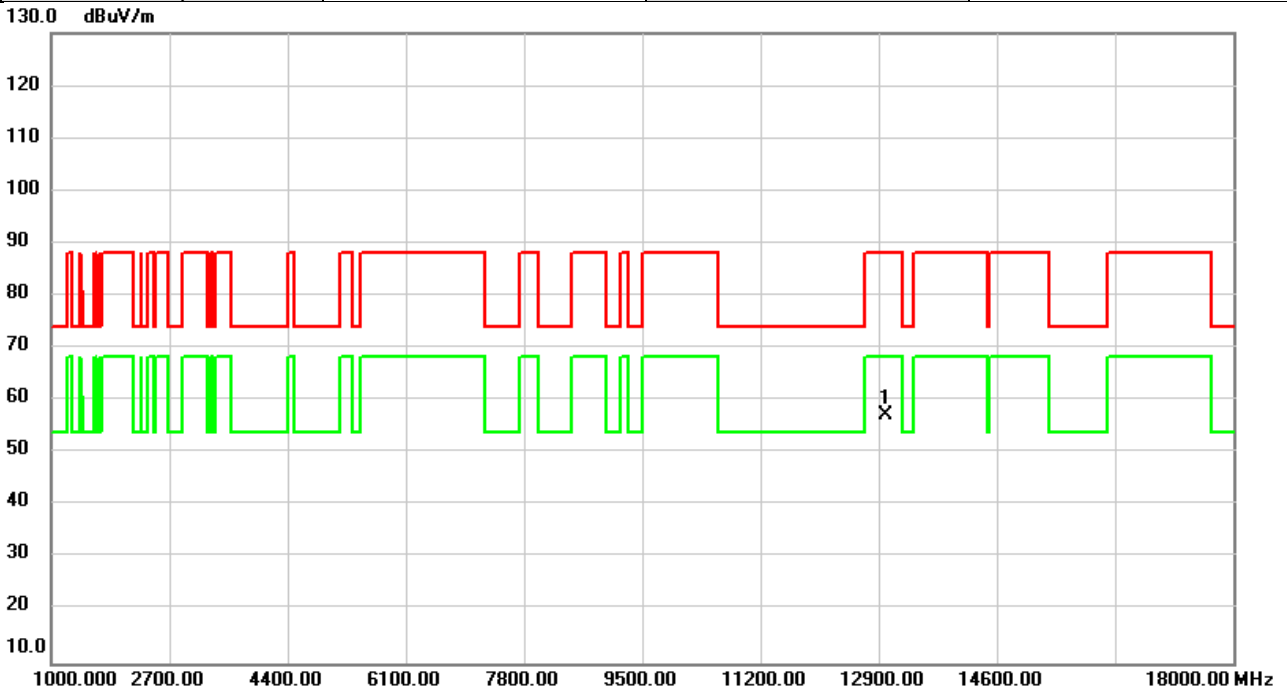


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13010.00	48.39	8.73	57.12	88.20	-31.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6505MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

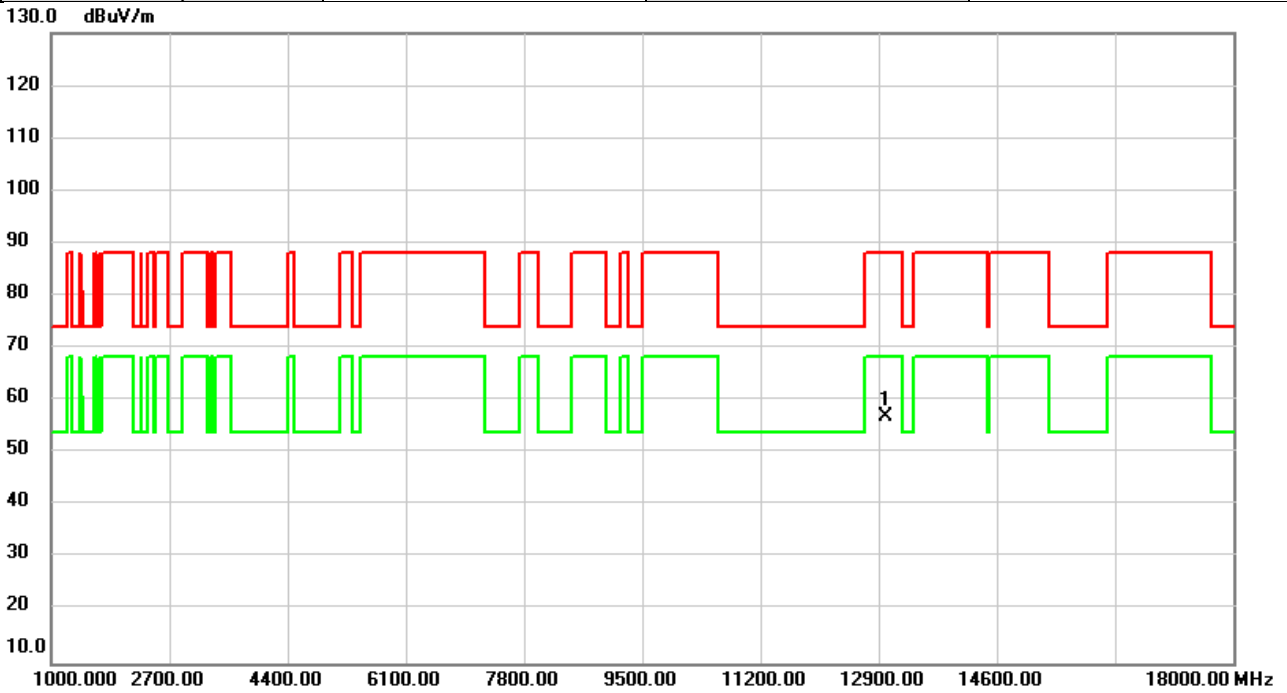


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13010.00	48.20	8.73	56.93	88.20	-31.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6665MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

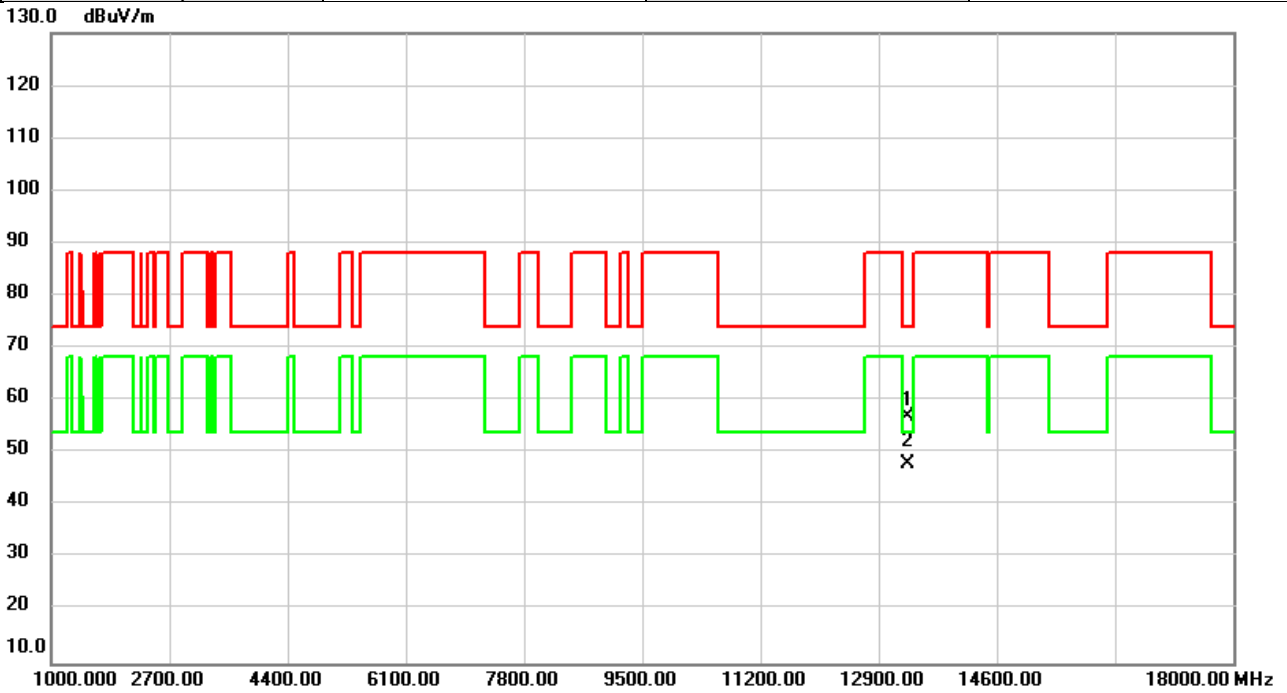


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13330.00	48.40	8.64	57.04	74.00	-16.96	peak	
2	*	13330.00	39.34	8.64	47.98	54.00	-6.02	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6665MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

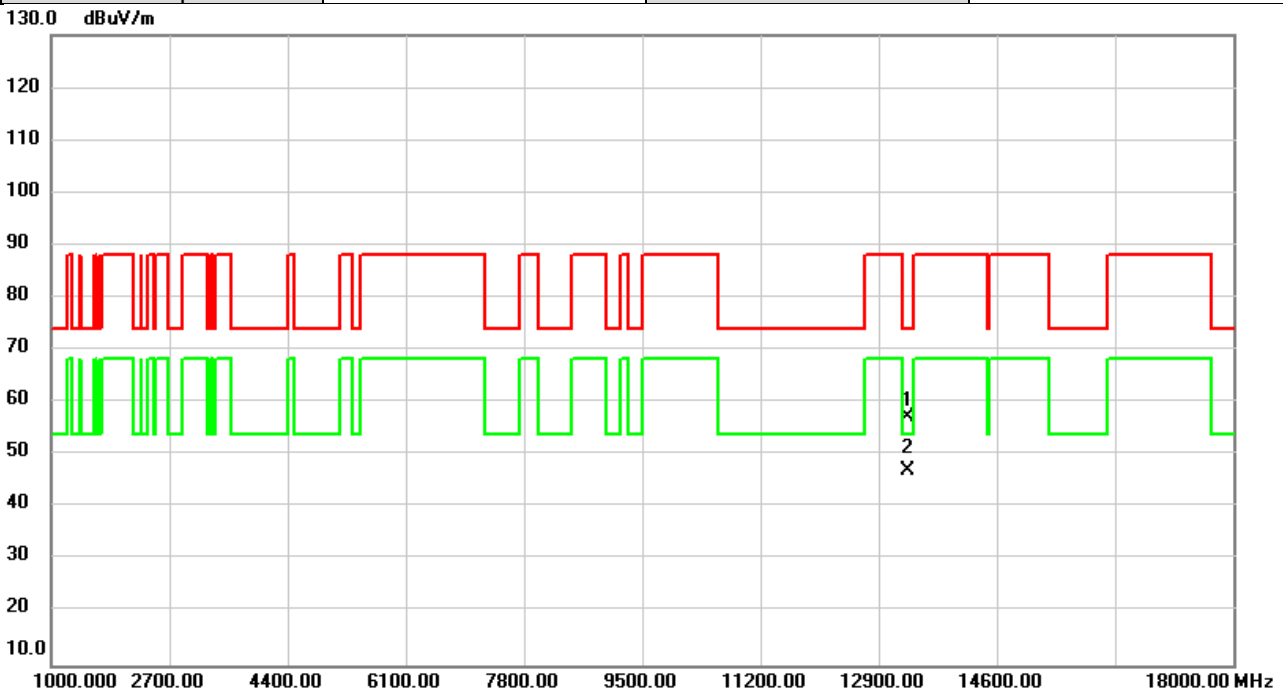


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13330.00	48.61	8.64	57.25	74.00	-16.75	peak	
2	*	13330.00	38.39	8.64	47.03	54.00	-6.97	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6825MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

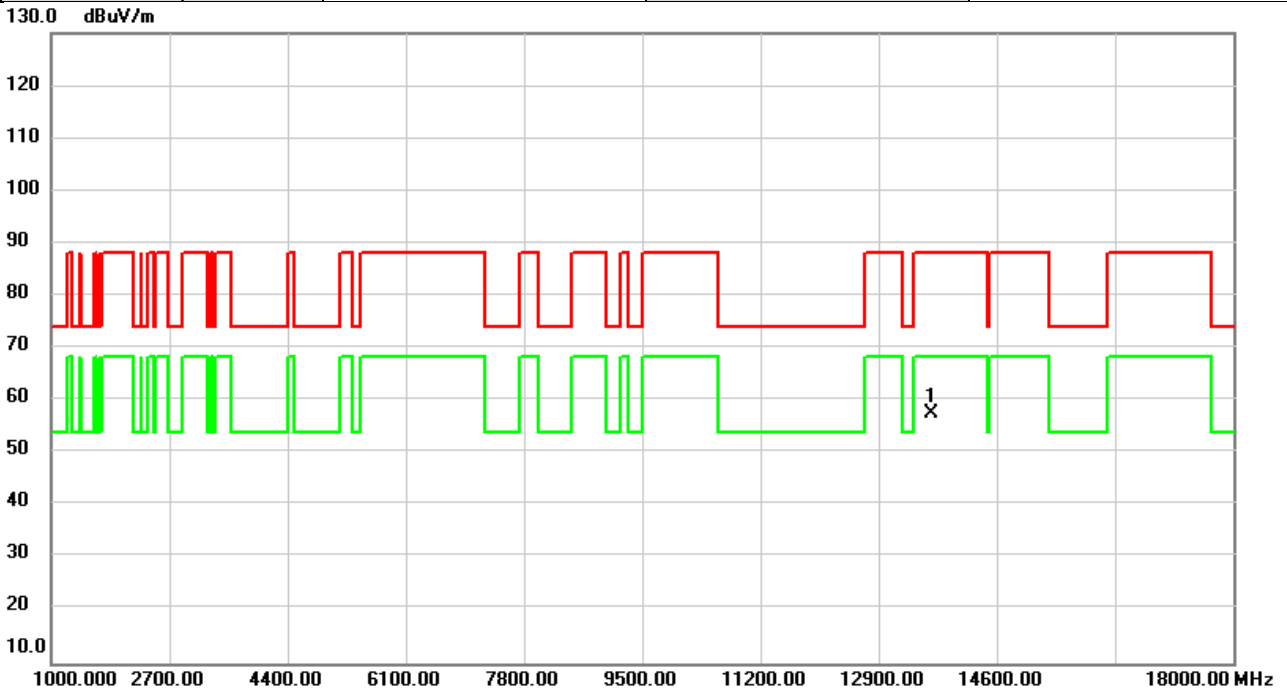


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13650.00	49.06	8.47	57.53	88.20	-30.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6825MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

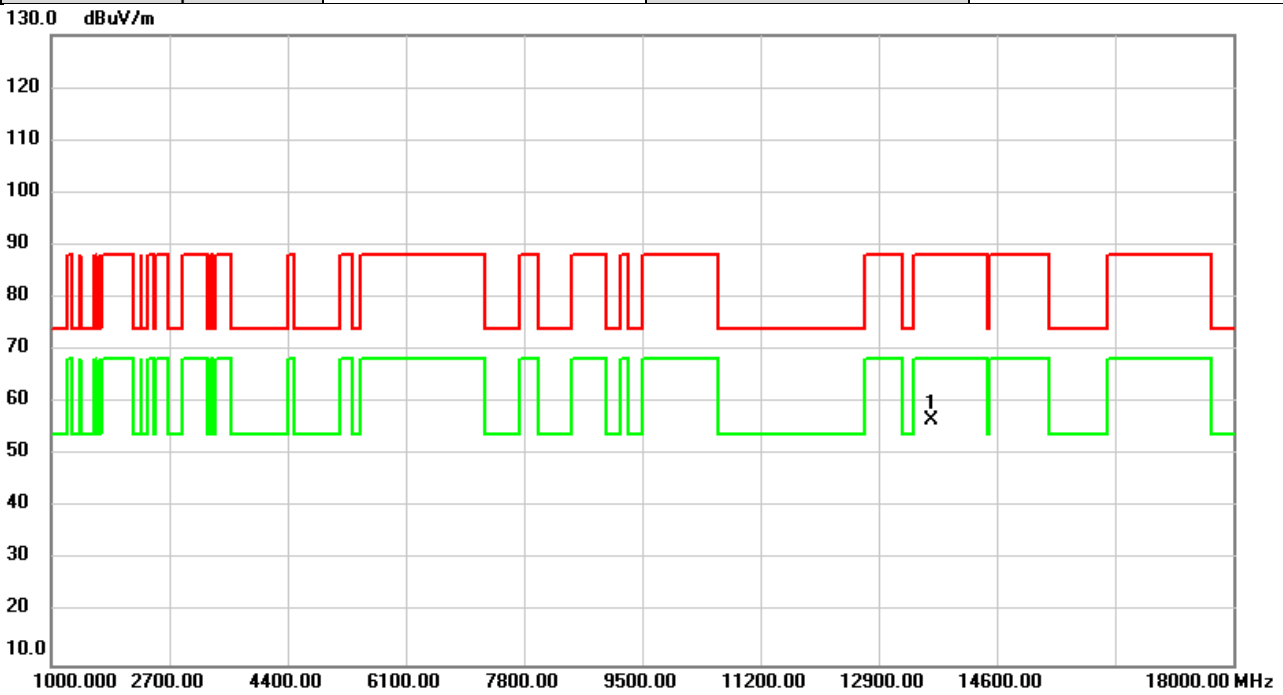


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13650.00	48.32	8.47	56.79	88.20	-31.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6985MHz	Polarization	Vertical
Temp	21°C	Hum.	65%

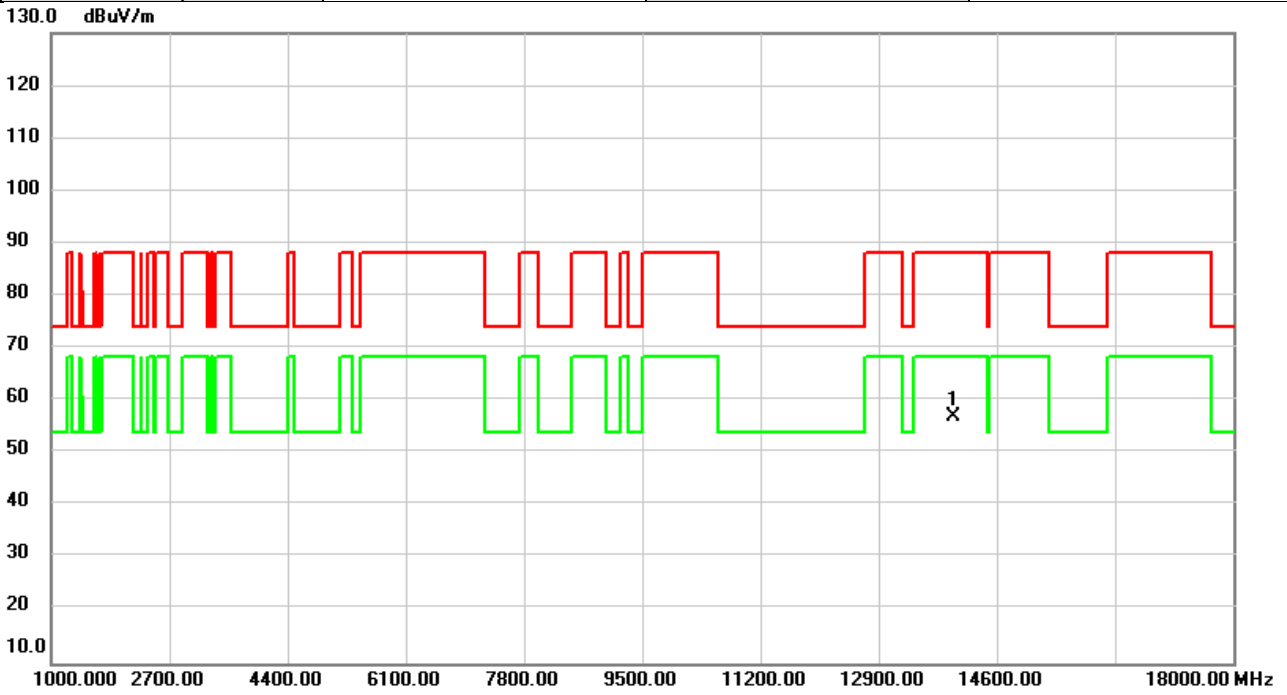


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13970.00	48.59	8.23	56.82	88.20	-31.38	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/16
Test Frequency	6985MHz	Polarization	Horizontal
Temp	21°C	Hum.	65%

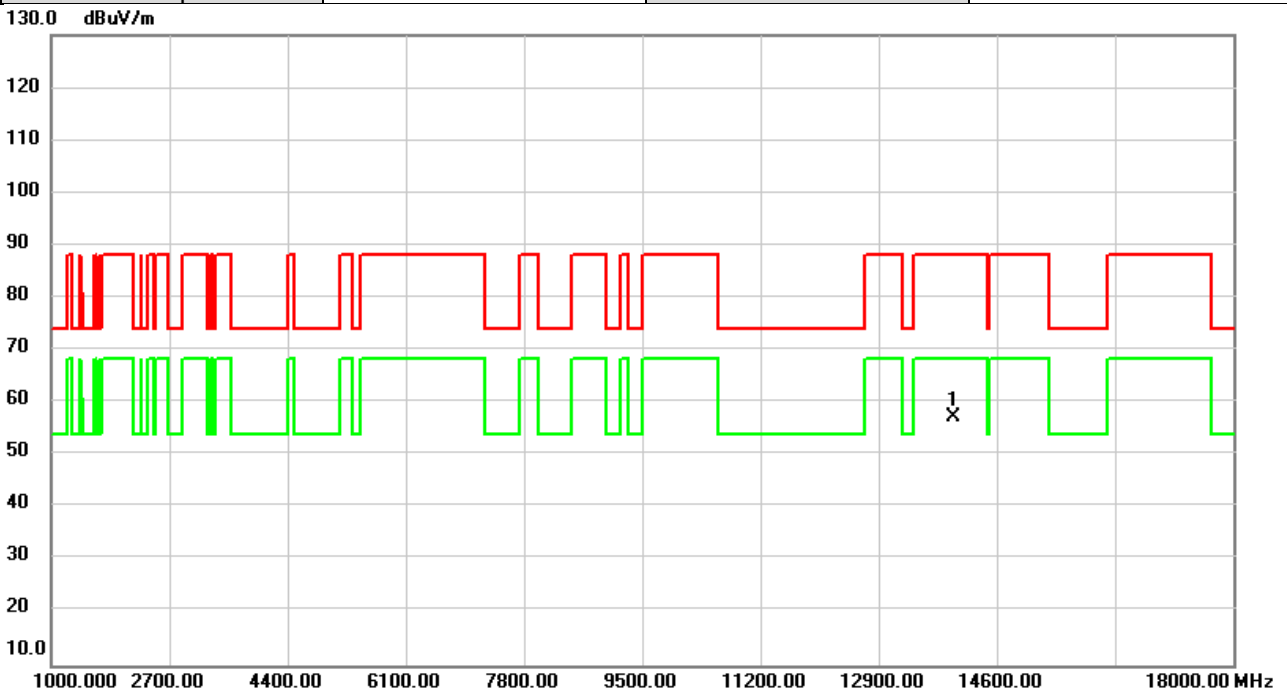


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13970.00	49.06	8.23	57.29	88.20	-30.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/17
Test Frequency	6665MHz	Polarization	Vertical
Temp	20°C	Hum.	61%

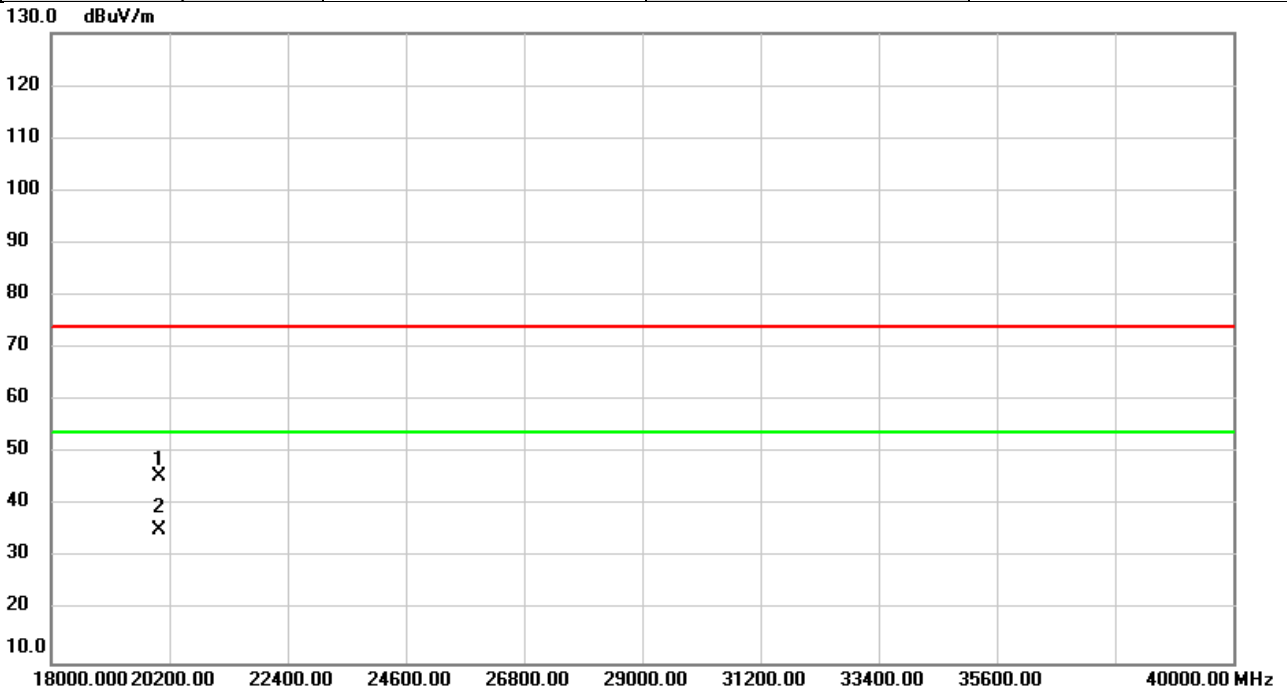


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		19995.00	52.28	-6.80	45.48	74.00	-28.52	peak	
2	*	19995.00	42.23	-6.80	35.43	54.00	-18.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/17
Test Frequency	6665MHz	Polarization	Horizontal
Temp	20°C	Hum.	61%

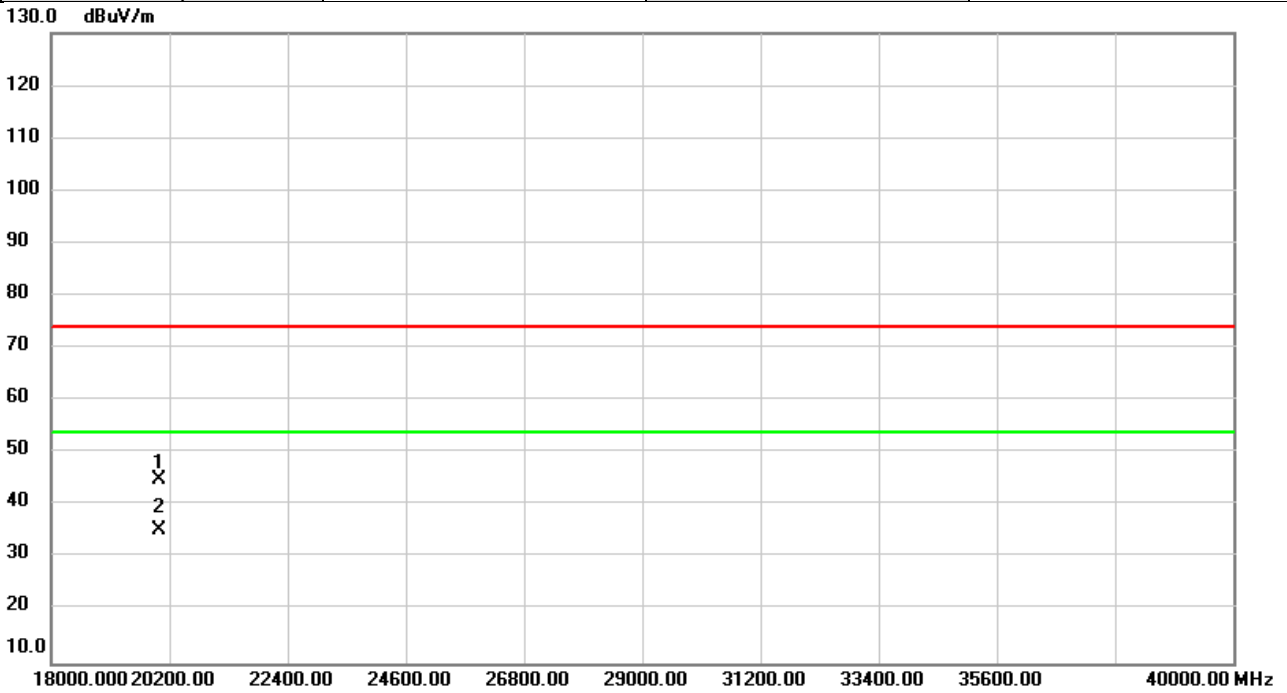

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		19995.00	51.87	-6.80	45.07	74.00	-28.93	peak	
2	*	19995.00	42.24	-6.80	35.44	54.00	-18.56	AVG	


**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


## APPENDIX G IN-BAND EMISSION (MASK)


For NSS1:

Test Mode	IEEE 802.11ax (HE20)_ Ant 1
-----------	-----------------------------

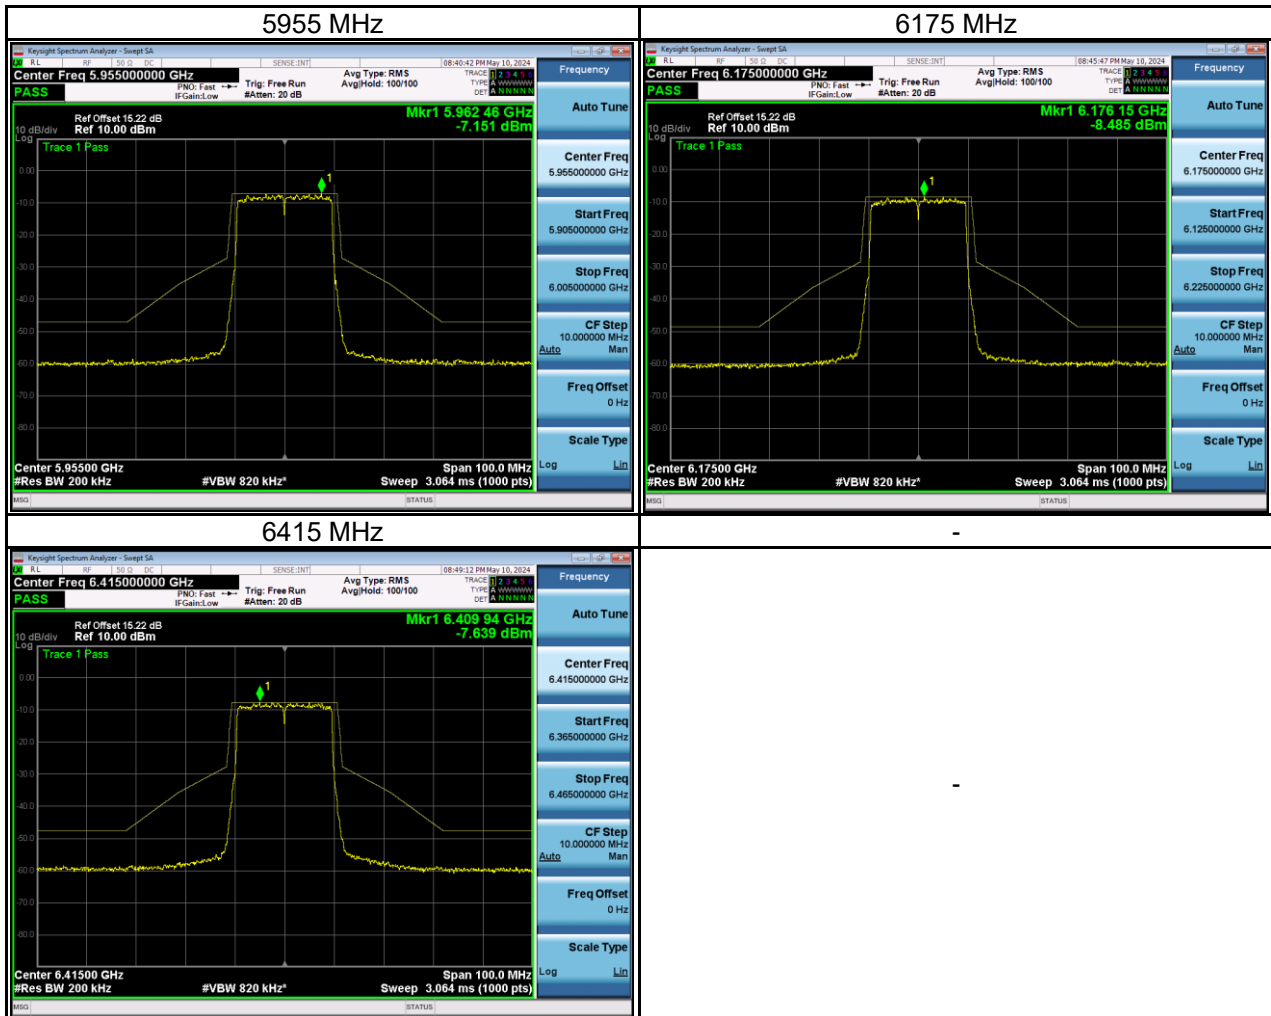


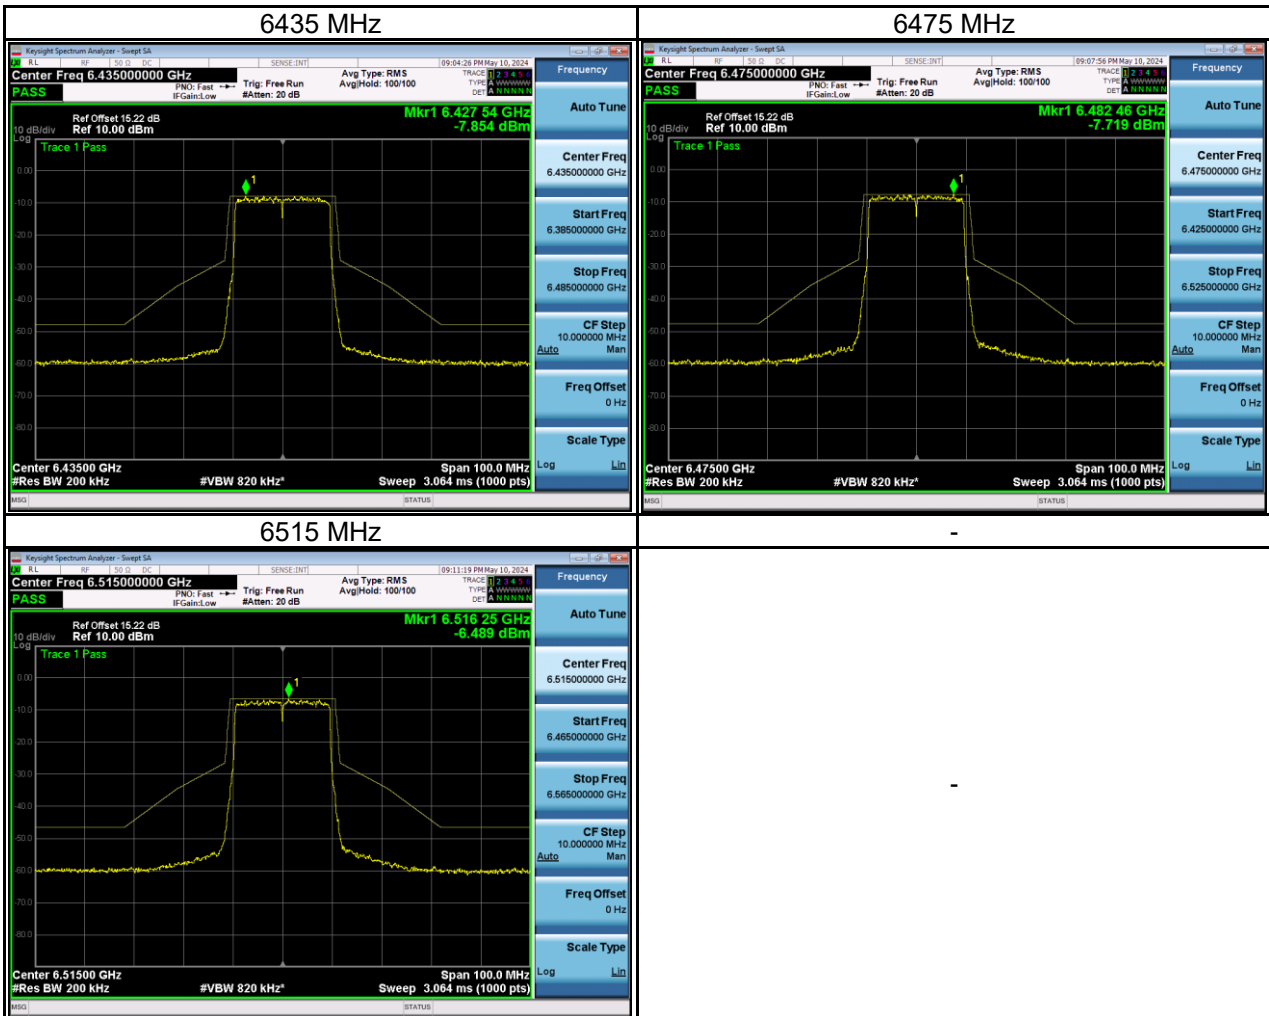

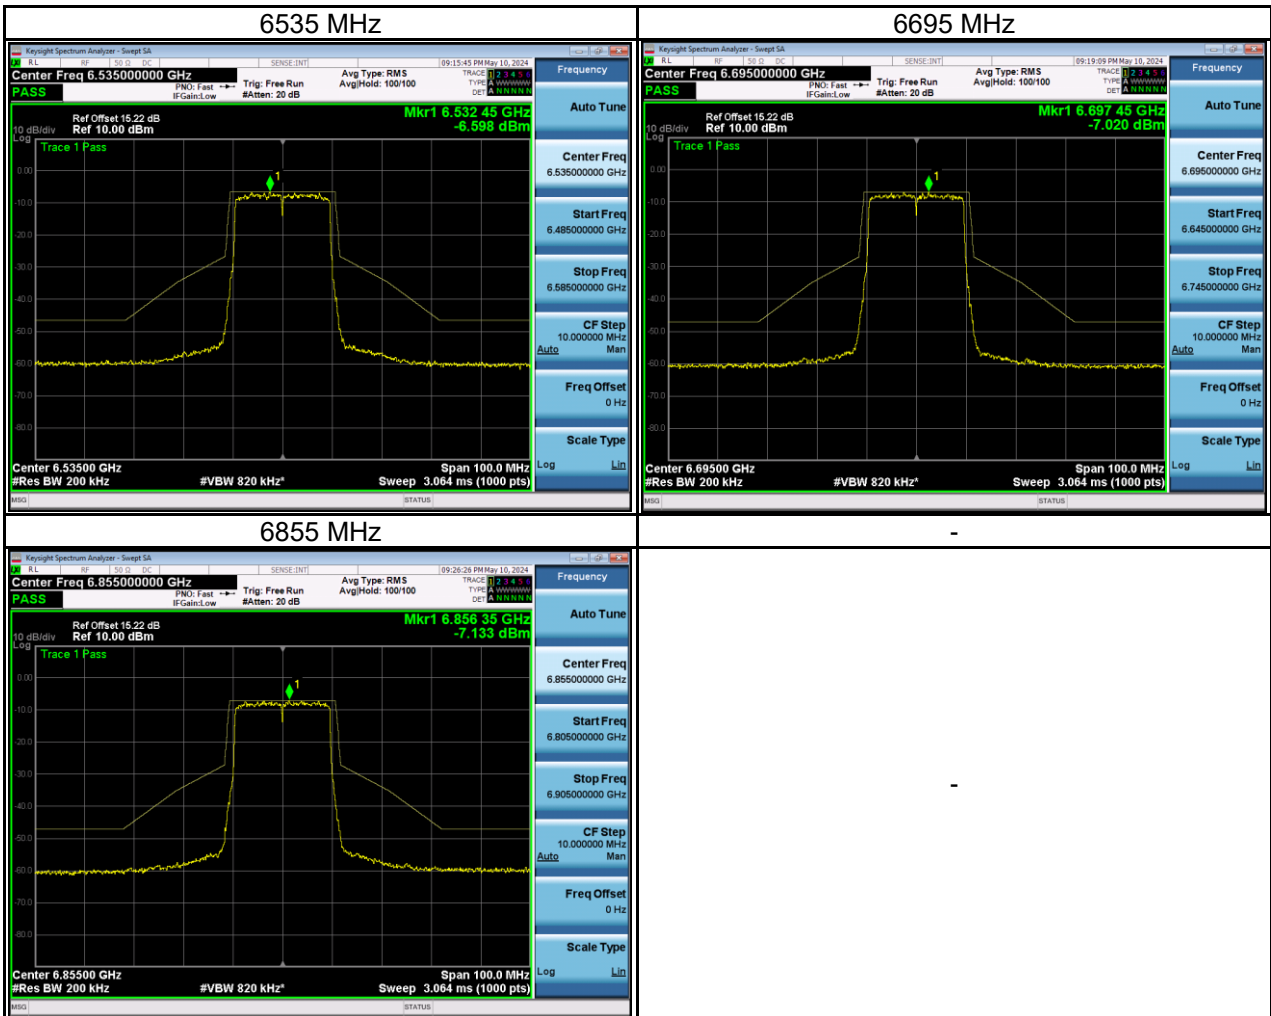


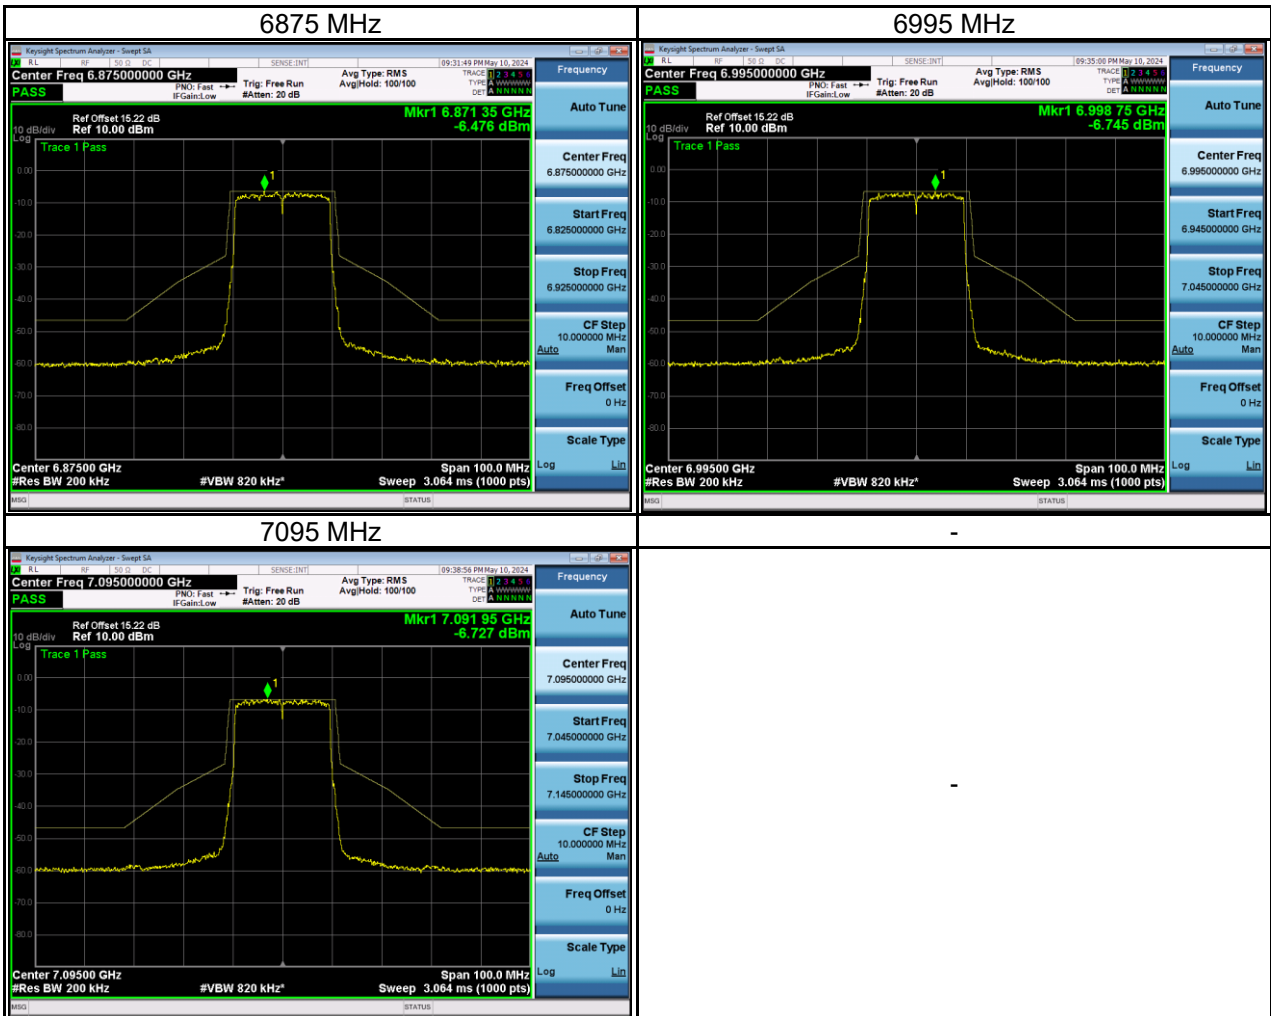



Test Mode IEEE 802.11ax (HE20)\_Ant 2

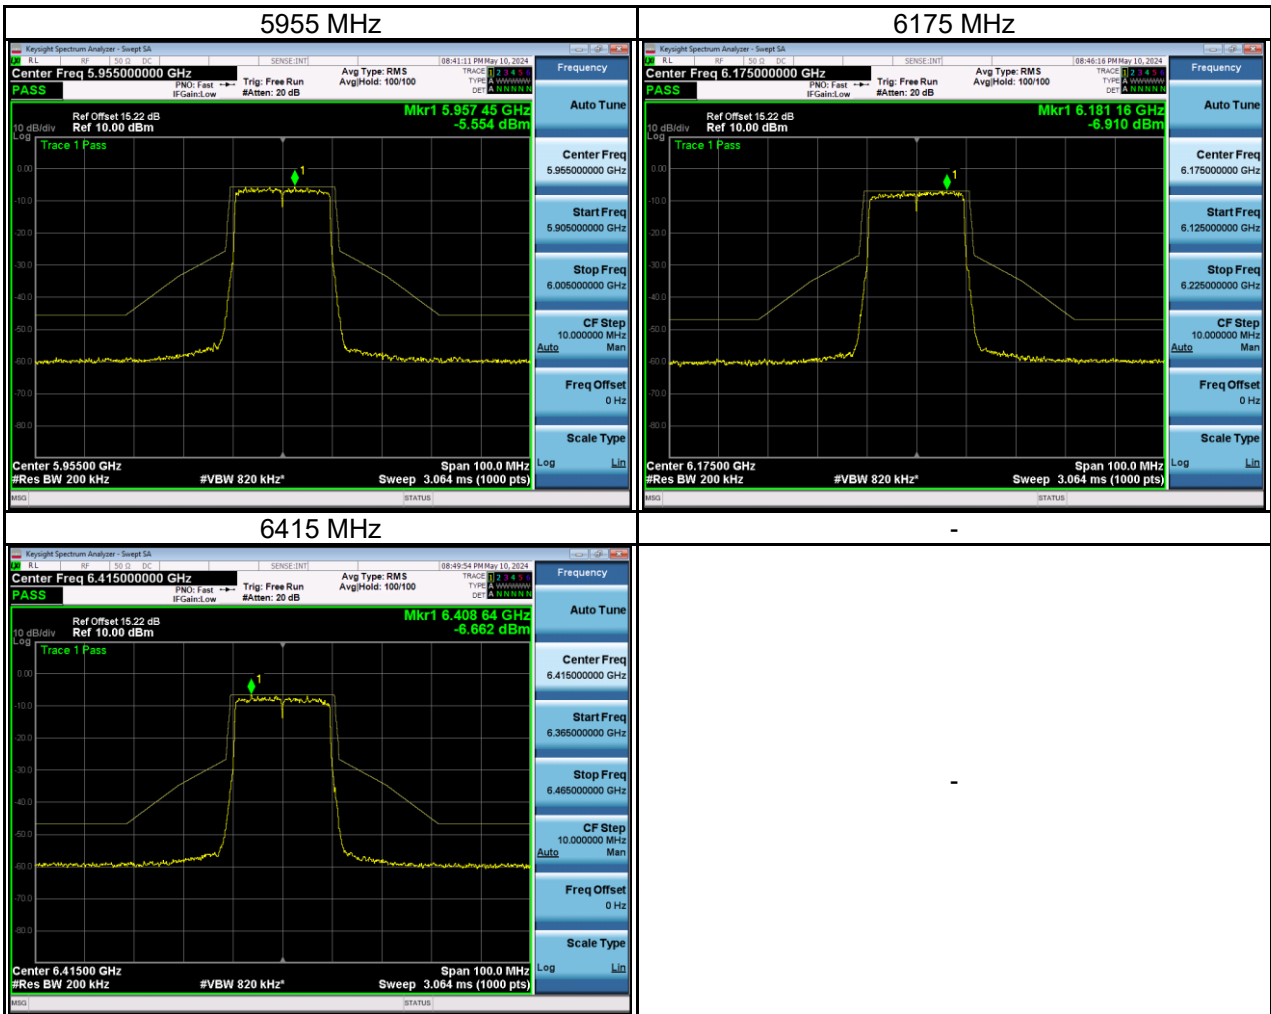



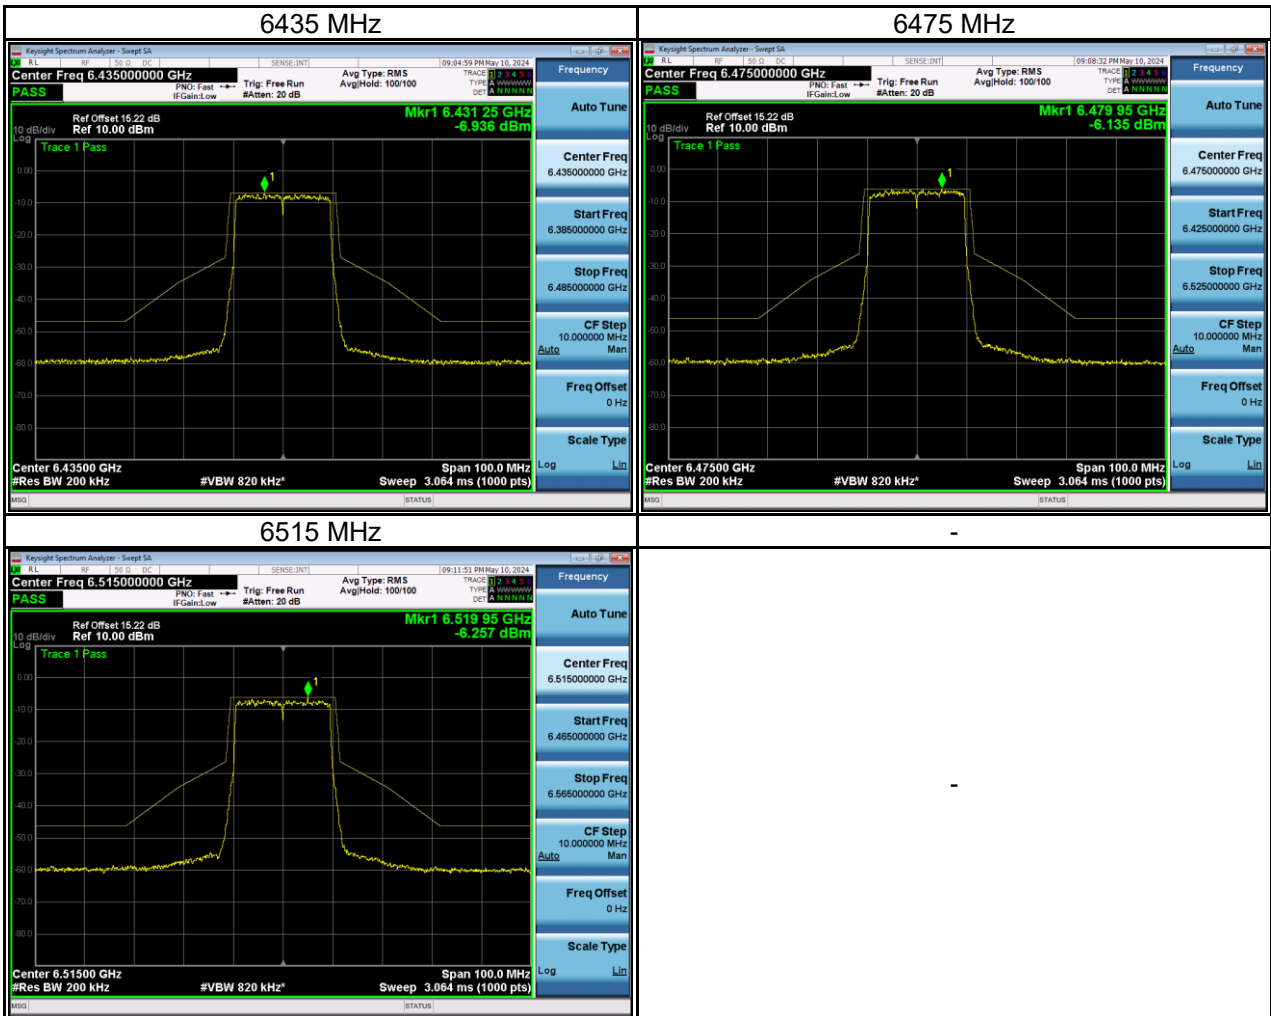

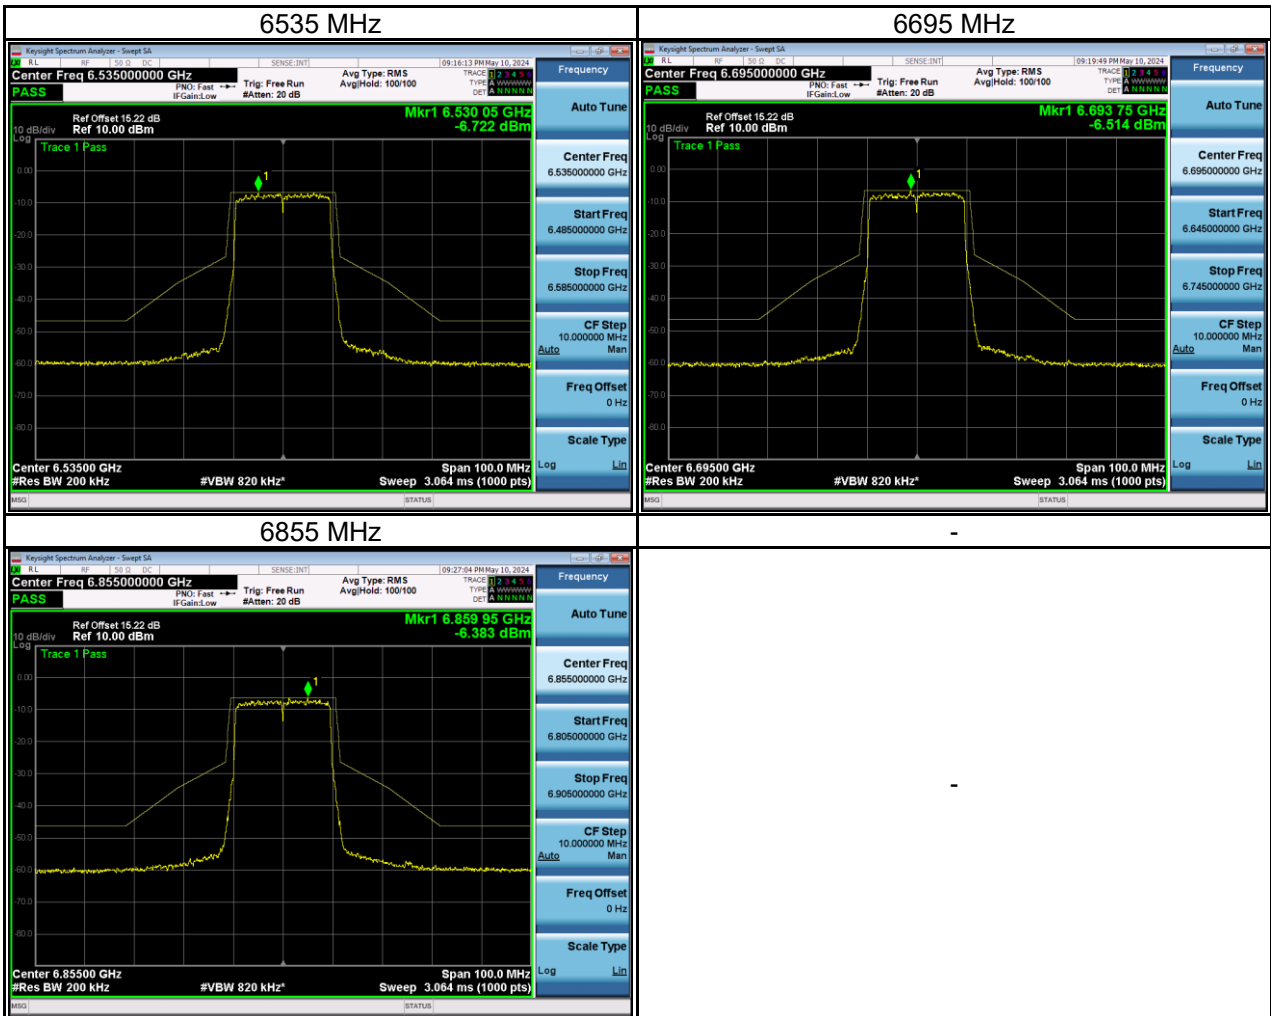

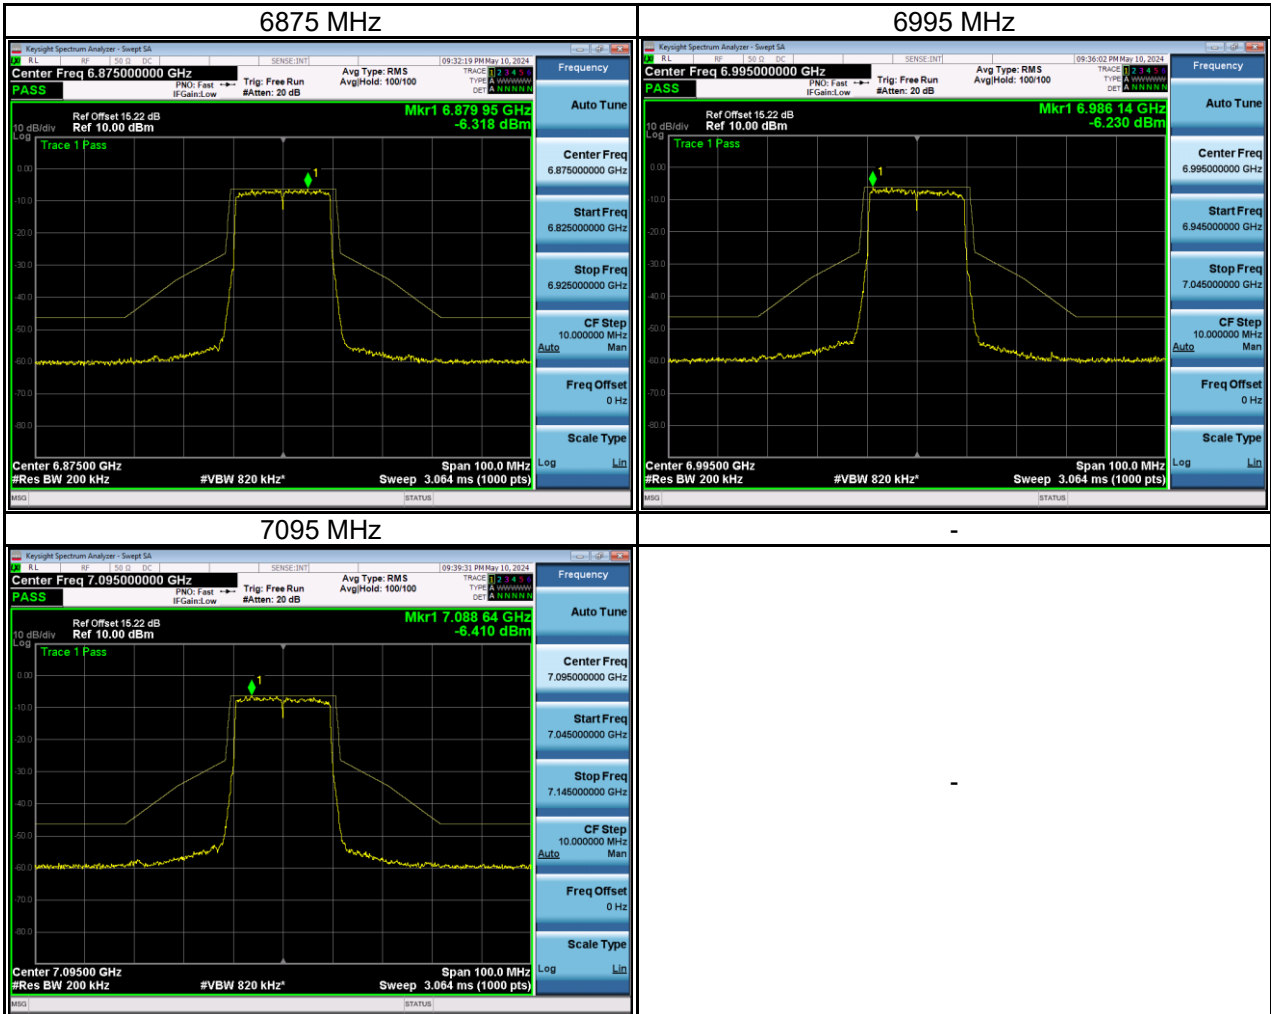

Test Mode IEEE 802.11ax (HE40)\_ Ant 1

