



Mode	22																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<p>Date: 2023-12-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>58.01</td> <td>74.00</td> <td>-15.99</td> <td>54.17</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>212</td> <td>65</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>49.01</td> <td>54.00</td> <td>-4.99</td> <td>45.17</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>212</td> <td>65</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>50.13</td> <td>68.30</td> <td>-18.17</td> <td>42.00</td> <td>42.44</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11440.00	58.01	74.00	-15.99	54.17	39.75	14.80	50.71	212	65	Peak	2	11440.00	49.01	54.00	-4.99	45.17	39.75	14.80	50.71	212	65	Average	3	17160.00	50.13	68.30	-18.17	42.00	42.44	17.55	51.86	--	--	Peak	<p>Date: 2023-12-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>59.96</td> <td>74.00</td> <td>-14.04</td> <td>56.12</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>162</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>53.10</td> <td>54.00</td> <td>-0.90</td> <td>49.26</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>162</td> <td>360</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>49.54</td> <td>68.30</td> <td>-18.76</td> <td>41.41</td> <td>42.44</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11440.00	59.96	74.00	-14.04	56.12	39.75	14.80	50.71	162	360	Peak	2	11440.00	53.10	54.00	-0.90	49.26	39.75	14.80	50.71	162	360	Average	3	17160.00	49.54	68.30	-18.76	41.41	42.44	17.55	51.86	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11440.00	58.01	74.00	-15.99	54.17	39.75	14.80	50.71	212	65	Peak																																																																																																																	
2	11440.00	49.01	54.00	-4.99	45.17	39.75	14.80	50.71	212	65	Average																																																																																																																	
3	17160.00	50.13	68.30	-18.17	42.00	42.44	17.55	51.86	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11440.00	59.96	74.00	-14.04	56.12	39.75	14.80	50.71	162	360	Peak																																																																																																																	
2	11440.00	53.10	54.00	-0.90	49.26	39.75	14.80	50.71	162	360	Average																																																																																																																	
3	17160.00	49.54	68.30	-18.76	41.41	42.44	17.55	51.86	--	--	Peak																																																																																																																	



		23																																																																																																
Mode	Band Edge																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<p style="text-align: right;">Date: 2024-02-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>53.79</td> <td>74.00</td> <td>-20.21</td> <td>40.02</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>236</td> <td>26</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>59.18</td> <td>68.30</td> <td>-9.12</td> <td>45.39</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>236</td> <td>26</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5459.44	53.79	74.00	-20.21	40.02	34.81	11.12	32.16	236	26	Peak	2	5468.72	59.18	68.30	-9.12	45.39	34.81	11.16	32.18	236	26	Peak	<p style="text-align: right;">Date: 2024-02-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.45</td> <td>-----</td> <td>-----</td> <td>88.57</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>236</td> <td>26</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5500.00</td> <td>95.49</td> <td>-----</td> <td>-----</td> <td>81.61</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>236</td> <td>26</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5500.00	102.45	-----	-----	88.57	34.80	11.29	32.21	236	26	Peak	2	5500.00	95.49	-----	-----	81.61	34.80	11.29	32.21	236	26	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5459.44	53.79	74.00	-20.21	40.02	34.81	11.12	32.16	236	26	Peak																																																																																							
2	5468.72	59.18	68.30	-9.12	45.39	34.81	11.16	32.18	236	26	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5500.00	102.45	-----	-----	88.57	34.80	11.29	32.21	236	26	Peak																																																																																							
2	5500.00	95.49	-----	-----	81.61	34.80	11.29	32.21	236	26	Average																																																																																							
Avg	<p style="text-align: right;">Date: 2024-02-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>41.98</td> <td>54.00</td> <td>-12.02</td> <td>28.21</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>236</td> <td>26</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5459.60	41.98	54.00	-12.02	28.21	34.81	11.12	32.16	236	26	Average	Blank																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5459.60	41.98	54.00	-12.02	28.21	34.81	11.12	32.16	236	26	Average																																																																																							



		23																																																																																																		
Mode	Band Edge																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	<p style="text-align: right;">Date: 2024-02-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.72</td> <td>63.48</td> <td>74.00</td> <td>-10.52</td> <td>49.72</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>188</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5467.12</td> <td>66.84</td> <td>68.30</td> <td>-1.46</td> <td>53.05</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>188</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5456.72	63.48	74.00	-10.52	49.72	34.81	11.11	32.16	188	360	Peak	2	5467.12	66.84	68.30	-1.46	53.05	34.81	11.15	32.17	188	360	Peak	<p style="text-align: right;">Date: 2024-02-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>115.49</td> <td>-----</td> <td>-----</td> <td>101.61</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>188</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5500.00</td> <td>108.49</td> <td>-----</td> <td>-----</td> <td>94.61</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>188</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	115.49	-----	-----	101.61	34.80	11.29	32.21	188	360	Peak	2	5500.00	108.49	-----	-----	94.61	34.80	11.29	32.21	188	360	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	5456.72	63.48	74.00	-10.52	49.72	34.81	11.11	32.16	188	360	Peak																																																																																									
2	5467.12	66.84	68.30	-1.46	53.05	34.81	11.15	32.17	188	360	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	5500.00	115.49	-----	-----	101.61	34.80	11.29	32.21	188	360	Peak																																																																																									
2	5500.00	108.49	-----	-----	94.61	34.80	11.29	32.21	188	360	Average																																																																																									
Avg	<p style="text-align: right;">Date: 2024-02-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>47.94</td> <td>54.00</td> <td>-6.06</td> <td>34.18</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>188</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5460.00	47.94	54.00	-6.06	34.18	34.81	11.12	32.17	188	360	Average	Blank																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	5460.00	47.94	54.00	-6.06	34.18	34.81	11.12	32.17	188	360	Average																																																																																									



Mode	23																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>57.31</td> <td>74.00</td> <td>-16.69</td> <td>54.17</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>100</td> <td>28</td> <td>Peak</td> </tr> <tr> <td>2 11000.00</td> <td>45.77</td> <td>54.00</td> <td>-8.23</td> <td>42.63</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>100</td> <td>28</td> <td>Average</td> </tr> <tr> <td>3 16500.00</td> <td>50.70</td> <td>68.30</td> <td>-17.60</td> <td>42.74</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1 11000.00	57.31	74.00	-16.69	54.17	39.40	14.54	50.80	100	28	Peak	2 11000.00	45.77	54.00	-8.23	42.63	39.40	14.54	50.80	100	28	Average	3 16500.00	50.70	68.30	-17.60	42.74	42.40	17.36	51.80	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>62.88</td> <td>74.00</td> <td>-11.12</td> <td>59.74</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>180</td> <td>264</td> <td>Peak</td> </tr> <tr> <td>2 11000.00</td> <td>52.18</td> <td>54.00</td> <td>-1.82</td> <td>49.04</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>180</td> <td>264</td> <td>Average</td> </tr> <tr> <td>3 16500.00</td> <td>51.19</td> <td>68.30</td> <td>-17.11</td> <td>43.23</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1 11000.00	62.88	74.00	-11.12	59.74	39.40	14.54	50.80	180	264	Peak	2 11000.00	52.18	54.00	-1.82	49.04	39.40	14.54	50.80	180	264	Average	3 16500.00	51.19	68.30	-17.11	43.23	42.40	17.36	51.80	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																												
Freq Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																													
1 11000.00	57.31	74.00	-16.69	54.17	39.40	14.54	50.80	100	28	Peak																																																																																										
2 11000.00	45.77	54.00	-8.23	42.63	39.40	14.54	50.80	100	28	Average																																																																																										
3 16500.00	50.70	68.30	-17.60	42.74	42.40	17.36	51.80	--	--	Peak																																																																																										
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																													
Freq Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																													
1 11000.00	62.88	74.00	-11.12	59.74	39.40	14.54	50.80	180	264	Peak																																																																																										
2 11000.00	52.18	54.00	-1.82	49.04	39.40	14.54	50.80	180	264	Average																																																																																										
3 16500.00	51.19	68.30	-17.11	43.23	42.40	17.36	51.80	--	--	Peak																																																																																										



Mode	24																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																																																																																																									
ANT	CDD 1+2																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>55.74</td> <td>74.00</td> <td>-18.26</td> <td>52.34</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>100</td> <td>28</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>46.02</td> <td>54.00</td> <td>-7.98</td> <td>42.62</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>100</td> <td>28</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>50.09</td> <td>68.30</td> <td>-18.21</td> <td>41.96</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	55.74	74.00	-18.26	52.34	39.53	14.64	50.77	100	28	Peak	2	11160.00	46.02	54.00	-7.98	42.62	39.53	14.64	50.77	100	28	Average	3	16740.00	50.09	68.30	-18.21	41.96	42.45	17.43	51.75	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>63.56</td> <td>74.00</td> <td>-10.44</td> <td>60.16</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>184</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>53.27</td> <td>54.00</td> <td>-0.73</td> <td>49.87</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>184</td> <td>262</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>49.54</td> <td>68.30</td> <td>-18.76</td> <td>41.41</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	63.56	74.00	-10.44	60.16	39.53	14.64	50.77	184	262	Peak	2	11160.00	53.27	54.00	-0.73	49.87	39.53	14.64	50.77	184	262	Average	3	16740.00	49.54	68.30	-18.76	41.41	42.45	17.43	51.75	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11160.00	55.74	74.00	-18.26	52.34	39.53	14.64	50.77	100	28	Peak																																																																																																															
2	11160.00	46.02	54.00	-7.98	42.62	39.53	14.64	50.77	100	28	Average																																																																																																															
3	16740.00	50.09	68.30	-18.21	41.96	42.45	17.43	51.75	--	--	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11160.00	63.56	74.00	-10.44	60.16	39.53	14.64	50.77	184	262	Peak																																																																																																															
2	11160.00	53.27	54.00	-0.73	49.87	39.53	14.64	50.77	184	262	Average																																																																																																															
3	16740.00	49.54	68.30	-18.76	41.41	42.45	17.43	51.75	--	--	Peak																																																																																																															



Mode	25																																																																														
	Band Edge																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																														
ANT	CDD 1+2																																																																														
Pol.	Horizontal	Fundamental																																																																													
Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5727.56</td> <td>53.23</td> <td>68.30</td> <td>-15.07</td> <td>38.85</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>350</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5727.56	53.23	68.30	-15.07	38.85	35.12	11.65	32.39	100	350	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>101.75</td> <td>70.00</td> <td>31.75</td> <td>87.38</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>350</td> <td>Peak</td> </tr> <tr> <td>2 5700.00</td> <td>95.83</td> <td>70.00</td> <td>25.83</td> <td>81.46</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>350</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5700.00	101.75	70.00	31.75	87.38	35.08	11.66	32.37	100	350	Peak	2 5700.00	95.83	70.00	25.83	81.46	35.08	11.66	32.37	100	350	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5727.56	53.23	68.30	-15.07	38.85	35.12	11.65	32.39	100	350	Peak																																																																					
Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5700.00	101.75	70.00	31.75	87.38	35.08	11.66	32.37	100	350	Peak																																																																					
2 5700.00	95.83	70.00	25.83	81.46	35.08	11.66	32.37	100	350	Average																																																																					



Mode	25																																																																																				
	Band Edge																																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																				
ANT	CDD 1+2																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<p>Date: 2023-12-11</p>	<p>Date: 2023-12-11</p>																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.16</td> <td>66.20</td> <td>68.30</td> <td>-2.10</td> <td>51.82</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>177</td> <td>355</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5725.16	66.20	68.30	-2.10	51.82	35.12	11.65	32.39	177	355	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>114.30</td> <td>-----</td> <td>99.93</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>177</td> <td>355</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>106.84</td> <td>-----</td> <td>92.47</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>177</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	114.30	-----	99.93	35.08	11.66	32.37	177	355	Peak	2	5700.00	106.84	-----	92.47	35.08	11.66	32.37	177	355
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5725.16	66.20	68.30	-2.10	51.82	35.12	11.65	32.39	177	355	Peak																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5700.00	114.30	-----	99.93	35.08	11.66	32.37	177	355	Peak																																																																											
2	5700.00	106.84	-----	92.47	35.08	11.66	32.37	177	355	Average																																																																											



Mode	25																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>49.26</td> <td>74.00</td> <td>-24.74</td> <td>45.48</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.44</td> <td>68.30</td> <td>-17.86</td> <td>42.25</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	49.26	74.00	-24.74	45.48	39.72	14.78	50.72	--	--	Peak	2	17100.00	50.44	68.30	-17.86	42.25	42.46	17.53	51.80	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>50.24</td> <td>74.00</td> <td>-23.76</td> <td>46.46</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.81</td> <td>68.30</td> <td>-17.49</td> <td>42.62</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	50.24	74.00	-23.76	46.46	39.72	14.78	50.72	--	--	Peak	2	17100.00	50.81	68.30	-17.49	42.62	42.46	17.53	51.80	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	49.26	74.00	-24.74	45.48	39.72	14.78	50.72	--	--	Peak																																																																																							
2	17100.00	50.44	68.30	-17.86	42.25	42.46	17.53	51.80	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	50.24	74.00	-23.76	46.46	39.72	14.78	50.72	--	--	Peak																																																																																							
2	17100.00	50.81	68.30	-17.49	42.62	42.46	17.53	51.80	--	--	Peak																																																																																							



	26																																																																								
Mode	Band Edge																																																																								
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz																																																																								
ANT	CDD 1+2																																																																								
Pol.	Horizontal	Fundamental																																																																							
Peak	<p style="text-align: right;">Date: 2023-12-13</p>																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5432.50</td> <td>51.76</td> <td>74.00</td> <td>-22.24</td> <td>38.07</td> <td>34.81</td> <td>11.01</td> <td>32.13</td> <td>180</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5463.85</td> <td>50.98</td> <td>68.30</td> <td>-17.32</td> <td>37.20</td> <td>34.81</td> <td>11.14</td> <td>32.17</td> <td>180</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>109.59</td> <td>-----</td> <td>-----</td> <td>95.20</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>180</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5856.00</td> <td>53.43</td> <td>68.30</td> <td>-14.87</td> <td>39.10</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>180</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5432.50	51.76	74.00	-22.24	38.07	34.81	11.01	32.13	180	360	Peak	2	5463.85	50.98	68.30	-17.32	37.20	34.81	11.14	32.17	180	360	Peak	3	5720.00	109.59	-----	-----	95.20	35.11	11.66	32.38	180	360	Peak	4	5856.00	53.43	68.30	-14.87	39.10	35.30	11.52	32.49	180	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5432.50	51.76	74.00	-22.24	38.07	34.81	11.01	32.13	180	360	Peak																																																														
2	5463.85	50.98	68.30	-17.32	37.20	34.81	11.14	32.17	180	360	Peak																																																														
3	5720.00	109.59	-----	-----	95.20	35.11	11.66	32.38	180	360	Peak																																																														
4	5856.00	53.43	68.30	-14.87	39.10	35.30	11.52	32.49	180	360	Peak																																																														
Avg	<p style="text-align: right;">Date: 2023-12-13</p>																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.45</td> <td>40.91</td> <td>54.00</td> <td>-13.09</td> <td>27.14</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>180</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>100.48</td> <td>-----</td> <td>-----</td> <td>86.09</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>180</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.45	40.91	54.00	-13.09	27.14	34.81	11.12	32.16	180	360	Average	2	5720.00	100.48	-----	-----	86.09	35.11	11.66	32.38	180	360	Average																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5459.45	40.91	54.00	-13.09	27.14	34.81	11.12	32.16	180	360	Average																																																														
2	5720.00	100.48	-----	-----	86.09	35.11	11.66	32.38	180	360	Average																																																														



	26	
Mode	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz	
ANT	CDD 1+2	
Pol.	Vertical	Fundamental
Peak		
	Blank	
Avg		
	Blank	



Mode	26																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11440.00 60.18 74.00 -13.82</td> <td>56.34</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>100</td> <td>39</td> <td>Peak</td> </tr> <tr> <td>2 11440.00 49.38 54.00 -4.62</td> <td>45.54</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>100</td> <td>39</td> <td>Average</td> </tr> <tr> <td>3 17160.00 50.26 68.30 -18.04</td> <td>42.13</td> <td>42.44</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor					MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	cm	deg		1 11440.00 60.18 74.00 -13.82	56.34	39.75	14.80	50.71	100	39	Peak	2 11440.00 49.38 54.00 -4.62	45.54	39.75	14.80	50.71	100	39	Average	3 17160.00 50.26 68.30 -18.04	42.13	42.44	17.55	51.86	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11440.00 64.15 74.00 -9.85</td> <td>60.31</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>239</td> <td>17</td> <td>Peak</td> </tr> <tr> <td>2 11440.00 53.26 54.00 -0.74</td> <td>49.42</td> <td>39.75</td> <td>14.80</td> <td>50.71</td> <td>239</td> <td>17</td> <td>Average</td> </tr> <tr> <td>3 17160.00 50.86 68.30 -17.44</td> <td>42.73</td> <td>42.44</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor					MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	cm	deg		1 11440.00 64.15 74.00 -9.85	60.31	39.75	14.80	50.71	239	17	Peak	2 11440.00 53.26 54.00 -0.74	49.42	39.75	14.80	50.71	239	17	Average	3 17160.00 50.86 68.30 -17.44	42.73	42.44	17.55	51.86	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq Level Line Margin	Level	Factor	Loss Factor																																																																																															
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1 11440.00 60.18 74.00 -13.82	56.34	39.75	14.80	50.71	100	39	Peak																																																																																											
2 11440.00 49.38 54.00 -4.62	45.54	39.75	14.80	50.71	100	39	Average																																																																																											
3 17160.00 50.26 68.30 -18.04	42.13	42.44	17.55	51.86	--	--	Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq Level Line Margin	Level	Factor	Loss Factor																																																																																															
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1 11440.00 64.15 74.00 -9.85	60.31	39.75	14.80	50.71	239	17	Peak																																																																																											
2 11440.00 53.26 54.00 -0.74	49.42	39.75	14.80	50.71	239	17	Average																																																																																											
3 17160.00 50.86 68.30 -17.44	42.73	42.44	17.55	51.86	--	--	Peak																																																																																											



	27																																																																																																									
Mode	Band Edge - L																																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																									
ANT	CDD 1+2																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																								
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.72</td> <td>52.50</td> <td>74.00</td> <td>-21.50</td> <td>38.76</td> <td>34.81</td> <td>11.09</td> <td>32.16</td> <td>100</td> <td>341</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.16</td> <td>53.24</td> <td>68.30</td> <td>-15.06</td> <td>39.45</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>100</td> <td>341</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5452.72	52.50	74.00	-21.50	38.76	34.81	11.09	32.16	100	341	Peak	2	5466.16	53.24	68.30	-15.06	39.45	34.81	11.15	32.17	100	341	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>100.03</td> <td>-----</td> <td>-----</td> <td>86.11</td> <td>34.81</td> <td>11.33</td> <td>32.22</td> <td>100</td> <td>341</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5510.00</td> <td>94.13</td> <td>-----</td> <td>-----</td> <td>80.21</td> <td>34.81</td> <td>11.33</td> <td>32.22</td> <td>100</td> <td>341</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	100.03	-----	-----	86.11	34.81	11.33	32.22	100	341	Peak	2	5510.00	94.13	-----	-----	80.21	34.81	11.33	32.22	100	341	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5452.72	52.50	74.00	-21.50	38.76	34.81	11.09	32.16	100	341	Peak																																																																																															
2	5466.16	53.24	68.30	-15.06	39.45	34.81	11.15	32.17	100	341	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5510.00	100.03	-----	-----	86.11	34.81	11.33	32.22	100	341	Peak																																																																																															
2	5510.00	94.13	-----	-----	80.21	34.81	11.33	32.22	100	341	Average																																																																																															
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.72</td> <td>42.09</td> <td>54.00</td> <td>-11.91</td> <td>28.33</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>100</td> <td>341</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.72	42.09	54.00	-11.91	28.33	34.81	11.11	32.16	100	341	Average	Blank																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5458.72	42.09	54.00	-11.91	28.33	34.81	11.11	32.16	100	341	Average																																																																																															



Mode	27																																		
	Band Edge - R																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																		
ANT	CDD 1+2																																		
Pol.	Horizontal	Fundamental																																	
Peak	<p>Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5754.29</td> <td>52.37</td> <td>68.30</td> <td>-15.93</td> <td>37.98</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>100 341 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5754.29	52.37	68.30	-15.93	37.98	35.16	11.64	32.41	100 341 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 5754.29	52.37	68.30	-15.93	37.98	35.16	11.64	32.41	100 341 Peak																											



		27																																																																																																										
Mode	Band Edge - L																																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																											
ANT	CDD 1+2																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.96</td> <td>58.08</td> <td>74.00</td> <td>-15.92</td> <td>44.31</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>200</td> <td>272</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.40</td> <td>66.50</td> <td>68.30</td> <td>-1.80</td> <td>52.71</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>200</td> <td>272</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.96	58.08	74.00	-15.92	44.31	34.81	11.12	32.16	200	272	Peak	2	5466.40	66.50	68.30	-1.80	52.71	34.81	11.15	32.17	200	272	Peak	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>111.22</td> <td>-----</td> <td>-----</td> <td>97.30</td> <td>34.81</td> <td>11.33</td> <td>32.22</td> <td>200</td> <td>272</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5510.00</td> <td>105.44</td> <td>-----</td> <td>-----</td> <td>91.52</td> <td>34.81</td> <td>11.33</td> <td>32.22</td> <td>200</td> <td>272</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	111.22	-----	-----	97.30	34.81	11.33	32.22	200	272	Peak	2	5510.00	105.44	-----	-----	91.52	34.81	11.33	32.22	200	272	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5458.96	58.08	74.00	-15.92	44.31	34.81	11.12	32.16	200	272	Peak																																																																																																	
2	5466.40	66.50	68.30	-1.80	52.71	34.81	11.15	32.17	200	272	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5510.00	111.22	-----	-----	97.30	34.81	11.33	32.22	200	272	Peak																																																																																																	
2	5510.00	105.44	-----	-----	91.52	34.81	11.33	32.22	200	272	Average																																																																																																	
Avg	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>46.97</td> <td>54.00</td> <td>-7.03</td> <td>33.21</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>200</td> <td>272</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.48	46.97	54.00	-7.03	33.21	34.81	11.11	32.16	200	272	Average	Blank																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5458.48	46.97	54.00	-7.03	33.21	34.81	11.11	32.16	200	272	Average																																																																																																	



Mode	27																																		
	Band Edge - R																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																		
ANT	CDD 1+2																																		
Pol.	Vertical	Fundamental																																	
Peak	<p>Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5754.61</td> <td>54.26</td> <td>68.30</td> <td>-14.04</td> <td>39.87</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>200 272 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5754.61	54.26	68.30	-14.04	39.87	35.16	11.64	32.41	200 272 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 5754.61	54.26	68.30	-14.04	39.87	35.16	11.64	32.41	200 272 Peak																											



Mode	27																																																																																																															
	Harmonic																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																															
ANT	CDD 1+2																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>49.76</td> <td>74.00</td> <td>-24.24</td> <td>46.59</td> <td>39.42</td> <td>14.55</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16530.00</td> <td>50.52</td> <td>68.30</td> <td>-17.78</td> <td>42.53</td> <td>42.41</td> <td>17.37</td> <td>51.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11020.00	49.76	74.00	-24.24	46.59	39.42	14.55	50.80	--	--	Peak	2	16530.00	50.52	68.30	-17.78	42.53	42.41	17.37	51.79	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>57.95</td> <td>74.00</td> <td>-16.05</td> <td>54.78</td> <td>39.42</td> <td>14.55</td> <td>50.80</td> <td>184</td> <td>264</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11020.00</td> <td>47.20</td> <td>54.00</td> <td>-6.80</td> <td>44.03</td> <td>39.42</td> <td>14.55</td> <td>50.80</td> <td>184</td> <td>264</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16530.00</td> <td>51.85</td> <td>68.30</td> <td>-16.45</td> <td>43.86</td> <td>42.41</td> <td>17.37</td> <td>51.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11020.00	57.95	74.00	-16.05	54.78	39.42	14.55	50.80	184	264	Peak	2	11020.00	47.20	54.00	-6.80	44.03	39.42	14.55	50.80	184	264	Average	3	16530.00	51.85	68.30	-16.45	43.86	42.41	17.37	51.79	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	11020.00	49.76	74.00	-24.24	46.59	39.42	14.55	50.80	--	--	Peak																																																																																																					
2	16530.00	50.52	68.30	-17.78	42.53	42.41	17.37	51.79	--	--	Peak																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	11020.00	57.95	74.00	-16.05	54.78	39.42	14.55	50.80	184	264	Peak																																																																																																					
2	11020.00	47.20	54.00	-6.80	44.03	39.42	14.55	50.80	184	264	Average																																																																																																					
3	16530.00	51.85	68.30	-16.45	43.86	42.41	17.37	51.79	--	--	Peak																																																																																																					



		28																																																																																										
Mode	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHZ																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.84</td> <td>55.35</td> <td>74.00</td> <td>-18.65</td> <td>41.61</td> <td>34.81</td> <td>11.08</td> <td>32.15</td> </tr> <tr> <td>2</td> <td>5466.64</td> <td>60.67</td> <td>68.30</td> <td>-7.63</td> <td>46.88</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5449.84	55.35	74.00	-18.65	41.61	34.81	11.08	32.15	2	5466.64	60.67	68.30	-7.63	46.88	34.81	11.15	32.17	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>102.78</td> <td>-----</td> <td>-----</td> <td>88.67</td> <td>34.87</td> <td>11.49</td> <td>32.25</td> </tr> <tr> <td>2</td> <td>5550.00</td> <td>95.64</td> <td>-----</td> <td>-----</td> <td>81.53</td> <td>34.87</td> <td>11.49</td> <td>32.25</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5550.00	102.78	-----	-----	88.67	34.87	11.49	32.25	2	5550.00	95.64	-----	-----	81.53	34.87	11.49	32.25
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																				
1	5449.84	55.35	74.00	-18.65	41.61	34.81	11.08	32.15																																																																																				
2	5466.64	60.67	68.30	-7.63	46.88	34.81	11.15	32.17																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																				
1	5550.00	102.78	-----	-----	88.67	34.87	11.49	32.25																																																																																				
2	5550.00	95.64	-----	-----	81.53	34.87	11.49	32.25																																																																																				
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.76</td> <td>43.95</td> <td>54.00</td> <td>-10.05</td> <td>30.19</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5457.76	43.95	54.00	-10.05	30.19	34.81	11.11	32.16	Blank																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																				
1	5457.76	43.95	54.00	-10.05	30.19	34.81	11.11	32.16																																																																																				



	28																																					
Mode	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																					
ANT	CDD 1+2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-12-11</p>																																					
	Blank																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5730.98</td> <td>52.94</td> <td>68.30</td> <td>-15.36</td> <td>38.56</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>239</td> <td>28</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5730.98	52.94	68.30	-15.36	38.56	35.12	11.65	32.39	239	28	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5730.98	52.94	68.30	-15.36	38.56	35.12	11.65	32.39	239	28	Peak																											



	28																																																																																																									
Mode	Band Edge - L																																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																																																																																									
ANT	CDD 1+2																																																																																																									
Pol.	Vertical	Fundamental																																																																																																								
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>68.00</td> <td>74.00</td> <td>-6.00</td> <td>54.24</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>183</td> <td>335</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5467.60</td> <td>67.72</td> <td>68.30</td> <td>-0.58</td> <td>53.93</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>183</td> <td>335</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.48	68.00	74.00	-6.00	54.24	34.81	11.11	32.16	183	335	Peak	2	5467.60	67.72	68.30	-0.58	53.93	34.81	11.15	32.17	183	335	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>116.37</td> <td>-----</td> <td>-----</td> <td>102.26</td> <td>34.87</td> <td>11.49</td> <td>32.25</td> <td>183</td> <td>335</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5550.00</td> <td>109.29</td> <td>-----</td> <td>-----</td> <td>95.18</td> <td>34.87</td> <td>11.49</td> <td>32.25</td> <td>183</td> <td>335</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5550.00	116.37	-----	-----	102.26	34.87	11.49	32.25	183	335	Peak	2	5550.00	109.29	-----	-----	95.18	34.87	11.49	32.25	183	335	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5458.48	68.00	74.00	-6.00	54.24	34.81	11.11	32.16	183	335	Peak																																																																																															
2	5467.60	67.72	68.30	-0.58	53.93	34.81	11.15	32.17	183	335	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5550.00	116.37	-----	-----	102.26	34.87	11.49	32.25	183	335	Peak																																																																																															
2	5550.00	109.29	-----	-----	95.18	34.87	11.49	32.25	183	335	Average																																																																																															
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.72</td> <td>52.13</td> <td>54.00</td> <td>-1.87</td> <td>38.37</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>183</td> <td>335</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.72	52.13	54.00	-1.87	38.37	34.81	11.11	32.16	183	335	Average	Blank																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5458.72	52.13	54.00	-1.87	38.37	34.81	11.11	32.16	183	335	Average																																																																																															



Mode	28																																		
	Band Edge - R																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																		
ANT	CDD 1+2																																		
Pol.	Vertical	Fundamental																																	
Peak	<p>Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5726.57</td> <td>55.96</td> <td>68.30</td> <td>-12.34</td> <td>41.58</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>183 335 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5726.57	55.96	68.30	-12.34	41.58	35.12	11.65	32.39	183 335 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 5726.57	55.96	68.30	-12.34	41.58	35.12	11.65	32.39	183 335 Peak																											



Mode	28																																																																																																														
	Harmonic																																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																																																																																														
ANT	CDD 1+2																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg																																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>50.87</td> <td>74.00</td> <td>-23.13</td> <td>47.57</td> <td>39.48</td> <td>14.60</td> <td>50.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>51.04</td> <td>68.30</td> <td>-17.26</td> <td>42.97</td> <td>42.43</td> <td>17.41</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11100.00	50.87	74.00	-23.13	47.57	39.48	14.60	50.78	--	--	Peak	2	16650.00	51.04	68.30	-17.26	42.97	42.43	17.41	51.77	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>61.12</td> <td>74.00</td> <td>-12.88</td> <td>57.82</td> <td>39.48</td> <td>14.60</td> <td>50.78</td> <td>179</td> <td>264</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11100.00</td> <td>51.02</td> <td>54.00</td> <td>-2.98</td> <td>47.72</td> <td>39.48</td> <td>14.60</td> <td>50.78</td> <td>179</td> <td>264</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16650.00</td> <td>51.11</td> <td>68.30</td> <td>-17.19</td> <td>43.04</td> <td>42.43</td> <td>17.41</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11100.00	61.12	74.00	-12.88	57.82	39.48	14.60	50.78	179	264	Peak	2	11100.00	51.02	54.00	-2.98	47.72	39.48	14.60	50.78	179	264	Average	3	16650.00	51.11	68.30	-17.19	43.04	42.43	17.41	51.77	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11100.00	50.87	74.00	-23.13	47.57	39.48	14.60	50.78	--	--	Peak																																																																																																				
2	16650.00	51.04	68.30	-17.26	42.97	42.43	17.41	51.77	--	--	Peak																																																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11100.00	61.12	74.00	-12.88	57.82	39.48	14.60	50.78	179	264	Peak																																																																																																				
2	11100.00	51.02	54.00	-2.98	47.72	39.48	14.60	50.78	179	264	Average																																																																																																				
3	16650.00	51.11	68.30	-17.19	43.04	42.43	17.41	51.77	--	--	Peak																																																																																																				






29																																																		
Mode	Band Edge - L																																																	
U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																		
ANT	CDD 1+2																																																	
Pol.	Horizontal																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.55</td> <td>51.44</td> <td>74.00</td> <td>-22.56</td> <td>37.72</td> <td>34.81</td> <td>11.06</td> <td>32.15</td> <td>239</td> <td>28</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5459.90</td> <td>50.05</td> <td>74.00</td> <td>-23.95</td> <td>36.29</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>239</td> <td>28</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5445.55	51.44	74.00	-22.56	37.72	34.81	11.06	32.15	239	28	Peak	2	5459.90	50.05	74.00	-23.95	36.29	34.81	11.12	32.17	239	28	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5445.55	51.44	74.00	-22.56	37.72	34.81	11.06	32.15	239	28	Peak																																							
2	5459.90	50.05	74.00	-23.95	36.29	34.81	11.12	32.17	239	28	Peak																																							
Fundamental																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>100.92</td> <td>-----</td> <td>-----</td> <td>86.54</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>239</td> <td>28</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5670.00</td> <td>93.61</td> <td>-----</td> <td>-----</td> <td>79.23</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>239</td> <td>28</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	100.92	-----	-----	86.54	35.04	11.68	32.34	239	28	Peak	2	5670.00	93.61	-----	-----	79.23	35.04	11.68	32.34	239	28	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5670.00	100.92	-----	-----	86.54	35.04	11.68	32.34	239	28	Peak																																							
2	5670.00	93.61	-----	-----	79.23	35.04	11.68	32.34	239	28	Average																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.65</td> <td>41.16</td> <td>54.00</td> <td>-12.84</td> <td>27.45</td> <td>34.81</td> <td>11.04</td> <td>32.14</td> <td>239</td> <td>28</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5440.65	41.16	54.00	-12.84	27.45	34.81	11.04	32.14	239	28	Average												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5440.65	41.16	54.00	-12.84	27.45	34.81	11.04	32.14	239	28	Average																																							
Blank																																																		



Mode	29																																						
	Band Edge - R																																						
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																						
ANT	CDD 1+2																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.15</td> <td>60.36</td> <td>68.30</td> <td>-7.94</td> <td>45.98</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>239</td> <td>28</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5726.15	60.36	68.30	-7.94	45.98	35.12	11.65	32.39	239	28	Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5726.15	60.36	68.30	-7.94	45.98	35.12	11.65	32.39	239	28	Peak																												

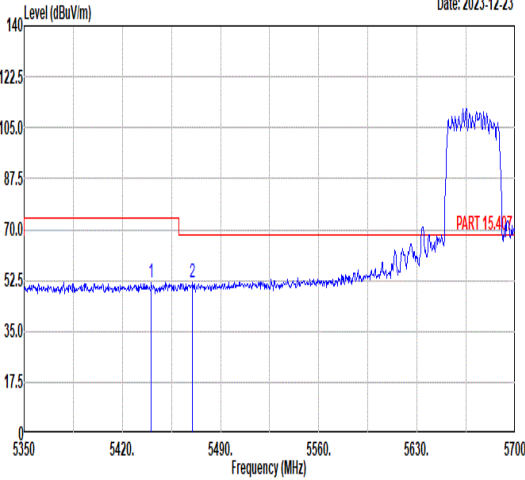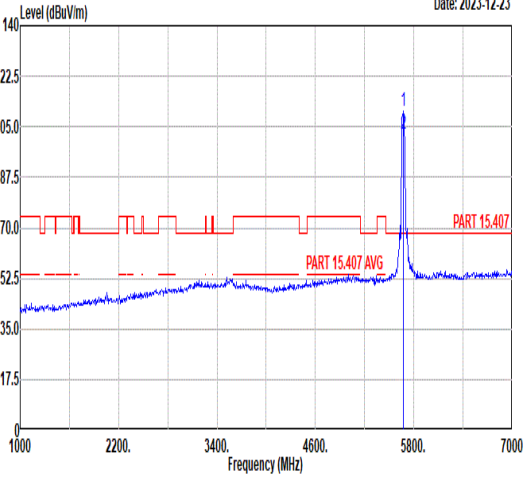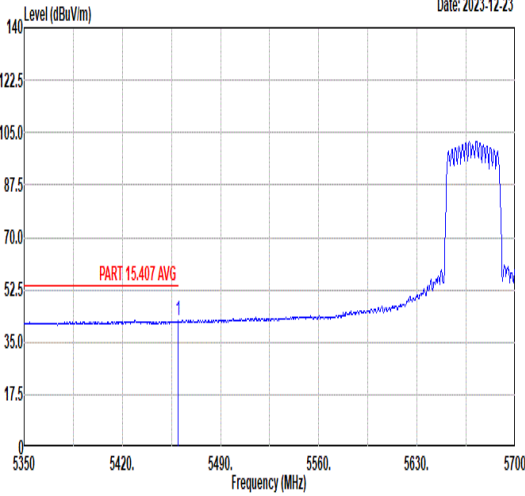

		29																																																																																																
Mode	Band Edge - L																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	 <p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.65</td> <td>51.73</td> <td>74.00</td> <td>-22.27</td> <td>38.02</td> <td>34.81</td> <td>11.04</td> <td>32.14</td> <td>100</td> <td>275</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5470.05</td> <td>51.65</td> <td>68.30</td> <td>-16.65</td> <td>37.86</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>100</td> <td>275</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5440.65	51.73	74.00	-22.27	38.02	34.81	11.04	32.14	100	275	Peak	2	5470.05	51.65	68.30	-16.65	37.86	34.81	11.16	32.18	100	275	Peak	 <p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>110.28</td> <td>-----</td> <td>-----</td> <td>95.90</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>100</td> <td>275</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5670.00</td> <td>102.53</td> <td>-----</td> <td>-----</td> <td>88.15</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>100</td> <td>275</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5670.00	110.28	-----	-----	95.90	35.04	11.68	32.34	100	275	Peak	2	5670.00	102.53	-----	-----	88.15	35.04	11.68	32.34	100	275	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5440.65	51.73	74.00	-22.27	38.02	34.81	11.04	32.14	100	275	Peak																																																																																							
2	5470.05	51.65	68.30	-16.65	37.86	34.81	11.16	32.18	100	275	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5670.00	110.28	-----	-----	95.90	35.04	11.68	32.34	100	275	Peak																																																																																							
2	5670.00	102.53	-----	-----	88.15	35.04	11.68	32.34	100	275	Average																																																																																							
Avg	 <p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.90</td> <td>42.10</td> <td>54.00</td> <td>-11.90</td> <td>28.34</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>100</td> <td>275</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.90	42.10	54.00	-11.90	28.34	34.81	11.12	32.17	100	275	Average	Blank																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5459.90	42.10	54.00	-11.90	28.34	34.81	11.12	32.17	100	275	Average																																																																																							



Mode	29																																				
	Band Edge - R																																				
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																				
ANT	CDD 1+2																																				
Pol.	Vertical	Fundamental																																			
Peak	<p>Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5724.93</td> <td>64.81</td> <td>68.30</td> <td>-3.49</td> <td>50.44</td> <td>35.11</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>275 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5724.93	64.81	68.30	-3.49	50.44	35.11	11.65	32.39	100	275 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5724.93	64.81	68.30	-3.49	50.44	35.11	11.65	32.39	100	275 Peak																												



Mode	29																																																																																																														
	Harmonic																																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																																																														
ANT	CDD 1+2																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg	<p>Date: 2023-12-13</p>	<p>Date: 2023-12-13</p>																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>50.41</td> <td>74.00</td> <td>-23.59</td> <td>46.73</td> <td>39.67</td> <td>14.74</td> <td>50.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>51.46</td> <td>68.30</td> <td>-16.84</td> <td>43.16</td> <td>42.50</td> <td>17.51</td> <td>51.71</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11340.00	50.41	74.00	-23.59	46.73	39.67	14.74	50.73	--	--	Peak	2	17010.00	51.46	68.30	-16.84	43.16	42.50	17.51	51.71	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>54.88</td> <td>74.00</td> <td>-19.12</td> <td>51.20</td> <td>39.67</td> <td>14.74</td> <td>50.73</td> <td>182</td> <td>259</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11340.00</td> <td>45.56</td> <td>54.00</td> <td>-8.44</td> <td>41.88</td> <td>39.67</td> <td>14.74</td> <td>50.73</td> <td>182</td> <td>259</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17010.00</td> <td>50.79</td> <td>68.30</td> <td>-17.51</td> <td>42.49</td> <td>42.50</td> <td>17.51</td> <td>51.71</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11340.00	54.88	74.00	-19.12	51.20	39.67	14.74	50.73	182	259	Peak	2	11340.00	45.56	54.00	-8.44	41.88	39.67	14.74	50.73	182	259	Average	3	17010.00	50.79	68.30	-17.51	42.49	42.50	17.51	51.71	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11340.00	50.41	74.00	-23.59	46.73	39.67	14.74	50.73	--	--	Peak																																																																																																				
2	17010.00	51.46	68.30	-16.84	43.16	42.50	17.51	51.71	--	--	Peak																																																																																																				
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11340.00	54.88	74.00	-19.12	51.20	39.67	14.74	50.73	182	259	Peak																																																																																																				
2	11340.00	45.56	54.00	-8.44	41.88	39.67	14.74	50.73	182	259	Average																																																																																																				
3	17010.00	50.79	68.30	-17.51	42.49	42.50	17.51	51.71	--	--	Peak																																																																																																				



	30																																																													
Mode	Band Edge																																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																																													
ANT	CDD 1+2																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	<table border="1" data-bbox="271 1064 734 1232"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5427.00</td> <td>51.40</td> <td>74.00</td> <td>-22.60</td> <td>37.73</td> <td>34.81</td> <td>10.98</td> <td>32.12</td> <td>236</td> <td>21</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5469.35</td> <td>51.68</td> <td>68.30</td> <td>-16.62</td> <td>37.89</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>236</td> <td>21</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>108.98</td> <td>-----</td> <td>-----</td> <td>94.60</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>236</td> <td>21</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5865.35</td> <td>58.26</td> <td>68.30</td> <td>-10.04</td> <td>43.95</td> <td>35.31</td> <td>11.50</td> <td>32.50</td> <td>236</td> <td>21</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5427.00	51.40	74.00	-22.60	37.73	34.81	10.98	32.12	236	21	Peak	2	5469.35	51.68	68.30	-16.62	37.89	34.81	11.16	32.18	236	21	Peak	3	5710.00	108.98	-----	-----	94.60	35.09	11.66	32.37	236	21	Peak	4	5865.35	58.26	68.30	-10.04	43.95	35.31	11.50	32.50	236	21	Peak	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																			
1	5427.00	51.40	74.00	-22.60	37.73	34.81	10.98	32.12	236	21	Peak																																																			
2	5469.35	51.68	68.30	-16.62	37.89	34.81	11.16	32.18	236	21	Peak																																																			
3	5710.00	108.98	-----	-----	94.60	35.09	11.66	32.37	236	21	Peak																																																			
4	5865.35	58.26	68.30	-10.04	43.95	35.31	11.50	32.50	236	21	Peak																																																			
Avg	<table border="1" data-bbox="271 1769 734 1915"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>41.91</td> <td>54.00</td> <td>-12.09</td> <td>28.15</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>236</td> <td>21</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>99.96</td> <td>-----</td> <td>-----</td> <td>85.58</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>236</td> <td>21</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5460.00	41.91	54.00	-12.09	28.15	34.81	11.12	32.17	236	21	Average	2	5710.00	99.96	-----	-----	85.58	35.09	11.66	32.37	236	21	Average	Blank																								
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																			
1	5460.00	41.91	54.00	-12.09	28.15	34.81	11.12	32.17	236	21	Average																																																			
2	5710.00	99.96	-----	-----	85.58	35.09	11.66	32.37	236	21	Average																																																			



		30																																																																						
Mode	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																																																							
ANT	CDD 1+2																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p style="text-align: right;">Date: 2023-12-11</p>		Blank																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>54.55</td> <td>68.30</td> <td>-13.75</td> <td>40.79</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>180</td> <td>336</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5460.00</td> <td>54.55</td> <td>68.30</td> <td>-13.75</td> <td>40.79</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>180</td> <td>336</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>119.12</td> <td>-----</td> <td>104.74</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>180</td> <td>336</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5859.30</td> <td>67.74</td> <td>68.30</td> <td>-0.56</td> <td>53.42</td> <td>35.30</td> <td>11.51</td> <td>32.49</td> <td>180</td> <td>336</td> <td>Peak</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5460.00	54.55	68.30	-13.75	40.79	34.81	11.12	32.17	180	336	Peak	2	5460.00	54.55	68.30	-13.75	40.79	34.81	11.12	32.17	180	336	Peak	3	5710.00	119.12	-----	104.74	35.09	11.66	32.37	180	336	Peak	4	5859.30	67.74	68.30	-0.56	53.42	35.30	11.51	32.49	180
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1	5460.00	54.55	68.30	-13.75	40.79	34.81	11.12	32.17	180	336	Peak																																																													
2	5460.00	54.55	68.30	-13.75	40.79	34.81	11.12	32.17	180	336	Peak																																																													
3	5710.00	119.12	-----	104.74	35.09	11.66	32.37	180	336	Peak																																																														
4	5859.30	67.74	68.30	-0.56	53.42	35.30	11.51	32.49	180	336	Peak																																																													
Avg	<p style="text-align: right;">Date: 2023-12-13</p>		Blank																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.45</td> <td>43.99</td> <td>54.00</td> <td>-10.01</td> <td>30.22</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>180</td> <td>336</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>109.74</td> <td>-----</td> <td>95.36</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>180</td> <td>336</td> <td>Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.45	43.99	54.00	-10.01	30.22	34.81	11.12	32.16	180	336	Average	2	5710.00	109.74	-----	95.36	35.09	11.66	32.37	180	336	Average																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1	5459.45	43.99	54.00	-10.01	30.22	34.81	11.12	32.16	180	336	Average																																																													
2	5710.00	109.74	-----	95.36	35.09	11.66	32.37	180	336	Average																																																														



Mode	30																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>58.22</td> <td>74.00</td> <td>-15.78</td> <td>54.41</td> <td>39.74</td> <td>14.79</td> <td>50.72</td> <td>100</td> <td>40</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11420.00</td> <td>49.34</td> <td>54.00</td> <td>-4.66</td> <td>45.53</td> <td>39.74</td> <td>14.79</td> <td>50.72</td> <td>100</td> <td>40</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17130.00</td> <td>49.81</td> <td>68.30</td> <td>-18.49</td> <td>41.65</td> <td>42.45</td> <td>17.54</td> <td>51.83</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11420.00	58.22	74.00	-15.78	54.41	39.74	14.79	50.72	100	40	Peak	2	11420.00	49.34	54.00	-4.66	45.53	39.74	14.79	50.72	100	40	Average	3	17130.00	49.81	68.30	-18.49	41.65	42.45	17.54	51.83	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>62.31</td> <td>74.00</td> <td>-11.69</td> <td>58.50</td> <td>39.74</td> <td>14.79</td> <td>50.72</td> <td>245</td> <td>17</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11420.00</td> <td>52.82</td> <td>54.00</td> <td>-1.18</td> <td>49.01</td> <td>39.74</td> <td>14.79</td> <td>50.72</td> <td>245</td> <td>17</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17130.00</td> <td>50.03</td> <td>68.30</td> <td>-18.27</td> <td>41.87</td> <td>42.45</td> <td>17.54</td> <td>51.83</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11420.00	62.31	74.00	-11.69	58.50	39.74	14.79	50.72	245	17	Peak	2	11420.00	52.82	54.00	-1.18	49.01	39.74	14.79	50.72	245	17	Average	3	17130.00	50.03	68.30	-18.27	41.87	42.45	17.54	51.83	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11420.00	58.22	74.00	-15.78	54.41	39.74	14.79	50.72	100	40	Peak																																																																																																																	
2	11420.00	49.34	54.00	-4.66	45.53	39.74	14.79	50.72	100	40	Average																																																																																																																	
3	17130.00	49.81	68.30	-18.49	41.65	42.45	17.54	51.83	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11420.00	62.31	74.00	-11.69	58.50	39.74	14.79	50.72	245	17	Peak																																																																																																																	
2	11420.00	52.82	54.00	-1.18	49.01	39.74	14.79	50.72	245	17	Average																																																																																																																	
3	17130.00	50.03	68.30	-18.27	41.87	42.45	17.54	51.83	--	--	Peak																																																																																																																	



		31																																																																																																								
Mode	Band Edge - L																																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																									
ANT	CDD 1+2																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																								
Peak	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.04</td> <td>52.73</td> <td>74.00</td> <td>-21.27</td> <td>38.97</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>247</td> <td>28</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5469.28</td> <td>52.45</td> <td>68.30</td> <td>-15.85</td> <td>38.66</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>247</td> <td>28</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.04	52.73	74.00	-21.27	38.97	34.81	11.11	32.16	247	28	Peak	2	5469.28	52.45	68.30	-15.85	38.66	34.81	11.16	32.18	247	28	Peak	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>91.73</td> <td>-----</td> <td>-----</td> <td>77.71</td> <td>34.84</td> <td>11.41</td> <td>32.23</td> <td>247</td> <td>28</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5530.00</td> <td>84.70</td> <td>-----</td> <td>-----</td> <td>70.68</td> <td>34.84</td> <td>11.41</td> <td>32.23</td> <td>247</td> <td>28</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	91.73	-----	-----	77.71	34.84	11.41	32.23	247	28	Peak	2	5530.00	84.70	-----	-----	70.68	34.84	11.41	32.23	247	28	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5457.04	52.73	74.00	-21.27	38.97	34.81	11.11	32.16	247	28	Peak																																																																																															
2	5469.28	52.45	68.30	-15.85	38.66	34.81	11.16	32.18	247	28	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5530.00	91.73	-----	-----	77.71	34.84	11.41	32.23	247	28	Peak																																																																																															
2	5530.00	84.70	-----	-----	70.68	34.84	11.41	32.23	247	28	Average																																																																																															
Avg	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.76</td> <td>44.57</td> <td>54.00</td> <td>-9.43</td> <td>30.81</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>247</td> <td>28</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.76	44.57	54.00	-9.43	30.81	34.81	11.11	32.16	247	28	Average	Blank																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5457.76	44.57	54.00	-9.43	30.81	34.81	11.11	32.16	247	28	Average																																																																																															



Mode	31																																				
	Band Edge - R																																				
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																				
ANT	CDD 1+2																																				
Pol.	Horizontal	Fundamental																																			
Peak	<p>Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5736.34</td> <td>52.82</td> <td>68.30</td> <td>-15.48</td> <td>38.43</td> <td>35.13</td> <td>11.65</td> <td>32.39</td> <td>247</td> <td>28 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5736.34	52.82	68.30	-15.48	38.43	35.13	11.65	32.39	247	28 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5736.34	52.82	68.30	-15.48	38.43	35.13	11.65	32.39	247	28 Peak																												



		31																																																																																																									
Mode	Band Edge - L																																																																																																										
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																										
ANT	CDD 1+2																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<p style="text-align: right;">Date: 2023-12-11</p>		<p style="text-align: right;">Date: 2023-12-11</p>																																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.76</td> <td>61.30</td> <td>74.00</td> <td>-12.70</td> <td>47.54</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>189</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>60.31</td> <td>68.30</td> <td>-7.99</td> <td>46.52</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>189</td> <td>359</td> <td>Peak</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.76	61.30	74.00	-12.70	47.54	34.81	11.11	32.16	189	359	Peak	2	5470.00	60.31	68.30	-7.99	46.52	34.81	11.16	32.18	189	359	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>106.74</td> <td>-----</td> <td>-----</td> <td>92.72</td> <td>34.84</td> <td>11.41</td> <td>32.23</td> <td>189</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5530.00</td> <td>100.17</td> <td>-----</td> <td>-----</td> <td>86.15</td> <td>34.84</td> <td>11.41</td> <td>32.23</td> <td>189</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	106.74	-----	-----	92.72	34.84	11.41	32.23	189	359	Peak	2	5530.00	100.17	-----	-----	86.15	34.84	11.41	32.23	189	359
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5457.76	61.30	74.00	-12.70	47.54	34.81	11.11	32.16	189	359	Peak																																																																																																
2	5470.00	60.31	68.30	-7.99	46.52	34.81	11.16	32.18	189	359	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5530.00	106.74	-----	-----	92.72	34.84	11.41	32.23	189	359	Peak																																																																																																
2	5530.00	100.17	-----	-----	86.15	34.84	11.41	32.23	189	359	Average																																																																																																
Avg	<p style="text-align: right;">Date: 2023-12-11</p>		Blank																																																																																																								
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.24</td> <td>52.54</td> <td>54.00</td> <td>-1.46</td> <td>38.78</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>189</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.24	52.54	54.00	-1.46	38.78	34.81	11.11	32.16	189	359	Average																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5458.24	52.54	54.00	-1.46	38.78	34.81	11.11	32.16	189	359	Average																																																																																																



	31																																					
Mode	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																					
ANT	CDD 1+2																																					
Pol.	Vertical	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-12-11</p>																																					
	Blank																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5735.08</td> <td>53.46</td> <td>68.30</td> <td>-14.84</td> <td>39.07</td> <td>35.13</td> <td>11.65</td> <td>32.39</td> <td>189</td> <td>359</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5735.08	53.46	68.30	-14.84	39.07	35.13	11.65	32.39	189	359	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5735.08	53.46	68.30	-14.84	39.07	35.13	11.65	32.39	189	359	Peak																											



Mode	31																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-12-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>48.98</td> <td>74.00</td> <td>-25.02</td> <td>45.74</td> <td>39.45</td> <td>14.58</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>50.40</td> <td>68.30</td> <td>-17.90</td> <td>42.37</td> <td>42.42</td> <td>17.39</td> <td>51.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	11060.00	48.98	74.00	-25.02	45.74	39.45	14.58	50.79	--	--	Peak	2	16590.00	50.40	68.30	-17.90	42.37	42.42	17.39	51.78	--	--	Peak	<p>Date: 2023-12-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>49.89</td> <td>74.00</td> <td>-24.11</td> <td>46.65</td> <td>39.45</td> <td>14.58</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>50.95</td> <td>68.30</td> <td>-17.35</td> <td>42.92</td> <td>42.42</td> <td>17.39</td> <td>51.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	11060.00	49.89	74.00	-24.11	46.65	39.45	14.58	50.79	--	--	Peak	2	16590.00	50.95	68.30	-17.35	42.92	42.42	17.39	51.78	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																											
1	11060.00	48.98	74.00	-25.02	45.74	39.45	14.58	50.79	--	--	Peak																																																																																							
2	16590.00	50.40	68.30	-17.90	42.37	42.42	17.39	51.78	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																											
1	11060.00	49.89	74.00	-24.11	46.65	39.45	14.58	50.79	--	--	Peak																																																																																							
2	16590.00	50.95	68.30	-17.35	42.92	42.42	17.39	51.78	--	--	Peak																																																																																							



	32																																																																					
Mode	Band Edge																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																																																																					
ANT	CDD 1+2																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.25</td> <td>52.27</td> <td>74.00</td> <td>-21.73</td> <td>38.51</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>239</td> <td>19 Peak</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>52.47</td> <td>68.30</td> <td>-15.83</td> <td>38.68</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>239</td> <td>19 Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>103.82</td> <td>-----</td> <td>-----</td> <td>89.44</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>239</td> <td>19 Peak</td> </tr> <tr> <td>4</td> <td>5851.05</td> <td>61.50</td> <td>68.30</td> <td>-6.80</td> <td>47.16</td> <td>35.29</td> <td>11.53</td> <td>32.48</td> <td>239</td> <td>19 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5457.25	52.27	74.00	-21.73	38.51	34.81	11.11	32.16	239	19 Peak	2	5468.80	52.47	68.30	-15.83	38.68	34.81	11.16	32.18	239	19 Peak	3	5690.00	103.82	-----	-----	89.44	35.07	11.67	32.36	239	19 Peak	4	5851.05	61.50	68.30	-6.80	47.16	35.29	11.53	32.48	239	19 Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5457.25	52.27	74.00	-21.73	38.51	34.81	11.11	32.16	239	19 Peak																																																												
2	5468.80	52.47	68.30	-15.83	38.68	34.81	11.16	32.18	239	19 Peak																																																												
3	5690.00	103.82	-----	-----	89.44	35.07	11.67	32.36	239	19 Peak																																																												
4	5851.05	61.50	68.30	-6.80	47.16	35.29	11.53	32.48	239	19 Peak																																																												
Avg	<p style="text-align: right;">Date: 2023-12-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5428.65</td> <td>43.21</td> <td>54.00</td> <td>-10.79</td> <td>29.54</td> <td>34.81</td> <td>10.99</td> <td>32.13</td> <td>239</td> <td>19 Average</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>95.73</td> <td>-----</td> <td>-----</td> <td>81.35</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>239</td> <td>19 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5428.65	43.21	54.00	-10.79	29.54	34.81	10.99	32.13	239	19 Average	2	5690.00	95.73	-----	-----	81.35	35.07	11.67	32.36	239	19 Average																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5428.65	43.21	54.00	-10.79	29.54	34.81	10.99	32.13	239	19 Average																																																												
2	5690.00	95.73	-----	-----	81.35	35.07	11.67	32.36	239	19 Average																																																												



	32																																																																											
Mode	Band Edge																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																																																																											
ANT	CDD 1+2																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.15</td> <td>57.52</td> <td>74.00</td> <td>-16.48</td> <td>43.77</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>190</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5469.90</td> <td>58.06</td> <td>68.30</td> <td>-10.24</td> <td>44.27</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>190</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>115.60</td> <td>-----</td> <td>-----</td> <td>101.22</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>190</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5870.30</td> <td>66.68</td> <td>68.30</td> <td>-1.62</td> <td>52.36</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>190</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Level	Loss	Loss				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.15	57.52	74.00	-16.48	43.77	34.81	11.10	32.16	190	360	Peak	2	5469.90	58.06	68.30	-10.24	44.27	34.81	11.16	32.18	190	360	Peak	3	5690.00	115.60	-----	-----	101.22	35.07	11.67	32.36	190	360	Peak	4	5870.30	66.68	68.30	-1.62	52.36	35.32	11.50	32.50	190	360	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq Level	Line	Level	Loss	Loss																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5456.15	57.52	74.00	-16.48	43.77	34.81	11.10	32.16	190	360	Peak																																																																	
2	5469.90	58.06	68.30	-10.24	44.27	34.81	11.16	32.18	190	360	Peak																																																																	
3	5690.00	115.60	-----	-----	101.22	35.07	11.67	32.36	190	360	Peak																																																																	
4	5870.30	66.68	68.30	-1.62	52.36	35.32	11.50	32.50	190	360	Peak																																																																	
Blank																																																																												
Avg	<p style="text-align: right;">Date: 2023-12-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.80</td> <td>50.04</td> <td>54.00</td> <td>-3.96</td> <td>36.28</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>190</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>107.61</td> <td>-----</td> <td>-----</td> <td>93.23</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>190</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Level	Loss	Loss				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.80	50.04	54.00	-3.96	36.28	34.81	11.11	32.16	190	360	Average	2	5690.00	107.61	-----	-----	93.23	35.07	11.67	32.36	190	360	Average																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq Level	Line	Level	Loss	Loss																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5457.80	50.04	54.00	-3.96	36.28	34.81	11.11	32.16	190	360	Average																																																																	
2	5690.00	107.61	-----	-----	93.23	35.07	11.67	32.36	190	360	Average																																																																	
Blank																																																																												



Mode	32																																																																																																														
	Harmonic																																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																																																																																																														
ANT	CDD 1+2																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg																																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>50.79</td> <td>74.00</td> <td>-23.21</td> <td>47.04</td> <td>39.70</td> <td>14.77</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17070.00</td> <td>50.95</td> <td>68.30</td> <td>-17.35</td> <td>42.73</td> <td>42.47</td> <td>17.52</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11380.00	50.79	74.00	-23.21	47.04	39.70	14.77	50.72	--	--	Peak	2	17070.00	50.95	68.30	-17.35	42.73	42.47	17.52	51.77	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>57.74</td> <td>74.00</td> <td>-16.26</td> <td>53.99</td> <td>39.70</td> <td>14.77</td> <td>50.72</td> <td>275</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11380.00</td> <td>50.29</td> <td>54.00</td> <td>-3.71</td> <td>46.54</td> <td>39.70</td> <td>14.77</td> <td>50.72</td> <td>275</td> <td>0</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17070.00</td> <td>50.78</td> <td>68.30</td> <td>-17.52</td> <td>42.56</td> <td>42.47</td> <td>17.52</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11380.00	57.74	74.00	-16.26	53.99	39.70	14.77	50.72	275	0	Peak	2	11380.00	50.29	54.00	-3.71	46.54	39.70	14.77	50.72	275	0	Average	3	17070.00	50.78	68.30	-17.52	42.56	42.47	17.52	51.77	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11380.00	50.79	74.00	-23.21	47.04	39.70	14.77	50.72	--	--	Peak																																																																																																				
2	17070.00	50.95	68.30	-17.35	42.73	42.47	17.52	51.77	--	--	Peak																																																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11380.00	57.74	74.00	-16.26	53.99	39.70	14.77	50.72	275	0	Peak																																																																																																				
2	11380.00	50.29	54.00	-3.71	46.54	39.70	14.77	50.72	275	0	Average																																																																																																				
3	17070.00	50.78	68.30	-17.52	42.56	42.47	17.52	51.77	--	--	Peak																																																																																																				



Mode	33																																																																																																																									
	Band Edge																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHZ																																																																																																																									
ANT	CDD 1+2																																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5622.00</td> <td>52.65</td> <td>68.30</td> <td>-15.65</td> <td>38.29</td> <td>34.97</td> <td>11.70</td> <td>32.31</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>63.50</td> <td>105.20</td> <td>-41.70</td> <td>49.13</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5715.80</td> <td>74.54</td> <td>109.63</td> <td>-35.09</td> <td>60.16</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5724.40</td> <td>81.89</td> <td>120.83</td> <td>-38.94</td> <td>67.52</td> <td>35.11</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5622.00	52.65	68.30	-15.65	38.29	34.97	11.70	32.31	100	0	Peak	2	5700.00	63.50	105.20	-41.70	49.13	35.08	11.66	32.37	100	0	Peak	3	5715.80	74.54	109.63	-35.09	60.16	35.10	11.66	32.38	100	0	Peak	4	5724.40	81.89	120.83	-38.94	67.52	35.11	11.65	32.39	100	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.91</td> <td>-----</td> <td>-----</td> <td>89.53</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5745.00</td> <td>96.51</td> <td>-----</td> <td>-----</td> <td>82.13</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5745.00	103.91	-----	-----	89.53	35.14	11.64	32.40	100	0	Peak	2	5745.00	96.51	-----	-----	82.13	35.14	11.64	32.40	100	0	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																																			
1	5622.00	52.65	68.30	-15.65	38.29	34.97	11.70	32.31	100	0	Peak																																																																																																															
2	5700.00	63.50	105.20	-41.70	49.13	35.08	11.66	32.37	100	0	Peak																																																																																																															
3	5715.80	74.54	109.63	-35.09	60.16	35.10	11.66	32.38	100	0	Peak																																																																																																															
4	5724.40	81.89	120.83	-38.94	67.52	35.11	11.65	32.39	100	0	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																																			
1	5745.00	103.91	-----	-----	89.53	35.14	11.64	32.40	100	0	Peak																																																																																																															
2	5745.00	96.51	-----	-----	82.13	35.14	11.64	32.40	100	0	Average																																																																																																															



Mode	33																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																													
ANT	CDD 1+2																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.80</td> <td>63.44</td> <td>68.30</td> <td>-4.86</td> <td>49.07</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>271</td> <td>321</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5699.00</td> <td>78.61</td> <td>104.47</td> <td>-25.86</td> <td>64.23</td> <td>35.08</td> <td>11.67</td> <td>32.37</td> <td>271</td> <td>321</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5718.40</td> <td>87.99</td> <td>110.35</td> <td>-22.36</td> <td>73.60</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>271</td> <td>321</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5723.60</td> <td>96.24</td> <td>119.01</td> <td>-22.77</td> <td>81.86</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>271</td> <td>321</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5648.80	63.44	68.30	-4.86	49.07	35.01	11.69	32.33	271	321	Peak	2	5699.00	78.61	104.47	-25.86	64.23	35.08	11.67	32.37	271	321	Peak	3	5718.40	87.99	110.35	-22.36	73.60	35.11	11.66	32.38	271	321	Peak	4	5723.60	96.24	119.01	-22.77	81.86	35.11	11.65	32.38	271	321	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>118.88</td> <td>-----</td> <td>-----</td> <td>104.50</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>271</td> <td>321</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5745.00</td> <td>111.52</td> <td>-----</td> <td>-----</td> <td>97.14</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>271</td> <td>321</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5745.00	118.88	-----	-----	104.50	35.14	11.64	32.40	271	321	Peak	2	5745.00	111.52	-----	-----	97.14	35.14	11.64	32.40	271	321	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																																																					
1	5648.80	63.44	68.30	-4.86	49.07	35.01	11.69	32.33	271	321	Peak																																																																																																			
2	5699.00	78.61	104.47	-25.86	64.23	35.08	11.67	32.37	271	321	Peak																																																																																																			
3	5718.40	87.99	110.35	-22.36	73.60	35.11	11.66	32.38	271	321	Peak																																																																																																			
4	5723.60	96.24	119.01	-22.77	81.86	35.11	11.65	32.38	271	321	Peak																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																																																					
1	5745.00	118.88	-----	-----	104.50	35.14	11.64	32.40	271	321	Peak																																																																																																			
2	5745.00	111.52	-----	-----	97.14	35.14	11.64	32.40	271	321	Average																																																																																																			



Mode	33																																																																																																																		
	Harmonic																																																																																																																		
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																		
ANT	CDD 1+2																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																	
Peak Avg	<p>Date: 2023-12-15</p>	<p>Date: 2023-12-15</p>																																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>59.67</td> <td>74.00</td> <td>-14.33</td> <td>55.75</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>45</td> <td>Peak</td> </tr> <tr> <td>2 11490.00</td> <td>49.24</td> <td>54.00</td> <td>-4.76</td> <td>45.32</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>45</td> <td>Average</td> </tr> <tr> <td>3 17235.00</td> <td>50.59</td> <td>68.30</td> <td>-17.71</td> <td>42.54</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11490.00	59.67	74.00	-14.33	55.75	39.79	14.83	50.70	100	45	Peak	2 11490.00	49.24	54.00	-4.76	45.32	39.79	14.83	50.70	100	45	Average	3 17235.00	50.59	68.30	-17.71	42.54	42.41	17.57	51.93	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>63.92</td> <td>74.00</td> <td>-10.08</td> <td>60.00</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>341</td> <td>Peak</td> </tr> <tr> <td>2 11490.00</td> <td>53.49</td> <td>54.00</td> <td>-0.51</td> <td>49.57</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>341</td> <td>Average</td> </tr> <tr> <td>3 17235.00</td> <td>50.80</td> <td>68.30</td> <td>-17.50</td> <td>42.75</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11490.00	63.92	74.00	-10.08	60.00	39.79	14.83	50.70	100	341	Peak	2 11490.00	53.49	54.00	-0.51	49.57	39.79	14.83	50.70	100	341	Average	3 17235.00	50.80	68.30	-17.50	42.75	42.41	17.57	51.93	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1 11490.00	59.67	74.00	-14.33	55.75	39.79	14.83	50.70	100	45	Peak																																																																																																									
2 11490.00	49.24	54.00	-4.76	45.32	39.79	14.83	50.70	100	45	Average																																																																																																									
3 17235.00	50.59	68.30	-17.71	42.54	42.41	17.57	51.93	--	--	Peak																																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1 11490.00	63.92	74.00	-10.08	60.00	39.79	14.83	50.70	100	341	Peak																																																																																																									
2 11490.00	53.49	54.00	-0.51	49.57	39.79	14.83	50.70	100	341	Average																																																																																																									
3 17235.00	50.80	68.30	-17.50	42.75	42.41	17.57	51.93	--	--	Peak																																																																																																									



Mode	34																																																																																																										
	Harmonic																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																										
ANT	CDD 1+2																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>51.71</td> <td>74.00</td> <td>-22.29</td> <td>47.63</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>51.35</td> <td>68.30</td> <td>-16.95</td> <td>43.44</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	51.71	74.00	-22.29	47.63	39.86	14.88	50.66	-- -- Peak	2	17355.00	51.35	68.30	-16.95	43.44	42.36	17.60	52.05	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>63.28</td> <td>74.00</td> <td>-10.72</td> <td>59.20</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>100 341 Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>52.98</td> <td>54.00</td> <td>-1.02</td> <td>48.90</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>100 341 Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>50.69</td> <td>68.30</td> <td>-17.61</td> <td>42.78</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	63.28	74.00	-10.72	59.20	39.86	14.88	50.66	100 341 Peak	2	11570.00	52.98	54.00	-1.02	48.90	39.86	14.88	50.66	100 341 Average	3	17355.00	50.69	68.30	-17.61	42.78	42.36	17.60	52.05
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	11570.00	51.71	74.00	-22.29	47.63	39.86	14.88	50.66	-- -- Peak																																																																																																		
2	17355.00	51.35	68.30	-16.95	43.44	42.36	17.60	52.05	-- -- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	11570.00	63.28	74.00	-10.72	59.20	39.86	14.88	50.66	100 341 Peak																																																																																																		
2	11570.00	52.98	54.00	-1.02	48.90	39.86	14.88	50.66	100 341 Average																																																																																																		
3	17355.00	50.69	68.30	-17.61	42.78	42.36	17.60	52.05	-- -- Peak																																																																																																		



Mode	35																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																			
ANT	CDD 1+2																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<p>Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.40</td> <td>82.65</td> <td>121.29</td> <td>-38.64</td> <td>68.31</td> <td>35.29</td> <td>11.53</td> <td>32.48</td> <td>159</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5855.40</td> <td>77.57</td> <td>110.69</td> <td>-33.12</td> <td>63.24</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>159</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5875.40</td> <td>67.02</td> <td>104.90</td> <td>-37.88</td> <td>52.70</td> <td>35.33</td> <td>11.49</td> <td>32.50</td> <td>159</td> <td>0 Peak</td> </tr> <tr> <td>4</td> <td>5927.80</td> <td>58.18</td> <td>68.30</td> <td>-10.12</td> <td>43.92</td> <td>35.40</td> <td>11.40</td> <td>32.54</td> <td>159</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5850.40	82.65	121.29	-38.64	68.31	35.29	11.53	32.48	159	0 Peak	2	5855.40	77.57	110.69	-33.12	63.24	35.30	11.52	32.49	159	0 Peak	3	5875.40	67.02	104.90	-37.88	52.70	35.33	11.49	32.50	159	0 Peak	4	5927.80	58.18	68.30	-10.12	43.92	35.40	11.40	32.54	159	0 Peak	<p>Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.05</td> <td>-----</td> <td>-----</td> <td>94.68</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>159</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>102.76</td> <td>-----</td> <td>-----</td> <td>88.39</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>159</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	109.05	-----	-----	94.68	35.26	11.57	32.46	159	0 Peak	2	5825.00	102.76	-----	-----	88.39	35.26	11.57	32.46	159	0 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																													
1	5850.40	82.65	121.29	-38.64	68.31	35.29	11.53	32.48	159	0 Peak																																																																																																										
2	5855.40	77.57	110.69	-33.12	63.24	35.30	11.52	32.49	159	0 Peak																																																																																																										
3	5875.40	67.02	104.90	-37.88	52.70	35.33	11.49	32.50	159	0 Peak																																																																																																										
4	5927.80	58.18	68.30	-10.12	43.92	35.40	11.40	32.54	159	0 Peak																																																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																													
1	5825.00	109.05	-----	-----	94.68	35.26	11.57	32.46	159	0 Peak																																																																																																										
2	5825.00	102.76	-----	-----	88.39	35.26	11.57	32.46	159	0 Average																																																																																																										



Mode	35																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																																																							
ANT	CDD 1+2																																																																																																																							
Pol.	Vertical	Fundamental																																																																																																																						
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.40</td> <td>89.40</td> <td>116.73</td> <td>-27.33</td> <td>75.07</td> <td>35.29</td> <td>11.53</td> <td>32.49</td> <td>100</td> <td>252 Peak</td> </tr> <tr> <td>2</td> <td>5856.20</td> <td>87.69</td> <td>110.46</td> <td>-22.77</td> <td>73.36</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>252 Peak</td> </tr> <tr> <td>3</td> <td>5882.00</td> <td>76.78</td> <td>100.00</td> <td>-23.22</td> <td>62.48</td> <td>35.33</td> <td>11.48</td> <td>32.51</td> <td>100</td> <td>252 Peak</td> </tr> <tr> <td>4</td> <td>5927.20</td> <td>65.28</td> <td>68.30</td> <td>-3.02</td> <td>51.02</td> <td>35.40</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>252 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5852.40	89.40	116.73	-27.33	75.07	35.29	11.53	32.49	100	252 Peak	2	5856.20	87.69	110.46	-22.77	73.36	35.30	11.52	32.49	100	252 Peak	3	5882.00	76.78	100.00	-23.22	62.48	35.33	11.48	32.51	100	252 Peak	4	5927.20	65.28	68.30	-3.02	51.02	35.40	11.40	32.54	100	252 Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>118.76</td> <td>-----</td> <td>104.39</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>100</td> <td>252 Peak</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>112.86</td> <td>-----</td> <td>98.49</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>100</td> <td>252 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5825.00	118.76	-----	104.39	35.26	11.57	32.46	100	252 Peak	2	5825.00	112.86	-----	98.49	35.26	11.57	32.46	100	252 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																
1	5852.40	89.40	116.73	-27.33	75.07	35.29	11.53	32.49	100	252 Peak																																																																																																														
2	5856.20	87.69	110.46	-22.77	73.36	35.30	11.52	32.49	100	252 Peak																																																																																																														
3	5882.00	76.78	100.00	-23.22	62.48	35.33	11.48	32.51	100	252 Peak																																																																																																														
4	5927.20	65.28	68.30	-3.02	51.02	35.40	11.40	32.54	100	252 Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																
1	5825.00	118.76	-----	104.39	35.26	11.57	32.46	100	252 Peak																																																																																																															
2	5825.00	112.86	-----	98.49	35.26	11.57	32.46	100	252 Average																																																																																																															



Mode	35																																																																																											
	Harmonic																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>52.79</td> <td>74.00</td> <td>-21.21</td> <td>48.55</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 17475.00</td> <td>51.94</td> <td>68.30</td> <td>-16.36</td> <td>44.17</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	52.79	74.00	-21.21	48.55	39.92	14.93	50.61	--	-- Peak	2 17475.00	51.94	68.30	-16.36	44.17	42.31	17.63	52.17	--	-- Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>63.33</td> <td>74.00</td> <td>-10.67</td> <td>59.09</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>235</td> <td>341 Peak</td> </tr> <tr> <td>2 11650.00</td> <td>52.73</td> <td>54.00</td> <td>-1.27</td> <td>48.49</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>235</td> <td>341 Average</td> </tr> <tr> <td>3 17475.00</td> <td>52.35</td> <td>68.30</td> <td>-15.95</td> <td>44.58</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	63.33	74.00	-10.67	59.09	39.92	14.93	50.61	235	341 Peak	2 11650.00	52.73	54.00	-1.27	48.49	39.92	14.93	50.61	235	341 Average	3 17475.00	52.35	68.30	-15.95	44.58	42.31	17.63	52.17	--	-- Peak
	Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 11650.00	52.79	74.00	-21.21	48.55	39.92	14.93	50.61	--	-- Peak																																																																																			
2 17475.00	51.94	68.30	-16.36	44.17	42.31	17.63	52.17	--	-- Peak																																																																																			
Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 11650.00	63.33	74.00	-10.67	59.09	39.92	14.93	50.61	235	341 Peak																																																																																			
2 11650.00	52.73	54.00	-1.27	48.49	39.92	14.93	50.61	235	341 Average																																																																																			
3 17475.00	52.35	68.30	-15.95	44.58	42.31	17.63	52.17	--	-- Peak																																																																																			



Mode	36																																																																																																																									
	Band Edge																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																									
ANT	CDD 1+2																																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.80</td> <td>54.92</td> <td>68.30</td> <td>-13.38</td> <td>40.55</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>351</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5699.00</td> <td>66.34</td> <td>104.47</td> <td>-38.13</td> <td>51.96</td> <td>35.08</td> <td>11.67</td> <td>32.37</td> <td>100</td> <td>351</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5719.40</td> <td>78.72</td> <td>110.63</td> <td>-31.91</td> <td>64.33</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>351</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5724.00</td> <td>85.51</td> <td>119.92</td> <td>-34.41</td> <td>71.14</td> <td>35.11</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>351</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5648.80	54.92	68.30	-13.38	40.55	35.01	11.69	32.33	100	351	Peak	2	5699.00	66.34	104.47	-38.13	51.96	35.08	11.67	32.37	100	351	Peak	3	5719.40	78.72	110.63	-31.91	64.33	35.11	11.66	32.38	100	351	Peak	4	5724.00	85.51	119.92	-34.41	71.14	35.11	11.65	32.39	100	351	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.48</td> <td>-----</td> <td>-----</td> <td>94.10</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>351</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5745.00</td> <td>102.99</td> <td>-----</td> <td>-----</td> <td>88.61</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>351</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5745.00	108.48	-----	-----	94.10	35.14	11.64	32.40	100	351	Peak	2	5745.00	102.99	-----	-----	88.61	35.14	11.64	32.40	100	351	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																																																			
1	5648.80	54.92	68.30	-13.38	40.55	35.01	11.69	32.33	100	351	Peak																																																																																																															
2	5699.00	66.34	104.47	-38.13	51.96	35.08	11.67	32.37	100	351	Peak																																																																																																															
3	5719.40	78.72	110.63	-31.91	64.33	35.11	11.66	32.38	100	351	Peak																																																																																																															
4	5724.00	85.51	119.92	-34.41	71.14	35.11	11.65	32.39	100	351	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																																																			
1	5745.00	108.48	-----	-----	94.10	35.14	11.64	32.40	100	351	Peak																																																																																																															
2	5745.00	102.99	-----	-----	88.61	35.14	11.64	32.40	100	351	Average																																																																																																															



Mode	36																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																													
ANT	CDD 1+2																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.80</td> <td>67.28</td> <td>68.30</td> <td>-1.02</td> <td>52.91</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>199</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5699.40</td> <td>81.55</td> <td>104.76</td> <td>-23.21</td> <td>67.17</td> <td>35.08</td> <td>11.67</td> <td>32.37</td> <td>199</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5719.40</td> <td>92.52</td> <td>110.63</td> <td>-18.11</td> <td>78.13</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>199</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5724.20</td> <td>97.51</td> <td>120.38</td> <td>-22.87</td> <td>83.14</td> <td>35.11</td> <td>11.65</td> <td>32.39</td> <td>199</td> <td>262</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5649.80	67.28	68.30	-1.02	52.91	35.01	11.69	32.33	199	262	Peak	2	5699.40	81.55	104.76	-23.21	67.17	35.08	11.67	32.37	199	262	Peak	3	5719.40	92.52	110.63	-18.11	78.13	35.11	11.66	32.38	199	262	Peak	4	5724.20	97.51	120.38	-22.87	83.14	35.11	11.65	32.39	199	262	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>120.75</td> <td>-----</td> <td>-----</td> <td>106.37</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>199</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5745.00</td> <td>114.84</td> <td>-----</td> <td>-----</td> <td>100.46</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>199</td> <td>262</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5745.00	120.75	-----	-----	106.37	35.14	11.64	32.40	199	262	Peak	2	5745.00	114.84	-----	-----	100.46	35.14	11.64	32.40	199	262	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																																																					
1	5649.80	67.28	68.30	-1.02	52.91	35.01	11.69	32.33	199	262	Peak																																																																																																			
2	5699.40	81.55	104.76	-23.21	67.17	35.08	11.67	32.37	199	262	Peak																																																																																																			
3	5719.40	92.52	110.63	-18.11	78.13	35.11	11.66	32.38	199	262	Peak																																																																																																			
4	5724.20	97.51	120.38	-22.87	83.14	35.11	11.65	32.39	199	262	Peak																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																																																					
1	5745.00	120.75	-----	-----	106.37	35.14	11.64	32.40	199	262	Peak																																																																																																			
2	5745.00	114.84	-----	-----	100.46	35.14	11.64	32.40	199	262	Average																																																																																																			



Mode	36																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>57.60</td> <td>74.00</td> <td>-16.40</td> <td>53.68</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>45</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>48.03</td> <td>54.00</td> <td>-5.97</td> <td>44.11</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>45</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>50.30</td> <td>68.30</td> <td>-18.00</td> <td>42.25</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	57.60	74.00	-16.40	53.68	39.79	14.83	50.70	100	45	Peak	2	11490.00	48.03	54.00	-5.97	44.11	39.79	14.83	50.70	100	45	Average	3	17235.00	50.30	68.30	-18.00	42.25	42.41	17.57	51.93	--	--	Peak	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>62.77</td> <td>74.00</td> <td>-11.23</td> <td>58.85</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>341</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>52.43</td> <td>54.00</td> <td>-1.57</td> <td>48.51</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>100</td> <td>341</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>51.14</td> <td>68.30</td> <td>-17.16</td> <td>43.09</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	62.77	74.00	-11.23	58.85	39.79	14.83	50.70	100	341	Peak	2	11490.00	52.43	54.00	-1.57	48.51	39.79	14.83	50.70	100	341	Average	3	17235.00	51.14	68.30	-17.16	43.09	42.41	17.57	51.93	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11490.00	57.60	74.00	-16.40	53.68	39.79	14.83	50.70	100	45	Peak																																																																																																																	
2	11490.00	48.03	54.00	-5.97	44.11	39.79	14.83	50.70	100	45	Average																																																																																																																	
3	17235.00	50.30	68.30	-18.00	42.25	42.41	17.57	51.93	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11490.00	62.77	74.00	-11.23	58.85	39.79	14.83	50.70	100	341	Peak																																																																																																																	
2	11490.00	52.43	54.00	-1.57	48.51	39.79	14.83	50.70	100	341	Average																																																																																																																	
3	17235.00	51.14	68.30	-17.16	43.09	42.41	17.57	51.93	--	--	Peak																																																																																																																	



Mode	37																																																																																																																						
	Harmonic																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																																						
ANT	CDD 1+2																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																					
Peak Avg																																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>53.31</td> <td>74.00</td> <td>-20.69</td> <td>49.23</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.39</td> <td>68.30</td> <td>-17.91</td> <td>42.48</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	53.31	74.00	-20.69	49.23	39.86	14.88	50.66	--	--	Peak	2	17355.00	50.39	68.30	-17.91	42.48	42.36	17.60	52.05	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>63.33</td> <td>74.00</td> <td>-10.67</td> <td>59.25</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>128</td> <td>341</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>53.04</td> <td>54.00</td> <td>-0.96</td> <td>48.96</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>128</td> <td>341</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>52.40</td> <td>68.30</td> <td>-15.90</td> <td>44.49</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	63.33	74.00	-10.67	59.25	39.86	14.88	50.66	128	341	Peak	2	11570.00	53.04	54.00	-0.96	48.96	39.86	14.88	50.66	128	341	Average	3	17355.00	52.40	68.30	-15.90	44.49	42.36	17.60	52.05	--	--
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11570.00	53.31	74.00	-20.69	49.23	39.86	14.88	50.66	--	--	Peak																																																																																																												
2	17355.00	50.39	68.30	-17.91	42.48	42.36	17.60	52.05	--	--	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11570.00	63.33	74.00	-10.67	59.25	39.86	14.88	50.66	128	341	Peak																																																																																																												
2	11570.00	53.04	54.00	-0.96	48.96	39.86	14.88	50.66	128	341	Average																																																																																																												
3	17355.00	52.40	68.30	-15.90	44.49	42.36	17.60	52.05	--	--	Peak																																																																																																												



		38																																																																																																																								
Mode	Band Edge																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																									
ANT	CDD 1+2																																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																																								
Peak	<p style="text-align: right;">Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.00</td> <td>83.93</td> <td>122.20</td> <td>-38.27</td> <td>69.59</td> <td>35.29</td> <td>11.53</td> <td>32.48</td> <td>167</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5860.60</td> <td>77.59</td> <td>109.23</td> <td>-31.64</td> <td>63.27</td> <td>35.30</td> <td>11.51</td> <td>32.49</td> <td>167</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5889.80</td> <td>66.82</td> <td>94.22</td> <td>-27.40</td> <td>52.53</td> <td>35.35</td> <td>11.46</td> <td>32.52</td> <td>167</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5936.20</td> <td>56.01</td> <td>68.30</td> <td>-12.29</td> <td>41.77</td> <td>35.41</td> <td>11.38</td> <td>32.55</td> <td>167</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5850.00	83.93	122.20	-38.27	69.59	35.29	11.53	32.48	167	0	Peak	2	5860.60	77.59	109.23	-31.64	63.27	35.30	11.51	32.49	167	0	Peak	3	5889.80	66.82	94.22	-27.40	52.53	35.35	11.46	32.52	167	0	Peak	4	5936.20	56.01	68.30	-12.29	41.77	35.41	11.38	32.55	167	0	Peak	<p style="text-align: right;">Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.08</td> <td>-----</td> <td>-----</td> <td>95.71</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>167</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>103.50</td> <td>-----</td> <td>-----</td> <td>89.13</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>167</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	110.08	-----	-----	95.71	35.26	11.57	32.46	167	0	Peak	2	5825.00	103.50	-----	-----	89.13	35.26	11.57	32.46	167	0	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	5850.00	83.93	122.20	-38.27	69.59	35.29	11.53	32.48	167	0	Peak																																																																																																															
2	5860.60	77.59	109.23	-31.64	63.27	35.30	11.51	32.49	167	0	Peak																																																																																																															
3	5889.80	66.82	94.22	-27.40	52.53	35.35	11.46	32.52	167	0	Peak																																																																																																															
4	5936.20	56.01	68.30	-12.29	41.77	35.41	11.38	32.55	167	0	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	5825.00	110.08	-----	-----	95.71	35.26	11.57	32.46	167	0	Peak																																																																																																															
2	5825.00	103.50	-----	-----	89.13	35.26	11.57	32.46	167	0	Average																																																																																																															



	38																																																																																																																											
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	<p style="text-align: right;">Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.20</td> <td>90.57</td> <td>119.46</td> <td>-28.89</td> <td>76.23</td> <td>35.29</td> <td>11.53</td> <td>32.48</td> <td>100</td> <td>246 Peak</td> </tr> <tr> <td>2</td> <td>5858.80</td> <td>84.54</td> <td>109.73</td> <td>-25.19</td> <td>70.21</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>246 Peak</td> </tr> <tr> <td>3</td> <td>5876.00</td> <td>74.90</td> <td>104.46</td> <td>-29.56</td> <td>60.58</td> <td>35.33</td> <td>11.49</td> <td>32.50</td> <td>100</td> <td>246 Peak</td> </tr> <tr> <td>4</td> <td>5929.00</td> <td>65.42</td> <td>68.30</td> <td>-2.88</td> <td>51.17</td> <td>35.40</td> <td>11.40</td> <td>32.55</td> <td>100</td> <td>246 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5851.20	90.57	119.46	-28.89	76.23	35.29	11.53	32.48	100	246 Peak	2	5858.80	84.54	109.73	-25.19	70.21	35.30	11.52	32.49	100	246 Peak	3	5876.00	74.90	104.46	-29.56	60.58	35.33	11.49	32.50	100	246 Peak	4	5929.00	65.42	68.30	-2.88	51.17	35.40	11.40	32.55	100	246 Peak	<p style="text-align: right;">Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>118.58</td> <td>-----</td> <td>-----</td> <td>104.21</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>100</td> <td>246 Peak</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>112.50</td> <td>-----</td> <td>-----</td> <td>98.13</td> <td>35.26</td> <td>11.57</td> <td>32.46</td> <td>100</td> <td>246 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5825.00	118.58	-----	-----	104.21	35.26	11.57	32.46	100	246 Peak	2	5825.00	112.50	-----	-----	98.13	35.26	11.57	32.46	100	246 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																			
1	5851.20	90.57	119.46	-28.89	76.23	35.29	11.53	32.48	100	246 Peak																																																																																																																		
2	5858.80	84.54	109.73	-25.19	70.21	35.30	11.52	32.49	100	246 Peak																																																																																																																		
3	5876.00	74.90	104.46	-29.56	60.58	35.33	11.49	32.50	100	246 Peak																																																																																																																		
4	5929.00	65.42	68.30	-2.88	51.17	35.40	11.40	32.55	100	246 Peak																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																			
1	5825.00	118.58	-----	-----	104.21	35.26	11.57	32.46	100	246 Peak																																																																																																																		
2	5825.00	112.50	-----	-----	98.13	35.26	11.57	32.46	100	246 Average																																																																																																																		



Mode	38																																																											
	Harmonic																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																											
ANT	CDD 1+2																																																											
Pol.	Horizontal	Vertical																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11650.00 52.34 74.00 -21.66 48.10 39.92 14.93 50.61 -- --</td> <td>Peak</td> </tr> <tr> <td>2 17475.00 51.43 68.30 -16.87 43.66 42.31 17.63 52.17 -- --</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor								MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg								1 11650.00 52.34 74.00 -21.66 48.10 39.92 14.93 50.61 -- --	Peak	2 17475.00 51.43 68.30 -16.87 43.66 42.31 17.63 52.17 -- --	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11650.00 62.68 74.00 -11.32 58.44 39.92 14.93 50.61 224 341</td> <td>Peak</td> </tr> <tr> <td>2 11650.00 52.47 54.00 -1.53 48.23 39.92 14.93 50.61 224 341</td> <td>Average</td> </tr> <tr> <td>3 17475.00 51.64 68.30 -16.66 43.87 42.31 17.63 52.17 -- --</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor								MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg								1 11650.00 62.68 74.00 -11.32 58.44 39.92 14.93 50.61 224 341	Peak	2 11650.00 52.47 54.00 -1.53 48.23 39.92 14.93 50.61 224 341	Average	3 17475.00 51.64 68.30 -16.66 43.87 42.31 17.63 52.17 -- --	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																				
Freq Level Line Margin Level Factor Loss Factor																																																												
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg																																																												
1 11650.00 52.34 74.00 -21.66 48.10 39.92 14.93 50.61 -- --	Peak																																																											
2 17475.00 51.43 68.30 -16.87 43.66 42.31 17.63 52.17 -- --	Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																					
Freq Level Line Margin Level Factor Loss Factor																																																												
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg																																																												
1 11650.00 62.68 74.00 -11.32 58.44 39.92 14.93 50.61 224 341	Peak																																																											
2 11650.00 52.47 54.00 -1.53 48.23 39.92 14.93 50.61 224 341	Average																																																											
3 17475.00 51.64 68.30 -16.66 43.87 42.31 17.63 52.17 -- --	Peak																																																											





Mode	39																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																					
ANT	CDD 1+2																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.00</td> <td>57.84</td> <td>68.30</td> <td>-10.46</td> <td>43.47</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>188</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5699.00</td> <td>66.83</td> <td>104.47</td> <td>-37.64</td> <td>52.45</td> <td>35.08</td> <td>11.67</td> <td>32.37</td> <td>188</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5719.20</td> <td>82.49</td> <td>110.58</td> <td>-28.09</td> <td>68.10</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>188</td> <td>0 Peak</td> </tr> <tr> <td>4</td> <td>5723.40</td> <td>82.71</td> <td>118.55</td> <td>-35.84</td> <td>68.33</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>188</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5649.00	57.84	68.30	-10.46	43.47	35.01	11.69	32.33	188	0 Peak	2	5699.00	66.83	104.47	-37.64	52.45	35.08	11.67	32.37	188	0 Peak	3	5719.20	82.49	110.58	-28.09	68.10	35.11	11.66	32.38	188	0 Peak	4	5723.40	82.71	118.55	-35.84	68.33	35.11	11.65	32.38	188	0 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>107.24</td> <td>-----</td> <td>-----</td> <td>92.85</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>188</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5755.00</td> <td>99.75</td> <td>-----</td> <td>-----</td> <td>85.36</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>188</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5755.00	107.24	-----	-----	92.85	35.16	11.64	32.41	188	0 Peak	2	5755.00	99.75	-----	-----	85.36	35.16	11.64	32.41	188	0 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq Level	Line Margin	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																														
1	5649.00	57.84	68.30	-10.46	43.47	35.01	11.69	32.33	188	0 Peak																																																																																																												
2	5699.00	66.83	104.47	-37.64	52.45	35.08	11.67	32.37	188	0 Peak																																																																																																												
3	5719.20	82.49	110.58	-28.09	68.10	35.11	11.66	32.38	188	0 Peak																																																																																																												
4	5723.40	82.71	118.55	-35.84	68.33	35.11	11.65	32.38	188	0 Peak																																																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq Level	Line Margin	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																														
1	5755.00	107.24	-----	-----	92.85	35.16	11.64	32.41	188	0 Peak																																																																																																												
2	5755.00	99.75	-----	-----	85.36	35.16	11.64	32.41	188	0 Average																																																																																																												



Mode	39																																																															
	Band Edge - R																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																															
ANT	CDD 1+2																																																															
Pol.	Horizontal	Fundamental																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.80</td> <td>61.32</td> <td>118.10</td> <td>-56.78</td> <td>46.99</td> <td>35.29</td> <td>11.53</td> <td>32.49</td> <td>188</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5856.00</td> <td>60.37</td> <td>110.52</td> <td>-50.15</td> <td>46.04</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>188</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5877.60</td> <td>59.50</td> <td>103.27</td> <td>-43.77</td> <td>45.20</td> <td>35.33</td> <td>11.48</td> <td>32.51</td> <td>188</td> <td>0 Peak</td> </tr> <tr> <td>4</td> <td>5931.20</td> <td>52.32</td> <td>68.30</td> <td>-15.98</td> <td>38.08</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>188</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5851.80	61.32	118.10	-56.78	46.99	35.29	11.53	32.49	188	0 Peak	2	5856.00	60.37	110.52	-50.15	46.04	35.30	11.52	32.49	188	0 Peak	3	5877.60	59.50	103.27	-43.77	45.20	35.33	11.48	32.51	188	0 Peak	4	5931.20	52.32	68.30	-15.98	38.08	35.40	11.39	32.55	188	0 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																							
1	5851.80	61.32	118.10	-56.78	46.99	35.29	11.53	32.49	188	0 Peak																																																						
2	5856.00	60.37	110.52	-50.15	46.04	35.30	11.52	32.49	188	0 Peak																																																						
3	5877.60	59.50	103.27	-43.77	45.20	35.33	11.48	32.51	188	0 Peak																																																						
4	5931.20	52.32	68.30	-15.98	38.08	35.40	11.39	32.55	188	0 Peak																																																						

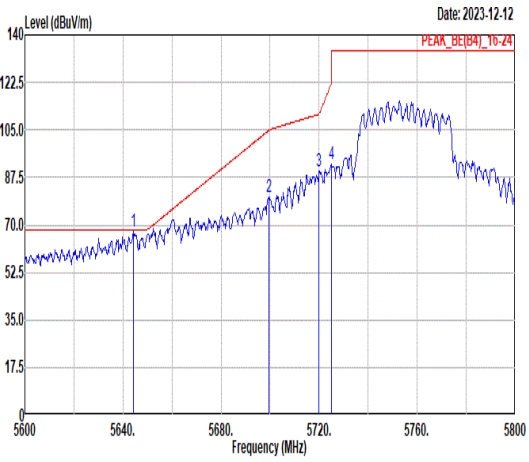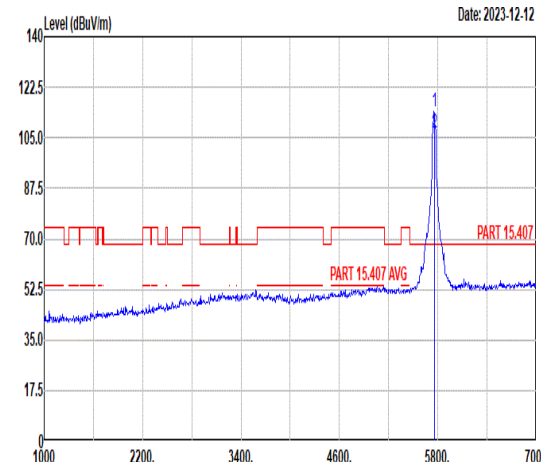

Mode	39																																																																																																																									
	Band Edge - L																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHZ																																																																																																																									
ANT	CDD 1+2																																																																																																																									
Pol.	Vertical	Fundamental																																																																																																																								
Peak	 <p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.40</td> <td>67.46</td> <td>68.30</td> <td>-0.84</td> <td>53.09</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5699.60</td> <td>80.30</td> <td>104.91</td> <td>-24.61</td> <td>65.93</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>89.64</td> <td>110.80</td> <td>-21.16</td> <td>75.25</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5725.00</td> <td>92.43</td> <td>122.20</td> <td>-29.77</td> <td>78.06</td> <td>35.11</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5644.40	67.46	68.30	-0.84	53.09	35.00	11.69	32.32	100	323	Peak	2	5699.60	80.30	104.91	-24.61	65.93	35.08	11.66	32.37	100	323	Peak	3	5720.00	89.64	110.80	-21.16	75.25	35.11	11.66	32.38	100	323	Peak	4	5725.00	92.43	122.20	-29.77	78.06	35.11	11.65	32.39	100	323	Peak	 <p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>113.87</td> <td>-----</td> <td>99.48</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5755.00</td> <td>106.61</td> <td>-----</td> <td>92.22</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>100</td> <td>323</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5755.00	113.87	-----	99.48	35.16	11.64	32.41	100	323	Peak	2	5755.00	106.61	-----	92.22	35.16	11.64	32.41	100	323	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																		
1	5644.40	67.46	68.30	-0.84	53.09	35.00	11.69	32.32	100	323	Peak																																																																																																															
2	5699.60	80.30	104.91	-24.61	65.93	35.08	11.66	32.37	100	323	Peak																																																																																																															
3	5720.00	89.64	110.80	-21.16	75.25	35.11	11.66	32.38	100	323	Peak																																																																																																															
4	5725.00	92.43	122.20	-29.77	78.06	35.11	11.65	32.39	100	323	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																		
1	5755.00	113.87	-----	99.48	35.16	11.64	32.41	100	323	Peak																																																																																																																
2	5755.00	106.61	-----	92.22	35.16	11.64	32.41	100	323	Average																																																																																																																



	39																																																																									
Mode	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.20</td> <td>70.12</td> <td>121.74</td> <td>-51.62</td> <td>55.78</td> <td>35.29</td> <td>11.53</td> <td>32.48</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5870.60</td> <td>66.57</td> <td>106.43</td> <td>-39.86</td> <td>52.25</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5905.20</td> <td>63.60</td> <td>82.81</td> <td>-19.21</td> <td>49.32</td> <td>35.37</td> <td>11.44</td> <td>32.53</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5930.00</td> <td>56.37</td> <td>68.30</td> <td>-11.93</td> <td>42.13</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>100</td> <td>323</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5850.20	70.12	121.74	-51.62	55.78	35.29	11.53	32.48	100	323	Peak	2	5870.60	66.57	106.43	-39.86	52.25	35.32	11.50	32.50	100	323	Peak	3	5905.20	63.60	82.81	-19.21	49.32	35.37	11.44	32.53	100	323	Peak	4	5930.00	56.37	68.30	-11.93	42.13	35.40	11.39	32.55	100	323	Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5850.20	70.12	121.74	-51.62	55.78	35.29	11.53	32.48	100	323	Peak																																																															
2	5870.60	66.57	106.43	-39.86	52.25	35.32	11.50	32.50	100	323	Peak																																																															
3	5905.20	63.60	82.81	-19.21	49.32	35.37	11.44	32.53	100	323	Peak																																																															
4	5930.00	56.37	68.30	-11.93	42.13	35.40	11.39	32.55	100	323	Peak																																																															



Mode	39																																																																																																														
	Harmonic																																																																																																														
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																														
ANT	CDD 1+2																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg																																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>50.88</td> <td>74.00</td> <td>-23.12</td> <td>46.92</td> <td>39.81</td> <td>14.85</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>50.39</td> <td>68.30</td> <td>-17.91</td> <td>42.38</td> <td>42.39</td> <td>17.58</td> <td>51.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11510.00	50.88	74.00	-23.12	46.92	39.81	14.85	50.70	--	--	Peak	2	17265.00	50.39	68.30	-17.91	42.38	42.39	17.58	51.96	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>58.99</td> <td>74.00</td> <td>-15.01</td> <td>55.03</td> <td>39.81</td> <td>14.85</td> <td>50.70</td> <td>100</td> <td>341</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>49.01</td> <td>54.00</td> <td>-4.99</td> <td>45.05</td> <td>39.81</td> <td>14.85</td> <td>50.70</td> <td>100</td> <td>341</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>51.03</td> <td>68.30</td> <td>-17.27</td> <td>43.02</td> <td>42.39</td> <td>17.58</td> <td>51.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11510.00	58.99	74.00	-15.01	55.03	39.81	14.85	50.70	100	341	Peak	2	11510.00	49.01	54.00	-4.99	45.05	39.81	14.85	50.70	100	341	Average	3	17265.00	51.03	68.30	-17.27	43.02	42.39	17.58	51.96	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11510.00	50.88	74.00	-23.12	46.92	39.81	14.85	50.70	--	--	Peak																																																																																																				
2	17265.00	50.39	68.30	-17.91	42.38	42.39	17.58	51.96	--	--	Peak																																																																																																				
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11510.00	58.99	74.00	-15.01	55.03	39.81	14.85	50.70	100	341	Peak																																																																																																				
2	11510.00	49.01	54.00	-4.99	45.05	39.81	14.85	50.70	100	341	Average																																																																																																				
3	17265.00	51.03	68.30	-17.27	43.02	42.39	17.58	51.96	--	--	Peak																																																																																																				





Mode	40																																																																																																																									
	Band Edge - L																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																									
ANT	CDD 1+2																																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5632.60</td> <td>54.78</td> <td>68.30</td> <td>-13.52</td> <td>40.40</td> <td>34.99</td> <td>11.70</td> <td>32.31</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5699.00</td> <td>63.07</td> <td>104.47</td> <td>-41.40</td> <td>48.69</td> <td>35.08</td> <td>11.67</td> <td>32.37</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5719.00</td> <td>67.62</td> <td>110.52</td> <td>-42.90</td> <td>53.23</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5721.00</td> <td>67.21</td> <td>113.08</td> <td>-45.87</td> <td>52.82</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5632.60	54.78	68.30	-13.52	40.40	34.99	11.70	32.31	100	0	Peak	2	5699.00	63.07	104.47	-41.40	48.69	35.08	11.67	32.37	100	0	Peak	3	5719.00	67.62	110.52	-42.90	53.23	35.11	11.66	32.38	100	0	Peak	4	5721.00	67.21	113.08	-45.87	52.82	35.11	11.66	32.38	100	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>106.70</td> <td>-----</td> <td>-----</td> <td>92.31</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5795.00</td> <td>99.71</td> <td>-----</td> <td>-----</td> <td>85.32</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>100</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	106.70	-----	-----	92.31	35.21	11.62	32.44	100	0	Peak	2	5795.00	99.71	-----	-----	85.32	35.21	11.62	32.44	100	0	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	5632.60	54.78	68.30	-13.52	40.40	34.99	11.70	32.31	100	0	Peak																																																																																																															
2	5699.00	63.07	104.47	-41.40	48.69	35.08	11.67	32.37	100	0	Peak																																																																																																															
3	5719.00	67.62	110.52	-42.90	53.23	35.11	11.66	32.38	100	0	Peak																																																																																																															
4	5721.00	67.21	113.08	-45.87	52.82	35.11	11.66	32.38	100	0	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	5795.00	106.70	-----	-----	92.31	35.21	11.62	32.44	100	0	Peak																																																																																																															
2	5795.00	99.71	-----	-----	85.32	35.21	11.62	32.44	100	0	Average																																																																																																															



Mode	40																																																																								
	Band Edge - R																																																																								
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																								
ANT	CDD 1+2																																																																								
Pol.	Horizontal	Fundamental																																																																							
Peak	<div style="text-align: right; font-size: small;">Date: 2023-12-12</div> <table border="1" style="width: 100%; font-size: x-small; margin-top: 10px;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.80</td> <td>79.02</td> <td>115.82</td> <td>-36.80</td> <td>64.69</td> <td>35.29</td> <td>11.53</td> <td>32.49</td> <td>100</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5858.80</td> <td>78.22</td> <td>109.73</td> <td>-31.51</td> <td>63.89</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5889.00</td> <td>68.32</td> <td>94.81</td> <td>-26.49</td> <td>54.03</td> <td>35.34</td> <td>11.46</td> <td>32.51</td> <td>100</td> <td>0 Peak</td> </tr> <tr> <td>4</td> <td>5931.00</td> <td>61.10</td> <td>68.30</td> <td>-7.20</td> <td>46.86</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>100</td> <td>0 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5852.80	79.02	115.82	-36.80	64.69	35.29	11.53	32.49	100	0 Peak	2	5858.80	78.22	109.73	-31.51	63.89	35.30	11.52	32.49	100	0 Peak	3	5889.00	68.32	94.81	-26.49	54.03	35.34	11.46	32.51	100	0 Peak	4	5931.00	61.10	68.30	-7.20	46.86	35.40	11.39	32.55	100	0 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																	
1	5852.80	79.02	115.82	-36.80	64.69	35.29	11.53	32.49	100	0 Peak																																																															
2	5858.80	78.22	109.73	-31.51	63.89	35.30	11.52	32.49	100	0 Peak																																																															
3	5889.00	68.32	94.81	-26.49	54.03	35.34	11.46	32.51	100	0 Peak																																																															
4	5931.00	61.10	68.30	-7.20	46.86	35.40	11.39	32.55	100	0 Peak																																																															

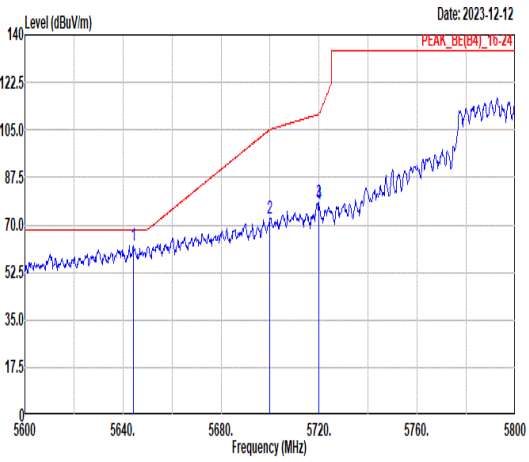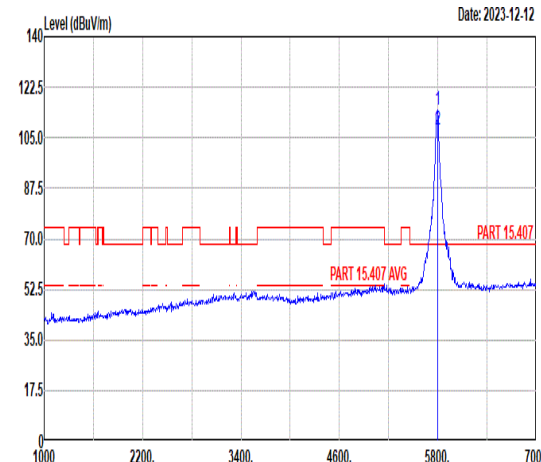

Mode	40																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																							
ANT	CDD 1+2																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	 <p>Date: 2023-12-12</p> <p>PEAK_BE(BA)_16-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.20</td> <td>62.52</td> <td>68.30</td> <td>-5.78</td> <td>48.15</td> <td>35.00</td> <td>11.69 32.32</td> <td>100 275 Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>72.43</td> <td>105.20</td> <td>-32.77</td> <td>58.06</td> <td>35.08</td> <td>11.66 32.37</td> <td>100 275 Peak</td> </tr> <tr> <td>3</td> <td>5719.80</td> <td>78.05</td> <td>110.74</td> <td>-32.69</td> <td>63.66</td> <td>35.11</td> <td>11.66 32.38</td> <td>100 275 Peak</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>77.48</td> <td>110.80</td> <td>-33.32</td> <td>63.09</td> <td>35.11</td> <td>11.66 32.38</td> <td>100 275 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5644.20	62.52	68.30	-5.78	48.15	35.00	11.69 32.32	100 275 Peak	2	5700.00	72.43	105.20	-32.77	58.06	35.08	11.66 32.37	100 275 Peak	3	5719.80	78.05	110.74	-32.69	63.66	35.11	11.66 32.38	100 275 Peak	4	5720.00	77.48	110.80	-33.32	63.09	35.11	11.66 32.38	100 275 Peak	 <p>Date: 2023-12-12</p> <p>PART 15.407</p> <p>PART 15.407 AVG</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>114.88</td> <td>-----</td> <td>-----</td> <td>100.49</td> <td>35.21</td> <td>11.62 32.44</td> <td>100 275 Peak</td> </tr> <tr> <td>2</td> <td>5795.00</td> <td>107.73</td> <td>-----</td> <td>-----</td> <td>93.34</td> <td>35.21</td> <td>11.62 32.44</td> <td>100 275 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5795.00	114.88	-----	-----	100.49	35.21	11.62 32.44	100 275 Peak	2	5795.00	107.73	-----	-----	93.34	35.21	11.62 32.44	100 275 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																																	
1	5644.20	62.52	68.30	-5.78	48.15	35.00	11.69 32.32	100 275 Peak																																																																																																
2	5700.00	72.43	105.20	-32.77	58.06	35.08	11.66 32.37	100 275 Peak																																																																																																
3	5719.80	78.05	110.74	-32.69	63.66	35.11	11.66 32.38	100 275 Peak																																																																																																
4	5720.00	77.48	110.80	-33.32	63.09	35.11	11.66 32.38	100 275 Peak																																																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																																	
1	5795.00	114.88	-----	-----	100.49	35.21	11.62 32.44	100 275 Peak																																																																																																
2	5795.00	107.73	-----	-----	93.34	35.21	11.62 32.44	100 275 Average																																																																																																



Mode	40																																																																					
	Band Edge - R																																																																					
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																					
ANT	CDD 1+2																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.00</td> <td>82.50</td> <td>119.92</td> <td>-37.42</td> <td>68.16</td> <td>35.29</td> <td>11.53</td> <td>32.48</td> <td>100</td> <td>275 Peak</td> </tr> <tr> <td>2</td> <td>5857.40</td> <td>79.50</td> <td>110.13</td> <td>-30.63</td> <td>65.17</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>275 Peak</td> </tr> <tr> <td>3</td> <td>5890.00</td> <td>73.17</td> <td>94.07</td> <td>-20.90</td> <td>58.88</td> <td>35.35</td> <td>11.46</td> <td>32.52</td> <td>100</td> <td>275 Peak</td> </tr> <tr> <td>4</td> <td>5930.20</td> <td>67.48</td> <td>68.30</td> <td>-0.82</td> <td>53.24</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>100</td> <td>275 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5851.00	82.50	119.92	-37.42	68.16	35.29	11.53	32.48	100	275 Peak	2	5857.40	79.50	110.13	-30.63	65.17	35.30	11.52	32.49	100	275 Peak	3	5890.00	73.17	94.07	-20.90	58.88	35.35	11.46	32.52	100	275 Peak	4	5930.20	67.48	68.30	-0.82	53.24	35.40	11.39	32.55	100	275 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5851.00	82.50	119.92	-37.42	68.16	35.29	11.53	32.48	100	275 Peak																																																												
2	5857.40	79.50	110.13	-30.63	65.17	35.30	11.52	32.49	100	275 Peak																																																												
3	5890.00	73.17	94.07	-20.90	58.88	35.35	11.46	32.52	100	275 Peak																																																												
4	5930.20	67.48	68.30	-0.82	53.24	35.40	11.39	32.55	100	275 Peak																																																												



Mode	40																																																																																									
	Harmonic																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																									
ANT	CDD 1+2																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11590.00 51.11 74.00 -22.89 47.00 39.87 14.89 50.65 -- -- Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 17385.00 51.13 68.30 -17.17 43.25 42.35 17.61 52.08 -- -- Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor								MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg								1 11590.00 51.11 74.00 -22.89 47.00 39.87 14.89 50.65 -- -- Peak								2 17385.00 51.13 68.30 -17.17 43.25 42.35 17.61 52.08 -- -- Peak								<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11590.00 59.53 74.00 -14.47 55.42 39.87 14.89 50.65 100 341 Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 11590.00 49.97 54.00 -4.03 45.86 39.87 14.89 50.65 100 341 Average</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3 17385.00 51.01 68.30 -17.29 43.13 42.35 17.61 52.08 -- -- Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor								MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg								1 11590.00 59.53 74.00 -14.47 55.42 39.87 14.89 50.65 100 341 Peak								2 11590.00 49.97 54.00 -4.03 45.86 39.87 14.89 50.65 100 341 Average								3 17385.00 51.01 68.30 -17.29 43.13 42.35 17.61 52.08 -- -- Peak							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq Level Line Margin Level Factor Loss Factor																																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg																																																																																										
1 11590.00 51.11 74.00 -22.89 47.00 39.87 14.89 50.65 -- -- Peak																																																																																										
2 17385.00 51.13 68.30 -17.17 43.25 42.35 17.61 52.08 -- -- Peak																																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq Level Line Margin Level Factor Loss Factor																																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg																																																																																										
1 11590.00 59.53 74.00 -14.47 55.42 39.87 14.89 50.65 100 341 Peak																																																																																										
2 11590.00 49.97 54.00 -4.03 45.86 39.87 14.89 50.65 100 341 Average																																																																																										
3 17385.00 51.01 68.30 -17.29 43.13 42.35 17.61 52.08 -- -- Peak																																																																																										



Mode	41																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																							
ANT	CDD 1+2																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5643.00</td> <td>54.38</td> <td>68.30</td> <td>-13.92</td> <td>40.01</td> <td>35.00</td> <td>11.69 32.32 178</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5697.60</td> <td>67.85</td> <td>103.44</td> <td>-35.59</td> <td>53.46</td> <td>35.08</td> <td>11.67 32.36 178</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5717.80</td> <td>73.20</td> <td>110.18</td> <td>-36.98</td> <td>58.82</td> <td>35.10</td> <td>11.66 32.38 178</td> <td>0 Peak</td> </tr> <tr> <td>4</td> <td>5723.00</td> <td>71.97</td> <td>117.64</td> <td>-45.67</td> <td>57.59</td> <td>35.11</td> <td>11.65 32.38 178</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5643.00	54.38	68.30	-13.92	40.01	35.00	11.69 32.32 178	0 Peak	2	5697.60	67.85	103.44	-35.59	53.46	35.08	11.67 32.36 178	0 Peak	3	5717.80	73.20	110.18	-36.98	58.82	35.10	11.66 32.38 178	0 Peak	4	5723.00	71.97	117.64	-45.67	57.59	35.11	11.65 32.38 178	0 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>102.09</td> <td>-----</td> <td>-----</td> <td>87.70</td> <td>35.19</td> <td>11.63 32.43 178</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5775.00</td> <td>94.91</td> <td>-----</td> <td>-----</td> <td>80.52</td> <td>35.19</td> <td>11.63 32.43 178</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5775.00	102.09	-----	-----	87.70	35.19	11.63 32.43 178	0 Peak	2	5775.00	94.91	-----	-----	80.52	35.19	11.63 32.43 178	0 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																																	
1	5643.00	54.38	68.30	-13.92	40.01	35.00	11.69 32.32 178	0 Peak																																																																																																
2	5697.60	67.85	103.44	-35.59	53.46	35.08	11.67 32.36 178	0 Peak																																																																																																
3	5717.80	73.20	110.18	-36.98	58.82	35.10	11.66 32.38 178	0 Peak																																																																																																
4	5723.00	71.97	117.64	-45.67	57.59	35.11	11.65 32.38 178	0 Peak																																																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																																	
1	5775.00	102.09	-----	-----	87.70	35.19	11.63 32.43 178	0 Peak																																																																																																
2	5775.00	94.91	-----	-----	80.52	35.19	11.63 32.43 178	0 Average																																																																																																



Mode	41																																																															
	Band Edge - R																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																															
ANT	CDD 1+2																																																															
Pol.	Horizontal	Fundamental																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.80</td> <td>69.24</td> <td>113.54</td> <td>-44.30</td> <td>54.91</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>178</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5857.60</td> <td>69.68</td> <td>110.07</td> <td>-40.39</td> <td>55.35</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>178</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5876.00</td> <td>63.96</td> <td>104.46</td> <td>-40.50</td> <td>49.64</td> <td>35.33</td> <td>11.49</td> <td>32.50</td> <td>178</td> <td>0 Peak</td> </tr> <tr> <td>4</td> <td>5938.80</td> <td>57.23</td> <td>68.30</td> <td>-11.07</td> <td>42.99</td> <td>35.41</td> <td>11.38</td> <td>32.55</td> <td>178</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5853.80	69.24	113.54	-44.30	54.91	35.30	11.52	32.49	178	0 Peak	2	5857.60	69.68	110.07	-40.39	55.35	35.30	11.52	32.49	178	0 Peak	3	5876.00	63.96	104.46	-40.50	49.64	35.33	11.49	32.50	178	0 Peak	4	5938.80	57.23	68.30	-11.07	42.99	35.41	11.38	32.55	178	0 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																							
1	5853.80	69.24	113.54	-44.30	54.91	35.30	11.52	32.49	178	0 Peak																																																						
2	5857.60	69.68	110.07	-40.39	55.35	35.30	11.52	32.49	178	0 Peak																																																						
3	5876.00	63.96	104.46	-40.50	49.64	35.33	11.49	32.50	178	0 Peak																																																						
4	5938.80	57.23	68.30	-11.07	42.99	35.41	11.38	32.55	178	0 Peak																																																						



Mode	41																																																																																																																			
	Band Edge - L																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																			
ANT	CDD 1+2																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.80</td> <td>65.59</td> <td>68.30</td> <td>-2.71</td> <td>51.22</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>324 Peak</td> </tr> <tr> <td>2</td> <td>5695.00</td> <td>78.50</td> <td>101.52</td> <td>-23.02</td> <td>64.12</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>324 Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>80.74</td> <td>110.80</td> <td>-30.06</td> <td>66.35</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>324 Peak</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>80.74</td> <td>110.80</td> <td>-30.06</td> <td>66.35</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>324 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5647.80	65.59	68.30	-2.71	51.22	35.01	11.69	32.33	100	324 Peak	2	5695.00	78.50	101.52	-23.02	64.12	35.07	11.67	32.36	100	324 Peak	3	5720.00	80.74	110.80	-30.06	66.35	35.11	11.66	32.38	100	324 Peak	4	5720.00	80.74	110.80	-30.06	66.35	35.11	11.66	32.38	100	324 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>109.04</td> <td>-----</td> <td>-----</td> <td>94.65</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>100</td> <td>324 Peak</td> </tr> <tr> <td>2</td> <td>5775.00</td> <td>101.74</td> <td>-----</td> <td>-----</td> <td>87.35</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>100</td> <td>324 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	109.04	-----	-----	94.65	35.19	11.63	32.43	100	324 Peak	2	5775.00	101.74	-----	-----	87.35	35.19	11.63	32.43	100	324 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																													
1	5647.80	65.59	68.30	-2.71	51.22	35.01	11.69	32.33	100	324 Peak																																																																																																										
2	5695.00	78.50	101.52	-23.02	64.12	35.07	11.67	32.36	100	324 Peak																																																																																																										
3	5720.00	80.74	110.80	-30.06	66.35	35.11	11.66	32.38	100	324 Peak																																																																																																										
4	5720.00	80.74	110.80	-30.06	66.35	35.11	11.66	32.38	100	324 Peak																																																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																													
1	5775.00	109.04	-----	-----	94.65	35.19	11.63	32.43	100	324 Peak																																																																																																										
2	5775.00	101.74	-----	-----	87.35	35.19	11.63	32.43	100	324 Average																																																																																																										



Mode	41																																																																					
	Band Edge - R																																																																					
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																					
ANT	CDD 1+2																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.20</td> <td>78.51</td> <td>121.74</td> <td>-43.23</td> <td>64.17</td> <td>35.29</td> <td>11.53</td> <td>32.48</td> <td>100</td> <td>324 Peak</td> </tr> <tr> <td>2</td> <td>5855.20</td> <td>76.06</td> <td>110.74</td> <td>-34.68</td> <td>61.73</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>324 Peak</td> </tr> <tr> <td>3</td> <td>5877.40</td> <td>69.64</td> <td>103.42</td> <td>-33.78</td> <td>55.34</td> <td>35.33</td> <td>11.48</td> <td>32.51</td> <td>100</td> <td>324 Peak</td> </tr> <tr> <td>4</td> <td>5927.80</td> <td>60.95</td> <td>68.30</td> <td>-7.35</td> <td>46.69</td> <td>35.40</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>324 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5850.20	78.51	121.74	-43.23	64.17	35.29	11.53	32.48	100	324 Peak	2	5855.20	76.06	110.74	-34.68	61.73	35.30	11.52	32.49	100	324 Peak	3	5877.40	69.64	103.42	-33.78	55.34	35.33	11.48	32.51	100	324 Peak	4	5927.80	60.95	68.30	-7.35	46.69	35.40	11.40	32.54	100	324 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5850.20	78.51	121.74	-43.23	64.17	35.29	11.53	32.48	100	324 Peak																																																												
2	5855.20	76.06	110.74	-34.68	61.73	35.30	11.52	32.49	100	324 Peak																																																												
3	5877.40	69.64	103.42	-33.78	55.34	35.33	11.48	32.51	100	324 Peak																																																												
4	5927.80	60.95	68.30	-7.35	46.69	35.40	11.40	32.54	100	324 Peak																																																												



Mode	41																																																																																															
	Harmonic																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																															
ANT	CDD 1+2																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>50.24</td> <td>74.00</td> <td>-23.76</td> <td>46.20</td> <td>39.84</td> <td>14.87</td> <td>50.67</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>50.65</td> <td>68.30</td> <td>-17.65</td> <td>42.71</td> <td>42.37</td> <td>17.59</td> <td>52.02</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11550.00	50.24	74.00	-23.76	46.20	39.84	14.87	50.67	--	Peak	2	17325.00	50.65	68.30	-17.65	42.71	42.37	17.59	52.02	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>49.44</td> <td>74.00</td> <td>-24.56</td> <td>45.40</td> <td>39.84</td> <td>14.87</td> <td>50.67</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>51.61</td> <td>68.30</td> <td>-16.69</td> <td>43.67</td> <td>42.37</td> <td>17.59</td> <td>52.02</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11550.00	49.44	74.00	-24.56	45.40	39.84	14.87	50.67	--	Peak	2	17325.00	51.61	68.30	-16.69	43.67	42.37	17.59	52.02	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11550.00	50.24	74.00	-23.76	46.20	39.84	14.87	50.67	--	Peak																																																																																						
2	17325.00	50.65	68.30	-17.65	42.71	42.37	17.59	52.02	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11550.00	49.44	74.00	-24.56	45.40	39.84	14.87	50.67	--	Peak																																																																																						
2	17325.00	51.61	68.30	-16.69	43.67	42.37	17.59	52.02	--	Peak																																																																																						



Mode	42																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHZ																																																																																																																																																																																																	
ANT	CDD 1+2																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak	<p>Date: 2023-12-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>44.55</td> <td>17.59</td> <td>40.00</td> <td>-22.41</td> <td>30.91</td> <td>16.50</td> <td>1.38</td> <td>31.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>193.93</td> <td>18.16</td> <td>43.50</td> <td>-25.34</td> <td>31.46</td> <td>15.32</td> <td>2.30</td> <td>30.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>356.89</td> <td>26.28</td> <td>46.00</td> <td>-19.72</td> <td>33.45</td> <td>20.69</td> <td>2.93</td> <td>30.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>415.09</td> <td>23.64</td> <td>46.00</td> <td>-22.36</td> <td>28.94</td> <td>22.24</td> <td>3.16</td> <td>30.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>625.58</td> <td>25.18</td> <td>46.00</td> <td>-20.82</td> <td>27.28</td> <td>25.05</td> <td>3.80</td> <td>30.95</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>852.56</td> <td>29.55</td> <td>46.00</td> <td>-16.45</td> <td>29.68</td> <td>26.52</td> <td>4.40</td> <td>31.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	44.55	17.59	40.00	-22.41	30.91	16.50	1.38	31.20	--	--	Peak	2	193.93	18.16	43.50	-25.34	31.46	15.32	2.30	30.92	--	--	Peak	3	356.89	26.28	46.00	-19.72	33.45	20.69	2.93	30.79	--	--	Peak	4	415.09	23.64	46.00	-22.36	28.94	22.24	3.16	30.70	--	--	Peak	5	625.58	25.18	46.00	-20.82	27.28	25.05	3.80	30.95	--	--	Peak	6	852.56	29.55	46.00	-16.45	29.68	26.52	4.40	31.05	--	--	Peak	<p>Date: 2023-12-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>40.67</td> <td>20.13</td> <td>40.00</td> <td>-19.87</td> <td>31.34</td> <td>18.66</td> <td>1.33</td> <td>31.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>182.29</td> <td>19.21</td> <td>43.50</td> <td>-24.29</td> <td>32.55</td> <td>15.28</td> <td>2.35</td> <td>30.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>423.82</td> <td>23.87</td> <td>46.00</td> <td>-22.13</td> <td>28.94</td> <td>22.43</td> <td>3.20</td> <td>30.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>582.90</td> <td>28.53</td> <td>46.00</td> <td>-17.47</td> <td>30.89</td> <td>24.93</td> <td>3.71</td> <td>31.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>772.05</td> <td>30.87</td> <td>46.00</td> <td>-15.13</td> <td>31.68</td> <td>25.99</td> <td>4.22</td> <td>31.02</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>950.53</td> <td>29.95</td> <td>46.00</td> <td>-16.05</td> <td>29.20</td> <td>27.11</td> <td>4.64</td> <td>31.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	40.67	20.13	40.00	-19.87	31.34	18.66	1.33	31.20	--	--	Peak	2	182.29	19.21	43.50	-24.29	32.55	15.28	2.35	30.97	--	--	Peak	3	423.82	23.87	46.00	-22.13	28.94	22.43	3.20	30.70	--	--	Peak	4	582.90	28.53	46.00	-17.47	30.89	24.93	3.71	31.00	--	--	Peak	5	772.05	30.87	46.00	-15.13	31.68	25.99	4.22	31.02	--	--	Peak	6	950.53	29.95	46.00	-16.05	29.20	27.11	4.64	31.00	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																											
1	44.55	17.59	40.00	-22.41	30.91	16.50	1.38	31.20	--	--	Peak																																																																																																																																																																																							
2	193.93	18.16	43.50	-25.34	31.46	15.32	2.30	30.92	--	--	Peak																																																																																																																																																																																							
3	356.89	26.28	46.00	-19.72	33.45	20.69	2.93	30.79	--	--	Peak																																																																																																																																																																																							
4	415.09	23.64	46.00	-22.36	28.94	22.24	3.16	30.70	--	--	Peak																																																																																																																																																																																							
5	625.58	25.18	46.00	-20.82	27.28	25.05	3.80	30.95	--	--	Peak																																																																																																																																																																																							
6	852.56	29.55	46.00	-16.45	29.68	26.52	4.40	31.05	--	--	Peak																																																																																																																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																											
1	40.67	20.13	40.00	-19.87	31.34	18.66	1.33	31.20	--	--	Peak																																																																																																																																																																																							
2	182.29	19.21	43.50	-24.29	32.55	15.28	2.35	30.97	--	--	Peak																																																																																																																																																																																							
3	423.82	23.87	46.00	-22.13	28.94	22.43	3.20	30.70	--	--	Peak																																																																																																																																																																																							
4	582.90	28.53	46.00	-17.47	30.89	24.93	3.71	31.00	--	--	Peak																																																																																																																																																																																							
5	772.05	30.87	46.00	-15.13	31.68	25.99	4.22	31.02	--	--	Peak																																																																																																																																																																																							
6	950.53	29.95	46.00	-16.05	29.20	27.11	4.64	31.00	--	--	Peak																																																																																																																																																																																							



Mode	43																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																																																					
ANT	CDD 1+2																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>57.16</td> <td>17.36</td> <td>40.00</td> <td>-22.64</td> <td>34.02</td> <td>13.04</td> <td>1.55</td> <td>31.25</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>191.99</td> <td>19.02</td> <td>43.50</td> <td>-24.48</td> <td>32.38</td> <td>15.26</td> <td>2.31</td> <td>30.93</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>356.89</td> <td>26.03</td> <td>46.00</td> <td>-19.97</td> <td>33.20</td> <td>20.69</td> <td>2.93</td> <td>30.79</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>415.09</td> <td>24.04</td> <td>46.00</td> <td>-21.96</td> <td>29.34</td> <td>22.24</td> <td>3.16</td> <td>30.70</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>569.32</td> <td>25.23</td> <td>46.00</td> <td>-20.77</td> <td>27.60</td> <td>24.96</td> <td>3.67</td> <td>31.00</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>938.89</td> <td>30.24</td> <td>46.00</td> <td>-15.76</td> <td>29.59</td> <td>27.04</td> <td>4.61</td> <td>31.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	57.16	17.36	40.00	-22.64	34.02	13.04	1.55	31.25	--	Peak	2	191.99	19.02	43.50	-24.48	32.38	15.26	2.31	30.93	--	Peak	3	356.89	26.03	46.00	-19.97	33.20	20.69	2.93	30.79	--	Peak	4	415.09	24.04	46.00	-21.96	29.34	22.24	3.16	30.70	--	Peak	5	569.32	25.23	46.00	-20.77	27.60	24.96	3.67	31.00	--	Peak	6	938.89	30.24	46.00	-15.76	29.59	27.04	4.61	31.00	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>40.67</td> <td>20.71</td> <td>40.00</td> <td>-19.29</td> <td>31.92</td> <td>18.66</td> <td>1.33</td> <td>31.20</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>184.23</td> <td>18.49</td> <td>43.50</td> <td>-25.01</td> <td>31.85</td> <td>15.26</td> <td>2.34</td> <td>30.96</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>413.15</td> <td>23.80</td> <td>46.00</td> <td>-22.20</td> <td>29.15</td> <td>22.20</td> <td>3.15</td> <td>30.70</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>577.08</td> <td>27.98</td> <td>46.00</td> <td>-18.02</td> <td>30.34</td> <td>24.95</td> <td>3.69</td> <td>31.00</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>793.39</td> <td>28.27</td> <td>46.00</td> <td>-17.73</td> <td>29.04</td> <td>26.07</td> <td>4.24</td> <td>31.08</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>925.31</td> <td>29.92</td> <td>46.00</td> <td>-16.08</td> <td>29.40</td> <td>26.95</td> <td>4.57</td> <td>31.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	40.67	20.71	40.00	-19.29	31.92	18.66	1.33	31.20	--	Peak	2	184.23	18.49	43.50	-25.01	31.85	15.26	2.34	30.96	--	Peak	3	413.15	23.80	46.00	-22.20	29.15	22.20	3.15	30.70	--	Peak	4	577.08	27.98	46.00	-18.02	30.34	24.95	3.69	31.00	--	Peak	5	793.39	28.27	46.00	-17.73	29.04	26.07	4.24	31.08	--	Peak	6	925.31	29.92	46.00	-16.08	29.40	26.95	4.57	31.00	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																															
1	57.16	17.36	40.00	-22.64	34.02	13.04	1.55	31.25	--	Peak																																																																																																																																																																												
2	191.99	19.02	43.50	-24.48	32.38	15.26	2.31	30.93	--	Peak																																																																																																																																																																												
3	356.89	26.03	46.00	-19.97	33.20	20.69	2.93	30.79	--	Peak																																																																																																																																																																												
4	415.09	24.04	46.00	-21.96	29.34	22.24	3.16	30.70	--	Peak																																																																																																																																																																												
5	569.32	25.23	46.00	-20.77	27.60	24.96	3.67	31.00	--	Peak																																																																																																																																																																												
6	938.89	30.24	46.00	-15.76	29.59	27.04	4.61	31.00	--	Peak																																																																																																																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																															
1	40.67	20.71	40.00	-19.29	31.92	18.66	1.33	31.20	--	Peak																																																																																																																																																																												
2	184.23	18.49	43.50	-25.01	31.85	15.26	2.34	30.96	--	Peak																																																																																																																																																																												
3	413.15	23.80	46.00	-22.20	29.15	22.20	3.15	30.70	--	Peak																																																																																																																																																																												
4	577.08	27.98	46.00	-18.02	30.34	24.95	3.69	31.00	--	Peak																																																																																																																																																																												
5	793.39	28.27	46.00	-17.73	29.04	26.07	4.24	31.08	--	Peak																																																																																																																																																																												
6	925.31	29.92	46.00	-16.08	29.40	26.95	4.57	31.00	--	Peak																																																																																																																																																																												



Note: For all plots below, the over limit line signals are Fundamental signal which can be ignored.

		44																																																																							
Mode	Band Edge																																																																								
	Co-icoation_11g_CH01_2412MHz+11a_CH140_5700MHz																																																																								
ANT	CDD 1+2																																																																								
Pol.	Horizontal	Fundamental																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.22</td> <td>65.57</td> <td>74.00</td> <td>-8.43</td> <td>57.65</td> <td>32.25</td> <td>7.75</td> <td>32.08</td> <td>366</td> <td>281</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2387.22	65.57	74.00	-8.43	57.65	32.25	7.75	32.08	366	281	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.74</td> <td>-----</td> <td>97.70</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>366</td> <td>281</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2412.00	105.74	-----	97.70	32.31	7.81	32.08	366	281	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	2387.22	65.57	74.00	-8.43	57.65	32.25	7.75	32.08	366	281	Peak																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	2412.00	105.74	-----	97.70	32.31	7.81	32.08	366	281	Peak																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.34</td> <td>48.54</td> <td>54.00</td> <td>-5.46</td> <td>40.62</td> <td>32.25</td> <td>7.75</td> <td>32.08</td> <td>366</td> <td>281</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2387.34	48.54	54.00	-5.46	40.62	32.25	7.75	32.08	366	281	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.16</td> <td>-----</td> <td>90.12</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>366</td> <td>281</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2412.00	98.16	-----	90.12	32.31	7.81	32.08	366	281	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	2387.34	48.54	54.00	-5.46	40.62	32.25	7.75	32.08	366	281	Average																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	2412.00	98.16	-----	90.12	32.31	7.81	32.08	366	281	Average																																																															



Mode	44																																																																									
	Band Edge																																																																									
	Co-icoation_11g_CH01_2412MHz+11a_CH140_5700MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.79</td> <td>68.68</td> <td>74.00</td> <td>-5.32</td> <td>60.74</td> <td>32.26</td> <td>7.76</td> <td>32.08</td> <td>100</td> <td>175</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.79	68.68	74.00	-5.32	60.74	32.26	7.76	32.08	100	175	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>110.46</td> <td>-----</td> <td>-----</td> <td>102.42</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>100</td> <td>175</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2412.00	110.46	-----	-----	102.42	32.31	7.81	32.08	100	175	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.79	68.68	74.00	-5.32	60.74	32.26	7.76	32.08	100	175	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2412.00	110.46	-----	-----	102.42	32.31	7.81	32.08	100	175	Peak																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.91</td> <td>52.53</td> <td>54.00</td> <td>-1.47</td> <td>44.59</td> <td>32.26</td> <td>7.76</td> <td>32.08</td> <td>100</td> <td>175</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.91	52.53	54.00	-1.47	44.59	32.26	7.76	32.08	100	175	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.49</td> <td>-----</td> <td>-----</td> <td>94.45</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>100</td> <td>175</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2412.00	102.49	-----	-----	94.45	32.31	7.81	32.08	100	175	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.91	52.53	54.00	-1.47	44.59	32.26	7.76	32.08	100	175	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2412.00	102.49	-----	-----	94.45	32.31	7.81	32.08	100	175	Average																																																															



Mode	44																																																																																		
	Band Edge																																																																																		
	Co-icoation_11g_CH01_2412MHz+11a_CH140_5700MHz																																																																																		
ANT	CDD 1+2																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<p>Date: 2023-12-15</p>	<p>Date: 2023-12-15</p>																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.60</td> <td>60.08</td> <td>68.30</td> <td>-8.22</td> <td>45.70</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>169</td> <td>355</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5726.60	60.08	68.30	-8.22	45.70	35.12	11.65	32.39	169	355	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>103.77</td> <td>-----</td> <td>89.40</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>169</td> <td>355</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>96.64</td> <td>-----</td> <td>82.27</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>169</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5700.00	103.77	-----	89.40	35.08	11.66	32.37	169	355	Peak	2	5700.00	96.64	-----	82.27	35.08	11.66	32.37	169	355
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5726.60	60.08	68.30	-8.22	45.70	35.12	11.65	32.39	169	355	Peak																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5700.00	103.77	-----	89.40	35.08	11.66	32.37	169	355	Peak																																																																									
2	5700.00	96.64	-----	82.27	35.08	11.66	32.37	169	355	Average																																																																									



Mode	44																																																																																		
	Band Edge																																																																																		
	Co-Location_11g_CH01_2412MHz+11a_CH140_5700MHz																																																																																		
ANT	CDD 1+2																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<p>Date: 2023-12-15</p>	<p>Date: 2023-12-15</p>																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.40</td> <td>67.56</td> <td>68.30</td> <td>-0.74</td> <td>53.18</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>240</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.40	67.56	68.30	-0.74	53.18	35.12	11.65	32.39	100	240	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>111.46</td> <td>-----</td> <td>97.09</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>240</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>104.69</td> <td>-----</td> <td>90.32</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>240</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	111.46	-----	97.09	35.08	11.66	32.37	100	240	Peak	2	5700.00	104.69	-----	90.32	35.08	11.66	32.37	100	240
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																												
1	5725.40	67.56	68.30	-0.74	53.18	35.12	11.65	32.39	100	240	Peak																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																												
1	5700.00	111.46	-----	97.09	35.08	11.66	32.37	100	240	Peak																																																																									
2	5700.00	104.69	-----	90.32	35.08	11.66	32.37	100	240	Average																																																																									



Mode	44																																																																																																																																																																											
	Harmonic																																																																																																																																																																											
	Co-Location_11g_CH01_2412MHz+11a_CH140_5700MHz																																																																																																																																																																											
ANT	CDD 1+2																																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>50.75</td> <td>74.00</td> <td>-23.25</td> <td>36.65</td> <td>34.83</td> <td>11.08</td> <td>31.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7236.00</td> <td>47.63</td> <td>68.30</td> <td>-20.67</td> <td>30.90</td> <td>36.29</td> <td>13.03</td> <td>32.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>11400.00</td> <td>57.43</td> <td>74.00</td> <td>-16.57</td> <td>35.40</td> <td>39.72</td> <td>14.78</td> <td>32.47</td> <td>205</td> <td>106</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>11400.00</td> <td>49.25</td> <td>54.00</td> <td>-4.75</td> <td>27.22</td> <td>39.72</td> <td>14.78</td> <td>32.47</td> <td>205</td> <td>106</td> <td>Average</td> </tr> <tr> <td>5</td> <td>17100.00</td> <td>51.46</td> <td>68.30</td> <td>-16.84</td> <td>25.37</td> <td>42.46</td> <td>17.53</td> <td>33.90</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	50.75	74.00	-23.25	36.65	34.83	11.08	31.81	--	--	Peak	2	7236.00	47.63	68.30	-20.67	30.90	36.29	13.03	32.59	--	--	Peak	3	11400.00	57.43	74.00	-16.57	35.40	39.72	14.78	32.47	205	106	Peak	4	11400.00	49.25	54.00	-4.75	27.22	39.72	14.78	32.47	205	106	Average	5	17100.00	51.46	68.30	-16.84	25.37	42.46	17.53	33.90	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>50.29</td> <td>74.00</td> <td>-23.71</td> <td>36.19</td> <td>34.83</td> <td>11.08</td> <td>31.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7236.00</td> <td>47.09</td> <td>68.30</td> <td>-21.21</td> <td>30.36</td> <td>36.29</td> <td>13.03</td> <td>32.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>11400.00</td> <td>57.88</td> <td>74.00</td> <td>-16.12</td> <td>35.85</td> <td>39.72</td> <td>14.78</td> <td>32.47</td> <td>186</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>11400.00</td> <td>51.51</td> <td>54.00</td> <td>-2.49</td> <td>29.48</td> <td>39.72</td> <td>14.78</td> <td>32.47</td> <td>186</td> <td>360</td> <td>Average</td> </tr> <tr> <td>5</td> <td>17100.00</td> <td>51.42</td> <td>68.30</td> <td>-16.88</td> <td>25.33</td> <td>42.46</td> <td>17.53</td> <td>33.90</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	50.29	74.00	-23.71	36.19	34.83	11.08	31.81	--	--	Peak	2	7236.00	47.09	68.30	-21.21	30.36	36.29	13.03	32.59	--	--	Peak	3	11400.00	57.88	74.00	-16.12	35.85	39.72	14.78	32.47	186	360	Peak	4	11400.00	51.51	54.00	-2.49	29.48	39.72	14.78	32.47	186	360	Average	5	17100.00	51.42	68.30	-16.88	25.33	42.46	17.53	33.90	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																				
1	4824.00	50.75	74.00	-23.25	36.65	34.83	11.08	31.81	--	--	Peak																																																																																																																																																																	
2	7236.00	47.63	68.30	-20.67	30.90	36.29	13.03	32.59	--	--	Peak																																																																																																																																																																	
3	11400.00	57.43	74.00	-16.57	35.40	39.72	14.78	32.47	205	106	Peak																																																																																																																																																																	
4	11400.00	49.25	54.00	-4.75	27.22	39.72	14.78	32.47	205	106	Average																																																																																																																																																																	
5	17100.00	51.46	68.30	-16.84	25.37	42.46	17.53	33.90	--	--	Peak																																																																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																				
1	4824.00	50.29	74.00	-23.71	36.19	34.83	11.08	31.81	--	--	Peak																																																																																																																																																																	
2	7236.00	47.09	68.30	-21.21	30.36	36.29	13.03	32.59	--	--	Peak																																																																																																																																																																	
3	11400.00	57.88	74.00	-16.12	35.85	39.72	14.78	32.47	186	360	Peak																																																																																																																																																																	
4	11400.00	51.51	54.00	-2.49	29.48	39.72	14.78	32.47	186	360	Average																																																																																																																																																																	
5	17100.00	51.42	68.30	-16.88	25.33	42.46	17.53	33.90	--	--	Peak																																																																																																																																																																	



		45																																																																																																											
Mode		Band Edge - L																																																																																																											
		U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																											
ANT		CDD 1+2																																																																																																											
Pol.		Horizontal	Fundamental																																																																																																										
Peak		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5391.76</td> <td>51.78</td> <td>74.00</td> <td>-22.22</td> <td>38.13</td> <td>34.82</td> <td>10.91</td> <td>32.08</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5461.60</td> <td>51.28</td> <td>68.30</td> <td>-17.02</td> <td>37.51</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5391.76	51.78	74.00	-22.22	38.13	34.82	10.91	32.08	100	0	Peak	2	5461.60	51.28	68.30	-17.02	37.51	34.81	11.13	32.17	100	0	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>98.24</td> <td>-----</td> <td>-----</td> <td>83.88</td> <td>34.95</td> <td>11.71</td> <td>32.30</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5610.00</td> <td>91.82</td> <td>-----</td> <td>-----</td> <td>77.46</td> <td>34.95</td> <td>11.71</td> <td>32.30</td> <td>100</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	98.24	-----	-----	83.88	34.95	11.71	32.30	100	0	Peak	2	5610.00	91.82	-----	-----	77.46	34.95	11.71	32.30	100	0	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	5391.76	51.78	74.00	-22.22	38.13	34.82	10.91	32.08	100	0	Peak																																																																																																		
2	5461.60	51.28	68.30	-17.02	37.51	34.81	11.13	32.17	100	0	Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	5610.00	98.24	-----	-----	83.88	34.95	11.71	32.30	100	0	Peak																																																																																																		
2	5610.00	91.82	-----	-----	77.46	34.95	11.71	32.30	100	0	Average																																																																																																		
Avg		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.80</td> <td>43.56</td> <td>54.00</td> <td>-10.44</td> <td>29.80</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>100</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.80	43.56	54.00	-10.44	29.80	34.81	11.11	32.16	100	0	Average	Blank																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	5456.80	43.56	54.00	-10.44	29.80	34.81	11.11	32.16	100	0	Average																																																																																																		



Mode	45																																			
	Band Edge - R																																			
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																			
ANT	CDD 1+2																																			
Pol.	Horizontal	Fundamental																																		
Peak	<p>Date: 2023-12-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5733.50</td> <td>53.72</td> <td>68.30</td> <td>-14.58</td> <td>39.33</td> <td>35.13</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5733.50	53.72	68.30	-14.58	39.33	35.13	11.65	32.39	100	0 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																													
1 5733.50	53.72	68.30	-14.58	39.33	35.13	11.65	32.39	100	0 Peak																											



		45																																																																																																									
Mode		Band Edge - L																																																																																																									
		U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																									
ANT		CDD 1+2																																																																																																									
Pol.		Vertical	Fundamental																																																																																																								
Peak		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5443.60</td> <td>54.97</td> <td>74.00</td> <td>-19.03</td> <td>41.26</td> <td>34.81</td> <td>11.05</td> <td>32.15</td> <td>100</td> <td>269</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.88</td> <td>57.25</td> <td>68.30</td> <td>-11.05</td> <td>43.46</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>100</td> <td>269</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5443.60	54.97	74.00	-19.03	41.26	34.81	11.05	32.15	100	269	Peak	2	5466.88	57.25	68.30	-11.05	43.46	34.81	11.15	32.17	100	269	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>110.16</td> <td>-----</td> <td>-----</td> <td>95.80</td> <td>34.95</td> <td>11.71</td> <td>32.30</td> <td>100</td> <td>269</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5610.00</td> <td>103.81</td> <td>-----</td> <td>-----</td> <td>89.45</td> <td>34.95</td> <td>11.71</td> <td>32.30</td> <td>100</td> <td>269</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5610.00	110.16	-----	-----	95.80	34.95	11.71	32.30	100	269	Peak	2	5610.00	103.81	-----	-----	89.45	34.95	11.71	32.30	100	269	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5443.60	54.97	74.00	-19.03	41.26	34.81	11.05	32.15	100	269	Peak																																																																																																
2	5466.88	57.25	68.30	-11.05	43.46	34.81	11.15	32.17	100	269	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5610.00	110.16	-----	-----	95.80	34.95	11.71	32.30	100	269	Peak																																																																																																
2	5610.00	103.81	-----	-----	89.45	34.95	11.71	32.30	100	269	Average																																																																																																
Avg		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5443.84</td> <td>47.60</td> <td>54.00</td> <td>-6.40</td> <td>33.89</td> <td>34.81</td> <td>11.05</td> <td>32.15</td> <td>100</td> <td>269</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5443.84	47.60	54.00	-6.40	33.89	34.81	11.05	32.15	100	269	Average	Blank																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5443.84	47.60	54.00	-6.40	33.89	34.81	11.05	32.15	100	269	Average																																																																																																



Mode	45																																		
	Band Edge - R																																		
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																		
ANT	CDD 1+2																																		
Pol.	Vertical	Fundamental																																	
Peak	<p>Date: 2023-12-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5725.10</td> <td>62.74</td> <td>68.30</td> <td>-5.56</td> <td>48.36</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100 269 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5725.10	62.74	68.30	-5.56	48.36	35.12	11.65	32.39	100 269 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 5725.10	62.74	68.30	-5.56	48.36	35.12	11.65	32.39	100 269 Peak																											




Appendix D. Duty Cycle Plots

For CDD mode:


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	95.89	1.400	0.714	1kHz
1+2	802.11ax HE20	94.44	1.020	0.980	1kHz
1+2	802.11ax HE40	88.14	0.520	1.923	3kHz
1+2	802.11ax HE80	83.48	0.288	3.472	10kHz

802.11a

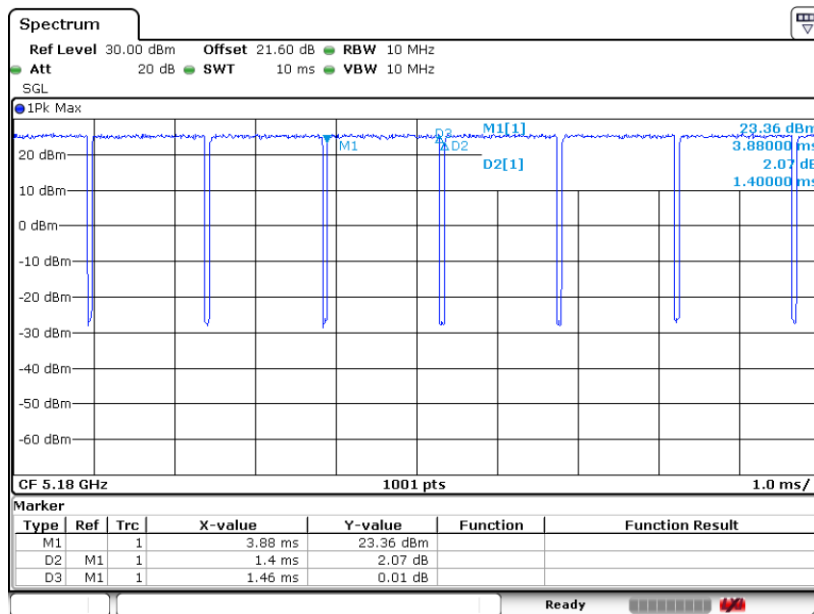




802.11ax HE20

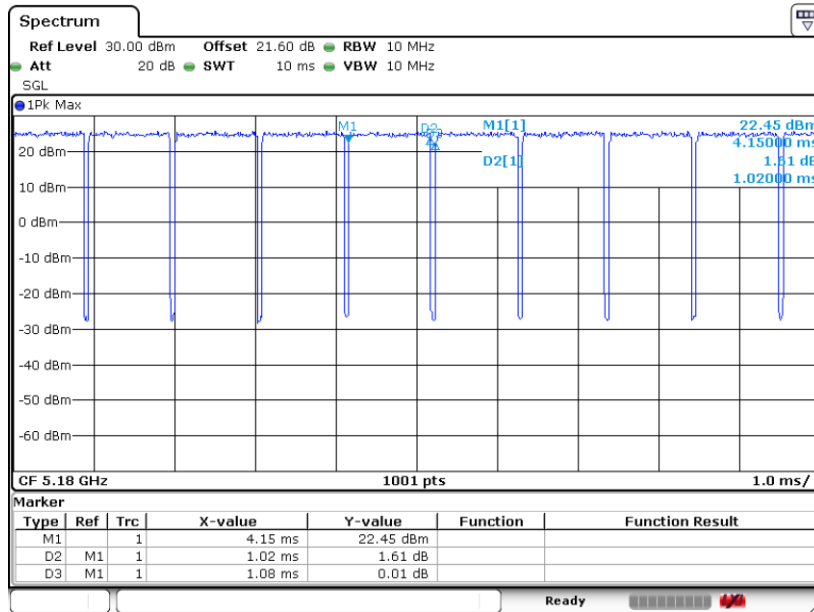

802.11ax HE40

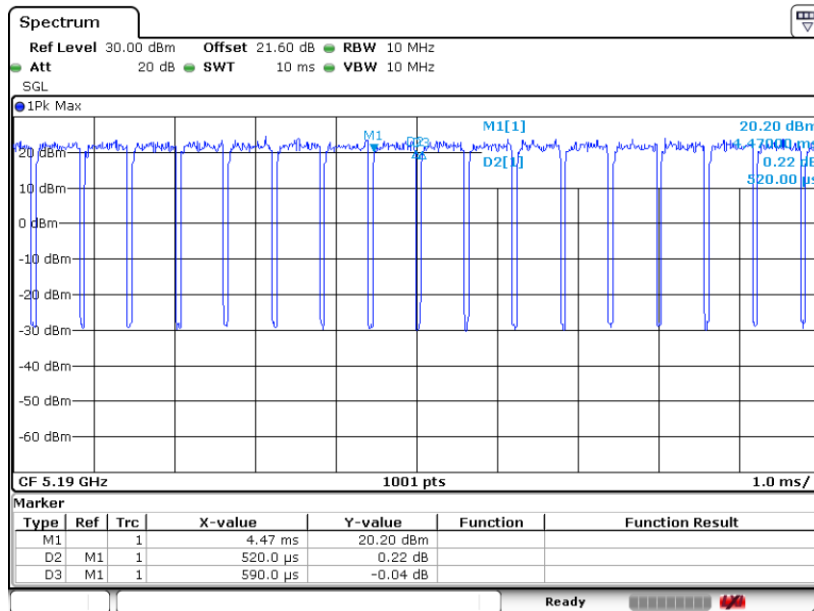



802.11ax HE80

