

FCC Radio Test Report

FCC ID: 2BCGWTBE552E

Report No. : BTL-FCCP-5-2403G002
Equipment : BE9300 Wi-Fi 7 Bluetooth PCIe Adapter
Model Name : Archer TBE552E
Brand Name : tp-link
Applicant : TP-LINK CORPORATION PTE. LTD.
Address : 7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2024/4/19
Date of Test : 2024/4/19 ~ 2024/7/20
Issued Date : 2024/7/24

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Poken Huang
Poken Huang, Engineer

Approved by : Peter Chen
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
1.4 DUTY CYCLE	9
2 GENERAL INFORMATION	12
2.1 DESCRIPTION OF EUT	12
2.2 TEST MODES	16
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
2.4 SUPPORT UNITS	19
3 AC POWER LINE CONDUCTED EMISSIONS TEST	20
3.1 LIMIT	20
3.2 TEST PROCEDURE	20
3.3 DEVIATION FROM TEST STANDARD	20
3.4 TEST SETUP	21
3.5 TEST RESULT	21
4 RADIATED EMISSIONS TEST	22
4.1 LIMIT	22
4.2 TEST PROCEDURE	23
4.3 DEVIATION FROM TEST STANDARD	23
4.4 TEST SETUP	24
4.5 EUT OPERATING CONDITIONS	25
4.6 TEST RESULT – BELOW 30 MHZ	25
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	25
4.8 TEST RESULT – ABOVE 1 GHZ	25
5 BANDWIDTH TEST	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	26
5.3 DEVIATION FROM TEST STANDARD	26
5.4 TEST SETUP	26
5.5 EUT OPERATING CONDITIONS	26
5.6 TEST RESULT	26
6 OUTPUT POWER TEST	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27
6.3 DEVIATION FROM TEST STANDARD	27
6.4 TEST SETUP	27
6.5 EUT OPERATING CONDITIONS	27
6.6 TEST RESULT	27
7 POWER SPECTRAL DENSITY	28
7.1 LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM TEST STANDARD	28
7.4 TEST SETUP	28
7.5 EUT OPERATING CONDITIONS	28
7.6 TEST RESULT	28

8	LIST OF MEASURING EQUIPMENTS	29
9	EUT TEST PHOTO	31
10	EUT PHOTOS	31
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	32
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	37
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	40
APPENDIX D	BANDWIDTH	340
APPENDIX E	OUTPUT POWER	387
APPENDIX F	POWER SPECTRAL DENSITY	408

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-5-2403G002	R00	Original Report.	2024/7/1	Invalid
BTL-FCCP-5-2403G002	R01	Revised report to address comments.	2024/7/22	Invalid
BTL-FCCP-5-2403G002	R02	Revised report to address comments.	2024/7/24	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX C APPENDIX D APPENDIX E	Pass	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	Pass	-----
15.407(a)	Output Power	APPENDIX F	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX G	Pass	-----
15.203	Antenna Requirement	-----	Pass	NOTE (4)
15.407(c)	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) The device what use replaceable antennas with non-standard interfaces are considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

(FCC DN: TW0659)

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

CB20 TR01 C20

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C20	CISPR	150 kHz ~ 30MHz	2.4498

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
CB20	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test:

Test Item	U,(dB)
Occupied Bandwidth	0.53
Output power	0.37
Power Spectral Density	0.66
Conducted Spurious emissions	0.53
Conducted Band edges	0.53
Frequency Stability	0.53

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25°C, 45%	AC 120 V	Ken Lu
Radiated emissions below 1 GHz	25°C, 65%	AC 120 V	Barry Tsui
Radiated emissions above 1 GHz	25°C, 65%	AC 120 V	Barry Tsui
Bandwidth	24°C, 50%	AC 120 V	Cheng Tsai
Output Power	24°C, 50%	AC 120 V	Cheng Tsai
Power Spectral Density	24°C, 50%	AC 120 V	Cheng Tsai







1.4 DUTY CYCLE







If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	1.400	1	1.400	1.455	96.22%	0.17
IEEE 802.11ac (VHT20)	0.685	1	0.685	0.735	93.20%	0.31
IEEE 802.11ac (VHT40)	1.290	1	1.290	1.345	95.91%	0.18
IEEE 802.11ac (VHT80)	0.619	1	0.619	0.672	92.11%	0.36
IEEE 802.11ac (VHT160)	0.332	1	0.332	0.386	85.87%	0.66
IEEE 802.11ax (HE20)	2.030	1	2.030	2.080	97.60%	0.11
IEEE 802.11ax (HE40)	0.530	1	0.530	0.590	89.83%	0.47
IEEE 802.11ax (HE80)	0.530	1	0.530	0.610	86.89%	0.61
IEEE 802.11ax (HE160)	0.530	1	0.530	0.590	89.83%	0.47
IEEE 802.11be(EHT20)	3.900	1	3.900	3.960	98.48%	0.00
IEEE 802.11be(EHT40)	0.082	1	0.082	0.102	80.39%	0.95
IEEE 802.11be(EHT80)	0.980	1	0.980	1.050	93.33%	0.30
IEEE 802.11be(EHT160)	0.530	1	0.530	0.590	89.83%	0.47

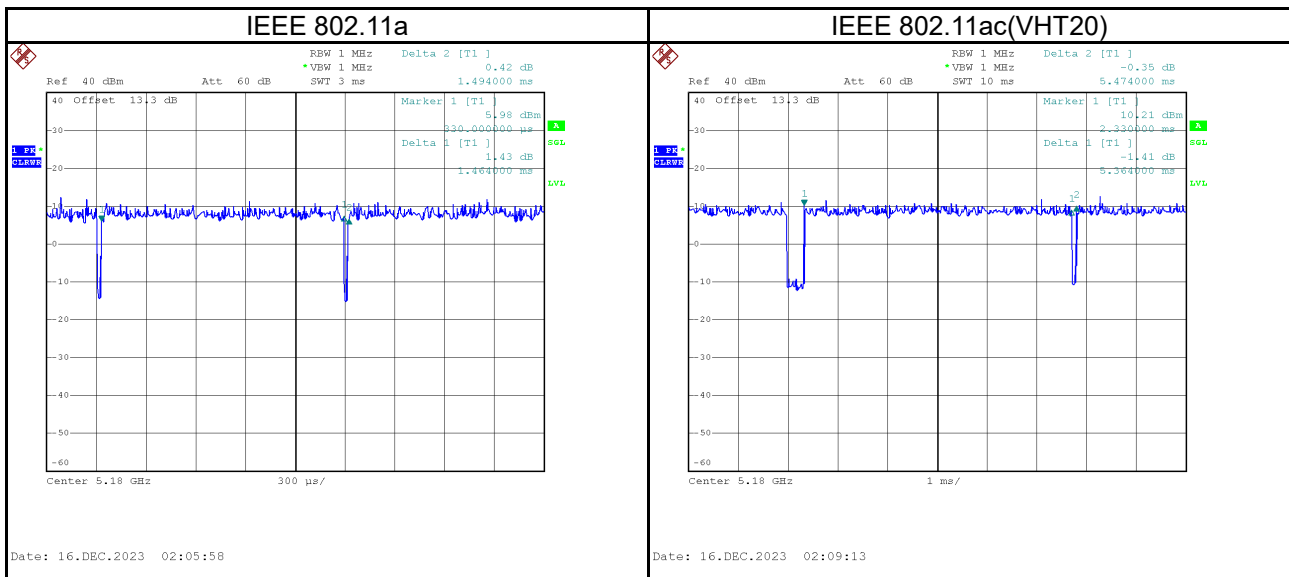

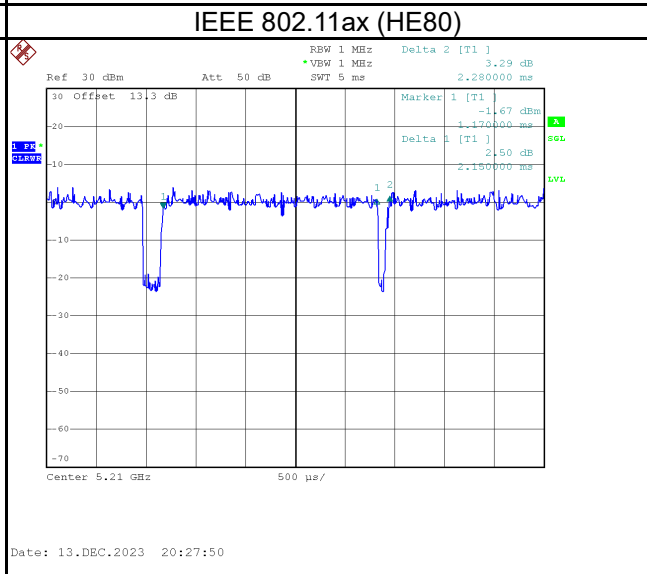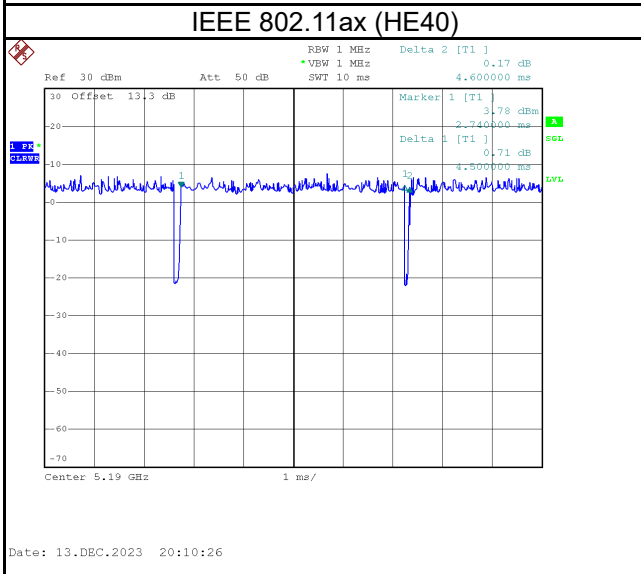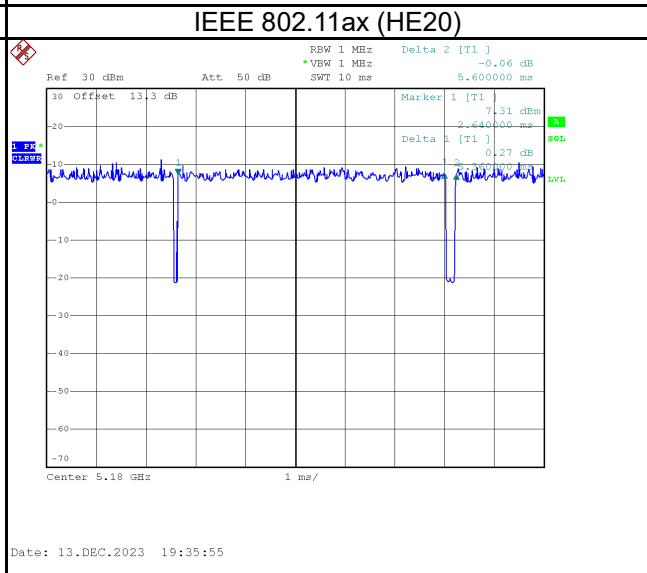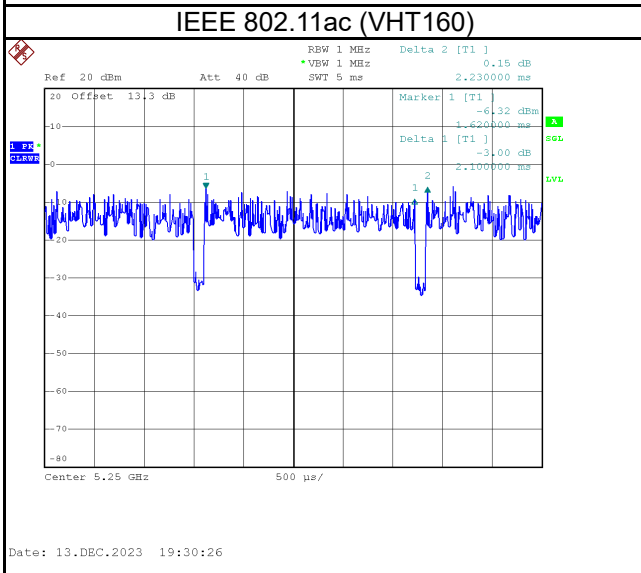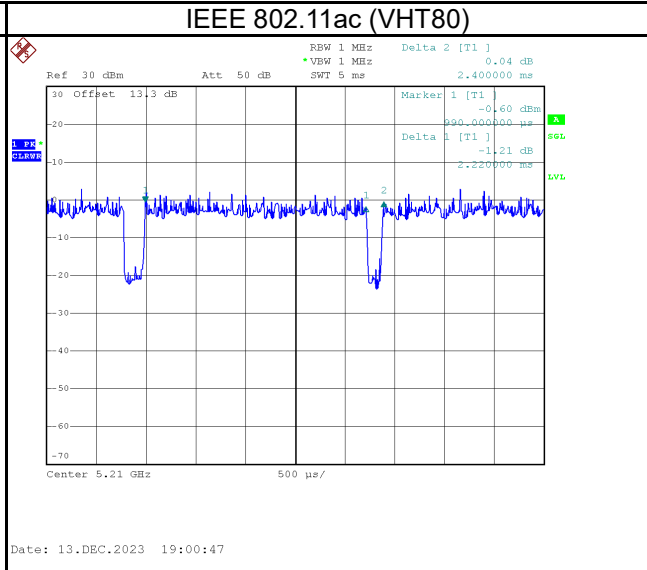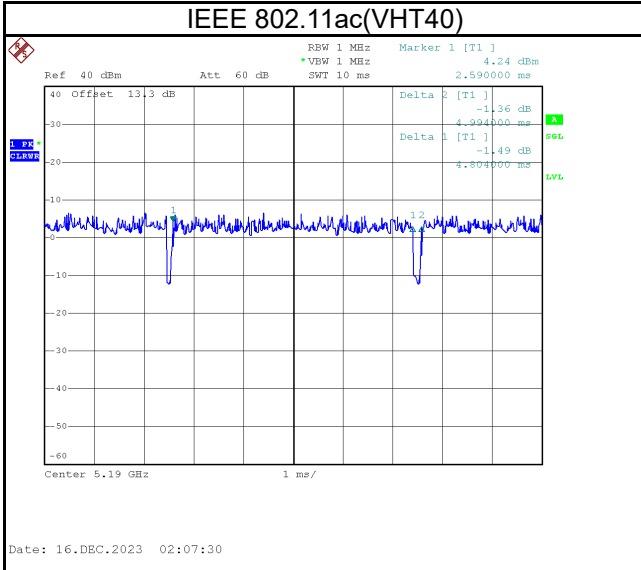

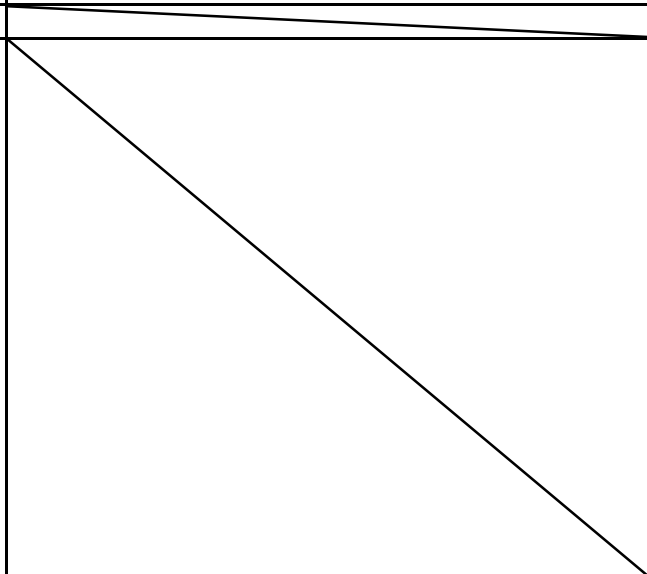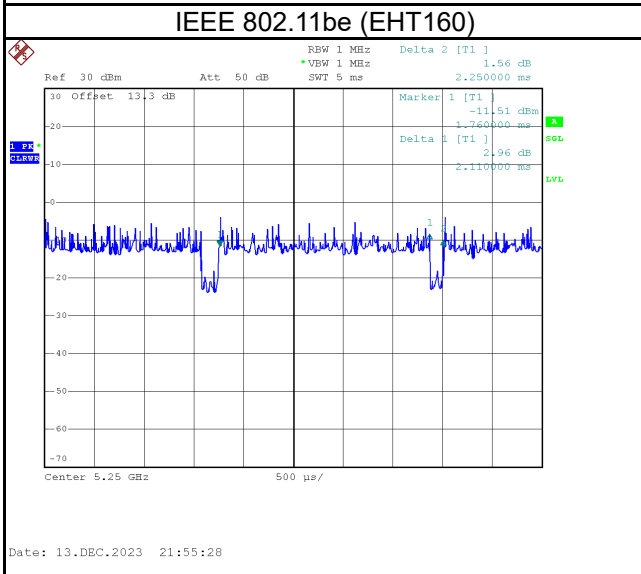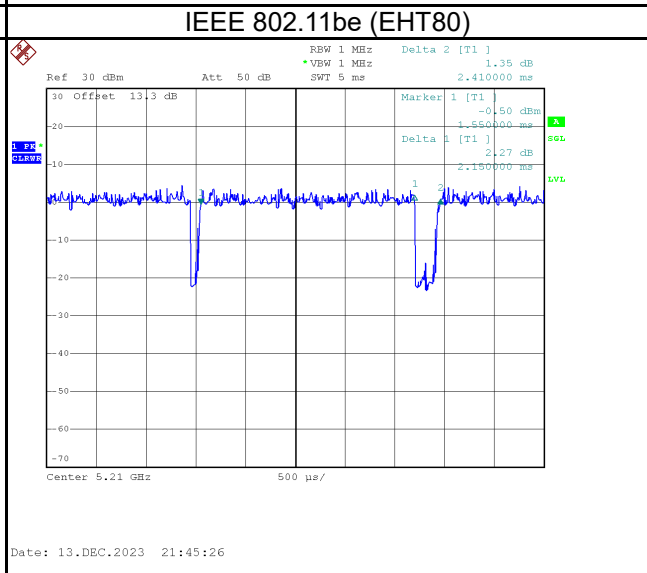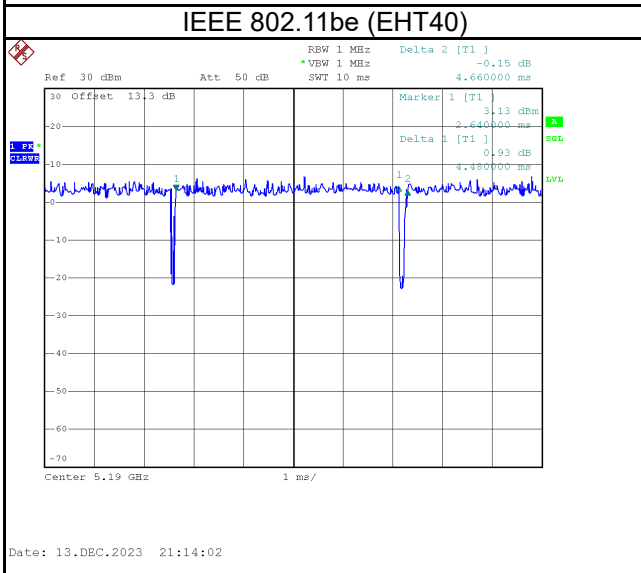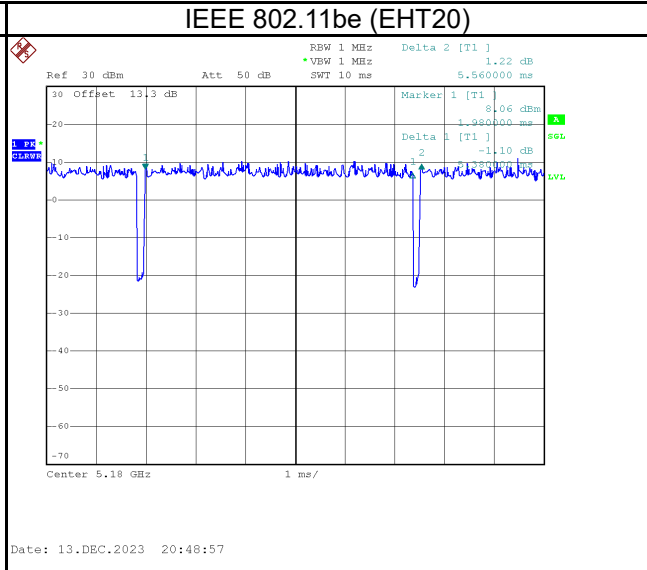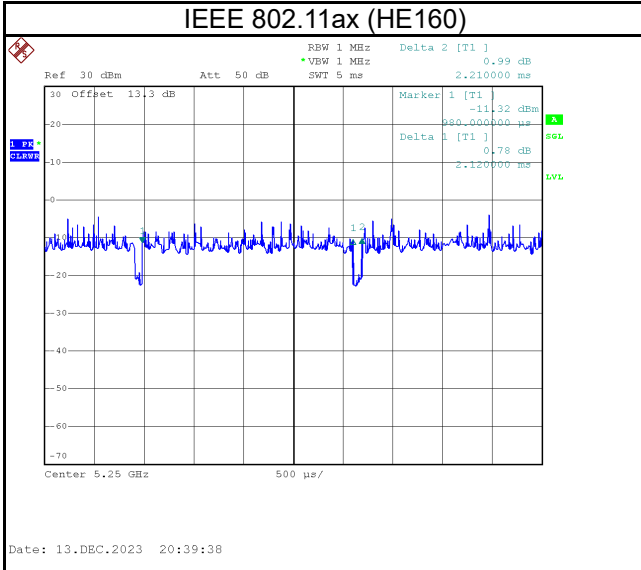

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	BE9300 Wi-Fi 7 Bluetooth PCIe Adapter
Brand Name	tp-link
Model Name	Archer TBE552E
Model Difference	N/A
Hardware Version	1.0
Software Version	1.0
Power Source	Supplied from PCIe Slot.
Power Rating	DC 3.3V
Operation Band	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz
Operation Frequency	UNII-1: 5180 MHz to 5250 MHz UNII-2A: 5250 MHz to 5320 MHz UNII-2C: 5500 MHz to 5700 MHz UNII-3: 5745 MHz to 5825 MHz
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 2402 Mbps 802.11be: up to 2882 Mbps
Output Power Max. for UNII-1	IEEE 802.11ax (HE40): 23.89dBm
Output Power Max. for UNII-2A	IEEE 802.11a: 23.85dBm
Output Power Max. for UNII-2C	IEEE 802.11ax (HE80): 23.07dBm
Output Power Max. for UNII-3	IEEE 802.11be (EHT40): 26.19dBm
Test Model	Archer TBE552E
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac(VHT160) IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Ant.	Brand Name	Model Name	Type	Connector	Gain (dBi)
1	TP-LINK CORPORATION PTE. LTD.	3101504215	Dipole	N/A	2.00
2	TP-LINK CORPORATION PTE. LTD.	3101504215	Dipole	N/A	2.00

Note:

a) The EUT incorporates a CDD function. Physically, the EUT provides two completed transmitters and receivers (2T2R).

b) For Output Power and Power Spectral Density

For Non Beamforming, $N_{ANT} = 2 < 5$; so Directional gain=2.00.

The Direction gain is less than 6 dBi, so output power limits will not be reduced.

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5) Operating Mode and Antenna Configuration

TX Mode	Operating Mode	2TX
	IEEE 802.11a	V (Ant. 1+Ant. 2)
	IEEE 802.11ac (VHT20)	V (Ant. 1+Ant. 2)
	IEEE 802.11ac (VHT40)	V (Ant. 1+Ant. 2)
	IEEE 802.11ac (VHT80)	V (Ant. 1+Ant. 2)
	IEEE 802.11ac (VHT160)	V (Ant. 1+Ant. 2)
	IEEE 802.11ax (HE20)	V (Ant. 1+Ant. 2)
	IEEE 802.11ax (HE40)	V (Ant. 1+Ant. 2)
	IEEE 802.11ax (HE80)	V (Ant. 1+Ant. 2)
	IEEE 802.11ax (HE160)	V (Ant. 1+Ant. 2)
	IEEE 802.11be (EHT20)	V (Ant. 1+Ant. 2)
	IEEE 802.11be (EHT40)	V (Ant. 1+Ant. 2)
	IEEE 802.11be (EHT80)	V (Ant. 1+Ant. 2)
	IEEE 802.11be (EHT160)	V (Ant. 1+Ant. 2)

2.2 TEST MODES

Test Items	Test mode	Channel	Note	
AC power line conducted emissions	Normal/Idle	-	-	
Transmitter Radiated Emissions (below 1GHz)	TX Mode_IEEE 802.11be (EHT40)	151	-	
Transmitter Radiated Emissions (above 1GHz)	TX Mode_IEEE 802.11a	36/48, 52/64 100/140, 149/165	Bandedge	
	TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HE20) TX Mode_IEEE 802.11be (EHT20)			
	TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HE40) TX Mode_IEEE 802.11be (EHT40)			
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HE80) TX Mode_IEEE 802.11be (EHT80)	42, 58 106, 122, 155		
	TX Mode_IEEE 802.11ac (VHT160) TX Mode_IEEE 802.11ax (HE160) TX Mode_IEEE 802.11be (EHT160)	50 114		
	TX Mode_IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165		Harmonic
	TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HE20) TX Mode_IEEE 802.11be (EHT20)	36/40/48 52/60/64 100/116/140/144 149/157/165		
	TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HE40) TX Mode_IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134/142 151/159		
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HE80) TX Mode_IEEE 802.11be (EHT80)	42, 58 106/122/138, 155		
	TX Mode_IEEE 802.11ac (VHT160) TX Mode_IEEE 802.11ax (HE160) TX Mode_IEEE 802.11be (EHT160)	50 114		
	TX Mode_IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165		
	TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HE20) TX Mode_IEEE 802.11be (EHT20)	36/40/48 52/60/64 100/116/140 149/157/165		
TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HE40) TX Mode_IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134 151/159			
TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HE80) TX Mode_IEEE 802.11be (EHT80)	42, 58 106/122/138, 155			
TX Mode_IEEE 802.11ac (VHT160) TX Mode_IEEE 802.11ax (HE160) TX Mode_IEEE 802.11be (EHT160)	50 114			
TX Mode_IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165			

Power Spectral Density & Output Power	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165	-
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)	36/40/48 52/60/64 100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122/138, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) HT20/HT40 covers VHT20/VHT40, due to same modulation. The power setting for 802.11ac VHT20 and VHT40 are the same or lower than 802.11n HT20 and HT40.
- (3) For radiated emission above 18GHz test, only tested and recorded the worst case.
- (4) IEEE 802.11ax mode and IEEE 802.11be mode only supports full RU, so only the full RU is evaluated and measured inside report
- (5) For radiated emission below 1 GHz test, the TX be(HT40) Mode Channel 151 is found to be the worst case and recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

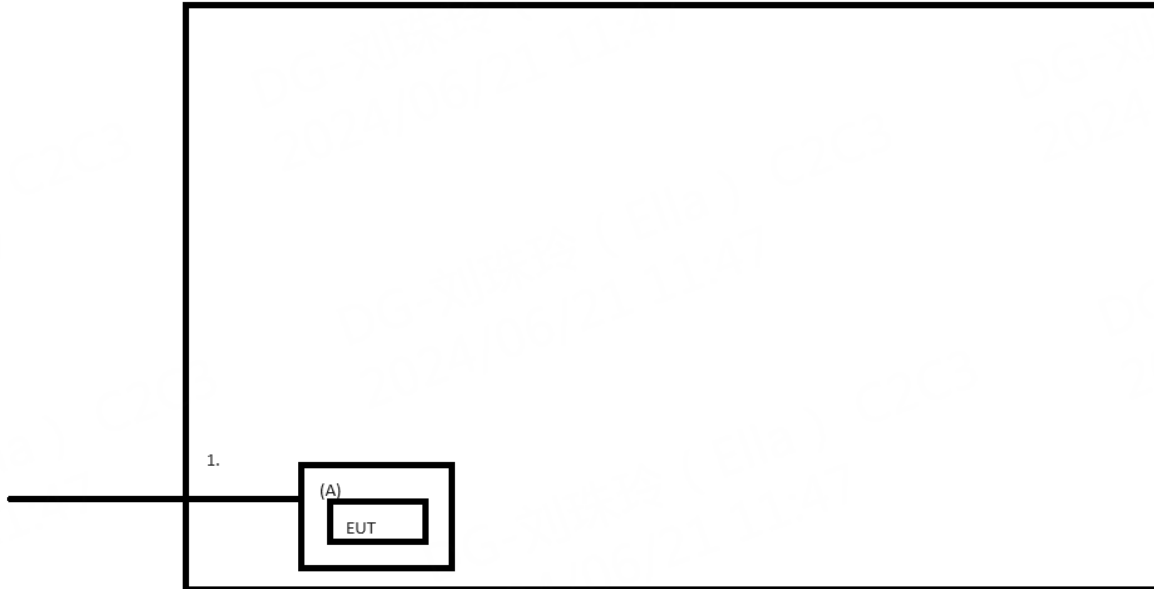

Radiated Emissions

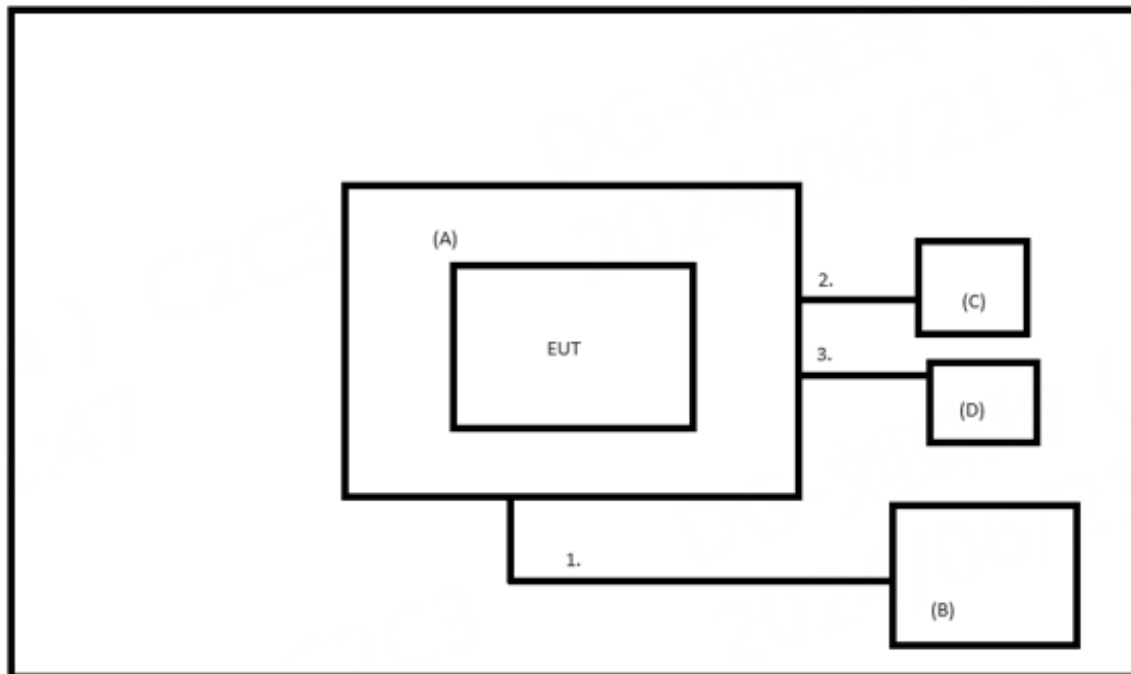

2.4 SUPPORT UNITS

AC power line conducted emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Host computer	HP	DESKTOP-TBTO665	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	Power cable	N	N	0.5m	Supplied by test requester.

Radiated Emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Host computer	HP	DESKTOP-TBT O665	N/A	Furnished by test lab.
B	Computer screen	PHILIPS	221S8LDAB22" LED	N/A	Furnished by test lab.
C	Mouse	Lenovo	Moiuuo	8SSM50L24505A VLC25M019Z	Furnished by test lab.
D	Keyboard	Lenovo	SK-8823	8SSD51B37225A VLC25JOMX4	

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	VGA toVGA	N	N	1m	Furnished by test lab.
2	Power cable	N	N	1.8m	Furnished by test lab.
3	Power cable	N	N	1.8m	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dB μ V)		Correct Factor (dB)		Measurement Value (dB μ V)
38.22	+	3.45	=	41.67

Measurement Value (dB μ V)		Limit Value (dB μ V)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

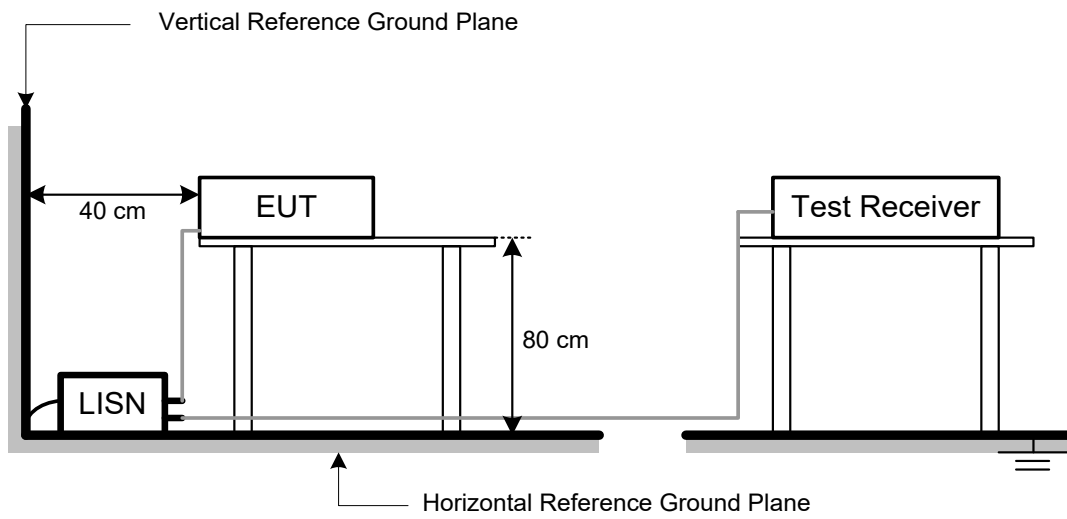

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
36.23	+	-11.97	=	24.26

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
24.26	-	40	=	-15.74

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector


4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

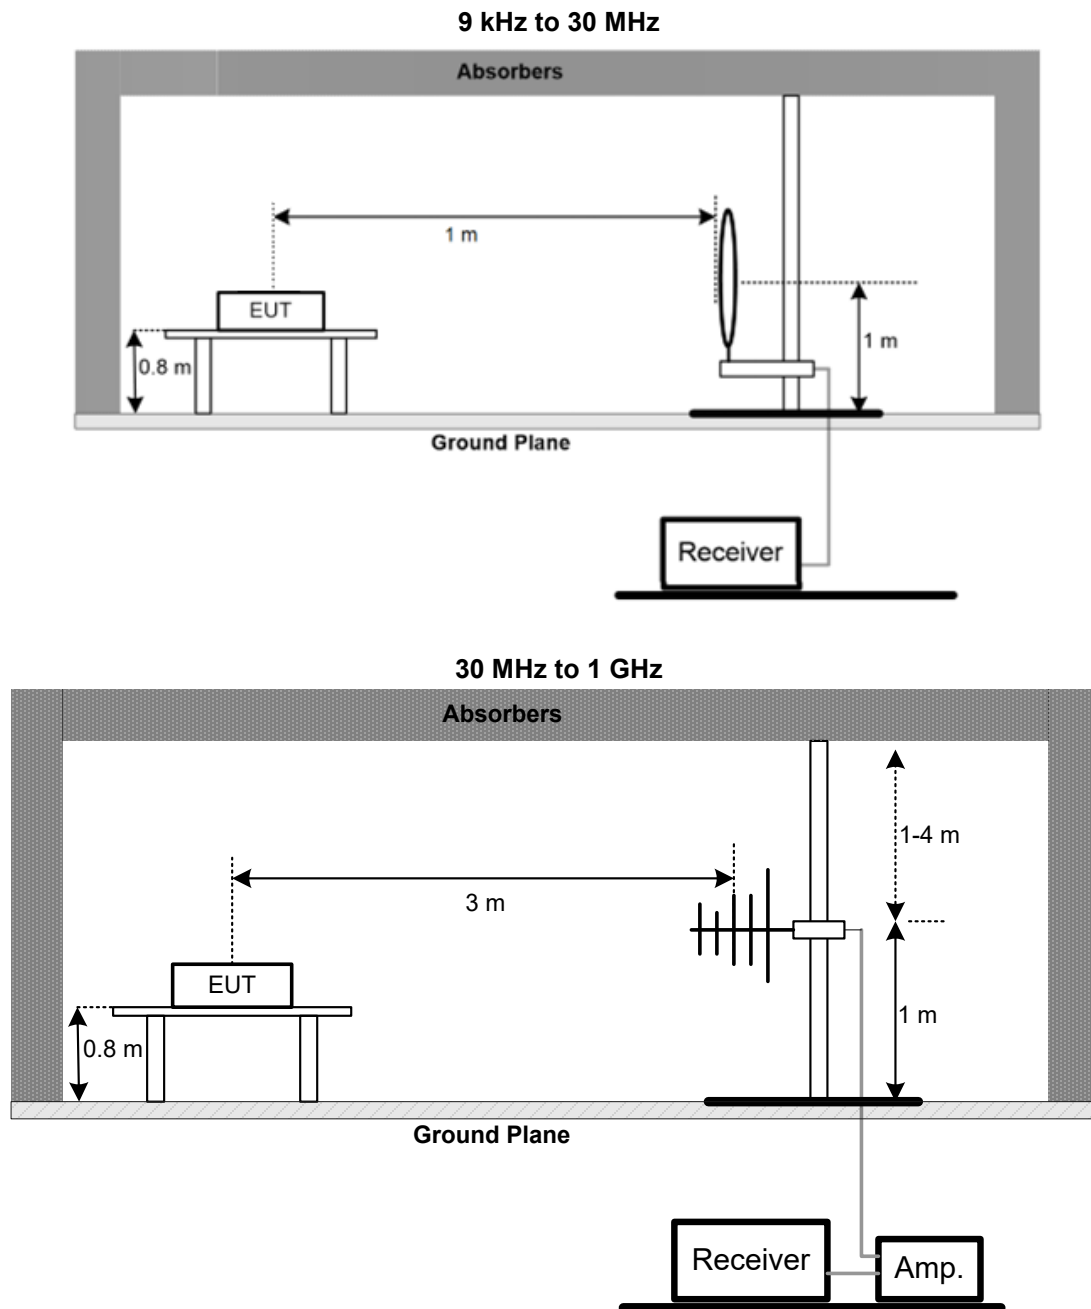

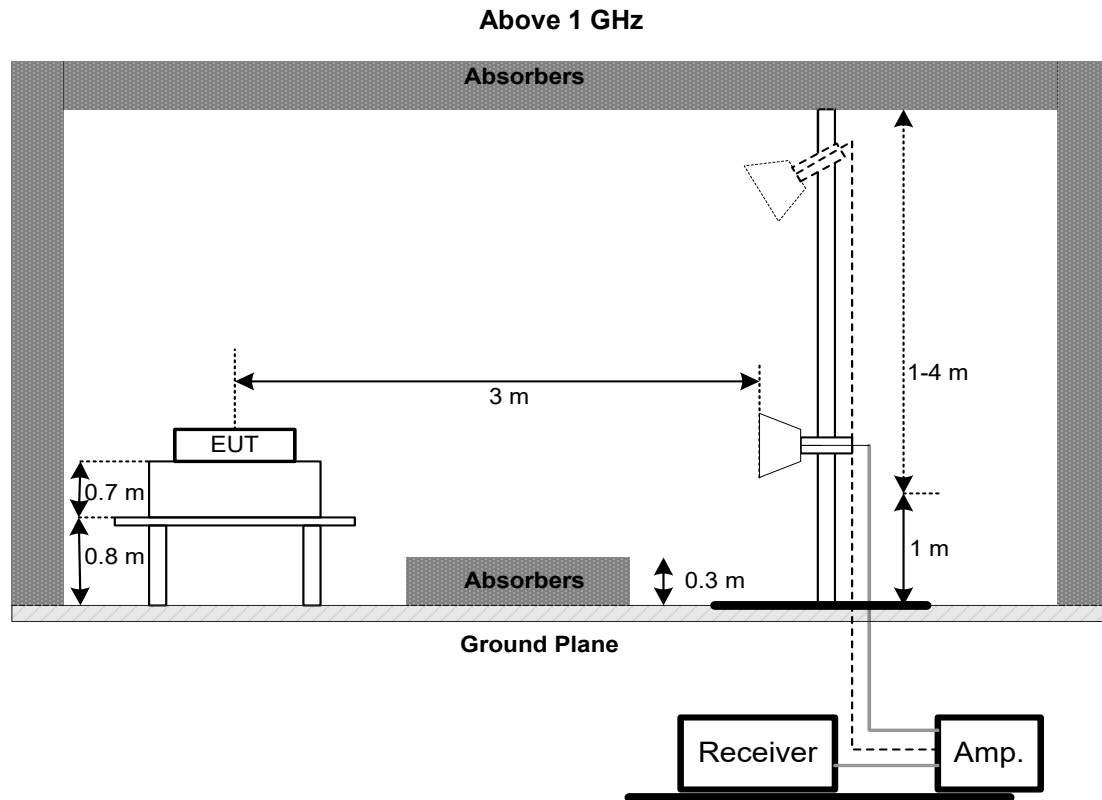

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	> RBW

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

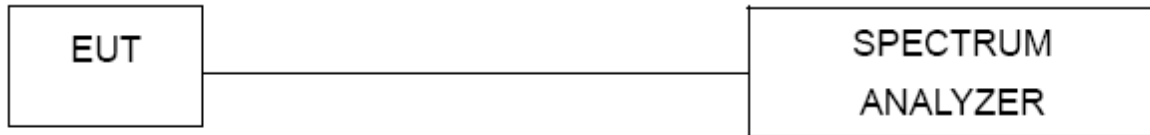

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the Peak Power Analyzer and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - a)Method PM (Measurement using an RF average power meter):
 - (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

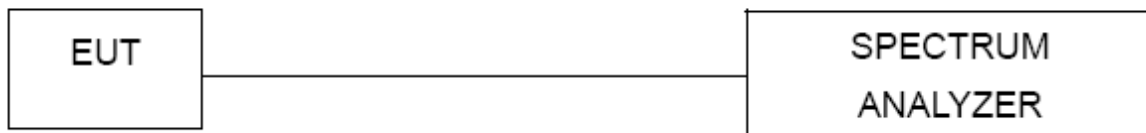

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX G.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2023/7/21	2024/7/20
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2023/12/11	2024/12/10
3	EXA Spectrum Analyzer	keysight	N9038A	MY54130009	2023/6/26	2024/6/25
4	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2024/1/10	2025/1/9
2	Pre-Amplifier	EMCI	EMC051845SE	980779	2024/4/24	2024/12/10
3	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2024/4/24	2024/12/10
4	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2024/4/24	2024/12/10
5	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2024/4/24	2024/12/10
6	EXA Spectrum Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11
7	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2023/12/18	2024/12/17
8	EMI Test Receiver	Keysight	N9038A	MY54130009	2023/6/26	2024/6/25
9	Pre-Amplifier	EMCI	EMC001330-2020 1222	980807	2024/4/24	2024/12/10
10	Test Cable	EMCI	EMC-8D-NM-NM-5000	150106	2024/4/24	2024/12/10
11	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200348	2024/4/24	2024/12/10
12	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	POWER METER	Anritsu	MA24408A	12591	2023/10/25	2024/10/24

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2403G002-1 (APPENDIX-TEST PHOTOS).

10 EUT PHOTOS

Please refer to document Appendix No.: EP-2403G002-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2024/5/3
Test Frequency	-	Phase	Line

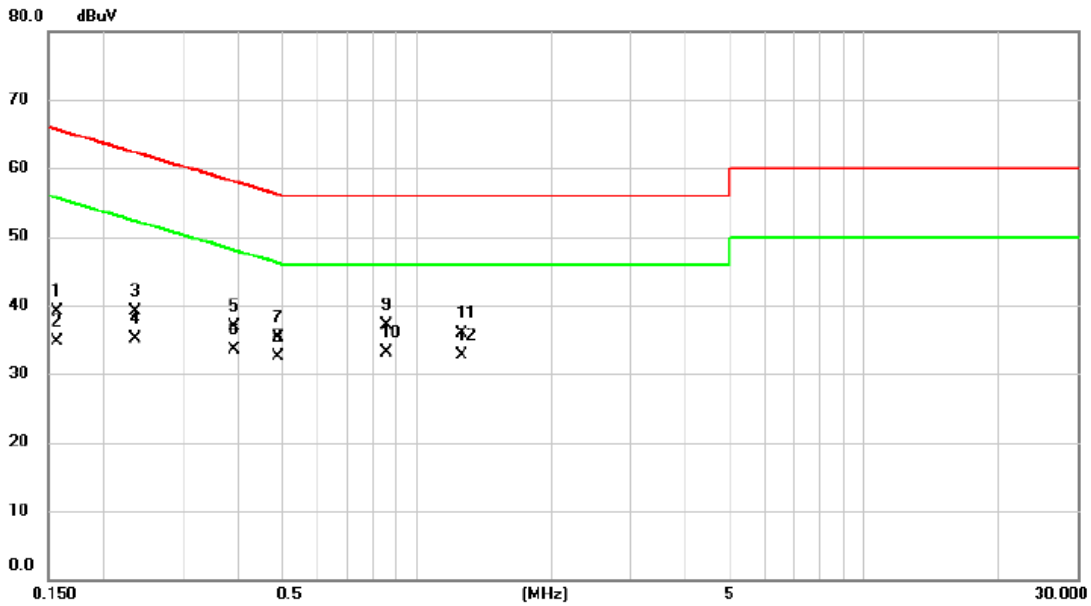


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1566	29.46	9.65	39.11	65.64	-26.53	QP	
2	0.1566	25.06	9.65	34.71	55.64	-20.93	AVG	
3	0.2343	29.39	9.64	39.03	62.30	-23.27	QP	
4	0.2343	25.44	9.64	35.08	52.30	-17.22	AVG	
5	0.3908	27.27	9.65	36.92	58.05	-21.13	QP	
6	0.3908	23.76	9.65	33.41	48.05	-14.64	AVG	
7	0.4910	25.64	9.66	35.30	56.15	-20.85	QP	
8	0.4910	22.75	9.66	32.41	46.15	-13.74	AVG	
9	0.8554	27.44	9.69	37.13	56.00	-18.87	QP	
10 *	0.8554	23.43	9.69	33.12	46.00	-12.88	AVG	
11	1.2604	26.14	9.72	35.86	56.00	-20.14	QP	
12	1.2604	22.92	9.72	32.64	46.00	-13.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/5/3
Test Frequency	-	Phase	Neutral

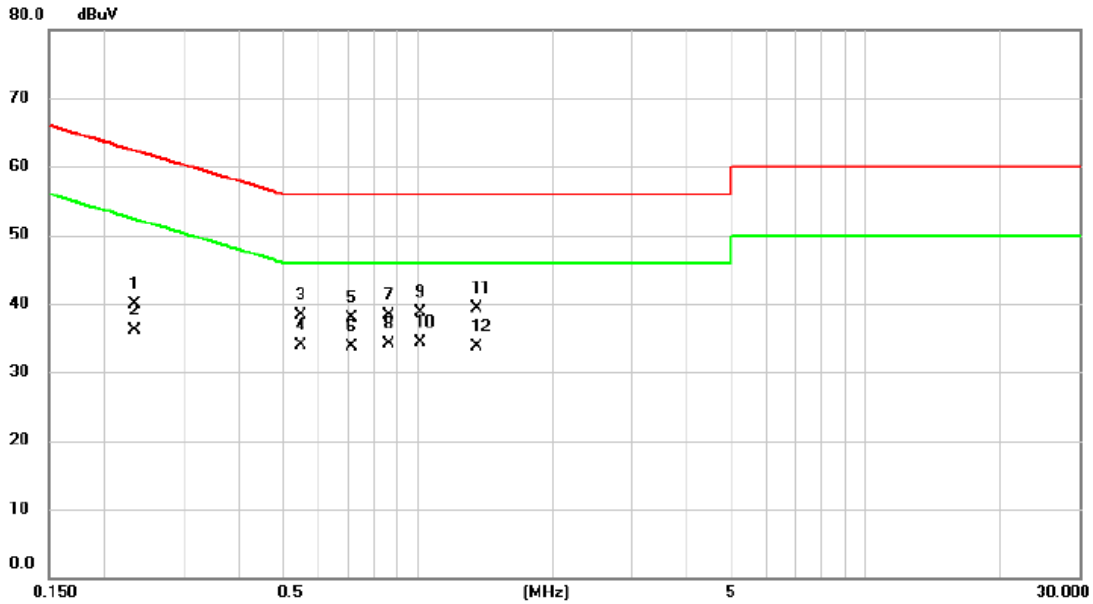


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2340	30.31	9.63	39.94	62.31	-22.37	QP	
2	0.2340	26.43	9.63	36.06	52.31	-16.25	AVG	
3	0.5494	28.58	9.64	38.22	56.00	-17.78	QP	
4	0.5494	24.29	9.64	33.93	46.00	-12.07	AVG	
5	0.7114	28.29	9.67	37.96	56.00	-18.04	QP	
6	0.7114	24.02	9.67	33.69	46.00	-12.31	AVG	
7	0.8600	28.59	9.68	38.27	56.00	-17.73	QP	
8	0.8600	24.40	9.68	34.08	46.00	-11.92	AVG	
9	1.0174	29.07	9.69	38.76	56.00	-17.24	QP	
10 *	1.0174	24.64	9.69	34.33	46.00	-11.67	AVG	
11	1.3504	29.52	9.72	39.24	56.00	-16.76	QP	
12	1.3504	23.98	9.72	33.70	46.00	-12.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/5/3
Test Frequency	-	Phase	Line

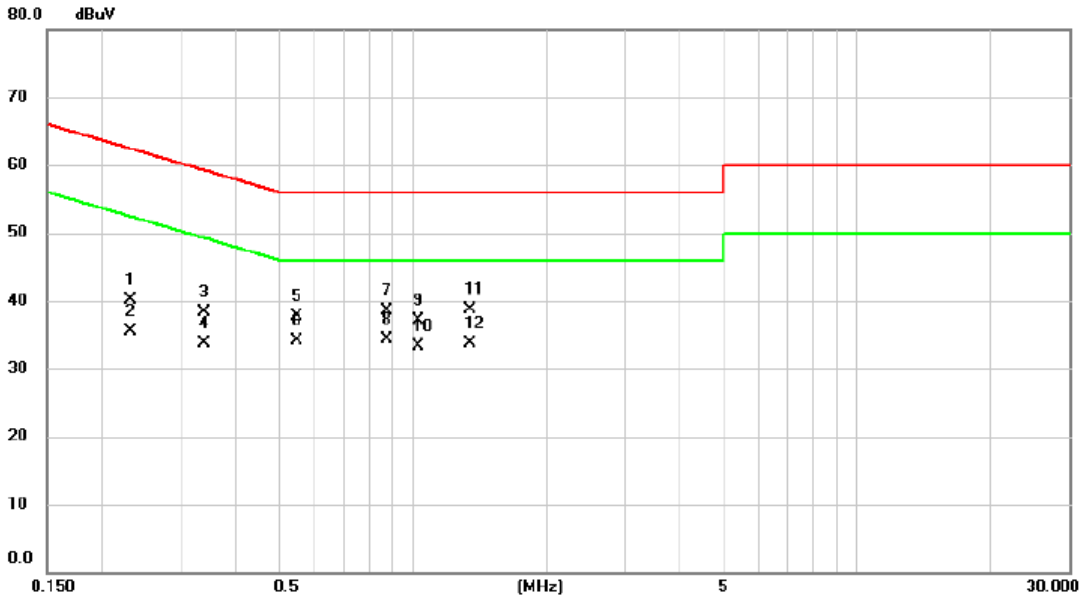


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2315	30.48	9.64	40.12	62.40	-22.28	QP	
2	0.2315	25.92	9.64	35.56	52.40	-16.84	AVG	
3	0.3400	28.56	9.65	38.21	59.20	-20.99	QP	
4	0.3400	24.07	9.65	33.72	49.20	-15.48	AVG	
5	0.5494	28.00	9.66	37.66	56.00	-18.34	QP	
6	0.5494	24.46	9.66	34.12	46.00	-11.88	AVG	
7	0.8734	28.86	9.69	38.55	56.00	-17.45	QP	
8 *	0.8734	24.56	9.69	34.25	46.00	-11.75	AVG	
9	1.0310	27.42	9.70	37.12	56.00	-18.88	QP	
10	1.0310	23.59	9.70	33.29	46.00	-12.71	AVG	
11	1.3414	29.04	9.73	38.77	56.00	-17.23	QP	
12	1.3414	23.97	9.73	33.70	46.00	-12.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/5/3
Test Frequency	-	Phase	Neutral

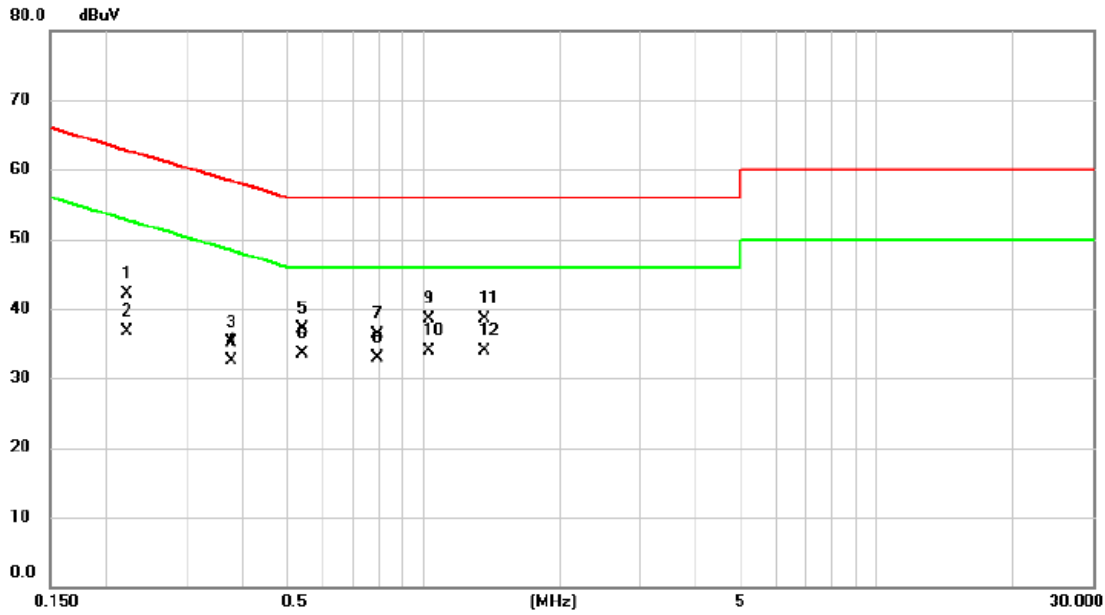


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2224	32.44	9.63	42.07	62.73	-20.66	QP	
2		0.2224	27.08	9.63	36.71	52.73	-16.02	AVG	
3		0.3772	25.57	9.63	35.20	58.34	-23.14	QP	
4		0.3772	22.94	9.63	32.57	48.34	-15.77	AVG	
5		0.5404	27.48	9.64	37.12	56.00	-18.88	QP	
6		0.5404	23.81	9.64	33.45	46.00	-12.55	AVG	
7		0.7925	26.64	9.67	36.31	56.00	-19.69	QP	
8		0.7925	23.15	9.67	32.82	46.00	-13.18	AVG	
9		1.0265	28.78	9.69	38.47	56.00	-17.53	QP	
10		1.0265	24.18	9.69	33.87	46.00	-12.13	AVG	
11		1.3595	28.82	9.72	38.54	56.00	-17.46	QP	
12	*	1.3595	24.18	9.72	33.90	46.00	-12.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/29
Test Frequency	5755MHz	Polarization	Vertical

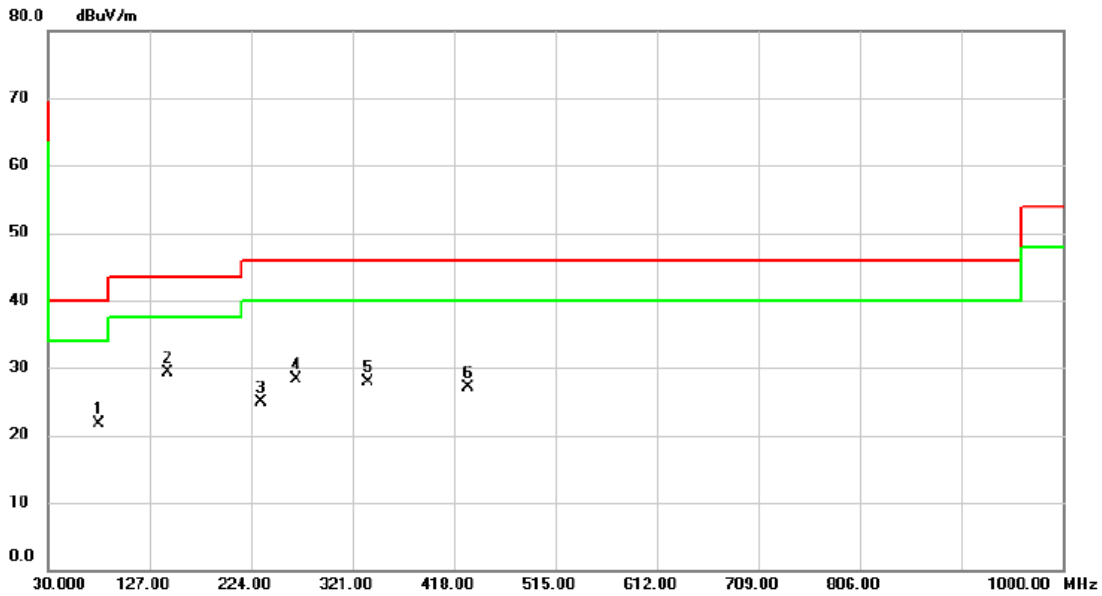


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		78.5000	37.54	-15.78	21.76	40.00	-18.24	peak	200	161
2	*	144.4600	40.98	-11.59	29.39	43.50	-14.11	peak	100	163
3		233.7000	38.13	-13.22	24.91	46.00	-21.09	peak	200	343
4		266.6800	39.67	-11.42	28.25	46.00	-17.75	peak		
5		335.5500	37.13	-9.30	27.83	46.00	-18.17	peak	200	200
6		431.5800	33.69	-6.54	27.15	46.00	-18.85	peak	200	250

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/29
Test Frequency	5755MHz	Polarization	Horizontal

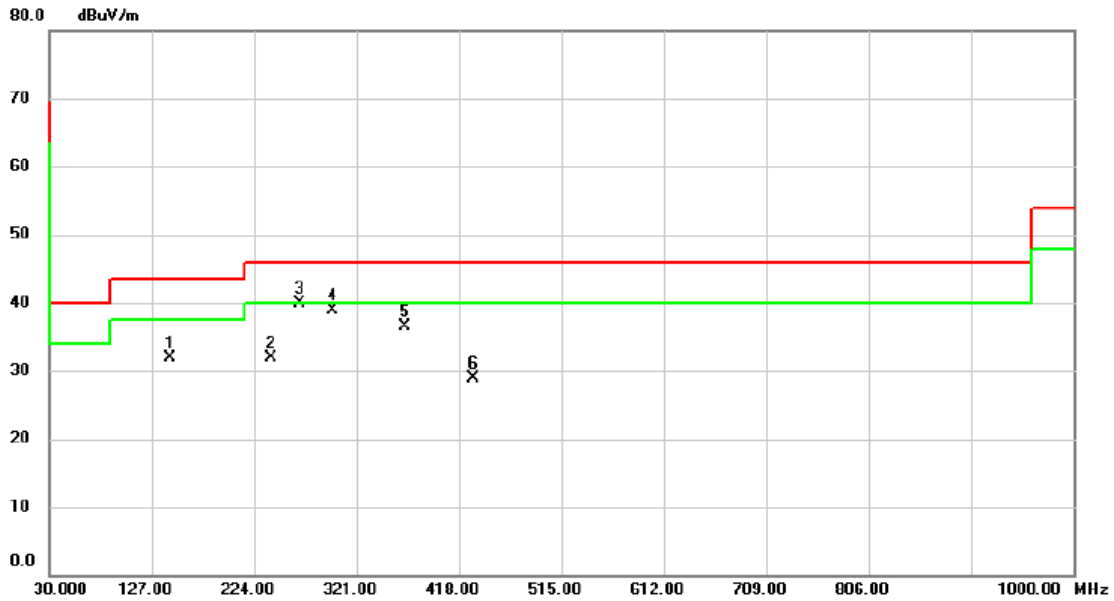


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	144.4600	43.52	-11.59	31.93	43.50	-11.57	peak	200	234	
2	240.4900	44.12	-12.25	31.87	46.00	-14.13	peak	100	191	
3 *	266.6800	51.33	-11.42	39.91	46.00	-6.09	peak	100	254	
4	298.6900	49.23	-10.26	38.97	46.00	-7.03	peak	100	254	
5	366.5900	44.90	-8.44	36.46	46.00	-9.54	peak	100	299	
6	431.5800	35.54	-6.54	29.00	46.00	-17.00	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2024/4/24
Test Frequency	5180MHz	Polarization	Horizontal

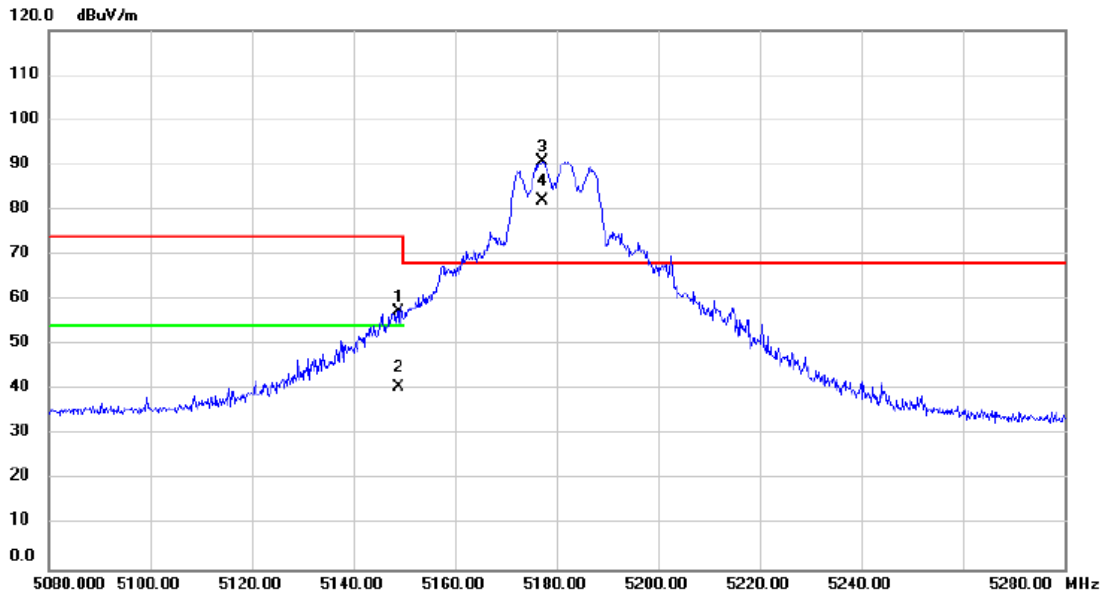


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5149.000	62.02	-4.46	57.56	74.00	-16.44	peak			
2	5149.000	45.07	-4.46	40.61	54.00	-13.39	AVG			
3 *	5177.200	95.21	-4.46	90.75	68.20	22.55	peak			No Limit
4 X	5177.200	86.53	-4.46	82.07	68.20	13.87	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/4/24
Test Frequency	5240MHz	Polarization	Vertical

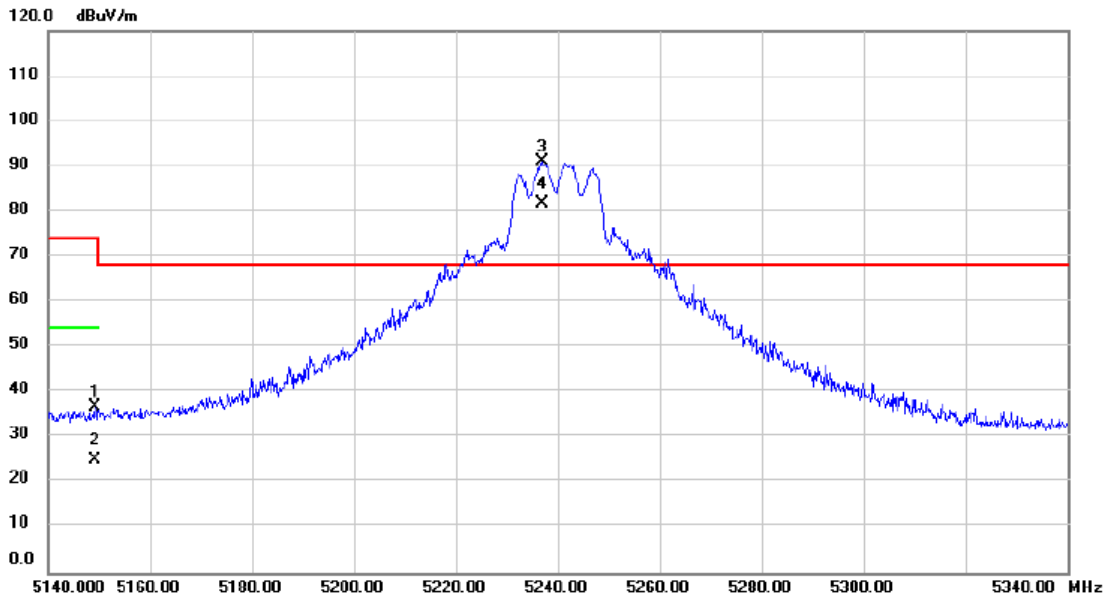


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5149.200	41.11	-4.46	36.65	74.00	-37.35	peak			
2		5149.200	29.57	-4.46	25.11	54.00	-28.89	AVG			
3	*	5236.800	95.57	-4.47	91.10	68.20	22.90	peak			No Limit
4	X	5236.800	86.25	-4.47	81.78	68.20	13.58	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/4/24
Test Frequency	5260MHz	Polarization	Vertical

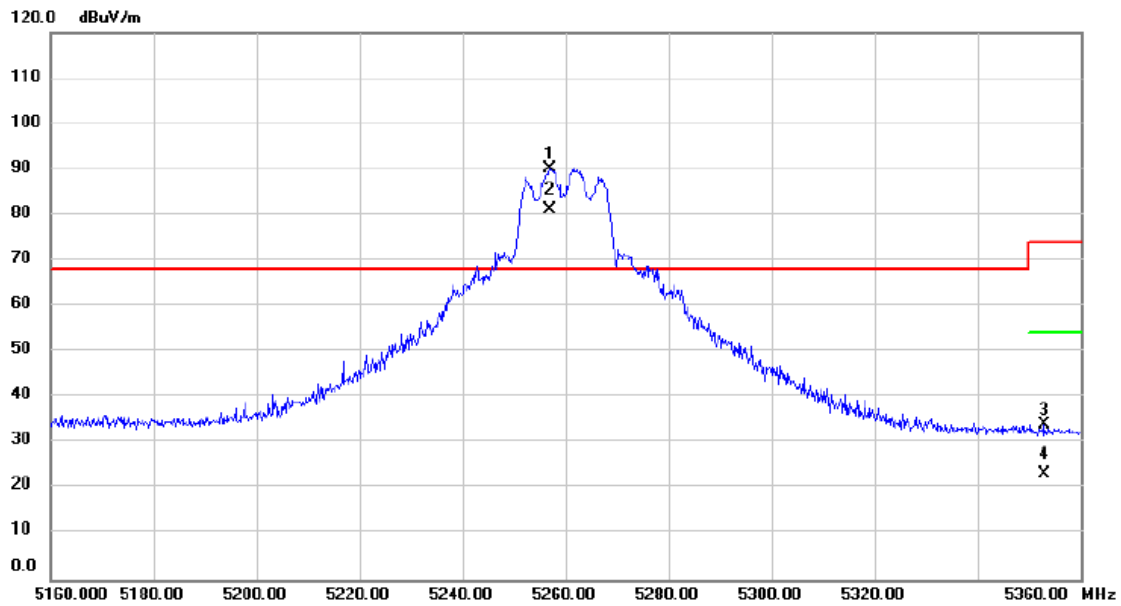


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5256.800	94.57	-4.47	90.10	68.20	21.90	peak		No Limit
2	X	5256.800	85.57	-4.47	81.10	68.20	12.90	AVG		No Limit
3		5353.000	38.50	-4.48	34.02	74.00	-39.98	peak		
4		5353.000	27.67	-4.48	23.19	54.00	-30.81	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/4/24
Test Frequency	5320MHz	Polarization	Vertical

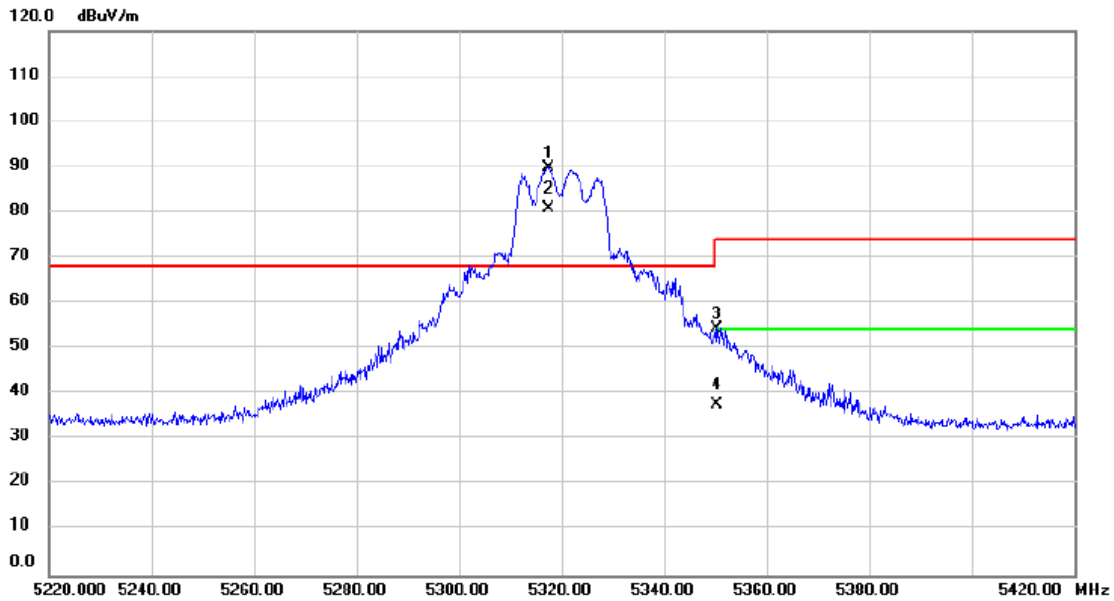


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		cm	degree	
1	*	5317.400	94.46	-4.48	89.98	68.20	21.78	peak			No Limit
2	X	5317.400	85.32	-4.48	80.84	68.20	12.64	AVG			No Limit
3		5350.200	59.07	-4.48	54.59	74.00	-19.41	peak			
4		5350.200	42.23	-4.48	37.75	54.00	-16.25	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/4/24
Test Frequency	5500MHz	Polarization	Vertical

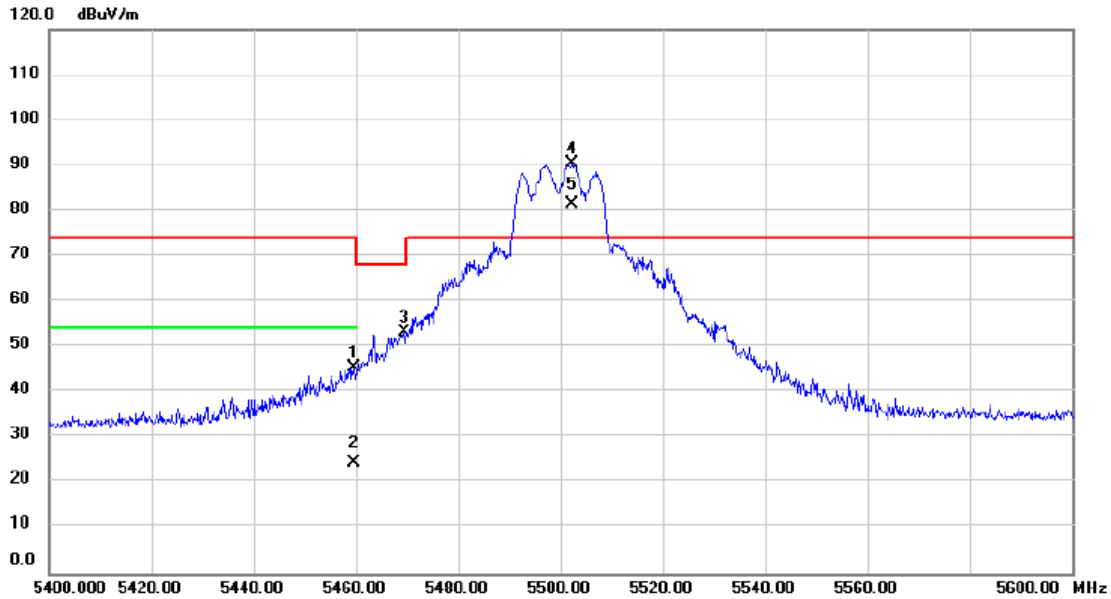


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5459.600	49.92	-4.49	45.43	74.00	-28.57			peak
2		5459.600	28.98	-4.49	24.49	54.00	-29.51			AVG
3		5469.400	57.62	-4.50	53.12	68.20	-15.08			peak
4	*	5502.400	94.81	-4.50	90.31	74.00	16.31			peak
5	X	5502.400	86.02	-4.50	81.52	74.00	7.52			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/4/24
Test Frequency	5700MHz	Polarization	Vertical

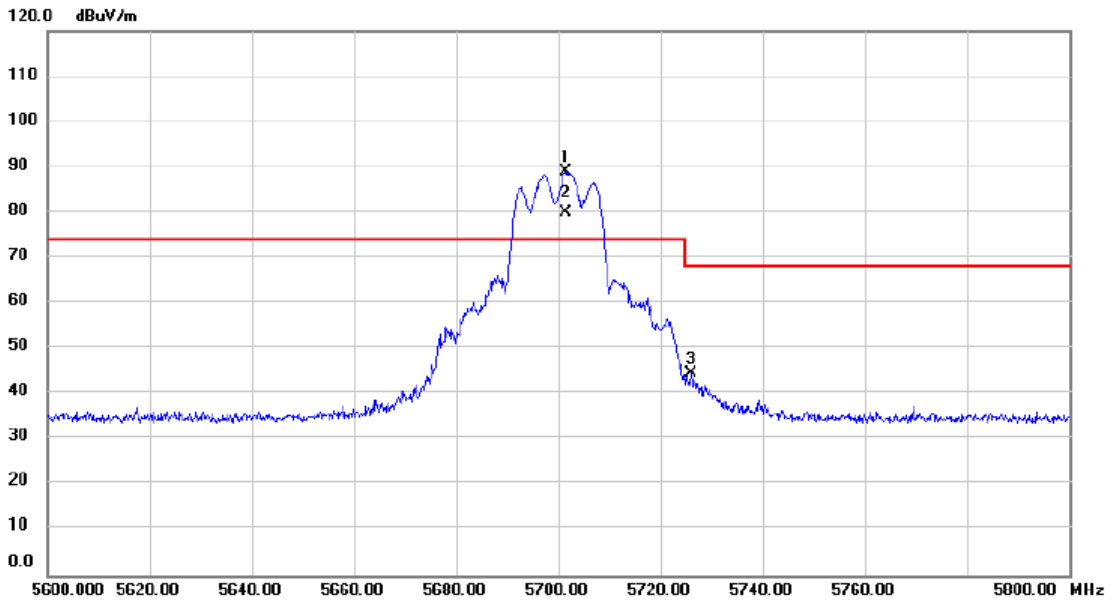


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		cm	degree	
1	*	5701.400	93.20	-4.32	88.88	74.00	14.88	peak			No Limit
2	X	5701.400	84.21	-4.32	79.89	74.00	5.89	AVG			No Limit
3		5726.000	48.93	-4.30	44.63	68.20	-23.57	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/4/25
Test Frequency	5745MHz	Polarization	Vertical

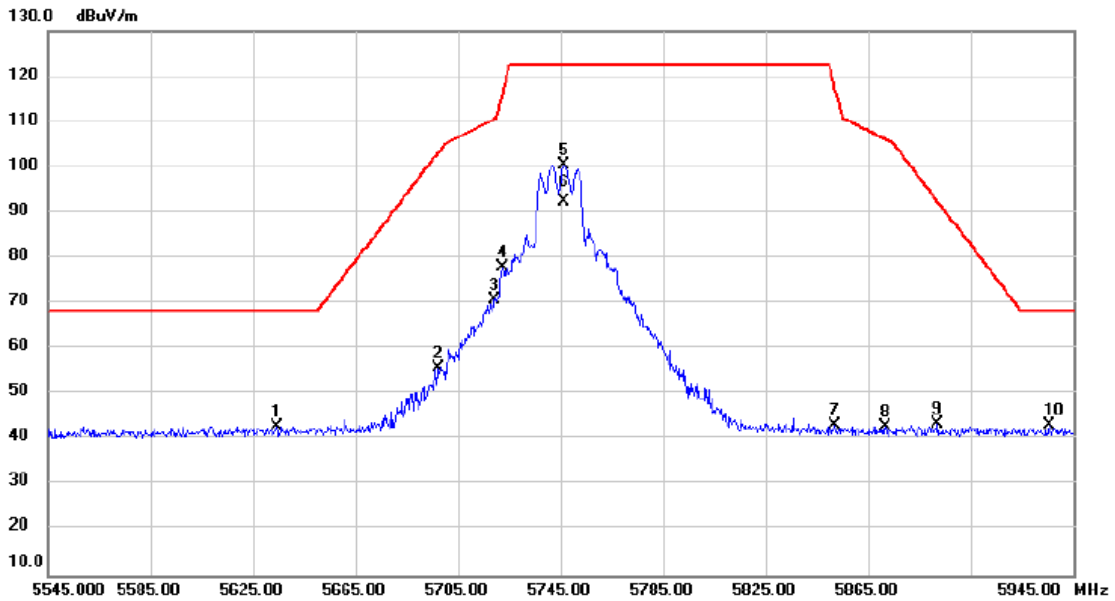


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5634.200	40.71	2.28	42.99	68.20	-25.21	peak			
2	5697.400	53.34	2.38	55.72	103.28	-47.56	peak			
3	5719.400	68.22	2.41	70.63	110.63	-40.00	peak			
4	5722.200	75.52	2.42	77.94	115.82	-37.88	peak			
5 *	5746.200	98.11	2.46	100.57	122.20	-21.63	peak			No Limit
6	5746.200	89.87	2.46	92.33	122.20	-29.87	AVG			No Limit
7	5852.200	40.52	2.62	43.14	117.18	-74.04	peak			
8	5871.800	40.24	2.65	42.89	106.09	-63.20	peak			
9	5892.200	40.81	2.68	43.49	92.44	-48.95	peak			
10	5935.800	40.49	2.75	43.24	68.20	-24.96	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/4/25
Test Frequency	5825MHz	Polarization	Vertical

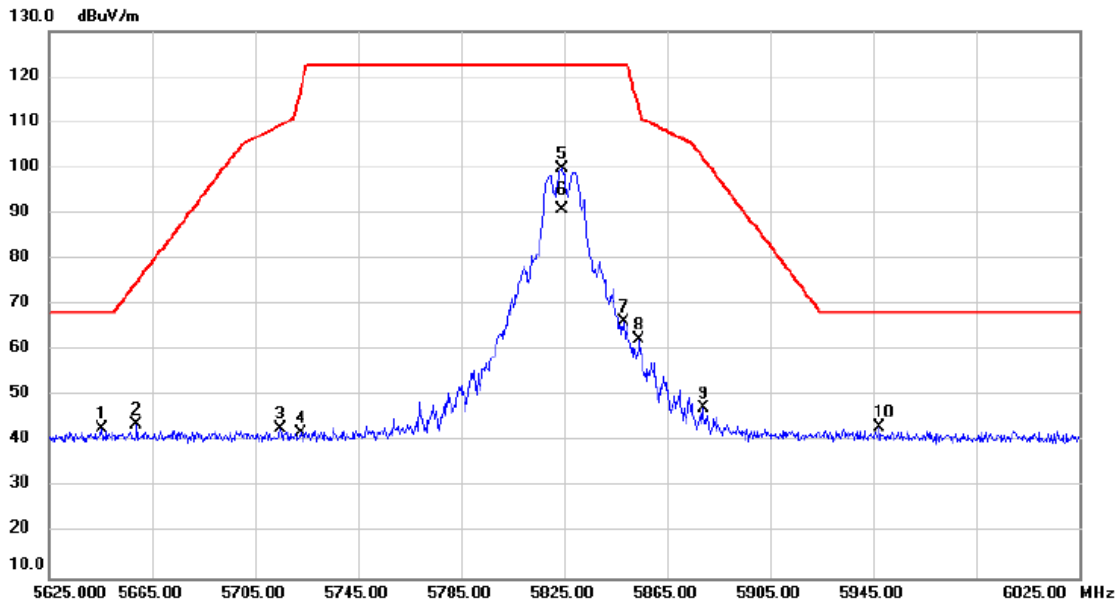


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5645.400	40.52	2.29	42.81	68.20	-25.39	peak			
2	5659.000	41.28	2.32	43.60	74.88	-31.28	peak			
3	5715.000	40.53	2.41	42.94	109.40	-66.46	peak			
4	5722.600	39.42	2.42	41.84	116.73	-74.89	peak			
5 *	5824.200	97.36	2.58	99.94	122.20	-22.26	peak			No Limit
6	5824.200	88.29	2.58	90.87	122.20	-31.33	AVG			No Limit
7	5848.200	63.69	2.62	66.31	122.20	-55.89	peak			
8	5854.200	59.77	2.63	62.40	112.62	-50.22	peak			
9	5879.000	44.83	2.66	47.49	102.23	-54.74	peak			
10	5947.400	40.31	2.77	43.08	68.20	-25.12	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5180MHz	Polarization	58

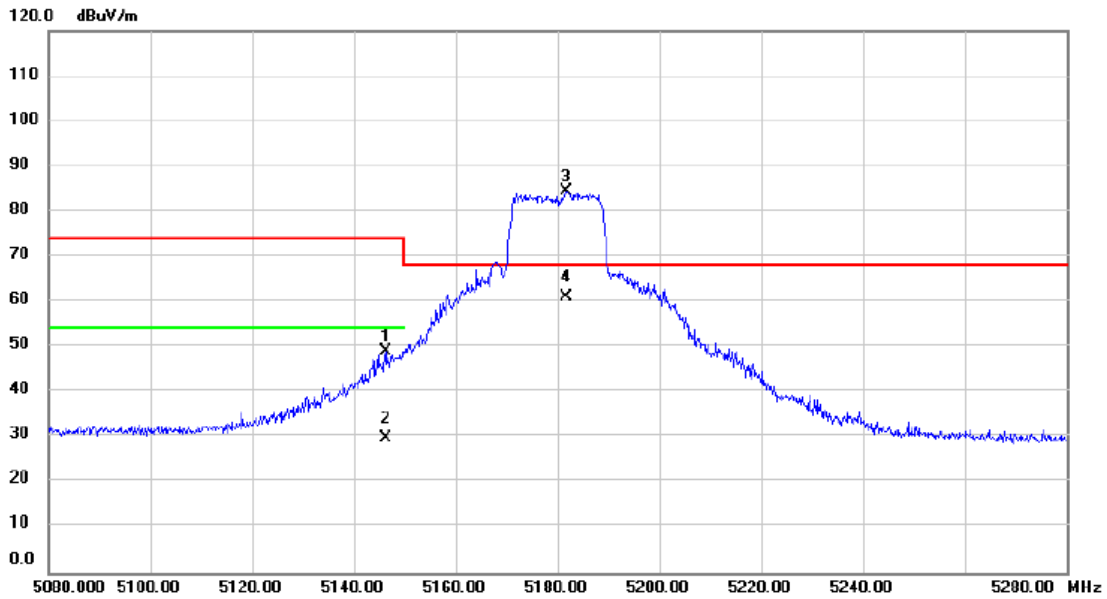


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5146.200	57.11	-8.07	49.04	74.00	-24.96			peak
2		5146.200	38.00	-8.07	29.93	54.00	-24.07			AVG
3	*	5181.800	92.42	-8.06	84.36	68.20	16.16			No Limit
4		5181.800	69.01	-8.06	60.95	68.20	-7.25			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5240MHz	Polarization	Vertical

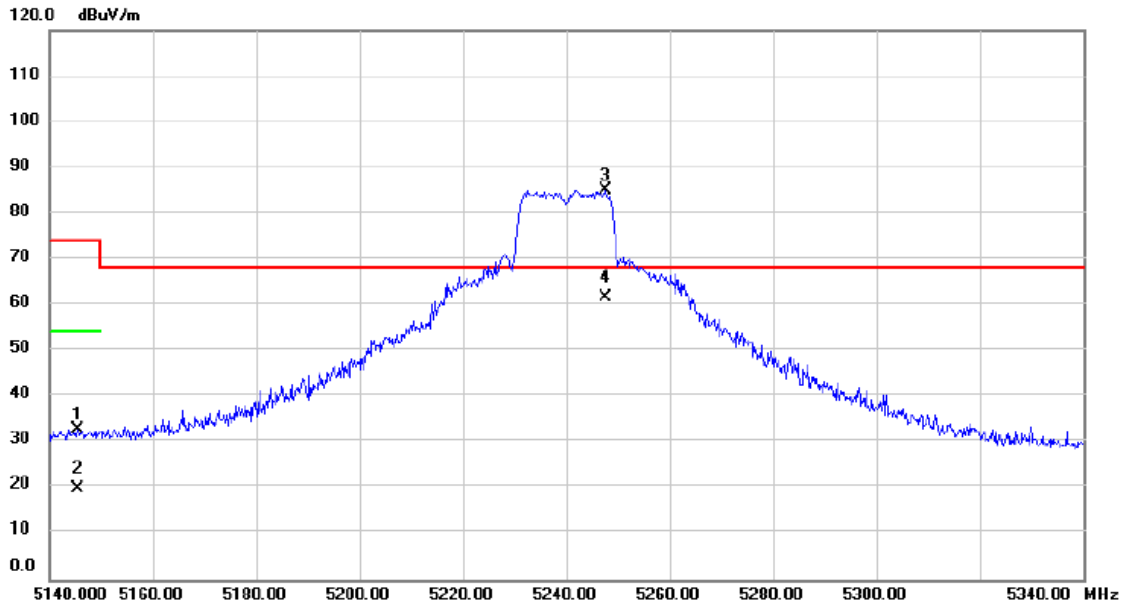


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5145.400	40.85	-8.06	32.79	74.00	-41.21			peak
2		5145.400	27.88	-8.06	19.82	54.00	-34.18			AVG
3	*	5247.600	93.15	-8.03	85.12	68.20	16.92			No Limit
4		5247.600	69.79	-8.03	61.76	68.20	-6.44			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5260MHz	Polarization	Vertical

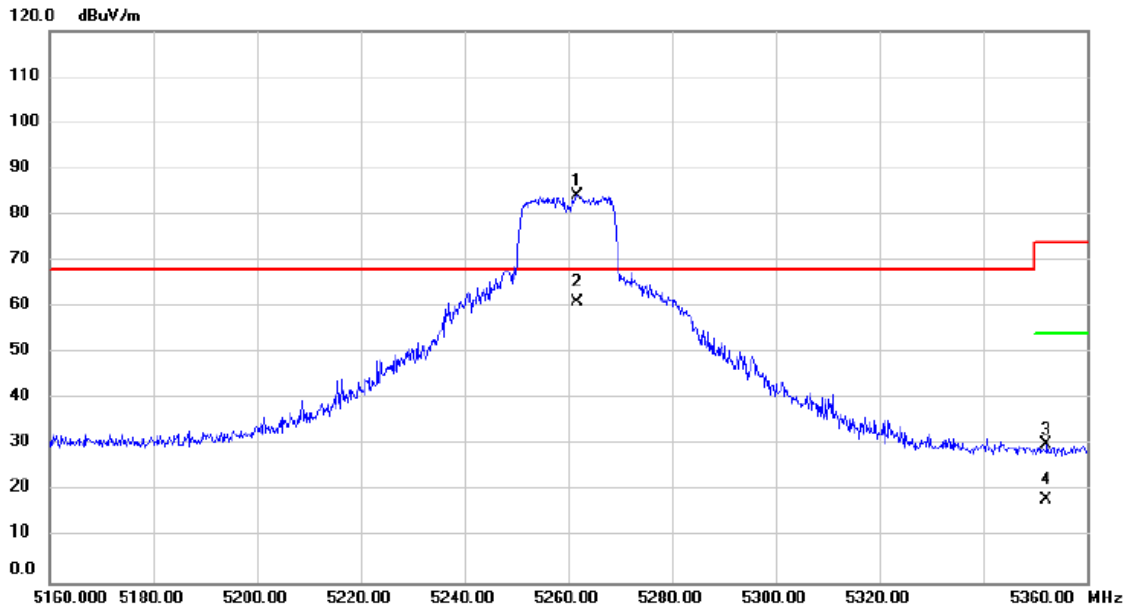


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	*	5261.800	92.32	-8.02	84.30	68.20	16.10	peak		No Limit
2		5261.800	69.19	-8.02	61.17	68.20	-7.03	AVG		No Limit
3		5352.200	38.10	-7.99	30.11	74.00	-43.89	peak		
4		5352.200	26.02	-7.99	18.03	54.00	-35.97	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5320MHz	Polarization	Vertical

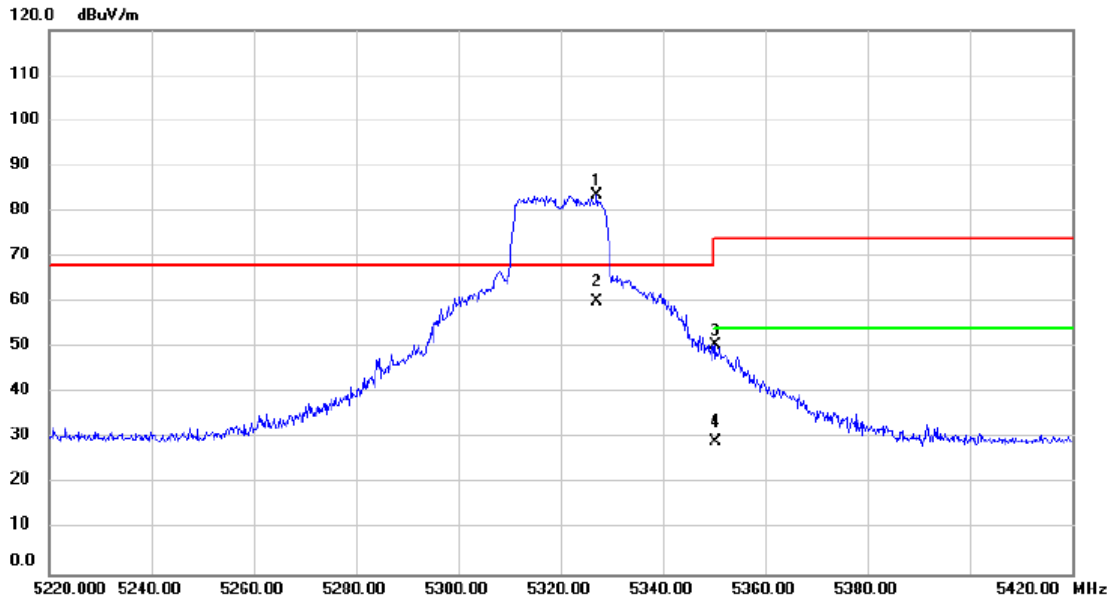


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5327.200	91.54	-8.00	83.54	68.20	15.34	peak		No Limit
2		5327.200	68.12	-8.00	60.12	68.20	-8.08	AVG		No Limit
3		5350.400	58.51	-7.99	50.52	74.00	-23.48	peak		
4		5350.400	37.30	-7.99	29.31	54.00	-24.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5500MHz	Polarization	Vertical

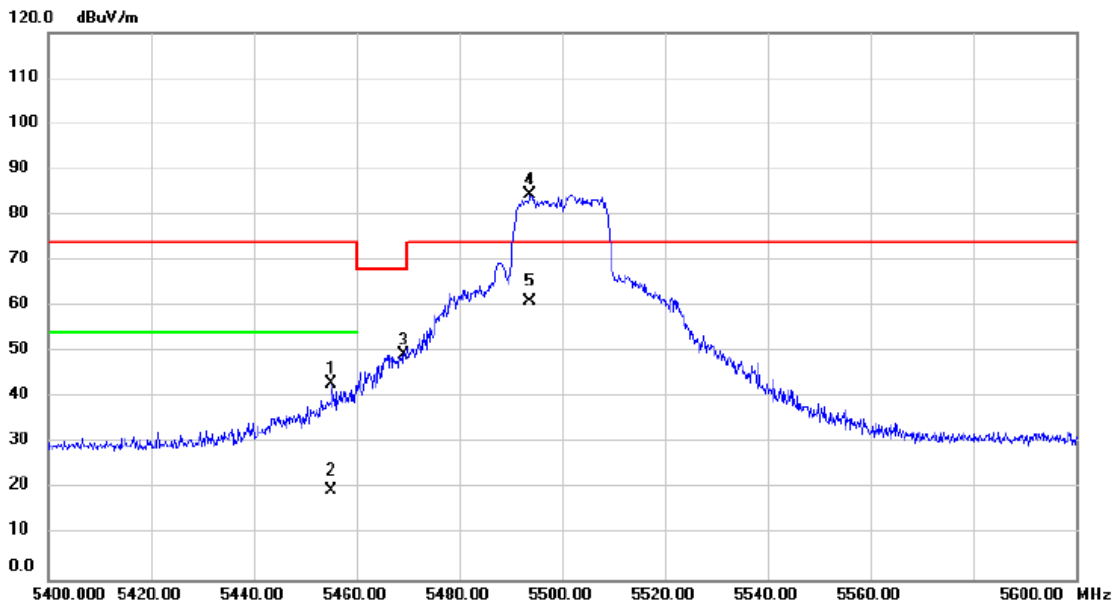


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5455.200	50.90	-7.95	42.95	74.00	-31.05			peak
2		5455.200	27.61	-7.95	19.66	54.00	-34.34			AVG
3		5469.200	57.37	-7.95	49.42	68.20	-18.78			peak
4	*	5493.800	92.42	-7.93	84.49	74.00	10.49			No Limit
5		5493.800	68.93	-7.93	61.00	74.00	-13.00			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5700MHz	Polarization	Vertical

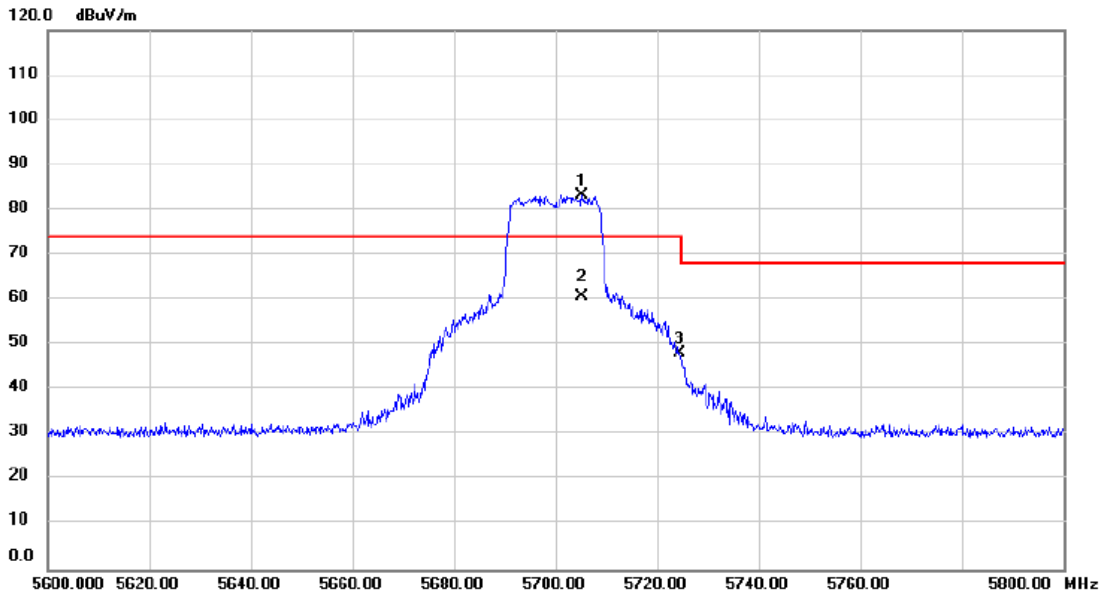


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	5705.200	90.75	-7.61	83.14	74.00	9.14	peak			No Limit
2	5705.200	68.24	-7.61	60.63	74.00	-13.37	AVG			No Limit
3	5724.400	55.87	-7.58	48.29	74.00	-25.71	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5745MHz	Polarization	Vertical

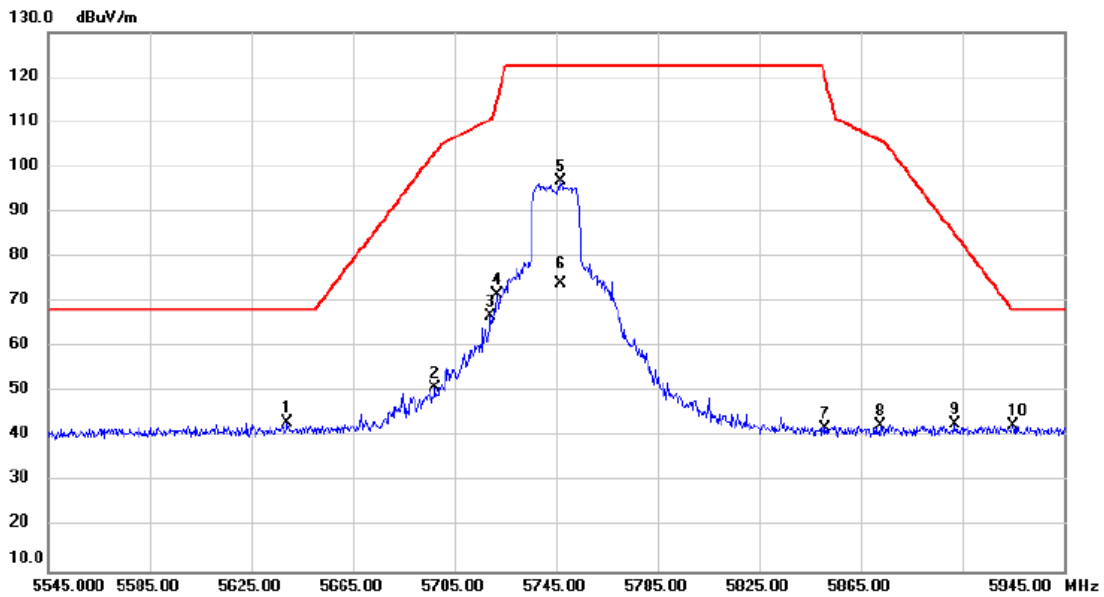


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	5639.400	40.90	2.29	43.19	68.20	-25.01	peak			
2		5697.400	48.71	2.38	51.09	103.28	-52.19	peak			
3		5719.400	64.53	2.41	66.94	110.63	-43.69	peak			
4		5721.800	69.12	2.42	71.54	114.91	-43.37	peak			
5		5746.600	94.25	2.46	96.71	122.20	-25.49	peak			No Limit
6		5746.600	71.48	2.46	73.94	122.20	-48.26	AVG			No Limit
7		5850.600	39.41	2.62	42.03	120.83	-78.80	peak			
8		5872.600	39.97	2.65	42.62	105.87	-63.25	peak			
9		5901.800	40.05	2.69	42.74	85.33	-42.59	peak			
10		5925.000	39.78	2.73	42.51	68.20	-25.69	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/4/25
Test Frequency	5825MHz	Polarization	Vertical

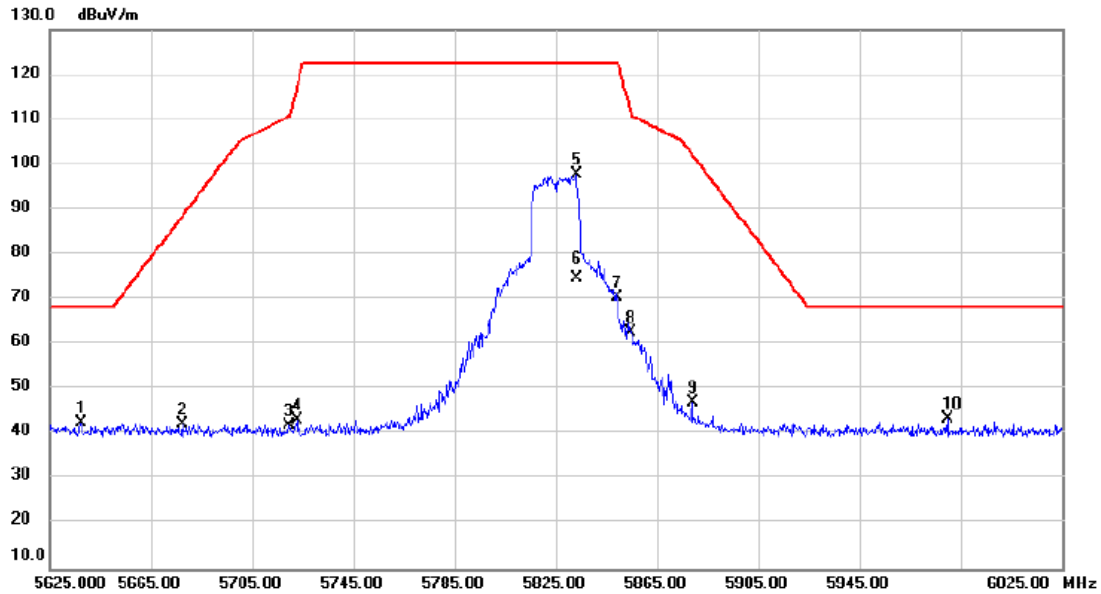


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5637.400	40.23	2.28	42.51	68.20	-25.69	peak			
2	5677.400	40.03	2.34	42.37	88.52	-46.15	peak			
3	5719.800	39.66	2.41	42.07	110.74	-68.67	peak			
4	5722.600	40.67	2.42	43.09	116.73	-73.64	peak			
5 *	5833.000	95.07	2.59	97.66	122.20	-24.54	peak			No Limit
6	5833.000	72.09	2.59	74.68	122.20	-47.52	AVG			No Limit
7	5849.400	67.97	2.62	70.59	122.20	-51.61	peak			
8	5854.600	60.16	2.63	62.79	111.71	-48.92	peak			
9	5879.000	44.41	2.66	47.07	102.23	-55.16	peak			
10	5979.800	40.69	2.83	43.52	68.20	-24.68	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5190MHz	Polarization	Vertical

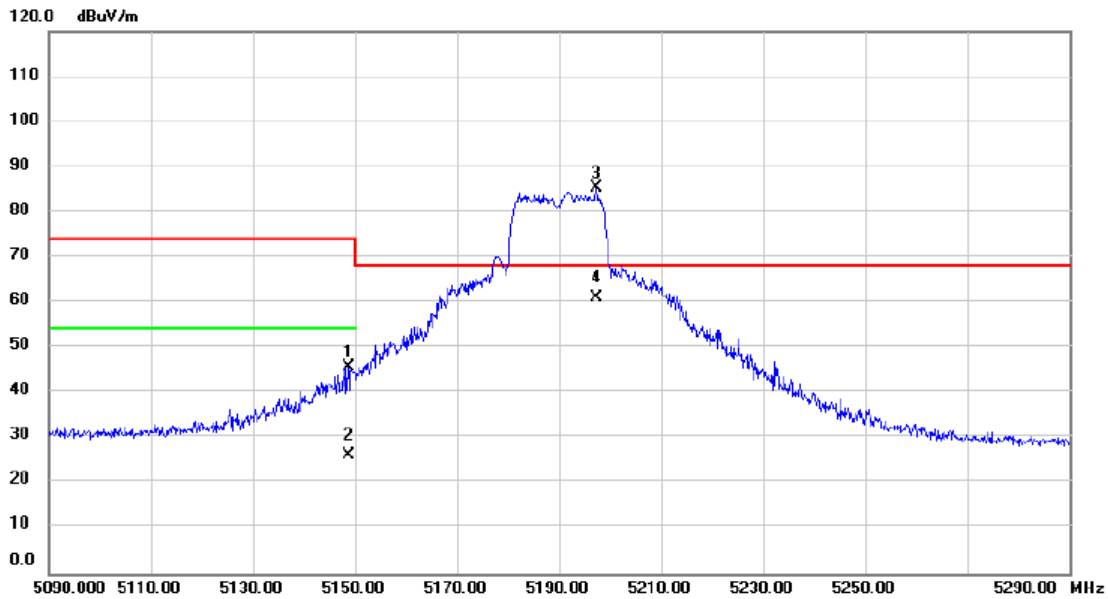


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5148.800	53.95	-8.07	45.88	74.00	-28.12	peak			
2		5148.800	34.25	-8.07	26.18	54.00	-27.82	AVG			
3	*	5197.400	93.38	-8.05	85.33	68.20	17.13	peak			No Limit
4		5197.400	69.20	-8.05	61.15	68.20	-7.05	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5230MHz	Polarization	Vertical

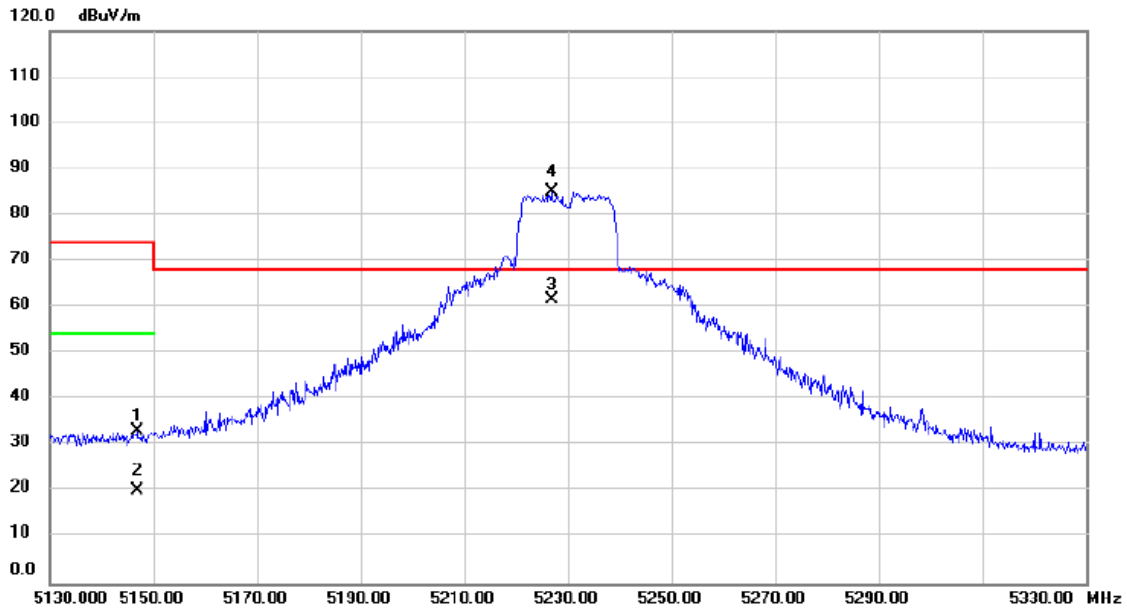


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.800	41.23	-8.07	33.16	74.00	-40.84			peak
2		5146.800	28.26	-8.07	20.19	54.00	-33.81			AVG
3		5226.800	69.76	-8.03	61.73	68.20	-6.47			peak
4	*	5226.800	93.09	-8.03	85.06	68.20	16.86			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5270MHz	Polarization	Vertical

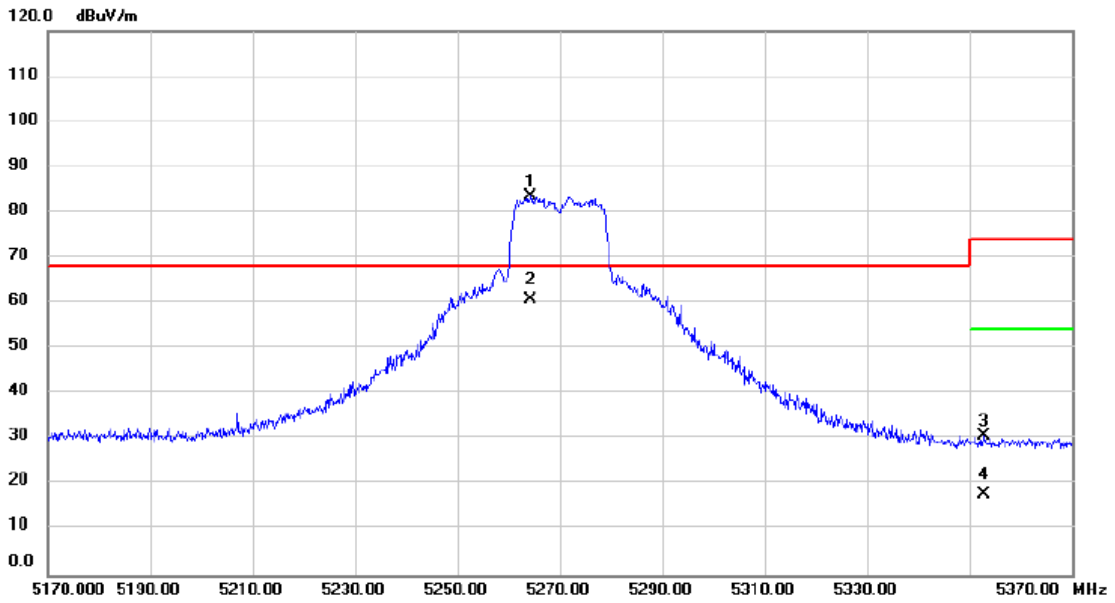


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	5264.400	91.44	-8.02	83.42	68.20	15.22	peak			No Limit
2	5264.400	68.65	-8.02	60.63	68.20	-7.57	AVG			No Limit
3	5352.800	38.80	-7.99	30.81	74.00	-43.19	peak			
4	5352.800	25.84	-7.99	17.85	54.00	-36.15	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5310MHz	Polarization	Vertical

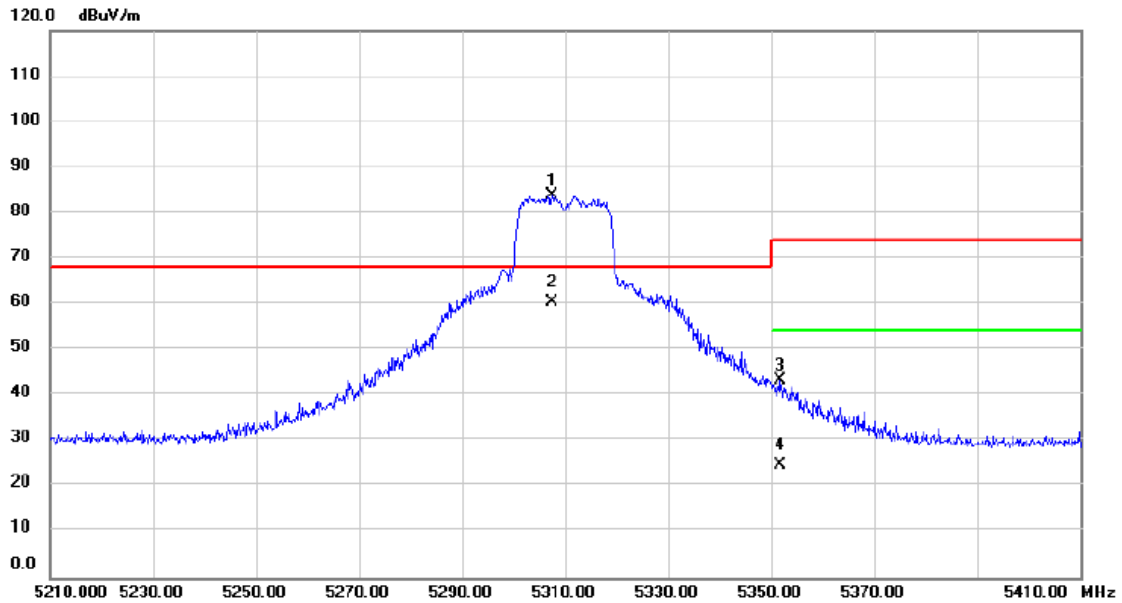


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5307.400	91.92	-8.01	83.91	68.20	15.71	peak		No Limit
2		5307.400	68.53	-8.01	60.52	68.20	-7.68	AVG		No Limit
3		5351.800	51.30	-7.99	43.31	74.00	-30.69	peak		
4		5351.800	32.72	-7.99	24.73	54.00	-29.27	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5510MHz	Polarization	Vertical

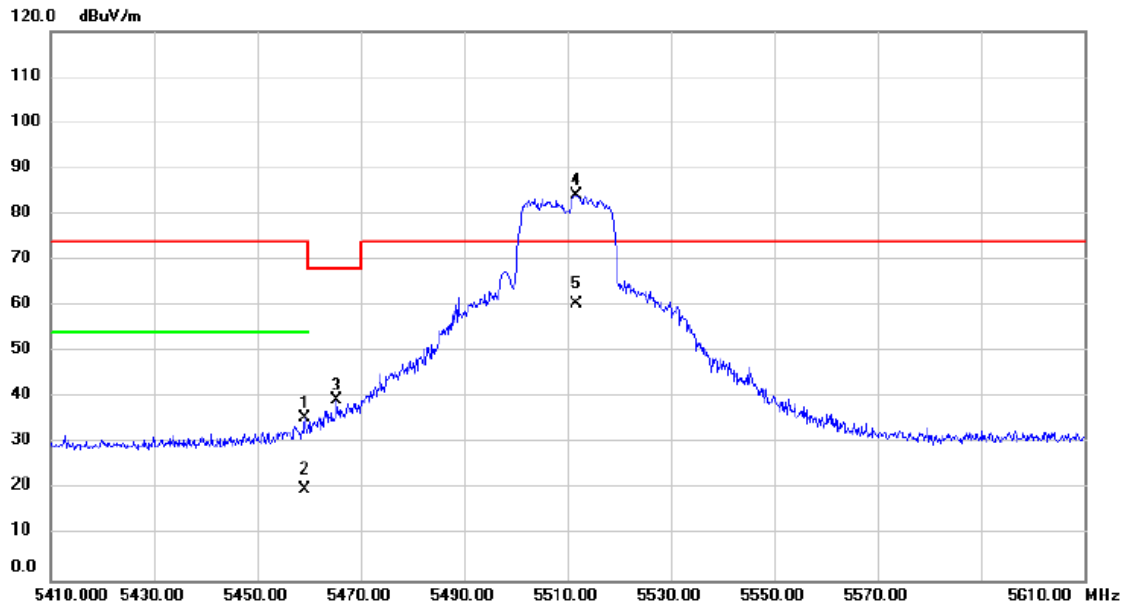


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5459.200	43.59	-7.94	35.65	74.00	-38.35	peak			
2		5459.200	27.81	-7.94	19.87	54.00	-34.13	AVG			
3		5465.400	47.44	-7.95	39.49	68.20	-28.71	peak			
4	*	5511.800	92.12	-7.91	84.21	74.00	10.21	peak			No Limit
5		5511.800	68.32	-7.91	60.41	74.00	-13.59	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5670MHz	Polarization	Vertical

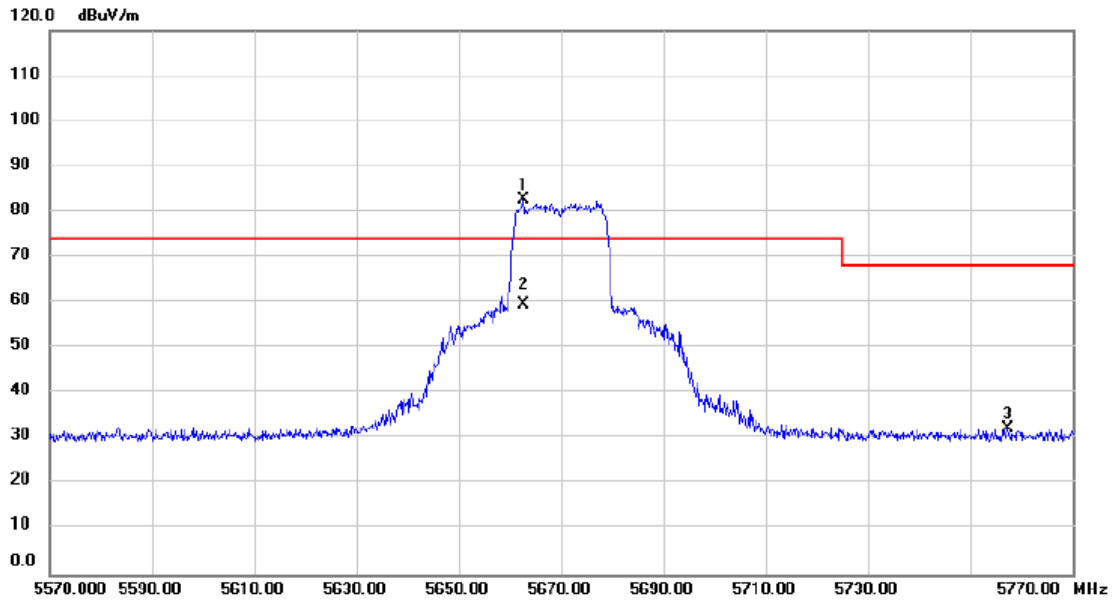


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5662.600	90.30	-7.67	82.63	74.00	8.63	peak		No Limit
2		5662.600	67.23	-7.67	59.56	74.00	-14.44	AVG		No Limit
3		5757.400	39.65	-7.52	32.13	68.20	-36.07	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5755MHz	Polarization	Vertical

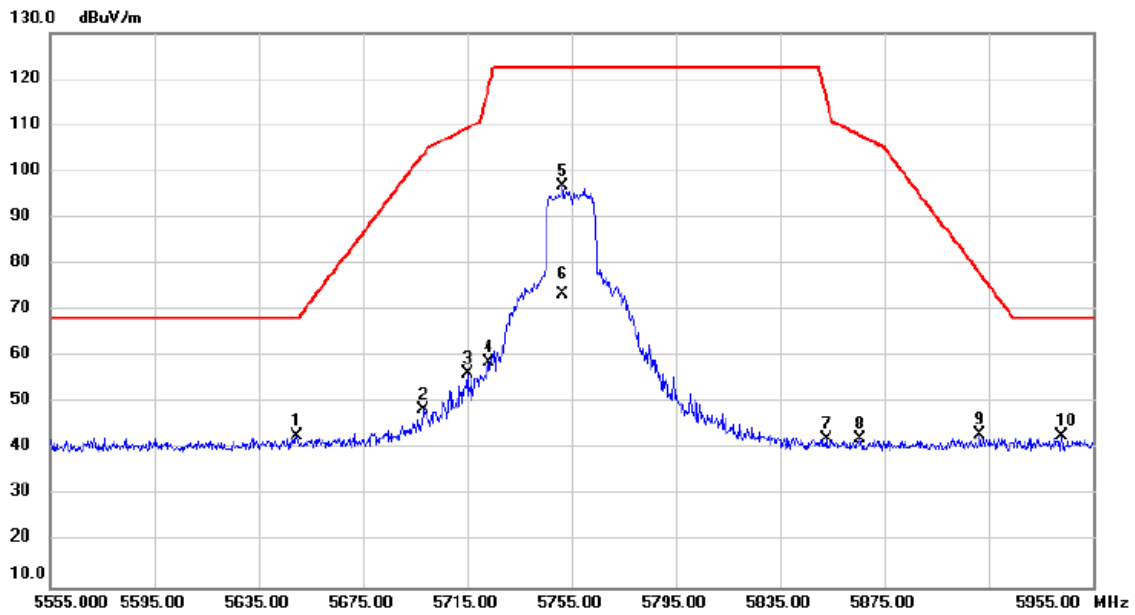


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5649.800	40.42	2.30	42.72	68.20	-25.48	peak			
2		5698.200	46.26	2.38	48.64	103.87	-55.23	peak			
3		5715.000	53.90	2.41	56.31	109.40	-53.09	peak			
4		5723.000	56.37	2.42	58.79	117.64	-58.85	peak			
5		5751.400	94.25	2.46	96.71	122.20	-25.49	peak			No Limit
6		5751.400	71.06	2.46	73.52	122.20	-48.68	AVG			No Limit
7		5852.600	39.58	2.62	42.20	116.27	-74.07	peak			
8		5865.800	39.63	2.64	42.27	107.77	-65.50	peak			
9		5911.400	40.42	2.71	43.13	78.23	-35.10	peak			
10	*	5943.000	40.15	2.76	42.91	68.20	-25.29	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/4/25
Test Frequency	5795MHz	Polarization	Vertical

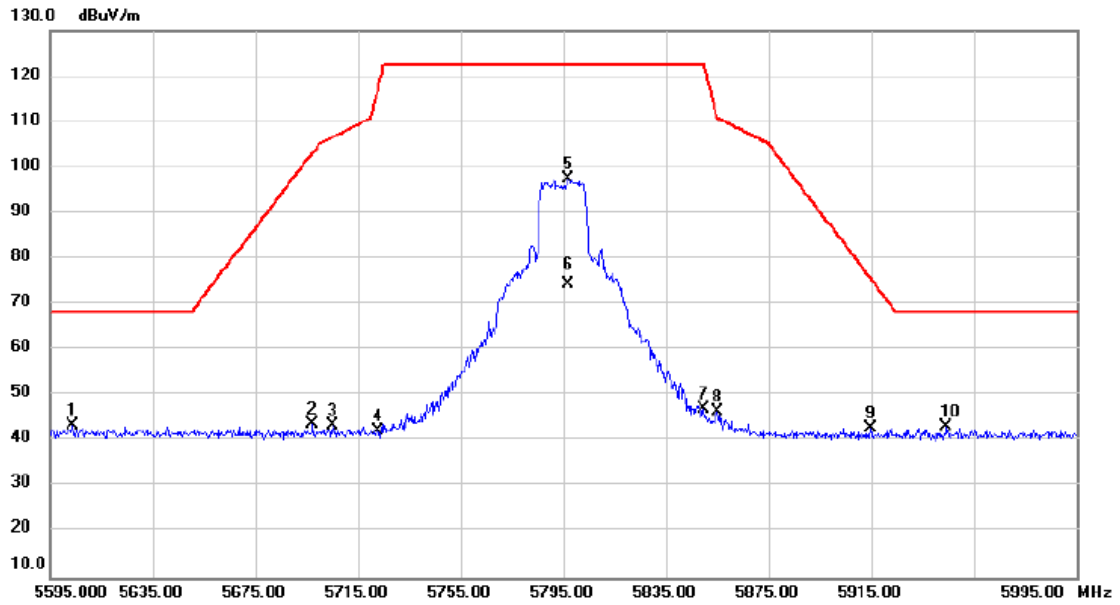


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5603.800	41.08	2.23	43.31	68.20	-24.89	peak			
2		5697.400	41.29	2.38	43.67	103.28	-59.61	peak			
3		5705.000	40.99	2.39	43.38	106.60	-63.22	peak			
4		5722.600	39.96	2.42	42.38	116.73	-74.35	peak			
5	*	5796.600	94.85	2.54	97.39	122.20	-24.81	peak			No Limit
6		5796.600	71.78	2.54	74.32	122.20	-47.88	AVG			No Limit
7		5849.800	44.52	2.62	47.14	122.20	-75.06	peak			
8		5855.000	43.81	2.63	46.44	110.80	-64.36	peak			
9		5914.600	40.04	2.72	42.76	75.87	-33.11	peak			
10		5944.200	40.39	2.76	43.15	68.20	-25.05	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/4/25
Test Frequency	5210MHz	Polarization	Vertical

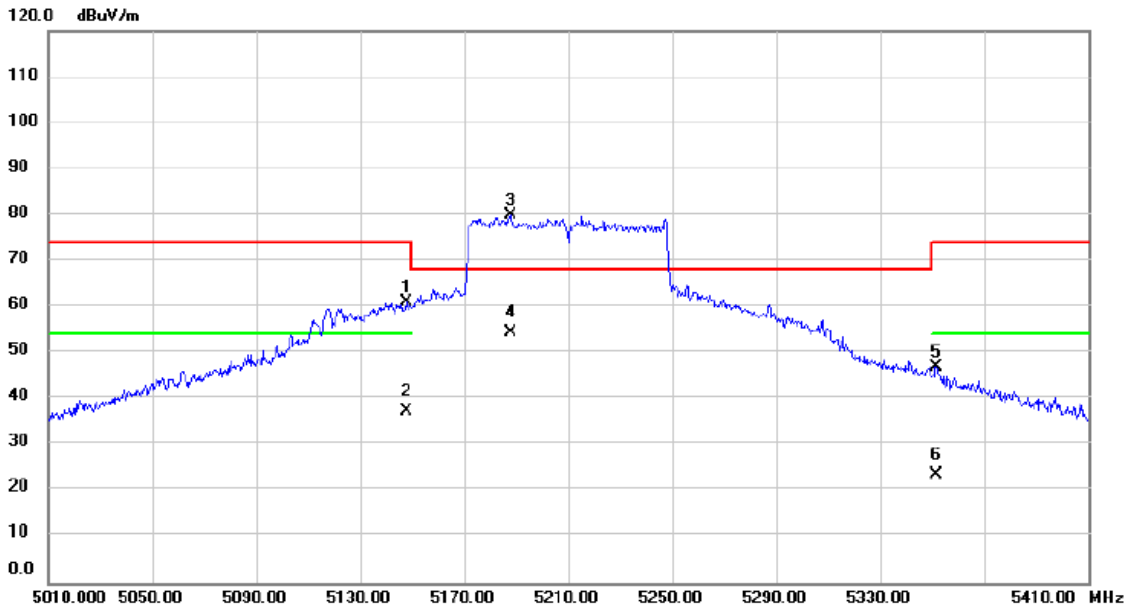


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5147.600	69.02	-8.07	60.95	74.00	-13.05			peak
2		5147.600	45.49	-8.07	37.42	54.00	-16.58			AVG
3	*	5187.600	87.99	-8.06	79.93	68.20	11.73			peak No Limit
4		5187.600	62.61	-8.06	54.55	68.20	-13.65			AVG No Limit
5		5351.600	55.06	-7.99	47.07	74.00	-26.93			peak
6		5351.600	31.60	-7.99	23.61	54.00	-30.39			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/4/25
Test Frequency	5290MHz	Polarization	Vertical

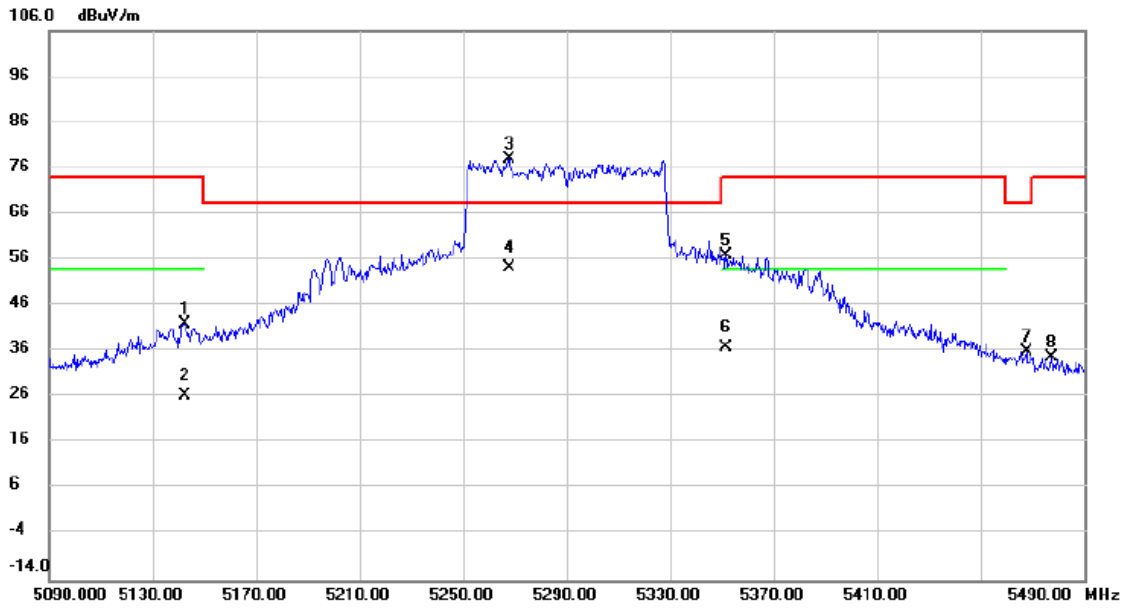


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5142.400	50.15	-8.07	42.08	74.00	-31.92			peak
2		5142.400	34.47	-8.07	26.40	54.00	-27.60			AVG
3	*	5267.600	85.97	-8.02	77.95	68.20	9.75			No Limit
4		5267.600	62.39	-8.02	54.37	68.20	-13.83			AVG
5		5351.600	64.89	-7.99	56.90	74.00	-17.10			peak
6		5351.600	44.88	-7.99	36.89	54.00	-17.11			AVG
7		5467.600	43.93	-7.95	35.98	68.20	-32.22			peak
8		5477.600	42.78	-7.93	34.85	74.00	-39.15			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/4/25
Test Frequency	5530MHz	Polarization	Vertical

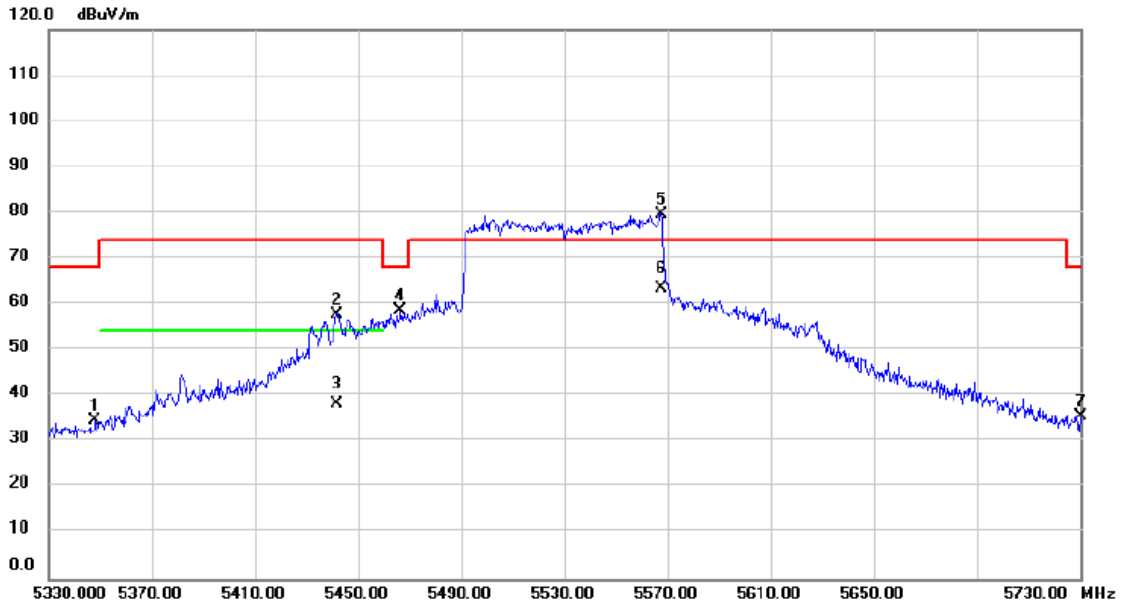


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5348.000	42.52	-7.99	34.53	68.20	-33.67	peak			
2		5441.600	65.61	-7.96	57.65	74.00	-16.35	peak			
3		5441.600	46.08	-7.96	38.12	54.00	-15.88	AVG			
4		5466.400	66.68	-7.95	58.73	68.20	-9.47	peak			
5	*	5567.600	87.54	-7.82	79.72	74.00	5.72	peak			No Limit
6		5567.600	71.38	-7.82	63.56	74.00	-10.44	AVG			No Limit
7		5730.000	43.22	-7.56	35.66	68.20	-32.54	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/4/25
Test Frequency	5610MHz	Polarization	Vertical

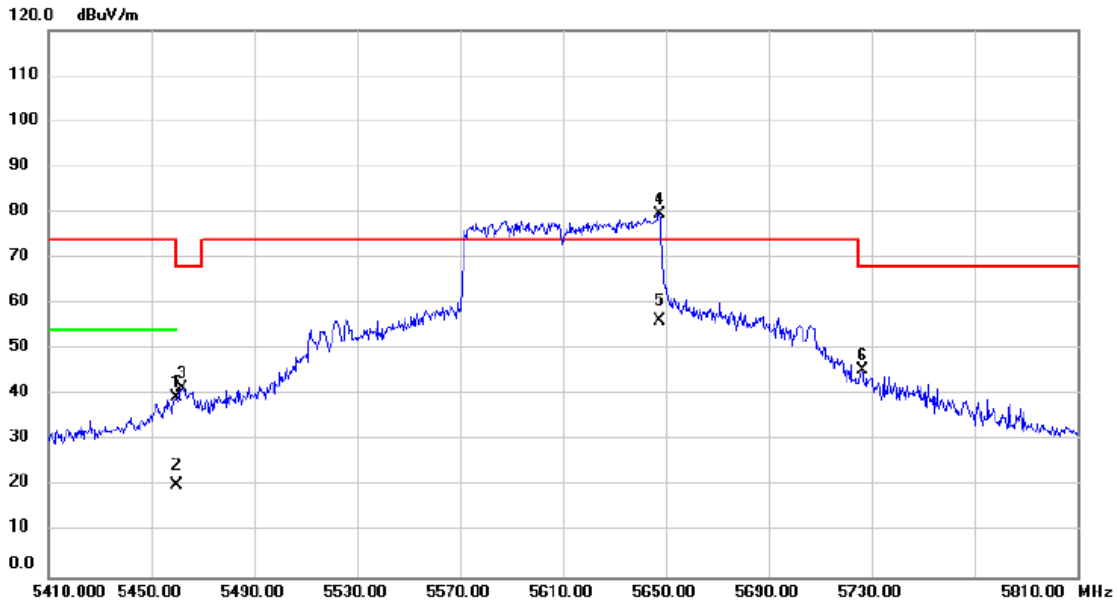


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5459.600	47.33	-7.94	39.39	74.00	-34.61			peak
2		5459.600	28.20	-7.94	20.26	54.00	-33.74			AVG
3		5462.000	49.43	-7.94	41.49	68.20	-26.71			peak
4	*	5647.600	87.43	-7.70	79.73	74.00	5.73			peak No Limit
5		5647.600	63.88	-7.70	56.18	74.00	-17.82			AVG No Limit
6		5726.400	52.98	-7.58	45.40	68.20	-22.80			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/4/25
Test Frequency	5775MHz	Polarization	Vertical

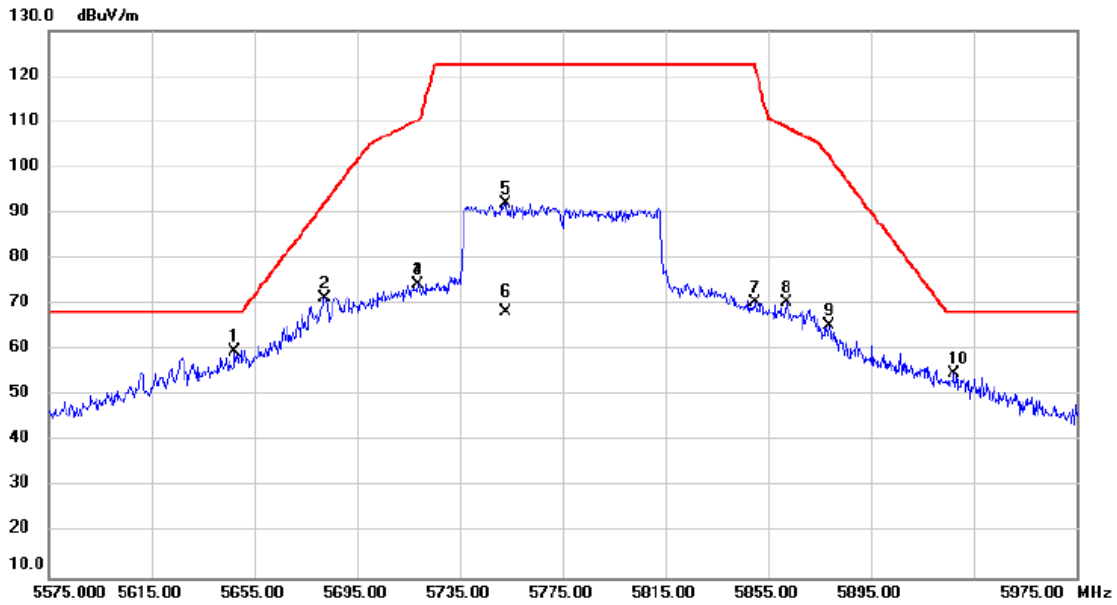


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5647.400	57.39	2.30	59.69	68.20	-8.51			peak
2		5682.600	69.03	2.35	71.38	92.36	-20.98			peak
3		5718.600	72.06	2.41	74.47	110.41	-35.94			peak
4		5718.600	72.06	2.41	74.47	110.41	-35.94			peak
5		5752.600	89.65	2.46	92.11	122.20	-30.09			No Limit
6		5752.600	66.03	2.46	68.49	122.20	-53.71			AVG No Limit
7		5850.200	67.73	2.62	70.35	121.74	-51.39			peak
8		5862.200	67.96	2.63	70.59	108.78	-38.19			peak
9		5878.600	62.61	2.66	65.27	102.53	-37.26			peak
10		5927.400	52.03	2.73	54.76	68.20	-13.44			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/2
Test Frequency	5250MHz	Polarization	Vertical

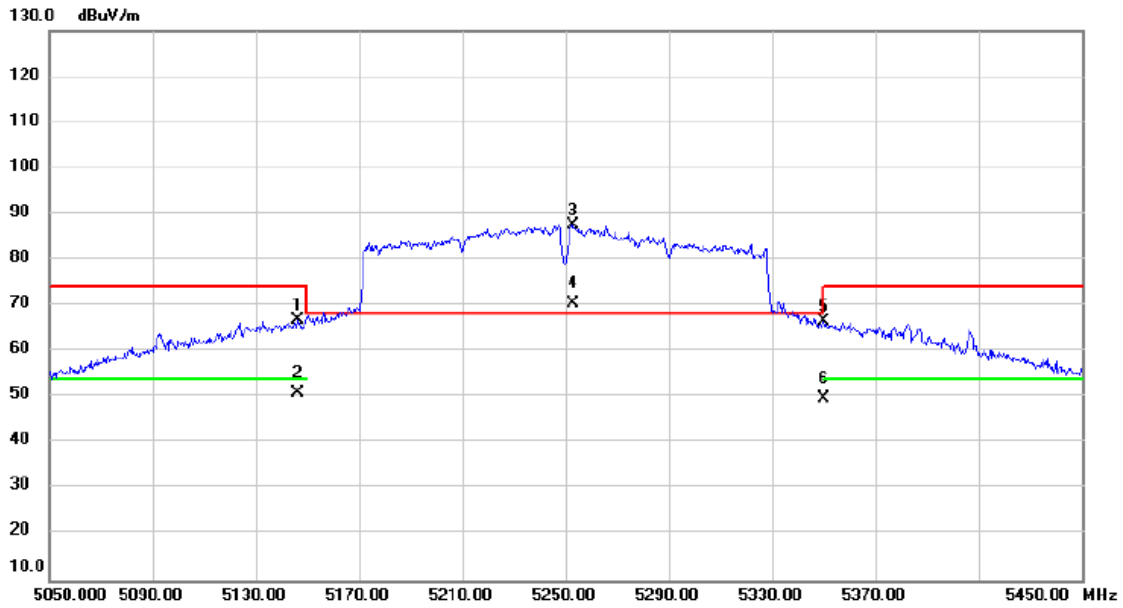


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.400	64.91	1.93	66.84	74.00	-7.16			peak
2		5146.400	49.05	1.93	50.98	54.00	-3.02			AVG
3	*	5252.800	85.64	1.97	87.61	68.20	19.41			No Limit
4	X	5252.800	68.38	1.97	70.35	68.20	2.15			No Limit
5		5350.000	64.42	2.01	66.43	74.00	-7.57			peak
6		5350.000	47.73	2.01	49.74	54.00	-4.26			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/2
Test Frequency	5570MHz	Polarization	Vertical

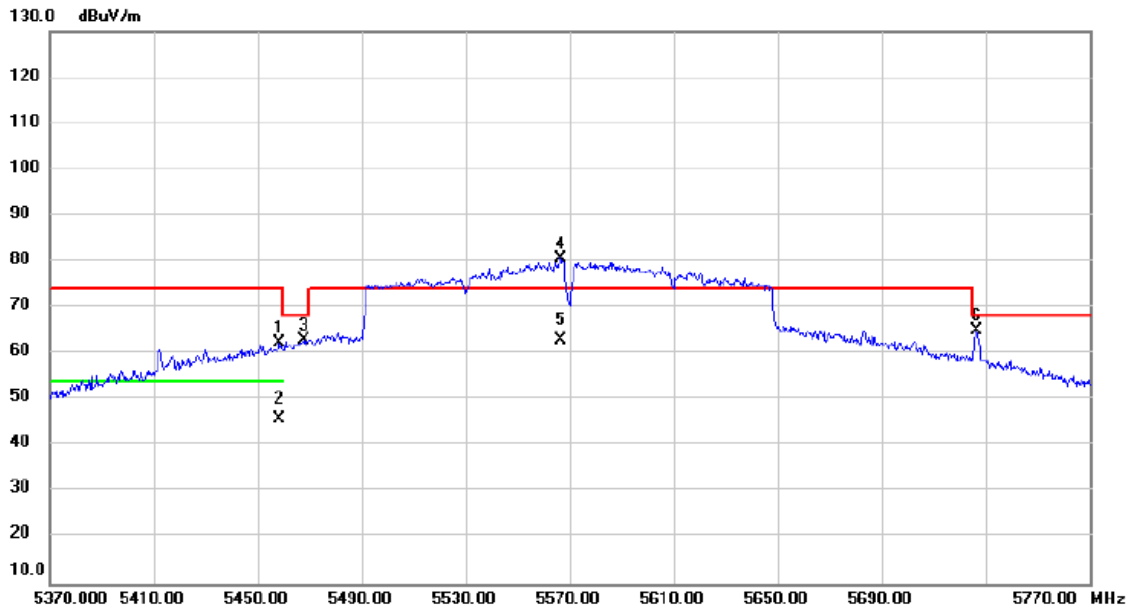


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5458.400	70.15	-7.94	62.21	74.00	-11.79			peak
2		5458.400	53.72	-7.94	45.78	54.00	-8.22			AVG
3		5468.000	71.02	-7.95	63.07	68.20	-5.13			peak
4	*	5566.400	88.61	-7.82	80.79	74.00	6.79			No Limit
5		5566.400	70.86	-7.82	63.04	74.00	-10.96			No Limit
6		5726.400	72.50	-7.58	64.92	68.20	-3.28			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5180MHz	Polarization	Vertical

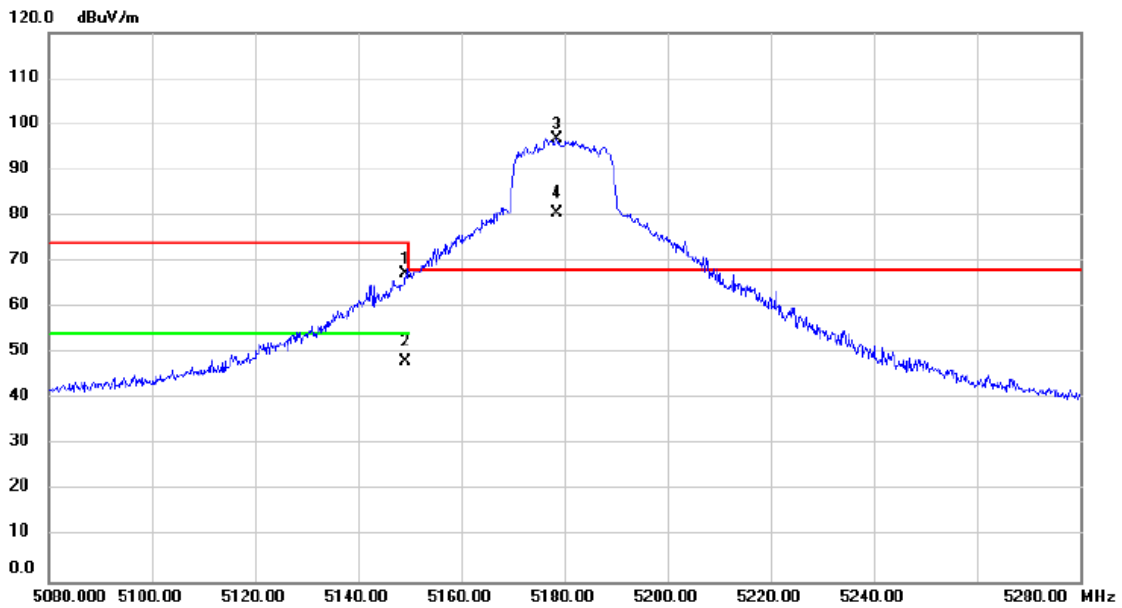


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5149.200	65.27	1.93	67.20	74.00	-6.80	peak		
2		5149.200	46.18	1.93	48.11	54.00	-5.89	AVG		
3	*	5178.600	94.78	1.94	96.72	68.20	28.52	peak		No Limit
4	X	5178.600	78.55	1.94	80.49	68.20	12.29	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5240MHz	Polarization	Vertical

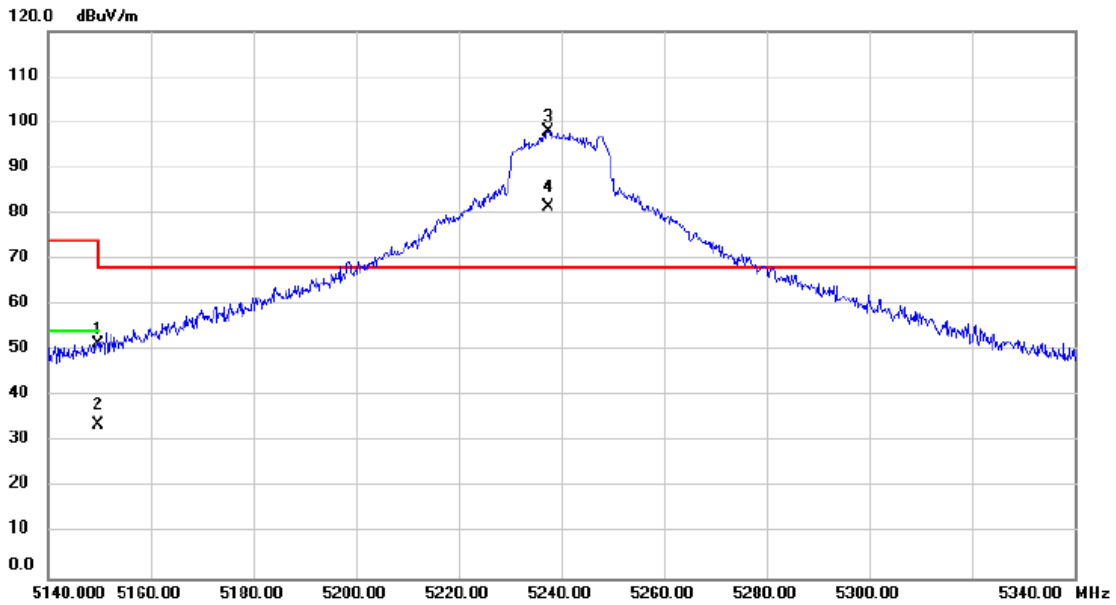


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.600	49.63	1.93	51.56	74.00	-22.44			peak
2		5149.600	31.77	1.93	33.70	54.00	-20.30			AVG
3	*	5237.400	96.07	1.96	98.03	68.20	29.83			No Limit
4	X	5237.400	79.40	1.96	81.36	68.20	13.16			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5260MHz	Polarization	Vertical

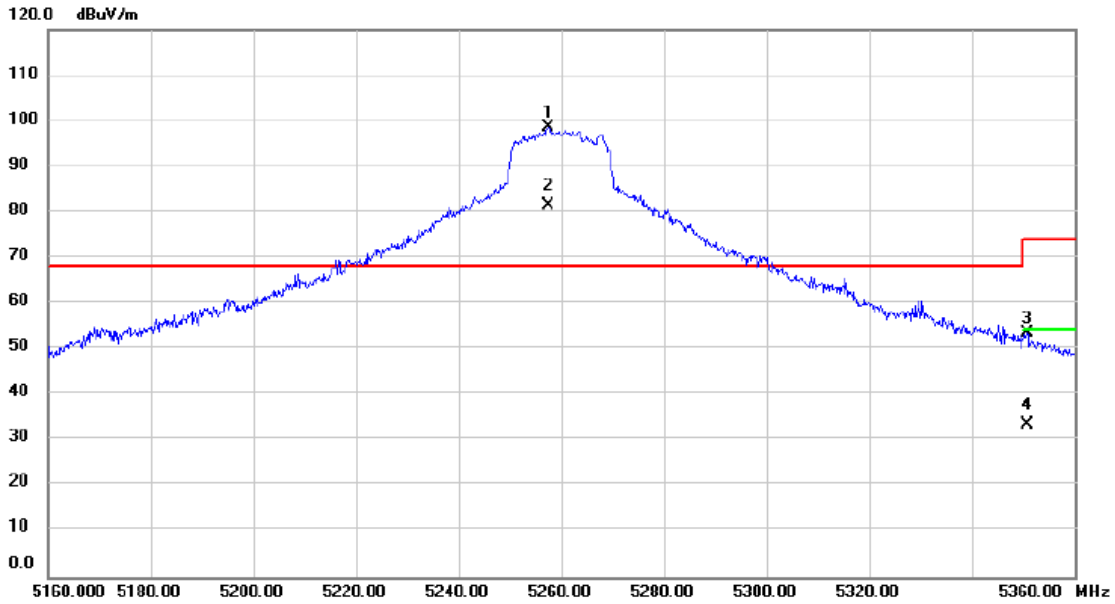


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5257.400	96.46	1.96	98.42	68.20	30.22	peak		No Limit
2	X	5257.400	79.62	1.96	81.58	68.20	13.38	AVG		No Limit
3		5350.800	51.41	2.01	53.42	74.00	-20.58	peak		
4		5350.800	31.48	2.01	33.49	54.00	-20.51	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5320MHz	Polarization	Vertical

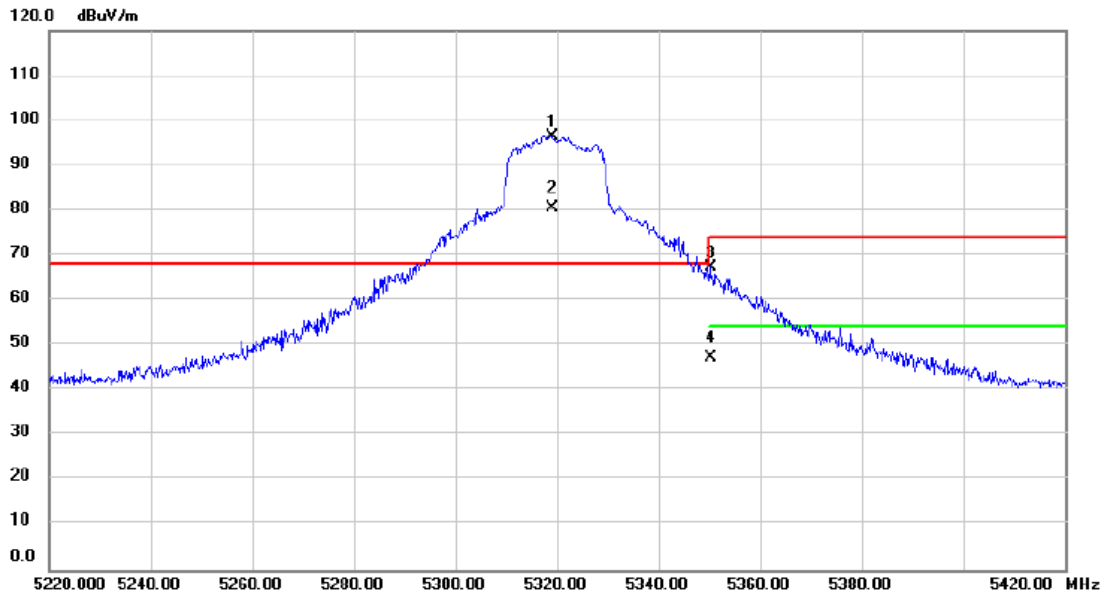


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5319.000	94.42	2.00	96.42	68.20	28.22	peak		No Limit
2	X	5319.000	78.42	2.00	80.42	68.20	12.22	AVG		No Limit
3		5350.200	65.25	2.01	67.26	74.00	-6.74	peak		
4		5350.200	45.30	2.01	47.31	54.00	-6.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5500MHz	Polarization	Vertical

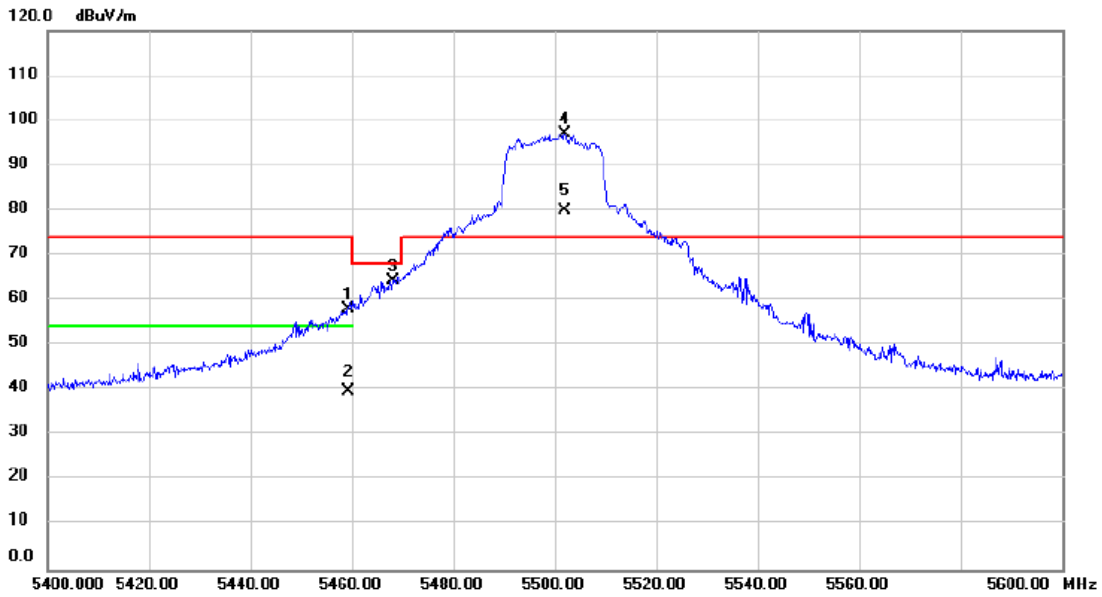


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5459.400	56.12	2.06	58.18	74.00	-15.82			peak
2		5459.400	37.78	2.06	39.84	54.00	-14.16			AVG
3		5468.200	62.32	2.05	64.37	68.20	-3.83			peak
4	*	5502.000	94.85	2.07	96.92	74.00	22.92			No Limit
5	X	5502.000	77.99	2.07	80.06	74.00	6.06			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5700MHz	Polarization	Vertical

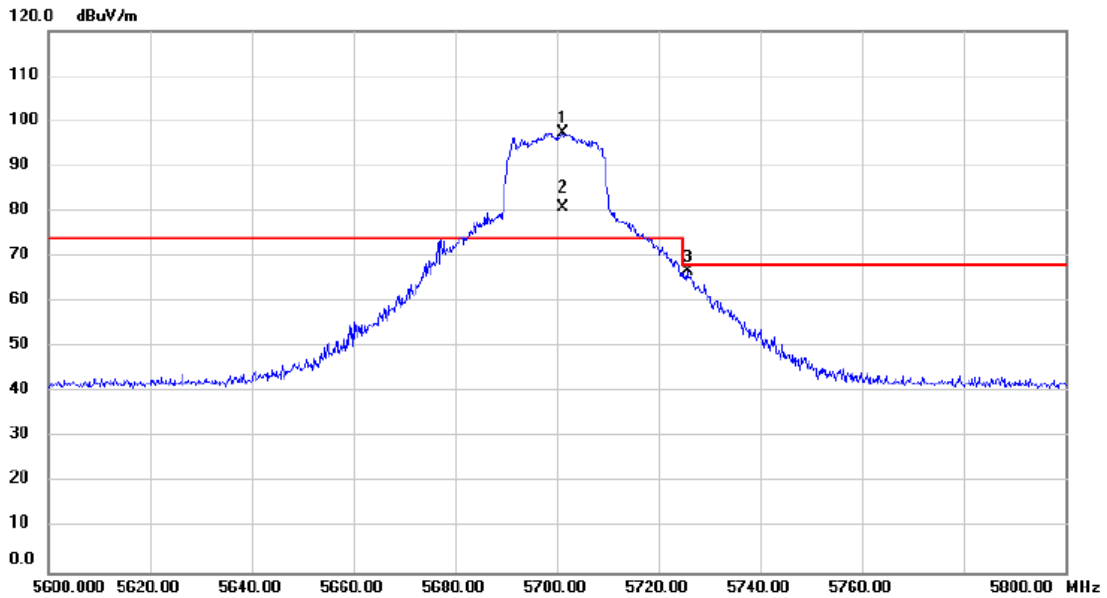


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5701.200	95.09	2.39	97.48	74.00	23.48	peak		No Limit
2	X	5701.200	78.38	2.39	80.77	74.00	6.77	AVG		No Limit
3		5725.600	64.37	2.42	66.79	68.20	-1.41	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5745MHz	Polarization	Vertical

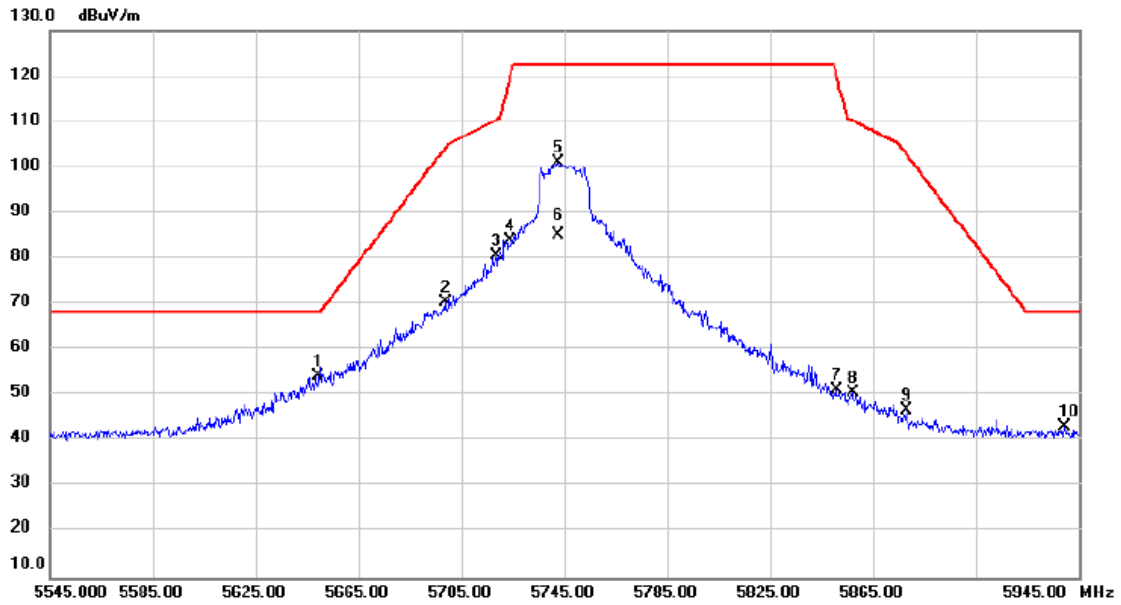


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5649.400	51.83	2.30	54.13	68.20	-14.07	peak			
2		5698.600	68.19	2.39	70.58	104.17	-33.59	peak			
3		5718.600	78.21	2.41	80.62	110.41	-29.79	peak			
4		5724.200	81.52	2.42	83.94	120.38	-36.44	peak			
5		5742.600	98.46	2.44	100.90	122.20	-21.30	peak			No Limit
6		5742.600	82.70	2.44	85.14	122.20	-37.06	AVG			No Limit
7		5850.600	48.54	2.62	51.16	120.83	-69.67	peak			
8		5857.000	47.88	2.63	50.51	110.24	-59.73	peak			
9		5877.800	44.03	2.66	46.69	103.12	-56.43	peak			
10		5939.400	40.39	2.76	43.15	68.20	-25.05	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/2
Test Frequency	5825MHz	Polarization	Vertical

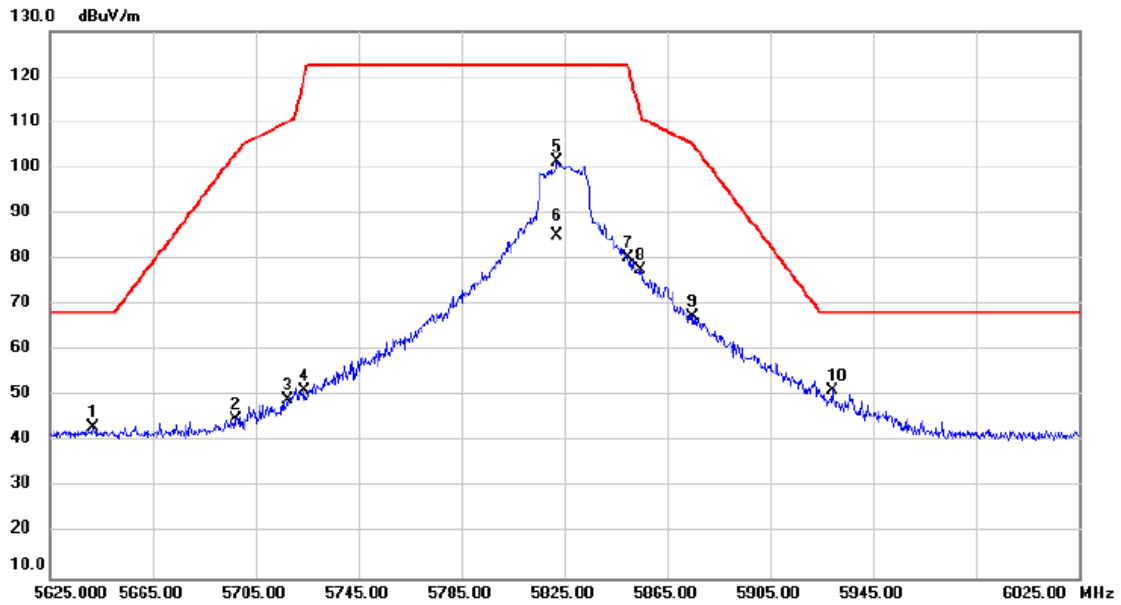


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5641.800	40.74	2.29	43.03	68.20	-25.17	peak			
2		5697.000	42.64	2.38	45.02	102.99	-57.97	peak			
3		5717.400	46.84	2.41	49.25	110.07	-60.82	peak			
4		5724.200	48.93	2.42	51.35	120.38	-69.03	peak			
5		5822.200	98.75	2.58	101.33	122.20	-20.87	peak			No Limit
6		5822.200	82.66	2.58	85.24	122.20	-36.96	AVG			No Limit
7		5849.800	77.65	2.62	80.27	122.20	-41.93	peak			
8		5854.600	75.07	2.63	77.70	111.71	-34.01	peak			
9		5875.000	64.89	2.66	67.55	105.20	-37.65	peak			
10	*	5929.000	48.67	2.73	51.40	68.20	-16.80	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5190MHz	Polarization	Vertical

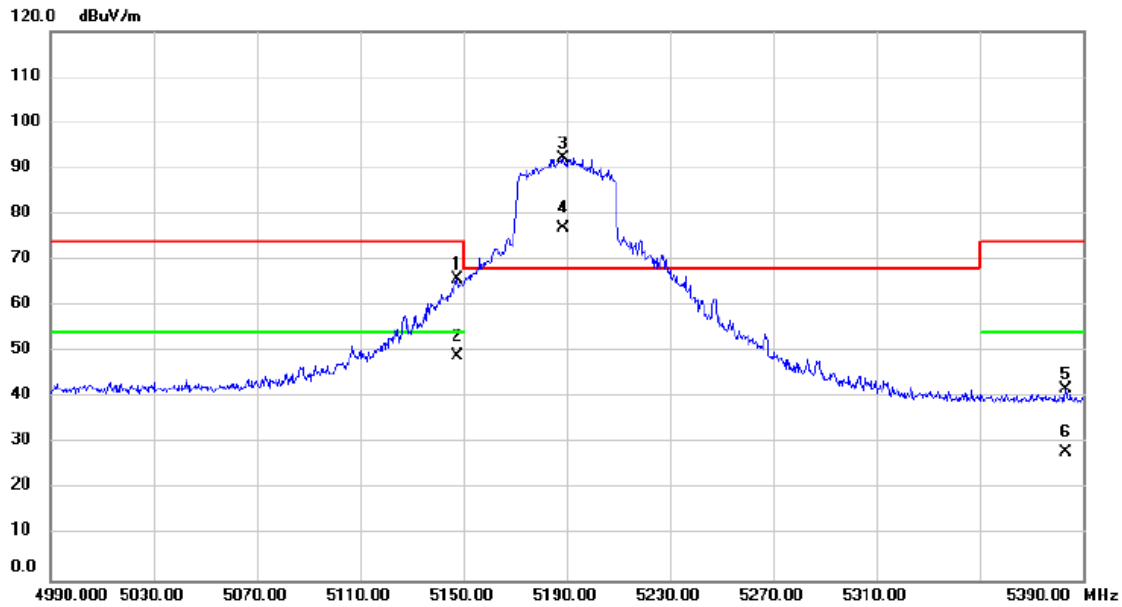


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5147.600	64.04	1.93	65.97	74.00	-8.03	peak			
2		5147.600	47.12	1.93	49.05	54.00	-4.95	AVG			
3	*	5188.800	90.30	1.94	92.24	68.20	24.04	peak			No Limit
4	X	5188.800	74.96	1.94	76.90	68.20	8.70	AVG			No Limit
5		5383.200	39.74	2.02	41.76	74.00	-32.24	peak			
6		5383.200	26.14	2.02	28.16	54.00	-25.84	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5230MHz	Polarization	Vertical

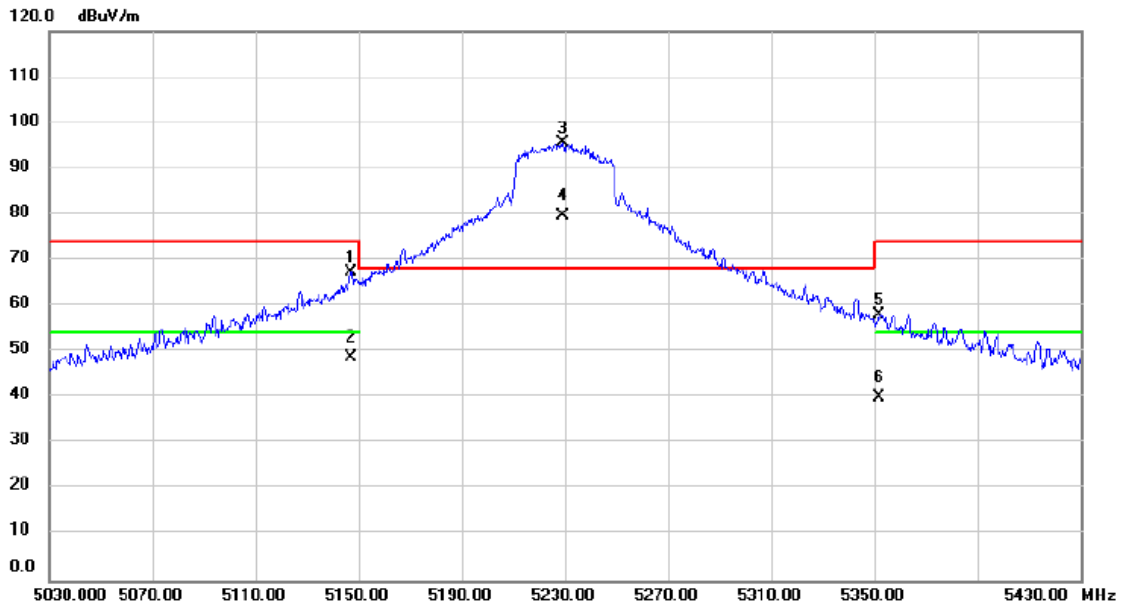


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5147.200	65.50	1.93	67.43	74.00	-6.57	peak			
2		5147.200	46.80	1.93	48.73	54.00	-5.27	AVG			
3	*	5229.200	93.67	1.96	95.63	68.20	27.43	peak			No Limit
4	X	5229.200	77.69	1.96	79.65	68.20	11.45	AVG			No Limit
5		5352.000	56.14	2.01	58.15	74.00	-15.85	peak			
6		5352.000	38.11	2.01	40.12	54.00	-13.88	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5270MHz	Polarization	Vertical

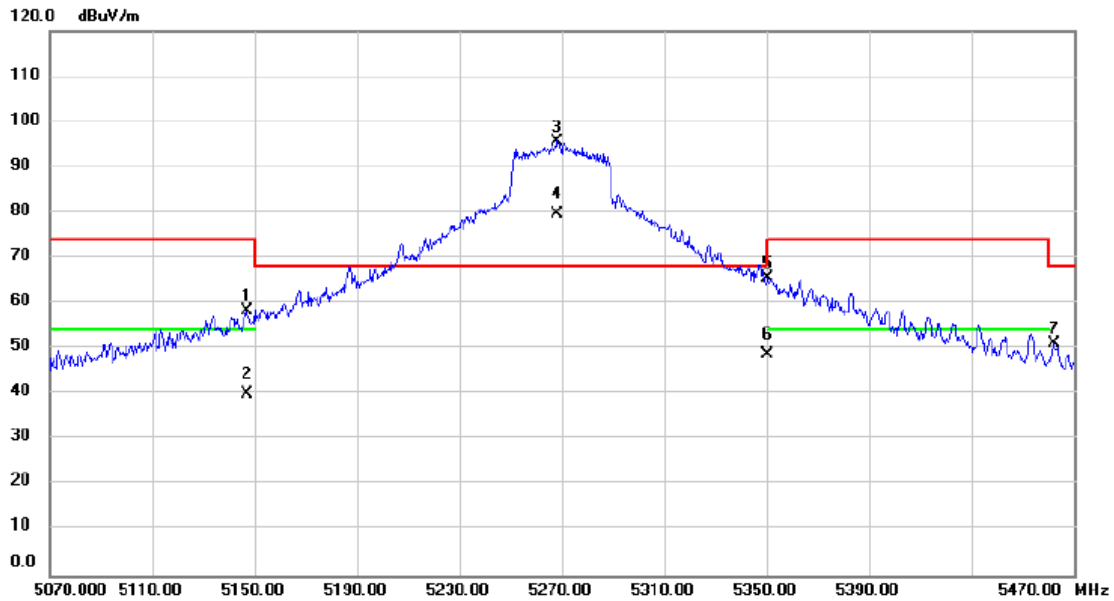


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5146.800	56.34	1.93	58.27	74.00	-15.73	peak			
2	5146.800	38.20	1.93	40.13	54.00	-13.87	AVG			
3 *	5268.400	93.72	1.98	95.70	68.20	27.50	peak			No Limit
4 X	5268.400	77.53	1.98	79.51	68.20	11.31	AVG			No Limit
5	5350.400	63.66	2.01	65.67	74.00	-8.33	peak			
6	5350.400	46.83	2.01	48.84	54.00	-5.16	AVG			
7	5462.000	49.11	2.06	51.17	68.20	-17.03	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5310MHz	Polarization	Vertical

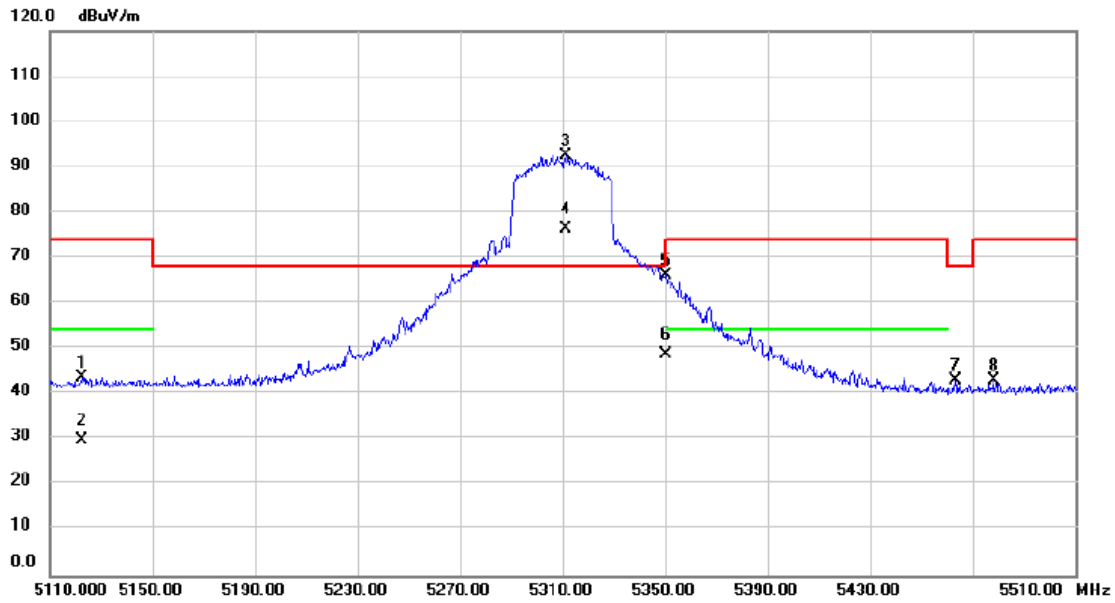


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5122.400	41.85	1.91	43.76	74.00	-30.24	peak			
2	5122.400	27.97	1.91	29.88	54.00	-24.12	AVG			
3 *	5311.200	90.68	2.00	92.68	68.20	24.48	peak			No Limit
4 X	5311.200	74.31	2.00	76.31	68.20	8.11	AVG			No Limit
5	5350.400	64.29	2.01	66.30	74.00	-7.70	peak			
6	5350.400	46.86	2.01	48.87	54.00	-5.13	AVG			
7	5463.200	40.89	2.06	42.95	68.20	-25.25	peak			
8	5478.000	40.87	2.07	42.94	74.00	-31.06	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5510MHz	Polarization	Vertical

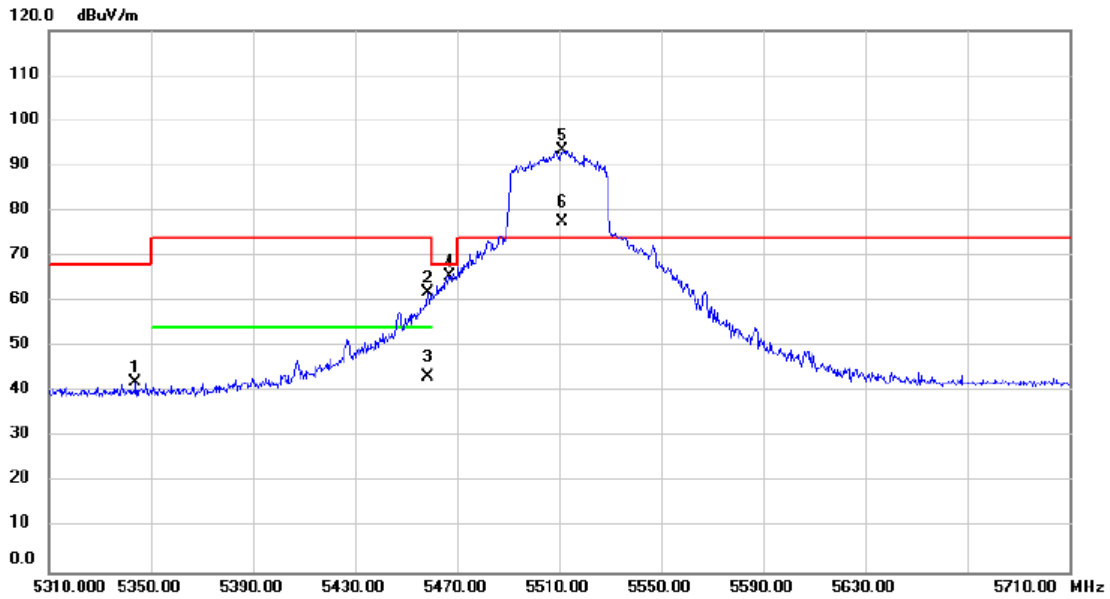


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5344.000	40.00	2.01	42.01	68.20	-26.19	peak			
2	5458.400	60.02	2.06	62.08	74.00	-11.92	peak			
3	5458.400	41.26	2.06	43.32	54.00	-10.68	AVG			
4	5467.200	63.58	2.05	65.63	68.20	-2.57	peak			
5 *	5511.200	91.28	2.09	93.37	74.00	19.37	peak			No Limit
6 X	5511.200	75.40	2.09	77.49	74.00	3.49	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5670MHz	Polarization	Vertical

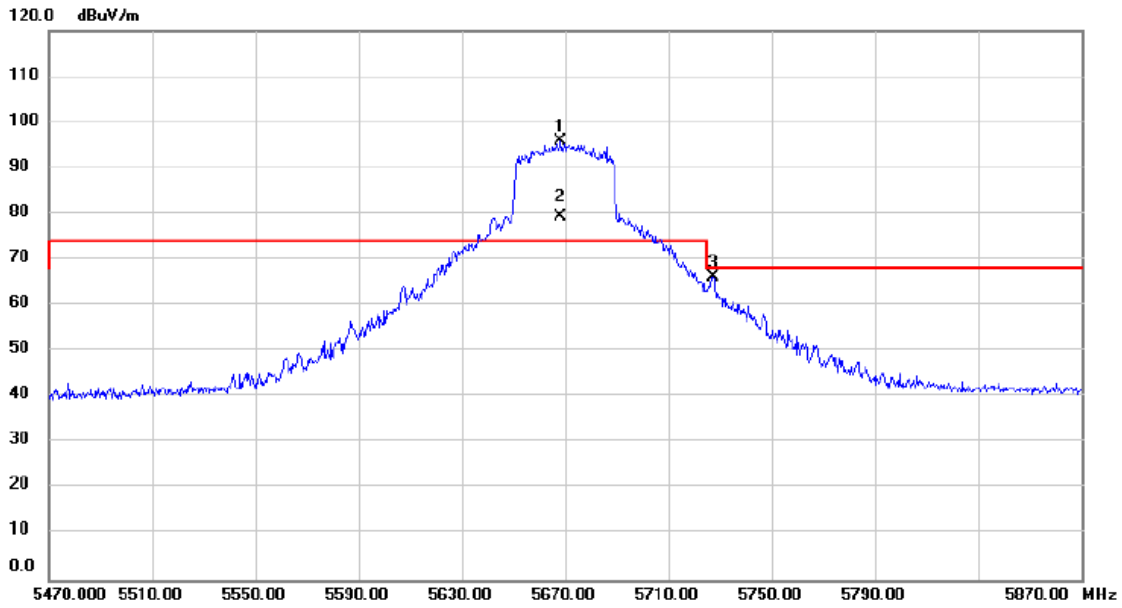


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5668.400	93.53	2.33	95.86	74.00	21.86	peak		No Limit
2	X	5668.400	77.14	2.33	79.47	74.00	5.47	AVG		No Limit
3		5727.200	63.77	2.42	66.19	68.20	-2.01	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5755MHz	Polarization	Vertical

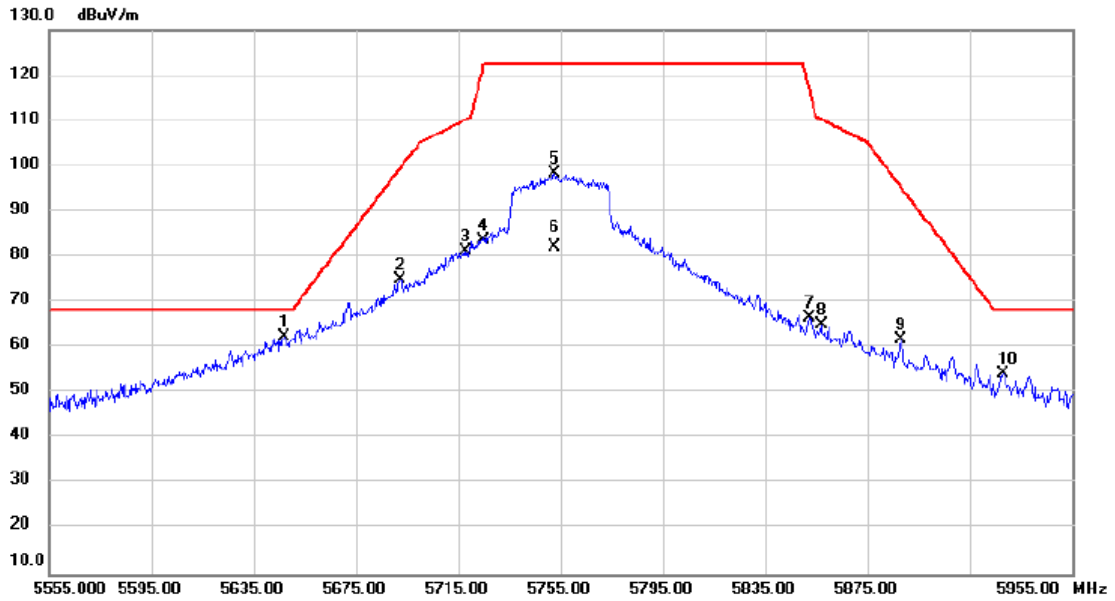


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5647.000	60.05	2.30	62.35	68.20	-5.85			peak
2		5692.200	72.71	2.37	75.08	99.45	-24.37			peak
3		5717.800	78.85	2.41	81.26	110.18	-28.92			peak
4		5724.600	81.37	2.42	83.79	121.29	-37.50			peak
5		5752.600	95.90	2.46	98.36	122.20	-23.84			peak
6		5752.600	79.81	2.46	82.27	122.20	-39.93			AVG
7		5852.200	63.82	2.62	66.44	117.18	-50.74			peak
8		5857.000	62.28	2.63	64.91	110.24	-45.33			peak
9		5887.800	58.95	2.68	61.63	95.70	-34.07			peak
10		5927.800	51.58	2.73	54.31	68.20	-13.89			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/2
Test Frequency	5795MHz	Polarization	Vertical

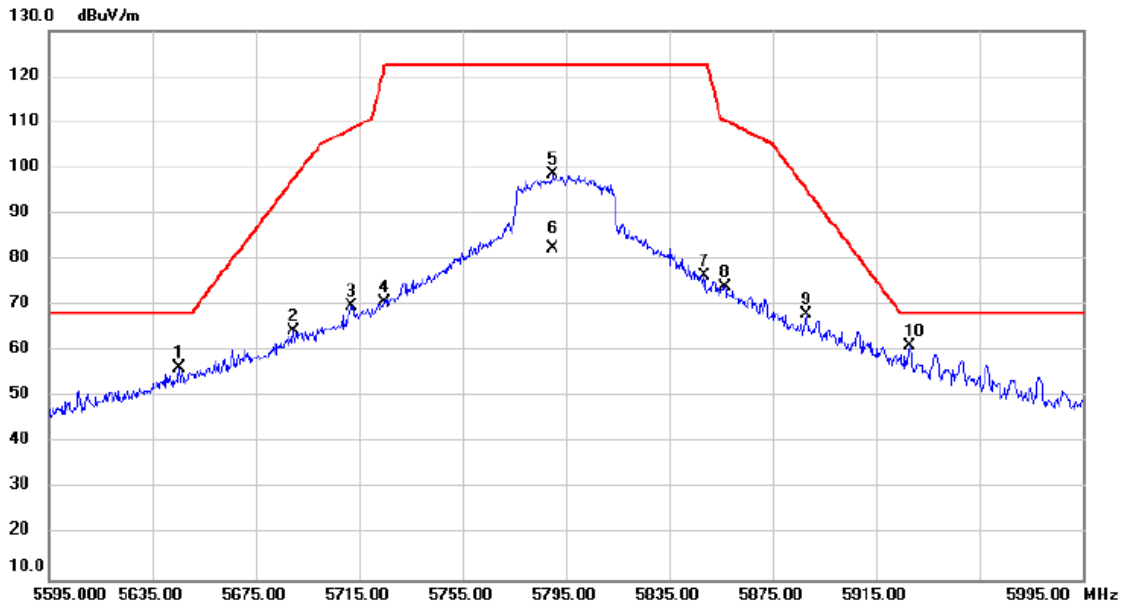


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5645.400	54.15	2.29	56.44	68.20	-11.76	peak			
2	5689.800	62.07	2.37	64.44	97.68	-33.24	peak			
3	5712.200	67.46	2.39	69.85	108.62	-38.77	peak			
4	5724.600	68.36	2.42	70.78	121.29	-50.51	peak			
5	5790.200	96.04	2.53	98.57	122.20	-23.63	peak			No Limit
6	5790.200	79.78	2.53	82.31	122.20	-39.89	AVG			No Limit
7	5848.600	73.81	2.62	76.43	122.20	-45.77	peak			
8	5856.600	71.50	2.63	74.13	110.35	-36.22	peak			
9	5888.200	65.34	2.68	68.02	95.40	-27.38	peak			
10 *	5928.200	58.50	2.73	61.23	68.20	-6.97	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/4/30
Test Frequency	5210MHz	Polarization	Vertical

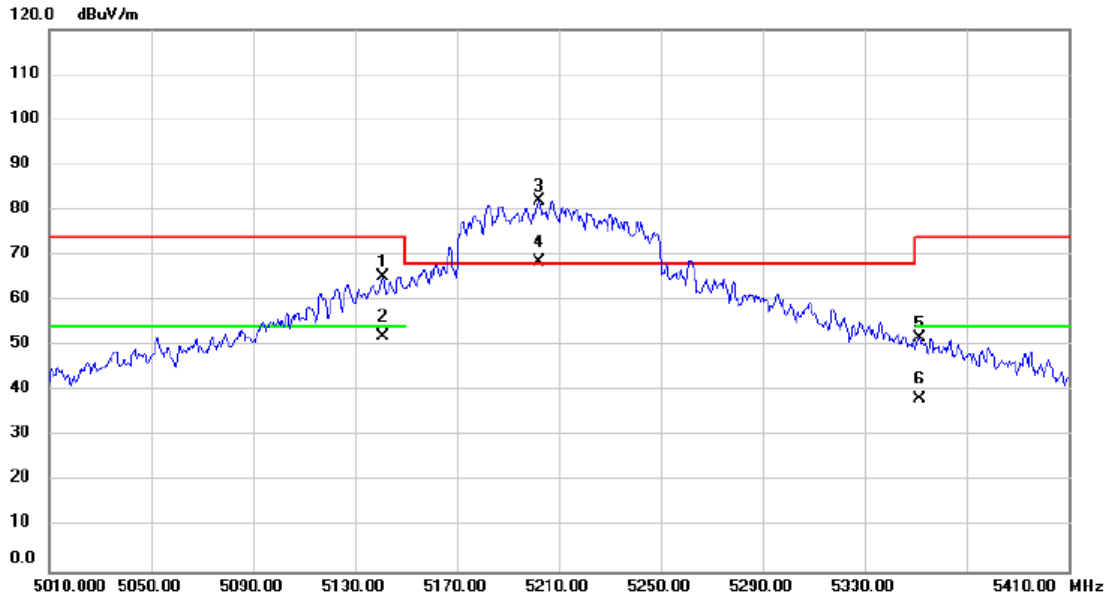


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5141.200	73.45	-8.08	65.37	74.00	-8.63			peak
2		5141.200	60.20	-8.08	52.12	54.00	-1.88			AVG
3	*	5202.400	90.17	-8.05	82.12	68.20	13.92			No Limit
4	X	5202.400	76.55	-8.05	68.50	68.20	0.30			No Limit
5		5351.600	59.67	-7.99	51.68	74.00	-22.32			peak
6		5351.600	46.12	-7.99	38.13	54.00	-15.87			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/4/30
Test Frequency	5290MHz	Polarization	Vertical

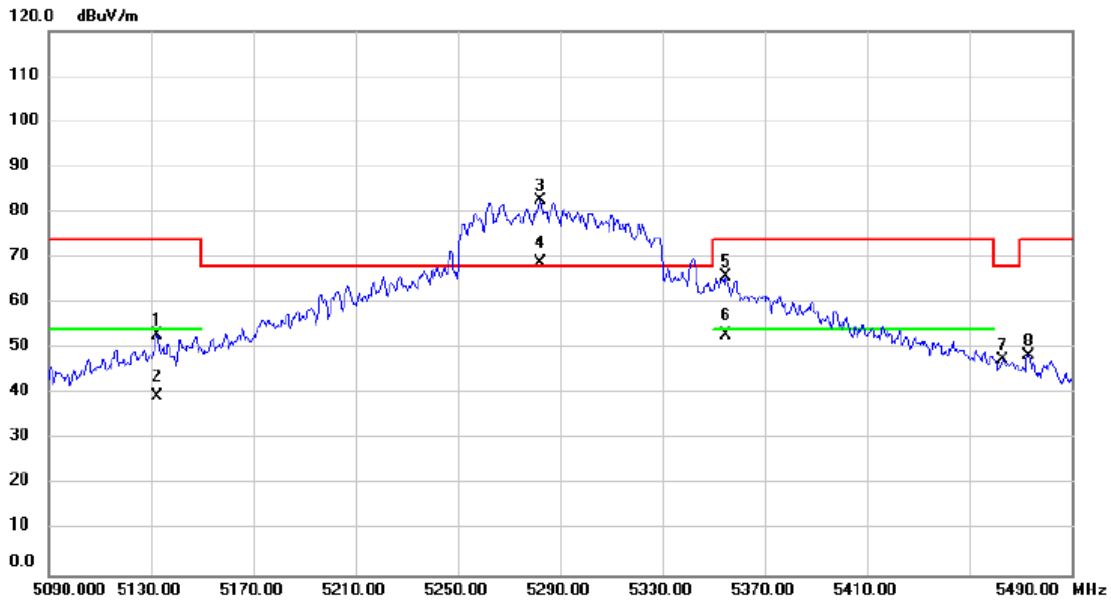


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5132.400	60.94	-8.08	52.86	74.00	-21.14	peak			
2	5132.400	47.44	-8.08	39.36	54.00	-14.64	AVG			
3 *	5282.400	90.63	-8.01	82.62	68.20	14.42	peak			No Limit
4 X	5282.400	76.90	-8.01	68.89	68.20	0.69	AVG			No Limit
5	5354.800	73.80	-8.00	65.80	74.00	-8.20	peak			
6	5354.800	60.88	-8.00	52.88	54.00	-1.12	AVG			
7	5463.200	55.47	-7.94	47.53	68.20	-20.67	peak			
8	5473.200	56.44	-7.94	48.50	74.00	-25.50	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/4/30
Test Frequency	5530MHz	Polarization	Vertical

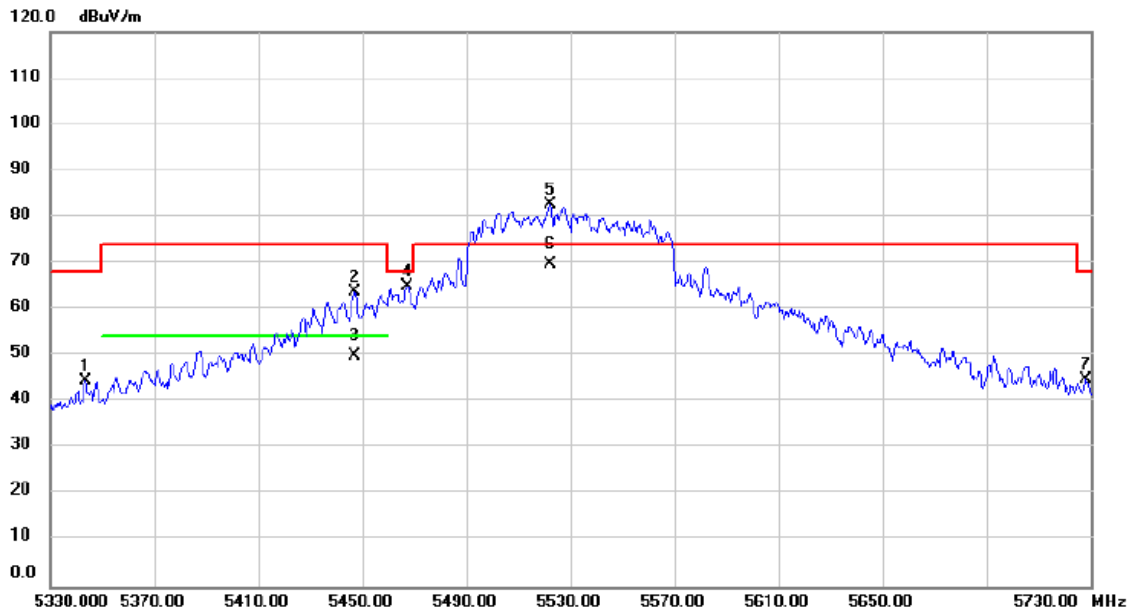


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5343.600	52.51	-7.99	44.52	68.20	-23.68			peak
2		5447.200	71.65	-7.95	63.70	74.00	-10.30			peak
3		5447.200	57.86	-7.95	49.91	54.00	-4.09			AVG
4		5467.200	72.91	-7.95	64.96	68.20	-3.24			peak
5	*	5522.400	90.60	-7.89	82.71	74.00	8.71			No Limit
6		5522.400	77.54	-7.89	69.65	74.00	-4.35			No Limit
7		5728.400	52.29	-7.57	44.72	68.20	-23.48			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/4/30
Test Frequency	5610MHz	Polarization	Vertical

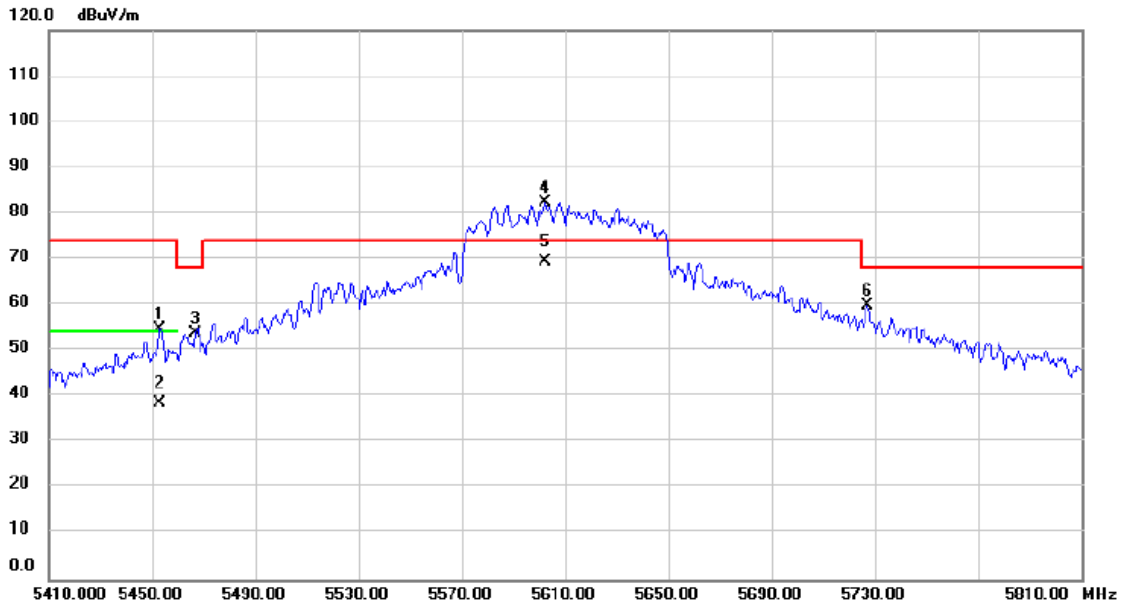


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5453.200	62.83	-7.95	54.88	74.00	-19.12	peak			
2		5453.200	46.39	-7.95	38.44	54.00	-15.56	AVG			
3		5466.800	61.67	-7.95	53.72	68.20	-14.48	peak			
4	*	5602.400	90.24	-7.77	82.47	74.00	8.47	peak			No Limit
5		5602.400	77.37	-7.77	69.60	74.00	-4.40	AVG			No Limit
6		5727.200	67.39	-7.58	59.81	68.20	-8.39	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/4/30
Test Frequency	5775Hz	Polarization	Vertical

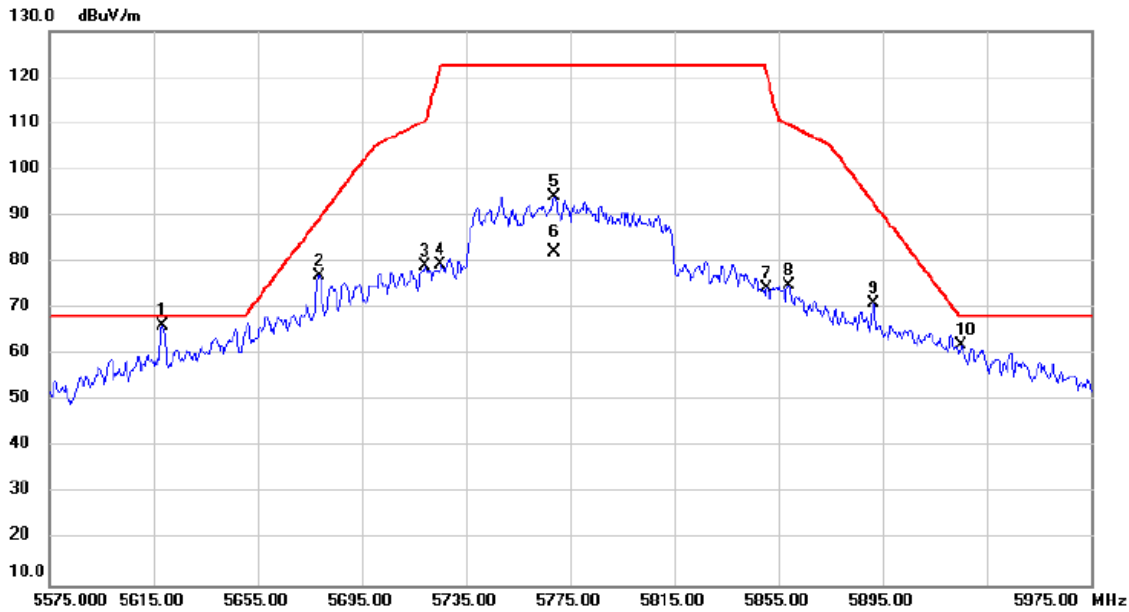


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5618.600	63.93	2.25	66.18	68.20	-2.02			peak
2		5678.600	74.69	2.34	77.03	89.40	-12.37			peak
3		5719.400	76.71	2.41	79.12	110.63	-31.51			peak
4		5725.400	77.04	2.42	79.46	122.20	-42.74			peak
5		5769.000	91.78	2.48	94.26	122.20	-27.94			peak
6		5769.000	79.58	2.48	82.06	122.20	-40.14			AVG
7		5850.600	71.60	2.62	74.22	120.83	-46.61			peak
8		5859.000	72.18	2.63	74.81	109.68	-34.87			peak
9		5891.400	68.22	2.68	70.90	93.03	-22.13			peak
10		5925.400	59.37	2.73	62.10	68.20	-6.10			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/4/30
Test Frequency	5250Hz	Polarization	Vertical

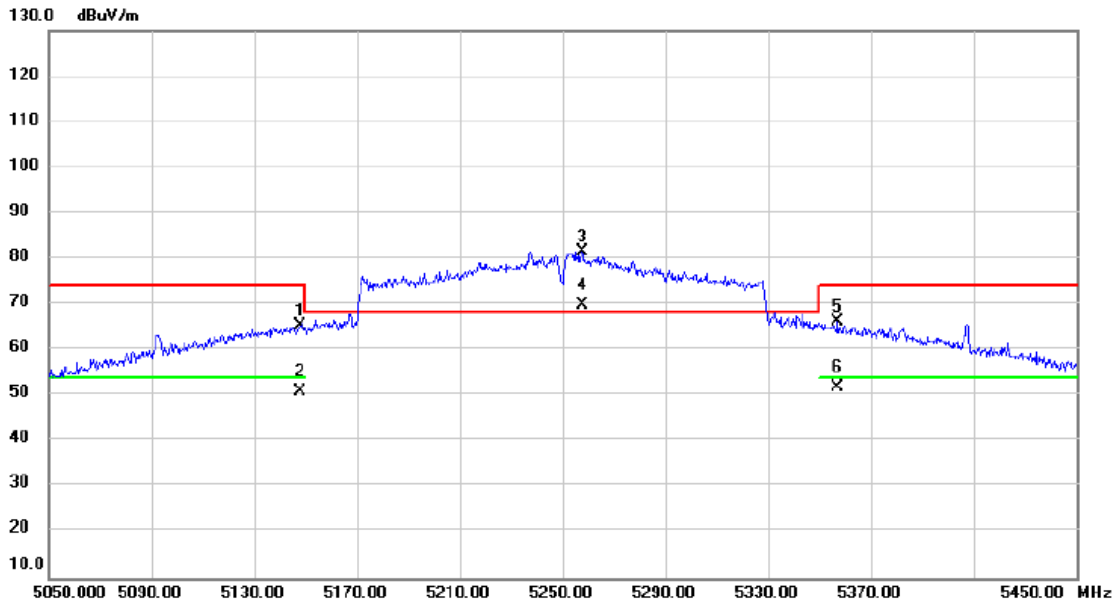


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5147.600	73.36	-8.07	65.29	74.00	-8.71			peak
2		5147.600	59.17	-8.07	51.10	54.00	-2.90			AVG
3	*	5257.600	89.73	-8.04	81.69	68.20	13.49			No Limit
4	X	5257.600	77.98	-8.04	69.94	68.20	1.74			No Limit
5		5357.200	74.25	-7.99	66.26	74.00	-7.74			peak
6		5357.200	59.88	-7.99	51.89	54.00	-2.11			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/4/30
Test Frequency	5570Hz	Polarization	Vertical

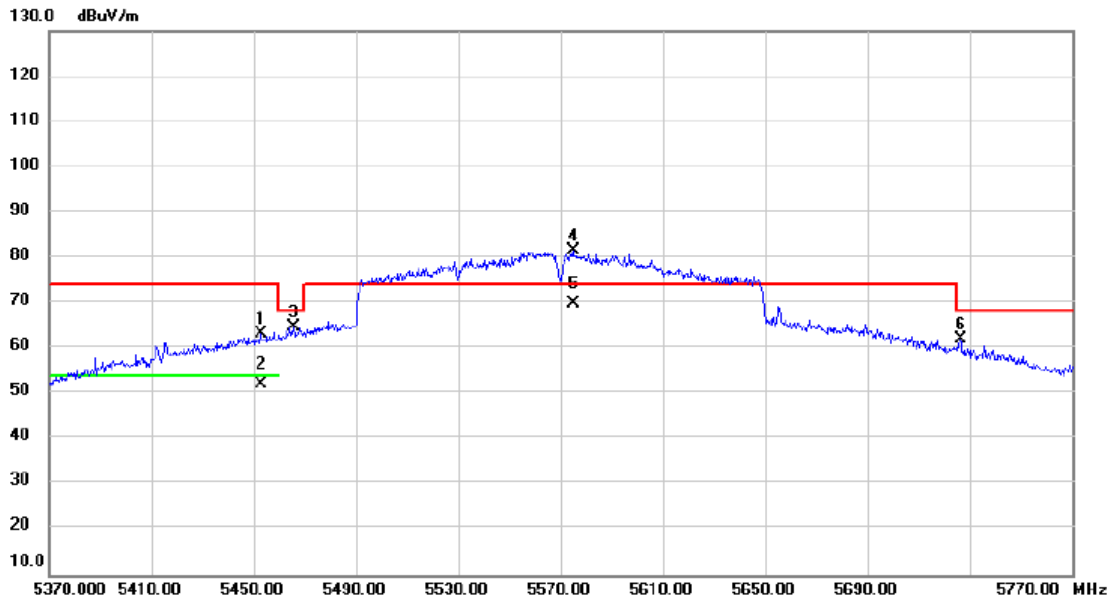


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5452.800	71.28	-7.95	63.33	74.00	-10.67	peak			
2	5452.800	60.10	-7.95	52.15	54.00	-1.85	AVG			
3	5465.600	72.65	-7.95	64.70	68.20	-3.50	peak			
4 *	5574.800	89.44	-7.81	81.63	74.00	7.63	peak			No Limit
5	5574.800	77.78	-7.81	69.97	74.00	-4.03	AVG			No Limit
6	5726.400	69.59	-7.58	62.01	68.20	-6.19	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5180MHz	Polarization	Vertical

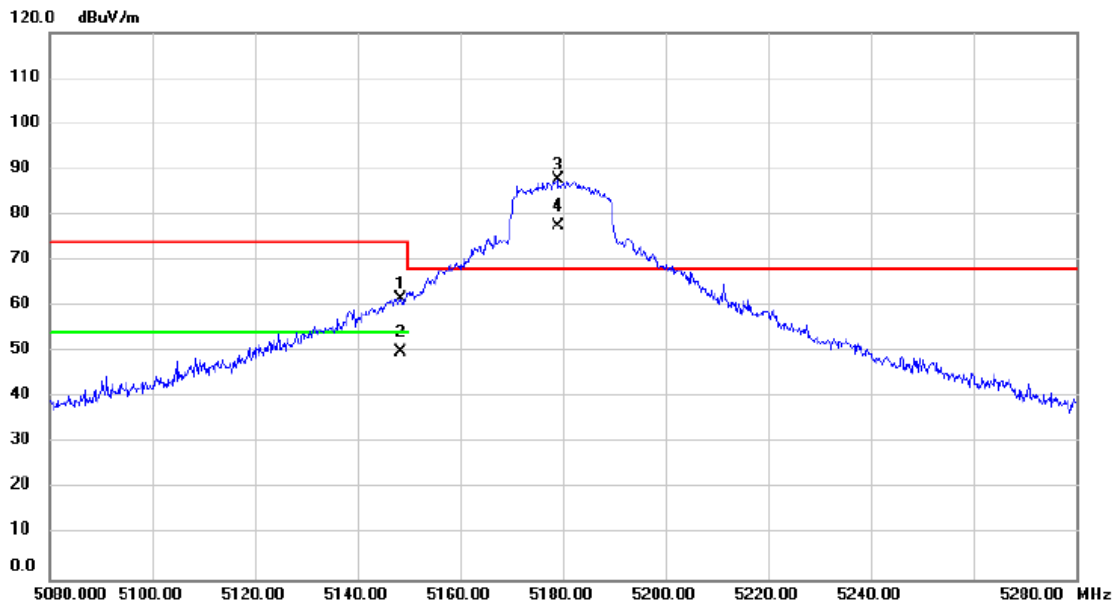


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5148.400	69.69	-8.07	61.62	74.00	-12.38	peak			
2		5148.400	57.97	-8.07	49.90	54.00	-4.10	AVG			
3	*	5179.000	95.85	-8.06	87.79	68.20	19.59	peak			No Limit
4	X	5179.000	85.63	-8.06	77.57	68.20	9.37	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5240MHz	Polarization	Vertical

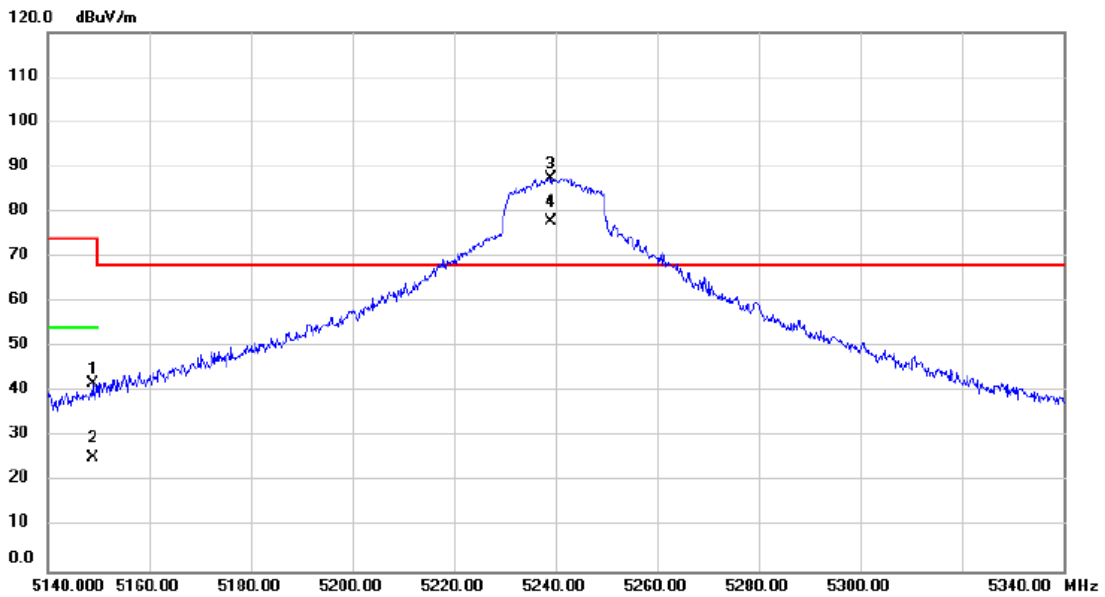


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5148.800	49.79	-8.07	41.72	74.00	-32.28			peak
2		5148.800	33.52	-8.07	25.45	54.00	-28.55			AVG
3	*	5239.000	95.57	-8.04	87.53	68.20	19.33			No Limit
4	X	5239.000	86.04	-8.04	78.00	68.20	9.80			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5260MHz	Polarization	Vertical

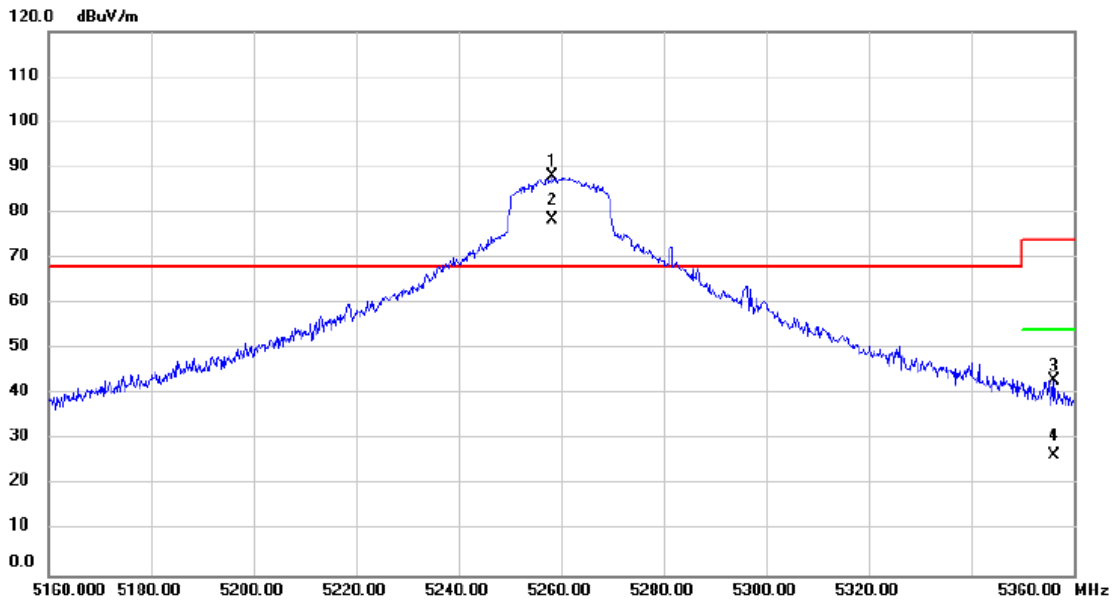


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	5258.400	96.09	-8.03	88.06	68.20	19.86	peak		No Limit
2	X	5258.400	86.47	-8.03	78.44	68.20	10.24	AVG		No Limit
3		5356.200	50.95	-7.99	42.96	74.00	-31.04	peak		
4		5356.200	34.57	-7.99	26.58	54.00	-27.42	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5320MHz	Polarization	Vertical

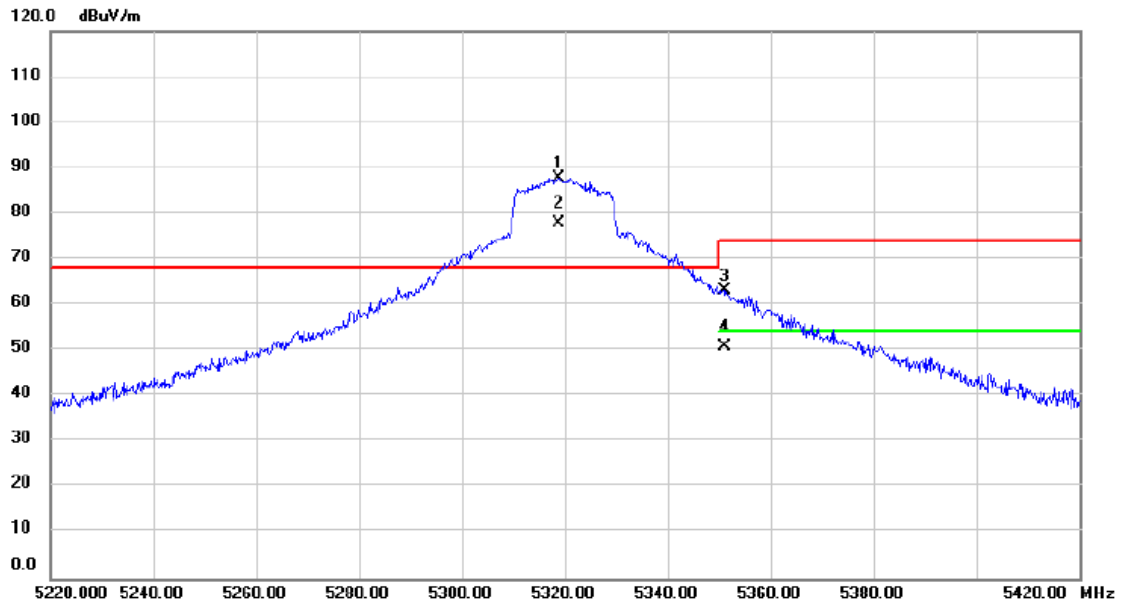


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5318.800	95.89	-8.00	87.89	68.20	19.69	peak		No Limit
2	X	5318.800	85.76	-8.00	77.76	68.20	9.56	AVG		No Limit
3		5351.000	71.05	-7.99	63.06	74.00	-10.94	peak		
4		5351.000	58.91	-7.99	50.92	54.00	-3.08	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5500MHz	Polarization	Vertical

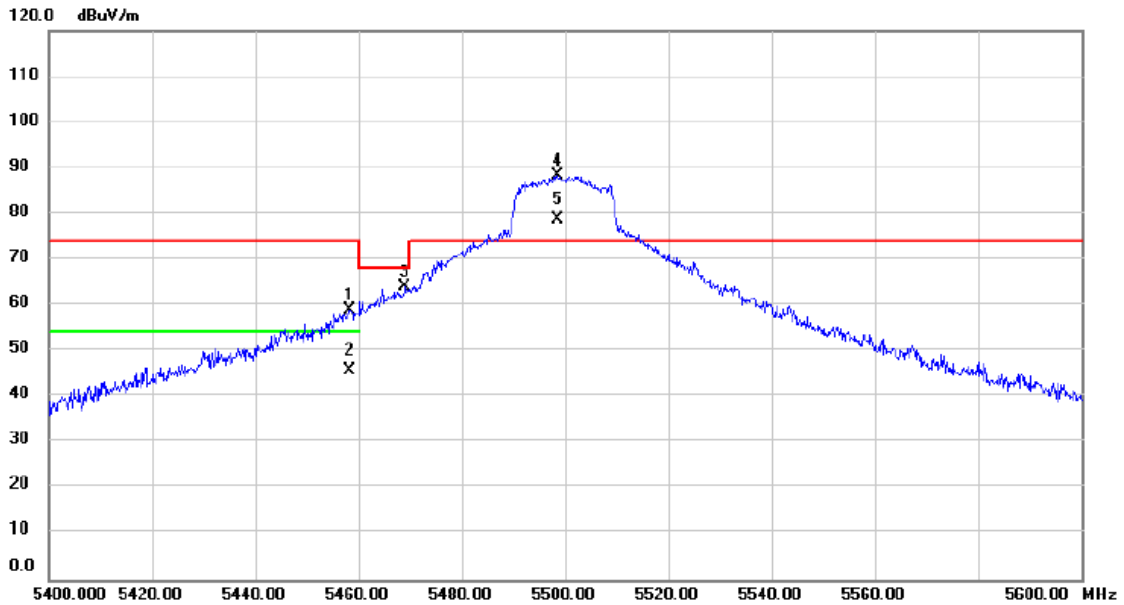


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5458.400	67.02	-7.94	59.08	74.00	-14.92			peak
2		5458.400	53.62	-7.94	45.68	54.00	-8.32			AVG
3		5469.000	72.12	-7.95	64.17	68.20	-4.03			peak
4	*	5498.600	96.28	-7.93	88.35	74.00	14.35			No Limit
5	X	5498.600	86.77	-7.93	78.84	74.00	4.84			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5700MHz	Polarization	Vertical

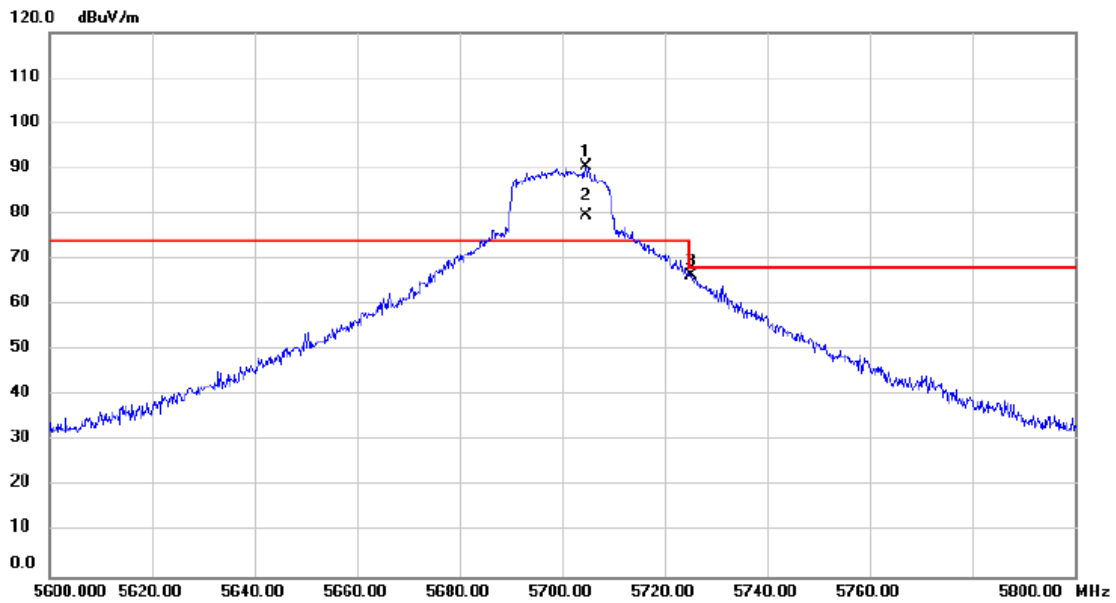


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5704.600	98.16	-7.61	90.55	74.00	16.55	peak		No Limit
2	X	5704.600	87.14	-7.61	79.53	74.00	5.53	AVG		No Limit
3		5725.200	74.10	-7.58	66.52	68.20	-1.68	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5745MHz	Polarization	Vertical

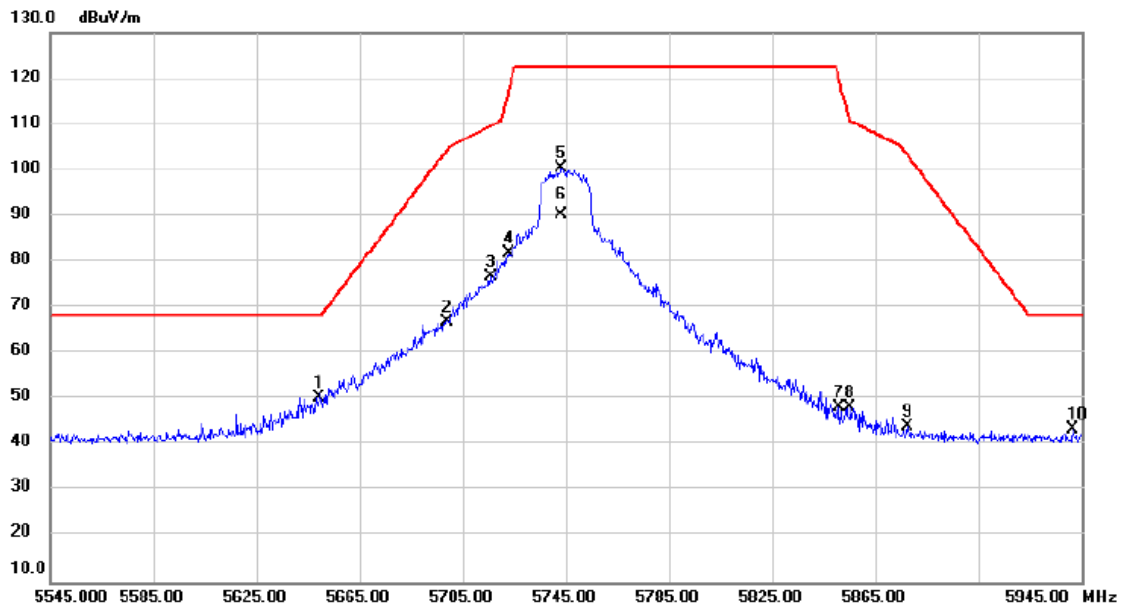


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5649.000	48.09	2.30	50.39	68.20	-17.81	peak			
2		5698.600	64.61	2.39	67.00	104.17	-37.17	peak			
3		5715.800	74.39	2.41	76.80	109.63	-32.83	peak			
4		5722.600	79.56	2.42	81.98	116.73	-34.75	peak			
5		5743.400	98.01	2.45	100.46	122.20	-21.74	peak			No Limit
6		5743.400	87.91	2.45	90.36	122.20	-31.84	AVG			No Limit
7		5851.000	45.61	2.62	48.23	119.92	-71.69	peak			
8		5855.400	45.61	2.63	48.24	110.69	-62.45	peak			
9		5877.400	41.33	2.66	43.99	103.42	-59.43	peak			
10		5941.400	40.82	2.76	43.58	68.20	-24.62	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/4/30
Test Frequency	5825MHz	Polarization	Vertical

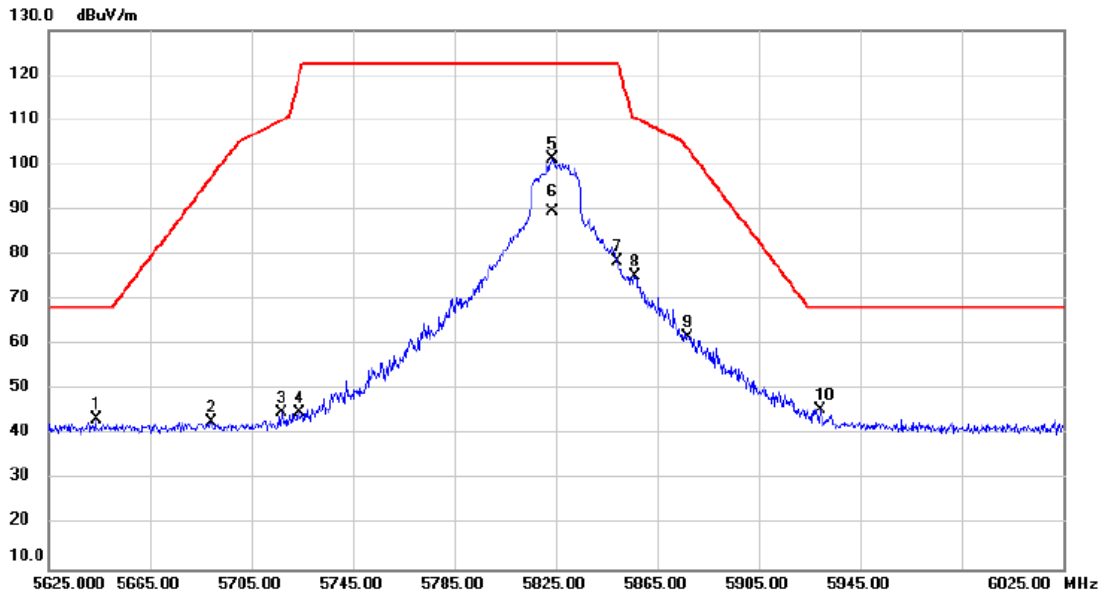


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5643.800	41.02	2.29	43.31	68.20	-24.89	peak			
2	5689.000	40.61	2.37	42.98	97.09	-54.11	peak			
3	5717.000	42.47	2.41	44.88	109.96	-65.08	peak			
4	5724.200	42.58	2.42	45.00	120.38	-75.38	peak			
5 *	5823.800	98.81	2.58	101.39	122.20	-20.81	peak			No Limit
6	5823.800	87.19	2.58	89.77	122.20	-32.43	AVG			No Limit
7	5849.400	76.02	2.62	78.64	122.20	-43.56	peak			
8	5856.200	72.54	2.63	75.17	110.46	-35.29	peak			
9	5877.000	59.13	2.66	61.79	103.71	-41.92	peak			
10	5929.000	42.81	2.73	45.54	68.20	-22.66	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5190MHz	Polarization	Vertical

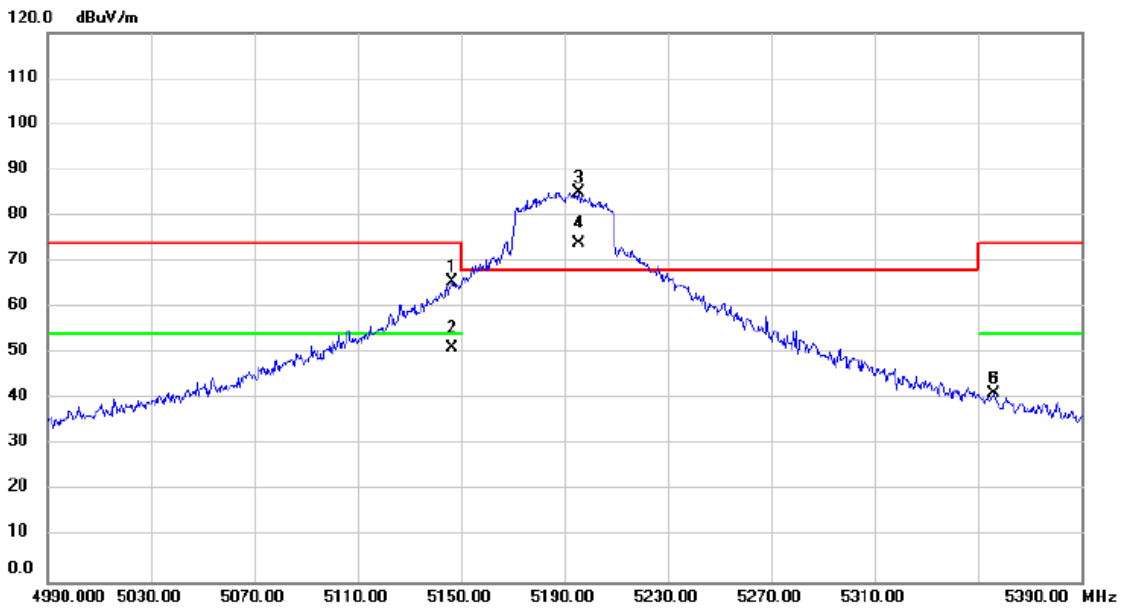


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5146.400	73.63	-8.07	65.56	74.00	-8.44	peak			
2		5146.400	59.18	-8.07	51.11	54.00	-2.89	AVG			
3	*	5195.600	93.17	-8.05	85.12	68.20	16.92	peak			No Limit
4	X	5195.600	82.03	-8.05	73.98	68.20	5.78	AVG			No Limit
5		5356.400	49.15	-7.99	41.16	74.00	-32.84	peak			
6		5356.400	49.15	-7.99	41.16	74.00	-32.84	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5230MHz	Polarization	Vertical

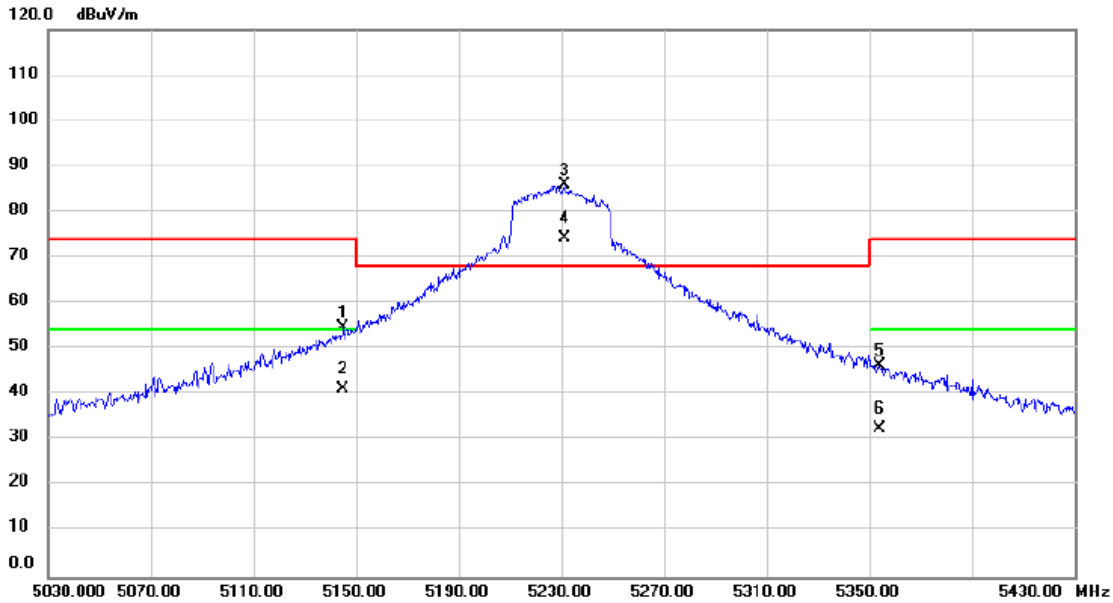


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5145.200	62.95	-8.06	54.89	74.00	-19.11	peak			
2		5145.200	49.38	-8.06	41.32	54.00	-12.68	AVG			
3	*	5231.200	94.13	-8.04	86.09	68.20	17.89	peak			No Limit
4	X	5231.200	82.30	-8.04	74.26	68.20	6.06	AVG			No Limit
5		5354.000	54.37	-7.99	46.38	74.00	-27.62	peak			
6		5354.000	40.53	-7.99	32.54	54.00	-21.46	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5270MHz	Polarization	Vertical

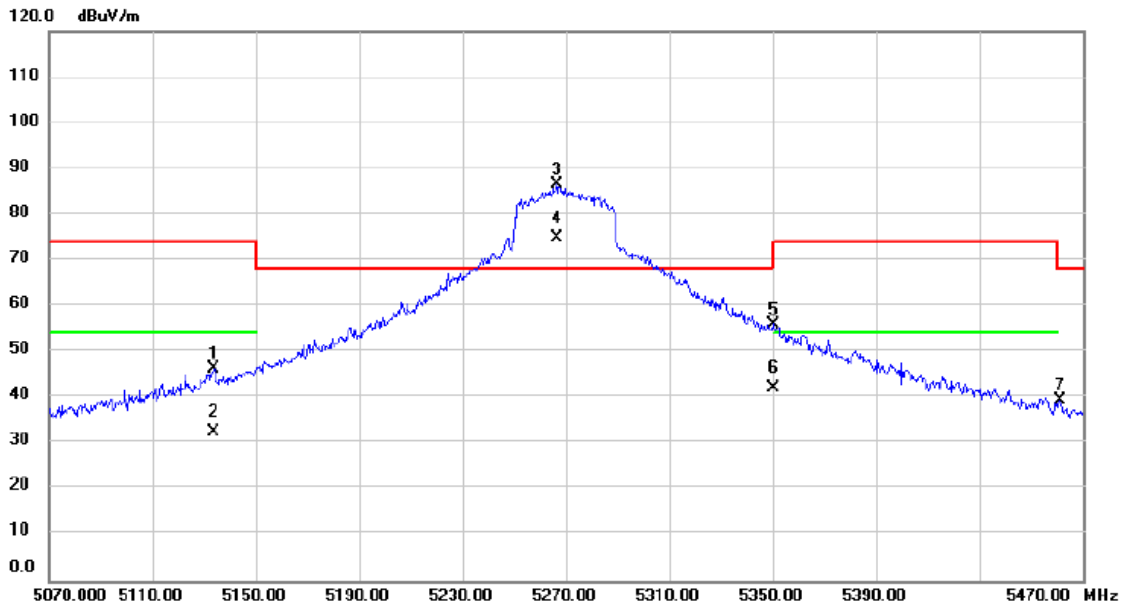


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		5133.600	54.52	-8.08	46.44	74.00	-27.56	peak		
2		5133.600	40.77	-8.08	32.69	54.00	-21.31	AVG		
3	*	5266.400	94.69	-8.02	86.67	68.20	18.47	peak		No Limit
4	X	5266.400	82.82	-8.02	74.80	68.20	6.60	AVG		No Limit
5		5350.400	63.82	-7.99	55.83	74.00	-18.17	peak		
6		5350.400	50.06	-7.99	42.07	54.00	-11.93	AVG		
7		5461.200	47.43	-7.94	39.49	68.20	-28.71	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5310MHz	Polarization	Vertical

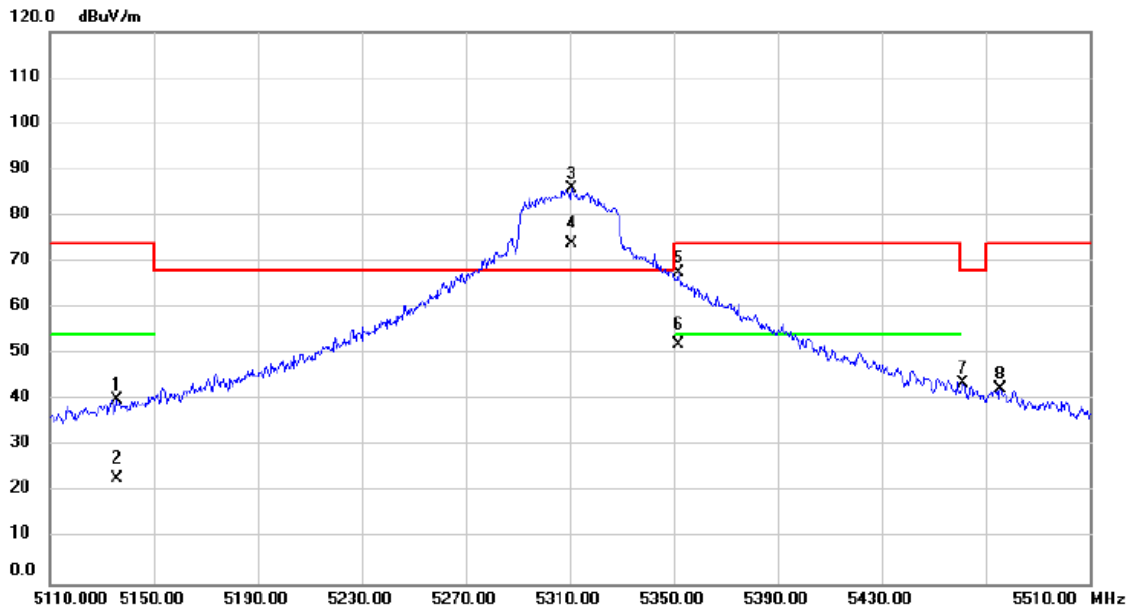


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5135.600	48.10	-8.08	40.02	74.00	-33.98			peak
2		5135.600	30.99	-8.08	22.91	54.00	-31.09			AVG
3	*	5310.800	94.08	-8.00	86.08	68.20	17.88			No Limit
4	X	5310.800	82.01	-8.00	74.01	68.20	5.81			No Limit
5		5351.600	75.78	-7.99	67.79	74.00	-6.21			peak
6		5351.600	60.07	-7.99	52.08	54.00	-1.92			AVG
7		5461.200	51.50	-7.94	43.56	68.20	-24.64			peak
8		5475.600	50.40	-7.93	42.47	74.00	-31.53			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5510MHz	Polarization	Vertical

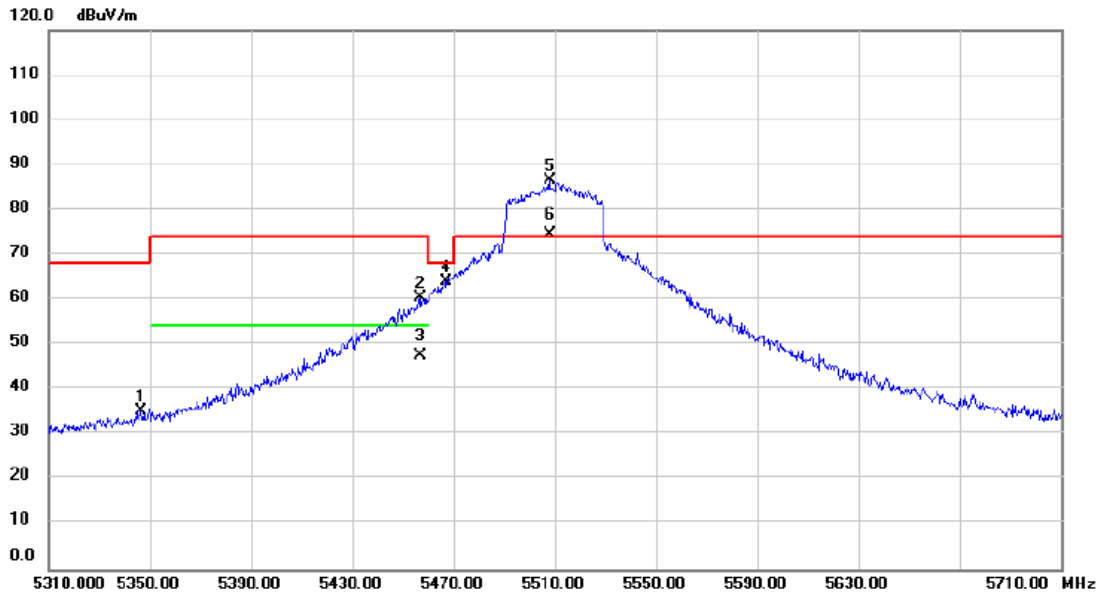


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5346.400	43.10	-7.99	35.11	68.20	-33.09	peak			
2		5456.800	68.29	-7.95	60.34	74.00	-13.66	peak			
3		5456.800	55.37	-7.95	47.42	54.00	-6.58	AVG			
4		5466.800	71.87	-7.95	63.92	68.20	-4.28	peak			
5	*	5508.000	94.48	-7.91	86.57	74.00	12.57	peak			No Limit
6	X	5508.000	82.33	-7.91	74.42	74.00	0.42	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5670MHz	Polarization	Vertical

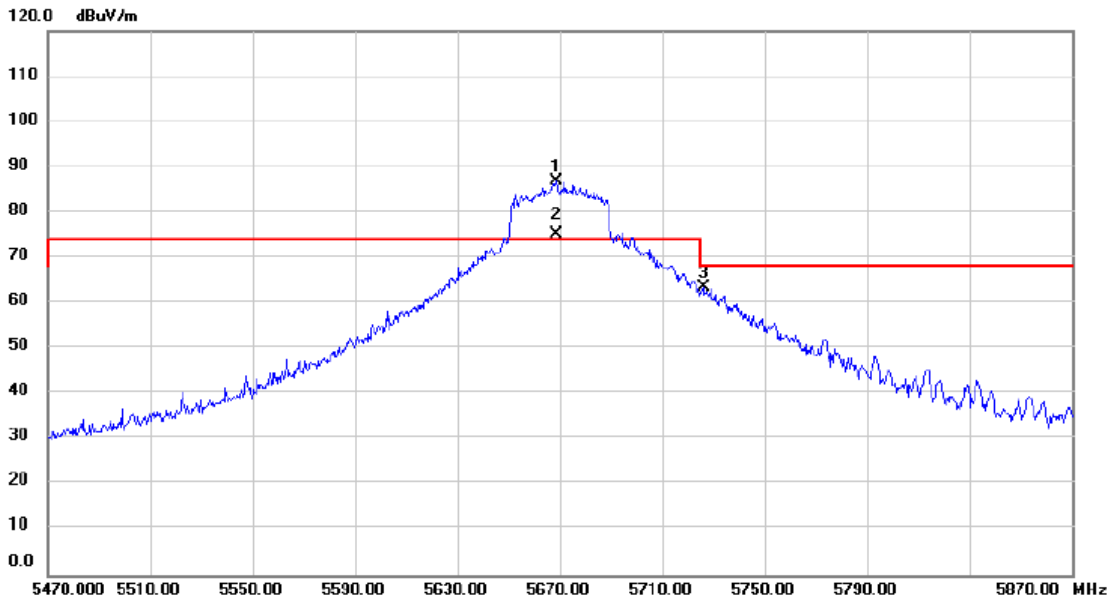


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5668.800	94.53	-7.67	86.86	74.00	12.86	peak		No Limit
2	X	5668.800	82.73	-7.67	75.06	74.00	1.06	AVG		No Limit
3		5726.000	70.92	-7.58	63.34	68.20	-4.86	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5755MHz	Polarization	Vertical

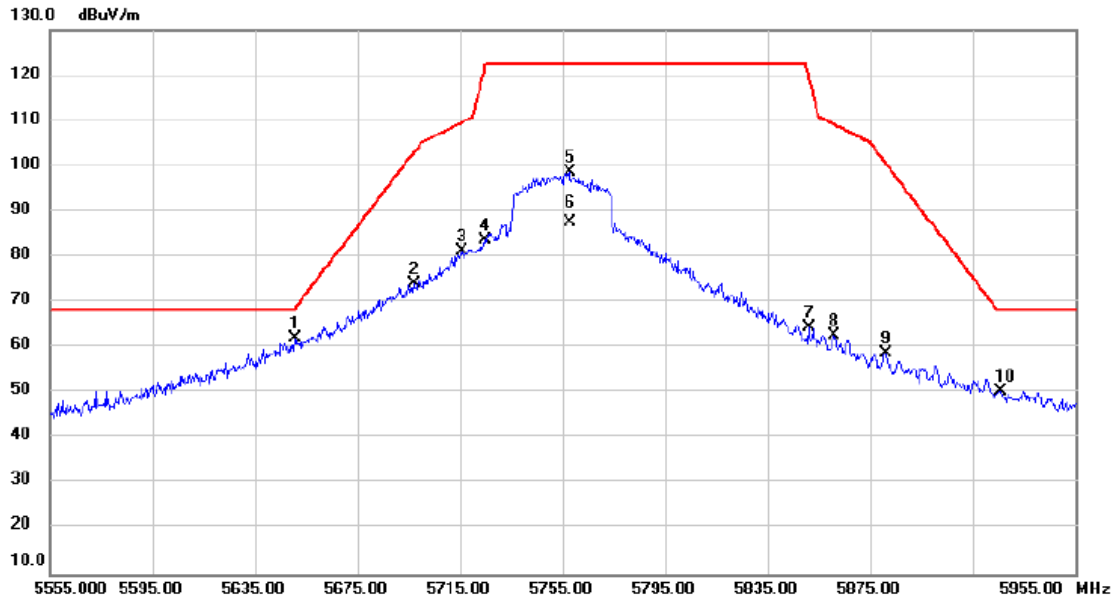


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5650.600	59.65	2.30	61.95	68.65	-6.70	peak			
2		5697.000	71.55	2.38	73.93	102.99	-29.06	peak			
3		5715.800	78.94	2.41	81.35	109.63	-28.28	peak			
4		5724.600	81.10	2.42	83.52	121.29	-37.77	peak			
5		5757.800	96.27	2.48	98.75	122.20	-23.45	peak			No Limit
6		5757.800	85.12	2.48	87.60	122.20	-34.60	AVG			No Limit
7		5851.000	61.96	2.62	64.58	119.92	-55.34	peak			
8		5861.000	60.06	2.63	62.69	109.12	-46.43	peak			
9		5881.000	56.16	2.67	58.83	100.74	-41.91	peak			
10		5925.800	47.74	2.73	50.47	68.20	-17.73	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/4/30
Test Frequency	5795MHz	Polarization	Vertical

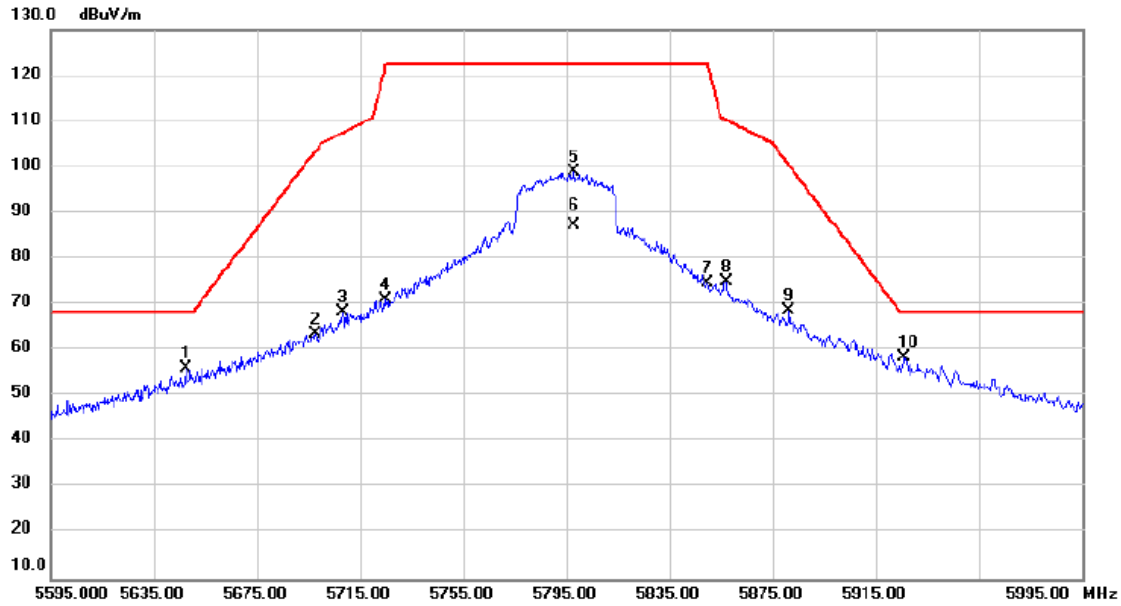


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5647.400	53.62	2.30	55.92	68.20	-12.28			peak
2		5697.800	61.23	2.38	63.61	103.58	-39.97			peak
3		5708.200	65.95	2.39	68.34	107.50	-39.16			peak
4		5724.600	68.68	2.42	71.10	121.29	-50.19			peak
5		5798.200	96.28	2.53	98.81	122.20	-23.39			No Limit
6		5798.200	84.80	2.53	87.33	122.20	-34.87			AVG
7		5849.800	72.07	2.62	74.69	122.20	-47.51			peak
8		5857.000	72.22	2.63	74.85	110.24	-35.39			peak
9		5881.400	66.09	2.67	68.76	100.45	-31.69			peak
10	*	5926.200	55.74	2.73	58.47	68.20	-9.73			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/4/30
Test Frequency	5210MHz	Polarization	Vertical

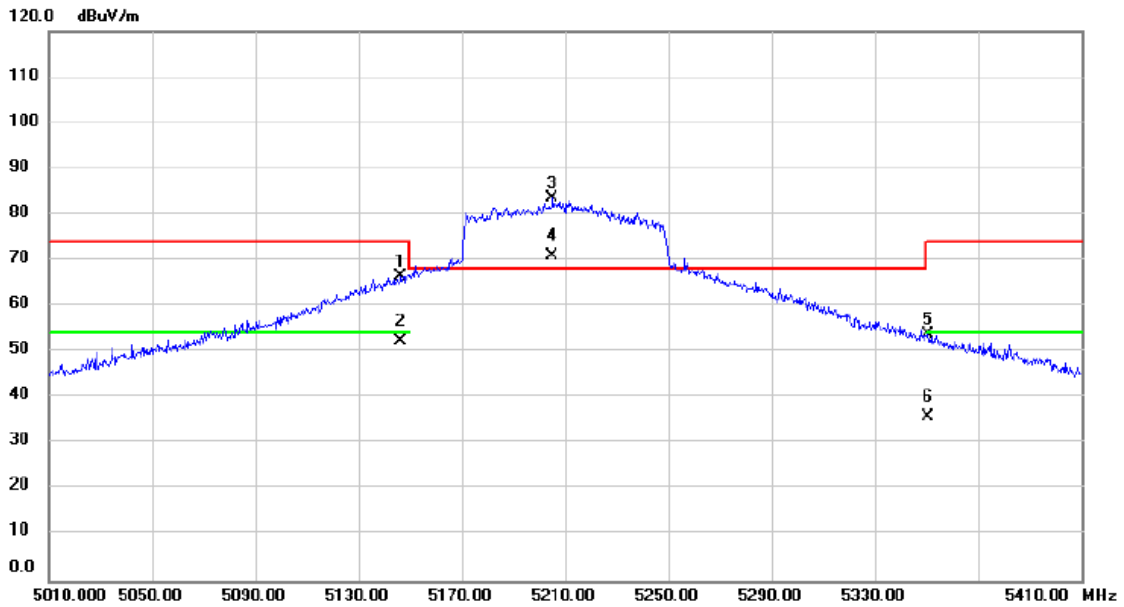


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.400	74.57	-8.07	66.50	74.00	-7.50			peak
2		5146.400	60.42	-8.07	52.35	54.00	-1.65			AVG
3	*	5205.200	91.46	-8.05	83.41	68.20	15.21			No Limit
4	X	5205.200	78.94	-8.05	70.89	68.20	2.69			No Limit
5		5350.400	61.95	-7.99	53.96	74.00	-20.04			peak
6		5350.400	43.78	-7.99	35.79	54.00	-18.21			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/4/30
Test Frequency	5290MHz	Polarization	Vertical

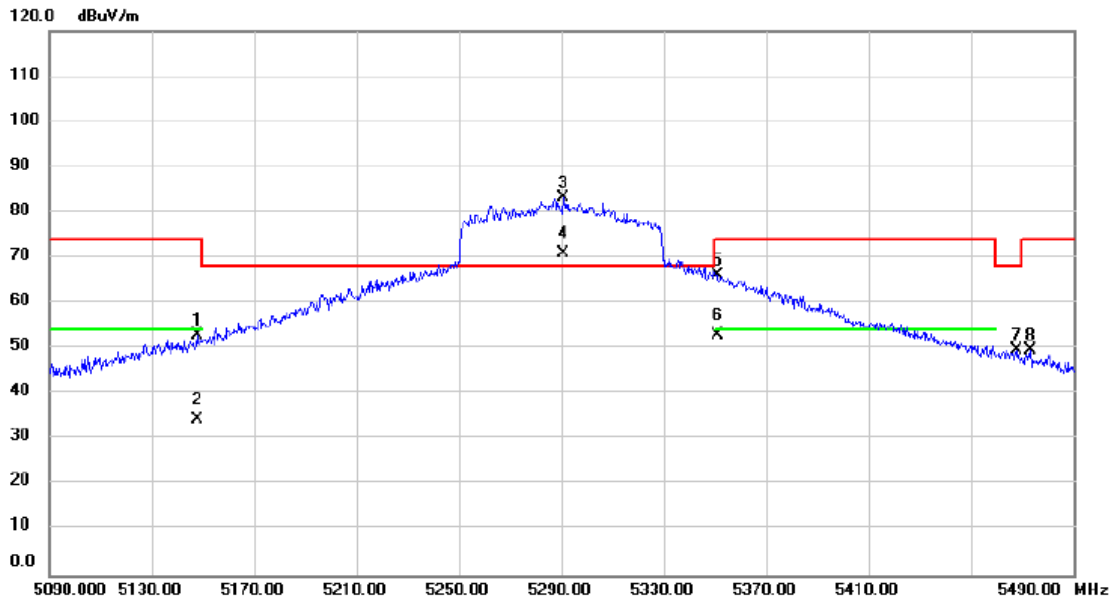


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5147.600	61.05	-8.07	52.98	74.00	-21.02	peak			
2	5147.600	42.29	-8.07	34.22	54.00	-19.78	AVG			
3 *	5290.800	91.36	-8.02	83.34	68.20	15.14	peak			No Limit
4 X	5290.800	79.00	-8.02	70.98	68.20	2.78	AVG			No Limit
5	5350.800	74.27	-7.99	66.28	74.00	-7.72	peak			
6	5350.800	61.08	-7.99	53.09	54.00	-0.91	AVG			
7	5468.000	57.67	-7.95	49.72	68.20	-18.48	peak			
8	5473.200	57.53	-7.94	49.59	74.00	-24.41	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/4/30
Test Frequency	5530MHz	Polarization	Vertical

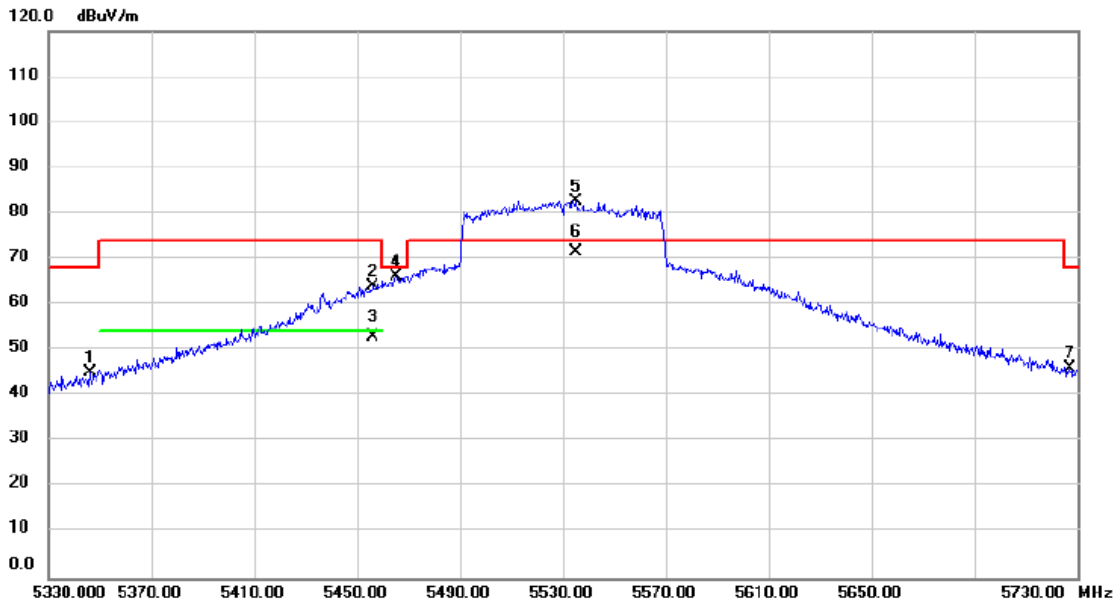


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5346.000	53.21	-7.99	45.22	68.20	-22.98	peak			
2	5456.400	71.86	-7.95	63.91	74.00	-10.09	peak			
3	5456.400	60.90	-7.95	52.95	54.00	-1.05	AVG			
4	5465.200	74.08	-7.94	66.14	68.20	-2.06	peak			
5 *	5534.800	90.62	-7.88	82.74	74.00	8.74	peak			No Limit
6	5534.800	79.51	-7.88	71.63	74.00	-2.37	AVG			No Limit
7	5726.800	53.66	-7.58	46.08	68.20	-22.12	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/4/30
Test Frequency	5610MHz	Polarization	Vertical

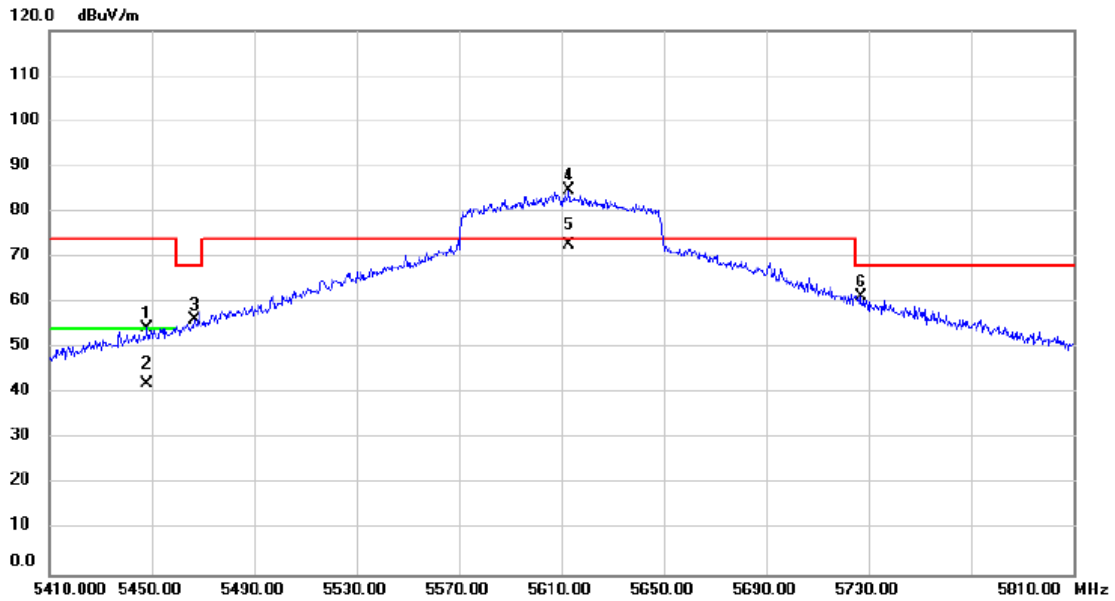


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5448.400	62.36	-7.95	54.41	74.00	-19.59	peak			
2		5448.400	50.22	-7.95	42.27	54.00	-11.73	AVG			
3		5466.800	64.13	-7.95	56.18	68.20	-12.02	peak			
4	*	5613.200	92.41	-7.75	84.66	74.00	10.66	peak			No Limit
5		5613.200	80.53	-7.75	72.78	74.00	-1.22	AVG			No Limit
6		5726.800	68.87	-7.58	61.29	68.20	-6.91	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/4/30
Test Frequency	5775Hz	Polarization	Vertical

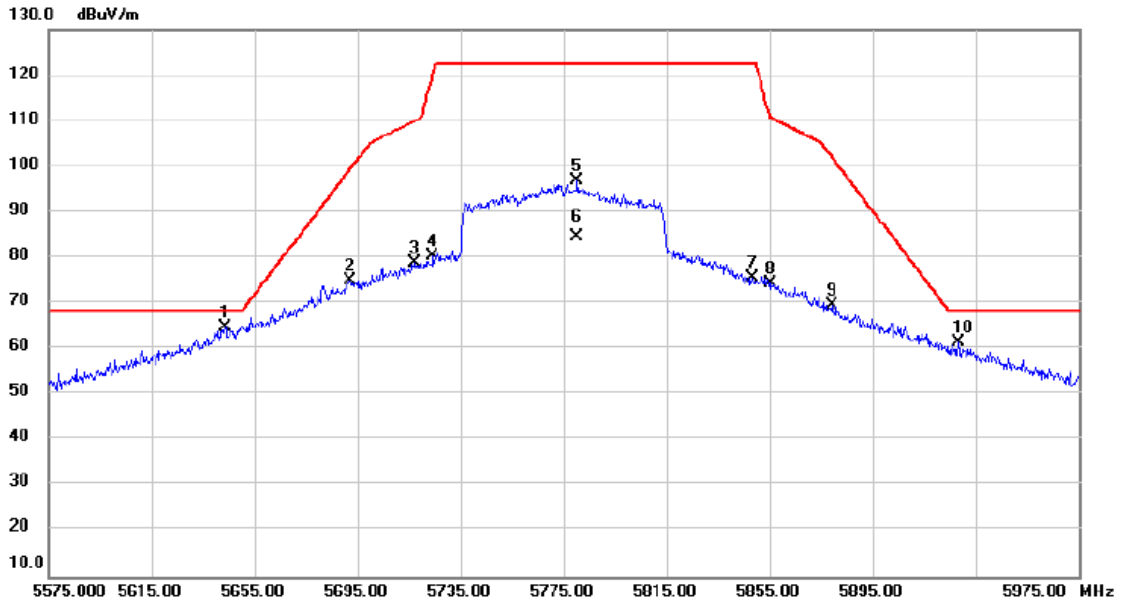


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5643.400	62.59	2.29	64.88	68.20	-3.32			peak
2		5691.800	72.59	2.37	74.96	99.15	-24.19			peak
3		5717.400	76.32	2.41	78.73	110.07	-31.34			peak
4		5724.200	77.79	2.42	80.21	120.38	-40.17			peak
5		5780.200	94.29	2.51	96.80	122.20	-25.40			No Limit
6		5780.200	82.03	2.51	84.54	122.20	-37.66			AVG No Limit
7		5848.200	72.85	2.62	75.47	122.20	-46.73			peak
8		5855.000	71.80	2.63	74.43	110.80	-36.37			peak
9		5879.000	66.96	2.66	69.62	102.23	-32.61			peak
10		5928.200	58.69	2.73	61.42	68.20	-6.78			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/4/30
Test Frequency	5250Hz	Polarization	Vertical

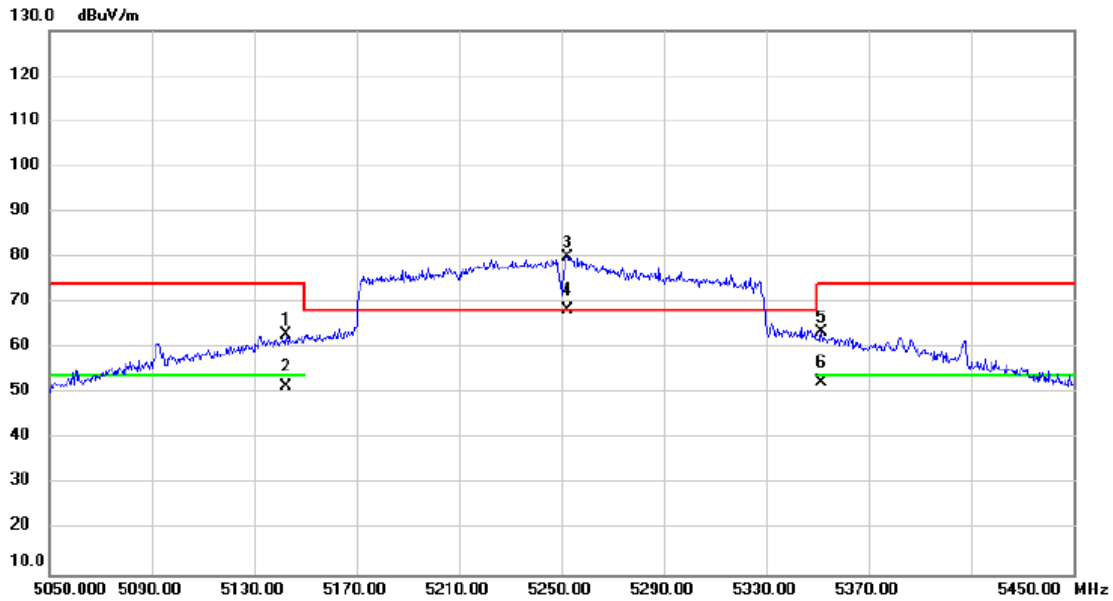


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5142.400	71.13	-8.07	63.06	74.00	-10.94	peak			
2		5142.400	59.62	-8.07	51.55	54.00	-2.45	AVG			
3	*	5252.400	88.20	-8.03	80.17	68.20	11.97	peak			No Limit
4	X	5252.400	76.42	-8.03	68.39	68.20	0.19	AVG			No Limit
5		5351.600	71.44	-7.99	63.45	74.00	-10.55	peak			
6		5351.600	60.47	-7.99	52.48	54.00	-1.52	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/4/30
Test Frequency	5570Hz	Polarization	Vertical

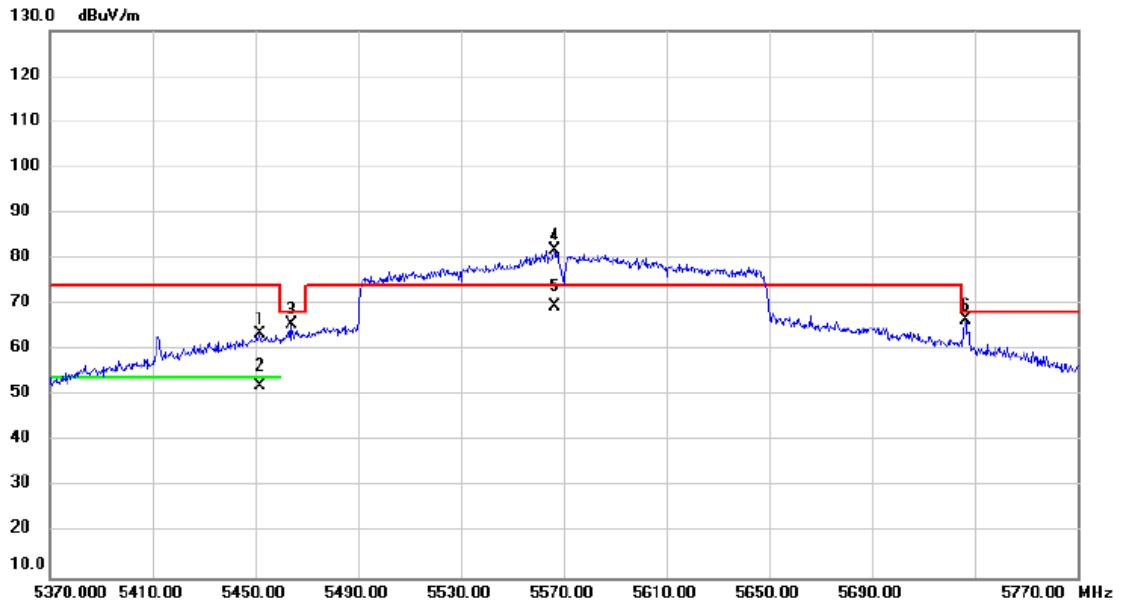


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5452.000	71.57	-7.95	63.62	74.00	-10.38			peak
2		5452.000	60.09	-7.95	52.14	54.00	-1.86			AVG
3		5464.000	73.57	-7.94	65.63	68.20	-2.57			peak
4	*	5566.400	89.58	-7.82	81.76	74.00	7.76			No Limit
5		5566.400	77.44	-7.82	69.62	74.00	-4.38			No Limit
6		5726.400	74.22	-7.58	66.64	68.20	-1.56			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/17
Test Frequency	5720Hz	Polarization	Vertical

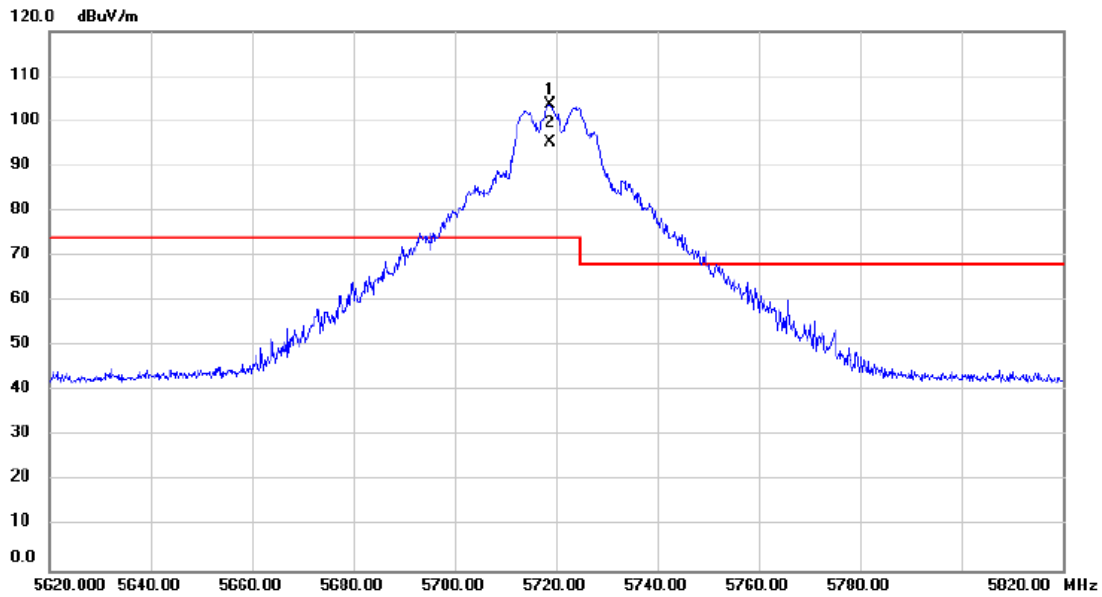


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5718.800	101.14	2.41	103.55	74.00	29.55	peak		No Limit
2	X	5718.800	92.77	2.41	95.18	74.00	21.18	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/17
Test Frequency	5720Hz	Polarization	Vertical

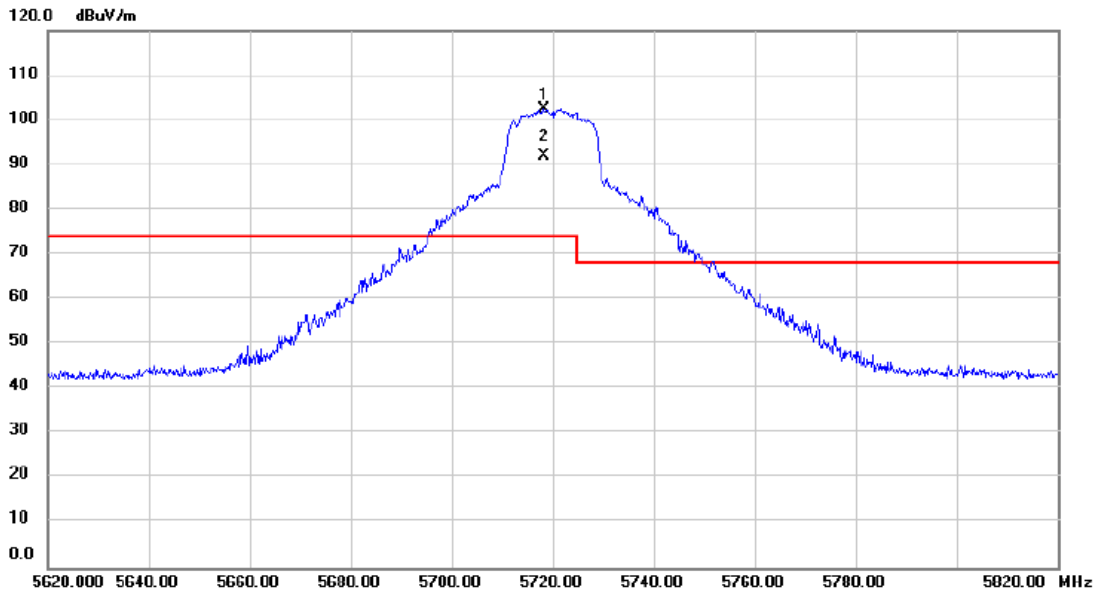


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5718.200	99.97	2.41	102.38	74.00	28.38	peak		No Limit
2	X	5718.200	89.52	2.41	91.93	74.00	17.93	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/17
Test Frequency	5710Hz	Polarization	Vertical

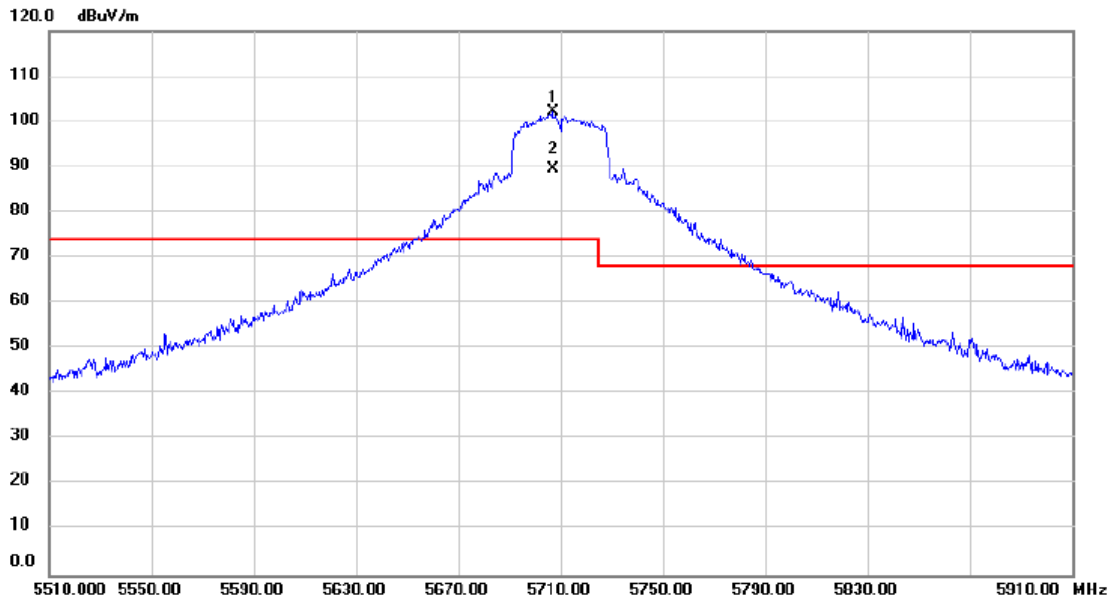


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		cm	degree	
1	*	5706.800	99.65	2.39	102.04	74.00	28.04	peak			No Limit
2	X	5706.800	87.11	2.39	89.50	74.00	15.50	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/17
Test Frequency	5690Hz	Polarization	Vertical

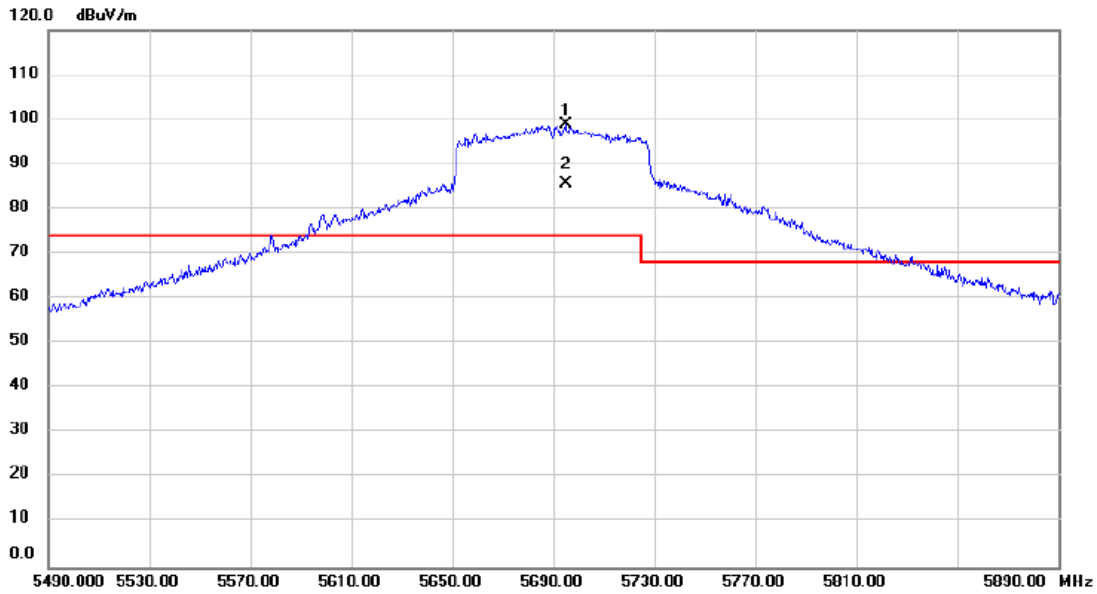


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5694.800	96.40	2.37	98.77	74.00	24.77	peak		No Limit
2	X	5694.800	83.41	2.37	85.78	74.00	11.78	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/17
Test Frequency	5720Hz	Polarization	Vertical

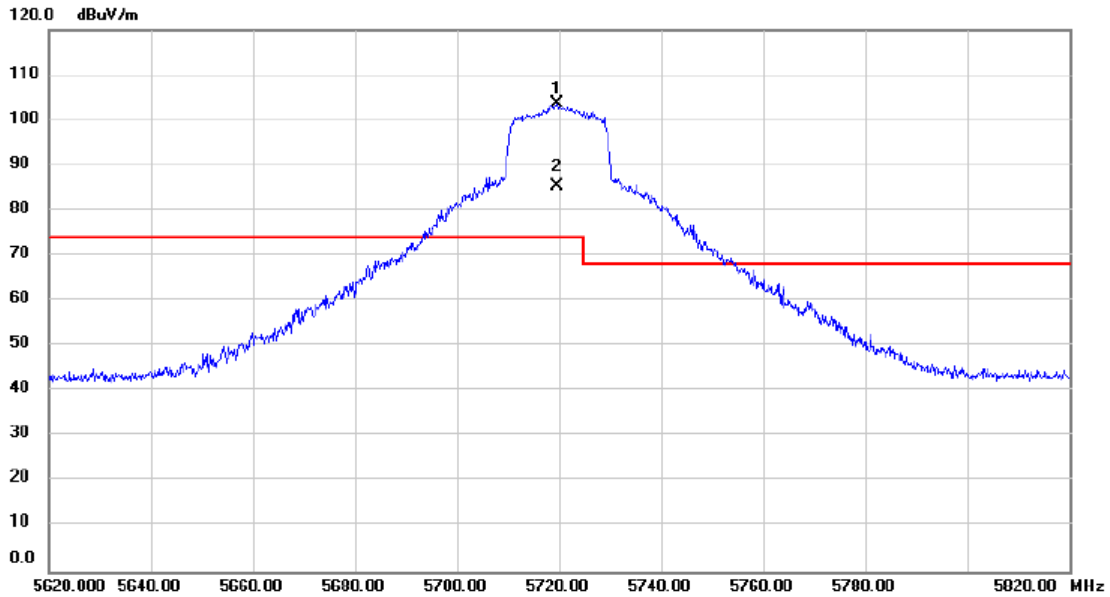


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5719.600	101.14	2.41	103.55	74.00	29.55	peak		No Limit
2	X	5719.600	83.07	2.41	85.48	74.00	11.48	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/17
Test Frequency	5710Hz	Polarization	Vertical

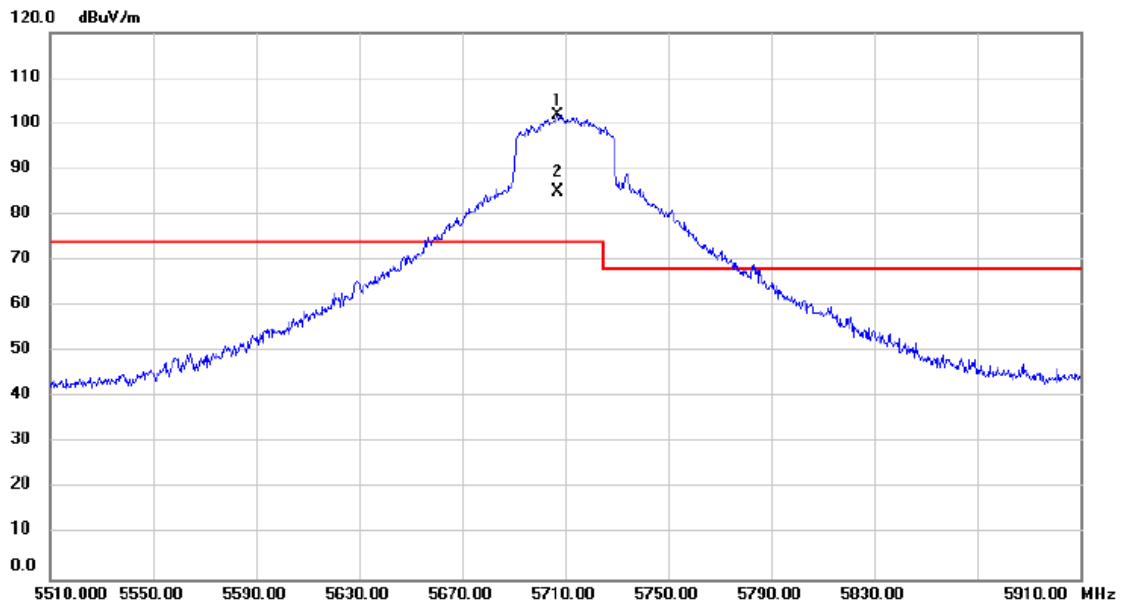


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5706.800	99.58	2.39	101.97	74.00	27.97	peak			No Limit
2	X	5706.800	82.72	2.39	85.11	74.00	11.11	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/17
Test Frequency	5690Hz	Polarization	Vertical

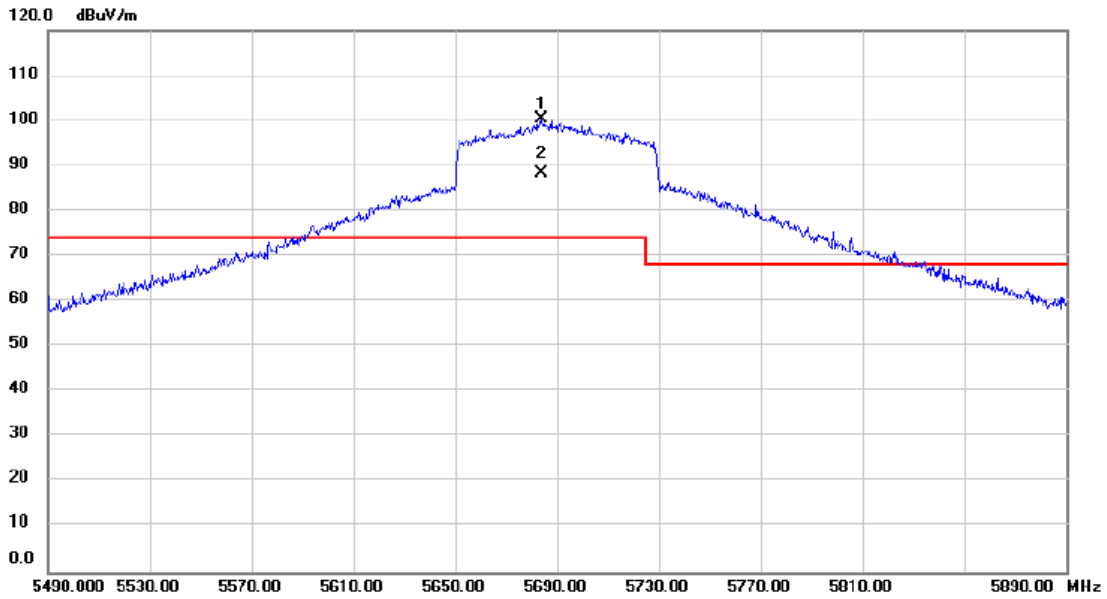


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	5683.600	97.86	2.35	100.21	74.00	26.21	peak			No Limit
2 X	5683.600	86.10	2.35	88.45	74.00	14.45	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/5/17
Test Frequency	5720Hz	Polarization	Vertical

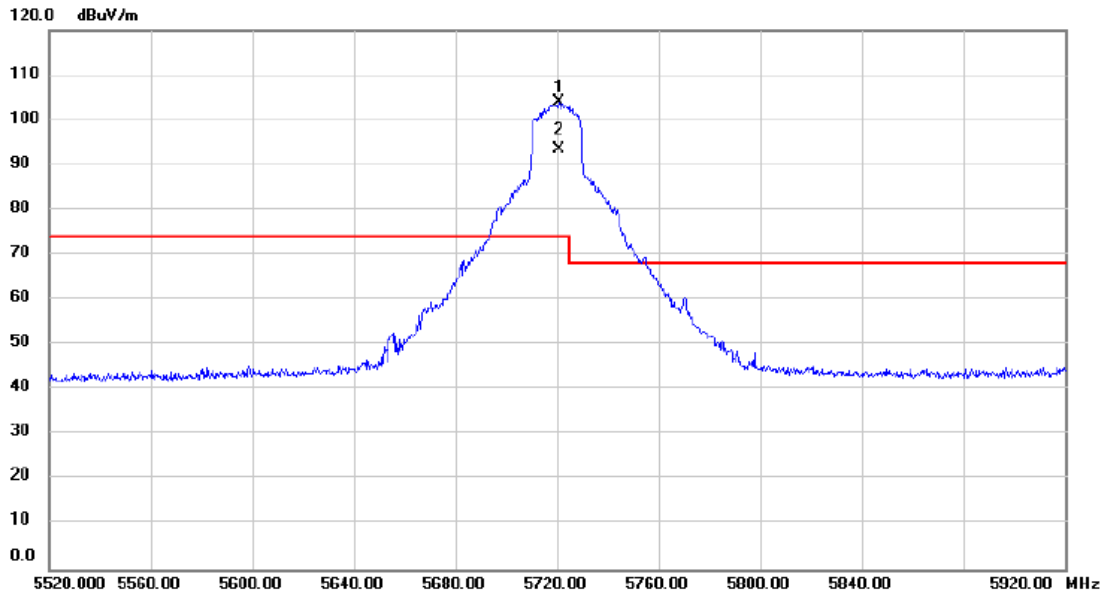


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5720.800	101.69	2.41	104.10	74.00	30.10	peak		No Limit
2	X	5720.800	90.93	2.41	93.34	74.00	19.34	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/5/17
Test Frequency	5710Hz	Polarization	Vertical

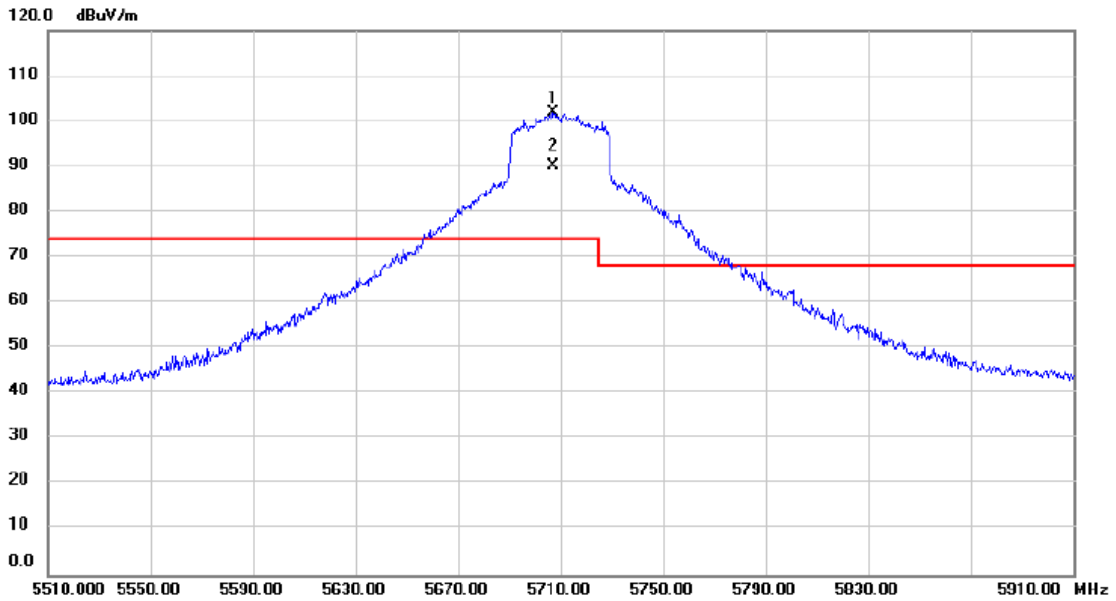


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5706.800	99.59	2.39	101.98	74.00	27.98	peak		No Limit
2	X	5706.800	87.81	2.39	90.20	74.00	16.20	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/5/17
Test Frequency	5690Hz	Polarization	Vertical

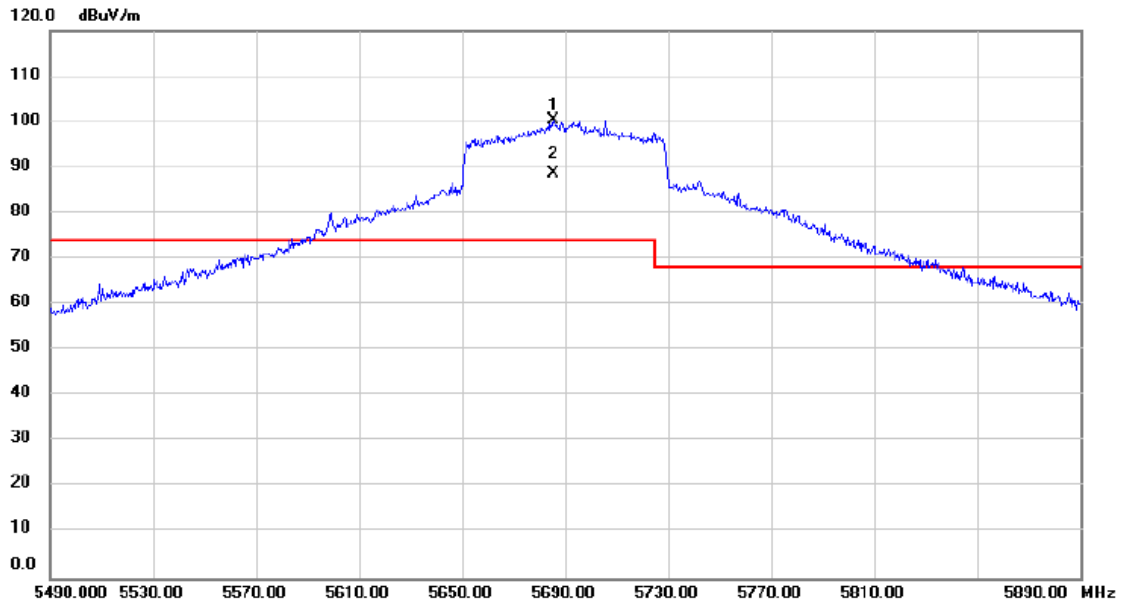


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5685.600	98.03	2.36	100.39	74.00	26.39	peak		No Limit
2	X	5685.600	86.26	2.36	88.62	74.00	14.62	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5180MHz	Polarization	Vertical

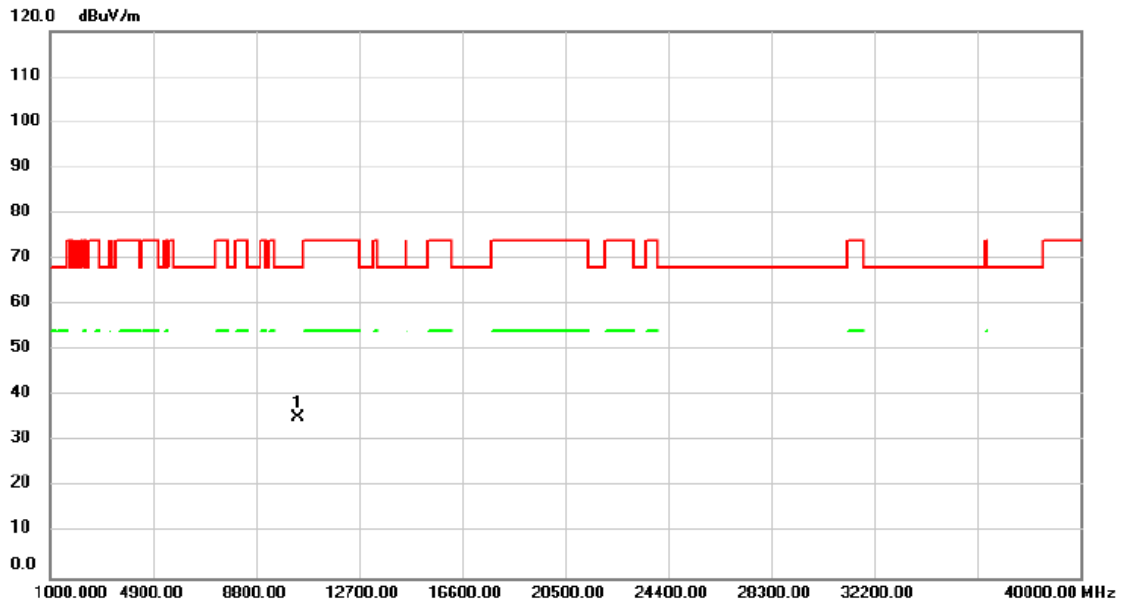


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10360.00	35.87	-0.60	35.27	68.20	-32.93	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5180MHz	Polarization	Horizontal

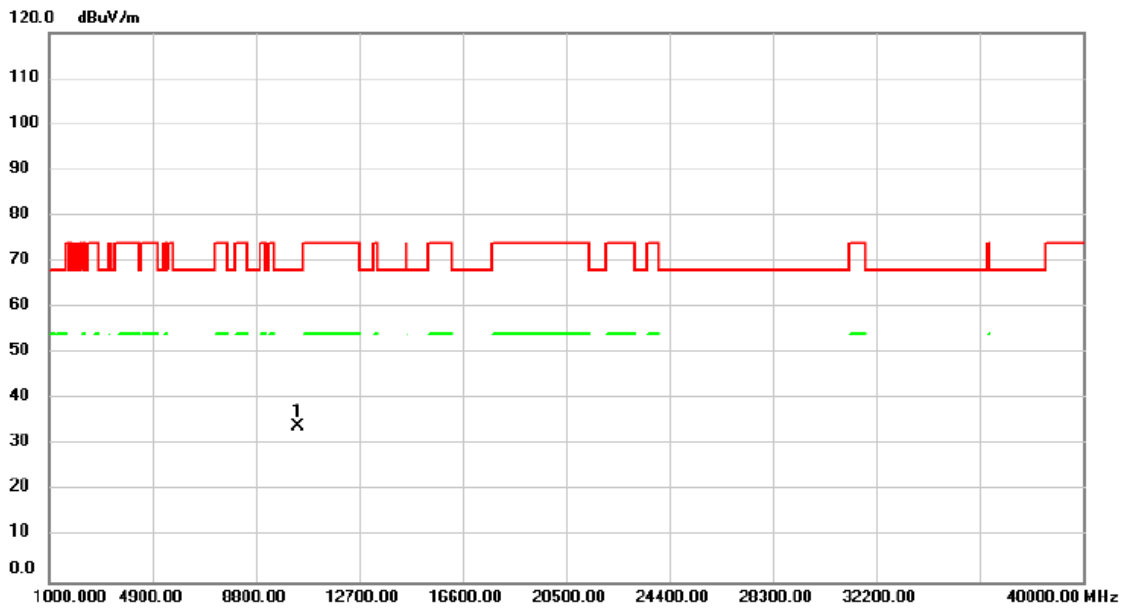


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.00	34.52	-0.60	33.92	68.20	-34.28			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5200MHz	Polarization	Vertical

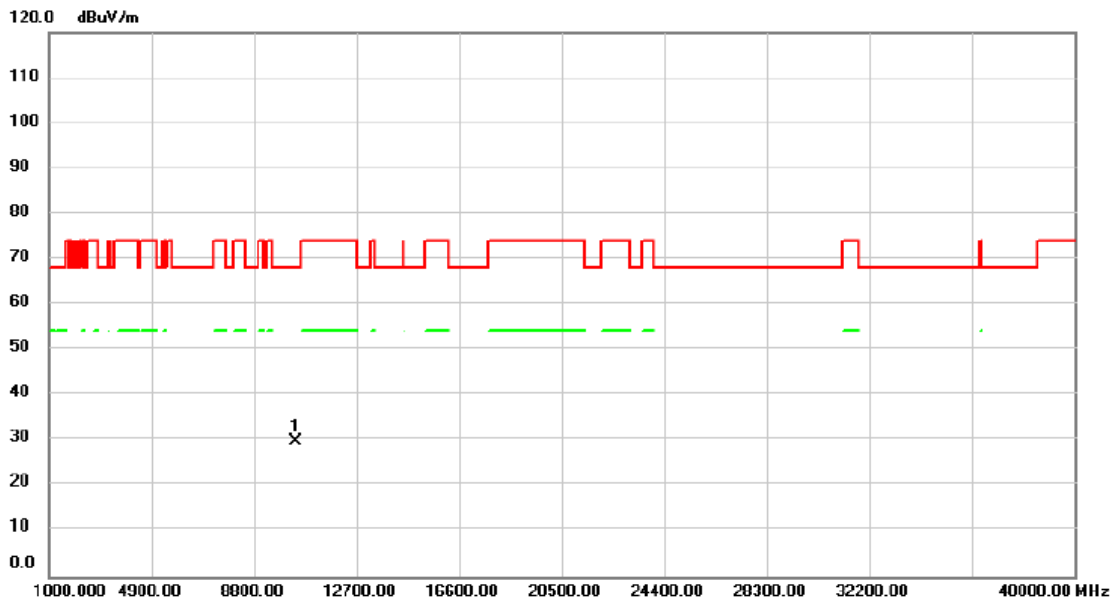


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.00	30.52	-0.55	29.97	68.20	-38.23	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5200MHz	Polarization	Horizontal

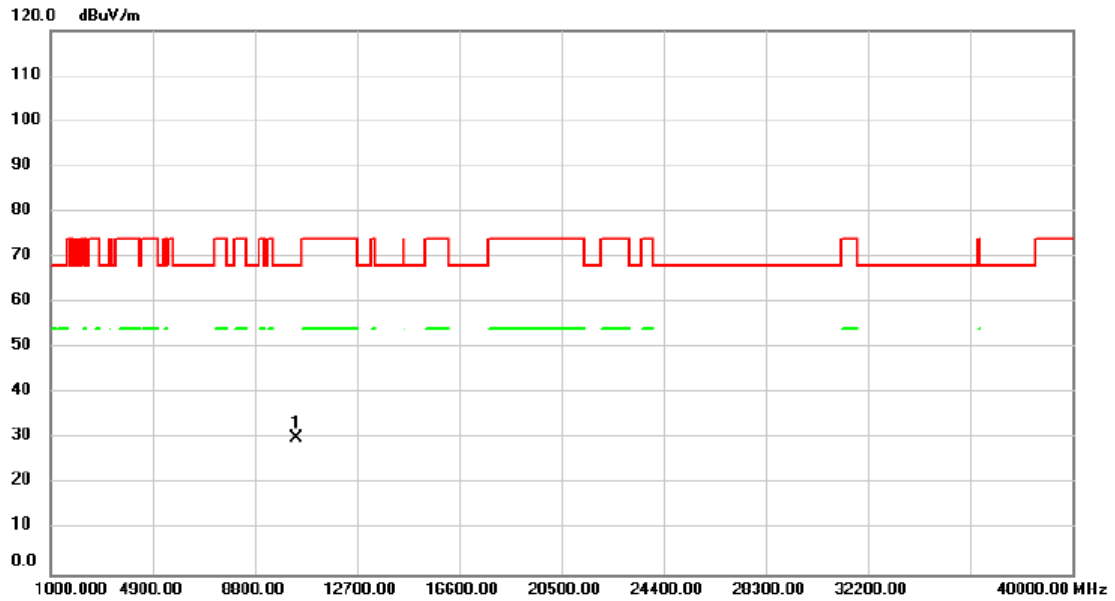


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10400.00	30.82	-0.55	30.27	68.20	-37.93			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5240MHz	Polarization	Vertical

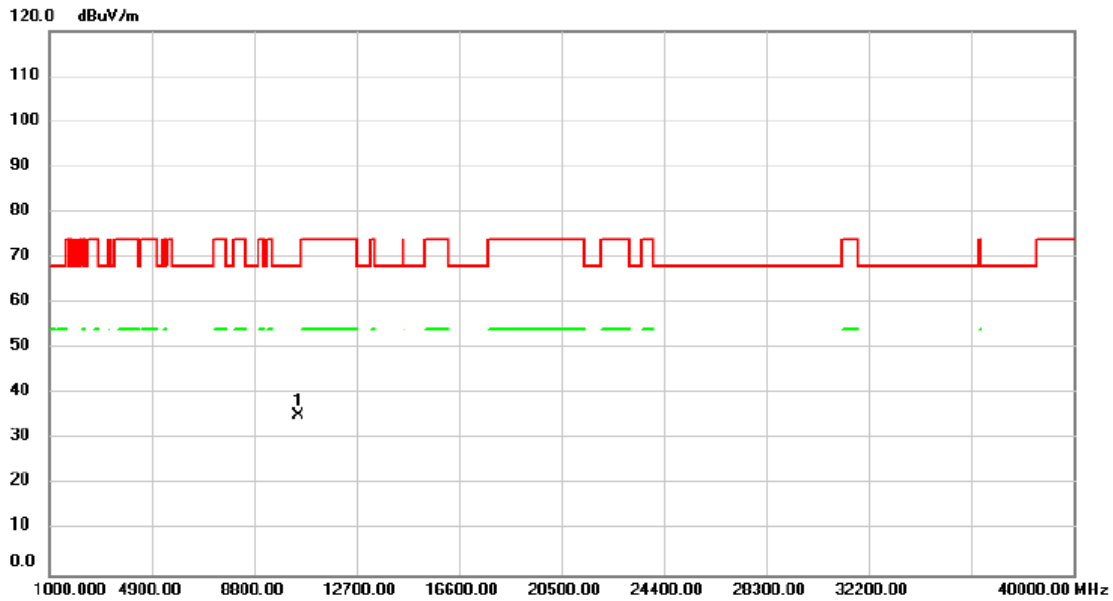


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10477.00	35.66	-0.47	35.19	68.20	-33.01			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5240MHz	Polarization	Horizontal

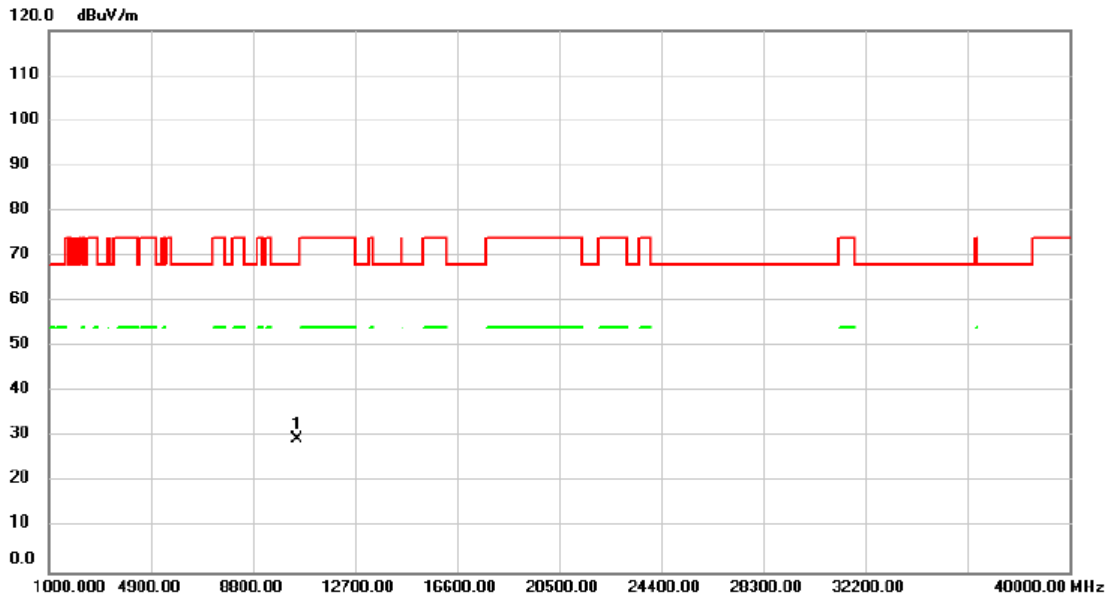


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	10480.00	29.95	-0.47	29.48	68.20	-38.72			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5260MHz	Polarization	Vertical

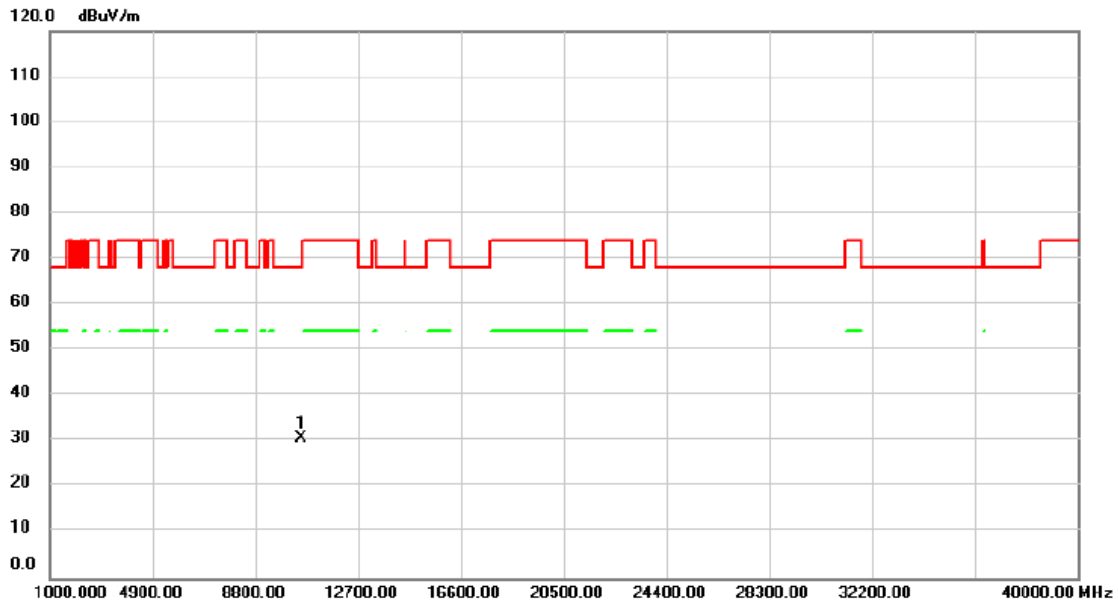


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10520.00	31.04	-0.44	30.60	68.20	-37.60			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5260MHz	Polarization	Horizontal

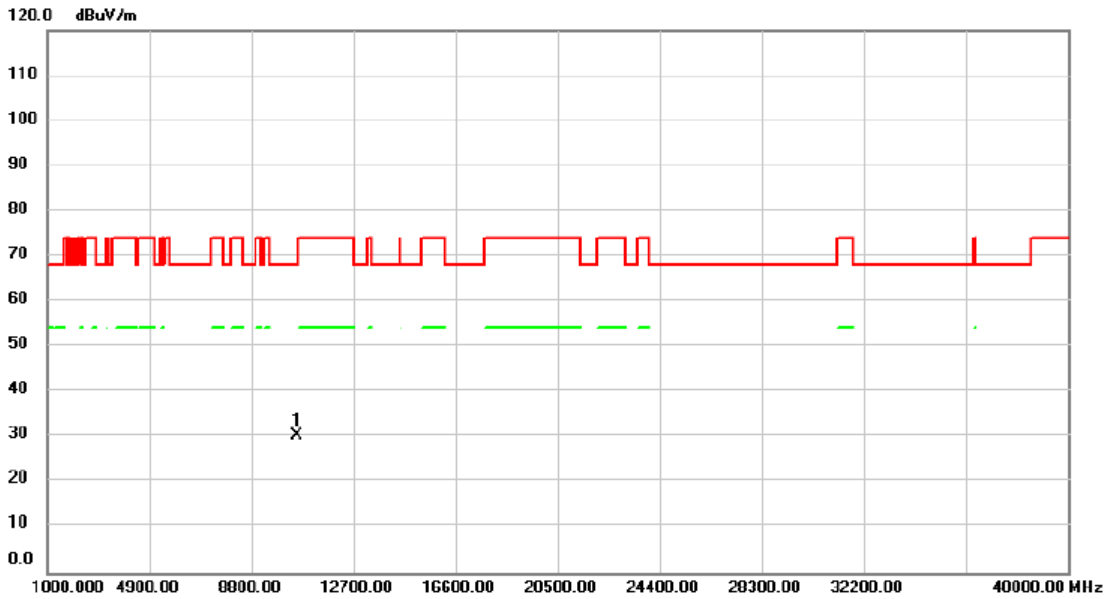


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10520.00	30.85	-0.44	30.41	68.20	-37.79			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5300MHz	Polarization	Vertical

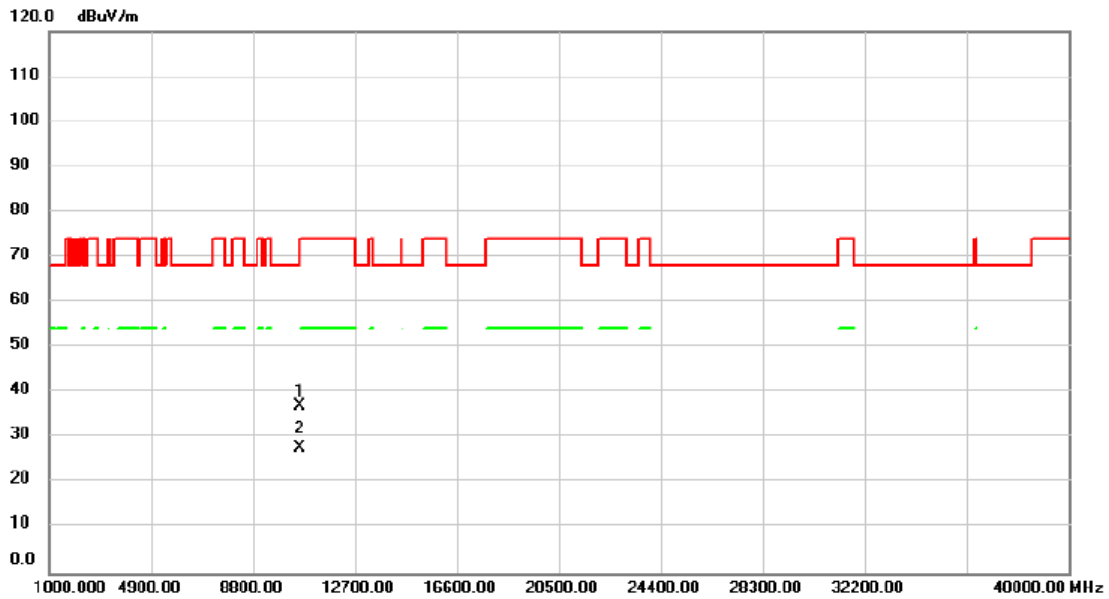


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10594.00	37.53	-0.42	37.11	68.20	-31.09			peak
2		10594.00	28.14	-0.42	27.72	68.20	-40.48			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5300MHz	Polarization	Horizontal

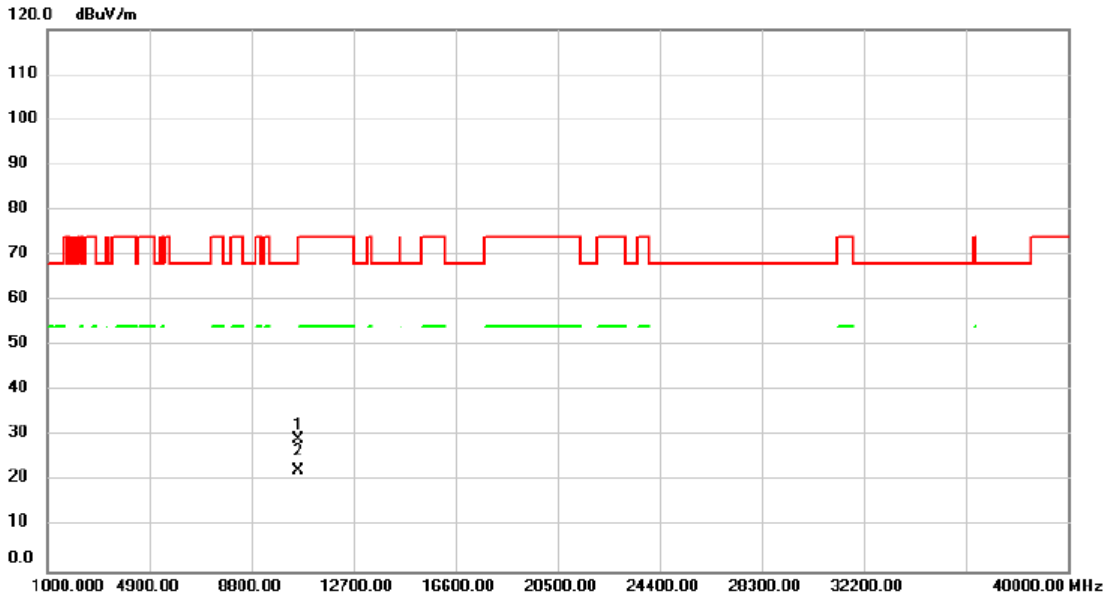


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10600.00	29.70	-0.41	29.29	68.20	-38.91			peak
2	*	10600.00	22.74	-0.41	22.33	54.00	-31.67			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5320MHz	Polarization	Vertical

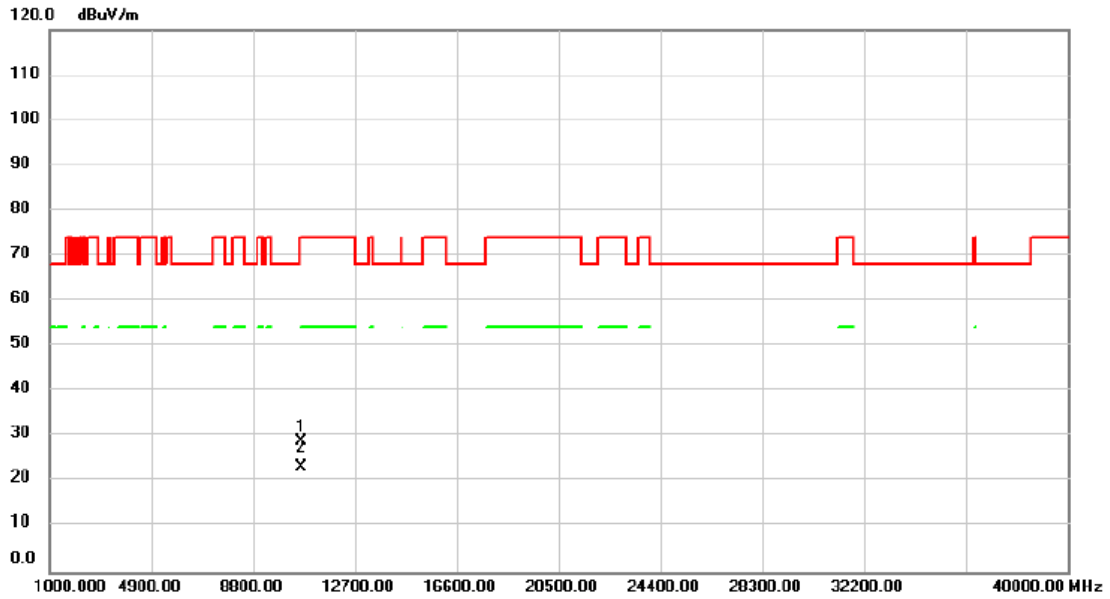


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	29.40	-0.41	28.99	74.00	-45.01			peak
2	*	10640.00	23.66	-0.41	23.25	54.00	-30.75			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5320MHz	Polarization	Horizontal

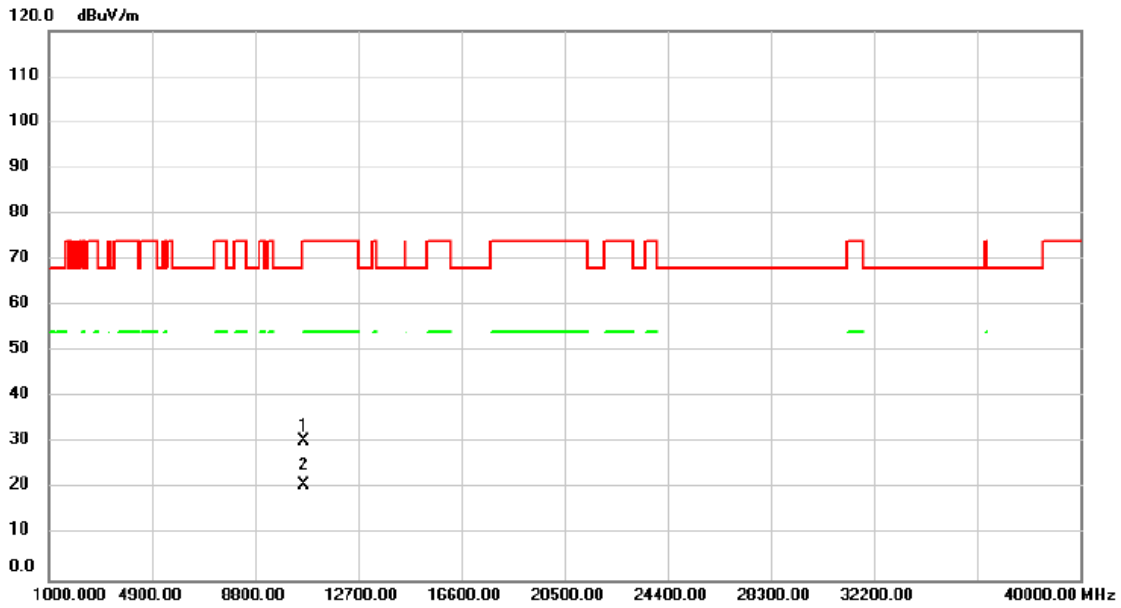


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	30.72	-0.41	30.31	74.00	-43.69	peak		
2	*	10640.00	21.26	-0.41	20.85	54.00	-33.15	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5500MHz	Polarization	Vertical

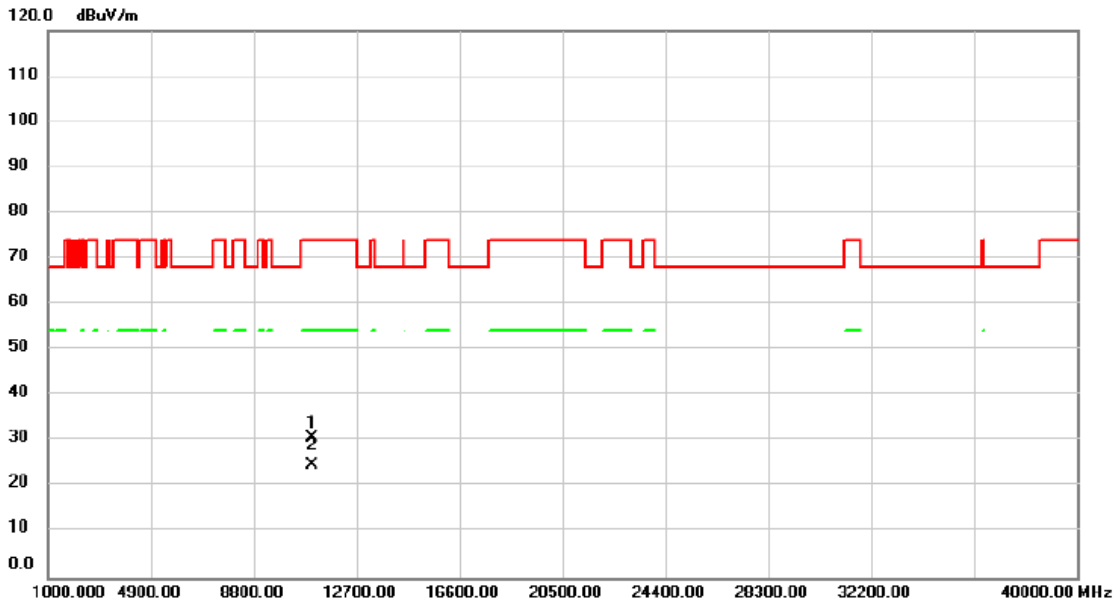


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11000.00	31.03	-0.27	30.76	74.00	-43.24	peak			
2	*	11000.00	24.94	-0.27	24.67	54.00	-29.33	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5500MHz	Polarization	Horizontal

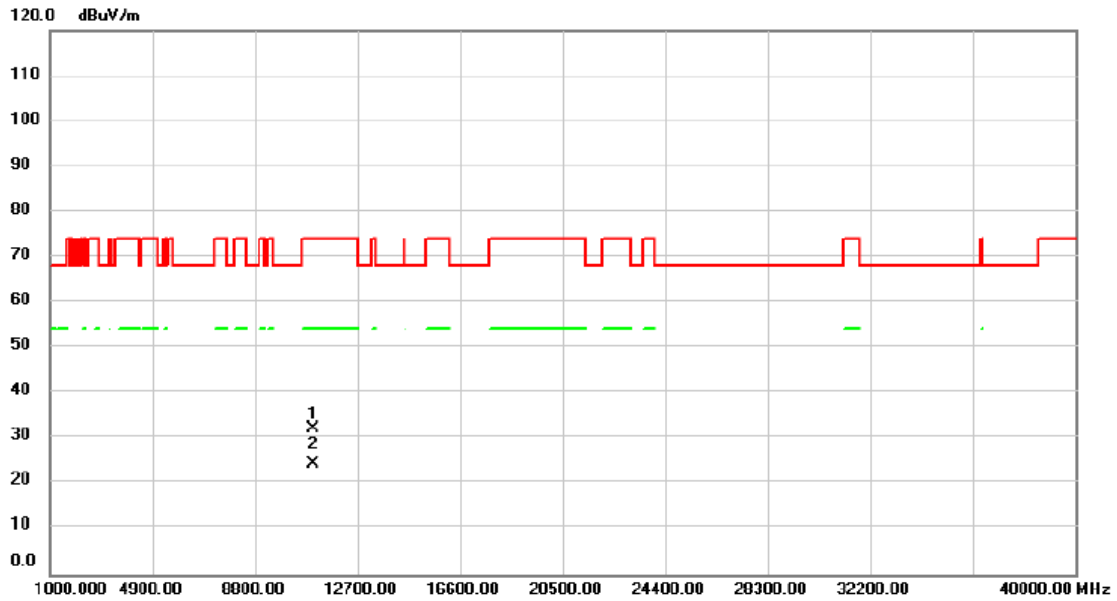


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11000.00	32.42	-0.27	32.15	74.00	-41.85	peak			
2	*	11000.00	24.72	-0.27	24.45	54.00	-29.55	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5580MHz	Polarization	Vertical

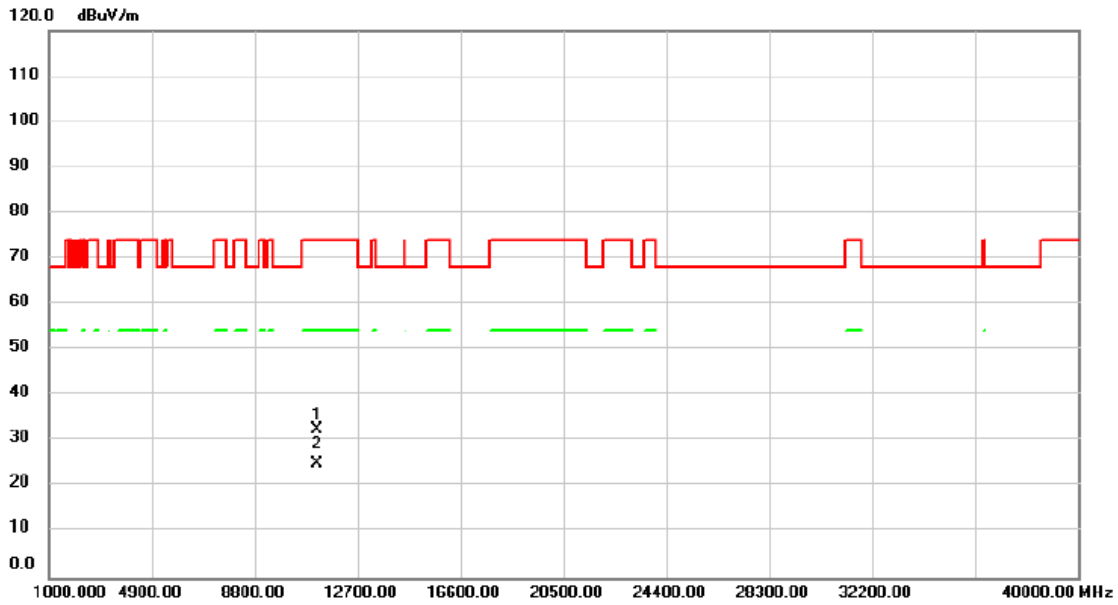


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11160.00	32.51	0.08	32.59	74.00	-41.41			peak
2	*	11160.00	24.98	0.08	25.06	54.00	-28.94			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5580MHz	Polarization	Horizontal

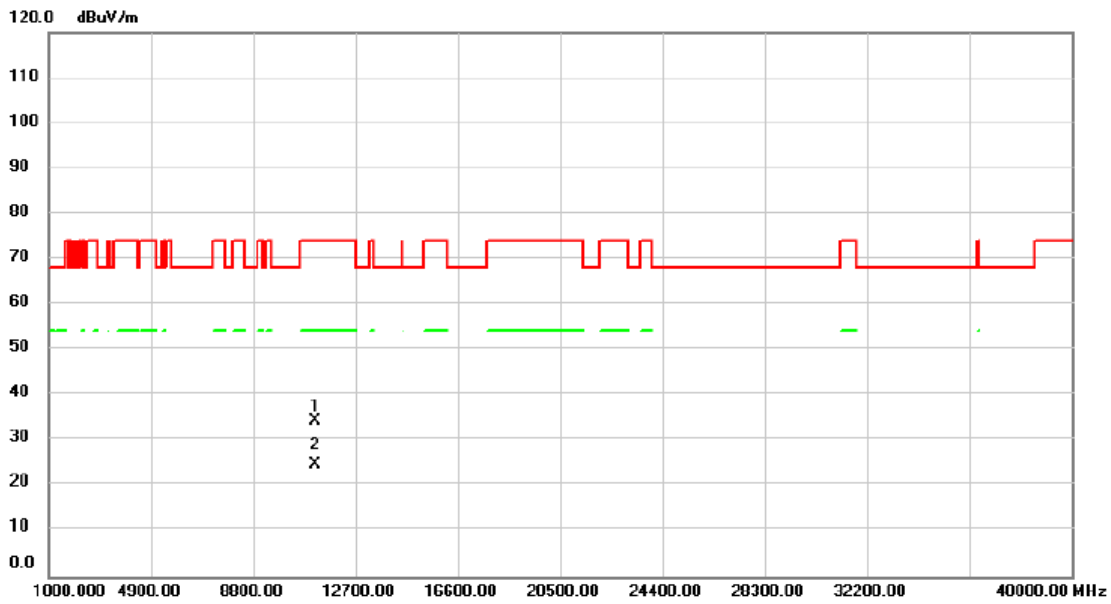


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11160.00	34.16	0.08	34.24	74.00	-39.76			peak
2	*	11160.00	24.72	0.08	24.80	54.00	-29.20			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5700MHz	Polarization	Vertical

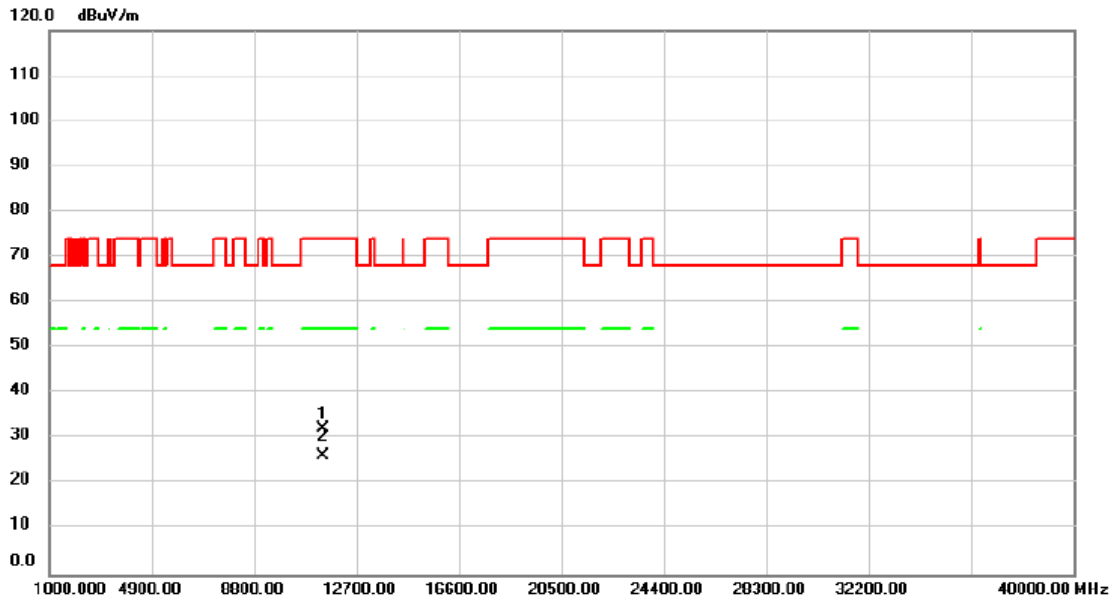


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11400.00	31.52	0.61	32.13	74.00	-41.87	peak			
2	*	11400.00	25.61	0.61	26.22	54.00	-27.78	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5700MHz	Polarization	Horizontal

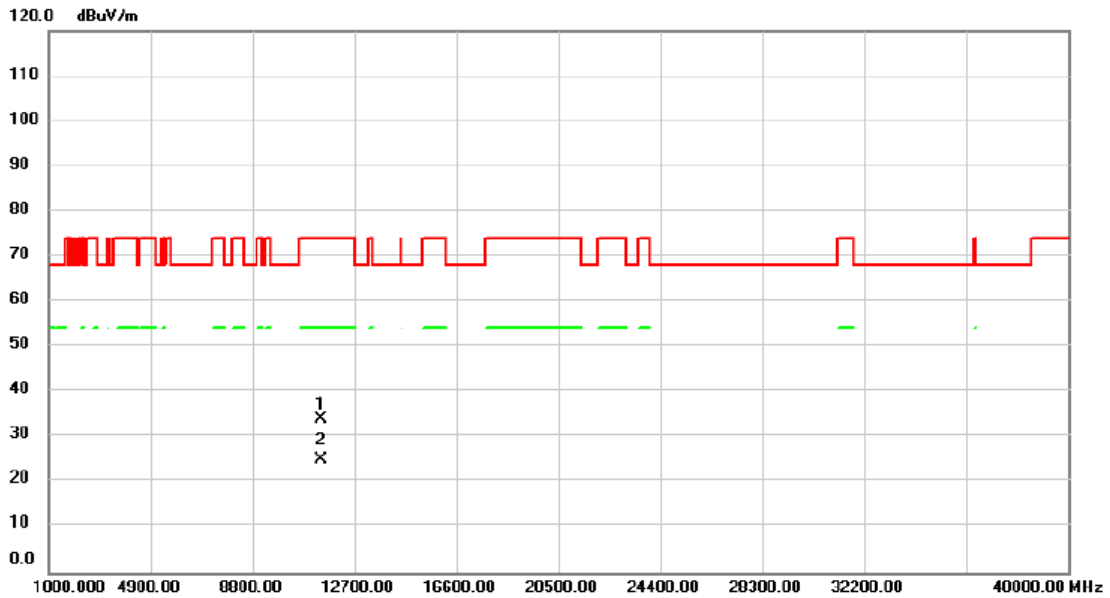


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11400.00	33.32	0.61	33.93	74.00	-40.07	peak			
2 *	11400.00	24.45	0.61	25.06	54.00	-28.94	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5745MHz	Polarization	Vertical

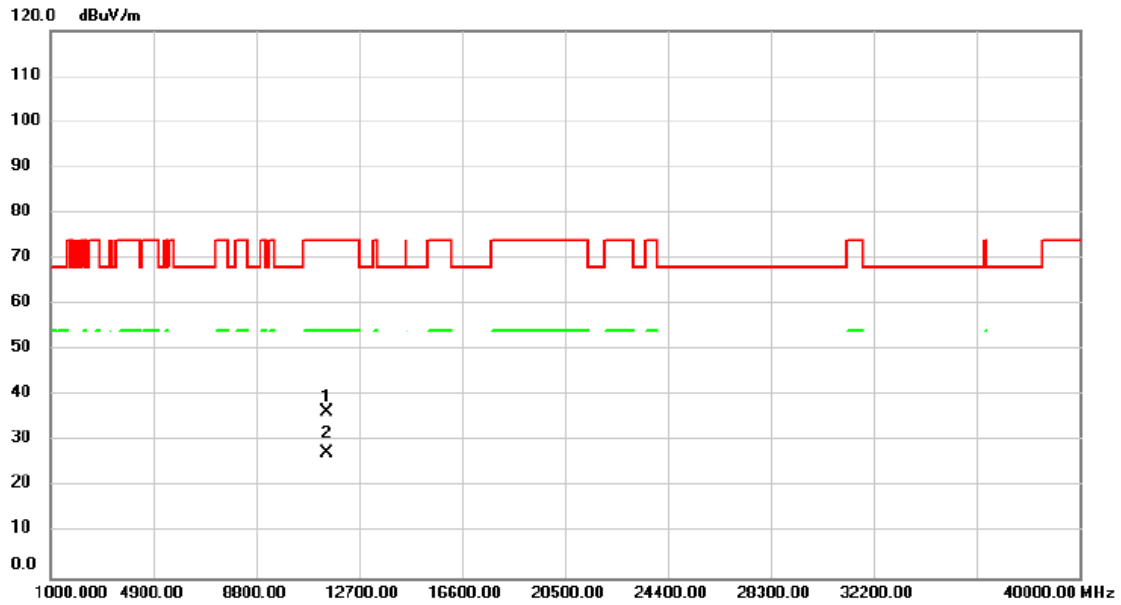


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11490.00	35.68	0.82	36.50	74.00	-37.50	peak		
2	*	11490.00	26.65	0.82	27.47	54.00	-26.53	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5745MHz	Polarization	Horizontal

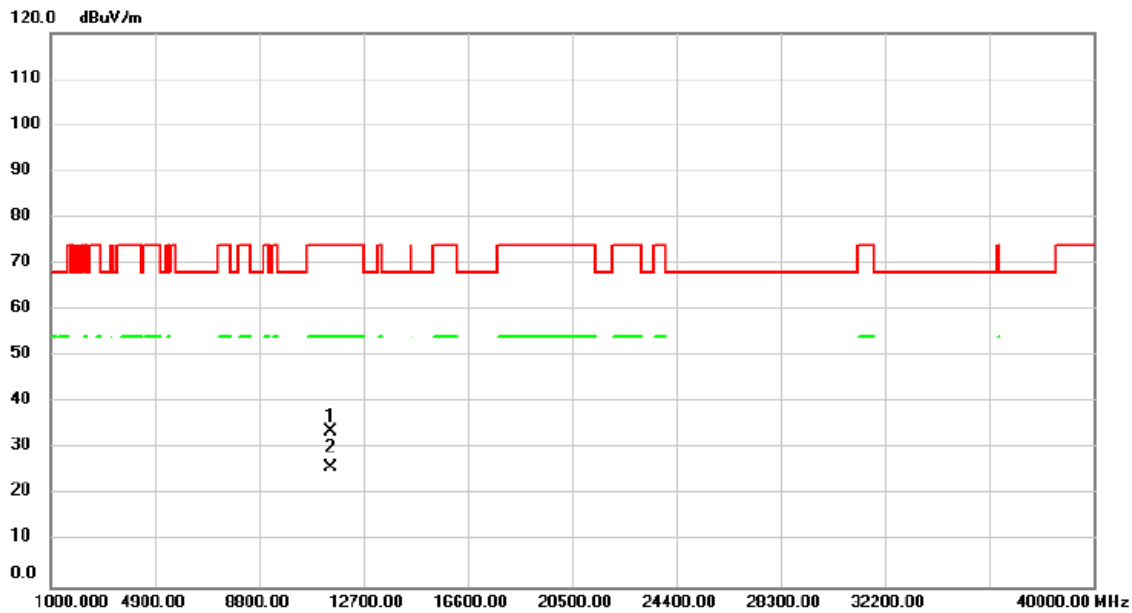


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11490.00	32.91	0.82	33.73	74.00	-40.27			peak
2	*	11490.00	25.09	0.82	25.91	54.00	-28.09			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5785MHz	Polarization	Vertical

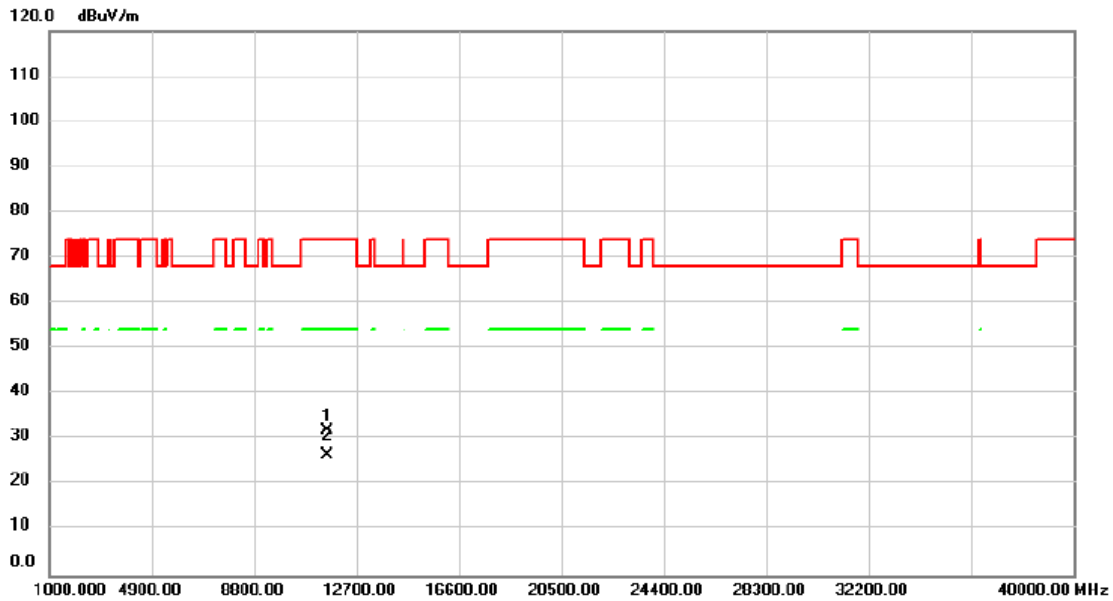


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11570.00	31.02	0.83	31.85	74.00	-42.15			peak
2	*	11570.00	25.76	0.83	26.59	54.00	-27.41			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5785MHz	Polarization	Horizontal

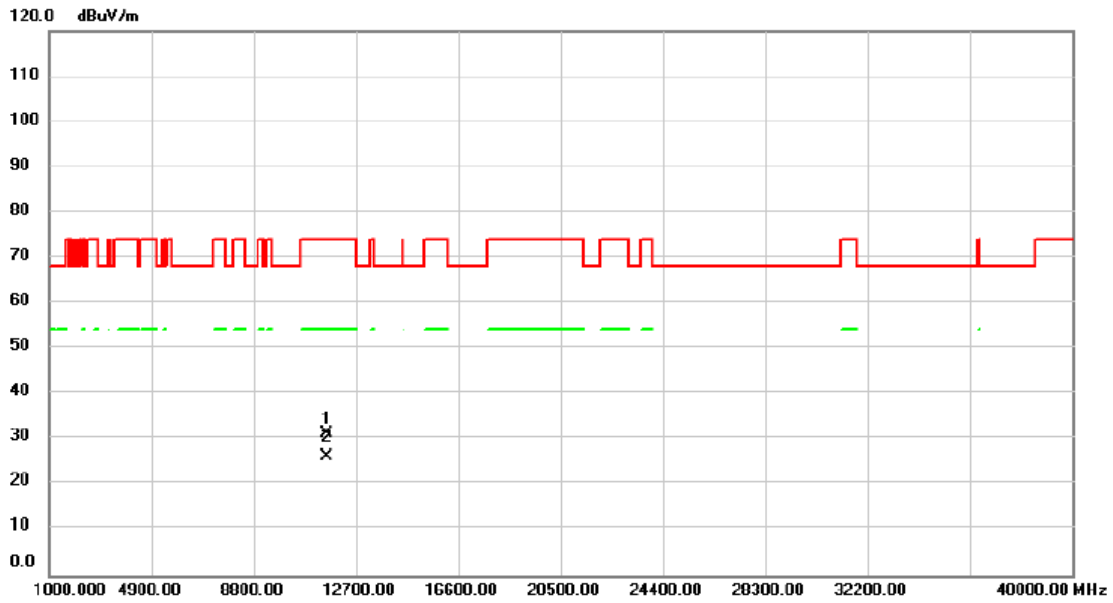


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11570.00	30.56	0.83	31.39	74.00	-42.61	peak		
2	*	11570.00	25.39	0.83	26.22	54.00	-27.78	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5825MHz	Polarization	Vertical

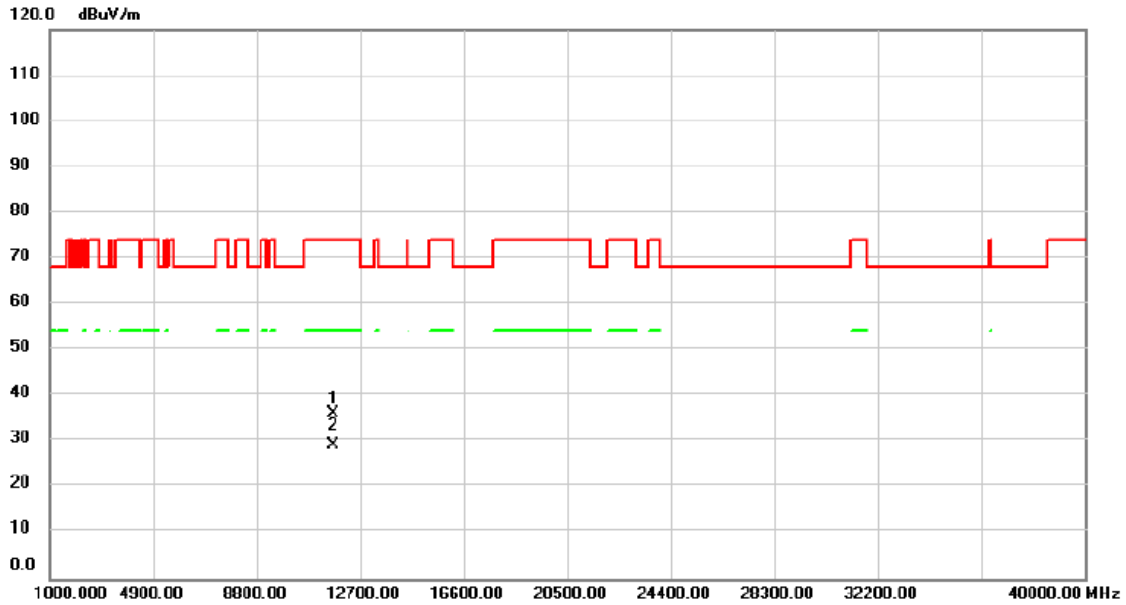


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11660.00	35.37	0.83	36.20	74.00	-37.80	peak		
2	*	11660.00	28.43	0.83	29.26	54.00	-24.74	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/2
Test Frequency	5825MHz	Polarization	Horizontal

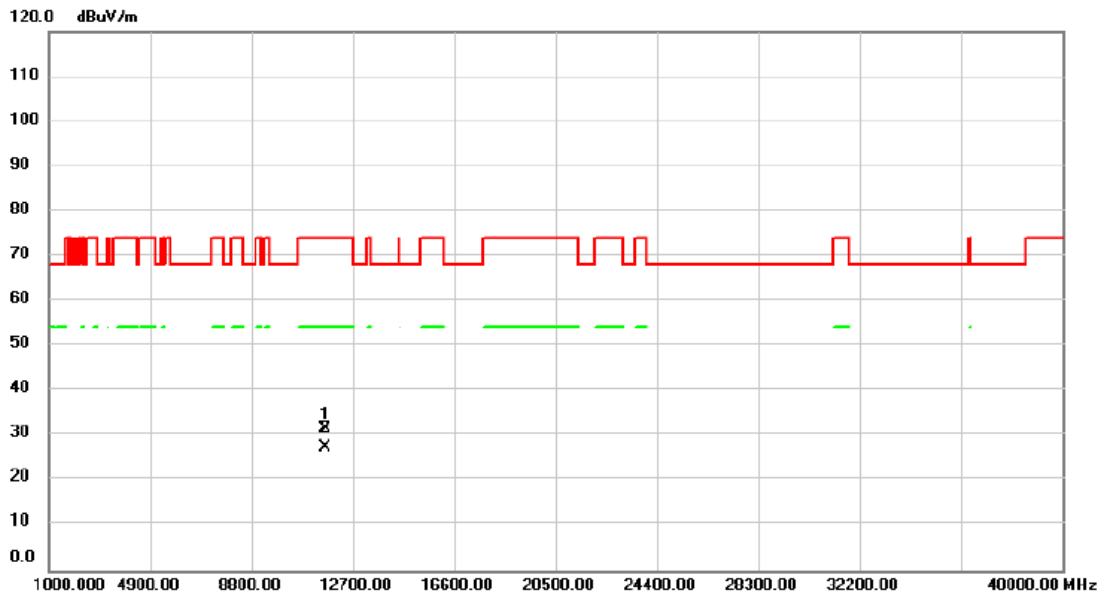


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11650.00	30.80	0.83	31.63	74.00	-42.37	peak			
2 *	11650.00	26.59	0.83	27.42	54.00	-26.58	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5180MHz	Polarization	Vertical

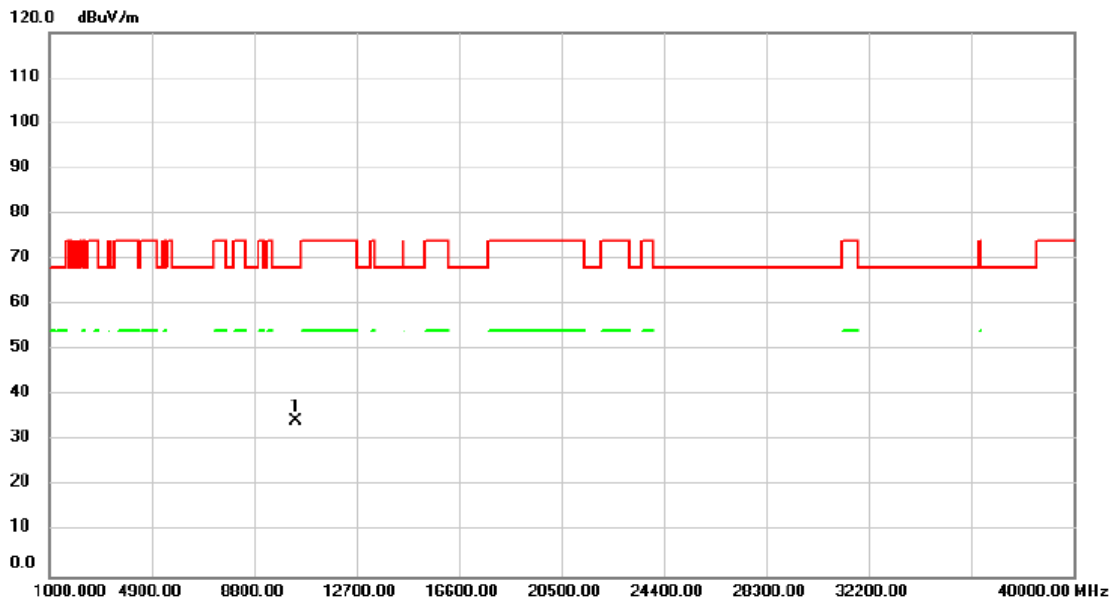


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.00	35.06	-0.60	34.46	68.20	-33.74			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5180MHz	Polarization	Horizontal

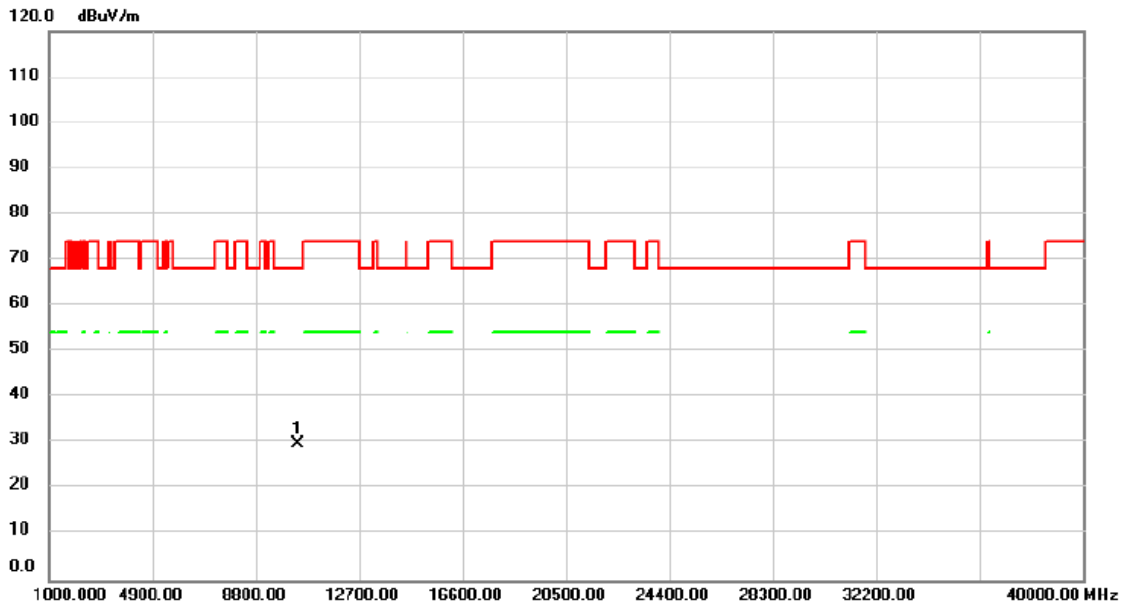


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.00	30.52	-0.55	29.97	68.20	-38.23			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5200MHz	Polarization	Vertical

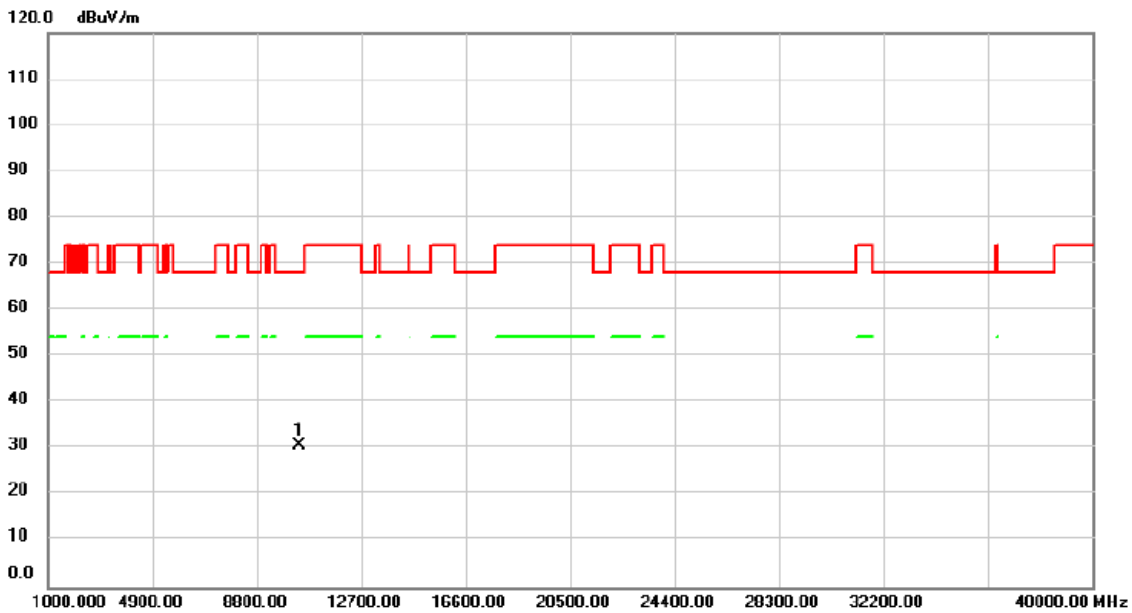


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.00	31.32	-0.55	30.77	68.20	-37.43			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5200MHz	Polarization	Horizontal

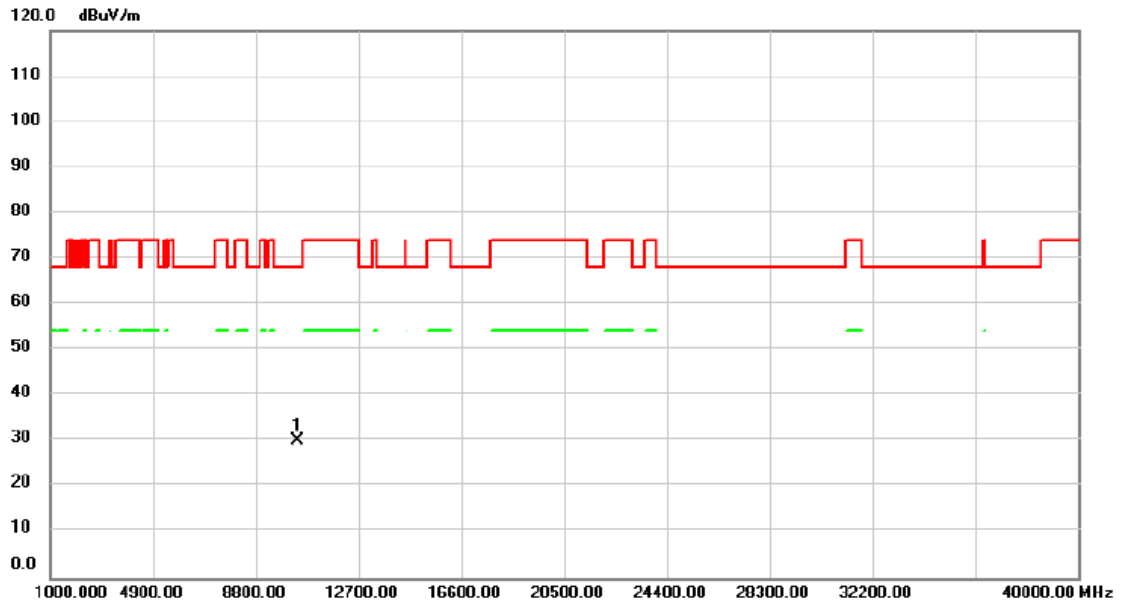


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10360.00	30.80	-0.60	30.20	68.20	-38.00			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5240MHz	Polarization	Vertical

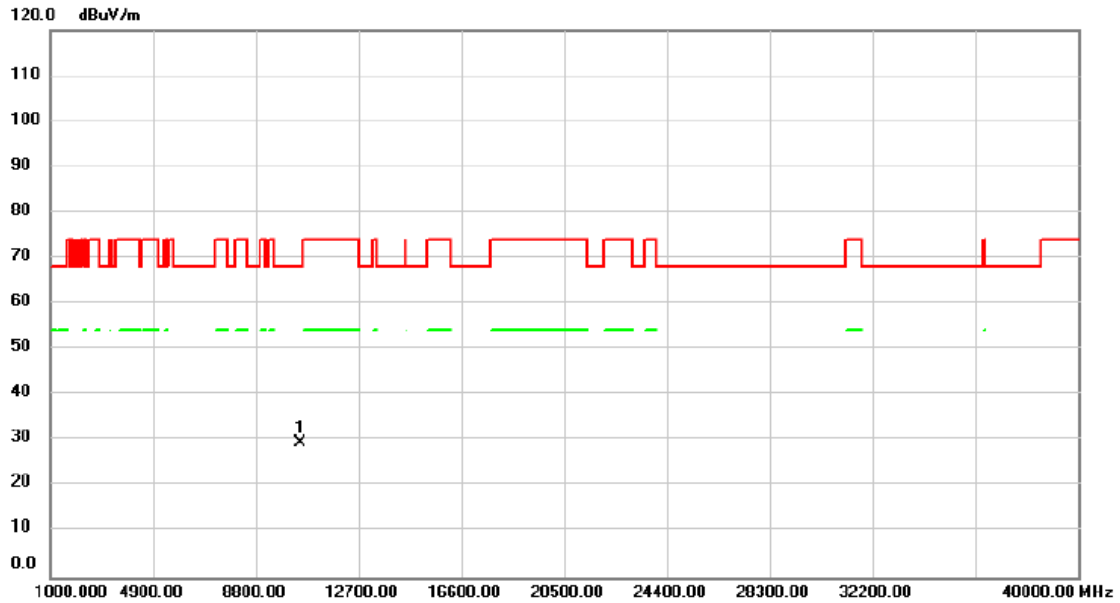


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.00	30.06	-0.47	29.59	68.20	-38.61			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5240MHz	Polarization	Horizontal

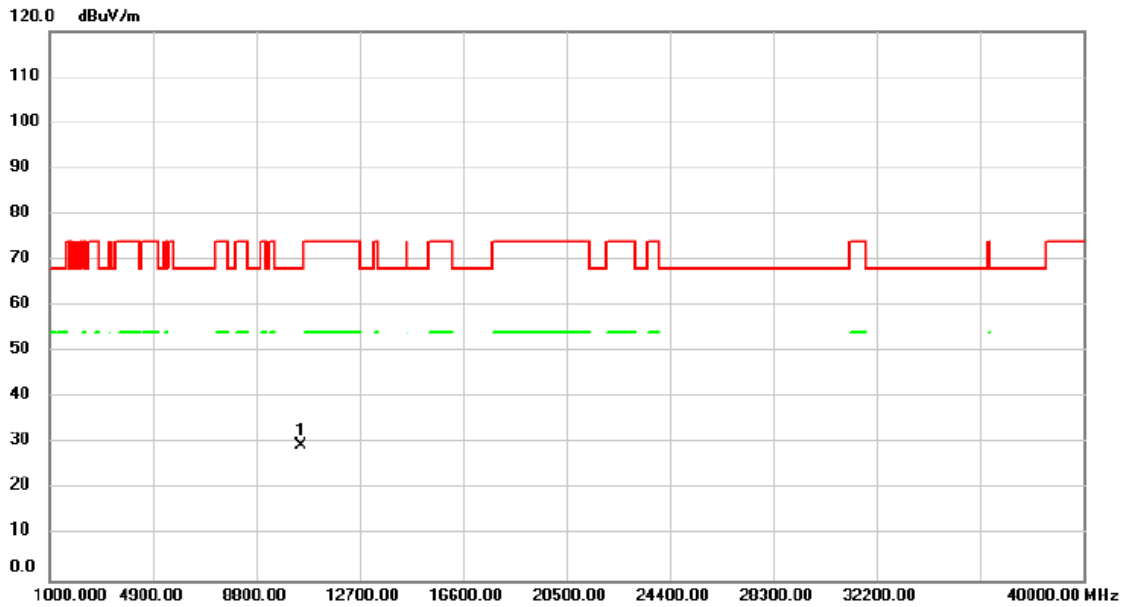


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.00	29.99	-0.47	29.52	68.20	-38.68			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5260MHz	Polarization	Vertical

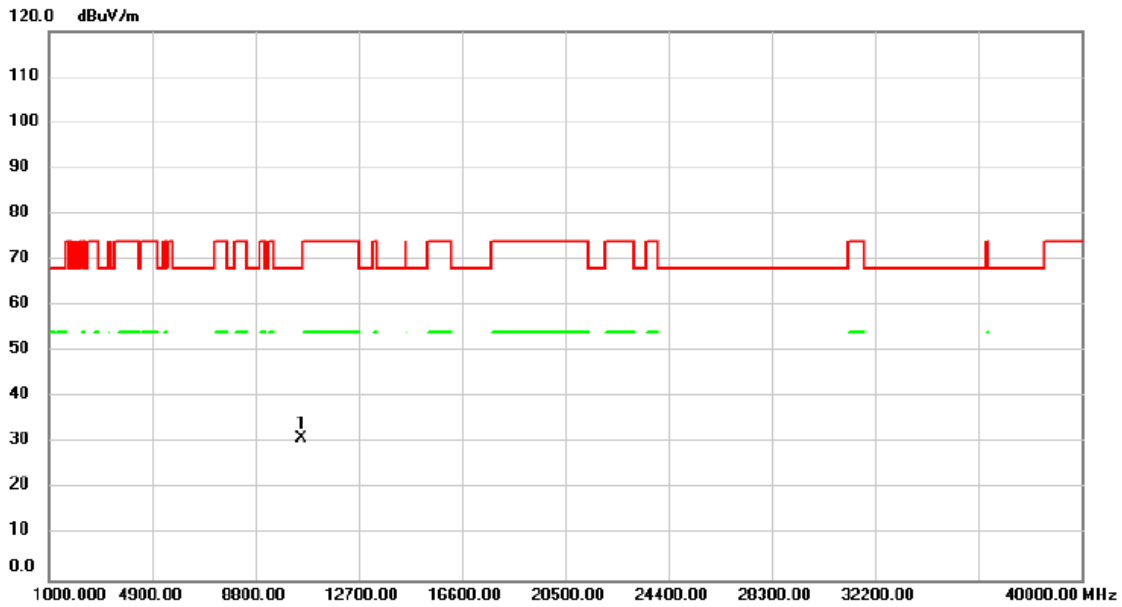


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	31.45	-0.44	31.01	68.20	-37.19			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5260MHz	Polarization	Horizontal

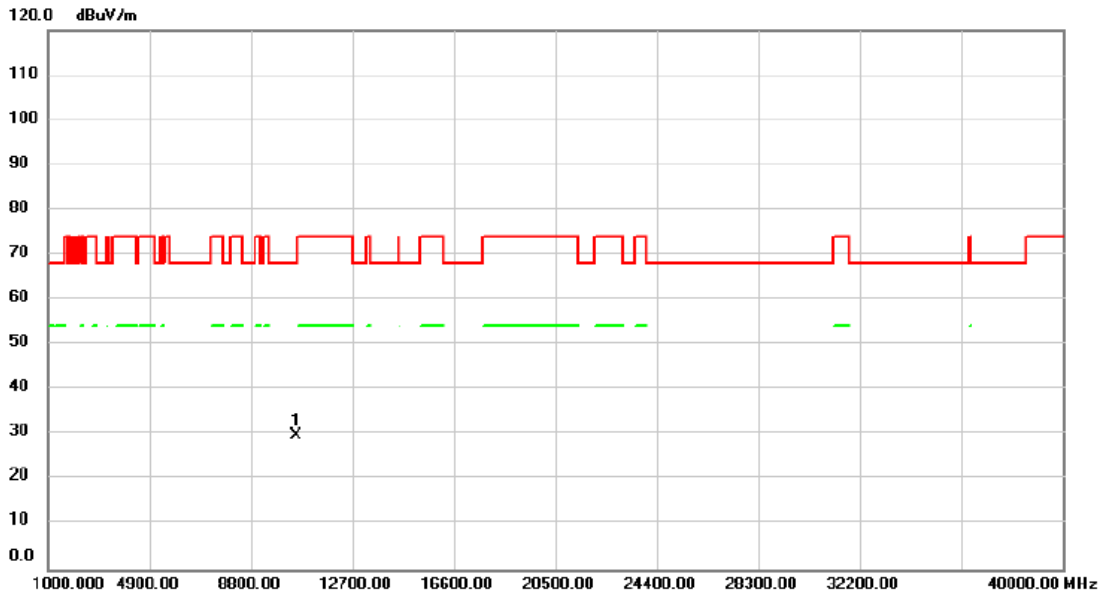


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	30.39	-0.44	29.95	68.20	-38.25			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5300MHz	Polarization	Vertical

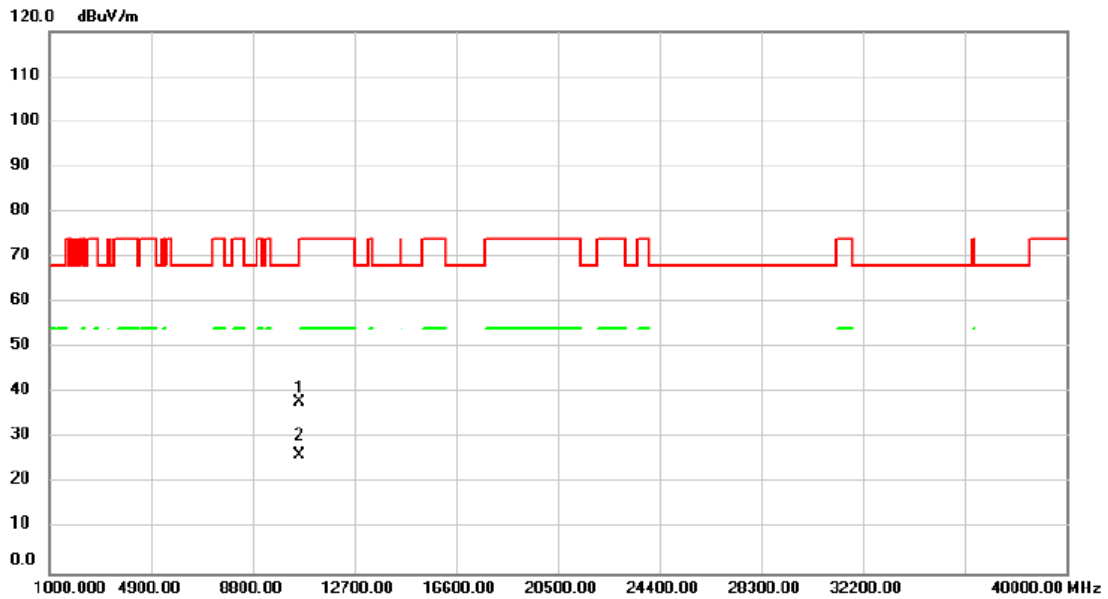


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10594.00	38.32	-0.42	37.90	68.20	-30.30			peak
2		10594.00	26.54	-0.42	26.12	68.20	-42.08			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5300MHz	Polarization	Horizontal

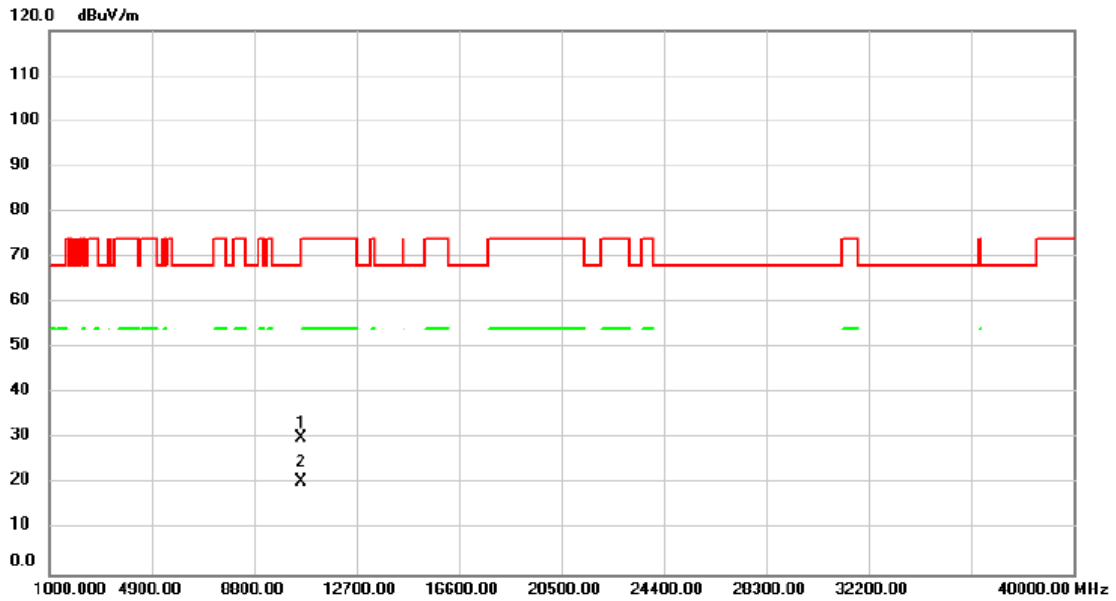


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		10600.00	30.71	-0.41	30.30	68.20	-37.90	peak			
2	*	10600.00	21.11	-0.41	20.70	54.00	-33.30	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5320MHz	Polarization	Vertical

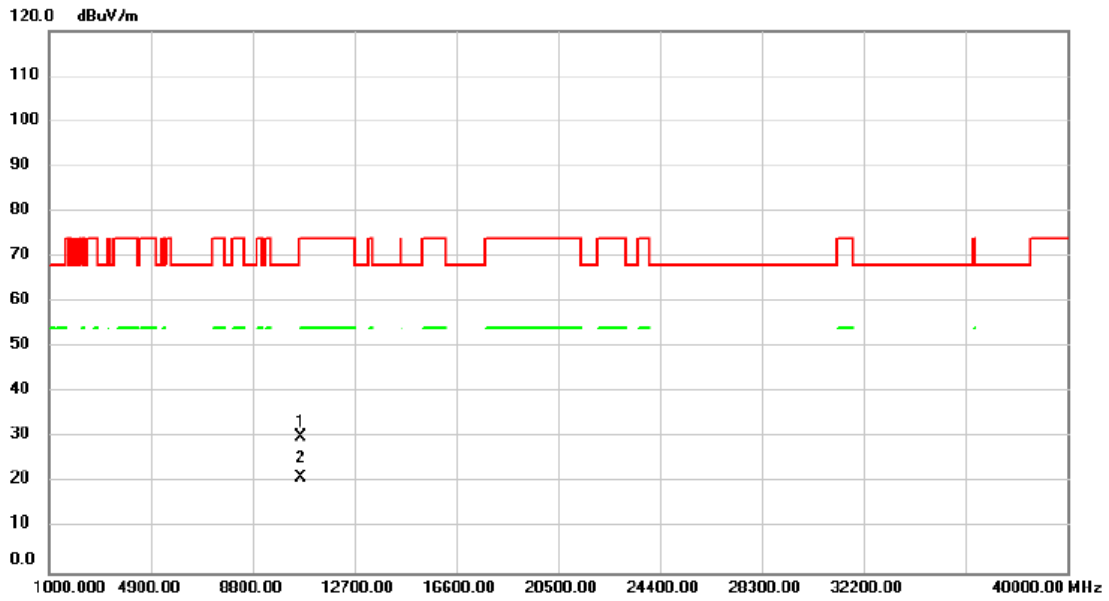


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	30.65	-0.41	30.24	74.00	-43.76			peak
2	*	10640.00	21.50	-0.41	21.09	54.00	-32.91			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5320MHz	Polarization	Horizontal

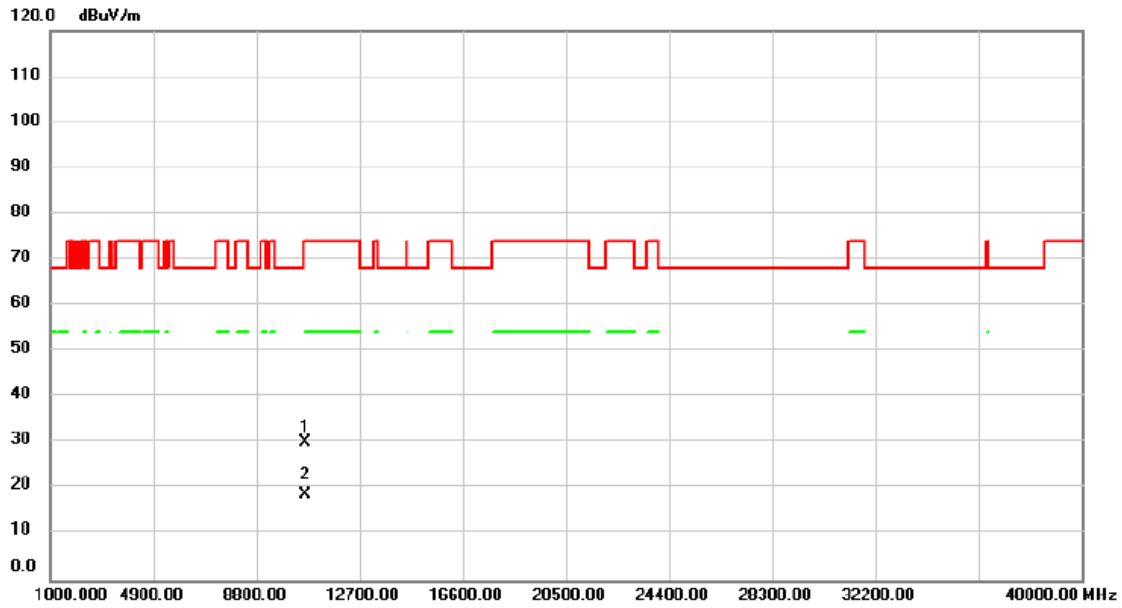


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		10640.00	30.56	-0.41	30.15	74.00	-43.85	peak			
2	*	10640.00	19.17	-0.41	18.76	54.00	-35.24	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5500MHz	Polarization	Vertical

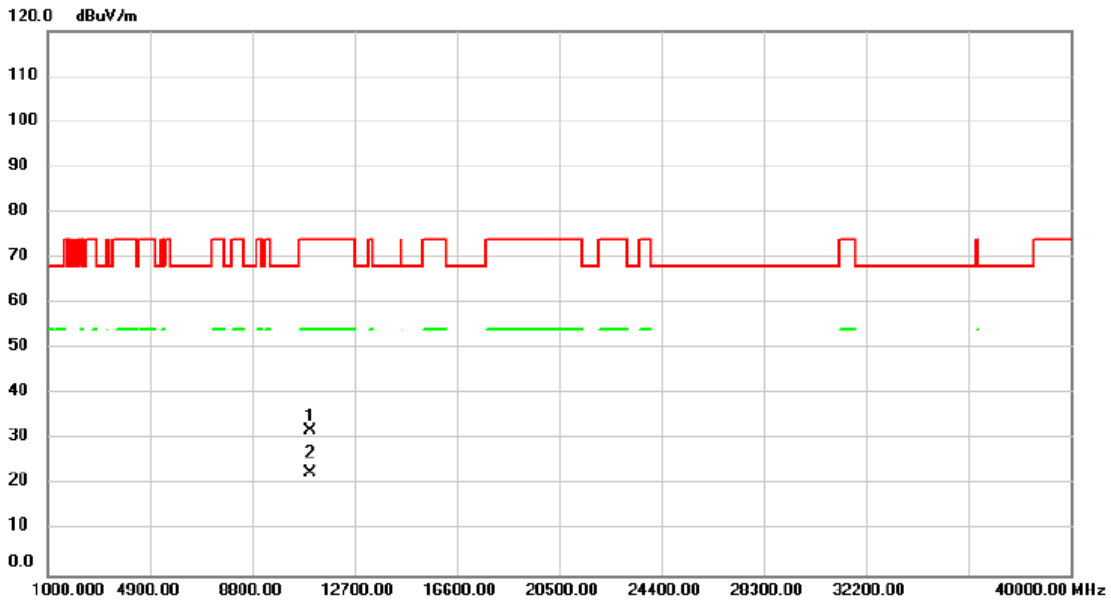


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11000.00	32.23	-0.27	31.96	74.00	-42.04	peak		
2	*	11000.00	22.80	-0.27	22.53	54.00	-31.47	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5500MHz	Polarization	Horizontal

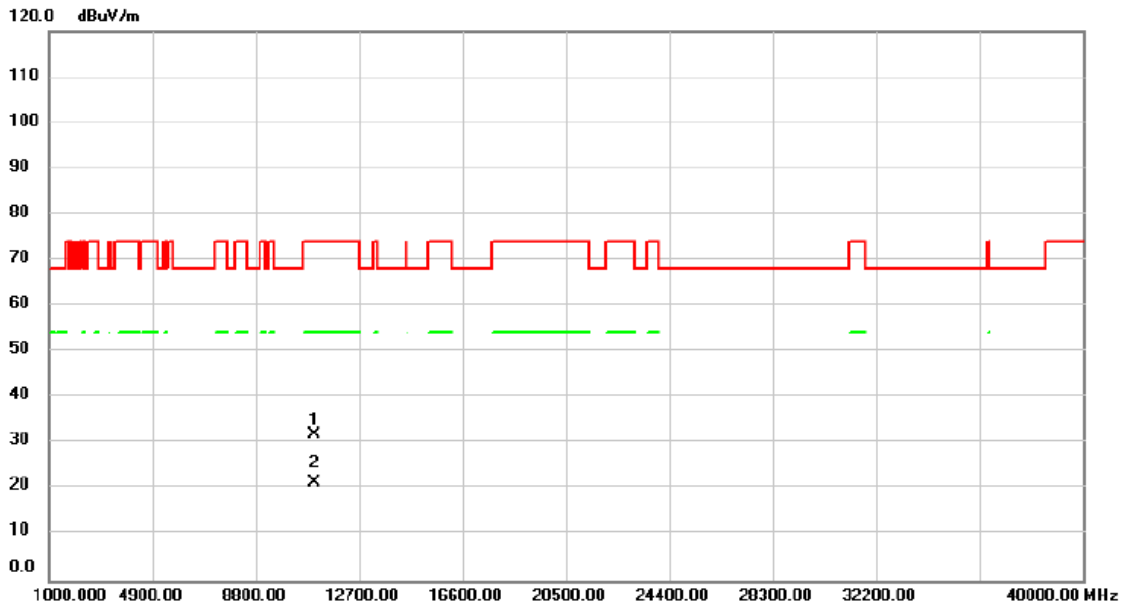


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11000.00	32.24	-0.27	31.97	74.00	-42.03	peak			
2	*	11000.00	21.86	-0.27	21.59	54.00	-32.41	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5580MHz	Polarization	Vertical

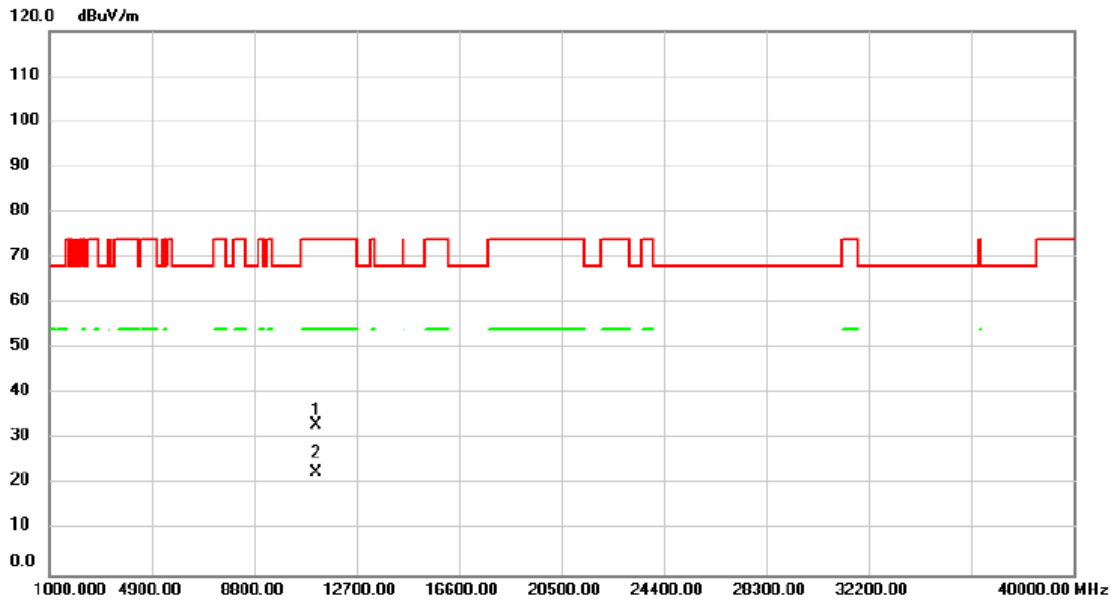


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11160.00	33.12	0.08	33.20	74.00	-40.80			peak
2	*	11160.00	22.48	0.08	22.56	54.00	-31.44			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5580MHz	Polarization	Horizontal

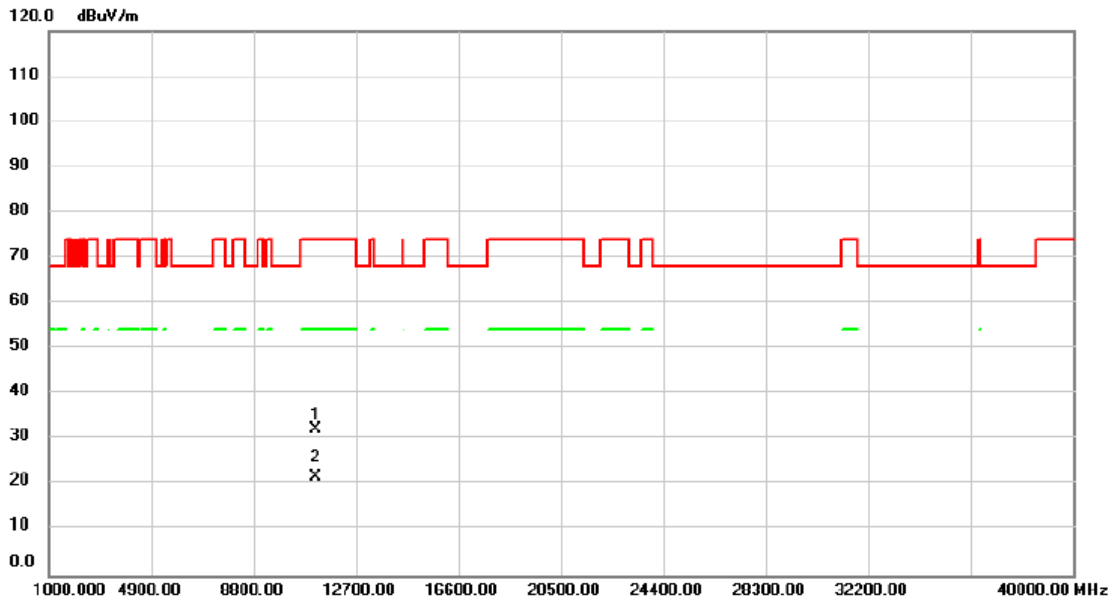


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11160.00	32.12	0.08	32.20	74.00	-41.80	peak			
2 *	11160.00	21.59	0.08	21.67	54.00	-32.33	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5700MHz	Polarization	Vertical

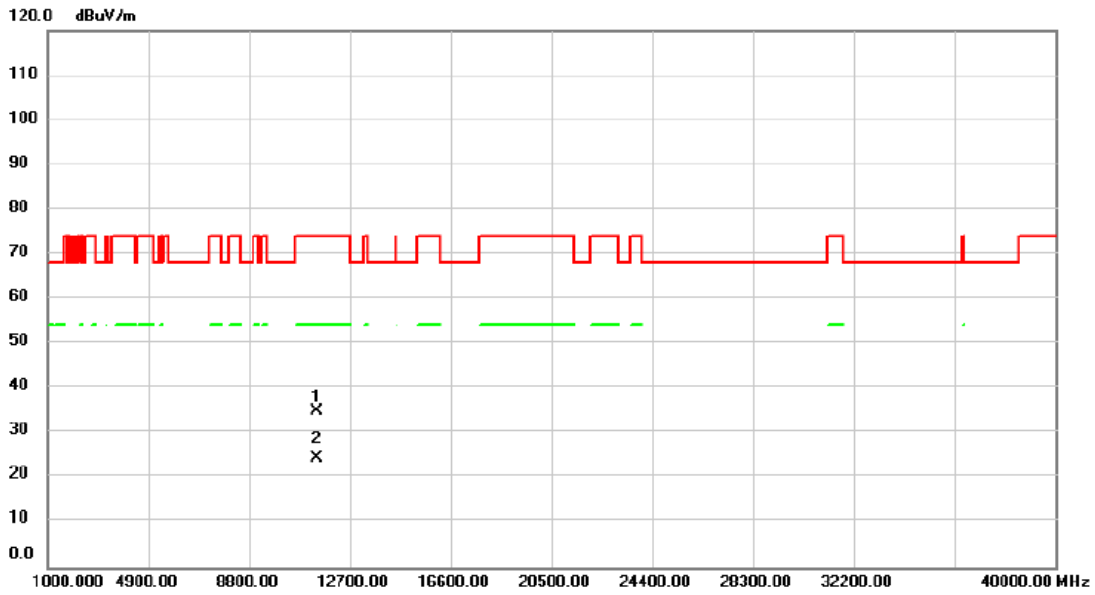


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11400.00	34.36	0.61	34.97	74.00	-39.03			peak
2	*	11400.00	23.95	0.61	24.56	54.00	-29.44			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5700MHz	Polarization	Horizontal

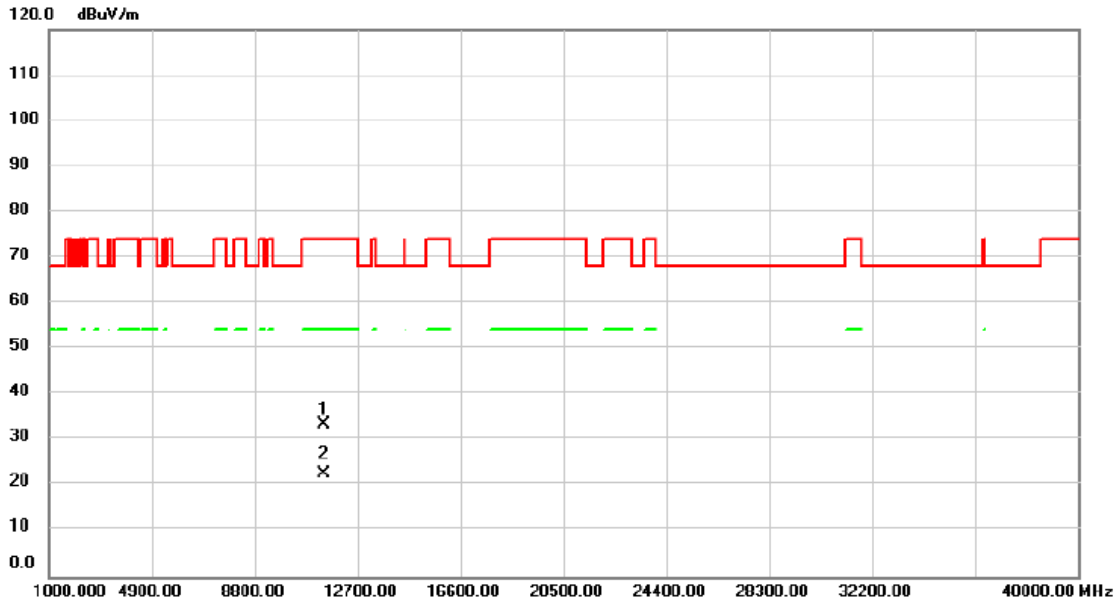


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11400.00	32.80	0.61	33.41	74.00	-40.59	peak			
2	*	11400.00	22.05	0.61	22.66	54.00	-31.34	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5745MHz	Polarization	Vertical

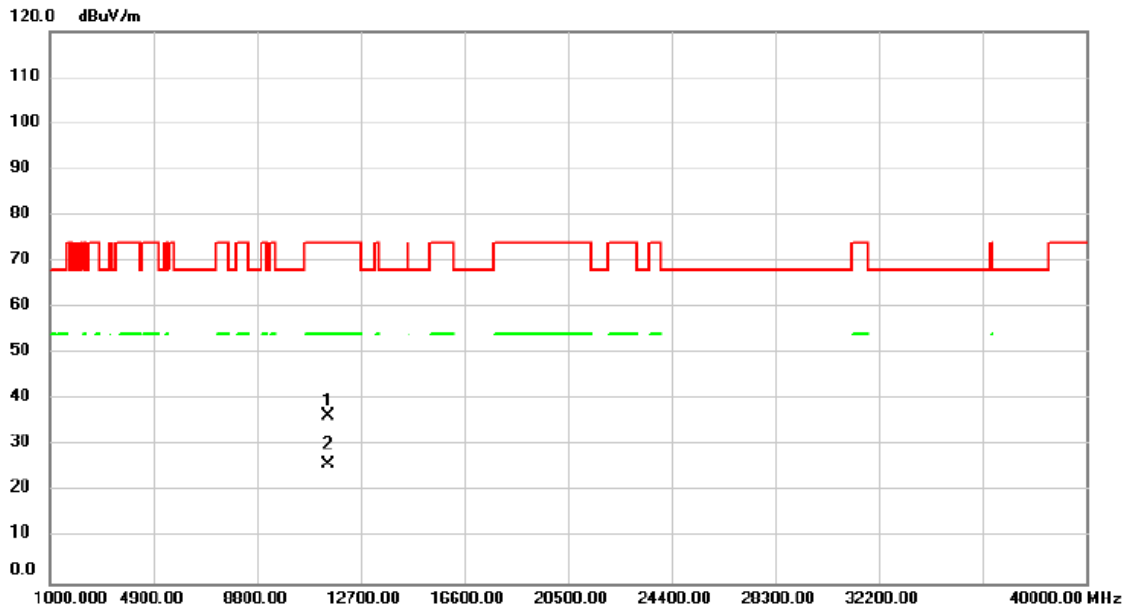


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11490.00	35.66	0.82	36.48	74.00	-37.52			peak
2	*	11490.00	25.05	0.82	25.87	54.00	-28.13			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5745MHz	Polarization	Horizontal

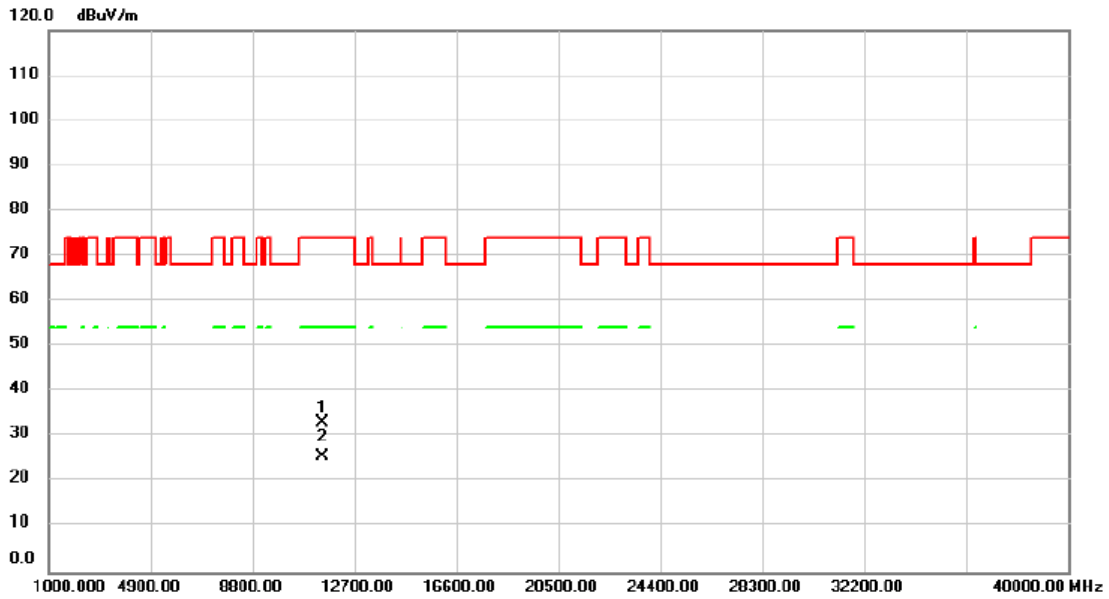


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11490.00	32.19	0.82	33.01	74.00	-40.99	peak			
2 *	11490.00	24.75	0.82	25.57	54.00	-28.43	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5785MHz	Polarization	Vertical

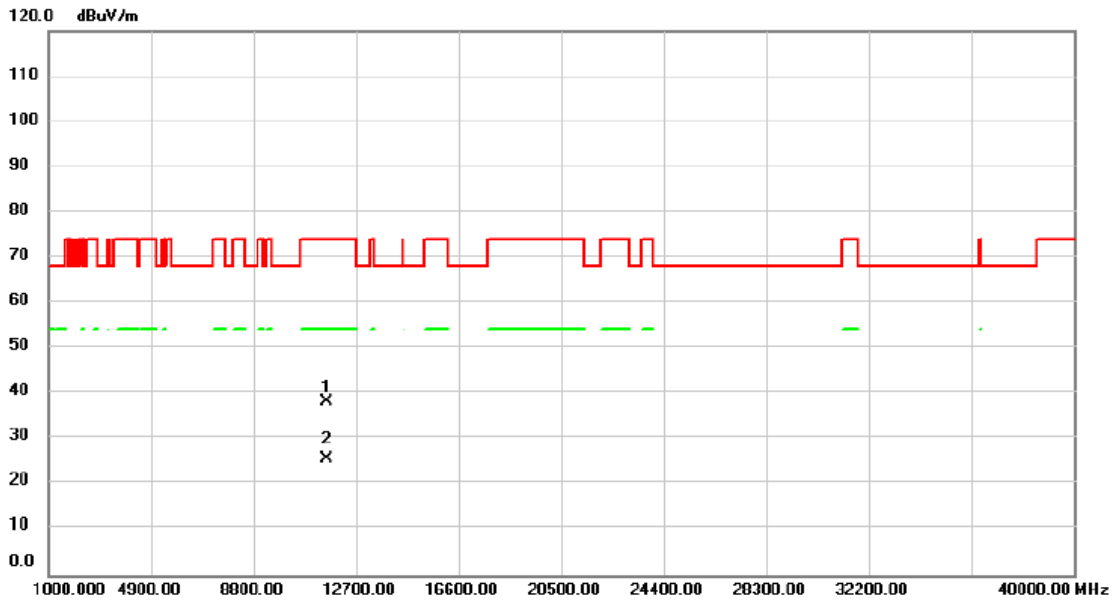


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11569.00	37.44	0.83	38.27	74.00	-35.73	peak			
2 *	11569.00	24.79	0.83	25.62	54.00	-28.38	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5785MHz	Polarization	Horizontal

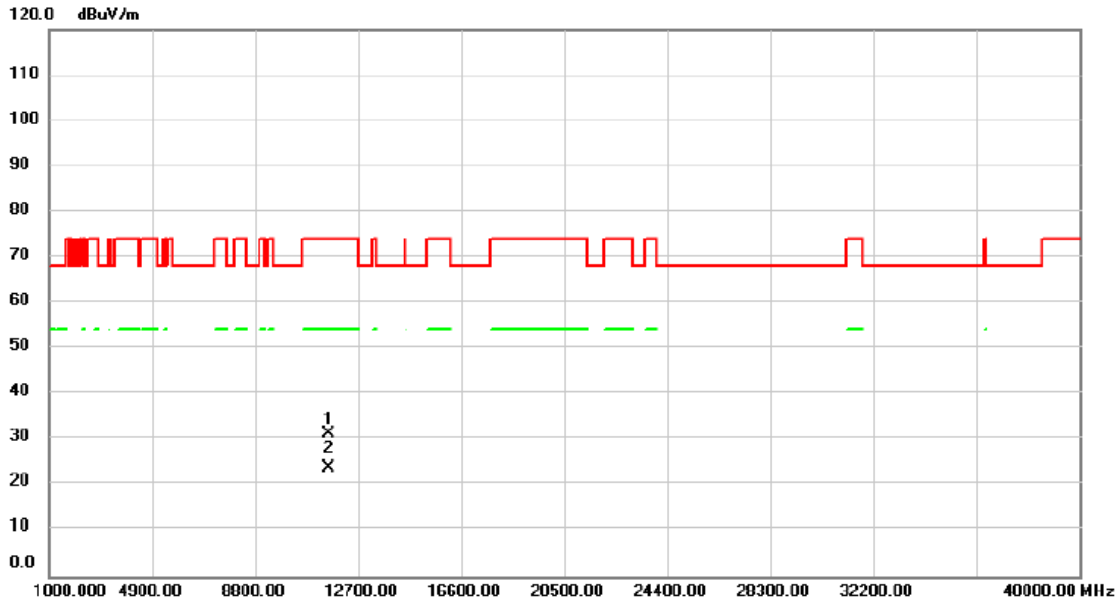


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11570.00	30.67	0.83	31.50	74.00	-42.50	peak			
2	*	11570.00	23.15	0.83	23.98	54.00	-30.02	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5825MHz	Polarization	Vertical

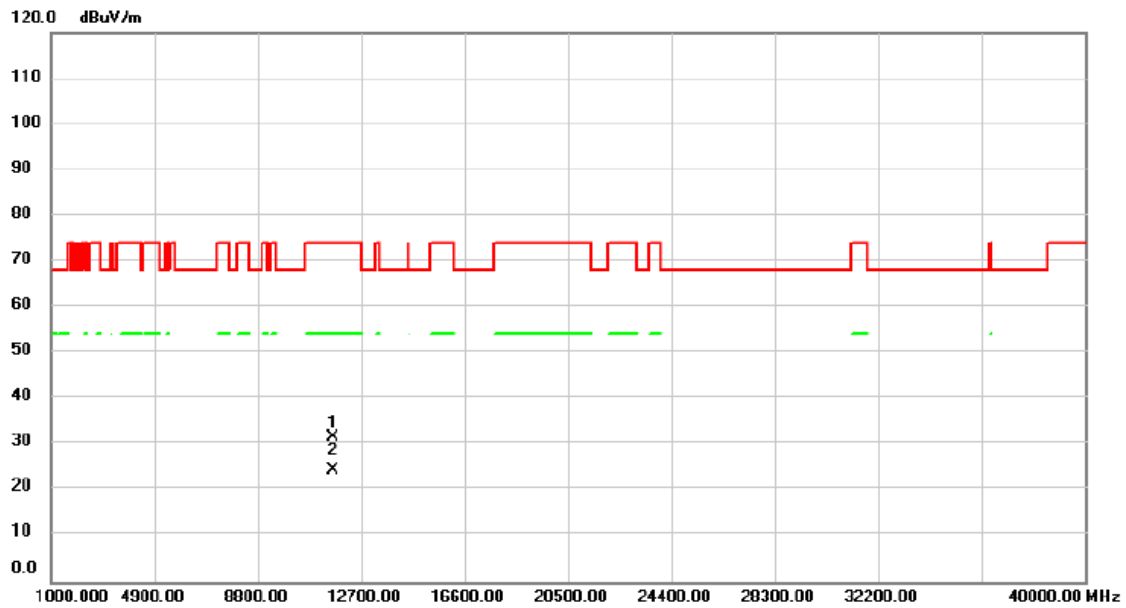


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11650.00	30.82	0.83	31.65	74.00	-42.35	peak		
2	*	11650.00	23.68	0.83	24.51	54.00	-29.49	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/2
Test Frequency	5825MHz	Polarization	Horizontal

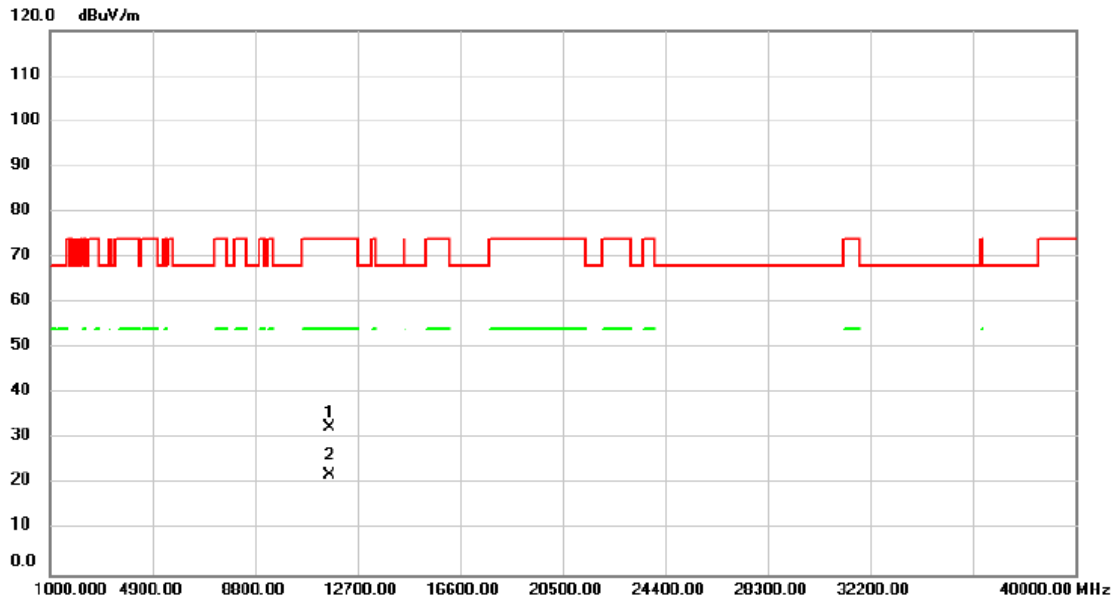


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11650.00	31.80	0.83	32.63	74.00	-41.37	peak			
2	*	11650.00	21.29	0.83	22.12	54.00	-31.88	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5190MHz	Polarization	Vertical

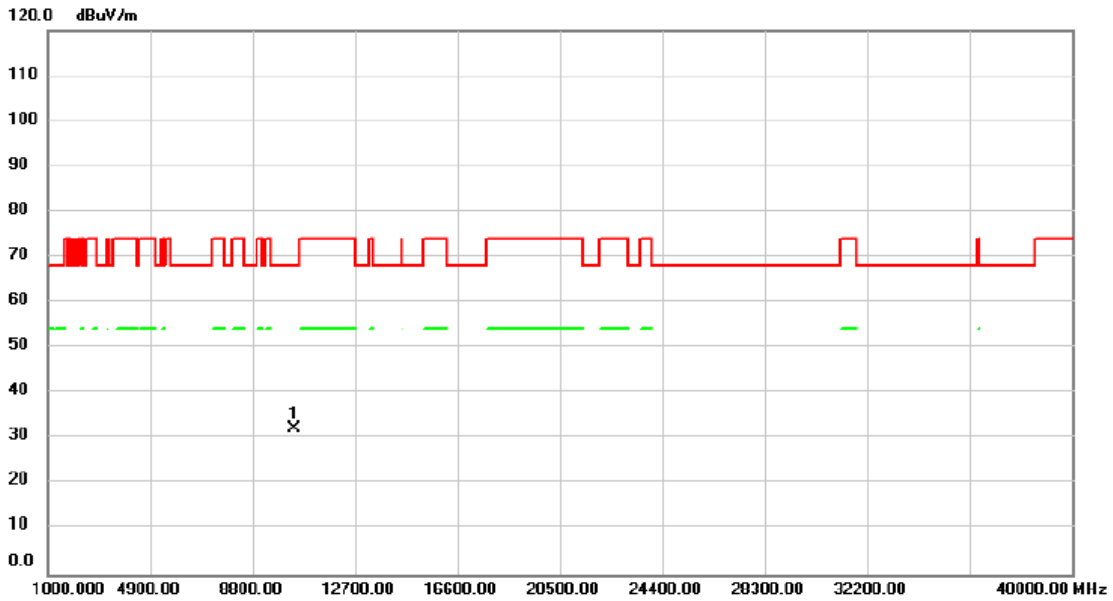


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10380.00	32.72	-0.57	32.15	68.20	-36.05	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5190MHz	Polarization	Horizontal

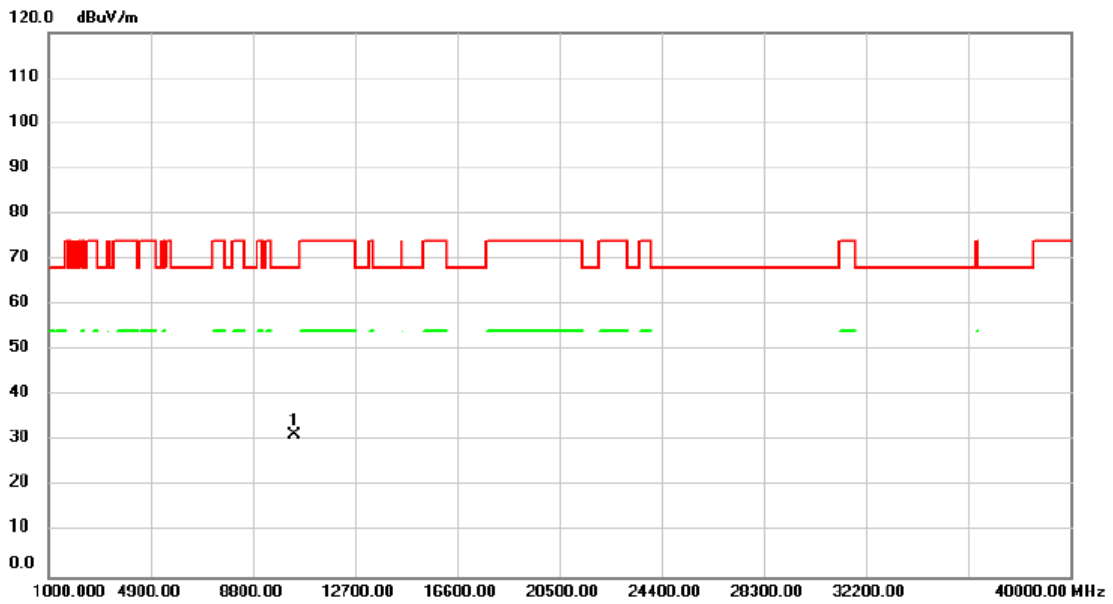


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1 *	10380.00	31.78	-0.57	31.21	68.20	-36.99			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5230MHz	Polarization	Vertical

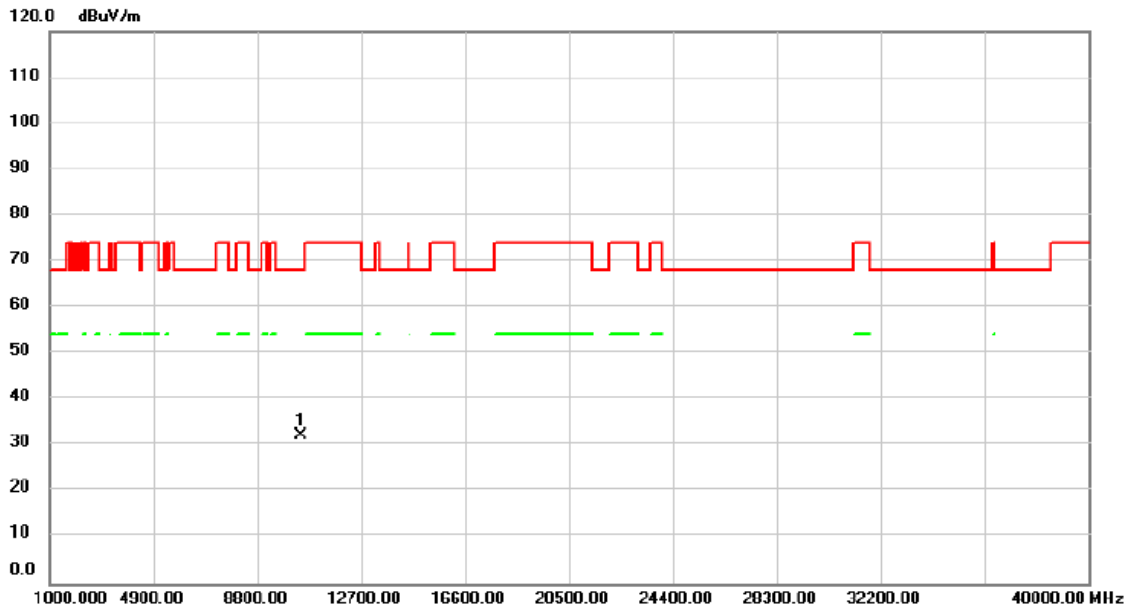


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10460.00	32.70	-0.49	32.21	68.20	-35.99			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5230MHz	Polarization	Horizontal

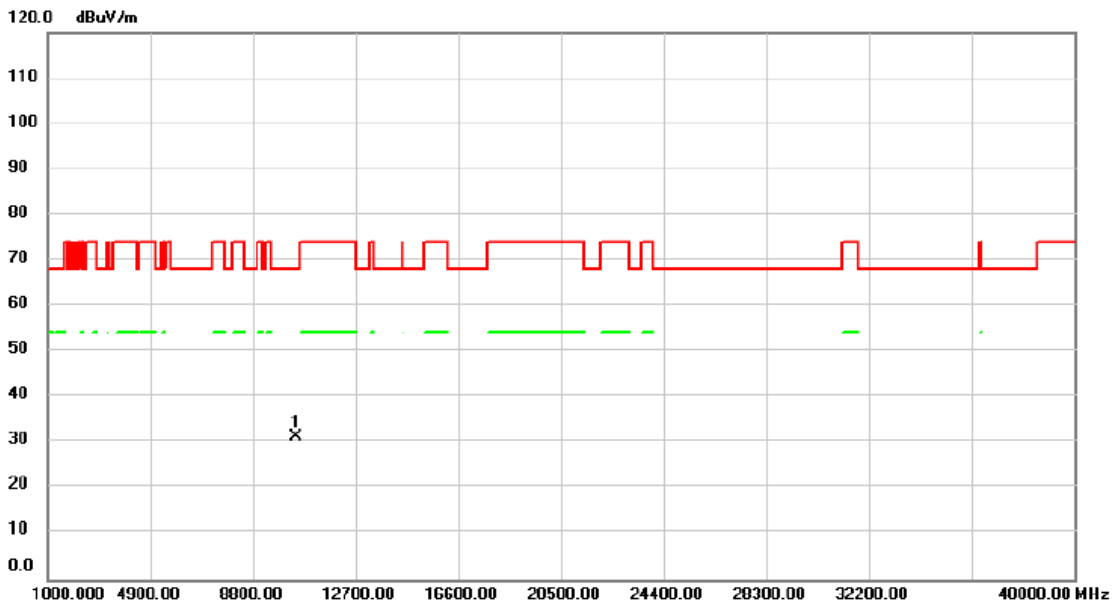


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10460.00	31.91	-0.49	31.42	68.20	-36.78			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5270MHz	Polarization	Vertical

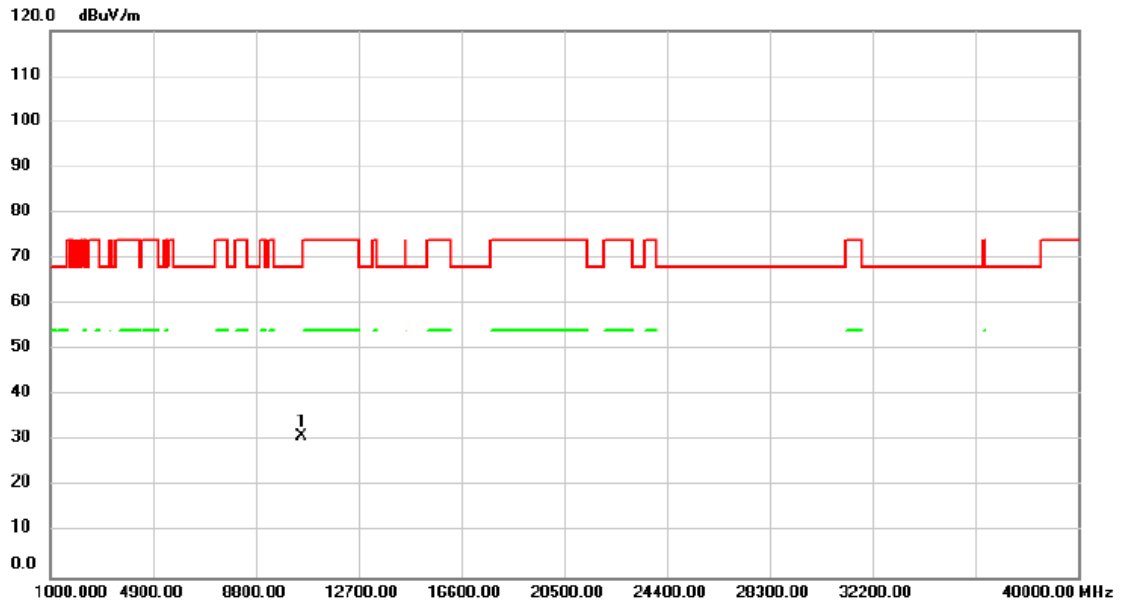


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10540.00	31.59	-0.44	31.15	68.20	-37.05	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5270MHz	Polarization	Horizontal

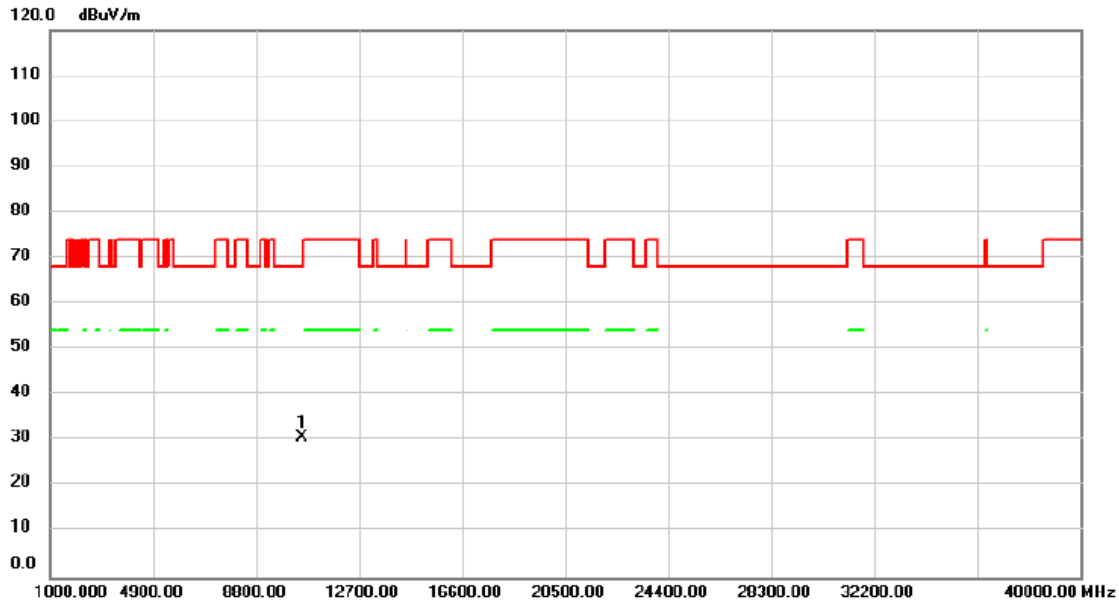


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10540.00	31.12	-0.44	30.68	68.20	-37.52			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5310MHz	Polarization	Vertical

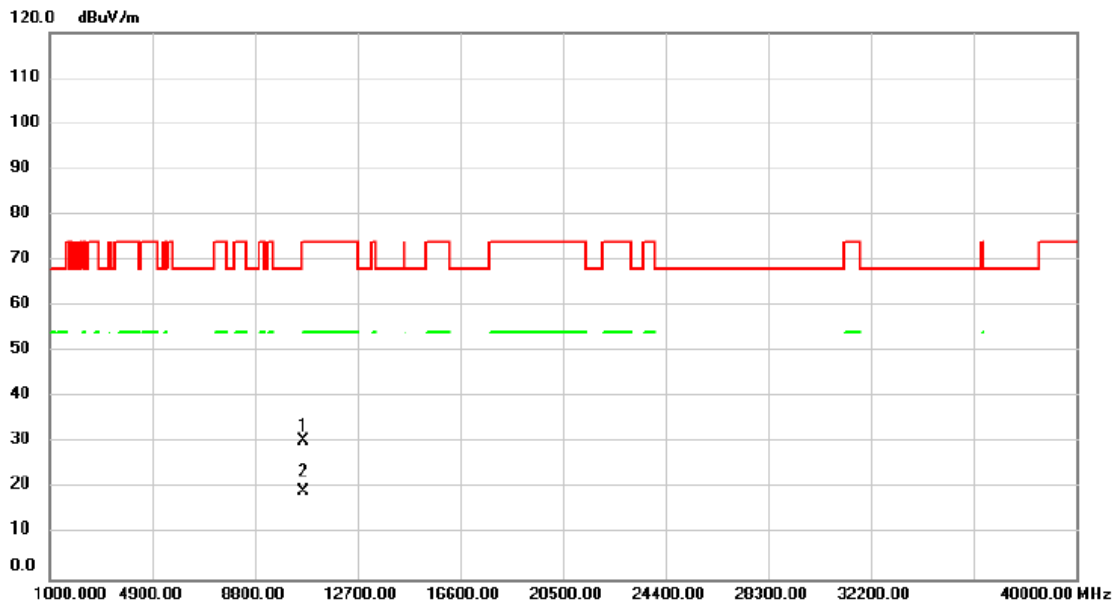


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		10620.00	30.72	-0.40	30.32	74.00	-43.68			peak
2	*	10620.00	19.62	-0.40	19.22	54.00	-34.78			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5310MHz	Polarization	Horizontal

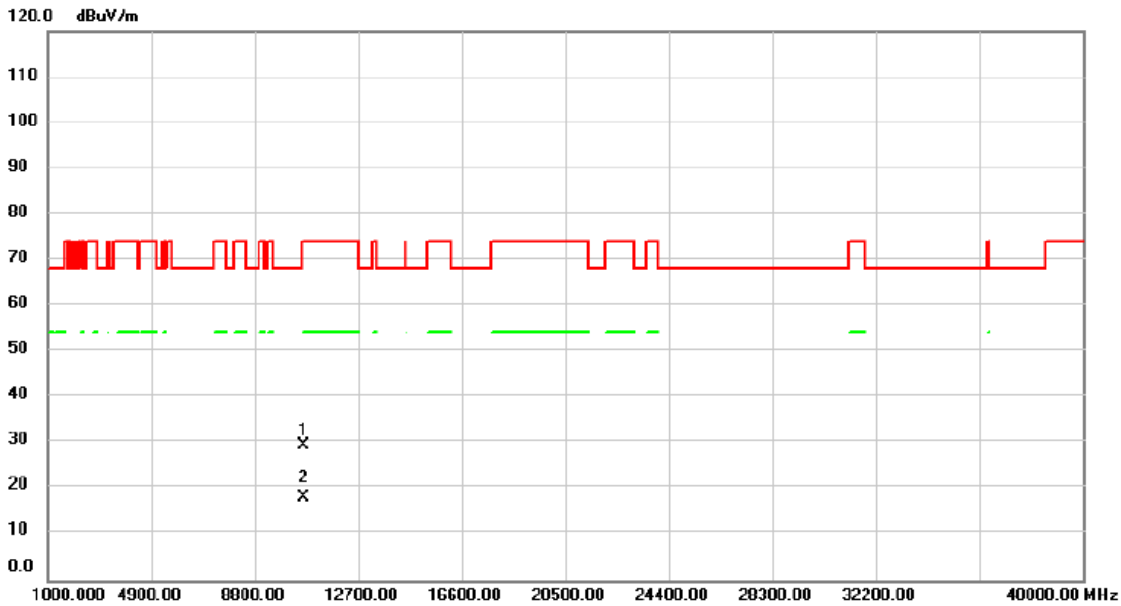


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		10620.00	29.89	-0.40	29.49	74.00	-44.51	peak			
2	*	10620.00	18.68	-0.40	18.28	54.00	-35.72	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5510MHz	Polarization	Vertical

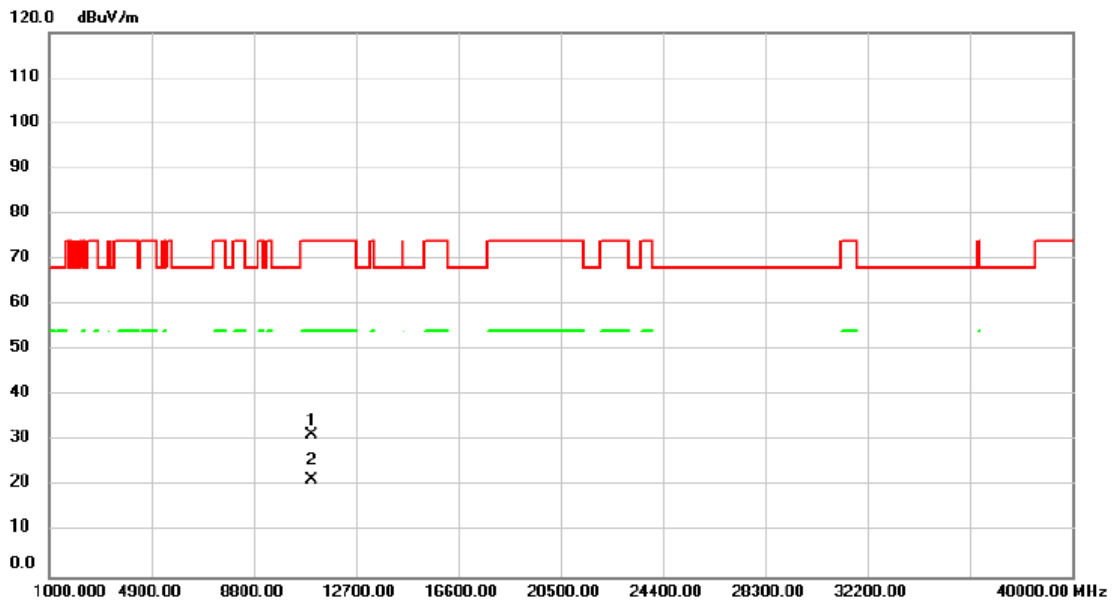


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11020.00	31.66	-0.22	31.44	74.00	-42.56	peak		
2	*	11020.00	21.59	-0.22	21.37	54.00	-32.63	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5510MHz	Polarization	Horizontal

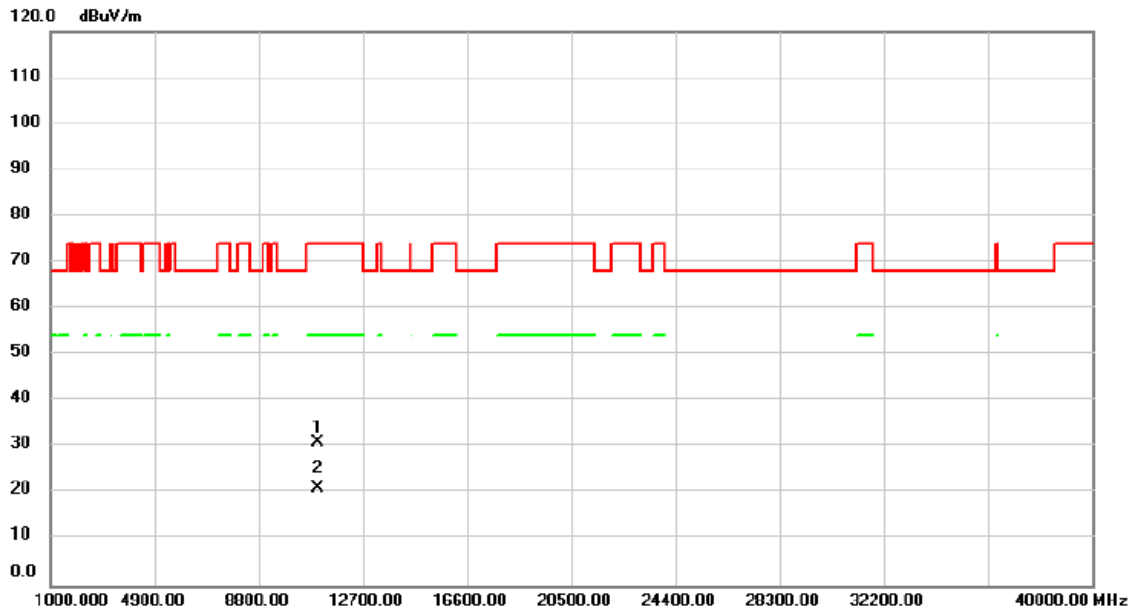


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11020.00	31.37	-0.22	31.15	74.00	-42.85			peak
2	*	11020.00	21.32	-0.22	21.10	54.00	-32.90			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5550MHz	Polarization	Vertical

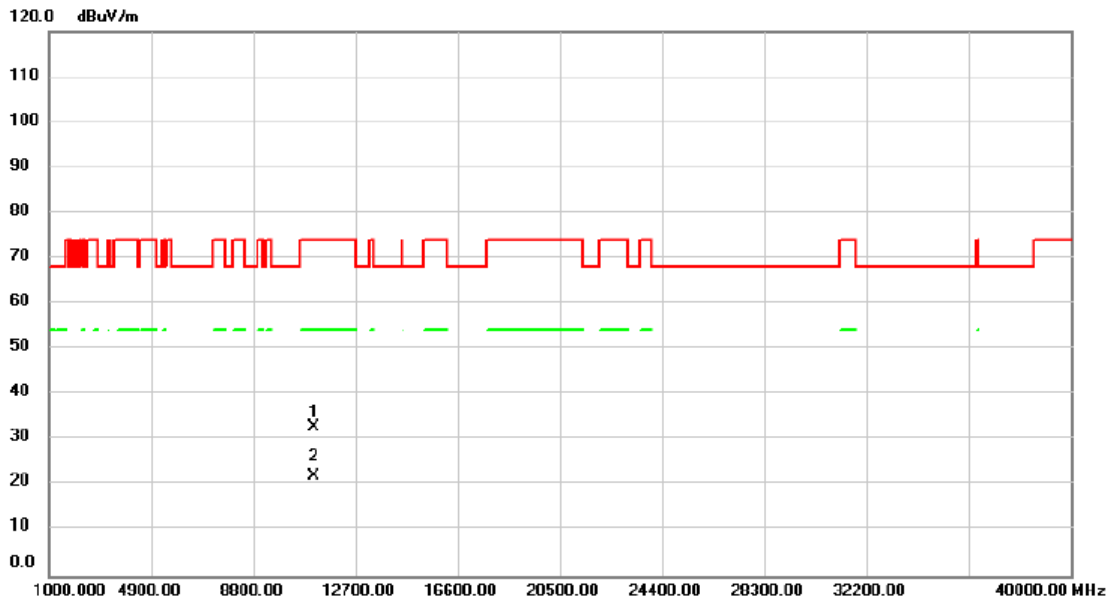


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11100.00	32.91	-0.04	32.87	74.00	-41.13			peak
2	*	11100.00	21.99	-0.04	21.95	54.00	-32.05			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5550MHz	Polarization	Horizontal

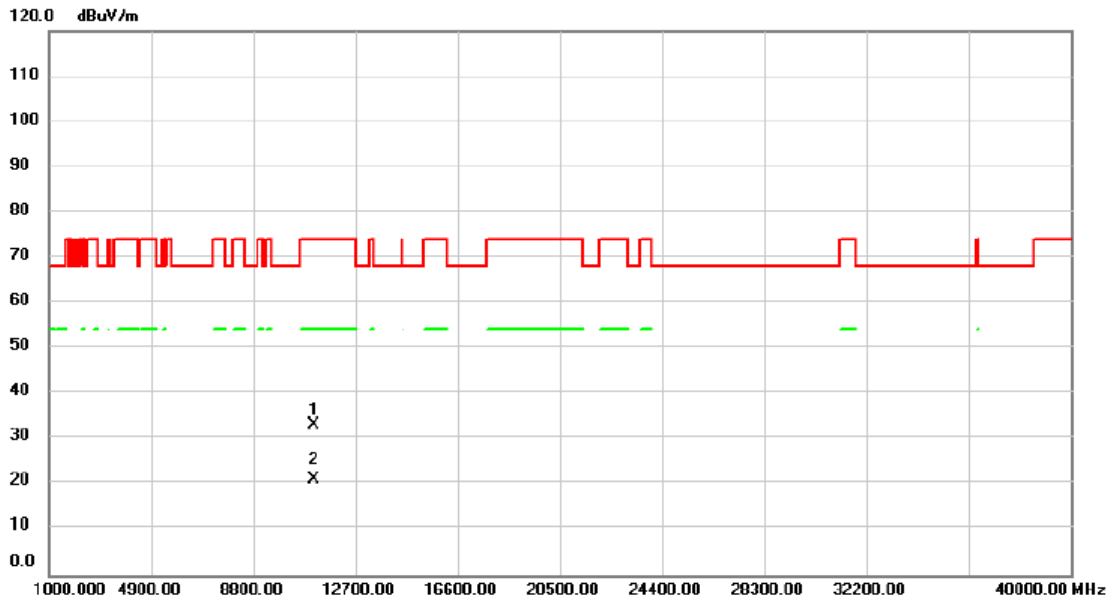


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11100.00	33.31	-0.04	33.27	74.00	-40.73	peak			
2 *	11100.00	21.22	-0.04	21.18	54.00	-32.82	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5670MHz	Polarization	Vertical

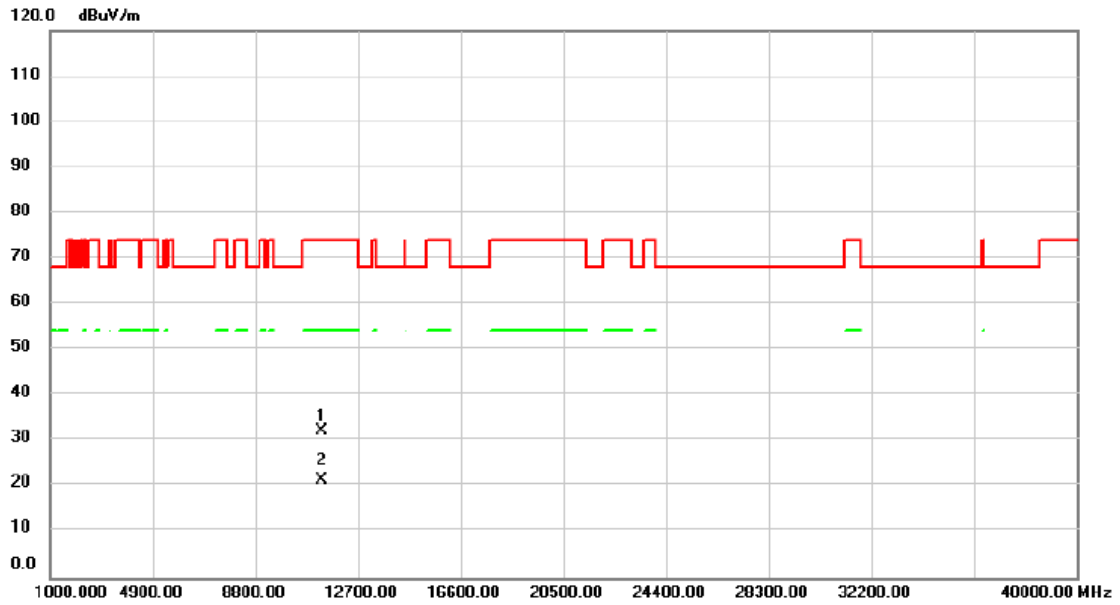


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11340.00	31.81	0.49	32.30	74.00	-41.70			peak
2	*	11340.00	21.02	0.49	21.51	54.00	-32.49			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5670MHz	Polarization	Horizontal

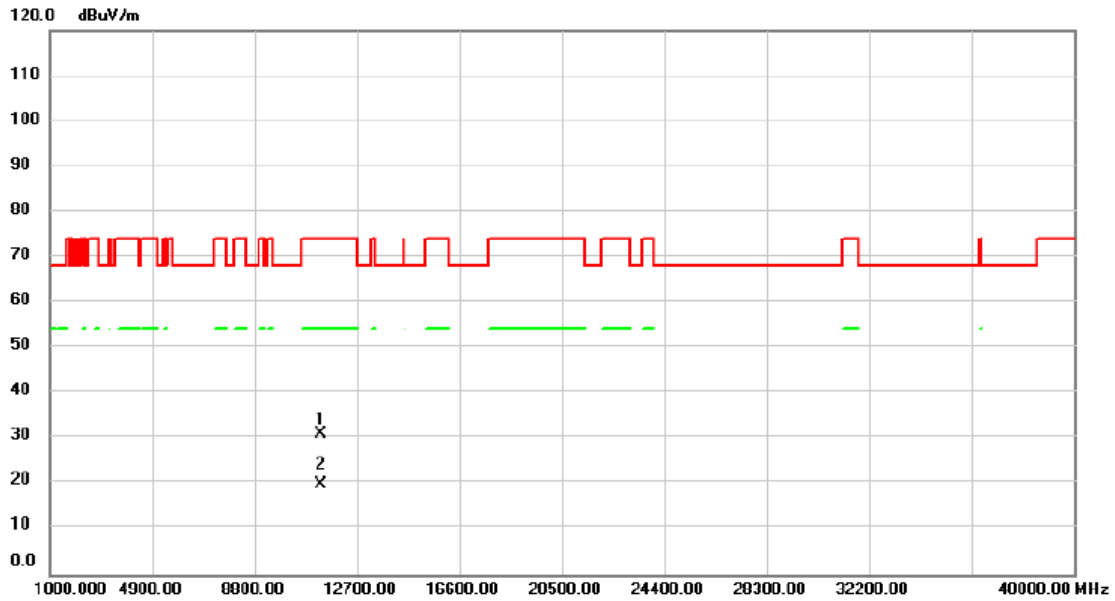


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11340.00	30.56	0.49	31.05	74.00	-42.95	peak		
2	*	11340.00	19.52	0.49	20.01	54.00	-33.99	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5755MHz	Polarization	Vertical

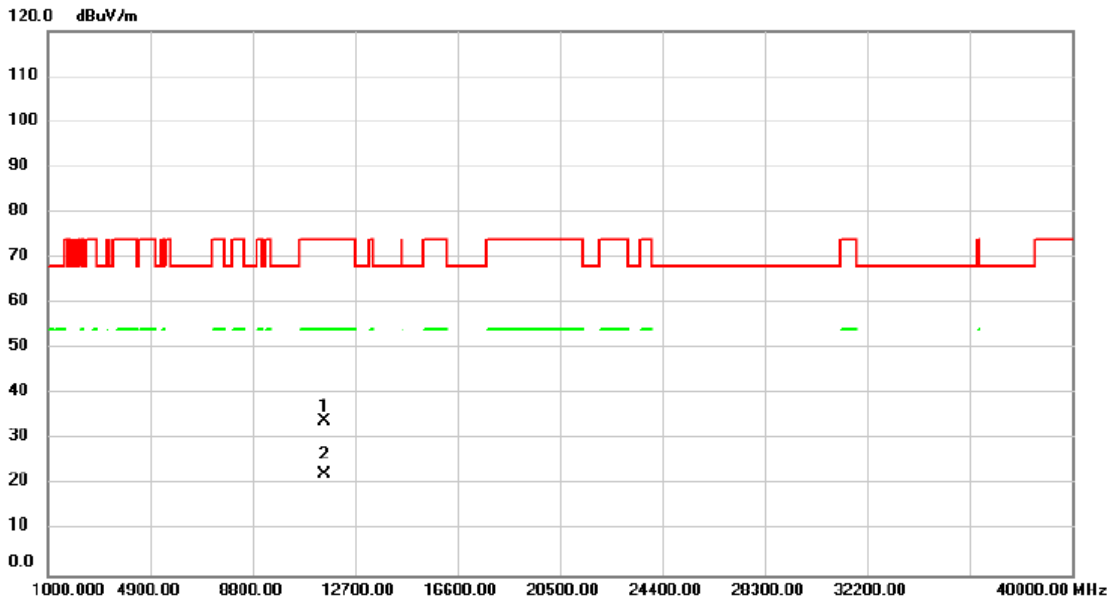


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11510.00	33.13	0.83	33.96	74.00	-40.04			peak
2	*	11510.00	21.44	0.83	22.27	54.00	-31.73			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5755MHz	Polarization	Horizontal

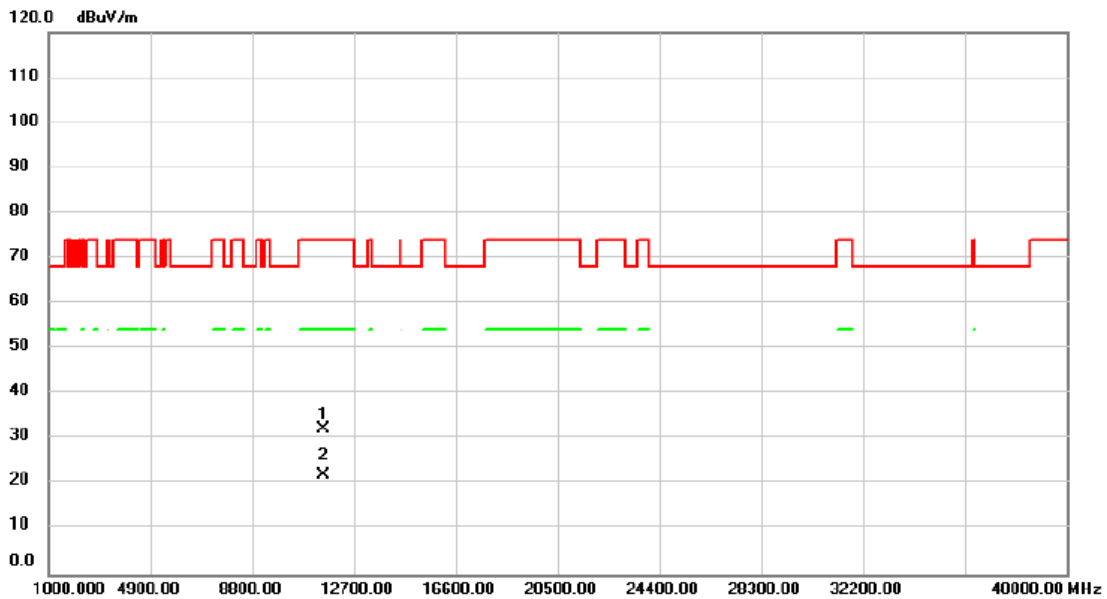


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11510.00	31.37	0.83	32.20	74.00	-41.80	peak			
2 *	11510.00	21.28	0.83	22.11	54.00	-31.89	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5795MHz	Polarization	Vertical

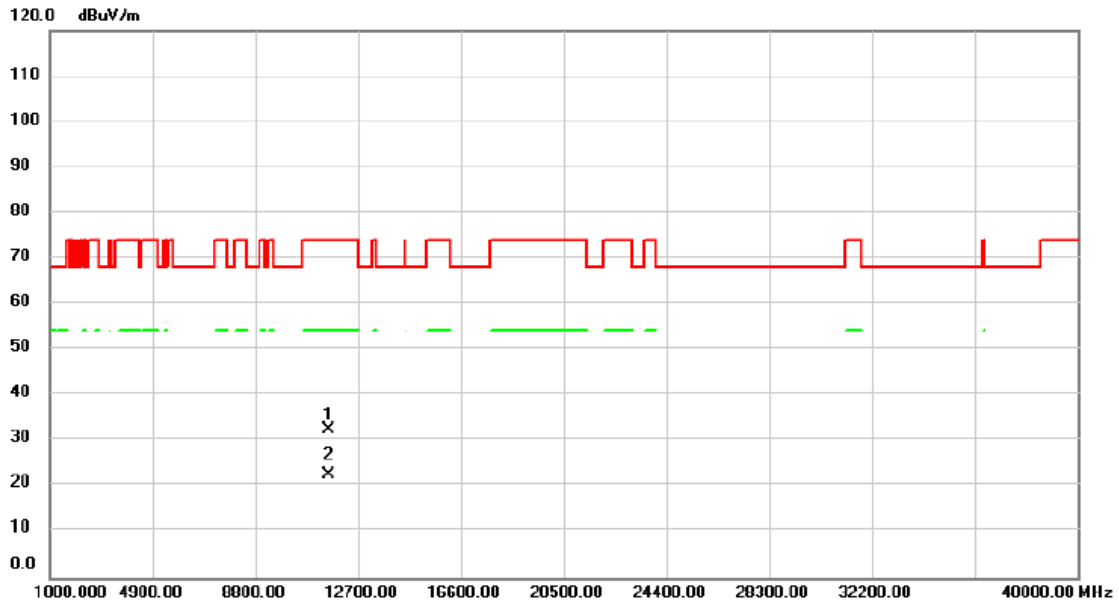


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11590.00	31.69	0.84	32.53	74.00	-41.47			peak
2	*	11590.00	21.86	0.84	22.70	54.00	-31.30			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/2
Test Frequency	5795MHz	Polarization	Horizontal

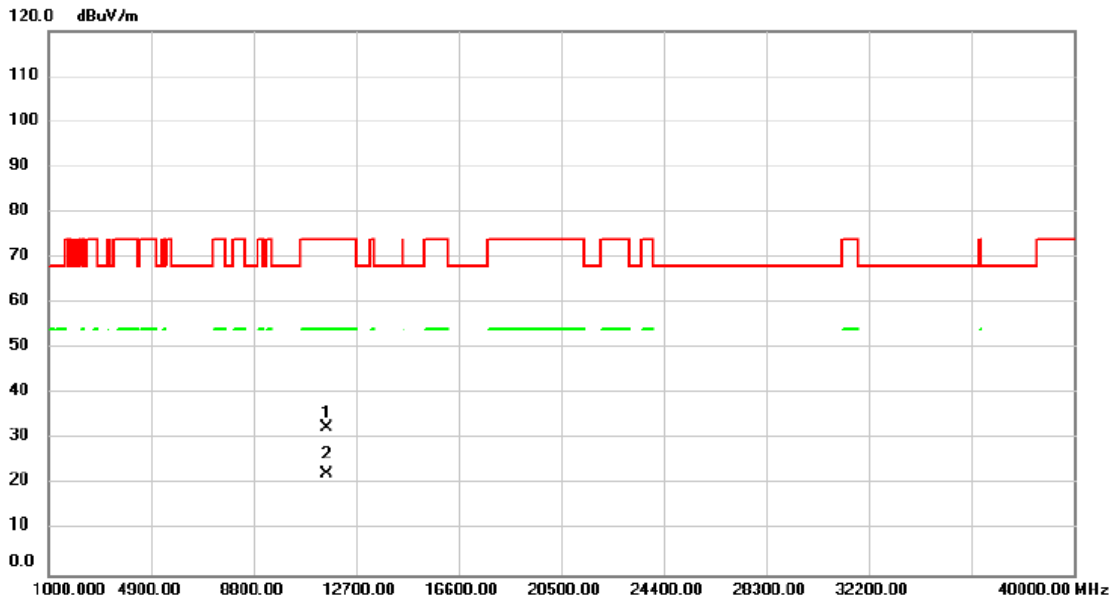


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11590.00	31.66	0.84	32.50	74.00	-41.50	peak			
2 *	11590.00	21.63	0.84	22.47	54.00	-31.53	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/2
Test Frequency	5210MHz	Polarization	Vertical

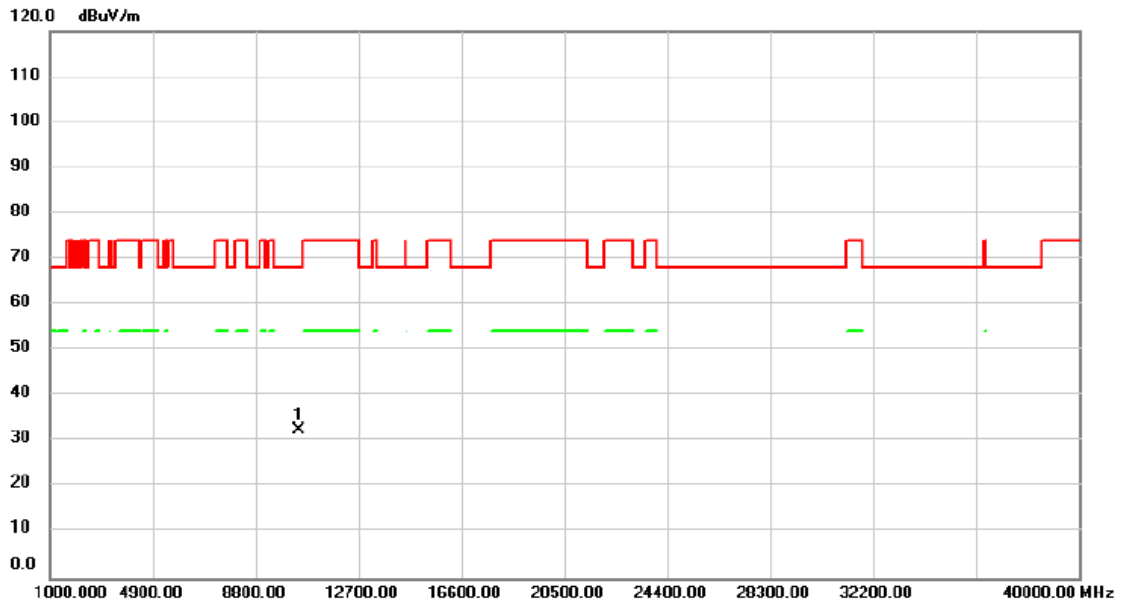


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10420.00	32.96	-0.54	32.42	68.20	-35.78	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/2
Test Frequency	5210MHz	Polarization	Horizontal

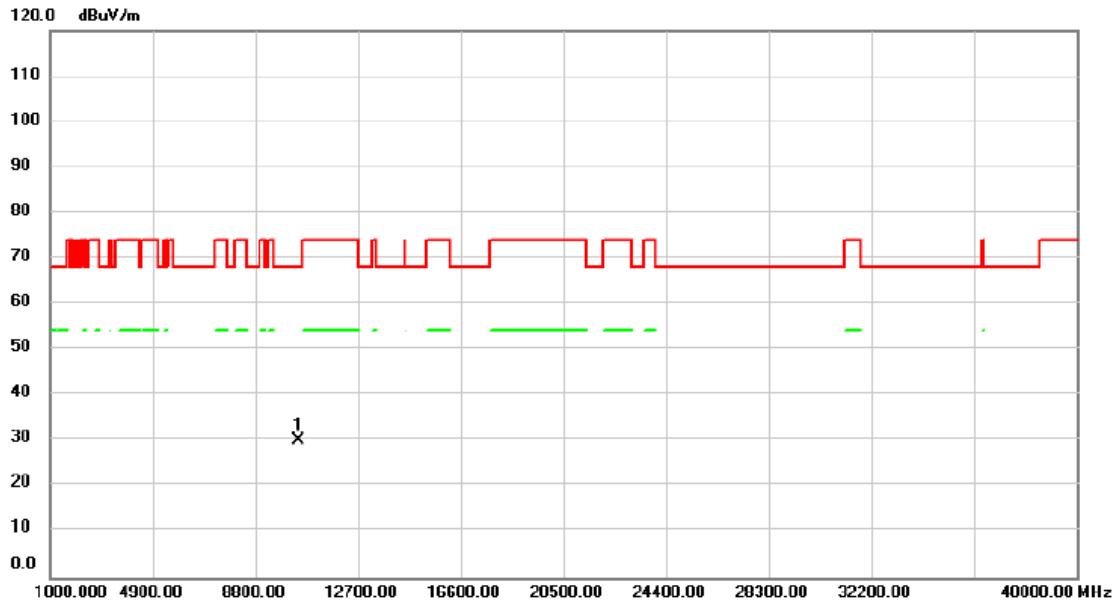


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10420.00	30.63	-0.54	30.09	68.20	-38.11	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/2
Test Frequency	5290MHz	Polarization	Vertical

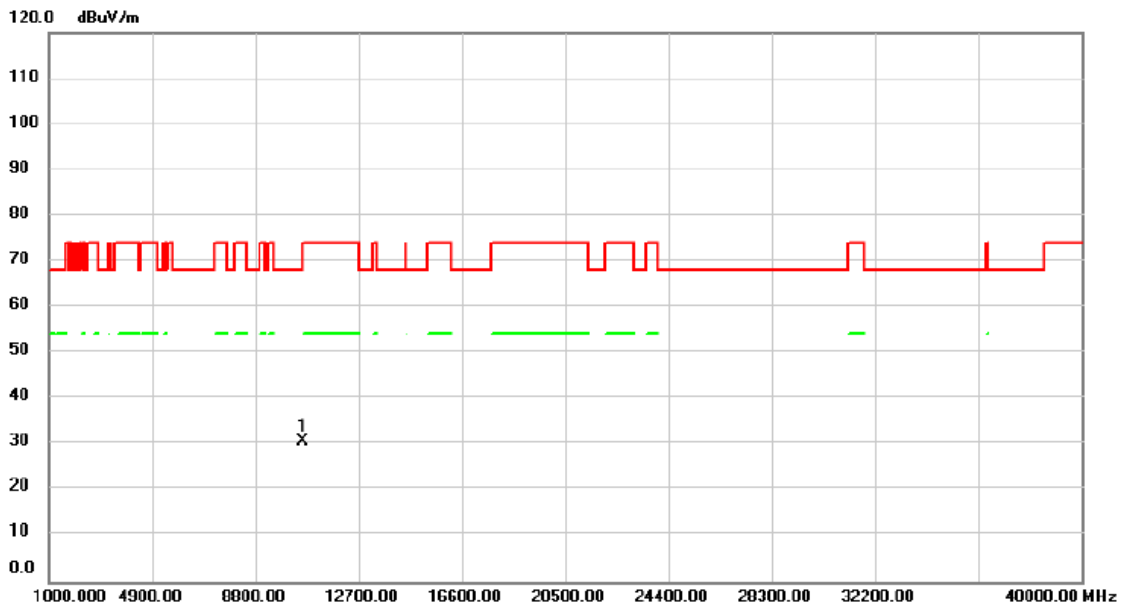


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10580.00	31.29	-0.42	30.87	68.20	-37.33			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/2
Test Frequency	5290MHz	Polarization	Horizontal

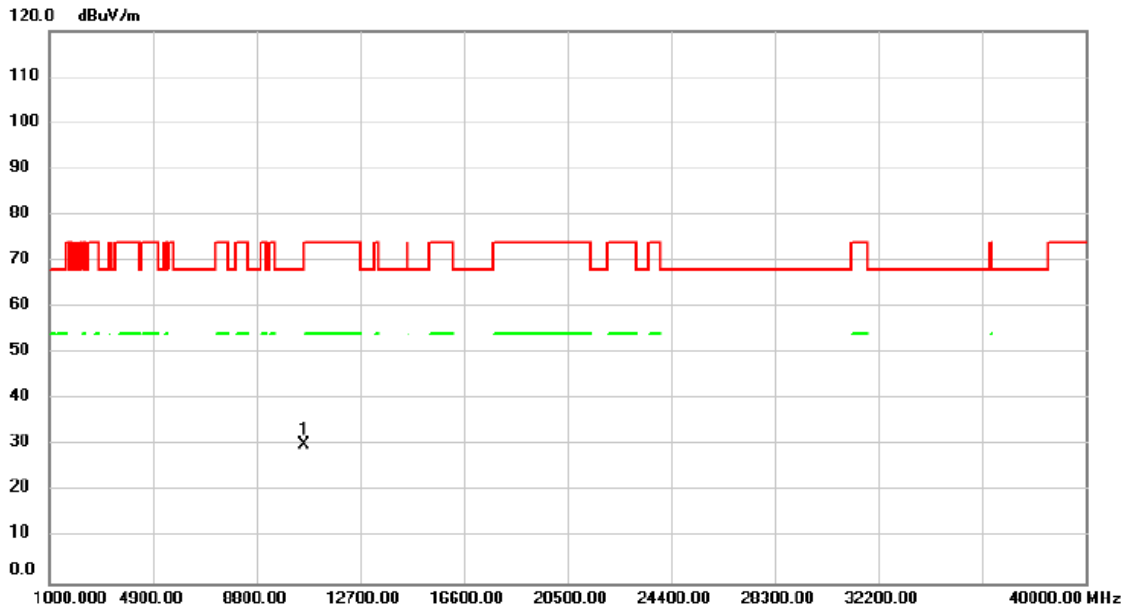


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10580.00	30.57	-0.42	30.15	68.20	-38.05			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/2
Test Frequency	5530MHz	Polarization	Vertical

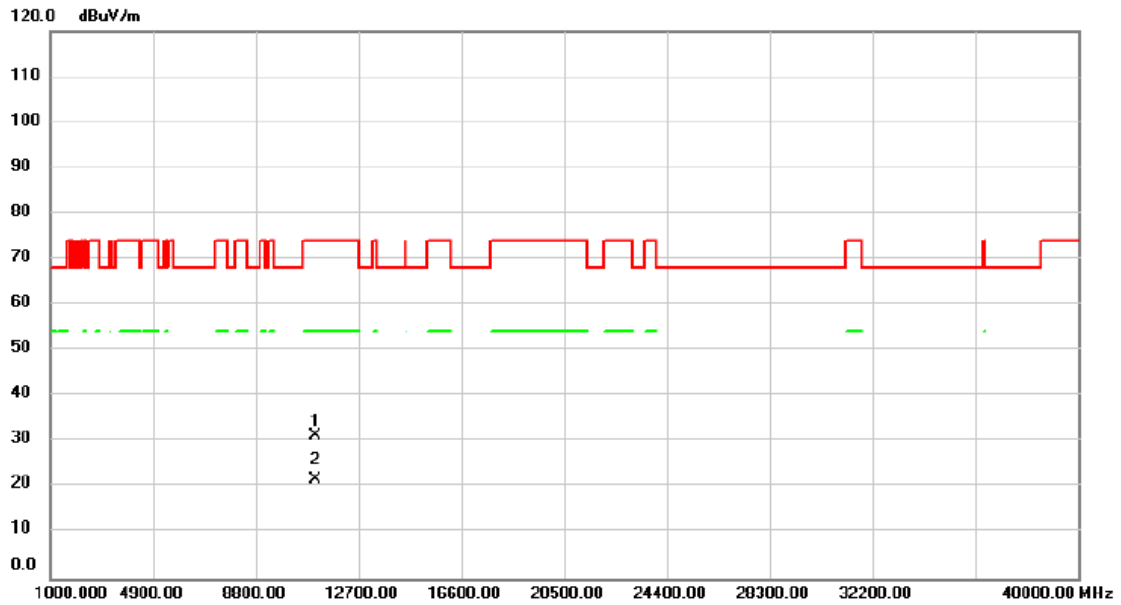

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11060.00	31.61	-0.13	31.48	74.00	-42.52	peak		
2	*	11060.00	21.94	-0.13	21.81	54.00	-32.19	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.