



FCC LISTED, REGISTRATION  
 NUMBER: 2764.01

ISED LISTED REGISTRATION  
 NUMBER: 23595-1

Test report No:  
 4374ERM.002A1

# Test Report

## USA FCC Part 15.247, 15.209, 15.207; & CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz,  
 and 5725 - 5850 MHz

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License Exempt  
 Local Area Network (LE-LAN) Devices.

(*) Identification of item tested	IoT Real time vibration and temperature sensor
(*) Trademark	Tractian
(*) Model and /or type reference tested	Smart Trac Ultra
Other identification of the product	FCC ID: 2BCIS-ST-ULTRA IC: 31644-STULTRA HVIN: Smart Trac Ultra
(*) Features	915 MHz ISM
Manufacturer	Tractian Tecnologia Ltda Av. dos Imares, 437 - Indianópolis São Paulo - SP - Brazil 04085-000
Test method requested, standard	USA FCC Part 15.247, 10-1-20 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz USA FCC Part 15.209 10-1-20 Edition: Radiated emission limits; general requirements. USA FCC Part 15.207 (2018): Conducted emission limits. CANADA RSS-247 Issue 3 (August 2023). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 15.247 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	02-01-2024
Report template No	FDT08_23 (*) "Data provided by the client"

## Index

Competences and guarantees.....	3
General conditions.....	3
Uncertainty .....	3
Data provided by the client .....	4
Usage of samples.....	4
Test sample description.....	5
Identification of the client .....	6
Testing period and place .....	6
Document history.....	6
Environmental conditions.....	7
Remarks and comments.....	7
Testing verdicts .....	8
Summary.....	8
List of equipment used during the test .....	9
Appendix A: Test results.....	10

## Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

## General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Certification internal document PODT000.

Test case	Frequency (MHz)	U(k=2)	Units
RF Power and PSD	2402-2483	0.88	dB
Occupied Bandwidth		1.87	%
Band Edge		0.64	dB
Conducted Spurious Emission	30 - 1000	0.48	dB
	1000 - 40000	0.94	dB
Radiated Spurious Emission	30-180	4.27	dB
	180-1000	3.14	dB
	1000-18000	3.30	dB
	18000-40000	3.49	dB

## Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of IoT Real time vibration and temperature sensor.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples used for test have been selected by: The client.

Sample S/01 is composed of the following elements and accessories:

Id	Control Number	Description	Manufacturer / Model	Serial N°	Date of Reception	Application
S/01	4374/02	Vibration and temperature sensor	Tractian / Smart Trac Ultra	CER0002	2023-11-03	Element Under Test
S/01	4374/07	Serial-USB converter	-	-	2023-11-03	Accessory

Sample S/01 was used for the following test(s): All conducted test indicated in appendix A.

Sample S/02 is composed of the following elements and accessories:

Id	Control Number	Description	Manufacturer / Model	Serial N°	Date of Reception	Application
S/02	4374/04	SIM7600G with serial monitor	Tractian / Smart Trac Ultra	CER0004	2023-11-03	Element Under Test
S/02	4374/08	Interface mini USB to serial TTL	-	-	2023-11-03	Accessory

Sample S/02 was used for the following test(s): All radiated tests indicated in appendix A.

## Test sample description

Ports.....:	Port name and description		Cable				
			Specified length [m]	Attached during test	Shielded	Coupled to patient	
	N/A			<input type="checkbox"/>	<input type="checkbox"/>	N/A	
	N/A			<input type="checkbox"/>	<input type="checkbox"/>	N/A	
	N/A			<input type="checkbox"/>	<input type="checkbox"/>	N/A	
	N/A			<input type="checkbox"/>	<input type="checkbox"/>	N/A	
	N/A			<input type="checkbox"/>	<input type="checkbox"/>	N/A	
Supplementary information to the ports.....:	No Data Provided						
Rated power supply.....:	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC: N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC: N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: No Data Provided					
<input type="checkbox"/>	DC: N/A						
Rated Power.....:	No Data Provided						
Clock frequencies.....:	No Data Provided						
Other parameters.....:	No Data Provided						
Software version.....:	1.0.0						
Hardware version.....:	Smart Trac Ultra						
Dimensions in cm (W x H x D) ...:	4.0 x 7.1 x 40						
Mounting position.....:	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input checked="" type="checkbox"/>	Other: Attached to industrial assets (motors, gearboxes)					

Modules/parts ..... :	Module/parts of test item	Type	Manufacturer
Accessories (not part of the test item) ..... :	Description	Type	Manufacturer
	USB -SERIAL Converter FTDI	FT232RL	FTDI
Documents as provided by the applicant ..... :	Description	File name	Issue date
	FDT30_18 Declaration Equipment Data	FDT30_19 Declaration Equipment Data- Smart Trac Ultra	29/11/2023
	N/A		
<b>Copy of marking plate:</b>			

## Identification of the client

Tractian Technologies Inc.  
 201 17<sup>th</sup> St. NW  
 2<sup>nd</sup> Floor,  
 Atlanta, GA 30363,  
 USA

## Testing period and place

<b>Test Location</b>	DEKRA Certification Inc.
<b>Date (start)</b>	11-13-2023
<b>Date (finish)</b>	12-05-2023

## Document history

Report number	Date	Description
4374ERM.002	12-27-2023	First release.
4374ERM.002A1	02-01-2024	Second release. Standard information on the cover page and nominal voltage information in Description of Test Conditions in Appendix A were updated. This modification test report cancels and replaces the test report 4374ERM.002.

## Environmental conditions

---

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860mbar Max. = 1060mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860mbar Max. = 1060mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860mbar Max. = 1060mbar

## Remarks and comments

---

The tests have been performed by the technical personnel: Juliana Cherry, Yuqi Wang, Koji Nishimoto and Qi Zhang.

## Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

## Summary

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth		Pass	N/A
RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density		Pass	N/A
RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power		Pass	N/A
RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter) - Conducted		Pass	N/A
FCC 2.1049 / 99dBw Occupied Channel Bandwidth 99%		Pass	N/A
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Conducted		Pass	N/A
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Radiated		Pass	N/A
<b>Supplementary information and remarks:</b>			
None			



## List of equipment used during the test

### FCC 47 CFR Part 15.247 / RSS-247

#### Conducted Measurements

CONTROL NUMBER	DESCRIPTION	Serial No	LAST CALIBRATION	NEXT CALIBRATION
1039	Signal Analyzer 40GHz	101627	2022-11-01	2024-11-01
1107	Ethernet SNMP Thermometer	60038026952	2022-10-18	2024-10-18
1313	Wireless Measurement Software R&S WMS32	-	N/A	N/A

#### Radiated Measurements

CONTROL NUMBER	DESCRIPTION	Serial No	LAST CALIBRATION	NEXT CALIBRATION
1012	ESR26 EMI Test Receiver	101478	2022-04-12	2024-04-12
1014	FSV40 Signal Analyzer 40GHz	101626	2022-08-01	2024-08-01
1057	3115 Double-Ridged Waveguide Horn Antenna 1-18 GHz	211373	2023-07-18	2026-07-18
1064	3142E Biconilog Antenna	208600	2021-12-13	2024-12-13
1111	Ethernet SNMP Thermometer- SAC	60038026577	2022-10-18	2024-10-18
1179	Semi-Anechoic Chamber	F169021	N/A	N/A
1314	Wireless Measurement Software R&S EMC32	1040-OT102236	N/A	N/A
1461	Low Noise Preamplifier (1-18GHz)	BLMA0118-4A	2022-06-01	2024-06-01

## Appendix A: Test results

## Appendix A

PRODUCT INFORMATION .....	12
DESCRIPTION OF TEST CONDITIONS.....	12
TEST CASES DETAILS.....	15
RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6dB Bandwidth .....	15
RSS-247 5.2 (b) / FCC 15.247 (e) Power Spectral Density.....	18
RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power & Antenna gain.....	21
RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter) - Conducted .....	24
RSS-247 5.2 (a) / RSS-GEN 6.7 FCC 15.247 (a) (2) 99dBw Occupied Channel Bandwidth 99% ....	26
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Conducted .....	29
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Radiated .....	32

## PRODUCT INFORMATION


The following information is provided by the client:

Information	Description
Modulation	OQPSK, DSSS
Operation mode	
- Operating Frequency Range	915-925 MHz
- Nominal Channel Bandwidth	2 MHz
- RF Output Power	8.5 dBm
Antenna type	Monopole Chip Antenna: NN02_224
Antenna gain	+ 2.1 dBi
Nominal Voltage	
- Supply Voltage	Battery
- Type of power source	Internal
Equipment type	ZigBee

## DESCRIPTION OF TEST CONDITIONS

TEST CONDITIONS	DESCRIPTION
TC#01	<p><u>Power supply (V):</u>                      Powered by internal battery 3.6 V.</p> <p><u>Test Frequencies for Conducted tests:</u>                      Lowest channel: 915.0 MHz                      Middle channel: 921.0 MHz                      Highest channel: 925.0 MHz</p>

CONDUCTED MEASUREMENTS:

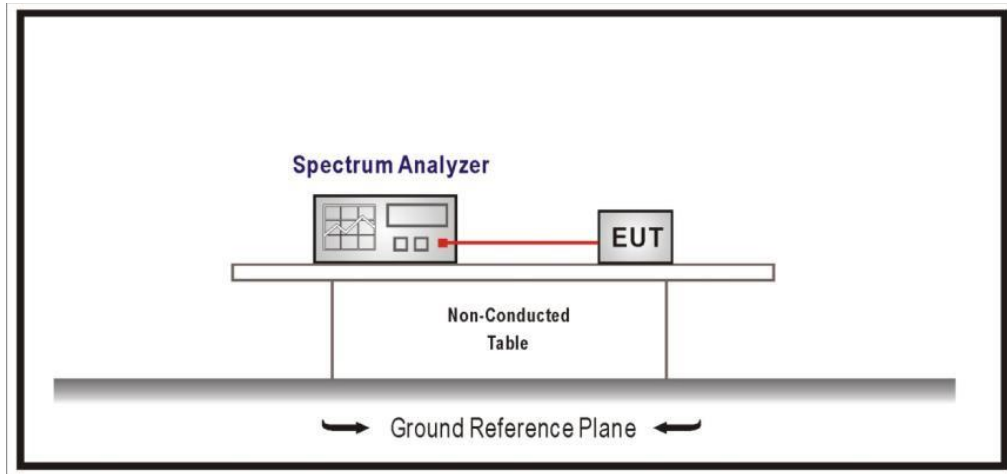

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and 1-18 GHz Double ridge horn antennas.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

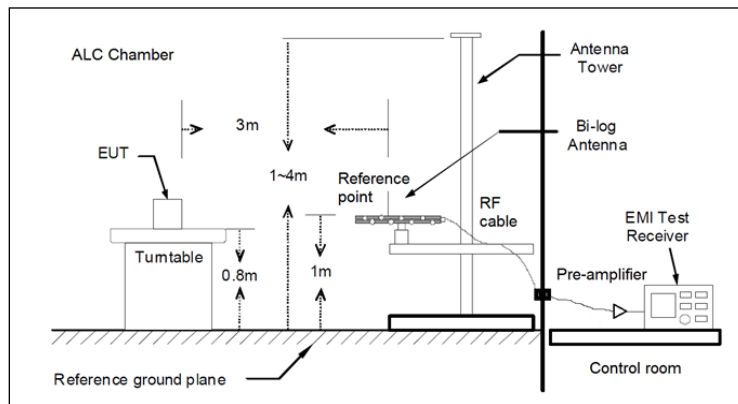


Fig 1: Radiated measurements Setup  $f < 1$  GHz

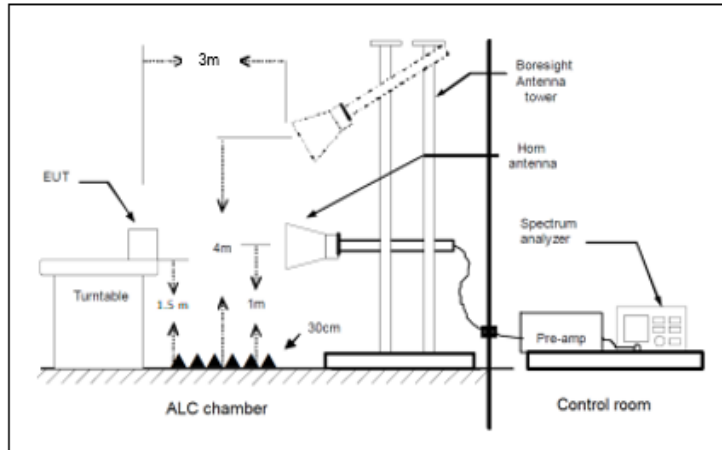


Fig 2: Radiated measurements setup  $f > 1$  GHz

## TEST CASES DETAILS

### RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6dB Bandwidth

#### Limits

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test conditions modes: TC#01

#### Results

	Lowest frequency	Middle frequency	Highest frequency
	915.0 MHz	921.0 MHz	925.0 MHz
6 dB Spectrum bandwidth (MHz)	1.71	1.71	1.71

#### Verdict


Pass

**Results**

**Attachments**


**Frequency = 915.0 MHz, Bandwidth = 2 MHz**

**Images:**

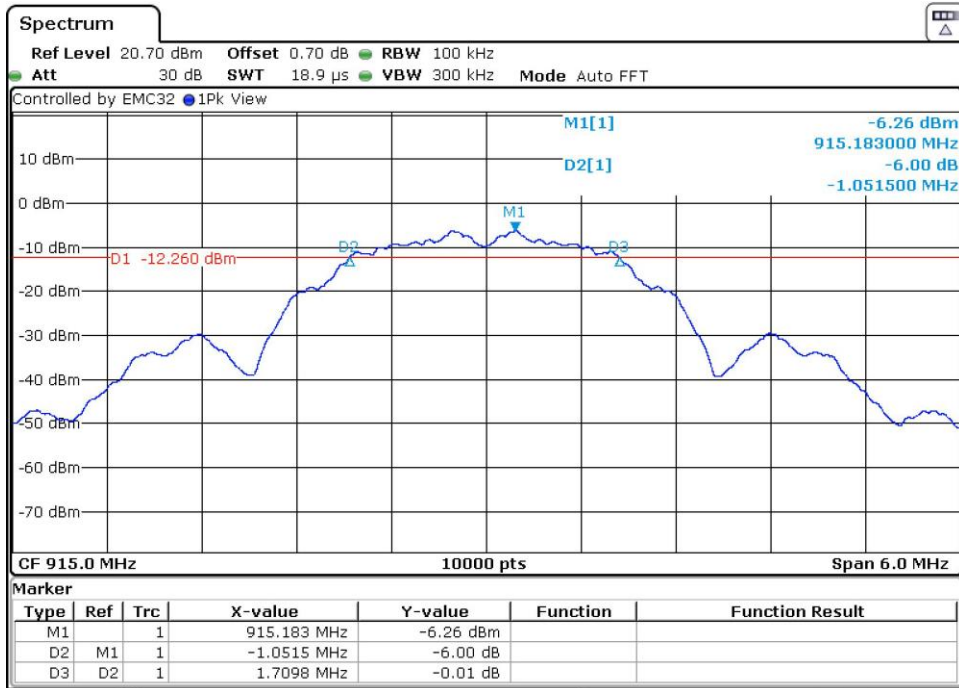

**Frequency = 921.0 MHz, Bandwidth = 2 MHz**


**Images:**

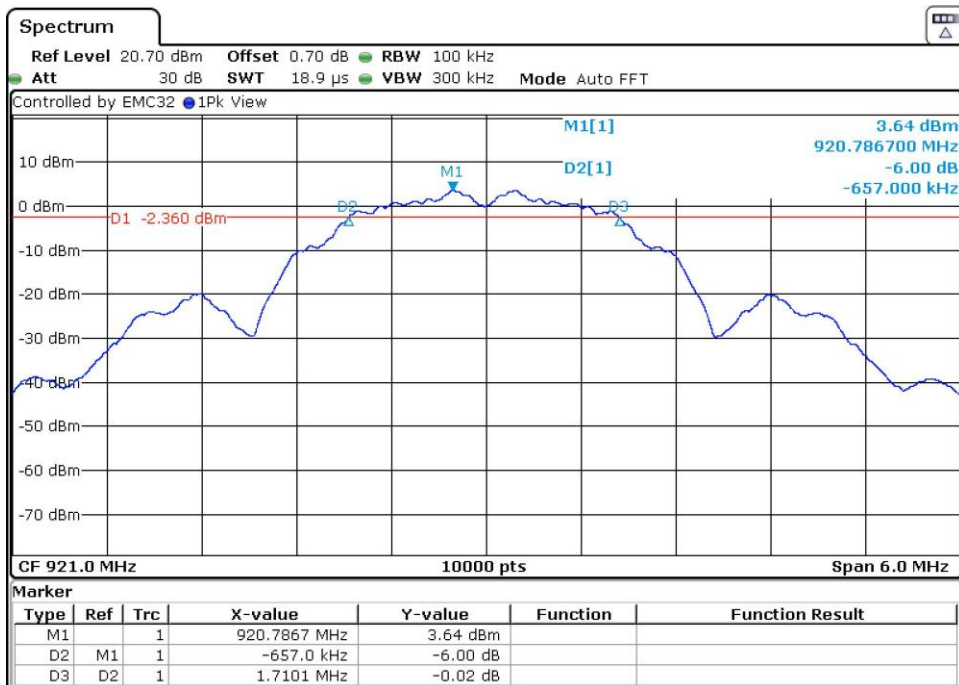



Frequency = 925.0 MHz, Bandwidth = 2 MHz

Images:

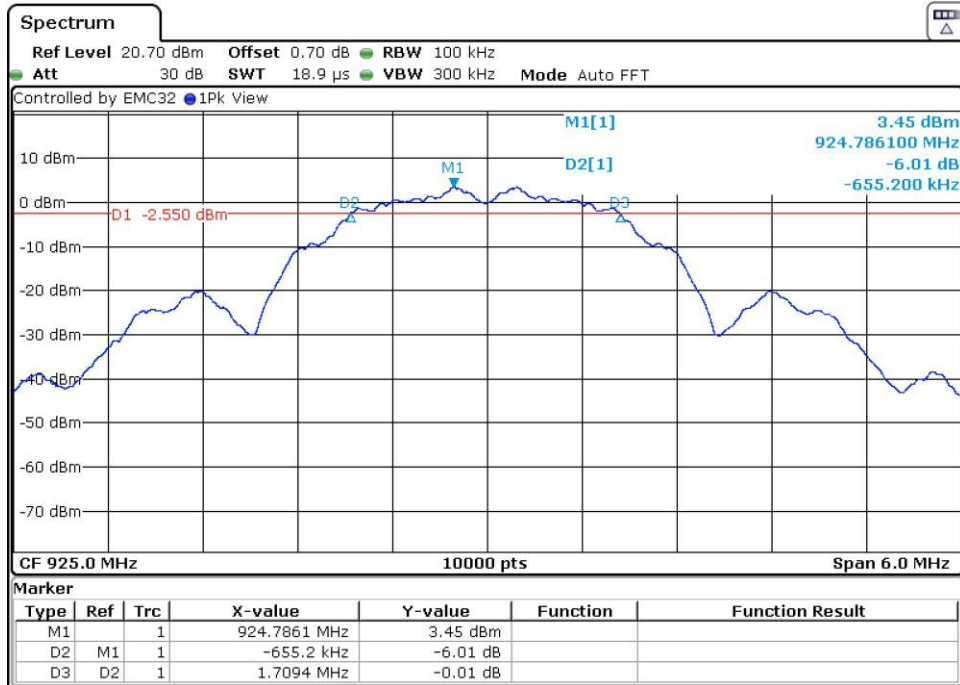

## RSS-247 5.2 (b) / FCC 15.247 (e) Power Spectral Density

### Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The maximum power spectral density level in the fundamental emission was measured using the method AVGPSD-1 (Average PSD) according to Section 8.4 of KDB 558074 D01 15.247 Meas Guidance v05r02.

Test conditions modes: TC#01

### Results

	Lowest frequency	Middle frequency	Highest frequency
	915.0 MHz	921.0 MHz	925.0 MHz
Power spectral density (dBm)	-4.93	-5.45	-5.49

### Verdict


Pass

### Results

### Attachments


Frequency = 915.0 MHz, Bandwidth = 2 MHz

Images:

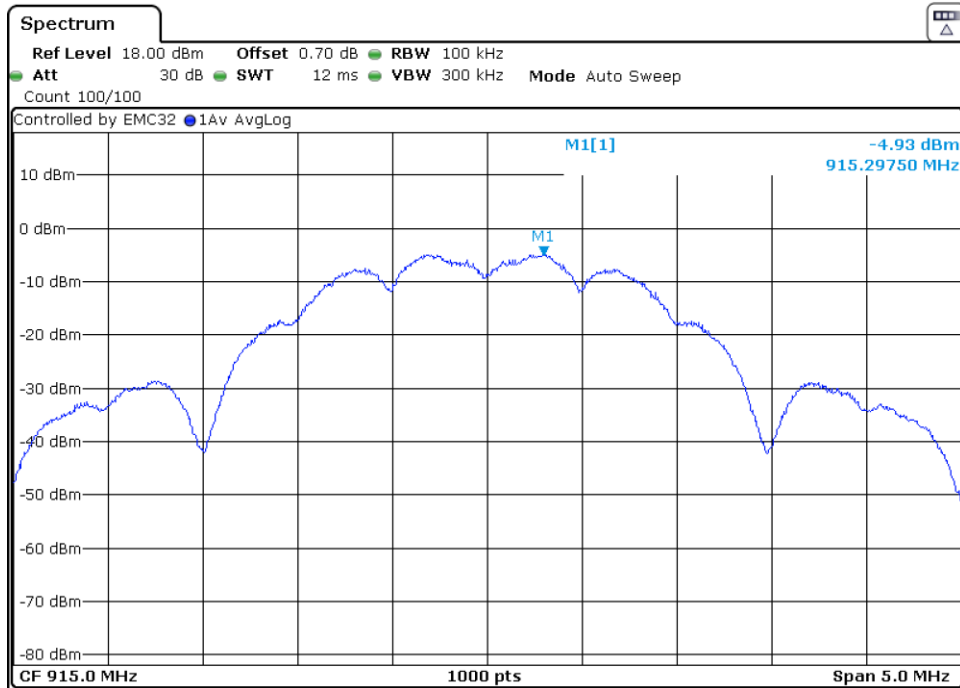


Frequency = 921.0 MHz, Bandwidth = 2 MHz

Images:

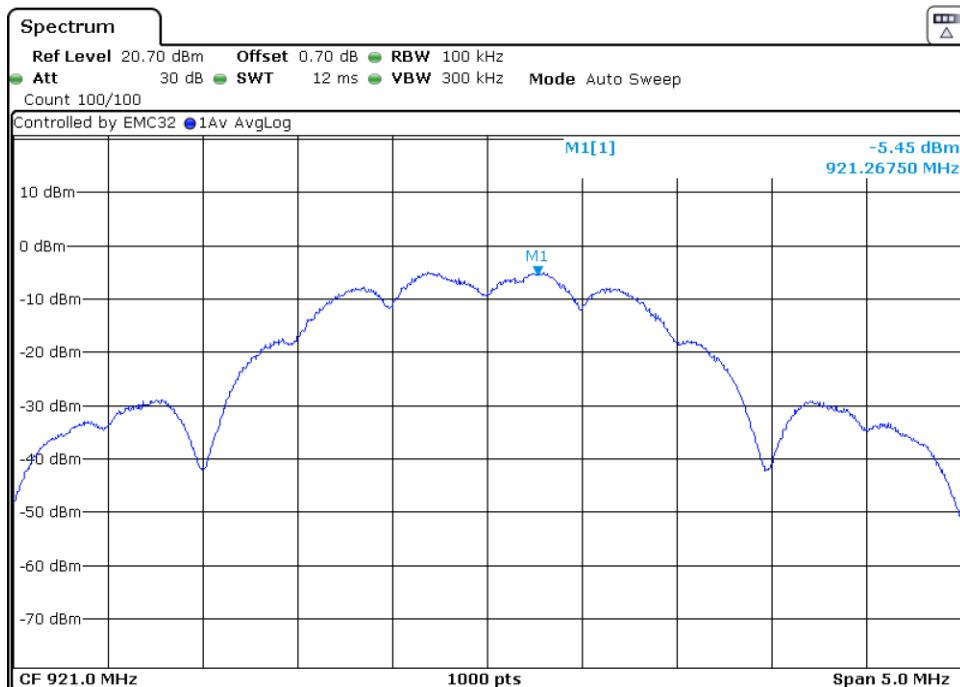

Frequency = 925.0 MHz, Bandwidth = 2 MHz

Images:

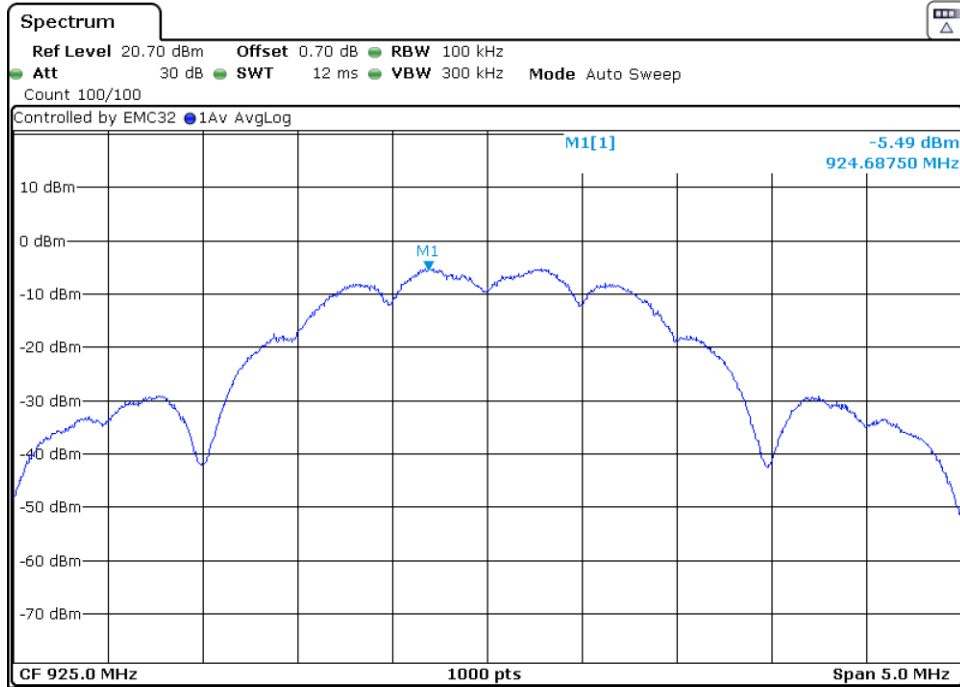

**RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power & Antenna gain**

**Limits**

§15.247(b)(3) and RSS-247 5.4(d):

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

The maximum peak conducted output power was measured using the method using a power meter (PM) according to 8.3.2.3. measurement of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v05r02 dated 04/02/2019.

RSS-247 5.4(d): The e.i.r.p. shall not exceed 4 W (36 dBm)

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Maximum declared antenna gain: 2.1 dBi

Test conditions modes: TC#01

**Results**

	Lowest frequency 915.0 MHz	Middle frequency 922.0 MHz	Highest frequency 928.0 MHz
Maximum conducted power (dBm)	10.48	10.38	10.33
Maximum EIRP power (dBm)	12.58	12.48	12.43

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power limit is not required to be reduced from the stated values.

**Verdict**


Pass

## Results

### Attachments


Frequency = 915.0 MHz, Bandwidth = 2 MHz

Images:

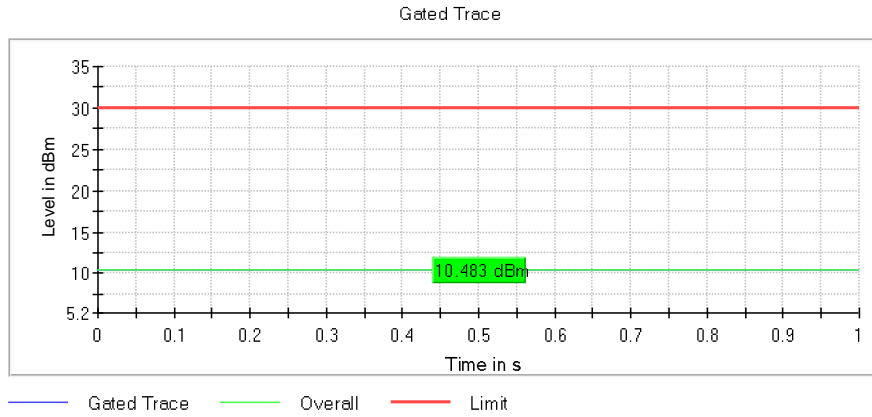


Frequency = 921.0 MHz, Bandwidth = 2 MHz

Images:

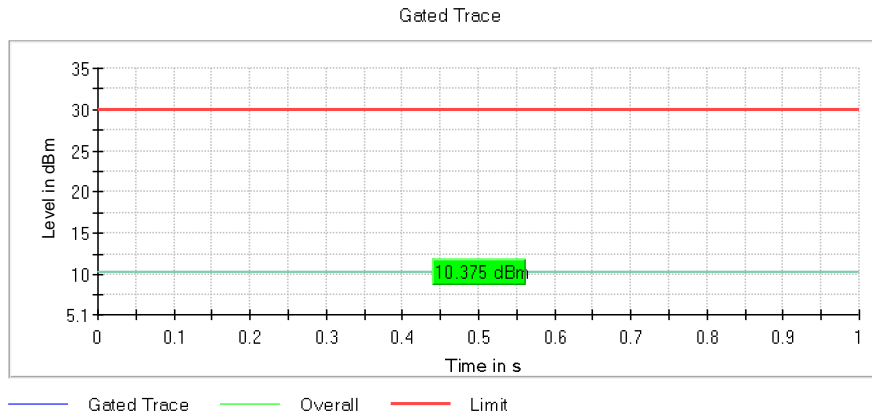

**Frequency = 925.0 MHz, Bandwidth = 2 MHz**

**Images:**

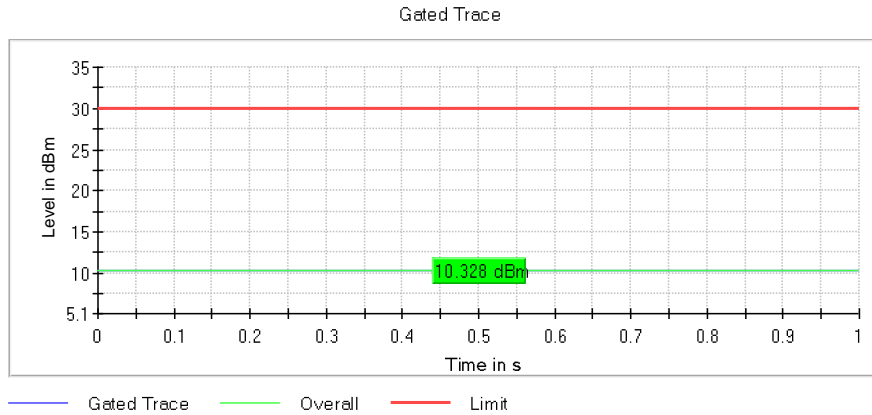

**OSP PowerMeter settings**

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

## RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter) - Conducted

### Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Note: Radiated measurements are also used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Test conditions modes: TC#01

### Results

Conducted spurious signals detected were minimum 18 dB below the reference limit for the lowest and highest operating channels.

### Verdict

Pass




**Results**

**Attachments**


**Frequency = 915.0 MHz**

**Images:**

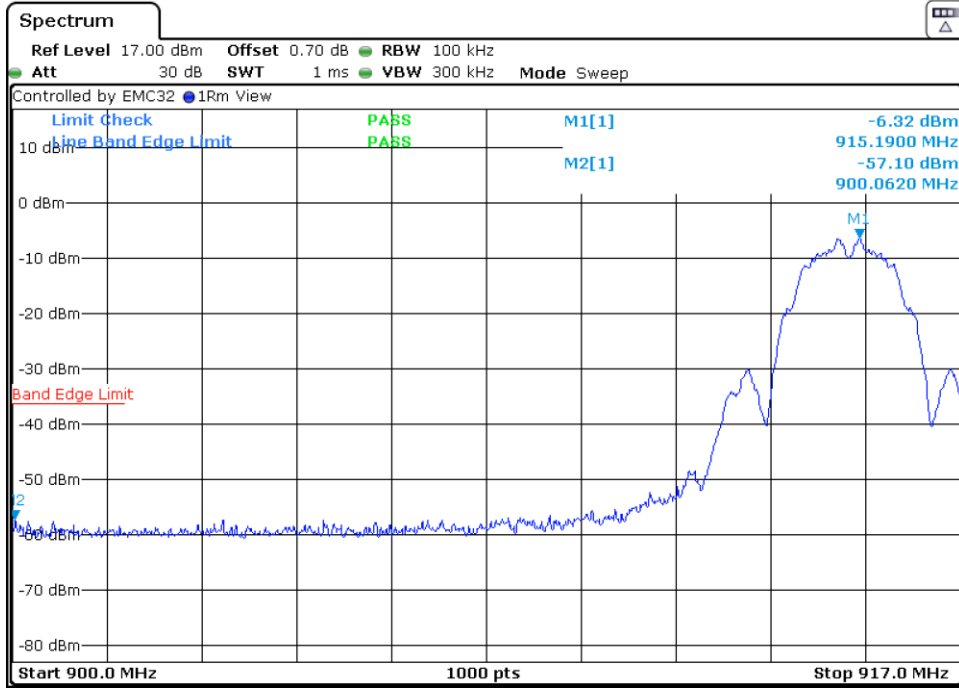

**Frequency = 925.0 MHz**

**Images:**

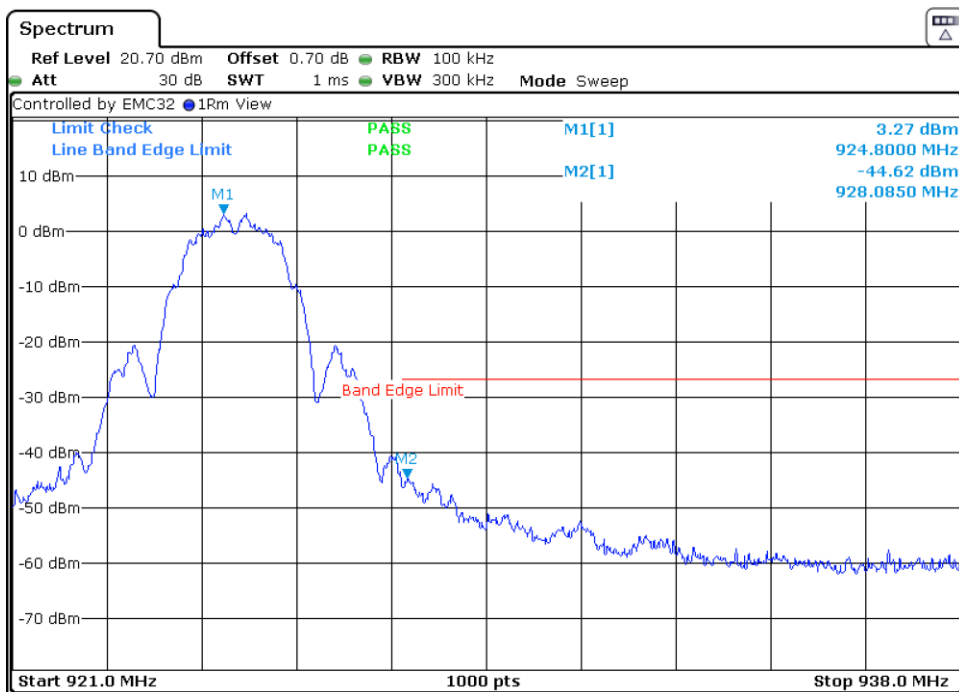

## RSS-247 5.2 (a) / RSS-GEN 6.7 FCC 15.247 (a) (2) 99dBw Occupied Channel Bandwidth 99%

### Limits

The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

Test conditions modes: TC#01

### Results

	Lowest frequency	Middle frequency	Highest frequency
	915.0 MHz	922.0 MHz	928.0 MHz
99% bandwidth (MHz)	2.34	2.32	2.32

### Verdict


Pass

**Results**

**Attachments**


**Frequency = 915.0 MHz, Bandwidth = 2 MHz**

**Images:**

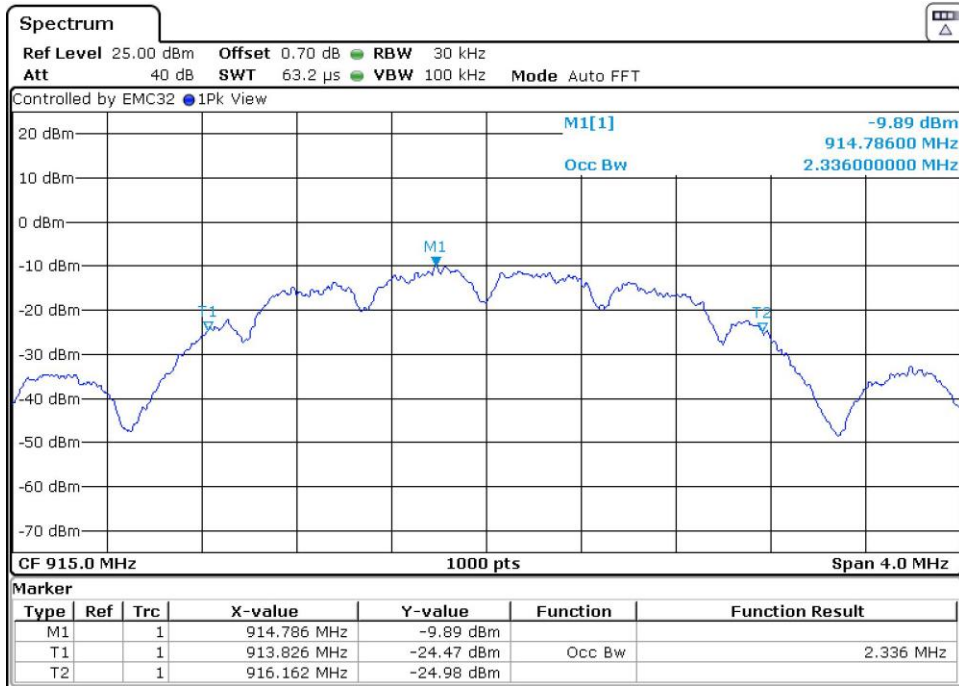


**Frequency = 921.0 MHz, Bandwidth = 2 MHz**

**Images:**

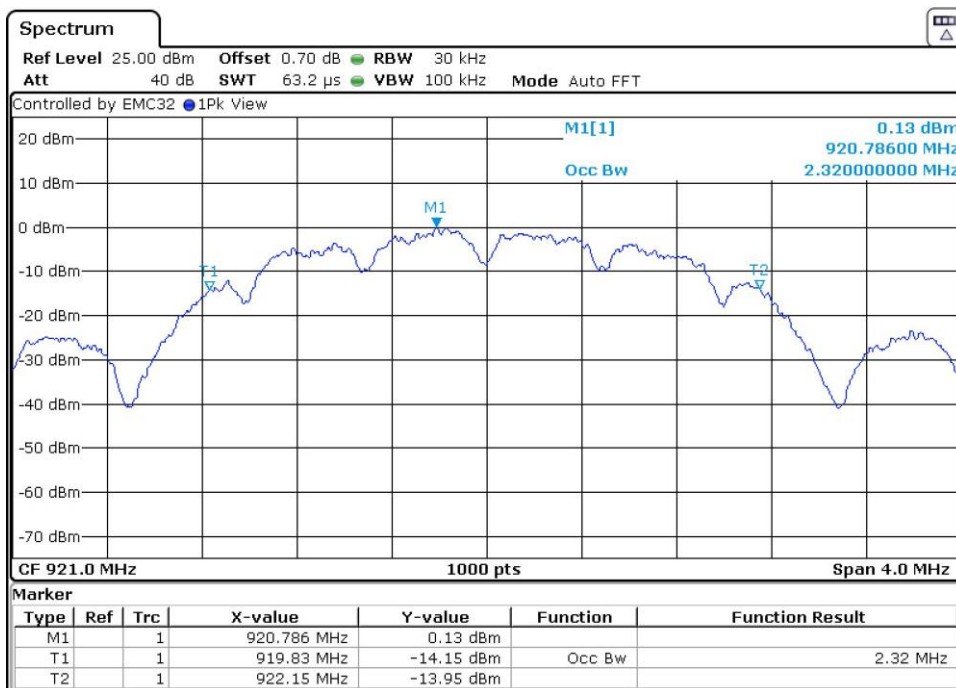

Frequency = 925.0 MHz, Bandwidth = 2 MHz

Images:

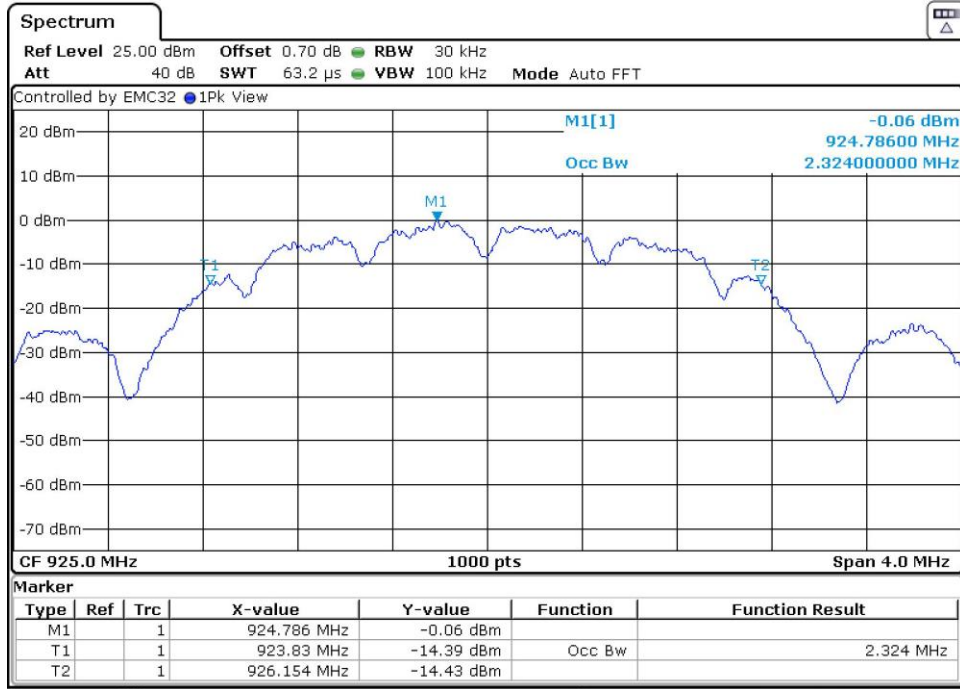

## RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Conducted

### Limits

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

### Verdict

Pass

Test conditions modes: TC#01

### Results


Conducted spurious signals detected were minimum 8 dB the reference limit for the lowest, middle and highest operating channels.

### Results

### Attachments


Frequency = 915.0 MHz

Images:

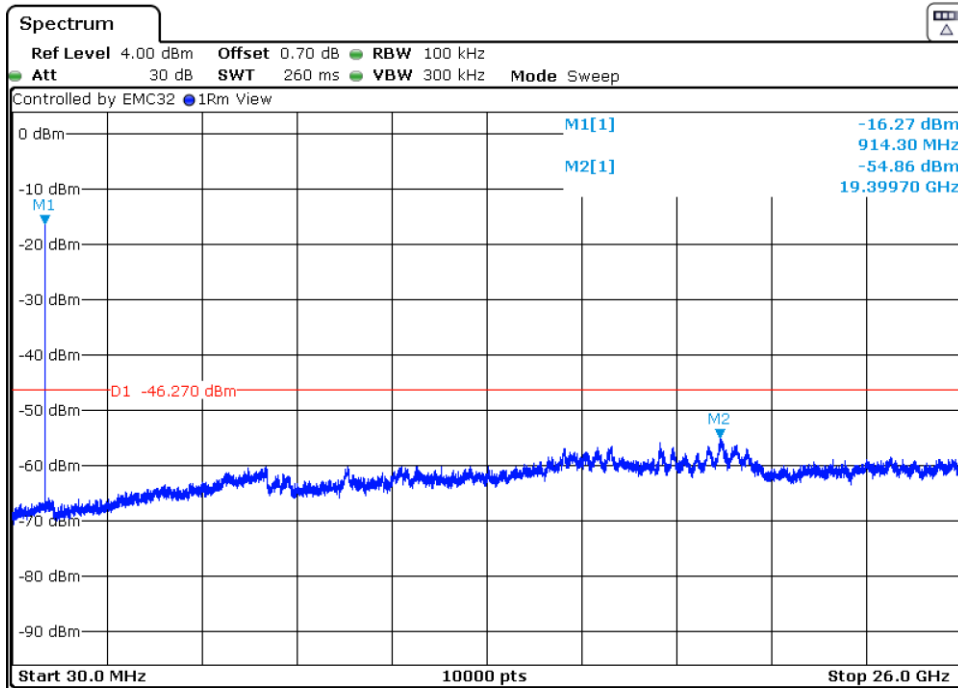


Frequency = 921.0 MHz

Images:

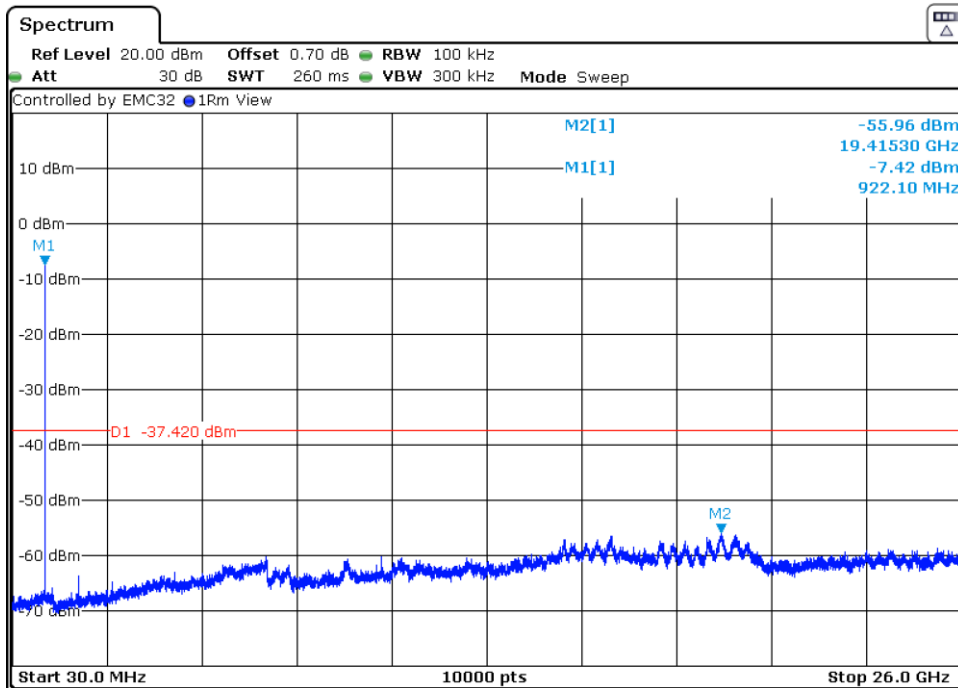

Frequency = 925.0 MHz, Bandwidth = 2 MHz  
Images:

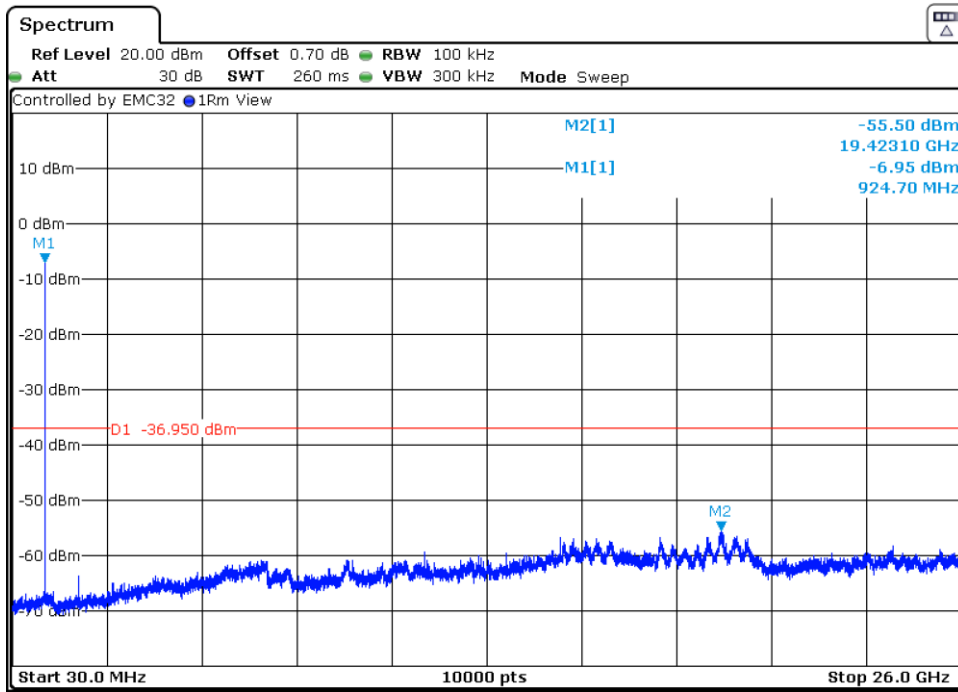

## RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Radiated

### Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength ( $\text{dB}\mu\text{V/m}$ )	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

### Verdict

Pass




Test conditions modes: TC#01

**Results: Frequency range 0.03 - 1 GHz**

The level of spurious emissions was measured as their effective radiated power when radiated by cabinet and antenna.

Low channel

**Images:**

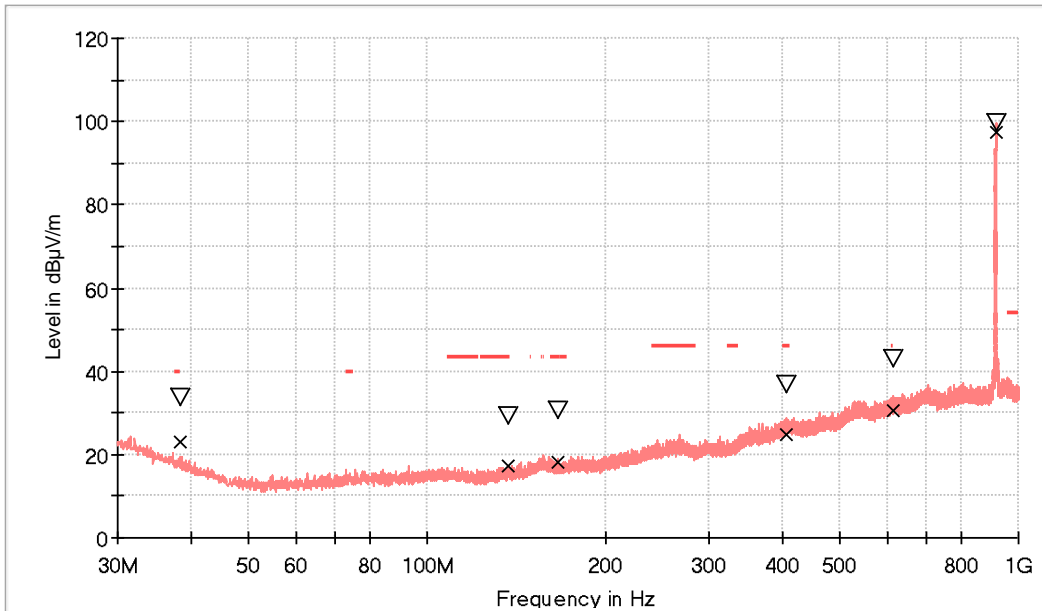


- PK+ MAXH
- - - TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- x QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)	Comments
38.148000	33.9	22.9	V	17.1	40.0	38.148000
137.233500	29.4	17.3	H	26.2	43.5	137.233500
166.673000	30.5	18.0	H	25.5	43.5	166.673000
405.050500	36.9	24.8	V	21.2	46.0	405.050500
612.824500	43.0	30.6	H	15.4	46.0	612.824500
914.785500	99.6	97.4	H	---	---	914.785500

Middle channel

Images:

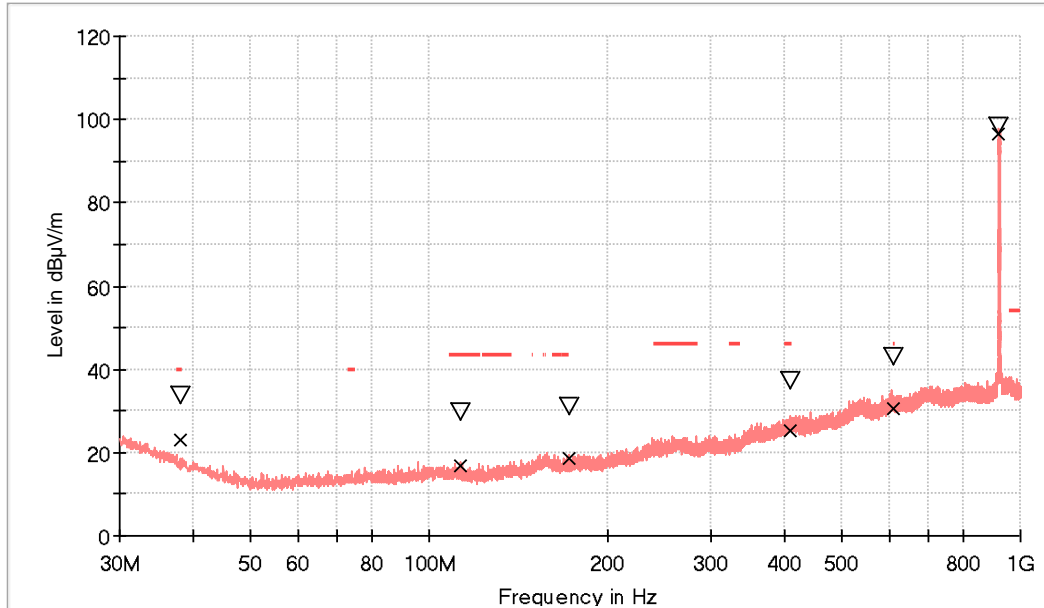


- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)	Comments
37.905500	33.7	23.1	V	16.9	40.0	
112.692500	29.6	16.6	H	26.9	43.5	
172.202000	30.9	18.5	V	25.0	43.5	
408.736500	37.3	25.1	H	20.9	46.0	
608.508000	43.0	30.5	V	15.5	46.0	
920.799500	98.2	96.3	H	---	---	Fundamental

High channel

Images:

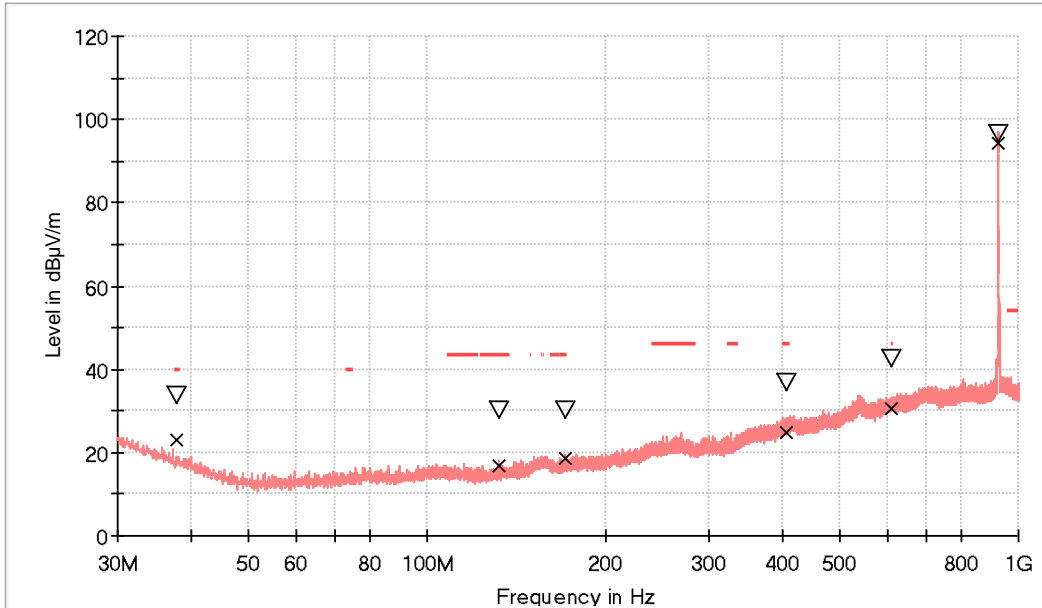

- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)	Comments
37.614500	33.7	23.2	H	16.8	40.0	
132.092500	30.1	17.0	H	26.5	43.5	
171.862500	30.3	18.5	H	25.1	43.5	
405.147500	36.9	24.9	H	21.1	46.0	
609.914500	42.4	30.5	H	15.5	46.0	
925.261500	96.4	94.5	H	---	---	Fundamental

Test conditions modes: TC#01


**Results: Frequency range 1 - 18 GHz**

**Lowest Channel**

**Attachments**

Frequency = 915.0 MHz, Bandwidth = 2 MHz, Frequency Range GHz = [1, 18]

Images:

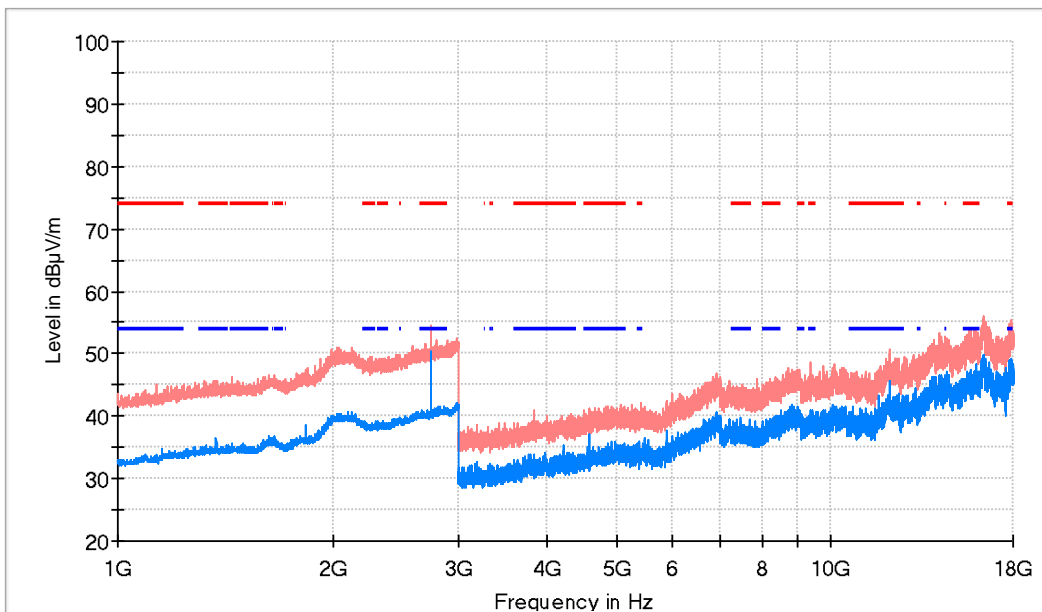

- PK+\_MAXH
- AVG\_MAXH
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVGMAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2745.00000	54.5	50.3	V	3.7	54.0
4575.00000	40.9	37.3	H	16.7	54.0
16019.00000	52.5	48.2	H	5.8	54.0
17843.50000	53.1	49.2	H	4.8	54.0


**Results: Frequency range 1 - 18 GHz**

**Middle Channel**

**Attachments**

Frequency = 921.0 MHz, Bandwidth = 2 MHz, Frequency Range GHz = [1, 18]

**Images:**

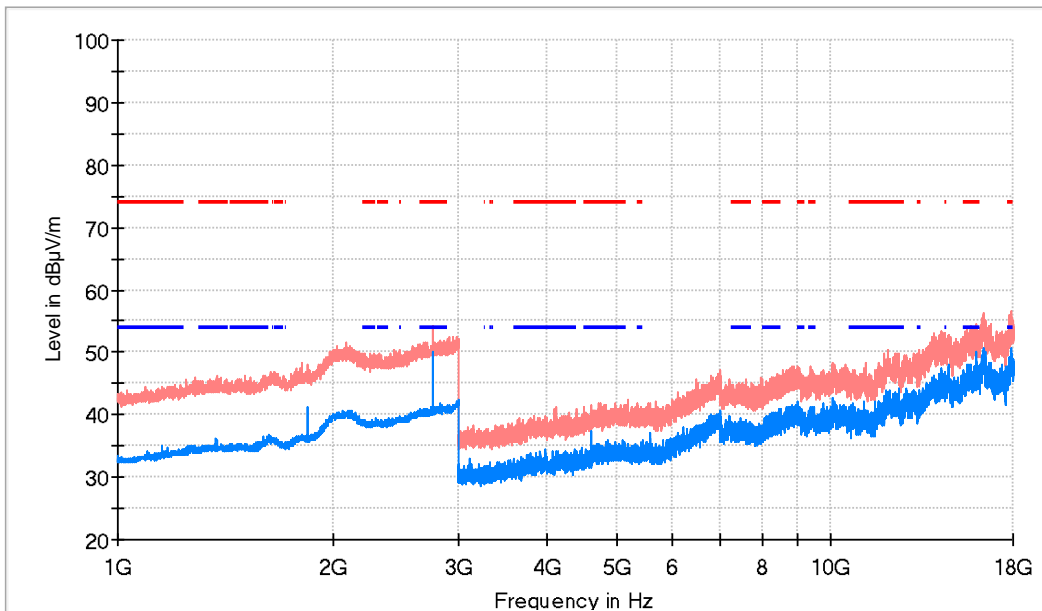

- PK+\_MAXH
- AVG\_MAXH
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2763.000000	53.9	50.0	V	4.0	54.0
4605.000000	41.4	37.5	H	16.5	54.0
15994.500000	53.5	50.0	V	4.0	54.0
17879.500000	54.2	50.7	V	3.3	54.0


**Results: Frequency range 1 - 18 GHz**

**Highest Channel**

**Attachments**

Frequency = 925.0 MHz, Bandwidth = 2 MHz, Frequency Range GHz = [1, 18]

**Images:**

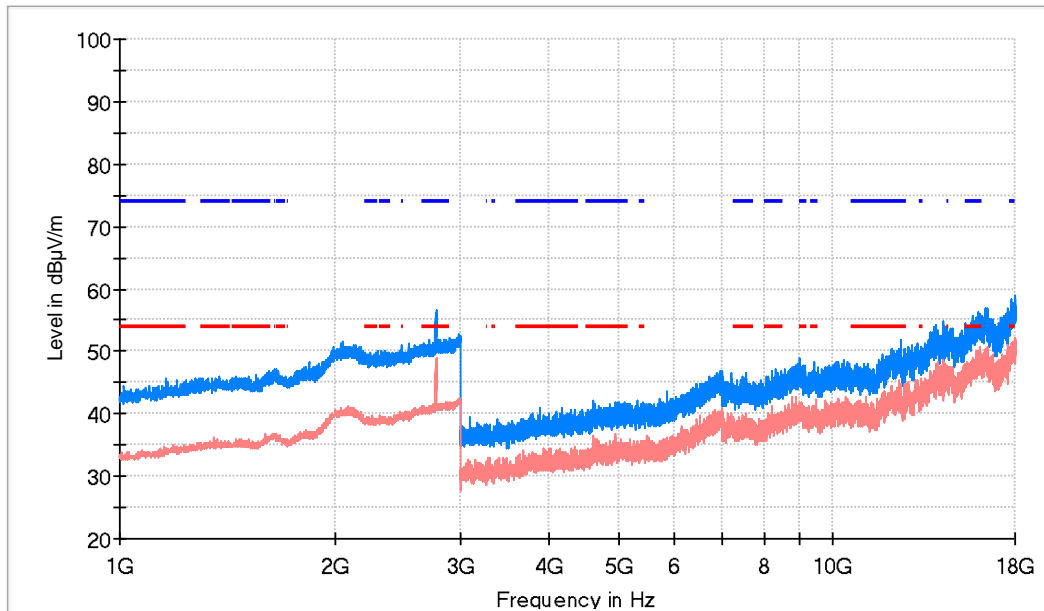

- PK+ \_MAXH
- AVG \_MAXH
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit

Frequency (MHz)	PK+ _MAXH (dBµV/m)	AVG _MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2777.000000	55.9	49.1	H	4.9	54.0
16078.000000	55.7	50.6	H	3.4	54.0
17995.000000	57.2	52.2	V	1.8	54.0

**Measurements**

Subrange	Step Size	Detectors	Bandwid	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	100 kHz	1 s	20 dB
1 GHz - 3 GHz	500 kHz	PK+ ; AVG	1 MHz	0.1 s	20 dB
3 GHz - 18 GHz	500 kHz	PK+ ; AVG	1 MHz	0.1 s	30 dB