WiFi ESL System Overview:

WIFI Electronic Office Signage System is a kind of advanced wireless automatic updating system, which replaces the way of traditional paper sign/table card that need manual replacement. WIFI ESL System with all you only need is an electronic office sign devices to make it work on the office or conference space to quickly change the people or conference information. It is a paperless, accurate, efficient and cost-effective solution.

Picksmart WIFI ESL Parameter:

| 4.2inch Parameter | Product code | PW42R_V1 |
|---|--------------------------|--|
| PRODUCT NAME | Dimensions (mm) | 104.95*95.93*15.2mm |
| | Display technology | 3-color E ink display |
| Inventory Quantity: 999999 Material Code: DH-2023 Storage Number: A0-00 | Active display area (mm) | 84.6(H) * 63.4(V) |
| Outbound Quantity: 1010 | Resolution (pixels) | 400*300 |
| | Pixel size (mm) | 0.212*0.212 |
| | Pixel colors | Black/White/Red |
| | Viewing angle | Nearly 180° |
| | Working temperature | 0 - 40°C |
| | Product weight | 150g |
| | Battery | CR2477*6 |
| | Power | Button cell power supply |
| | Battery lifetime | Up to 1 year of autonomy (For 4 refresh per day) |
| | Lights and Buttons | 1 × 3 color LED & 2 Keys & 1 Reset key |
| | Communication mode | 2.4G wifi b/g/n |
| | Support content format | Text/Picture/QR code/Barcode |



Tel: 131 2873 5822 / 0755-2963 8421 QQ: 212385937

| Wireless firmware update | Yes |
|---------------------------|-----|
| Support remote control | Yes |
| Interface interconnection | Yes |

| 4.2inch Parameter | Product code | PW42R_V2 |
|-------------------|---------------------------|---|
| | Dimensions (mm) | 124*90*12mm |
| RAIFRO | Display technology | 3-color E ink display |
| | Active display area (mm) | 84.6(H) * 63.4(V) |
| 47 Router:2283 | Resolution (pixels) | 400*300 |
| | Pixel size (mm) | 120dpi |
| | Pixel colors | Black/White/Red |
| | Viewing angle | Nearly 180° |
| | Working temperature | 0 - 50℃ |
| | Battery | 3000mAh(Rechargeable polymer batteries) |
| | Power | Type-C interface charging |
| | Battery lifetime | 1-2 years (20 times / day) |
| | Lights and Buttons | 3 × 7 color LED & 3 key |
| | Communication mode | 2.4G wifi b/g/n |
| | Support content format | Text/Picture/QR code/Barcode |
| | Wireless firmware update | Yes |
| | Support remote control | Yes |
| | Interface interconnection | Yes |

| 7.5inch Parameter | Product code | PW75R_V1 |
|------------------------------------|--------------------------|-----------------------|
| 一级护理 一级护理 治疗饮食 (低槽 青霉素过数) 10000 (| Dimensions (mm) | 180*130*13mm |
| | Display technology | 3-color E ink display |
| | Active display area (mm) | 163.2(H) * 97.92(V) |
| | Resolution (pixels) | 800*480 |
| | Pixel size (mm) | 0.204*0.204 |



Shenzhen Picksmart Technology Co., Ltd

Add: Room 406, Deguanting Business Center, Xin'an 3rd Road, Bao'an 28th District, Shenzhen City, China.

Tel: 131 2873 5822 / 0755-2963 8421 QQ: 212385937

| Pixel colors | Black/White/Red |
|---------------------------|--|
| Viewing angle | Nearly 180° |
| Working temperature | 0 - 40°C |
| Product weight | 200g |
| Battery | 3000mAh(Rechargeable polymer batteries) |
| Power | Type-C interface charging |
| Battery lifetime | Up to 1year of autonomy on a single charge |
| Lights and Buttons | 1 × 3 color LED & 1key |
| Communication mode | wifi b/g/n |
| Support content format | Text/Picture/QR code/Barcode |
| Wireless firmware update | Yes |
| Support remote control | Yes |
| Interface interconnection | Yes |

| 10.2inch Parameter | Product code | PW102R_V1 |
|---------------------|--------------------------|--|
| | Dimensions (mm) | 237.9*176.9*13.5mm |
| P 酸新科技11-2会议室 | Display technology | 3-color E ink display |
| 99:00-12:00 到第 会议日程 | Active display area (mm) | 215.5(H) * 143.68(V) |
| 会议中 14:00-17:00 吳重思 | Resolution (pixels) | 960*640 |
| | Pixel size (mm) | 0.2245*0.2245 |
| | Pixel colors | Black/White/Red |
| | Viewing angle | Nearly 180° |
| | Working temperature | 0 - 40°C |
| | Product weight | 400g |
| | Battery | 3000mAh(Rechargeable polymer batteries) |
| | Power | Type-C interface charging |
| | Battery lifetime | Up to 1year of autonomy on a single charge |
| | Lights and Buttons | 1 × 3 color LED & 1key |



Tel: 131 2873 5822 / 0755-2963 8421 QQ: 212385937

| Communication mode | wifi b/g/n |
|---------------------------|------------------------------|
| Support content format | Text/Picture/QR code/Barcode |
| Wireless firmware update | Yes |
| Support remote control | Yes |
| Interface interconnection | Yes |


| 13.3inch Parameter | Product code | PW133R_V1 |
|---|---------------------------|--|
| | Dimensions (mm) | 298*232*13.8mm |
| XX Technology Co., LTD empty Continued visit 3 | Display technology | 3-color E ink |
| 8/10 | Active display area (mm) | 275.52(H) * 195.16(V) |
| With information final points of intelligent discretion. See invariant and intelligent discretion. Acres to the first final | Resolution (pixels) | 960*680 |
| | Pixel size (mm) | 0.287*0.287 |
| | Pixel colors | Black/White/Red |
| | Viewing angle | Nearly 180° |
| | Working temperature | 0 - 40°C |
| | Product weight | 750g |
| | Battery | 4000mAh(Rechargeable polymer batteries) |
| | Power | Type-C interface charging |
| | Battery lifetime | Up to 1year of autonomy on a single charge |
| | Lights and Buttons | 1 × 3 color LED & 1key |
| | Communication mode | wifi b/g/n |
| | Support content format | Text/Picture/QR code/Barcode |
| | Wireless firmware update | Yes |
| | Support remote control | Yes |
| | Interface interconnection | Yes |

Tel: 131 2873 5822 / 0755-2963 8421 QQ: 212385937

Notable Features:

- 1.Ultra-low power consumption: Up to 1year of autonomy on a single charge.
- 2. Easy installation without cable connection.
- 3.Real-time online communication based on standard WIFI network (no additional deployment of dedicated base station) .
- 4. Display technology: E ink screen clear display.

System Structure:

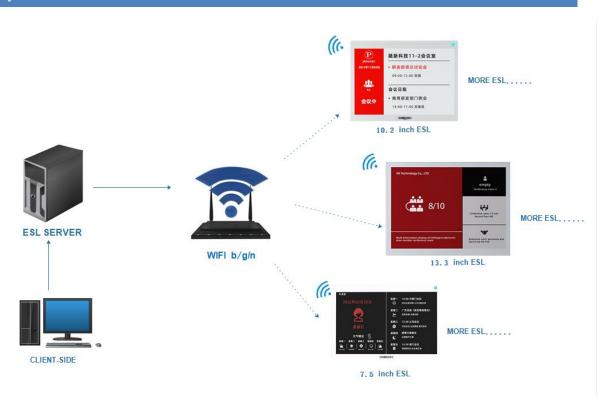

Product installation mode:

Desktop Holder and Paste Bracket

7.5 inch Support (Desktop Holder and Paste Bracket)



10.2 inch Support (Desktop Holder and Paste Bracket)




13.3 inch Support (Desktop Holder and Paste Bracket)







Interface Interconnection Mode:

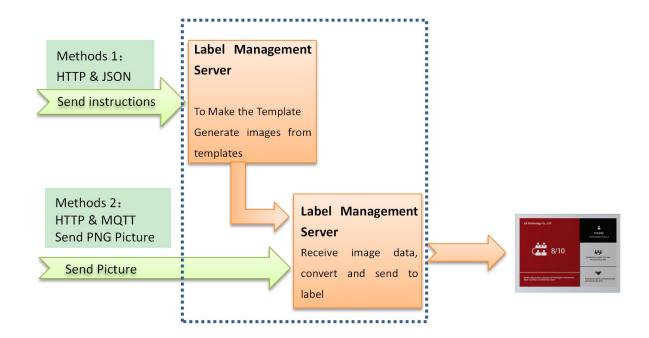

Application Scenarios:

Mainly used in: hospital, school, office building, conference room, workstation and other scenarios.



































Federal Communications Commission (FCC) Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications made to this device not expressly approved by Picksmart Technology Co., Limited may void the FCC authorization to operate this device.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

RF exposure statement:

The transmitter must not be colocated or operated in conjunction with any other antenna or transmitter. This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a Minimum distance of 20cm between the radiator and any part of your body.