



# Appendix B

## Detailed Test Results

|                        |
|------------------------|
| 1. GSM                 |
| GSM850 for Body        |
| GSM1900 for Body       |
| 2. WCDMA               |
| WCDMA Band II for Body |
| WCDMA Band IV for Body |
| WCDMA Band V for Body  |
| 3. LTE                 |
| LTE Band 2 for Body    |
| LTE Band 4 for Body    |
| LTE Band 5 for Body    |
| LTE Band 12 for Body   |
| LTE Band 13 for Body   |
| LTE Band 25 for Body   |
| LTE Band 26 for Body   |
| LTE Band 41 for Body   |
| LTE Band 66 for Body   |
| LTE Band 71 for Body   |
| 4. WIFI                |
| WIFI 2.4GHz for Body   |
| WIFI 5.2GHz for Body   |
| WIFI 5.8GHz for Body   |



Test Laboratory: LCS-SAR Lab

**GSM850 GPRS 4TS 190CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.367 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.451 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.587 W/kg

**SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (measured) = 0.392 W/kg

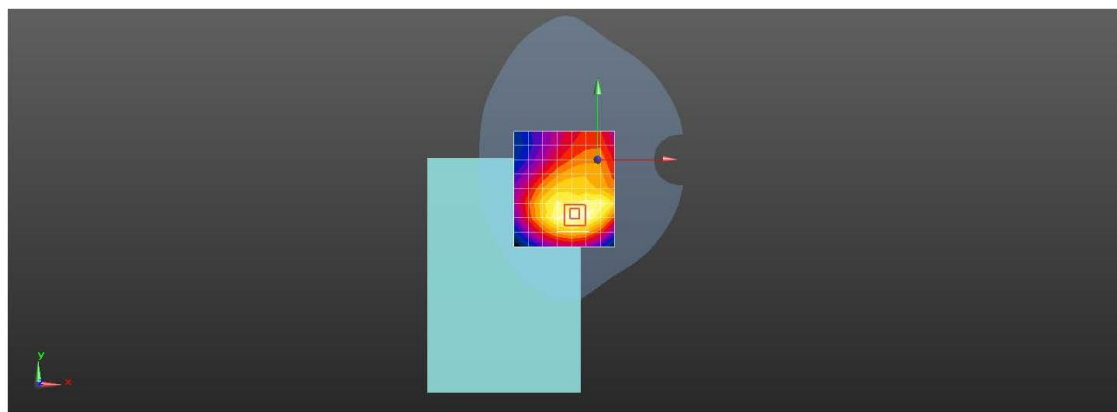

0 dB = 0.367 W/kg = -4.36 dBW/kg



Test Laboratory: LCS-SAR Lab

**GSM1900 GPRS 4TS 661CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.377$  S/m;  $\epsilon_r = 40.122$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.610 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.053 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.229 W/kg**

Maximum value of SAR (measured) = 0.740 W/kg

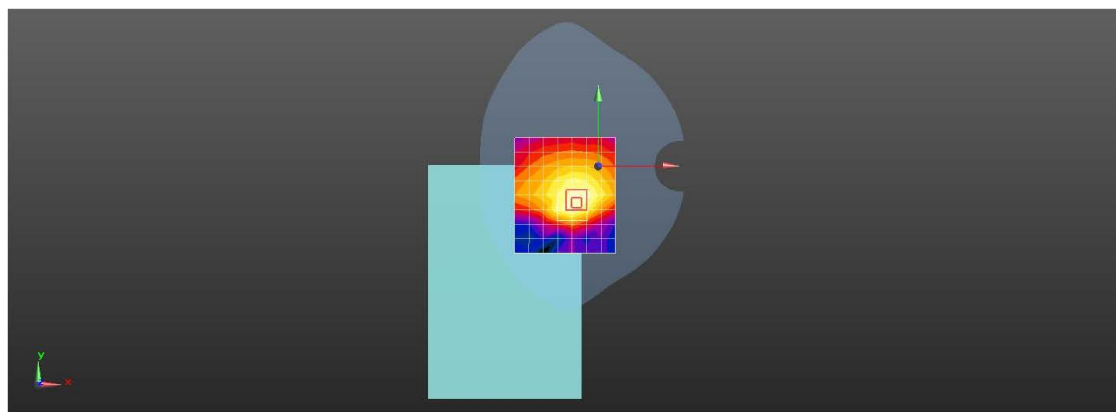

0 dB = 0.610 W/kg = -2.15 dBW/kg



Test Laboratory: LCS-SAR Lab

**WCDMA Band II 9400CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.377$  S/m;  $\epsilon_r = 40.122$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.609 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.053 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.229 W/kg**

Maximum value of SAR (measured) = 0.739 W/kg

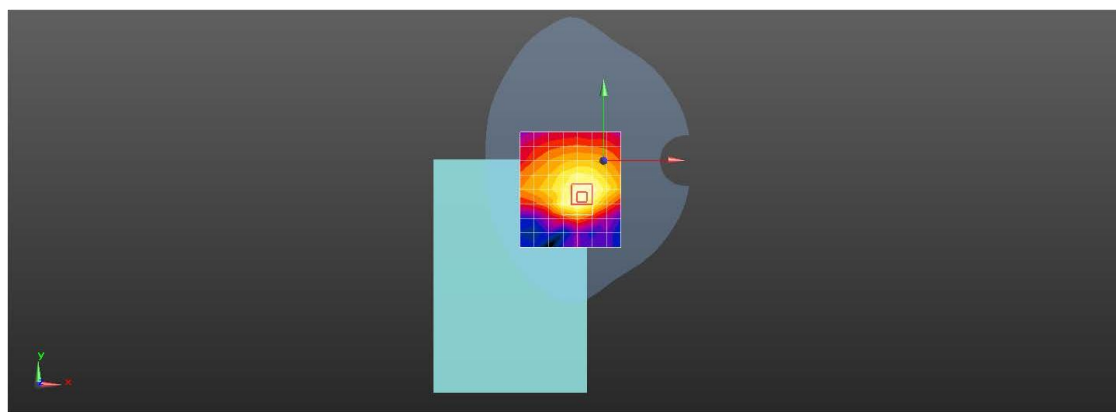

0 dB = 0.609 W/kg = -2.15 dBW/kg



Test Laboratory: LCS-SAR Lab

**WCDMA Band IV 1412CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.4$  MHz;  $\sigma = 1.297$  S/m;  $\epsilon_r = 40.522$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.625 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.116 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.229 W/kg**

Maximum value of SAR (measured) = 0.774 W/kg

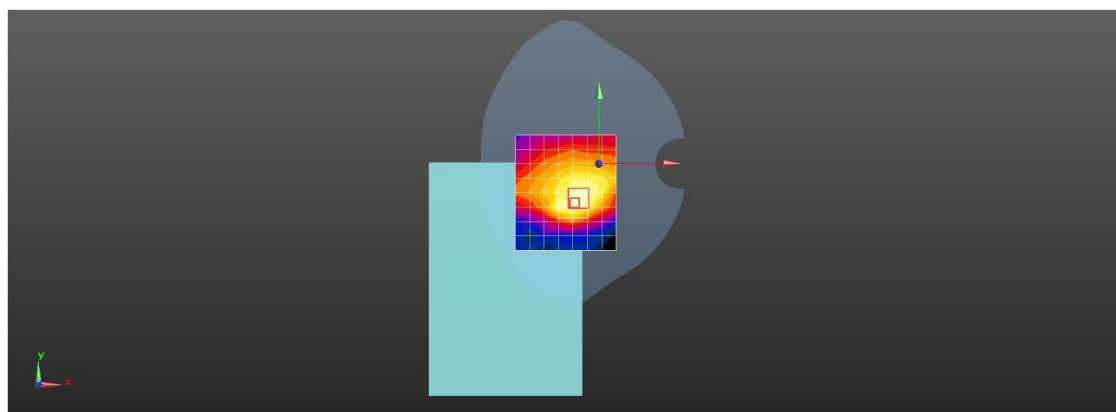

0 dB = 0.625 W/kg = -2.04 dBW/kg



Test Laboratory: LCS-SAR Lab

**WCDMA Band V 4182CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 40.822$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.371 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.456 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.596 W/kg

**SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.161 W/kg**

Maximum value of SAR (measured) = 0.397 W/kg

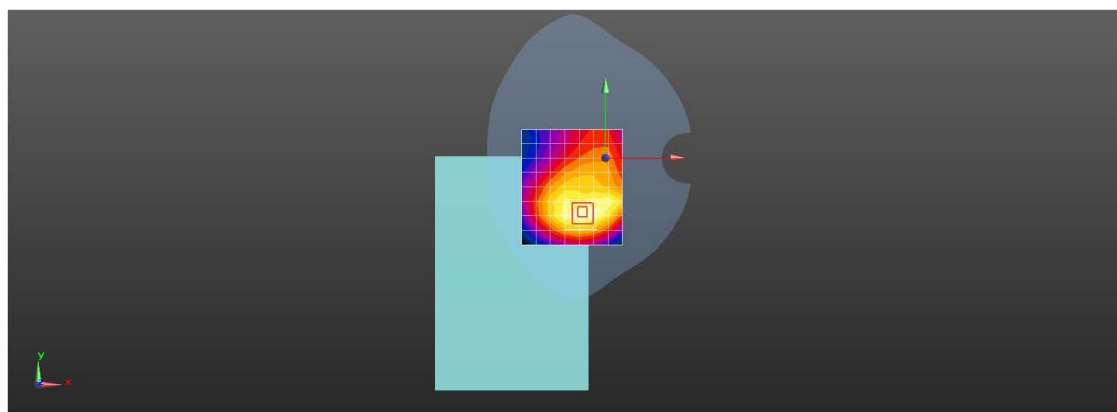

0 dB = 0.371 W/kg = -4.31 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 2 20M QPSK 1RB49 18700CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 20MHZ (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 40.15$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.926 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.698 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.382 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

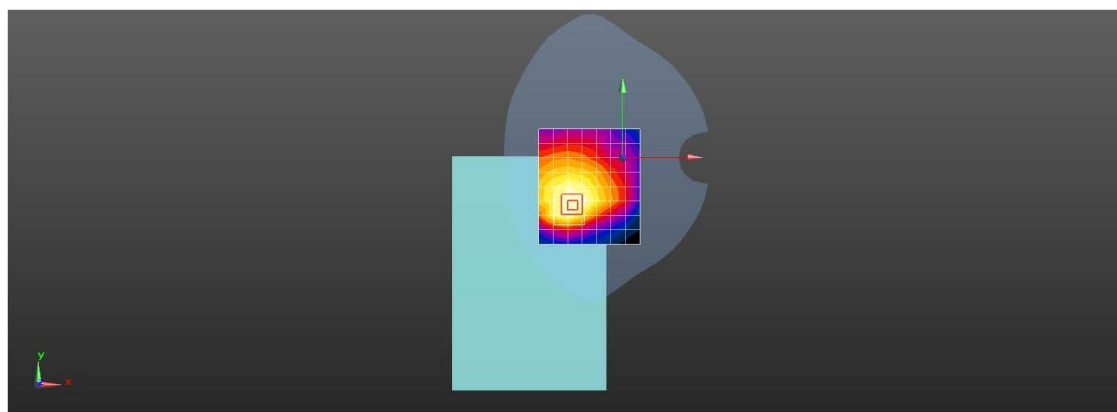

0 dB = 0.926 W/kg = -0.33 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 4 20M QPSK 1RB49 20300CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 20MHZ (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.314$  S/m;  $\epsilon_r = 40.428$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.619 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.90 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.860 W/kg

**SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.224 W/kg**

Maximum value of SAR (measured) = 0.644 W/kg

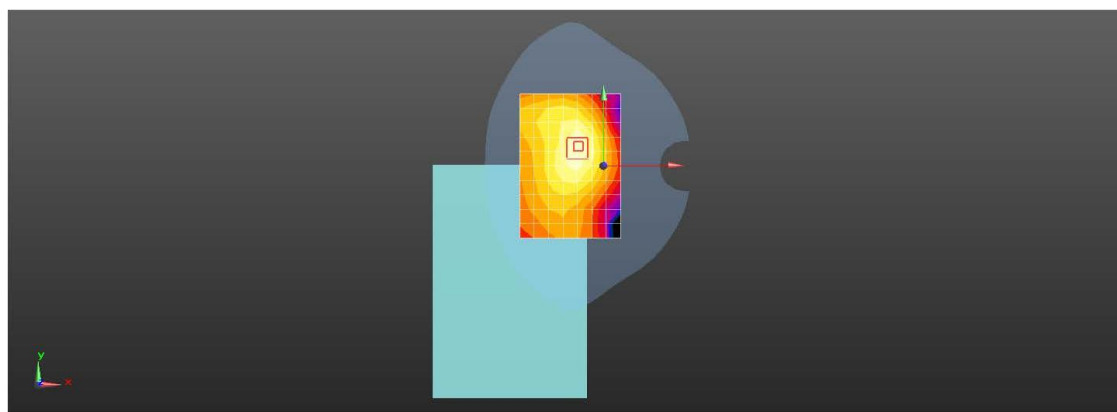

0 dB = 0.619 W/kg = -2.08 dBW/kg





Test Laboratory: LCS-SAR Lab

**LTE Band 5 10M QPSK 1RB0 20525CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 40.825$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.417 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.58 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.655 W/kg

**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.414 W/kg

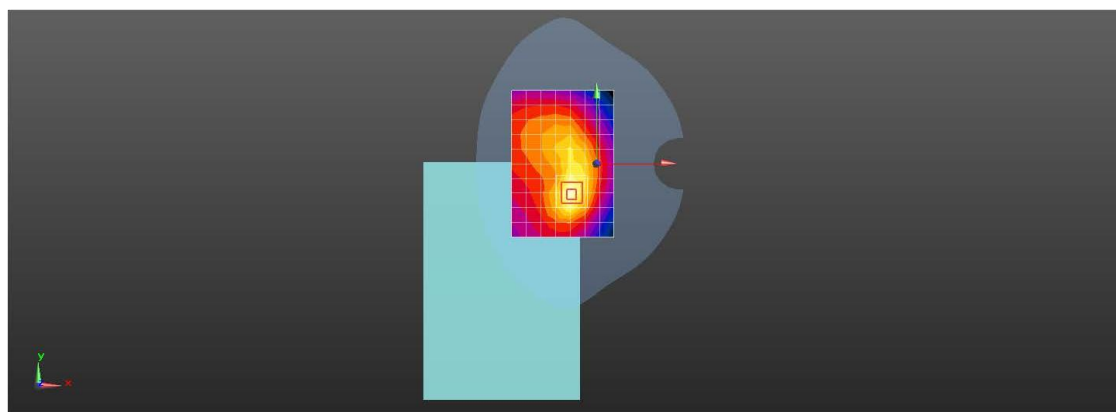

0 dB = 0.417 W/kg = -3.80 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 12 10M QPSK 1RB24 23060CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704$  MHz;  $\sigma = 0.863$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.378 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.20 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.588 W/kg

**SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.376 W/kg

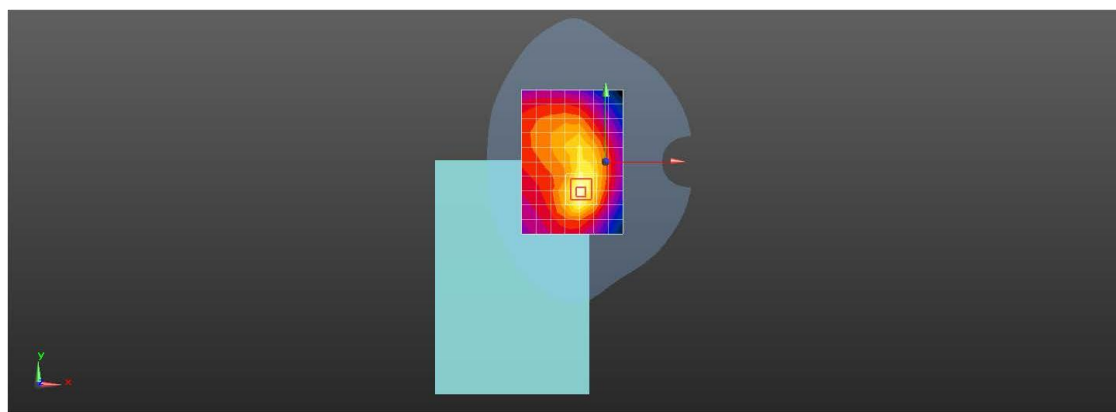

0 dB = 0.378 W/kg = -4.22 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 13 10M QPSK 1RB24 23230CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.912$  S/m;  $\epsilon_r = 41.356$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.398 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.29 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.614 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.397 W/kg

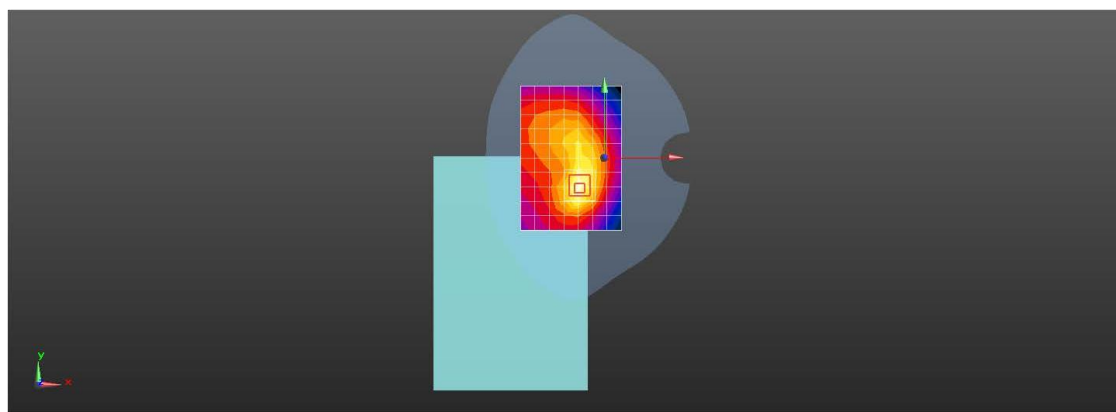

0 dB = 0.398 W/kg = -4.00 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 25 20M QPSK 1RB49 26140CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 20MHZ (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 40.15$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.688 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.10 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.23 W/kg

**SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (measured) = 0.757 W/kg

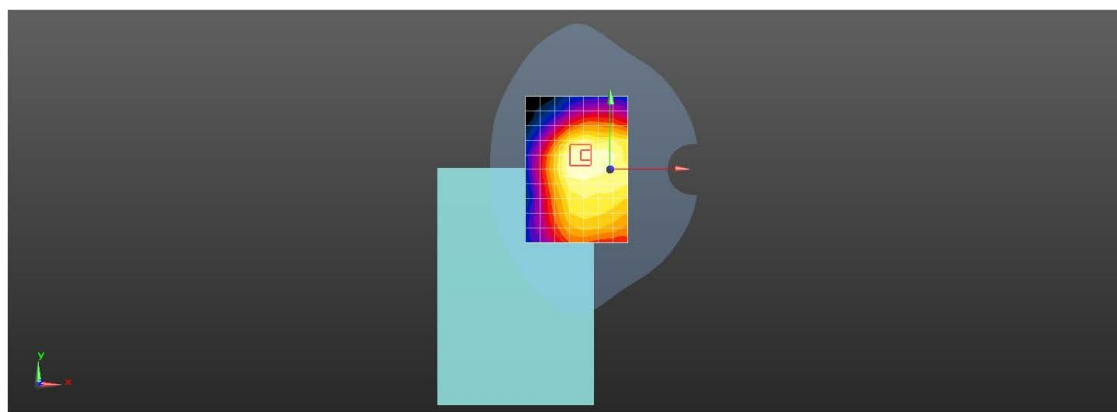

0 dB = 0.688 W/kg = -1.62 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 26 15M QPSK 1RB0 26915CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 15MHZ (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 40.825$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.527 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.67 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.802 W/kg

**SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.277 W/kg**

Maximum value of SAR (measured) = 0.600 W/kg

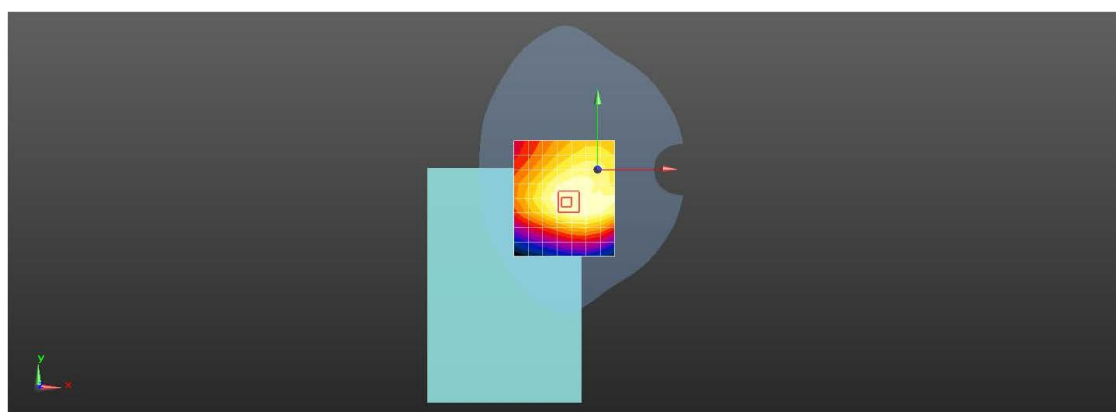

0 dB = 0.527 W/kg = -2.78 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 41 20M QPSK 1RB49 41490CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-TDD BW 20MHZ (0); Frequency: 2680 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.088$  S/m;  $\epsilon_r = 39.005$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.35, 7.35, 7.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.735 W/kg



**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.444 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.200 W/kg**

Maximum value of SAR (measured) = 0.711 W/kg

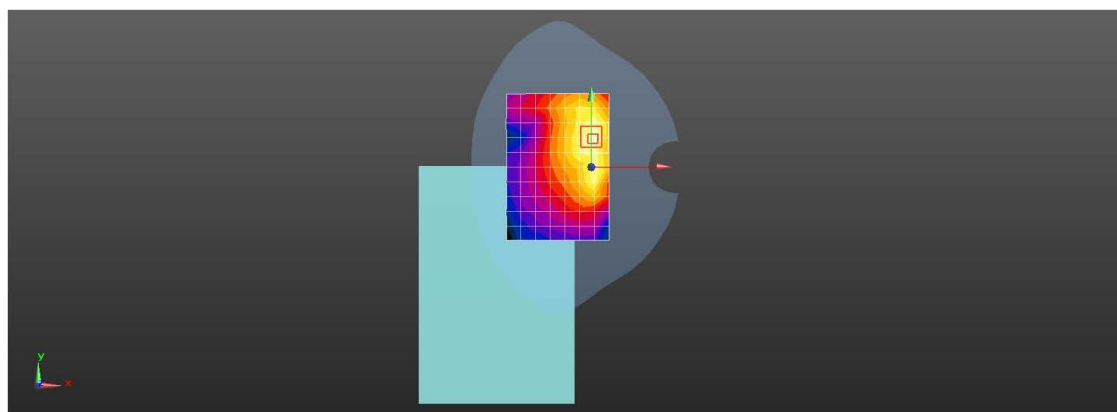

0 dB = 0.735 W/kg = -1.34 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 66 20M QPSK 1RB49 132572CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 20MHZ (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.343$  S/m;  $\epsilon_r = 40.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.315 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.241 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.480 W/kg

**SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.096 W/kg**

Maximum value of SAR (measured) = 0.320 W/kg

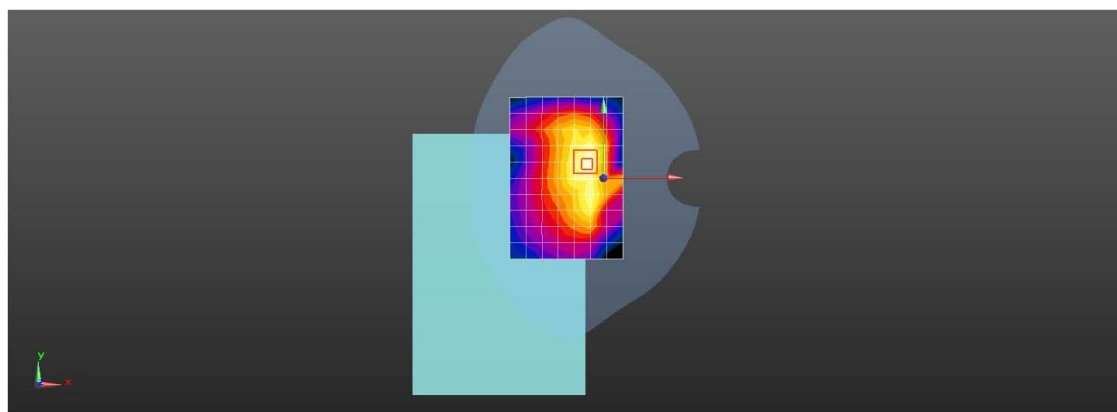

0 dB = 0.315 W/kg = -5.02 dBW/kg



Test Laboratory: LCS-SAR Lab

**LTE Band 71 20M QPSK 1RB49 133372CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, LTE-FDD BW 20MHZ (0); Frequency: 688 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 688$  MHz;  $\sigma = 0.854$  S/m;  $\epsilon_r = 42.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.471 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.09 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.710 W/kg

**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.536 W/kg

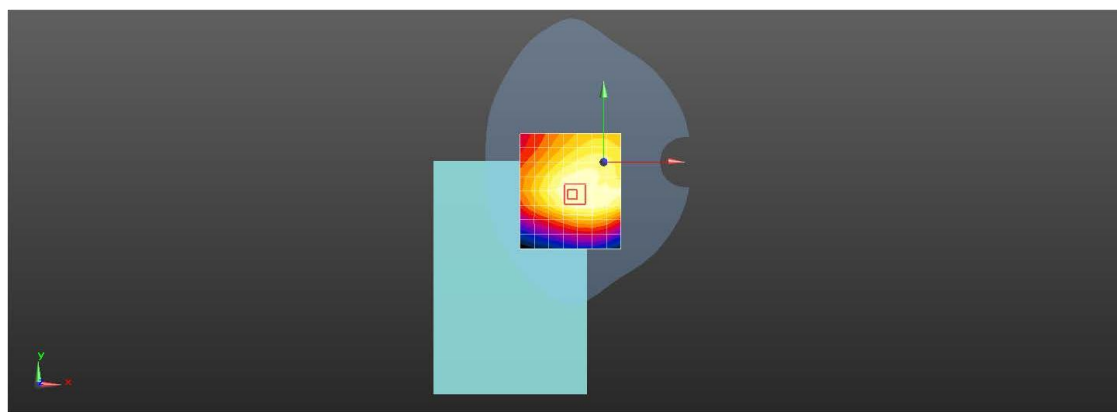

0 dB = 0.471 W/kg = -3.27 dBW/kg





Test Laboratory: LCS-SAR Lab

**WIFI 2.4G 802.11b 6CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.004

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.813$  S/m;  $\epsilon_r = 39.951$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.50, 7.50, 7.50); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.883 W/kg



**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.654 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.237 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

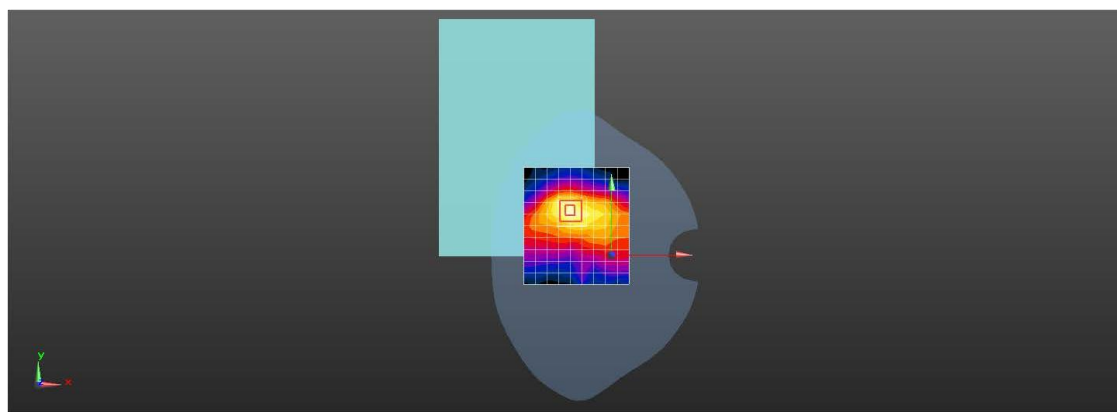

0 dB = 0.883 W/kg = -0.54 dBW/kg



Test Laboratory: LCS-SAR Lab

**WIFI 5.2G 802.11n 36CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, WI-FI(5.2GHz) (0); Frequency: 5180 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.633$  S/m;  $\epsilon_r = 36.852$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.45, 5.45, 5.45); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.193 W/kg



**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9710 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.534 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.234 W/kg

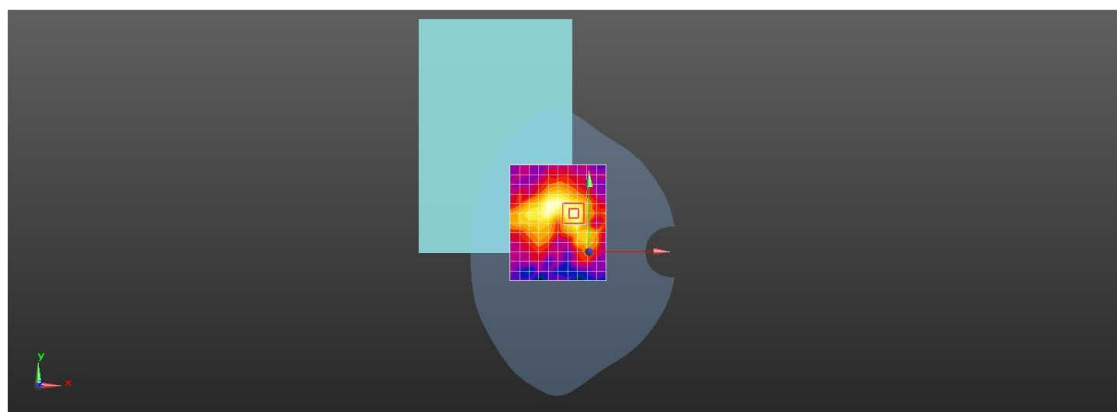

0 dB = 0.193 W/kg = -7.15 dBW/kg



Test Laboratory: LCS-SAR Lab

**WIFI 5.8G 802.11a 149CH Rear side 0mm****DUT: Tablet pc; Type: TAB10P; Serial: NA**

Communication System: UID 0, WI-FI(5.8GHz) (0); Frequency: 5745 MHz;Duty Cycle: 1:1.032

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.311$  S/m;  $\epsilon_r = 35.184$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.96, 4.96, 4.96); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.292 W/kg



**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.020 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.952 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.305 W/kg

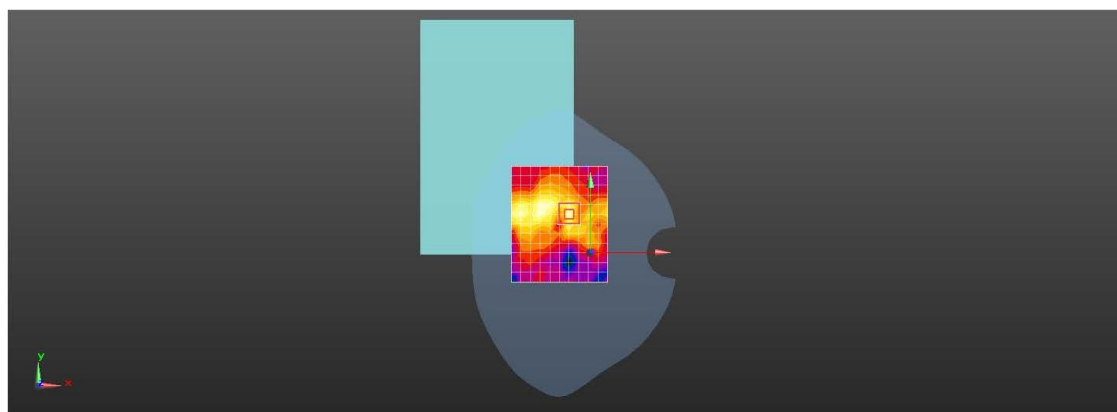

0 dB = 0.292 W/kg = -5.34 dBW/kg

