



EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

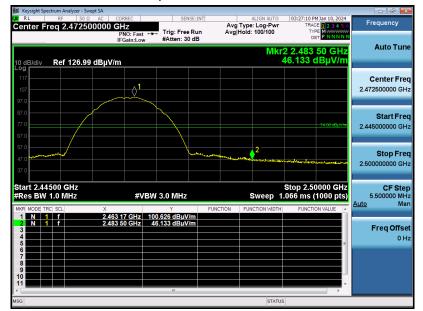

Test Graph for Average Measurement

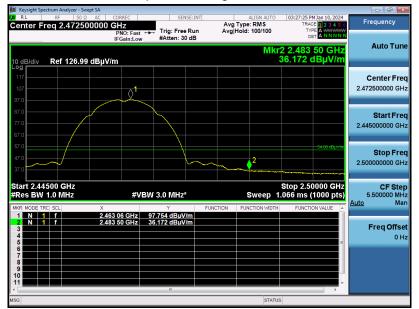

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

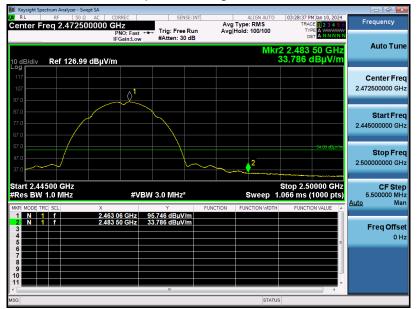


RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

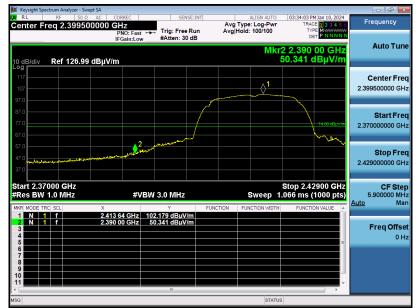

Test Graph for Average Measurement

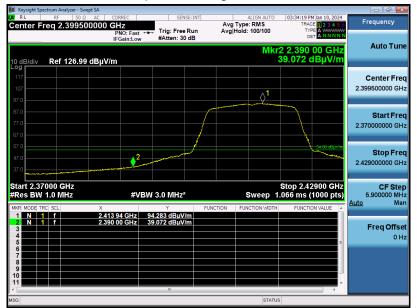

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

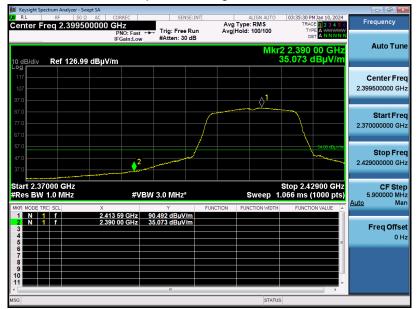

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

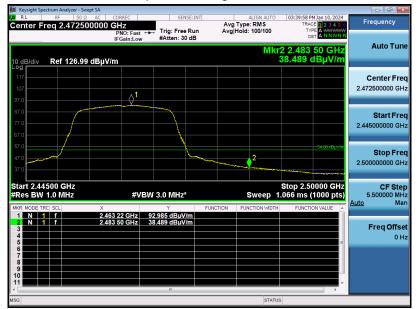

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

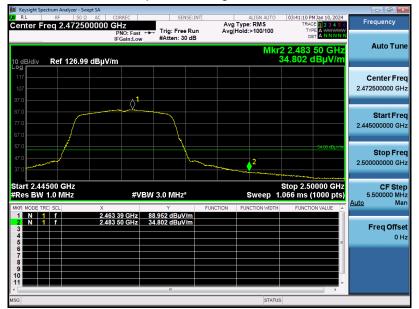


RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

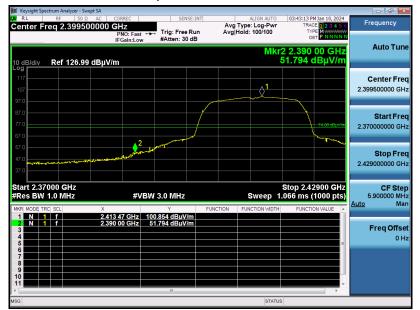

Test Graph for Average Measurement

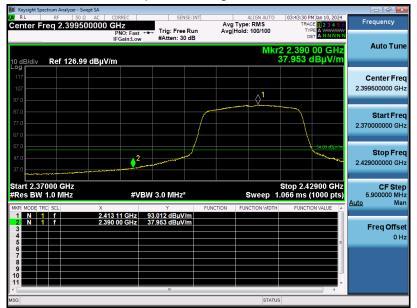

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 7	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

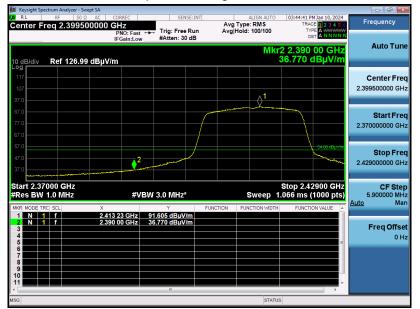

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

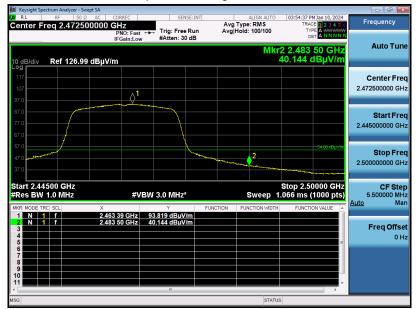

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

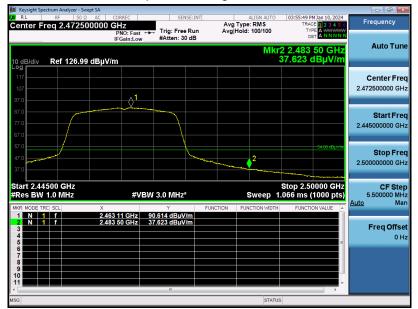

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 10	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

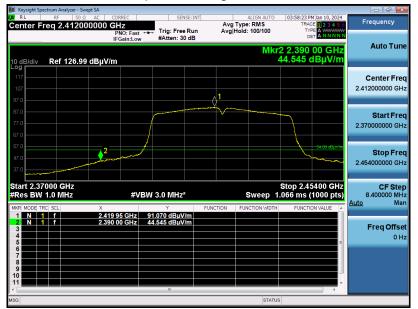

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 10	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

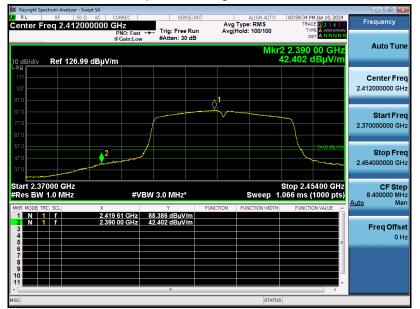

RESULT: Pass




EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 12	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

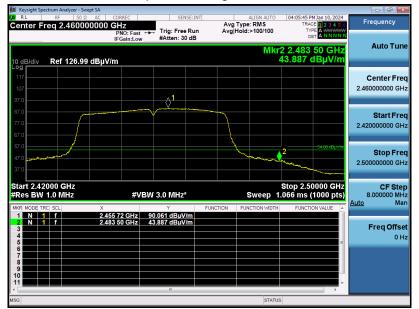

RESULT: Pass



EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 12	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission

12.1 Measurement Limits


Frequency	Maximum RF	Line Voltage
Frequency	Q.P (dBµV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 Block Diagram of Line Conducted Emission Test

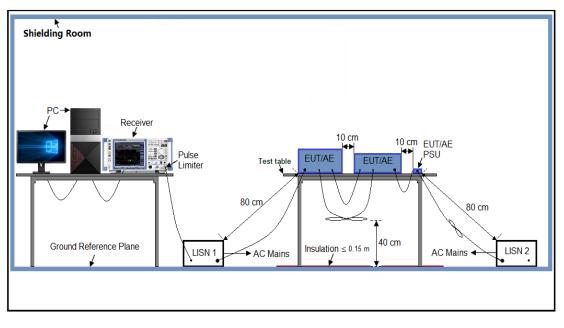



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.


12.5 Test Result of Line Conducted Emission Test



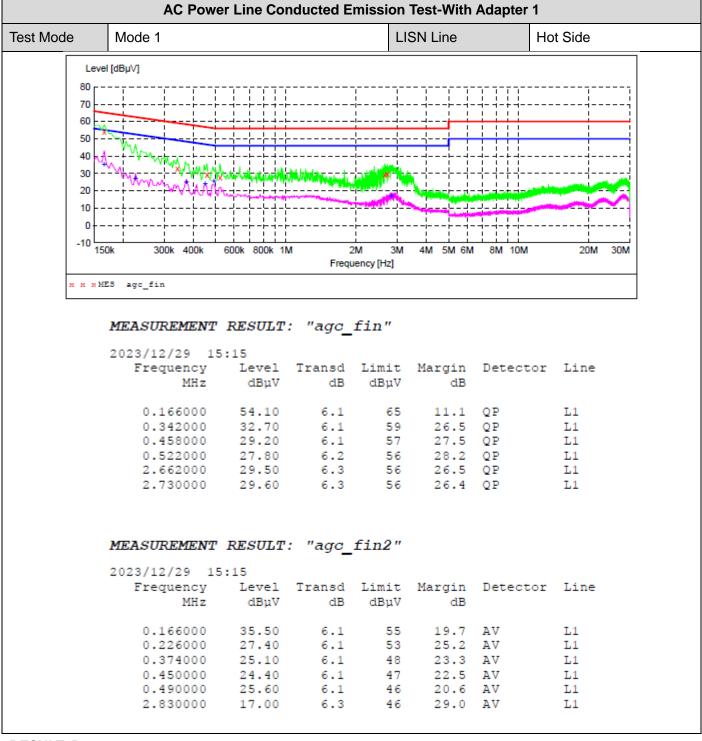

RESULT: Pass



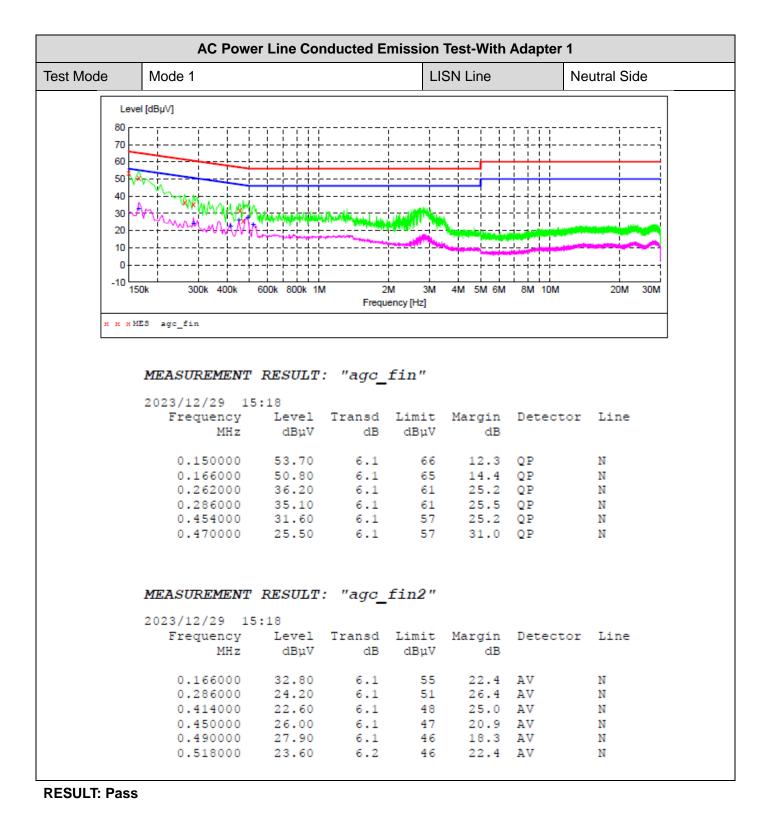




est Mode	Mode 1			L	ISN Line	ŀ	Hot Side
Le	vel [dBµV]						
80 г							
70							
60							
50							
40	What has a start of the start o						
30		MANNA A	and a state				<u>-</u>
20	MinnerAM			and the state of the	dankankada	4-4-64	
10	·					1-1-1-	
0				+			
-10	150k 300k 400k	600k 800k 1N		2M 3M	4M 5M 6M	8M 10M	20M 30M
	JUK JUK 400K	OUDE OUDE IN		uency [Hz]			20141 30141
	MES agc_fin						
	MEASUREMENT	RESULT:	"agg	fin"			
	2023/12/29 14	:27	_		Margir	Detector	r Tire
	2023/12/29 14 Frequency	:27 Level	Transd	Limit	Margin dB	Detecto	r Line
	2023/12/29 14	:27	_		Margin dB	Detecto	r Line
	2023/12/29 14 Frequency	:27 Level	Transd dB 6.1	Limit			r Line L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000	:27 Level dBµV 45.90 33.00	Transd dB 6.1 6.1	Limit dBµV 66 58	dB 20.1 25.4	QP QP	L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000	:27 Level dBµV 45.90 33.00 32.10	Transd dB 6.1 6.1 6.1	Limit dBµV 66 58 58	dB 20.1 25.4 25.7	QP QP QP	L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000	:27 Level dBµV 45.90 33.00 32.10 34.00	Transd dB 6.1 6.1 6.1 6.1 6.1	Limit dBµV 66 58 58 58	dB 20.1 25.4 25.7 23.6	QP QP QP QP	L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000	:27 Level dBµV 45.90 33.00 32.10	Transd dB 6.1 6.1 6.1 6.1 6.1 6.1	Limit dBµV 66 58 58	dB 20.1 25.4 25.7 23.6 21.7	QP QP QP QP	L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10	Transd dB 6.1 6.1 6.1 6.1 6.1	Limit dBµV 66 58 58 58 58 58	dB 20.1 25.4 25.7 23.6	QP QP QP QP QP	L1 L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40	Transd dB 6.1 6.1 6.1 6.1 6.1 6.2	Limit dBµV 66 58 58 58 58 57 56	dB 20.1 25.4 25.7 23.6 21.7	QP QP QP QP QP	L1 L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40 RESULT:	Transd dB 6.1 6.1 6.1 6.1 6.1 6.2	Limit dBµV 66 58 58 58 58 57 56	dB 20.1 25.4 25.7 23.6 21.7	QP QP QP QP QP	L1 L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000 MEASUREMENT	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40 RESULT:	Transd dB 6.1 6.1 6.1 6.1 6.2 : "agc_ Transd	Limit dBµV 66 58 58 58 57 56 fin2" Limit	dB 20.1 25.4 25.7 23.6 21.7 26.6 Margin	QP QP QP QP QP	L1 L1 L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000 MEASUREMENT 2023/12/29 14	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40	Transd dB 6.1 6.1 6.1 6.1 6.2 : "agc_	Limit dBµV 66 58 58 58 57 56 fin2 "	dB 20.1 25.4 25.7 23.6 21.7 26.6 Margin	QP QP QP QP QP	L1 L1 L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000 MEASUREMENT 2023/12/29 14 Frequency MHz	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40	Transd dB 6.1 6.1 6.1 6.1 6.2 : "agc_ Transd dB	Limit dBµV 66 58 58 57 56 <i>fin2"</i> Limit dBµV	dB 20.1 25.4 25.7 23.6 21.7 26.6 Margin dB	QP QP QP QP QP Detecto	L1 L1 L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000 MEASUREMENT 2023/12/29 14 Frequency MHz 0.362000	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40	Transd dB 6.1 6.1 6.1 6.1 6.2 : "agc_ Transd dB 6.1	Limit dBµV 66 58 58 57 56 <i>fin2"</i> Limit dBµV 49	dB 20.1 25.4 25.7 23.6 21.7 26.6 Margin dB 23.7	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1 r Line L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000 MEASUREMENT 2023/12/29 14 Frequency MHz	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40	Transd dB 6.1 6.1 6.1 6.1 6.2 : "agc_ Transd dB 6.1 6.1	Limit dBµV 66 58 58 57 56 fin2" Limit dBµV 49 49	dB 20.1 25.4 25.7 23.6 21.7 26.6 Margin dB 23.7 22.6	QP QP QP QP QP Detecto: AV	L1 L1 L1 L1 L1 L1 L1 L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000 MEASUREMENT 2023/12/29 14 Frequency MHz 0.362000 0.366000	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40	Transd dB 6.1 6.1 6.1 6.1 6.2 : "agc_ Transd dB 6.1	Limit dBµV 66 58 58 57 56 <i>fin2"</i> Limit dBµV 49	dB 20.1 25.4 25.7 23.6 21.7 26.6 Margin dB 23.7 22.6 21.2	QP QP QP QP QP QP AV AV AV	L1 L1 L1 L1 L1 L1 r Line L1
	2023/12/29 14 Frequency MHz 0.150000 0.374000 0.402000 0.414000 0.454000 0.514000 MEASUREMENT 2023/12/29 14 Frequency MHz 0.362000 0.366000 0.454000	:27 Level dBµV 45.90 33.00 32.10 34.00 35.10 29.40	Transd dB 6.1 6.1 6.1 6.1 6.2 : "agc_ Transd dB 6.1 6.1 6.1 6.1 6.1 6.2	Limit dBµV 66 58 58 57 56 <i>fin2"</i> Limit dBµV 49 49 49	dB 20.1 25.4 25.7 23.6 21.7 26.6 Margin dB 23.7 22.6 21.2	QP QP QP QP QP QP AV AV AV AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1 L1 L1

RESULT: Pass



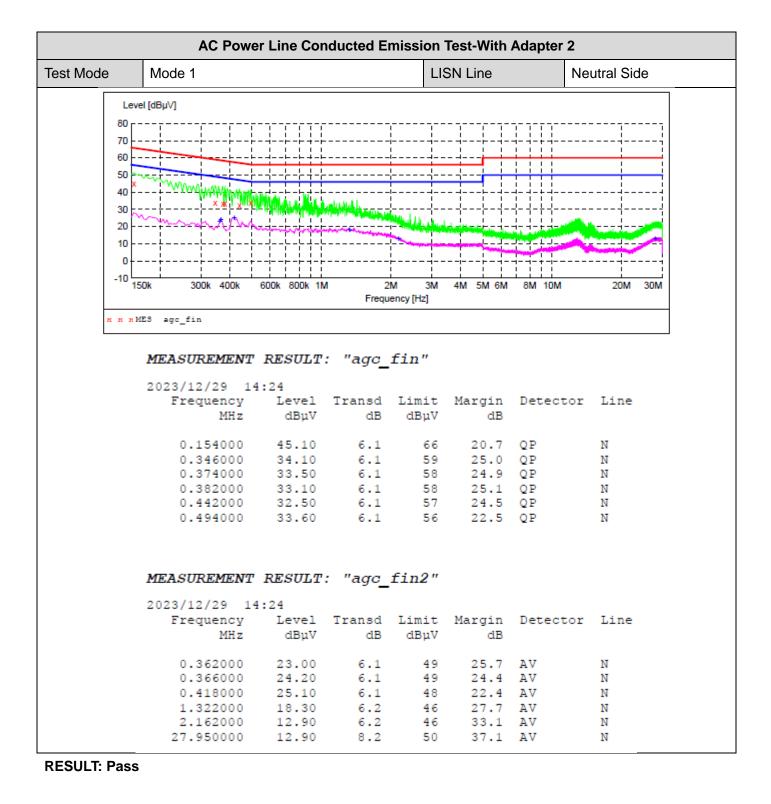



Report No.: AGC10514231205FR02 Page 91 of 91

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC10514231205AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC10514231205AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.