





The graph displays two metrics: Efficiency (%) and Max-Min. The Efficiency (%) series is represented by a red line with circular markers, and the Max-Min series is represented by a purple line with circular markers. The Max-Min value is explicitly labeled as 82.15 at alpha = 2470.0 and 76.52 at alpha = 2490.0.

alpha	Efficiency (%)	Max-Min
2400.0	81.00	81.00
2410.0	79.00	79.00
2420.0	79.00	79.00
2430.0	81.00	81.00
2440.0	79.00	79.00
2450.0	81.00	81.00
2460.0	82.00	82.00
2470.0	82.15	82.15
2480.0	80.00	80.00
2490.0	77.00	76.52
2500.0	78.00	78.00

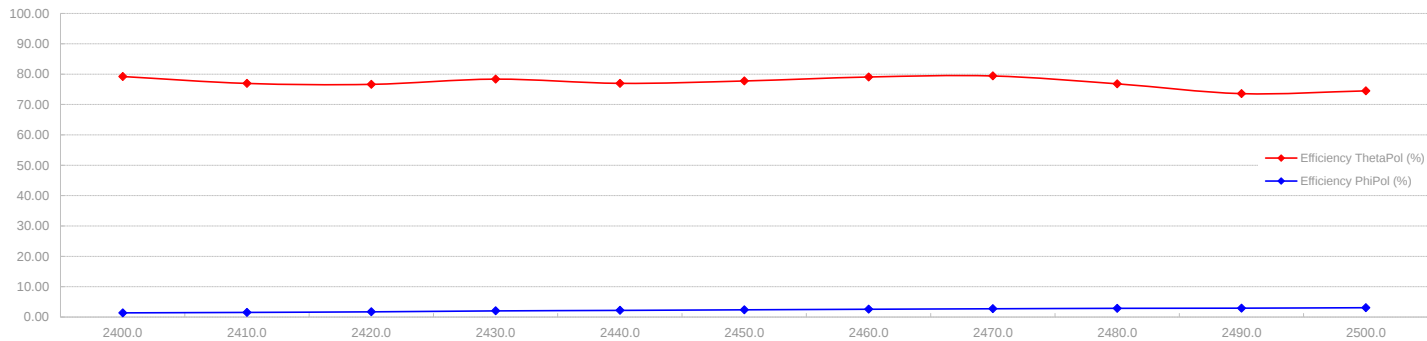

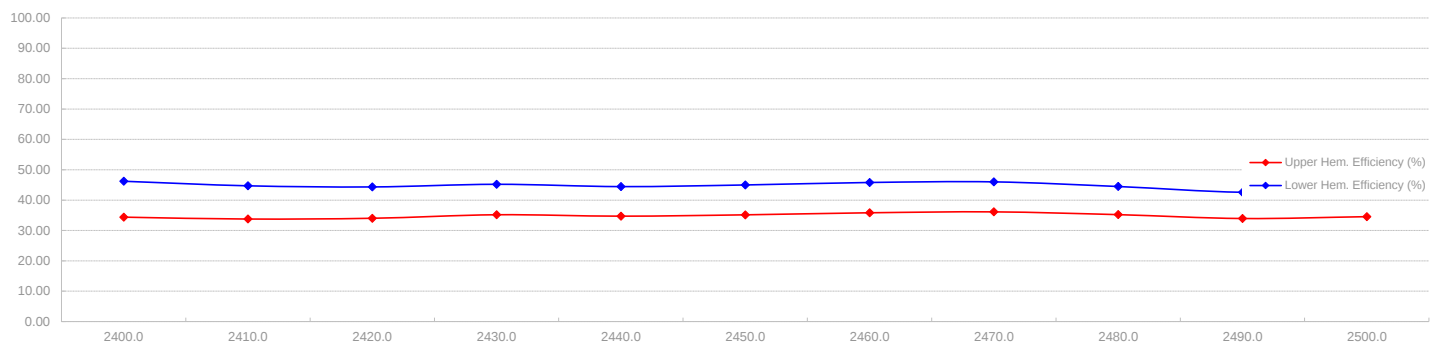

4



3

2

1

修 订 栏

版本	修订符号	说明	变更编号	审核	日期
V0.1		发行			20210913
V0.2	△	增加端子线色注释			20211025
V1.0	△	修改尺寸公差			20220120

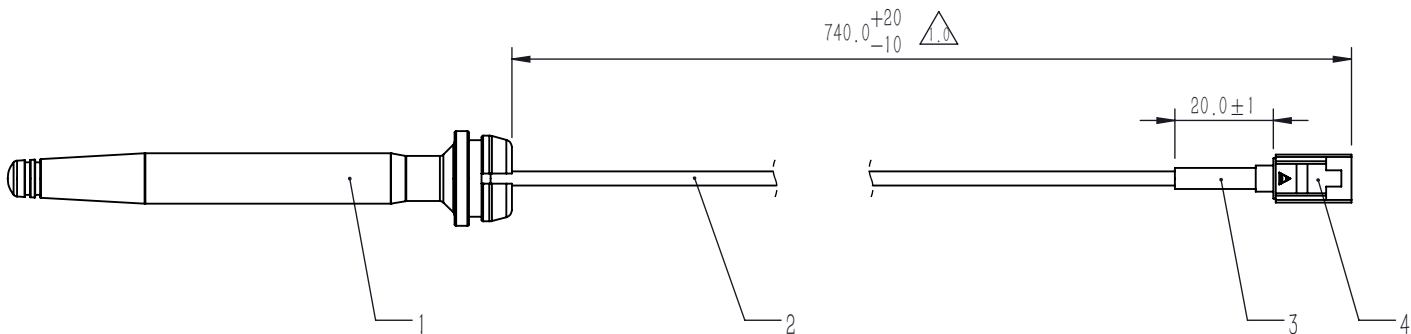

D

紫红 △

序号	规格	用量	备注
1	橡胶天线罩	1	
2	RQ316	1	101.006.0012
3	黑色热缩管	1	印白字: JSJ-1
4	FARKA SMB-C-K1.5-7	1	SHM.900.0003-46 Port Type:D 紫红

材料	设计 任乐乐	料名	料号
表面处理	校核 李罕超		M-T3X-OXS-JSJ-058
未注公差按如下指定公差 .X ± 0.3 .XX ± 0.1 .XXX ± 0.05 角度: ± °	工艺	拓攻(TopGun)机器人有限公司	版本 V1.0
第一视角	批准 周宁波		项目 TG3X
	单位 mm	图纸规格 A4	比例 1: 1.5
		页码	1—1

技术要求:
1.注意裁剪长度,不可有长短不齐、切口歪斜等现象;
2.线身光滑整洁、不可有划伤、压痕等现象;
3.橡胶天线罩与天线固定牢靠,不可脱出;

