







$\pi/4$ -DQPSK High Channel

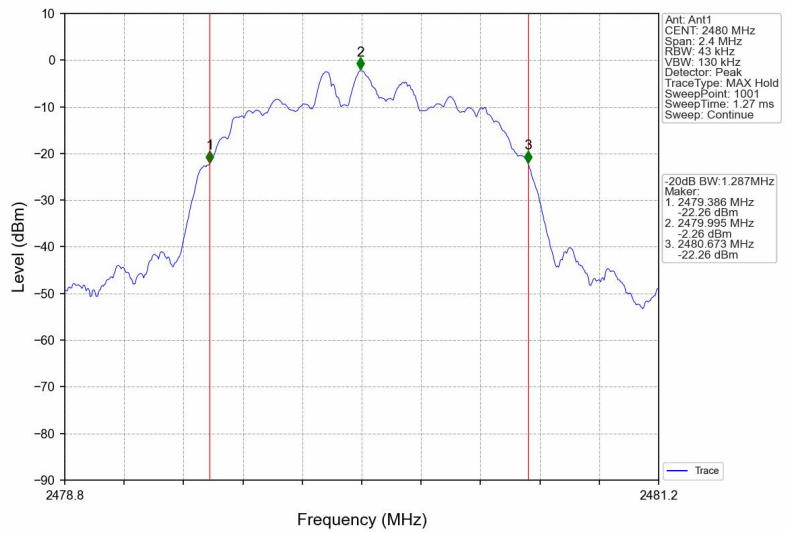


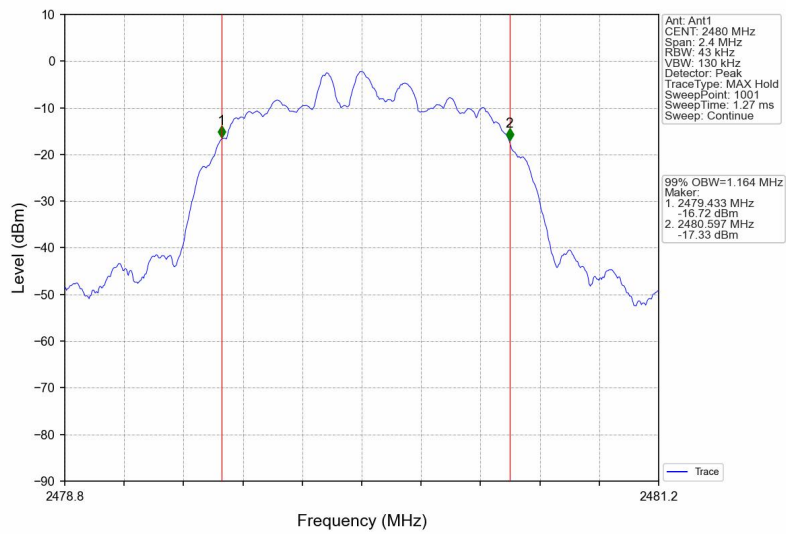


8-DPSK Low Channel

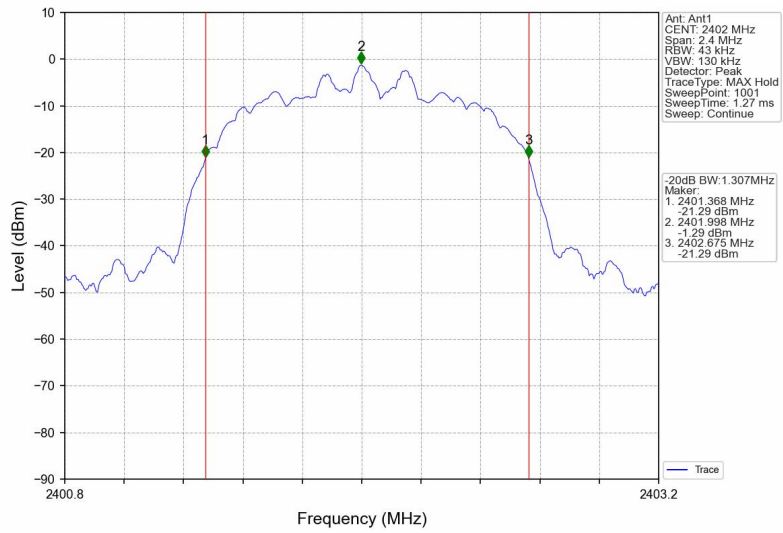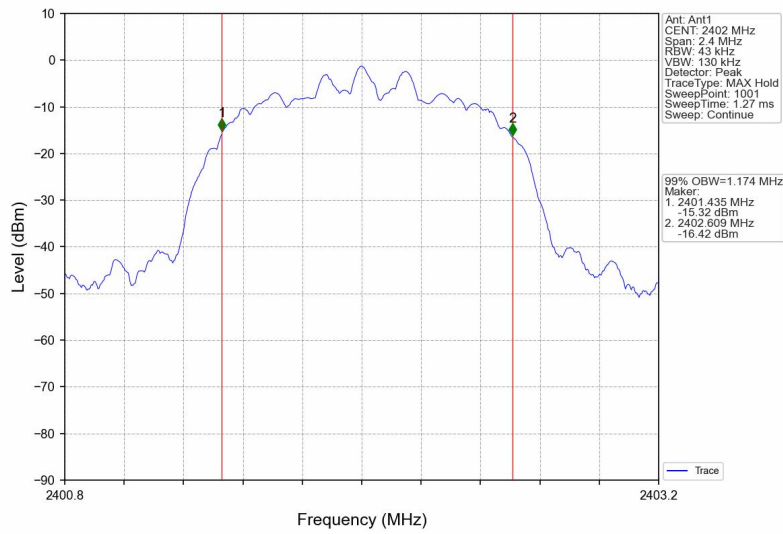





8-DPSK Middle Channel

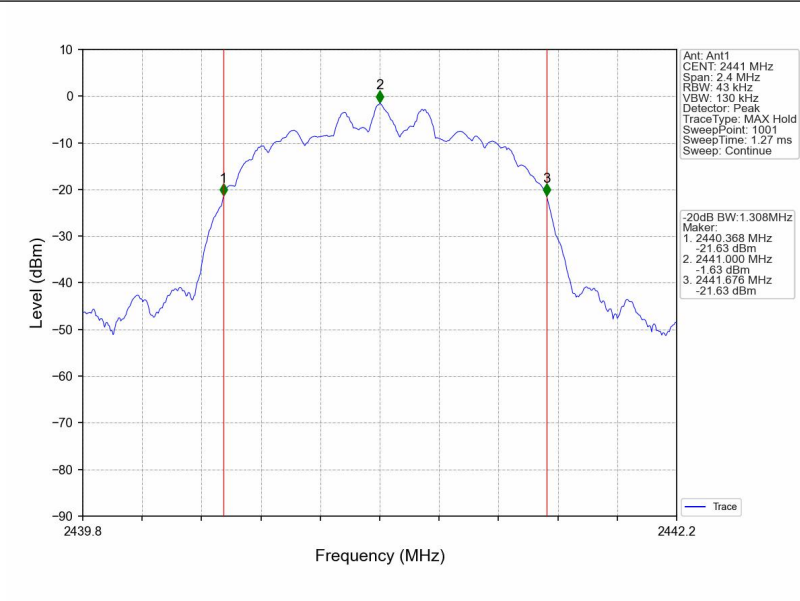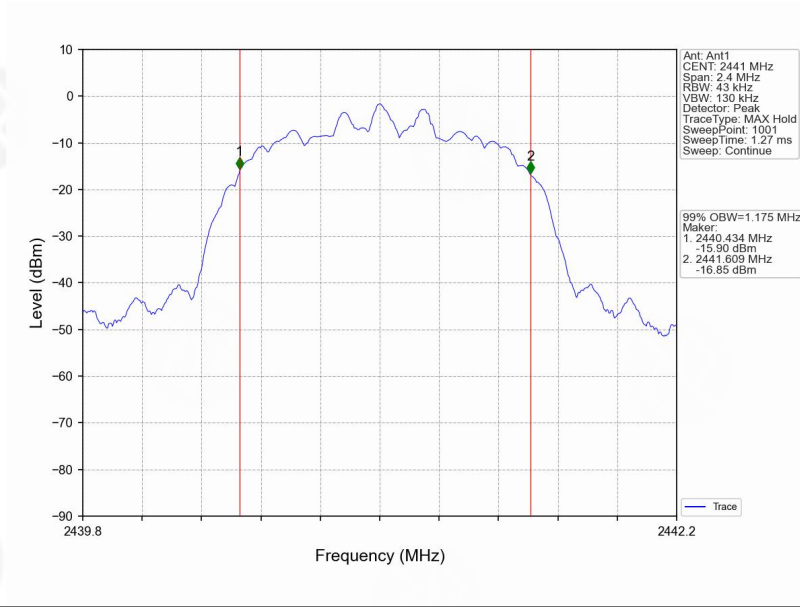



8-DPSK High Channel

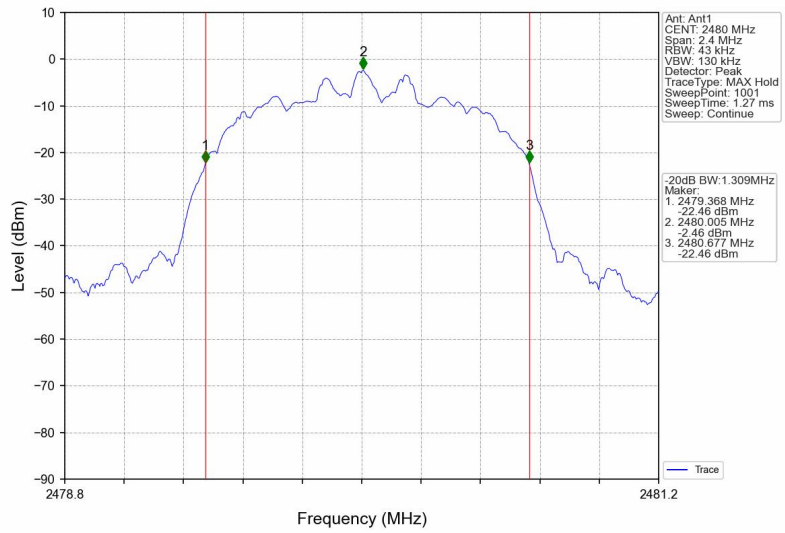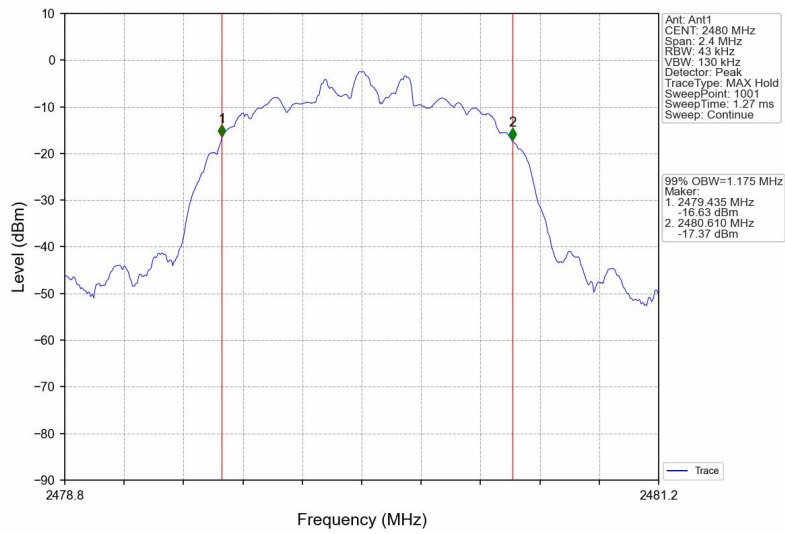



8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	GFSK:30 dBm $\pi/4$ -DQPSK & 8-DPSK:20.97 dBm

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW \geq OBW. VBW =OBW. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD


No deviation.

8.5 Test Result


Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	1.44	30.00	Pass
	Middle	1.16		
	Highest	0.61		
$\pi/4$ -DQPSK	Lowest	2.16	21.00	Pass
	Middle	1.51		
	Highest	0.86		
8-DPSK	Lowest	0.92	21.00	Pass
	Middle	0.50		
	Highest	0.13		



GFSK -2402MHz

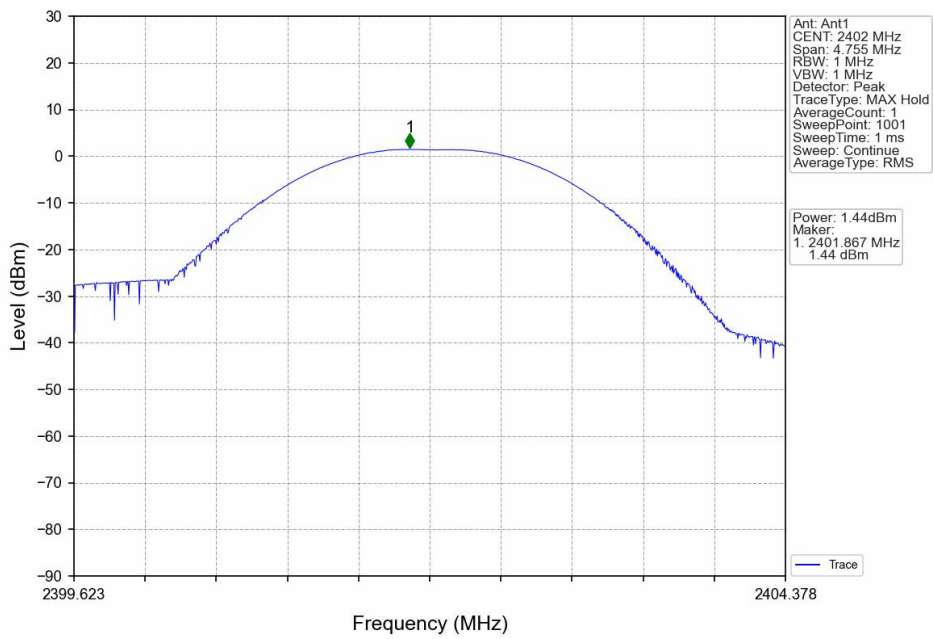


GFSK -2441MHz

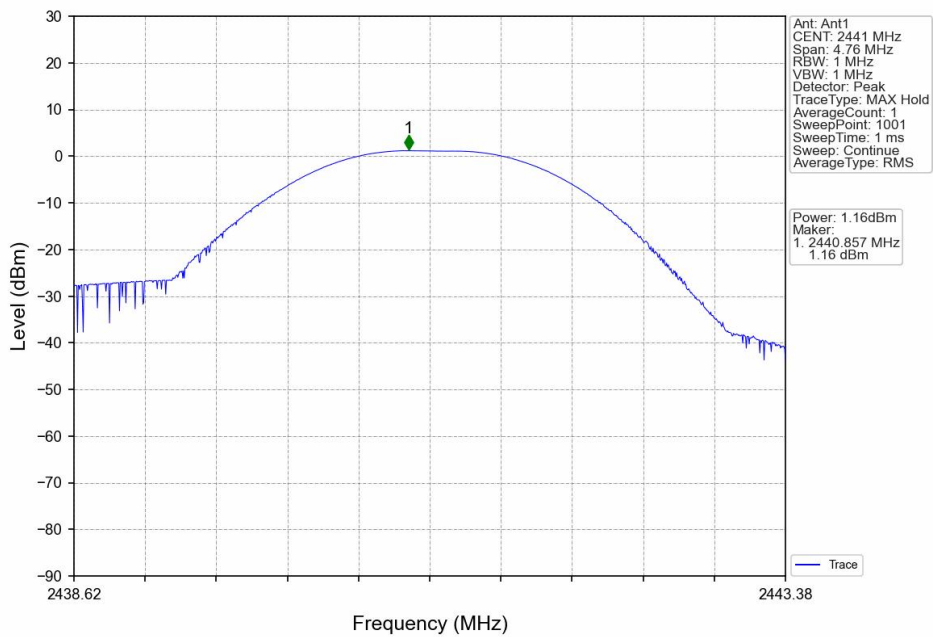




GFSK -2480MHz

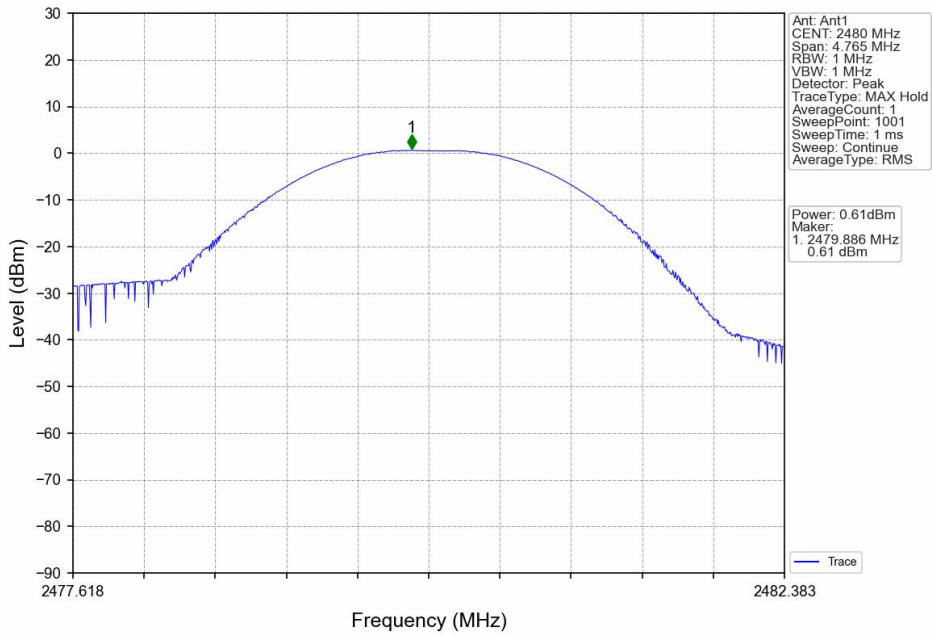


$\pi/4$ -DQPSK -2402MHz

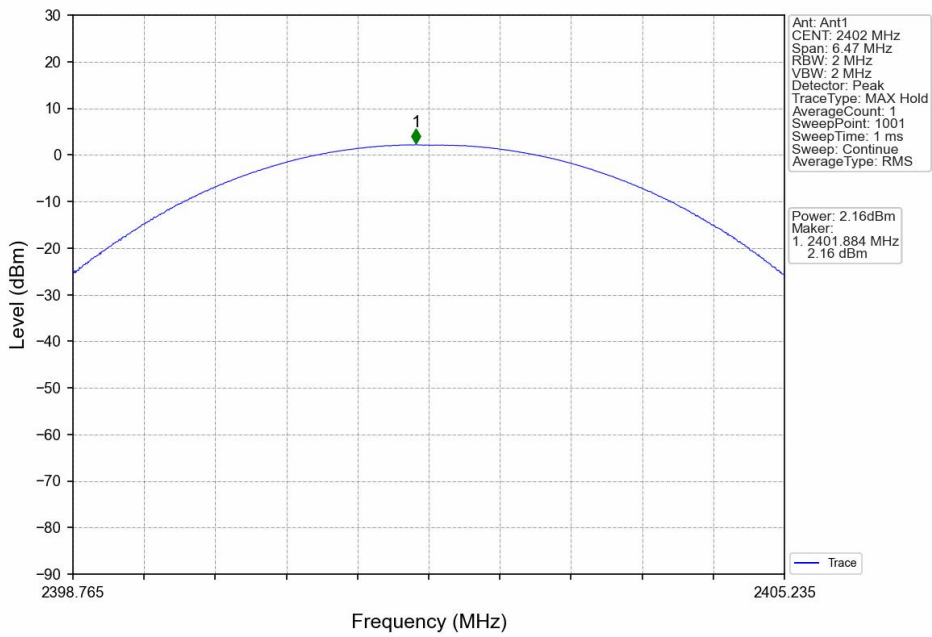




π /4-DQPSK -2441MHz

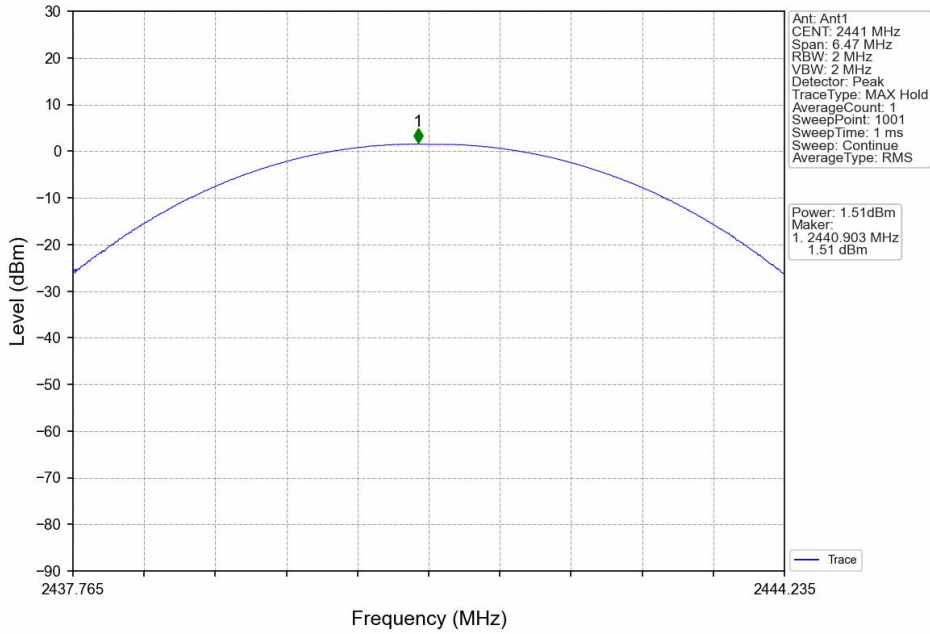


π /4-DQPSK -2480MHz

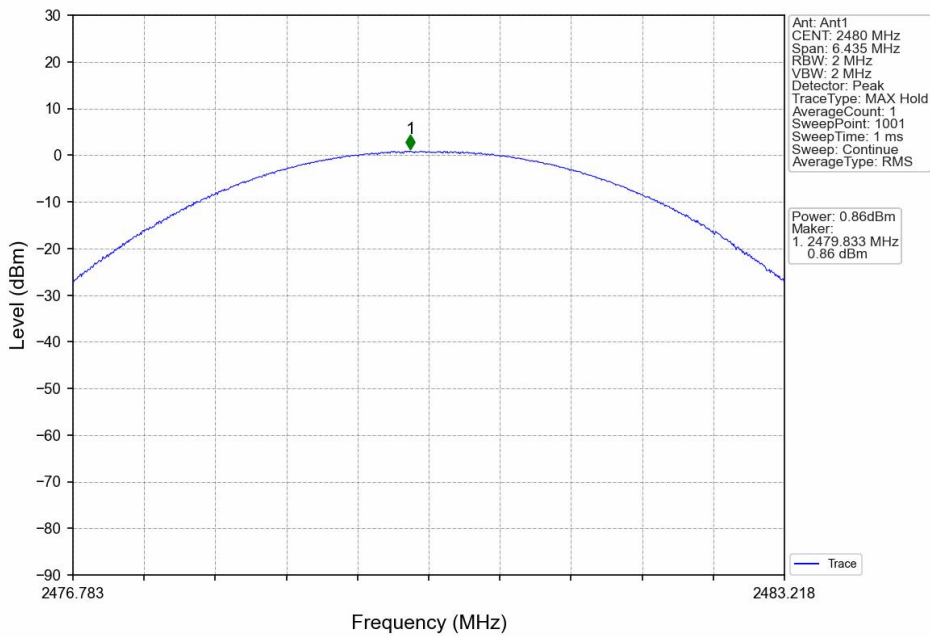




8-DPSK -2402MHz

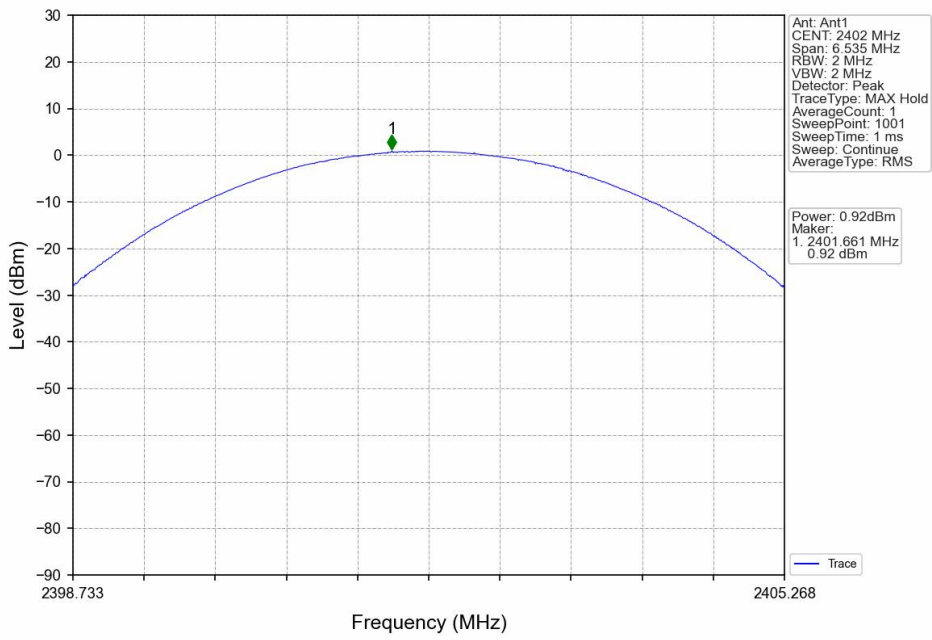


8-DPSK -2441MHz

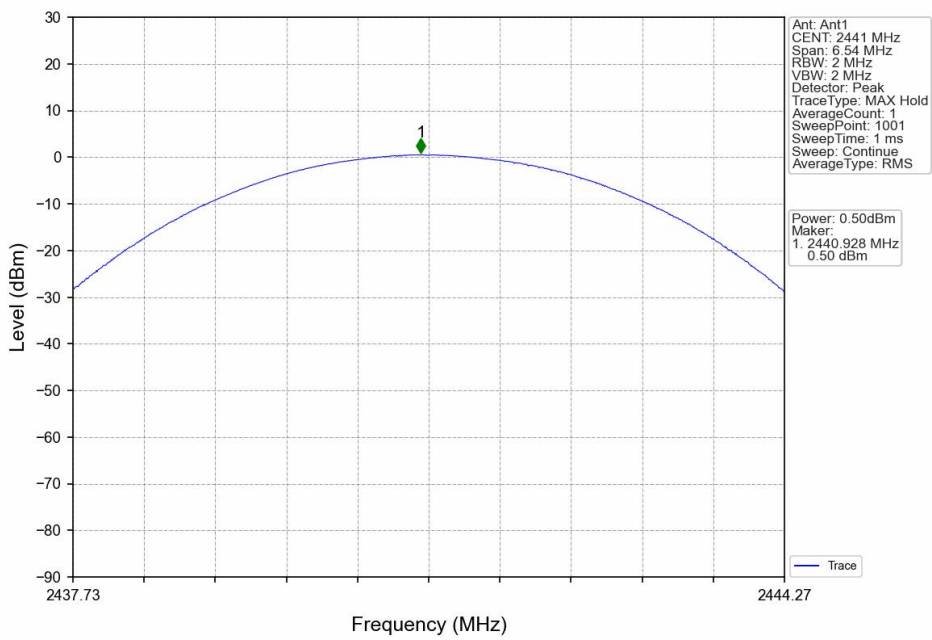



8-DPSK -2441MHz

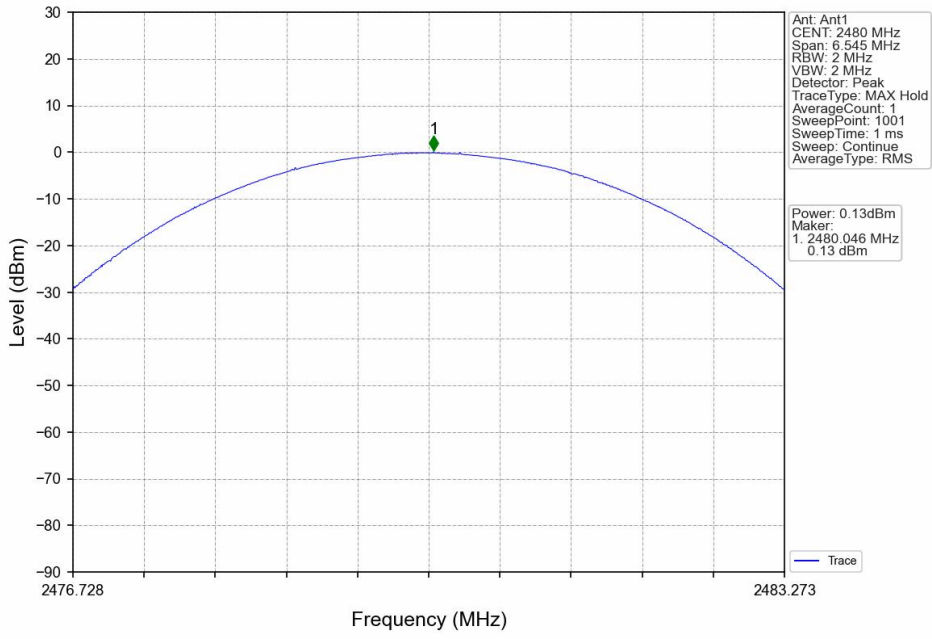



9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=330KHz, VBW=300KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.




9.4 Test Result


Modulation	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit(MHz)	Result
GFSK	HOPP	DH5	0.992	0.953	≥ 0.953	PASS
$\pi/4$ -DQPSK	HOPP	2DH5	1.010	1.294	≥ 0.863	PASS
8-DPSK	HOPP	3DH5	1.001	1.309	≥ 0.873	PASS



GFSK DH5

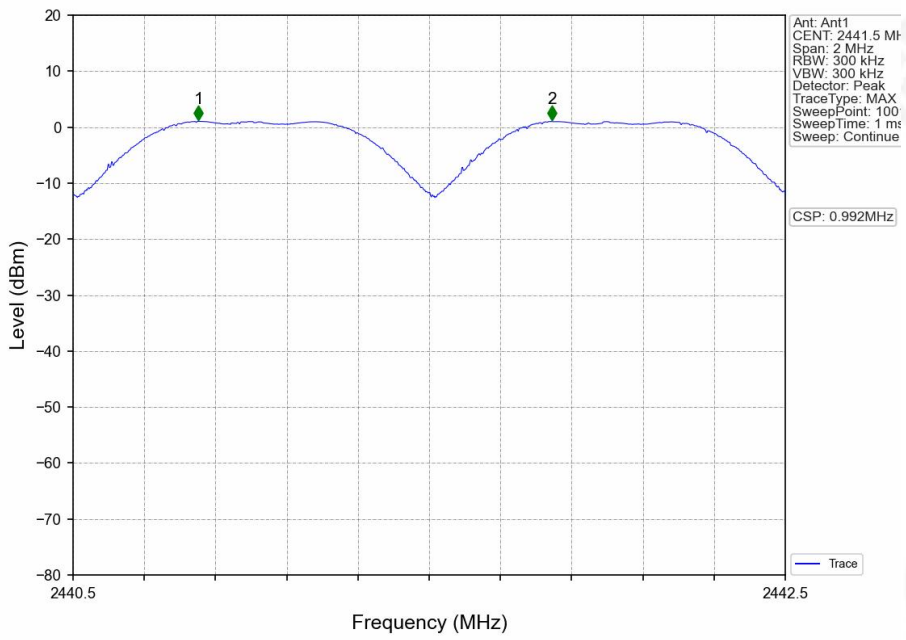


GFSK 2DH5

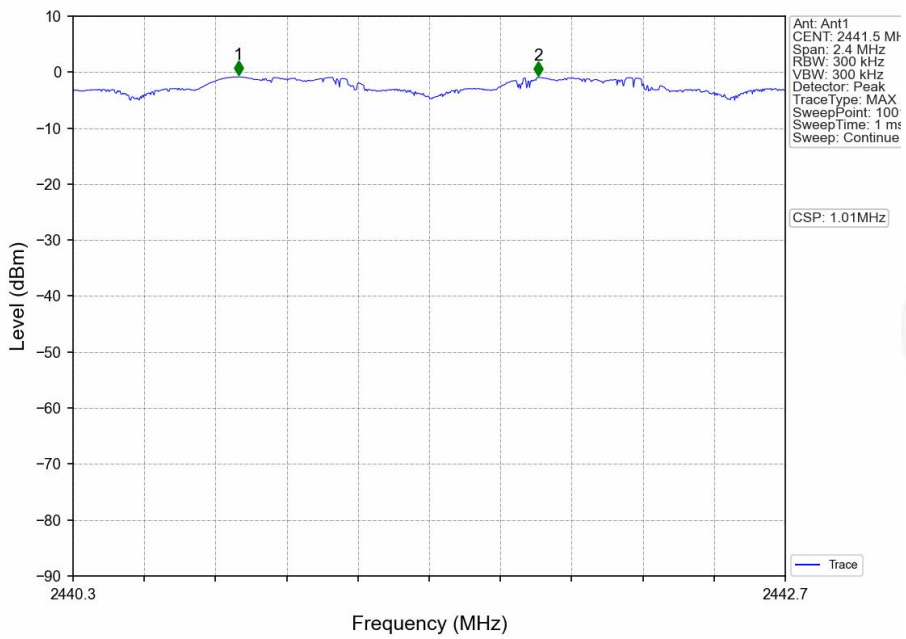



8DPSK 3DH5

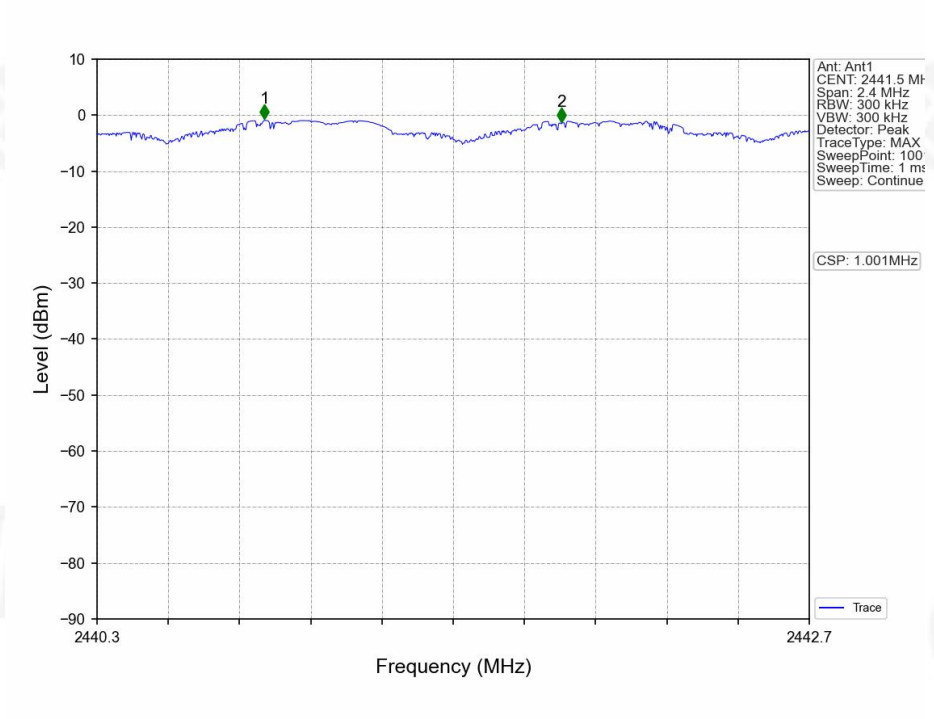



10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=300kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup



10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


10.3 DEVIATION FROM STANDARD

No deviation.




10.4 Test Result

Test Plots:
79 Channels in total
GFSK

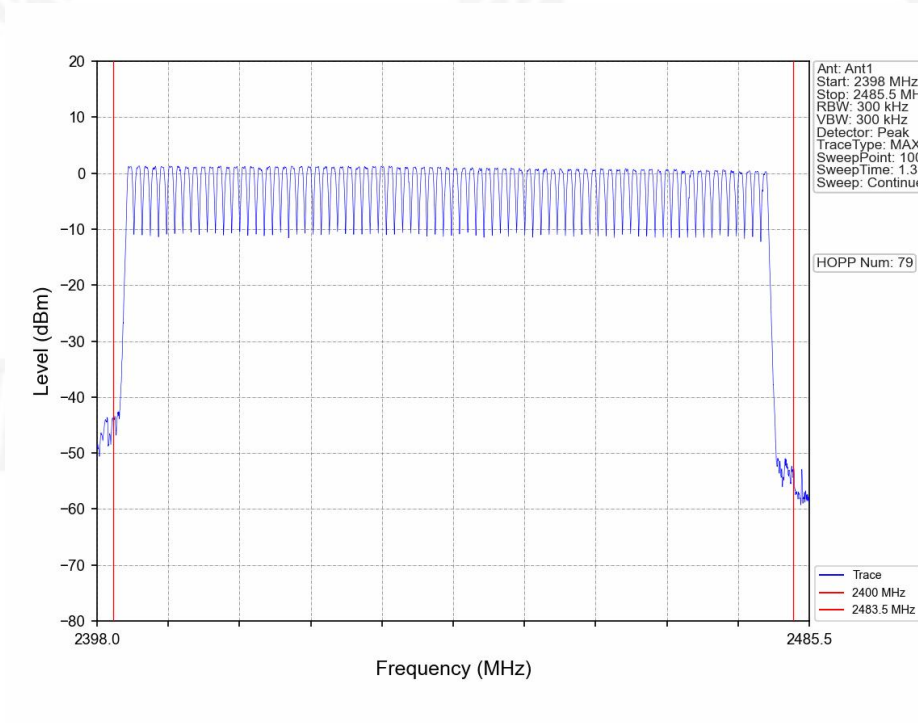




$\pi/4$ -DQPSK

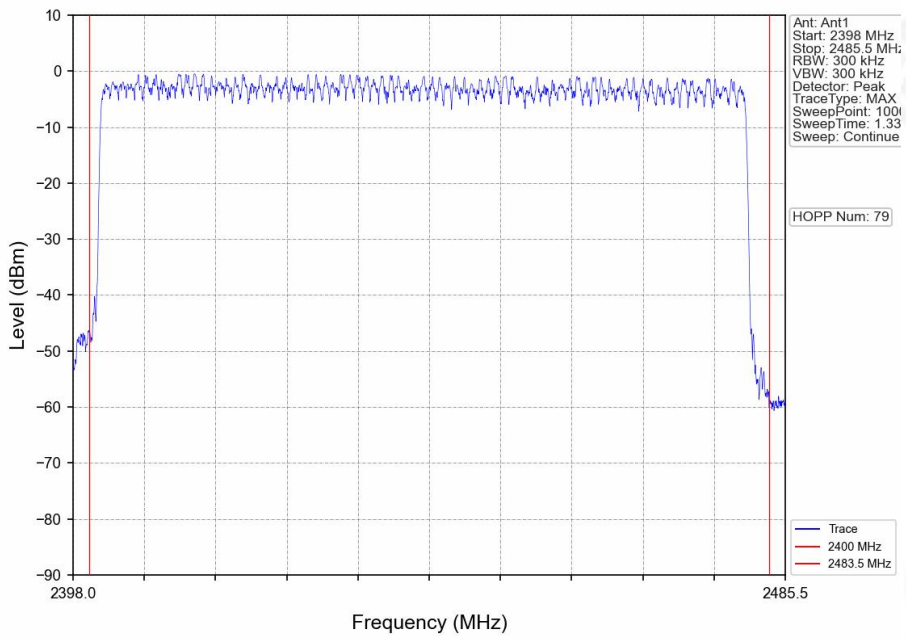

8-DPSK

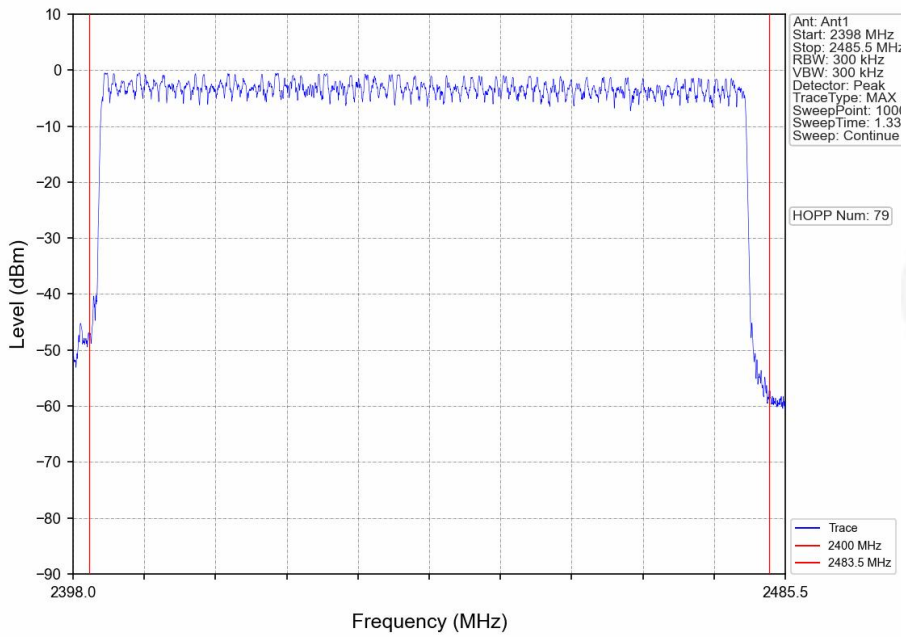



11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

GFSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	123.772	400	Pass
2441MHz	DH3	261.078	400	Pass
2441MHz	DH5	303.450	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
 Test channel: as blow
 CH:2441MHz time slot= $0.388(\text{ms}) \times 319 = 123.772\text{ms}$
 CH:2441MHz time slot= $1.642(\text{ms}) \times 159 = 261.078\text{ms}$
 CH:2441MHz time slot= $2.890(\text{ms}) \times 105 = 303.450\text{ms}$

$\pi/4$ -DQPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	2DH1	127.116	400	Pass
2441MHz	2DH3	268.624	400	Pass
2441MHz	2DH5	324.352	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
 Test channel: as blow
 CH:2441MHz time slot= $0.396(\text{ms}) \times 321 = 127.116\text{ms}$
 CH:2441MHz time slot= $1.648(\text{ms}) \times 163 = 268.624\text{ms}$
 CH:2441MHz time slot= $2.896(\text{ms}) \times 112 = 324.352\text{ms}$

8-DPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	3DH1	126.324	400	Pass
2441MHz	3DH3	133.326	400	Pass
2441MHz	3DH5	319.220	400	Pass



Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
 Test channel: as blow
 CH:2441MHz time slot= $0.392(\text{ms}) \times 319 = 126.324\text{ms}$
 CH:2441MHz time slot= $1.644(\text{ms}) \times 81 = 133.326\text{ms}$
 CH:2441MHz time slot= $2.902(\text{ms}) \times 1106 = 319.22\text{ms}$





Test Plots

GFSK DH1 2441MHz

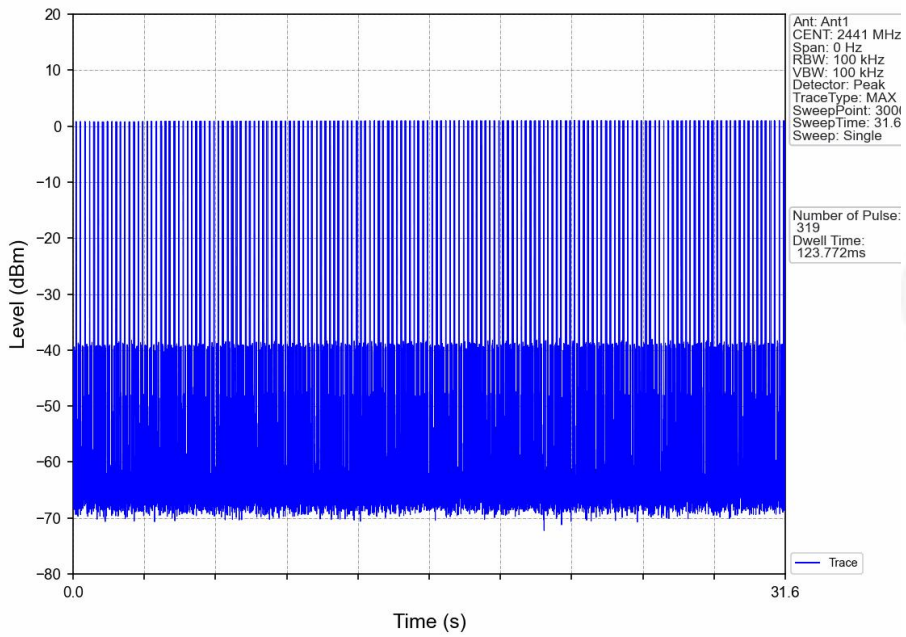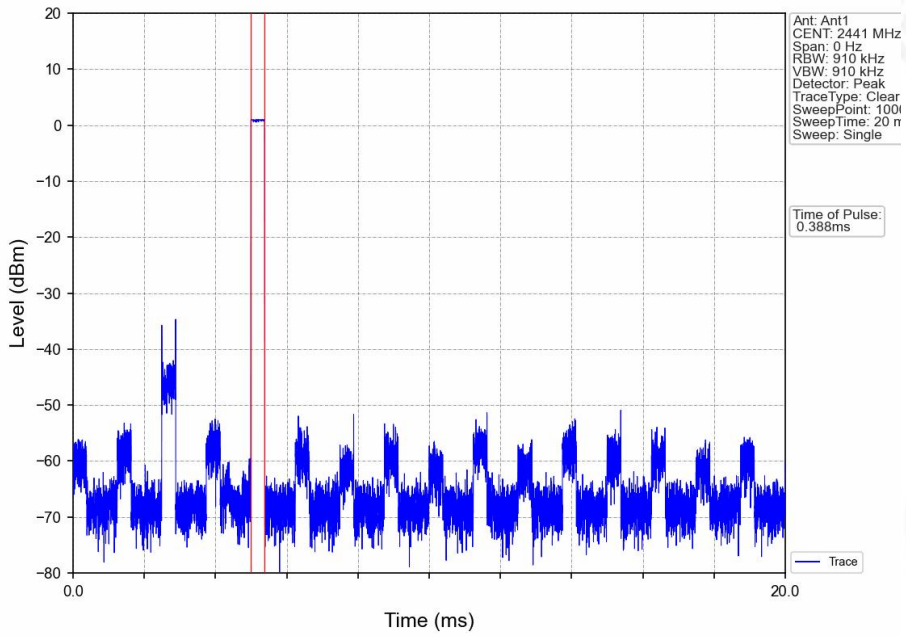





GFSK DH3 2441MHz

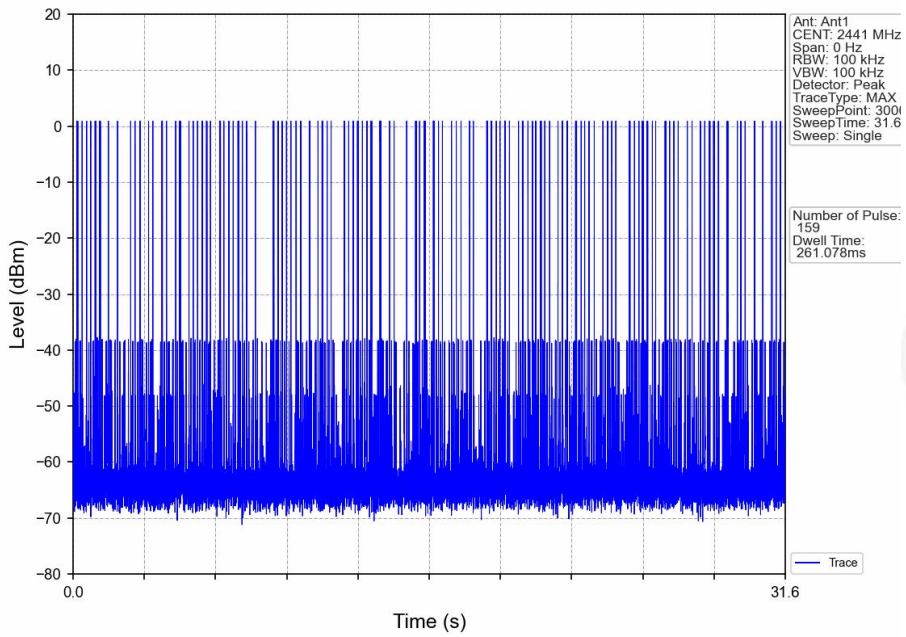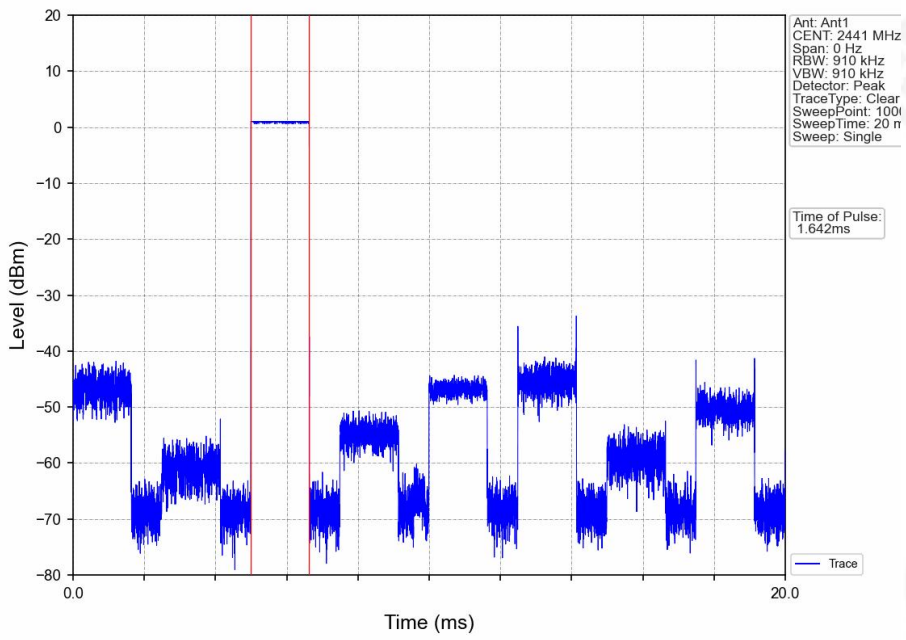





GFSK DH5 2441MHz

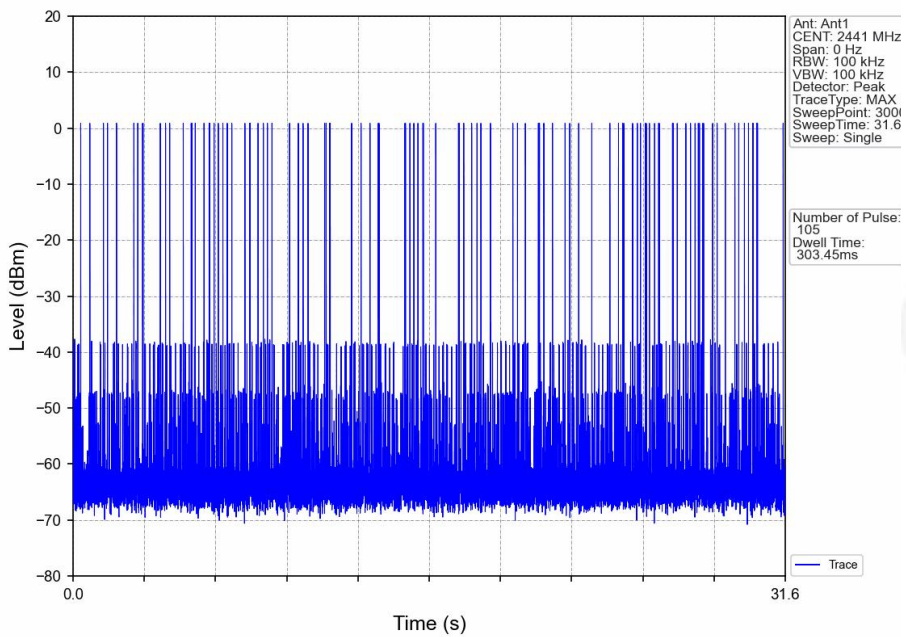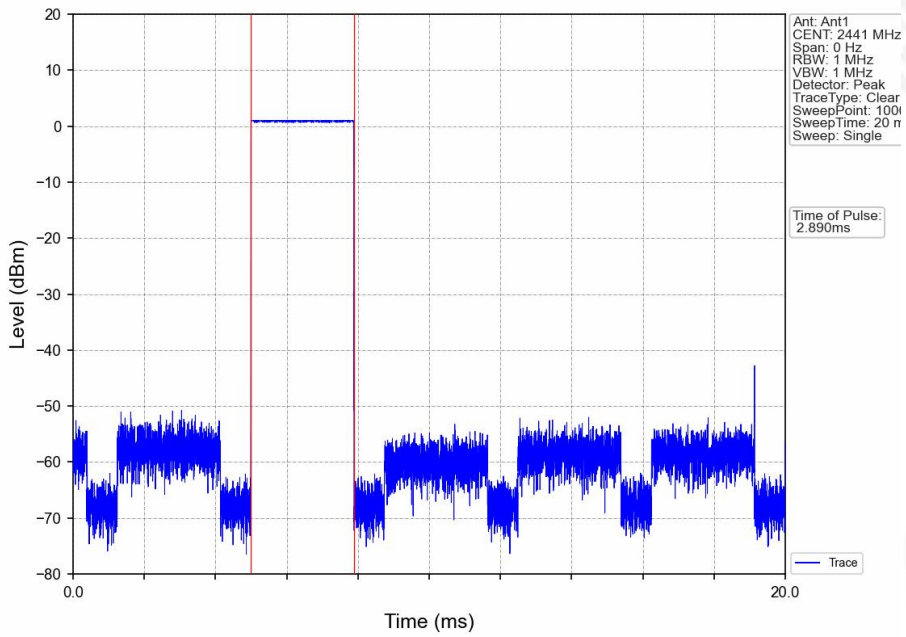





$\pi/4$ -DQPSK 2DH1 2441MHz

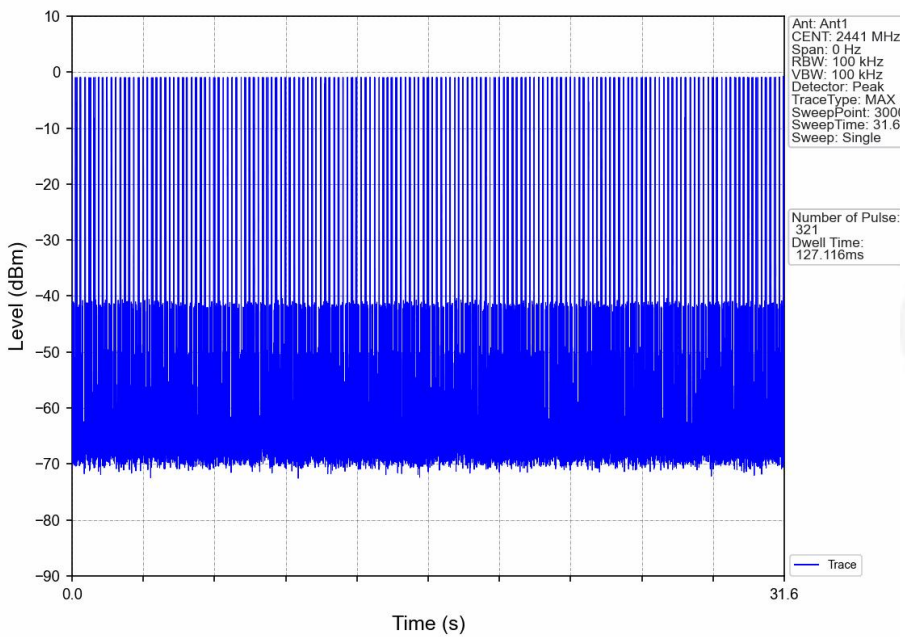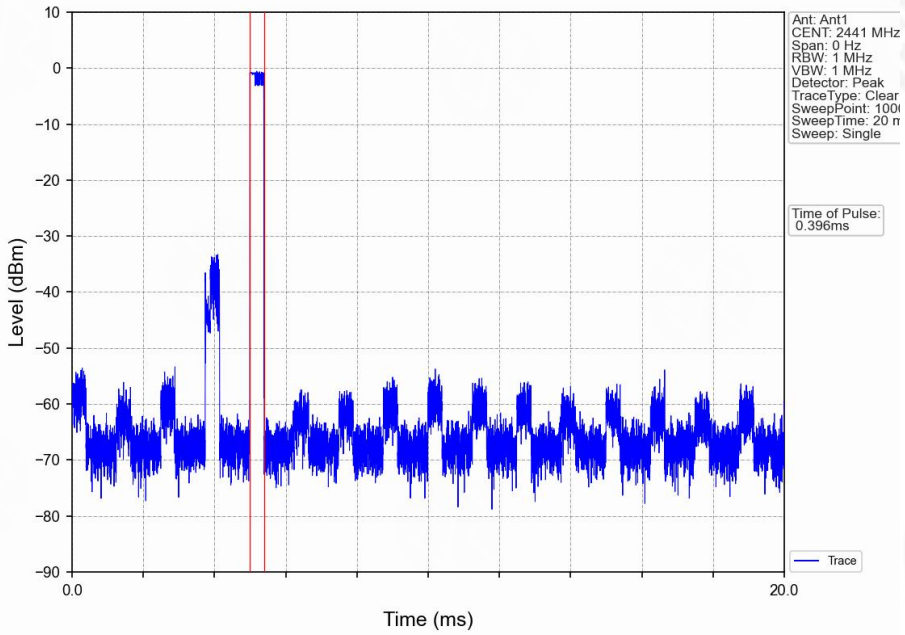





$\pi/4$ -DQPSK 2DH3 2441MHz

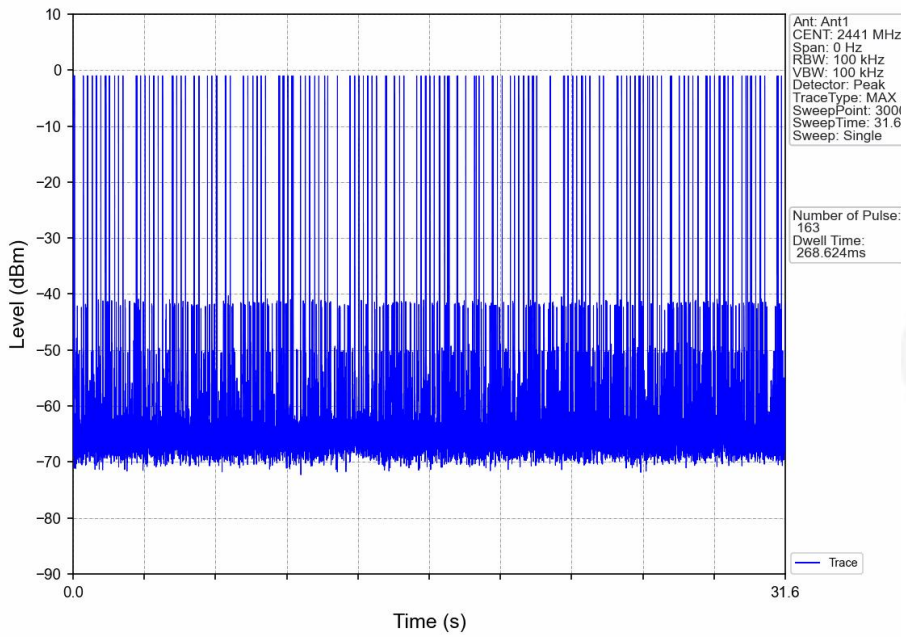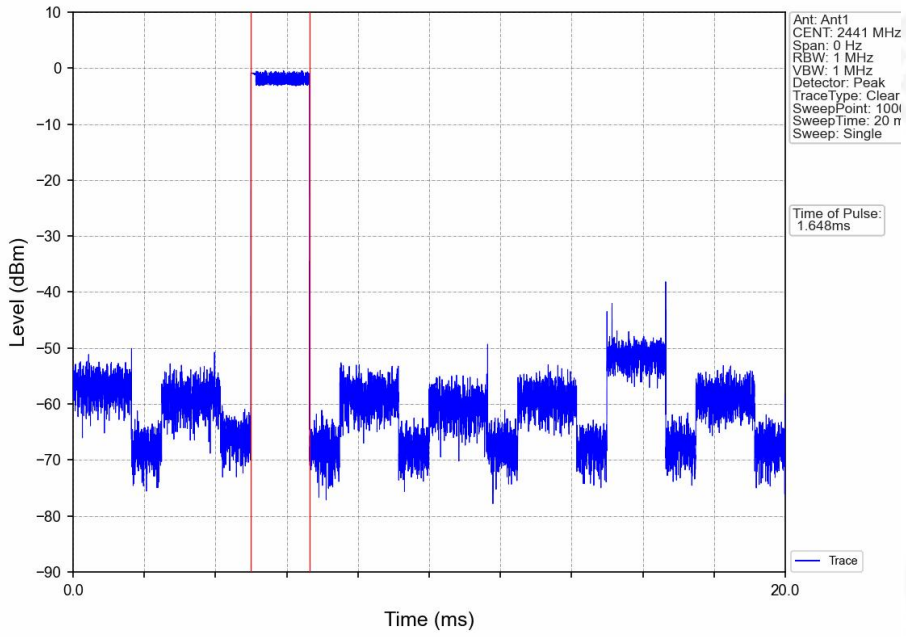





$\pi/4$ -DQPSK 2DH5 2441MHz

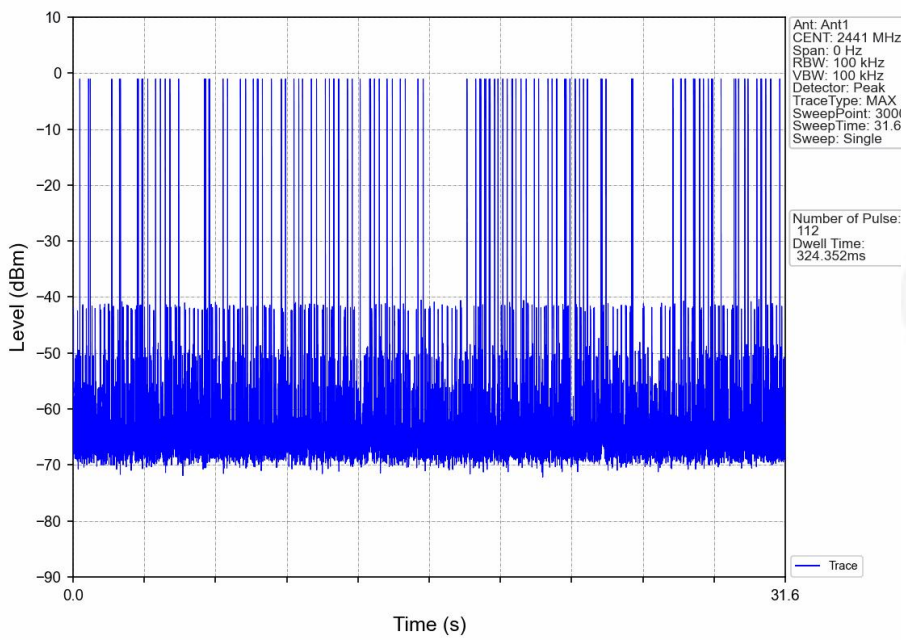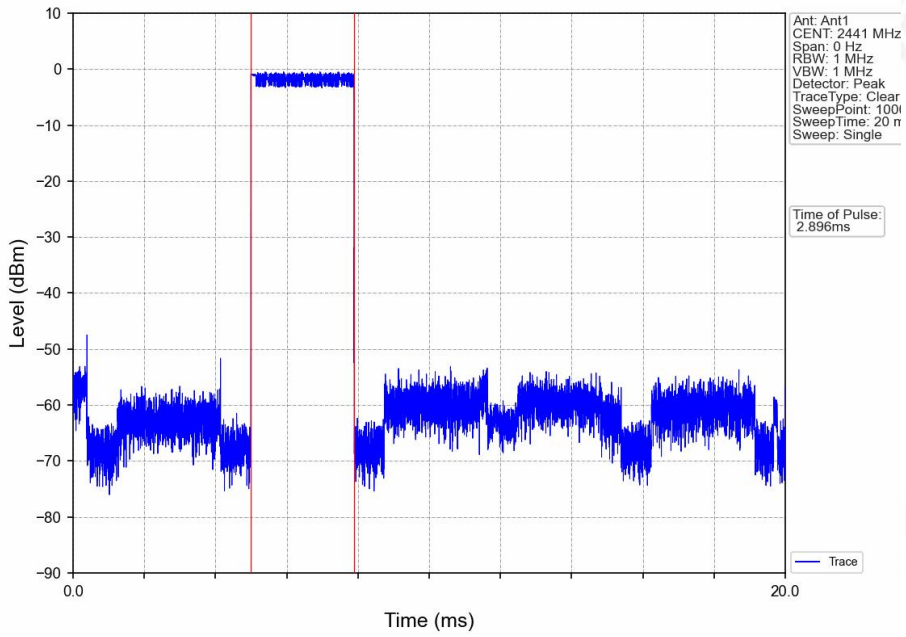





8-DPSK 3DH1 2441MHz

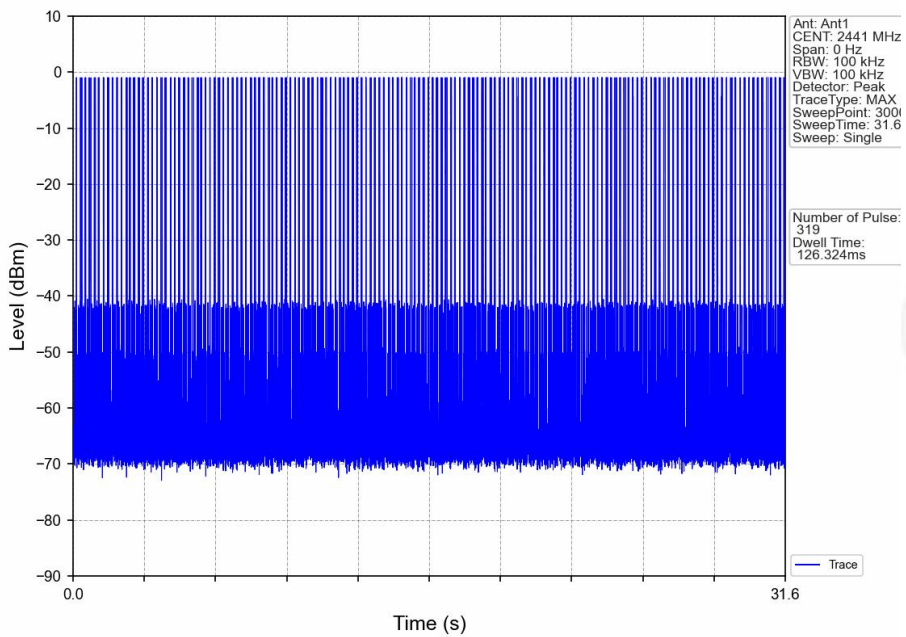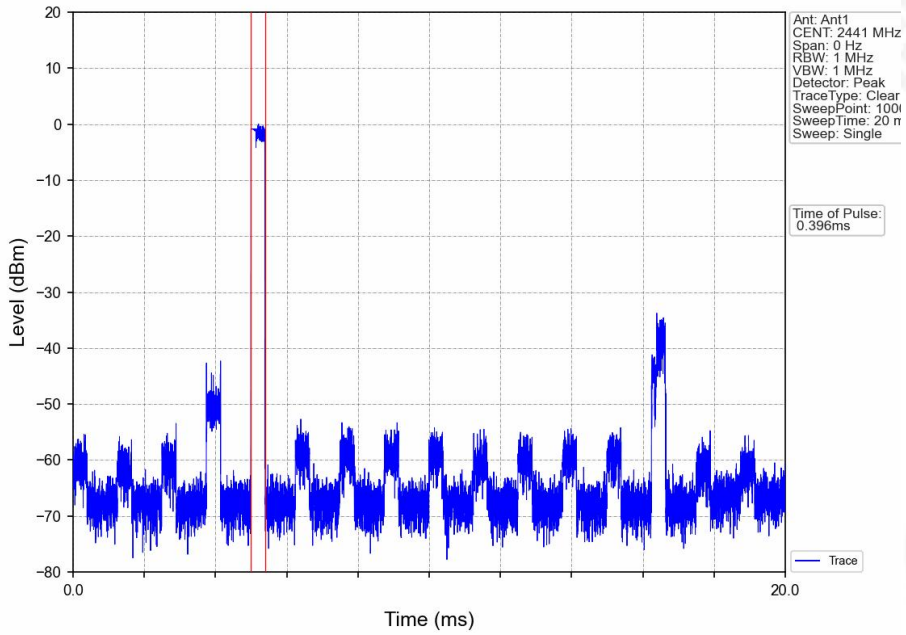





8-DPSK 3DH3 2441MHz

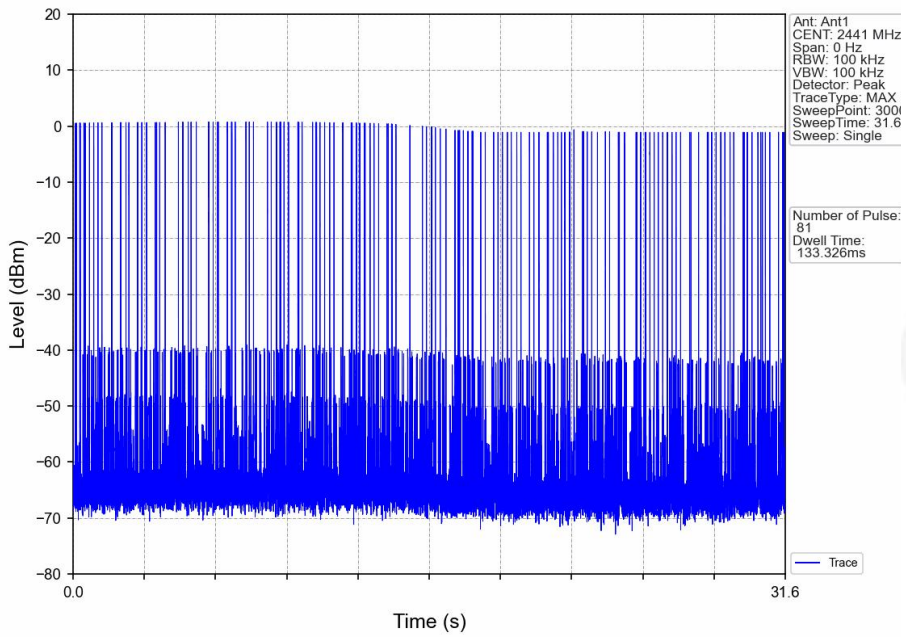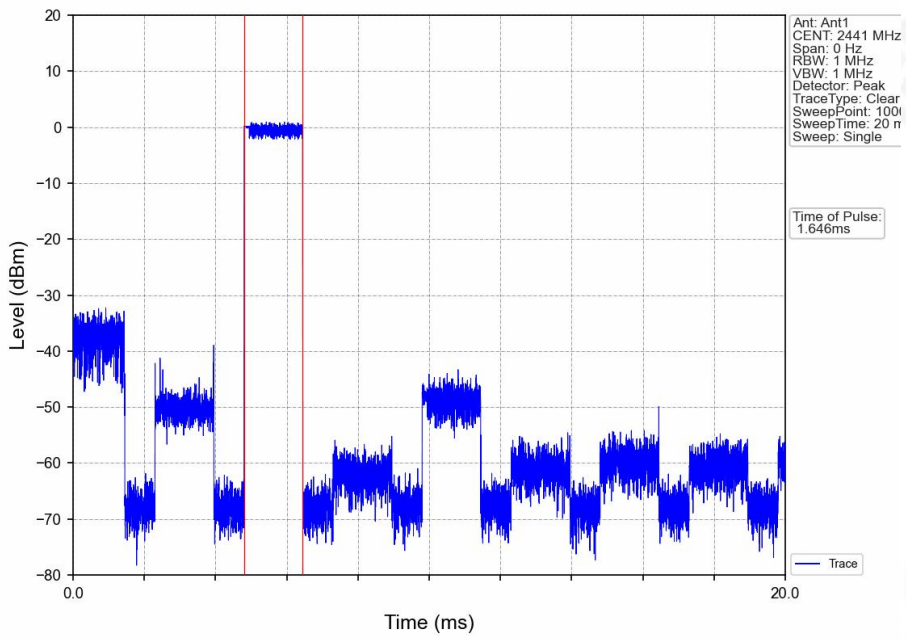



8-DPSK 3DH5 2441MHz

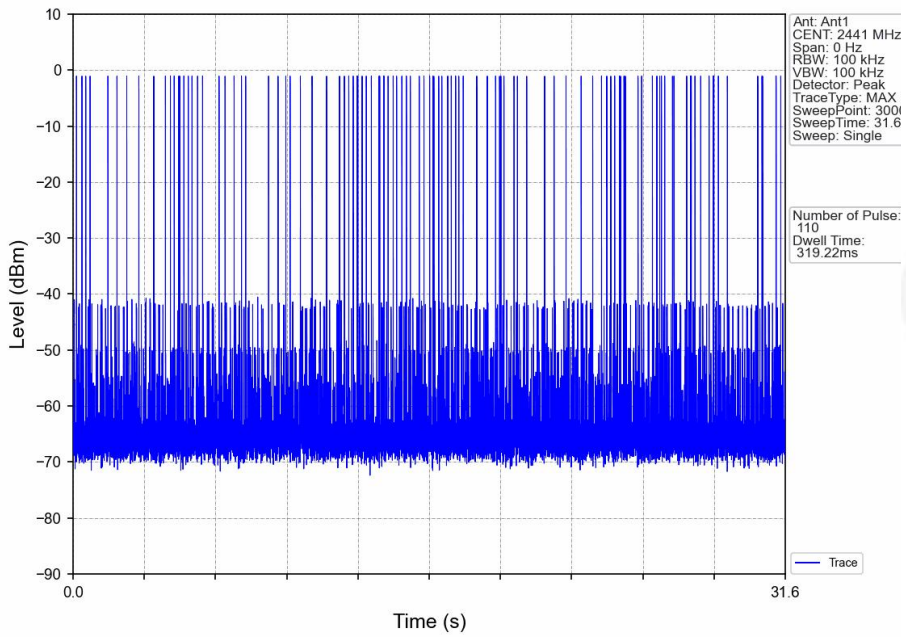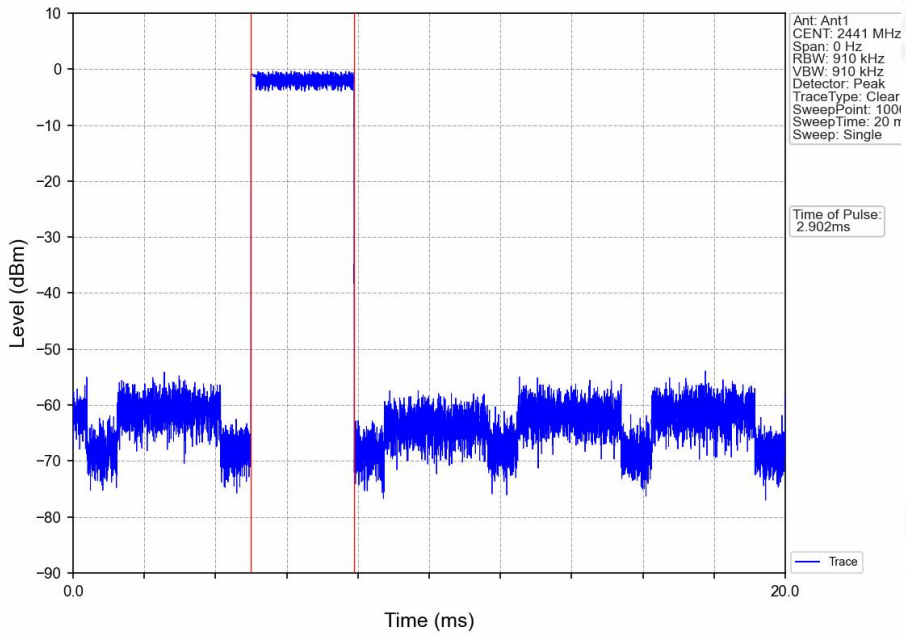



12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Integrating antenna, the best case gain of the antennas is 1.72 dBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

******* END OF REPORT *******