




# TEST REPORT

FCC ID..... :	2BCUX-V1171	
Test Report No..... :	TCT231218E019	
Date of issue..... :	Jan. 10, 2024	
Testing laboratory .....	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	Shen Zhen Shi Ai Mei Ke Ke Ji You Xian Gong Si	
Address..... :	Room 1615, Building C, Huangdu Plaza, No.3008 Yitian Road, Huanggang Community, Futian Street, Futian District, Shenzhen 518000 China	
Manufacturer's name ... :	Dong guan Utopia-Originality Technology Co., Ltd	
Address..... :	NO.2, moushan Road, Chan'an Town, Dongguan City, Guangdong Province, China	
Standard(s) .....	FCC CFR Title 47 Part 1.1310 KDB 680106 D01 RF Exposure Wireless Charging App v03r01	
Product Name..... :	Portable Charger	
Trade Mark .....	<b>VEGER</b>	
Model/Type reference..... :	V1171	
Rating(s)..... :	Rechargeable Li-ion Battery DC 3.85V	
Date of receipt of test item .....	Dec. 18, 2023	
Date (s) of performance of test..... :	Dec. 18, 2023 - Jan. 10, 2024	
Tested by (+signature) ... :	Yannie ZHONG	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	



**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## Table of Contents

<b>1. General Product Information .....</b>	<b>3</b>
1.1. EUT description .....	3
1.2. Model(s) list.....	3
<b>2. Facilities and Accreditations .....</b>	<b>4</b>
2.1. Facilities .....	4
2.2. Location .....	4
<b>3. Technical Requirements Specification .....</b>	<b>5</b>
3.1. Requirements.....	5
3.2. Test Setup .....	6
3.3. Test Procedure .....	7
3.4. Test Instruments List .....	7
3.5. Test Result .....	8
3.6. Test Set-up Photo.....	11

## 1. General Product Information

### 1.1. EUT description

Product Name.....:	Portable Charger
Model/Type reference.....:	V1171
Sample Number.....:	TCT231218E018-0101
Operation Frequency .....	326.92~339.90kHz
Modulation Technology .....	Load modulation
Max. Wireless Output Power:	2.5W
Antenna Type.....:	Inductive loop coil Antenna
Rating(s).....:	Rechargeable Li-ion Battery DC 3.85V

### 1.2. Model(s) list

None.

## 2. Facilities and Accreditations

### 2.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

### 2.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

### 3. Technical Requirements Specification

#### 3.1. Requirements

According to the item 5 of KDB 680106 D01 RF Exposure Wireless Charging App v03r01:

- (1) Power transfer frequency is less than 1 MHz.  
Yes
- (2) Output power from each primary coil is less than or equal to 15 watts.  
Yes
- (3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.  
Yes
- (4) Client device is placed directly in contact with the transmitter.  
Yes
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).  
No
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.  
Yes

#### Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30


F=frequency in MHz  
 \* =Plane-wave equivalent power density  
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

### 3.2. Test Setup

A:

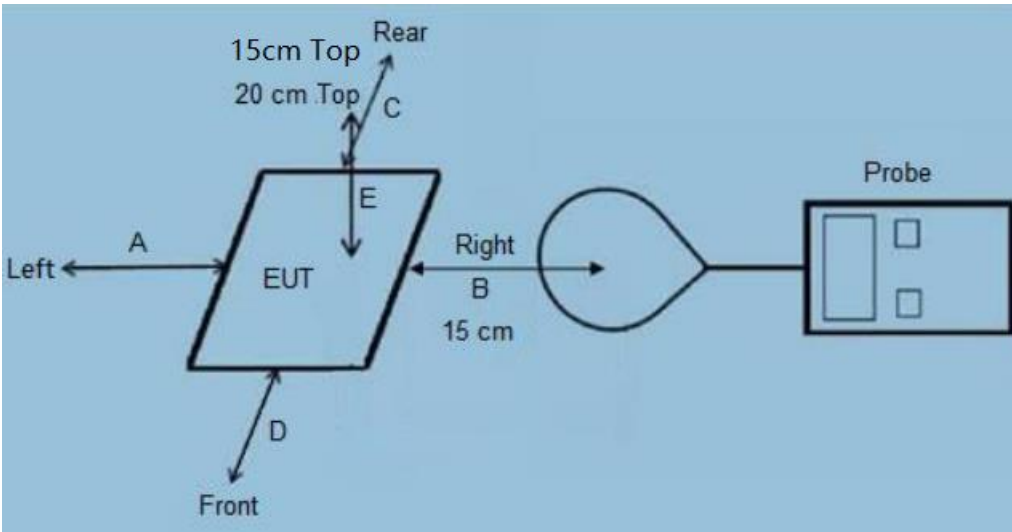


B:

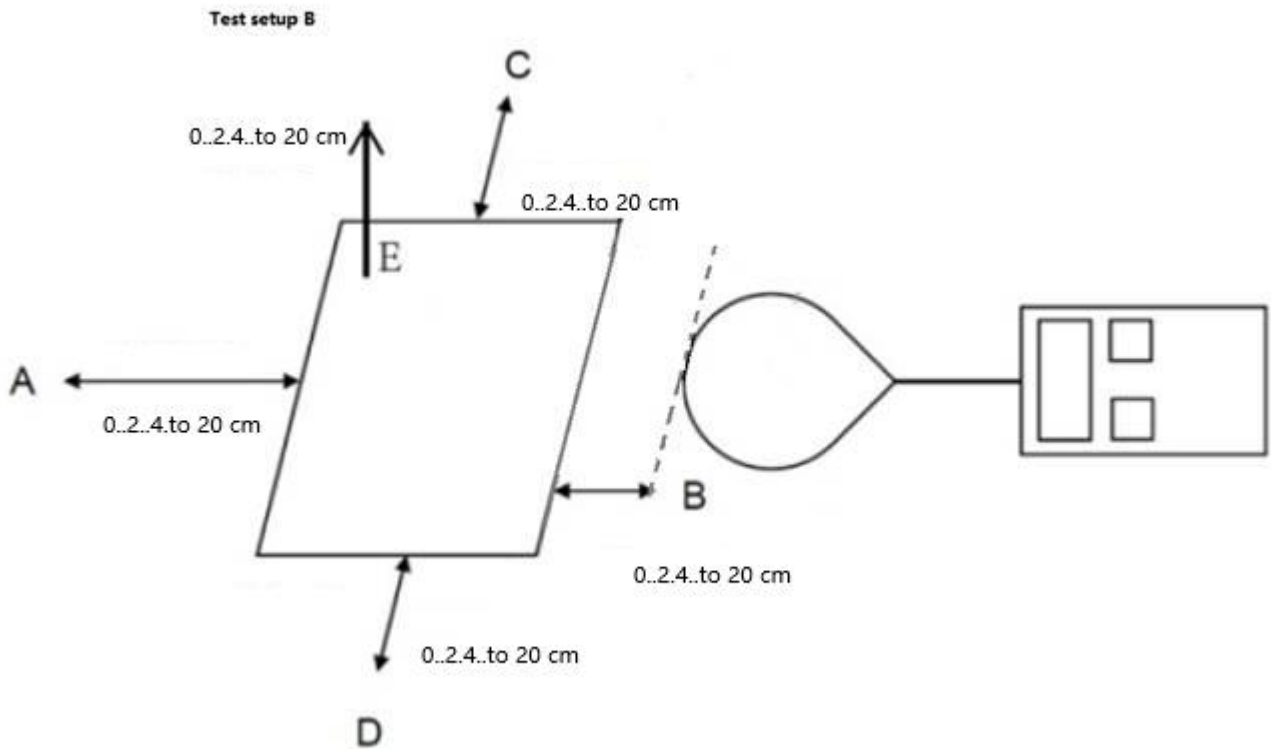


### 3.3. Test Procedure

- 1) The RF exposure test was performed in an echoic chamber;
- 2) The measurement probe was placed at test distance(15 cm from edges, 20 cm and 15cm from top) Which is between the edge of the charger and the geometric center of probe, for test setup A;
- 3) In addition to what is described in KDB 680106 D01, please measure and provide magnetic and electrical field strength at a distance 0cm to 20cm at 2cm iteration, i.e. at a distance of 0cm, 2cm, 4cm, ..... 20cm. Which is between the edge of the charger and the edge of of probe, for test setup B;
- 4) The highest emission leve laws recorded and compared with limit as soon as measurement of each points (A,B, C,D, E)were completed;
- 5) According to the requirements if KDB 680106 D01 v04, If the center of the probe sensing element is located more than 5 mm (The sensitive elements are located approximately 8 mm below the external surface specified in user manual of EHP-200A) from the probe outer surface, the field strengths need to be estimated through modeling for those positions that are not reachable;
- 6) Use **Biot-Savart Law**, the value of 0 cm can be estimated through the results of 2 cm, according to the formula:

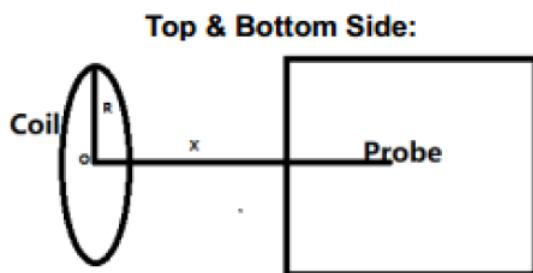

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

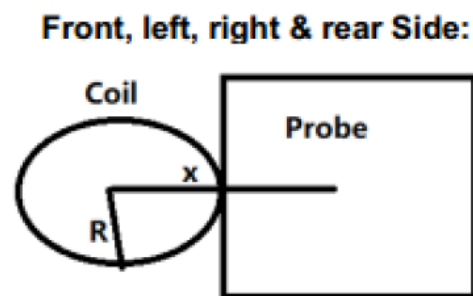

$$B = \frac{\mu_0 * I * N}{2 * x}$$

**Remark:**

B: H-field(Unit:T)

$\mu_0$ : Space permeability= $4 * \pi * 10^{-7}$

R: Radius of radiated coil, according to the coil specification: R=0.01m

X: The distance from the sensing elements of the probe to the edge of the radiated coil (the dimensions of EUT and load are take into account)

For Top and bottom side, X=0,2,4,6.....20;

For Front, left, right, rear side, X=0+R, 2+R, 4+R,6+R.....20+R;

N: Turns of the radiated coil.N=14

### 3.4. Test Instruments List

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due
Electric and Magnetic field probe-analyzer	Narda	EHP-200A	180ZX20511	Jul. 04, 2024
Apple Watch	Apple	A1757	GGFX909MHDx9	/

### 3.5. Test Result

Note: EUT mode: wireless output 2.5 W

Test Result for Test setup B:

Note: Internal battery power mode

E-Filed Strength at (15 cm from edges A,B,C,D, 20 cm and 15cm from top E) surrounding the EUT (V/m)

Charging Load Worse case	Test Position A (V/m)	Test Position B (V/m)	Test Position C (V/m)	Test Position D (V/m)	Test Position E (V/m)20cm	Test Position E (V/m)15cm	Limits (V/m)
1%	1.51	1.50	1.22	1.78	1.62	1.89	614
50%	1.35	1.54	1.48	1.39	1.85	1.72	614
99%	1.28	1.70	1.49	1.55	1.52	1.67	614

H-Filed Strength at (15 cm from edges A,B,C,D, 20 cm and 15cm from top E) surrounding the EUT (A/m)

Charging Load Worse case	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Test Position D (A/m)	Test Position E (A/m)20cm	Test Position E (A/m)15cm	Limits (A/m)
1%	0.204	0.198	0.212	0.196	0.189	0.194	1.63
50%	0.195	0.195	0.200	0.188	0.185	0.181	1.63
99 %	0.202	0.184	0.198	0.192	0.182	0.176	1.63



**Note: AC power in mode**

**H-Filed Strength at (15 cm from edges A,B,C,D, 20 cm and 15cm from top E) surrounding the EUT (A/m)**

Charging Load Worse case	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position E(A/m)	Limits (A/m)
1%	0.203	0.196	0.200	0.180	0.187	0.194	1.63
50%	0.198	0.187	0.196	0.185	0.179	0.178	1.63
99%	0.202	0.178	0.197	0.184	0.178	0.184	1.63



**Test Result for Test setup B:**

**Note: internal battery power mode**

**1% ,50% ,99% load all have been tested ,only worse case Max load (<1%) is reported.**

**H-Filed Strength at (distance 0cm to 20cm at 2cm iteration, i.e. at a distance of 20cm, 18cm, 16cm, ..... 0cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)**

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.099	0.131	0.064	0.107	0.158	0.098	1.63
4	0.056	0.077	0.058	0.070	0.055	0.065	1.63
6	0.046	0.074	0.039	0.062	0.041	0.048	1.63
8	0.036	0.064	0.056	0.055	0.030	0.035	1.63
10	0.030	0.053	0.035	0.039	0.024	0.023	1.63
12	0.025	0.022	0.024	0.022	0.023	0.021	1.63
14	0.022	0.024	0.022	0.021	0.028	0.023	1.63
16	0.021	0.019	0.022	0.021	0.019	0.020	1.63
18	0.020	0.018	0.021	0.011	0.018	0.019	1.63
20	0.020	0.019	0.021	0.019	0.018	0.018	1.63

Use the Biot-Savart Law to estimated the results of 2cm through 4 cm.


Test position	Measure Value(A/m)	Estimated Value (A/m)	Agreement Ratio	Limits
A	0.099	0.076	23.23%	30%
B	0.131	0.105	19.85%	30%
C	0.064	0.07	9.38%	30%
D	0.107	0.096	10.28%	30%
E	0.158	0.128	18.99%	30%
F	0.098	0.12	22.45%	30%

As the model is sufficient, the value of 0cm can be estimated through the results of 2 cm

Test position	Estimated Value (A/m)	Limits(A/m)
A	0.156	1.63
B	0.206	
C	0.081	
D	0.168	
E	0.979	
F	0.386	

### 3.6. Test Set-up Photo


AC in mode

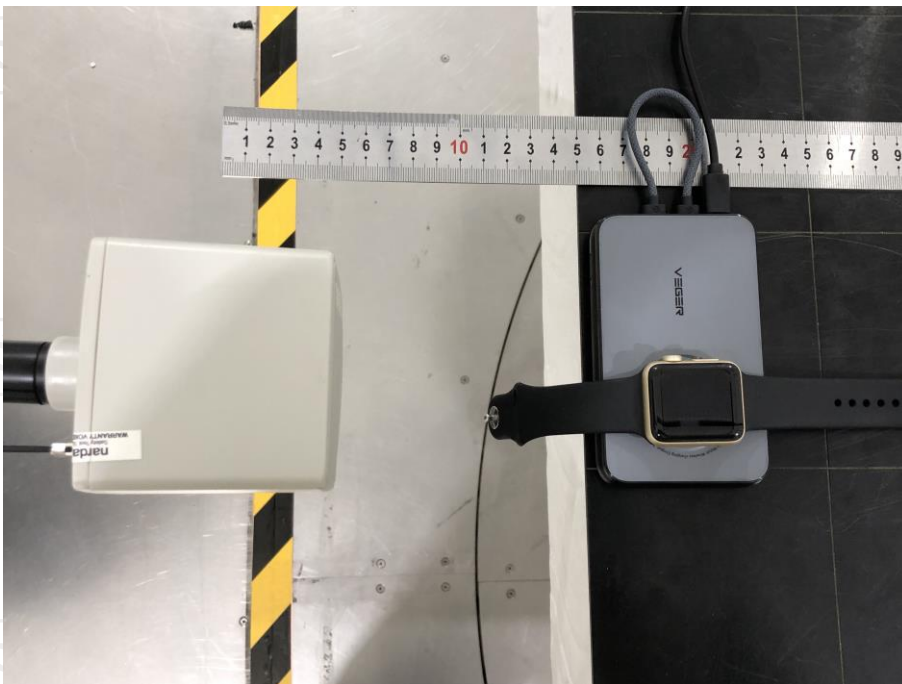







Internal battery mode

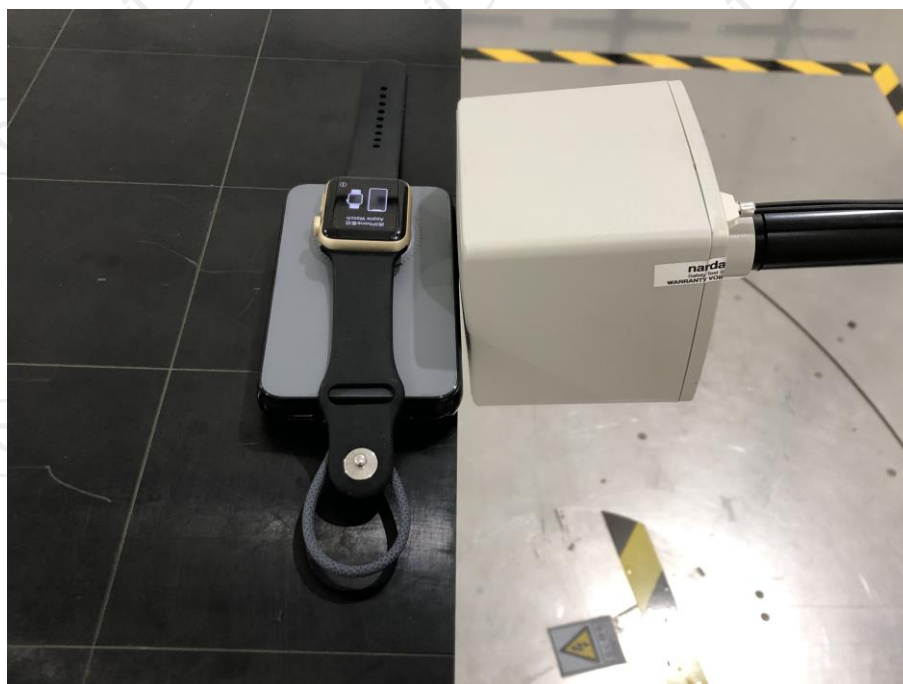



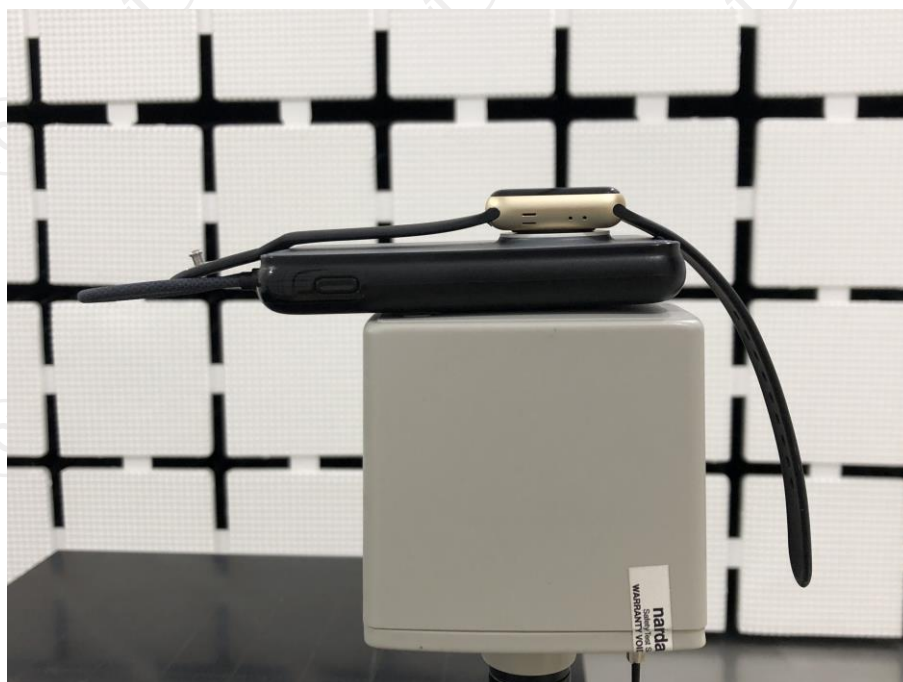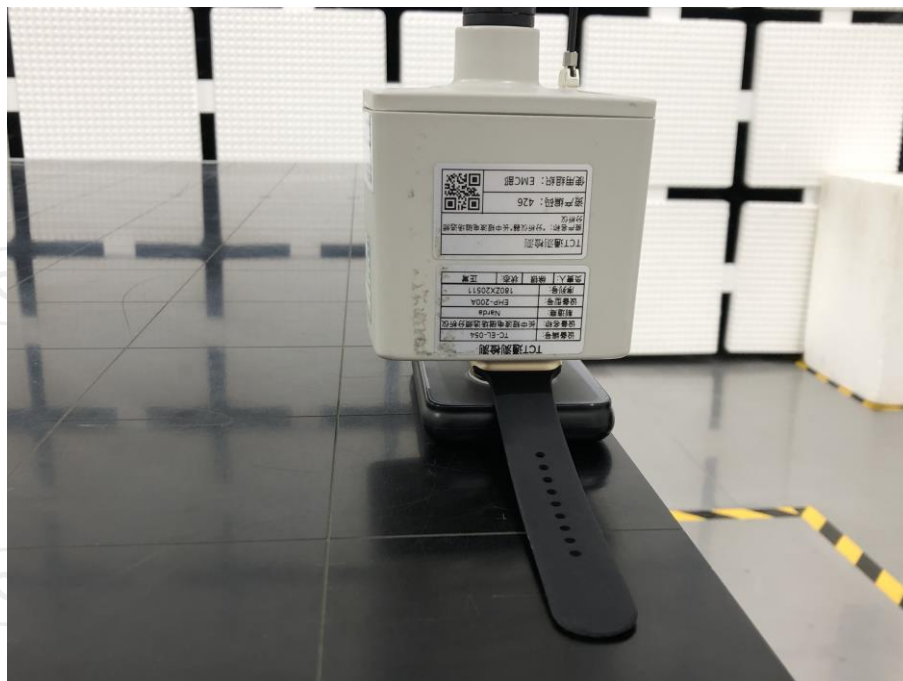

**\*\*\*\*\*END OF REPORT\*\*\*\*\***