

FCC - TEST REPORT

Report Number	:	68.910.23.0066.01	Date of Issue:	<u>2023-11-22</u>
Model	:	EV3320		
Product Type	:	Robot Vacuum Cleaner		
Applicant	:	Fengcheng Epro Smart Technology Co.,Ltd		
Address	:	High-end Equipment Manufacturing No. 4 Plant, Fengcheng High-tech Industrial Development Zone, Yichun City, Jiangxi Province, China		
Manufacturer	:	Fengcheng Epro Smart Technology Co.,Ltd		
Address	:	High-end Equipment Manufacturing No. 4 Plant, Fengcheng High-tech Industrial Development Zone, Yichun City, Jiangxi Province, China		
Test Result	:	<input checked="" type="checkbox"/> Positive	<input type="checkbox"/> Negative	
Total pages including Appendices	:	56		

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
7.1	Radiated test setups	8
7.2	Conducted RF test setups	9
7.3	AC Power Line Conducted Emission test setups	9
8	Systems test configuration	10
9	Technical Requirement	11
9.1	Conducted Emission	11
9.2	Conducted output power	16
9.3	6dB bandwidth	17
9.4	Power spectral density	23
9.5	Spurious RF conducted emissions	29
9.6	Band edge	40
9.7	Spurious radiated emissions for transmitter	45
10	Test Equipment List	55
11	System Measurement Uncertainty	56

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

3 Description of the Equipment under Test

Product:	Robot Vacuum Cleaner
Model no.:	EV3320
FCC ID:	2BCXJEV3320
Ratings:	Robot Vacuum Cleaner: Input: 19VDC, 0.6A Rated voltage: 14.4VDC Rated power: 30W
	Power supply 1: SA182V-190060U Input: 100-240VAC, 50/60Hz, 0.4A Output: 19VDC, 0.6A
	Power supply 2: ZD012M190060USE Input: 100-240VAC, 50/60Hz, 0.5A Output: 19VDC, 0.6A
Accessories:	Power supply 1: SA182V-190060U Power supply 2: ZD012M190060USE
RF Transmission Frequency:	2412MHz-2462MHz
No. of Operated Channel:	11 for 802.11b/g/n20
Modulation:	802.11b: CCK, DSSS 802.11g/n20: BPSK, QPSK, 16-QAM, 64-QAM
Antenna Type:	PCB antenna
Antenna Gain:	2.54 dBi
Description of the EUT:	The EUT is a Robot Vacuum Cleaner supports 2.4G WIFI function.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C 10-1-2021 Edition			
Test Condition	Test Result	Test Site	
§15.207	Conducted emission AC power port	Pass	Site 1
§15.247 (b) (3)	Conducted output power	Pass	Site 1
§15.247(e)	Power spectral density	Pass	Site 1
§15.247(a)(2)	6dB bandwidth	Pass	Site 1
§15.247(a)(1)	20dB Occupied bandwidth	N/A	--
§15.247(a)(1)	Carrier frequency separation	N/A	--
§15.247(a)(1)(iii)	Number of hopping frequencies	N/A	--
§15.247(a)(1)(iii)	Dwell Time	N/A	--
§15.247(d)	Spurious RF conducted emissions	Pass	Site 1
§15.247(d)	Band edge	Pass	Site 1
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Pass	Site 1
§15.203	Antenna requirement	Pass See note 1	--

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a PCB antenna, which gain is 2.54dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2BCXJEV3320, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15 Subpart C rules.

SUMMARY:

All tests according to the regulations cited on page 6 were

- Performed

- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: 2023-10-18

Testing Start Date: 2023-10-20

Testing End Date: 2023-11-21

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch –

Reviewed by:

Prepared by:


Tested by:



Jessie He
Project Manager




Myron Yu
Project Engineer




Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


9kHz - 30MHz

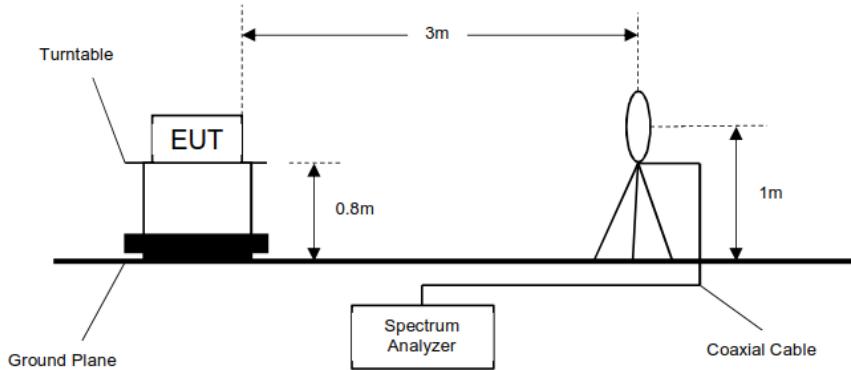


Below 1GHz

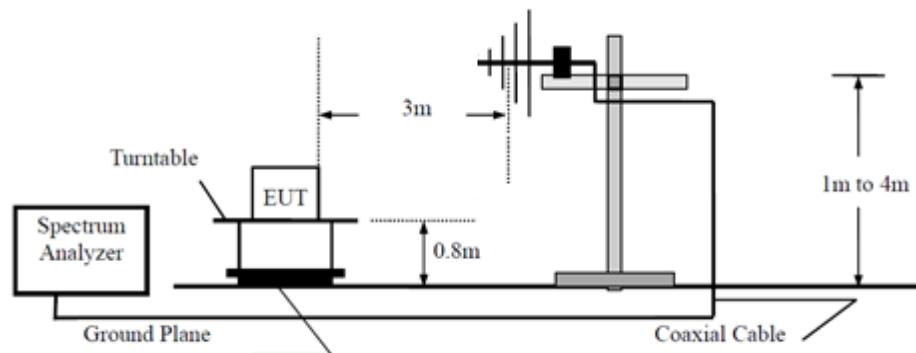


Above 1GHz

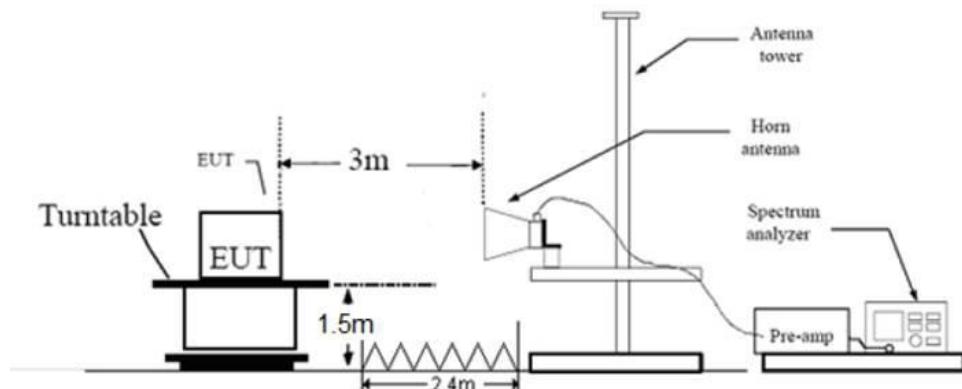

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

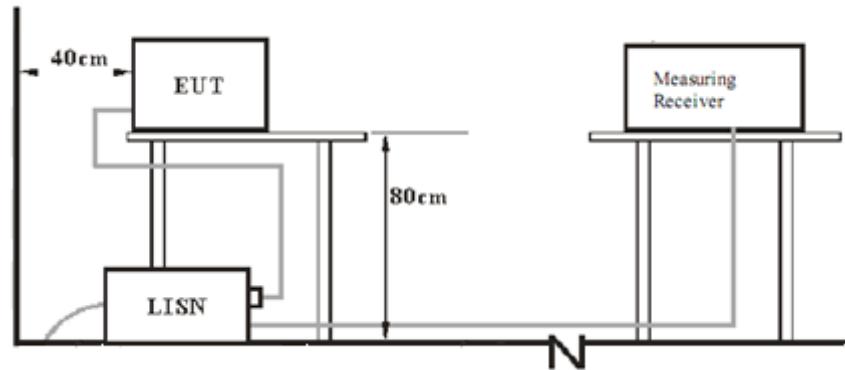

8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
LAPTOP	LENOVO	X240	L34015282

The system was configured to channel 1, 6, and 11 for the test.

Test Software Information:

Test Software Version	AmebaZ2_mptool_1V3	
Mode	Setting TX Power	Packet Type
802.11b	Power Index: 70	11b 1 Mbps
802.11g	Power Index: 91	11g 6 Mbps
802.11n HT20	Power Index: 91	MCS0 6.5 Mbps

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreasing linearly with logarithm of the frequency

Conducted Emission

Product Type : Robot Vacuum Cleaner
 M/N : EV3320 (Power supply 1: SA182V-190060U)
 Operating Condition : WIFI transmission
 Test Specification : Power Line, Live
 Comment : AC 120V/60Hz

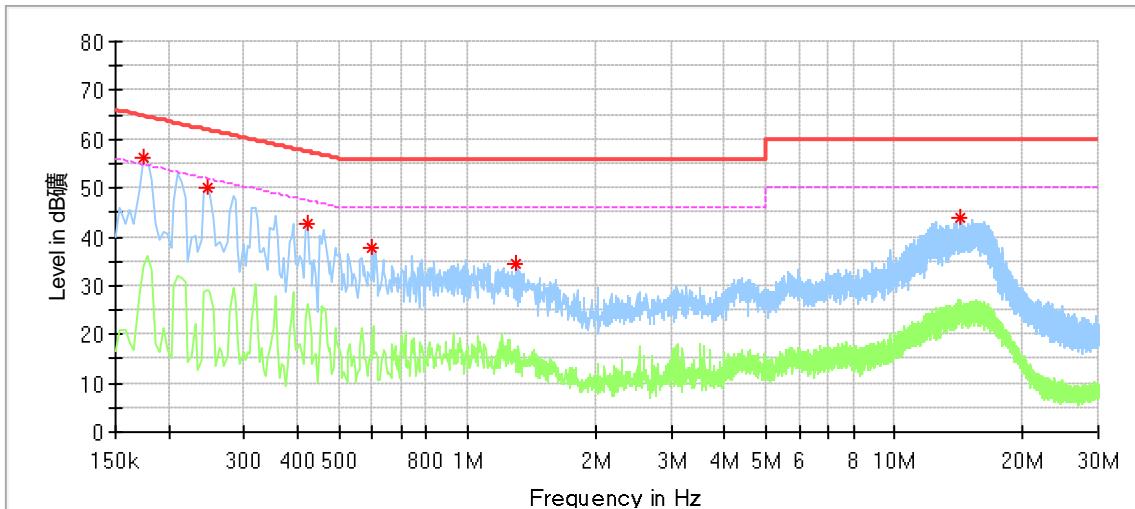

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.174000	56.38	---	64.77	8.39	L1	9.54
0.246000	50.10	---	61.89	11.79	L1	9.56
0.422000	42.85	---	57.41	14.56	L1	9.58
0.598000	37.85	---	56.00	18.15	L1	9.60
1.298000	34.55	---	56.00	21.45	L1	9.61
14.282000	43.88	---	60.00	16.12	L1	10.00

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Robot Vacuum Cleaner
 M/N : EV3320 (Power supply 1: SA182V-190060U)
 Operating Condition : WIFI transmission
 Test Specification : Power Line, Neutral
 Comment : AC 120V/60Hz

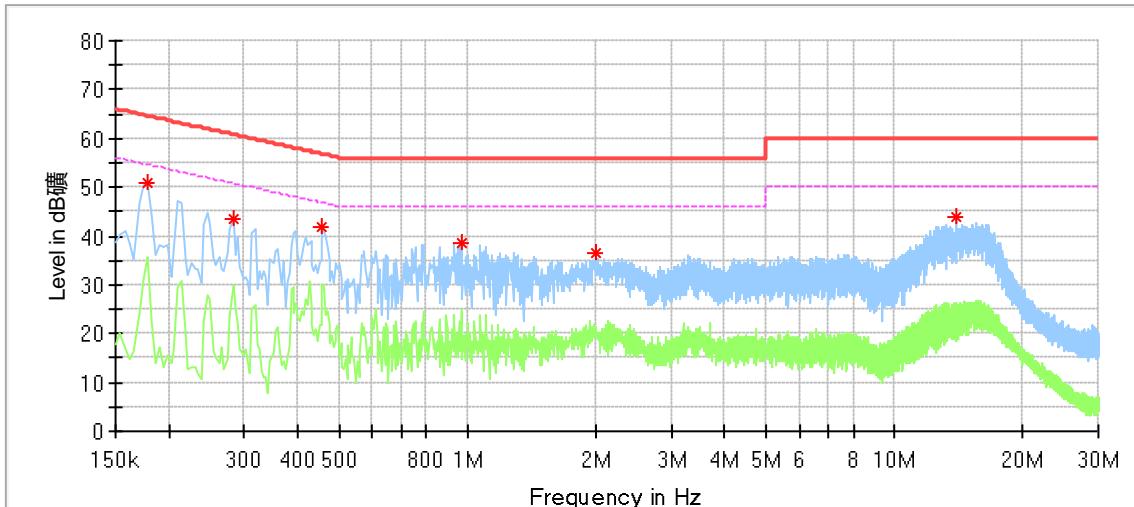

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.178000	50.90	---	64.58	13.68	N	9.57
0.282000	43.56	---	60.76	17.20	N	9.59
0.458000	41.80	---	56.73	14.93	N	9.61
0.966000	38.62	---	56.00	17.38	N	9.63
1.994000	36.40	---	56.00	19.60	N	9.66
13.938000	43.76	---	60.00	16.24	N	10.00

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Robot Vacuum Cleaner
 M/N : EV3320 (Power supply 2: ZD012M190060USE)
 Operating Condition : WIFI transmission
 Test Specification : Power Line, Live
 Comment : AC 120V/60Hz

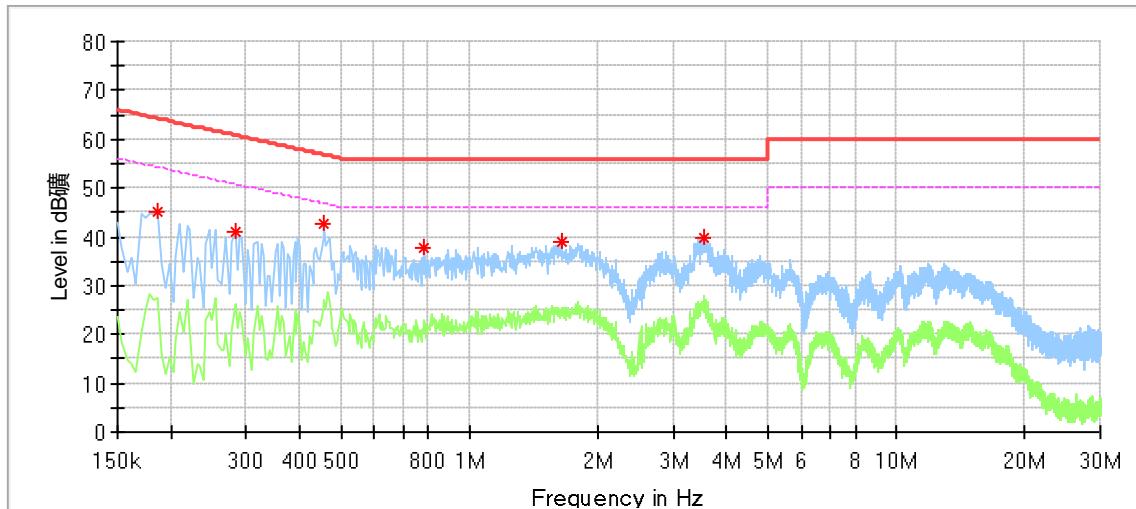

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.186000	45.02	---	64.21	19.20	L1	9.54
0.282000	41.21	---	60.76	19.55	L1	9.56
0.458000	42.72	---	56.73	14.00	L1	9.58
0.786000	37.65	---	56.00	18.35	L1	9.60
1.650000	38.94	---	56.00	17.06	L1	9.61
3.526000	39.66	---	56.00	16.34	L1	9.68

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Robot Vacuum Cleaner
 M/N : EV3320 (Power supply 2: ZD012M190060USE)
 Operating Condition : WIFI transmission
 Test Specification : Power Line, Neutral
 Comment : AC 120V/60Hz

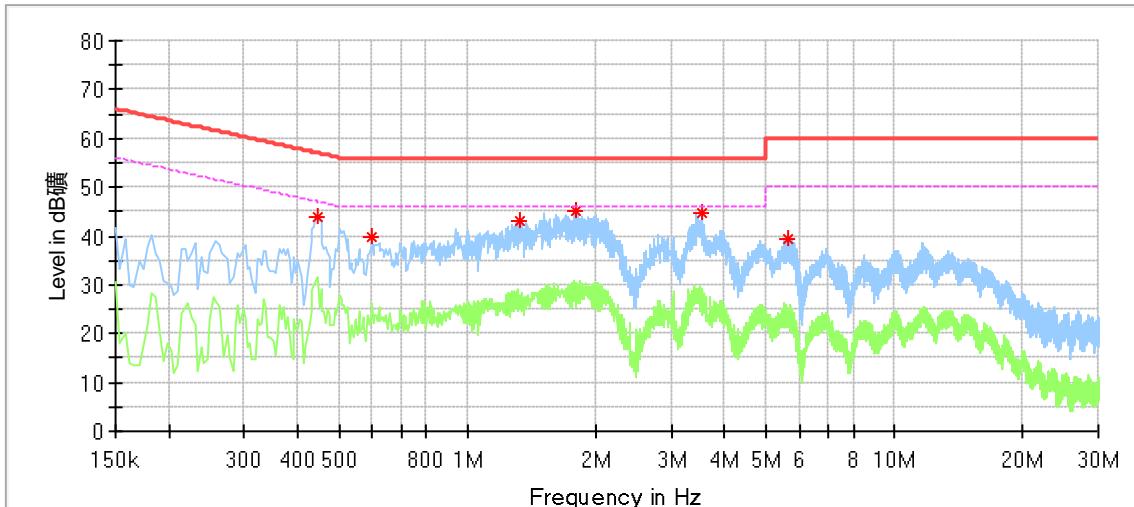

Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.446000	44.03	---	56.95	12.92	N	9.61
0.598000	39.82	---	56.00	16.18	N	9.63
1.330000	42.90	---	56.00	13.10	N	9.64
1.798000	45.16	---	56.00	10.84	N	9.65
3.534000	44.57	---	56.00	11.43	N	9.71
5.642000	39.40	---	60.00	20.60	N	9.80

Remark:

Level=Reading Level + Correction Factor


Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted output power

Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

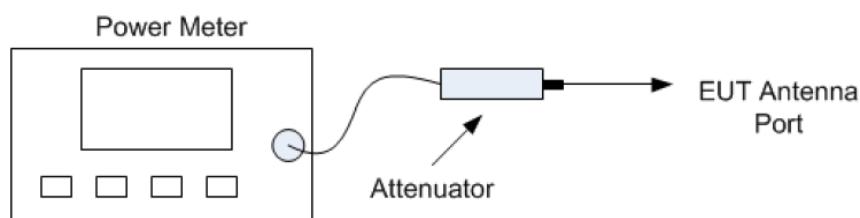

Power meter conducted test setup

Limits

According to §15.247 (b) (3), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test results

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
802.11b	SISO	2412	13.20	≤30	Pass
		2437	13.30	≤30	Pass
		2462	13.20	≤30	Pass
802.11g	SISO	2412	18.30	≤30	Pass
		2437	18.40	≤30	Pass
		2462	17.40	≤30	Pass
802.11n (HT20)	SISO	2412	17.10	≤30	Pass
		2437	17.30	≤30	Pass
		2462	16.40	≤30	Pass

9.3 6dB bandwidth

Test Method

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=100KHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit


Limit [kHz]


≥500


Test results


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	9.100	≥0.5	Pass
		2437	1	9.105	≥0.5	Pass
		2462	1	8.120	≥0.5	Pass
802.11g	SISO	2412	1	16.385	≥0.5	Pass
		2437	1	16.370	≥0.5	Pass
		2462	1	16.381	≥0.5	Pass
802.11n (HT20)	SISO	2412	1	17.598	≥0.5	Pass
		2437	1	17.595	≥0.5	Pass
		2462	1	17.606	≥0.5	Pass


Test Graphs

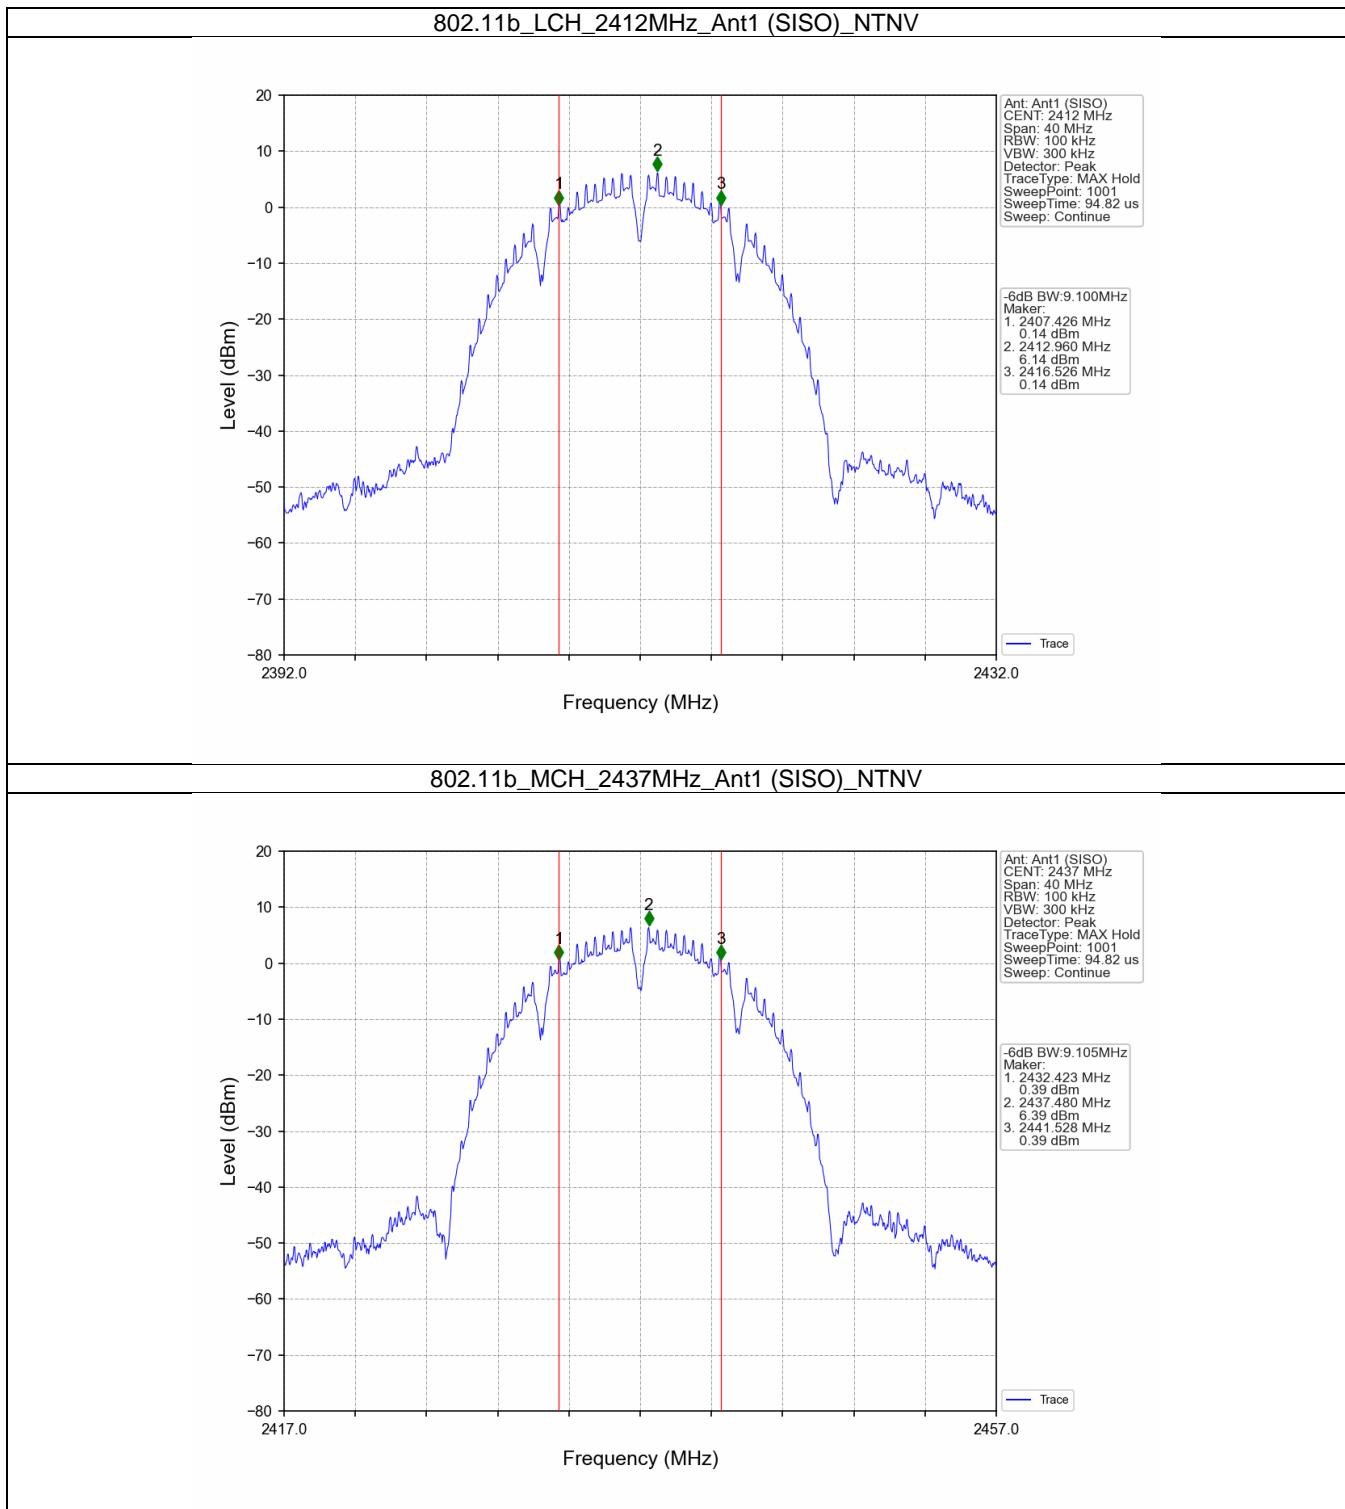

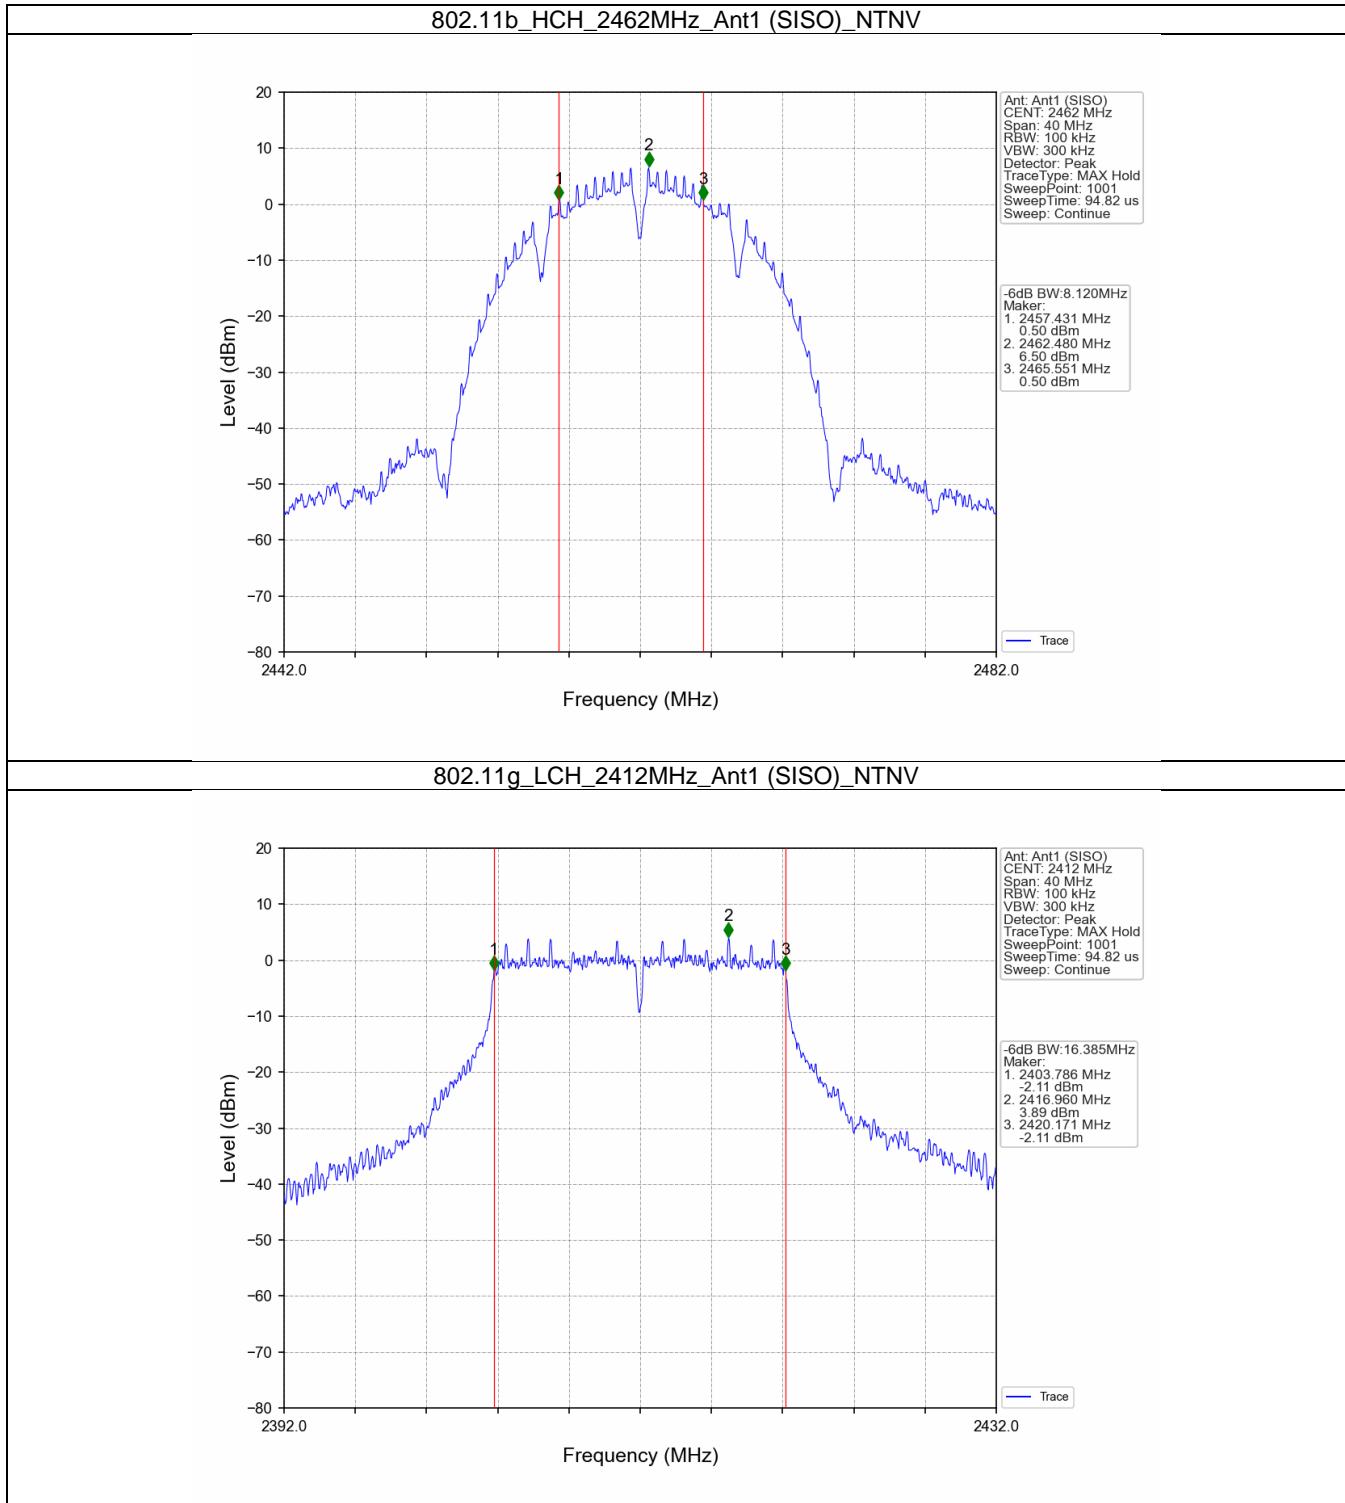

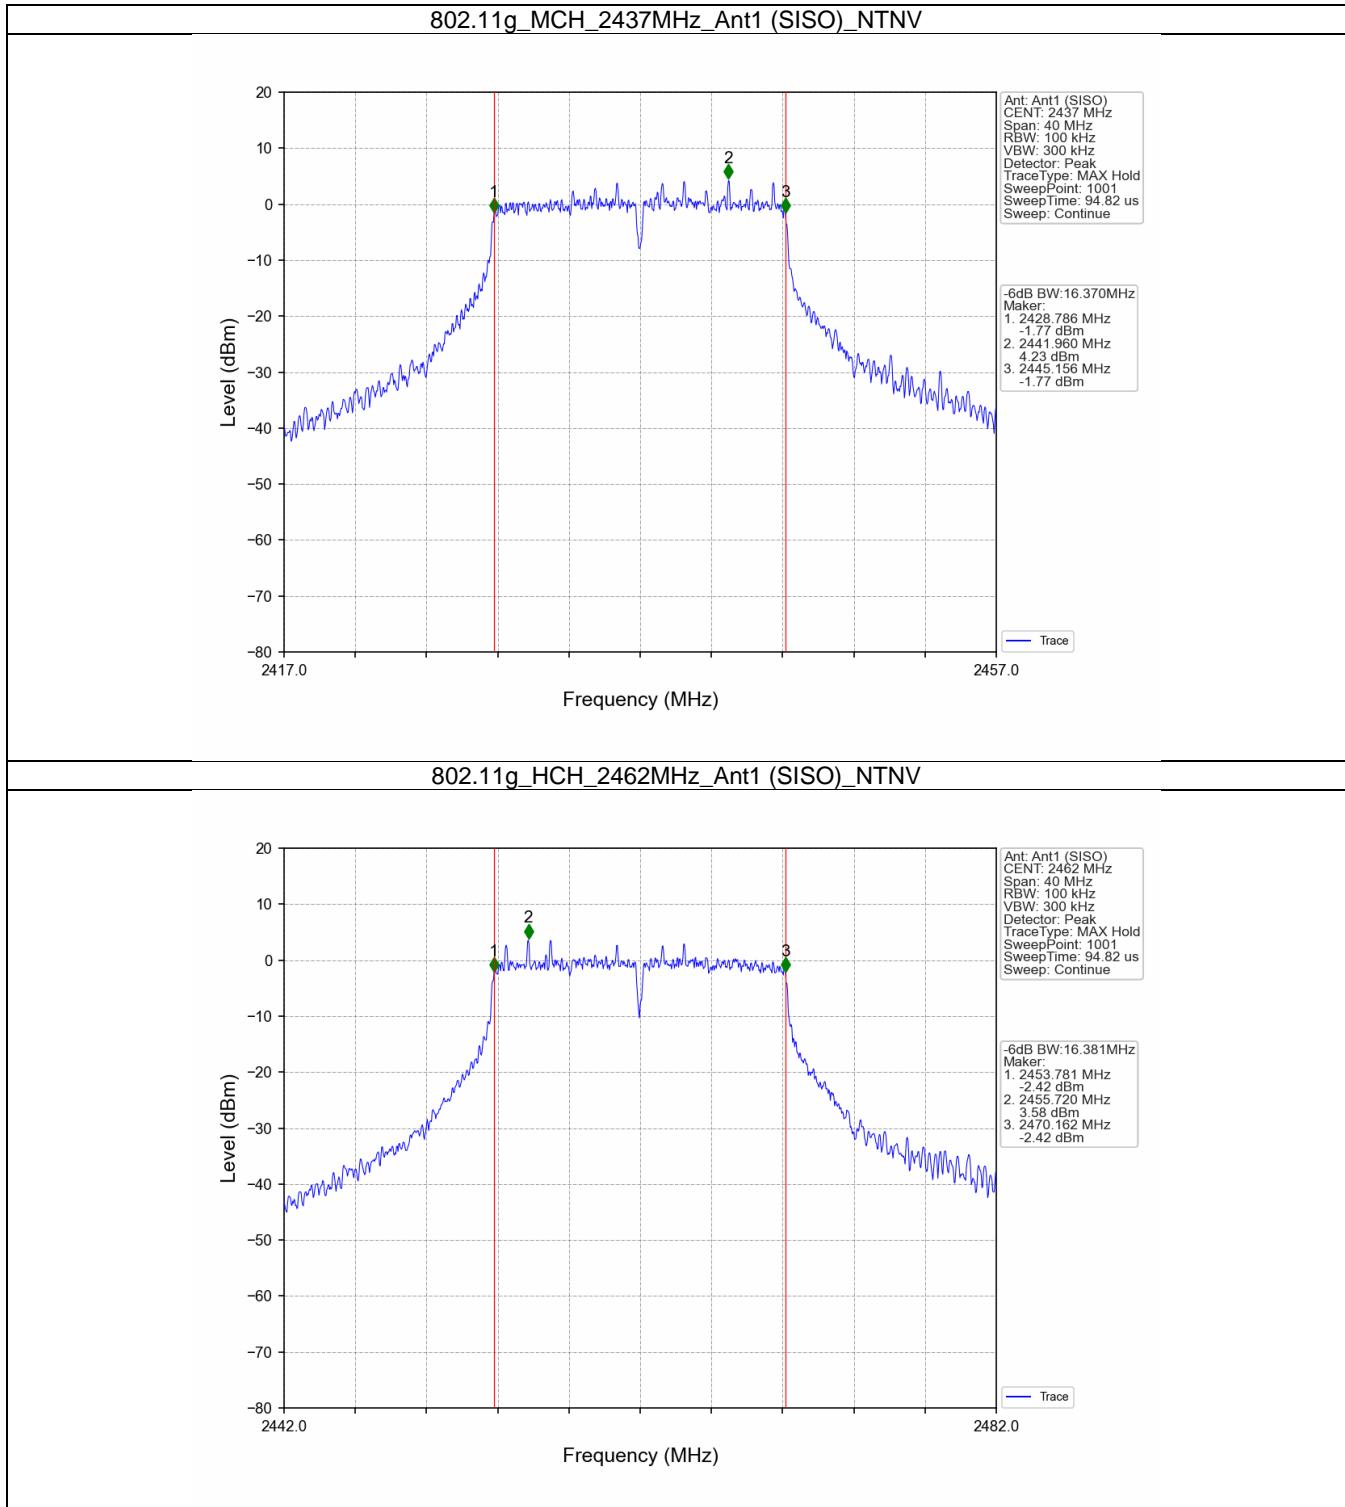

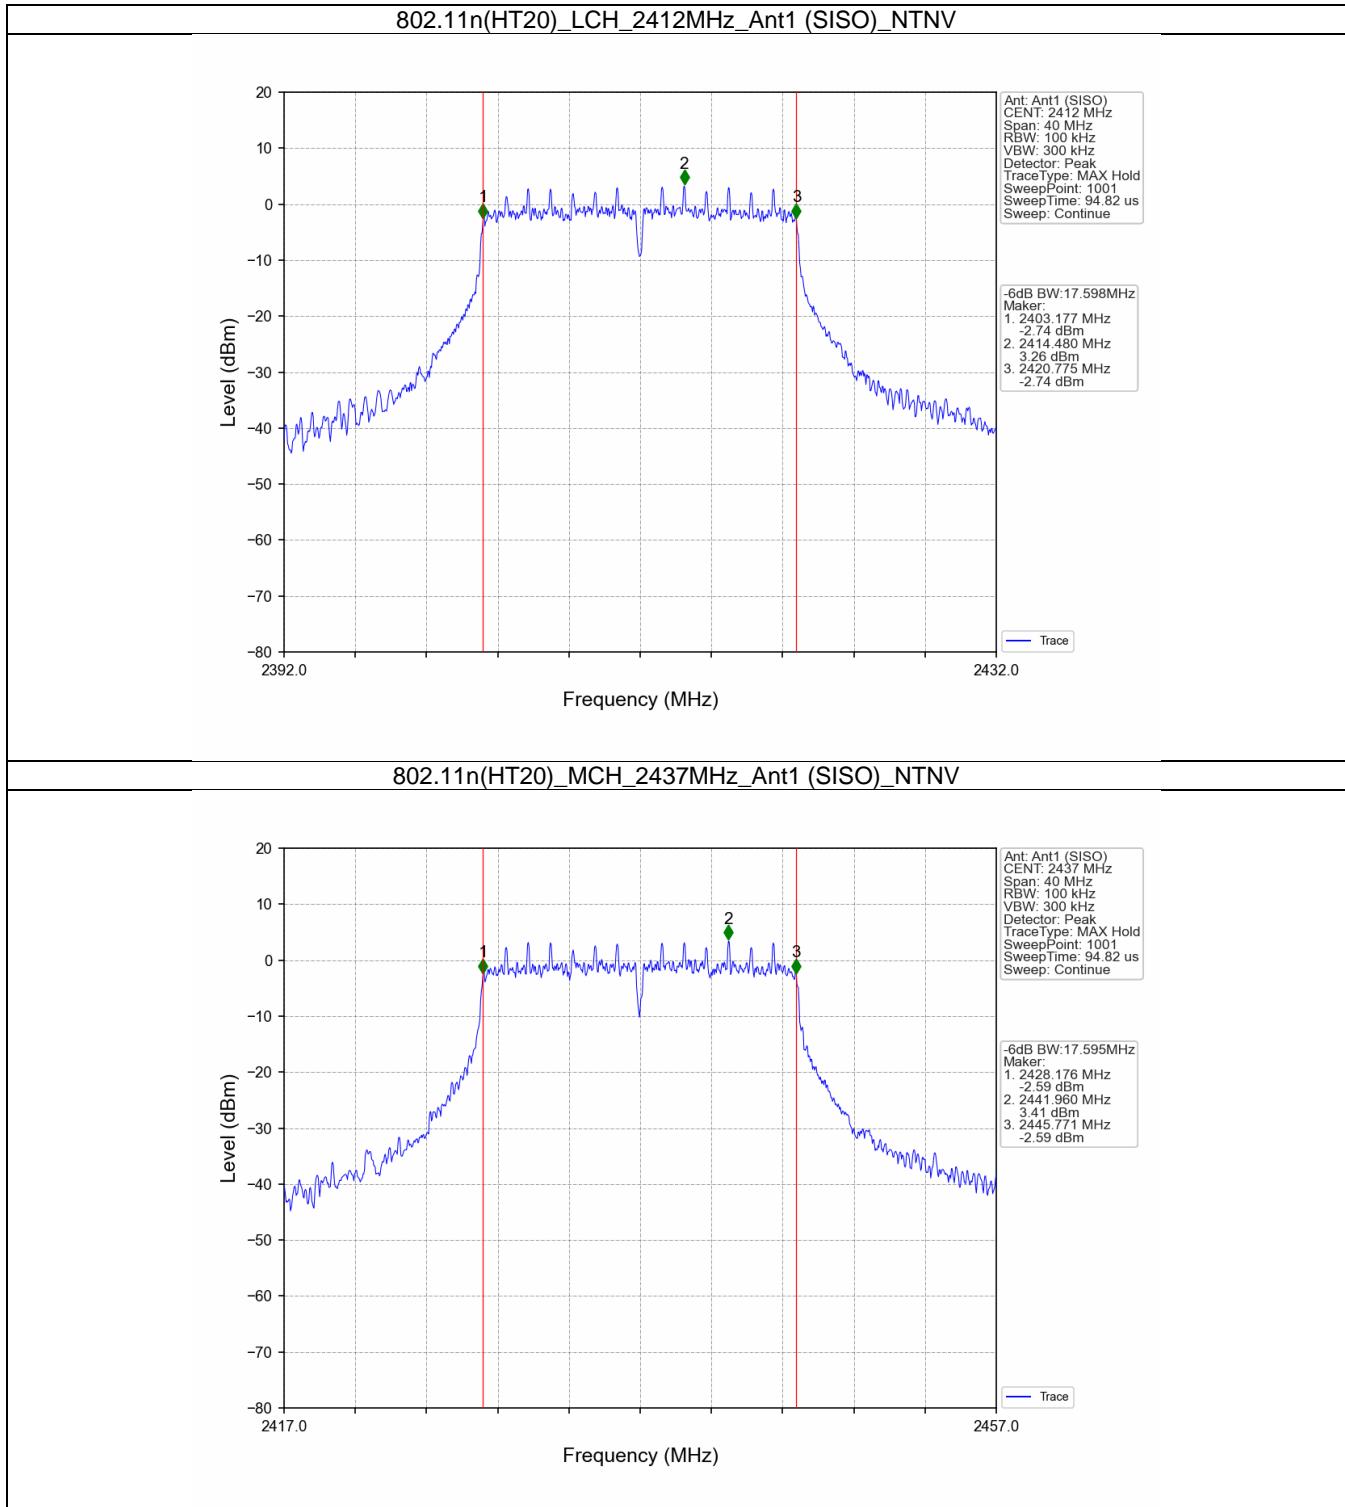

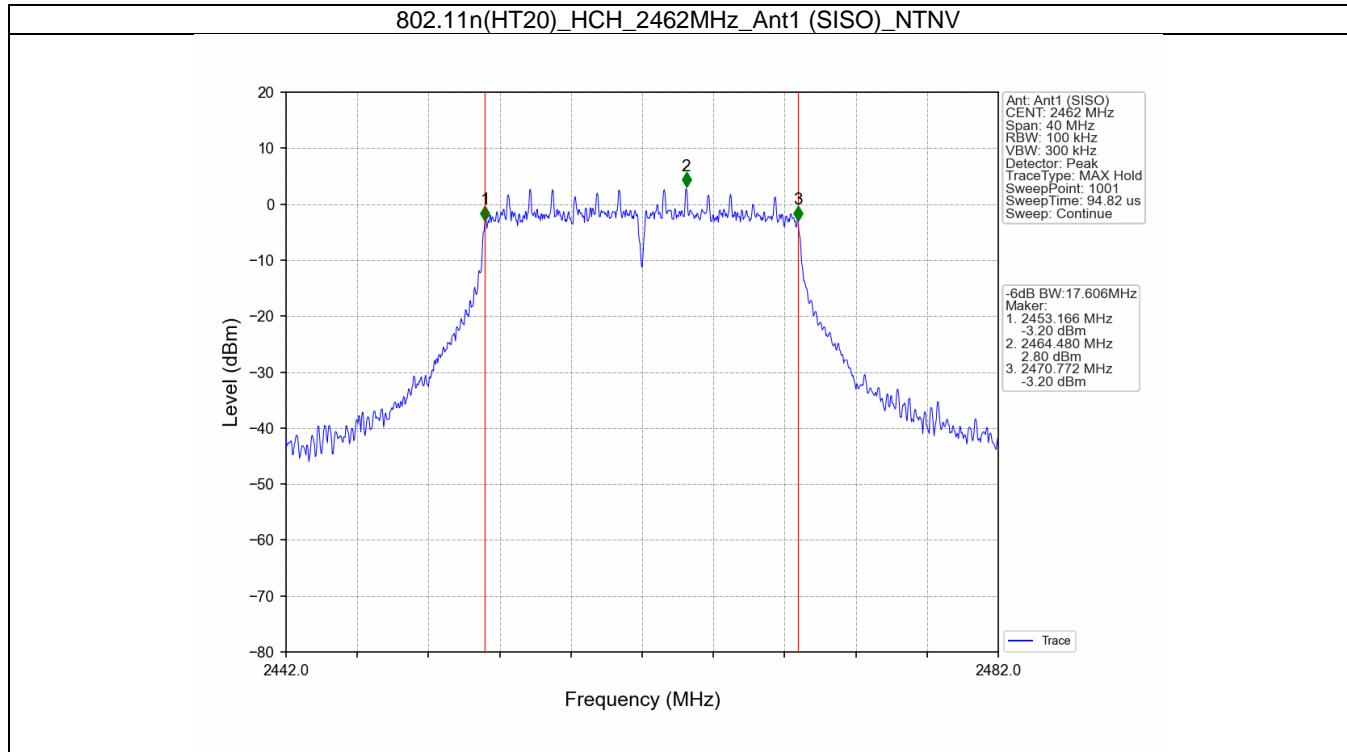

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW \geq 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3kHz]

≤ 8


Test results

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
802.11b	SISO	2412	-7.69	≤ 8	Pass
		2437	-7.08	≤ 8	Pass
		2462	-7.46	≤ 8	Pass
802.11g	SISO	2412	-9.60	≤ 8	Pass
		2437	-9.53	≤ 8	Pass
		2462	-10.37	≤ 8	Pass
802.11n (HT20)	SISO	2412	-11.29	≤ 8	Pass
		2437	-10.77	≤ 8	Pass
		2462	-11.84	≤ 8	Pass


Test Graphs

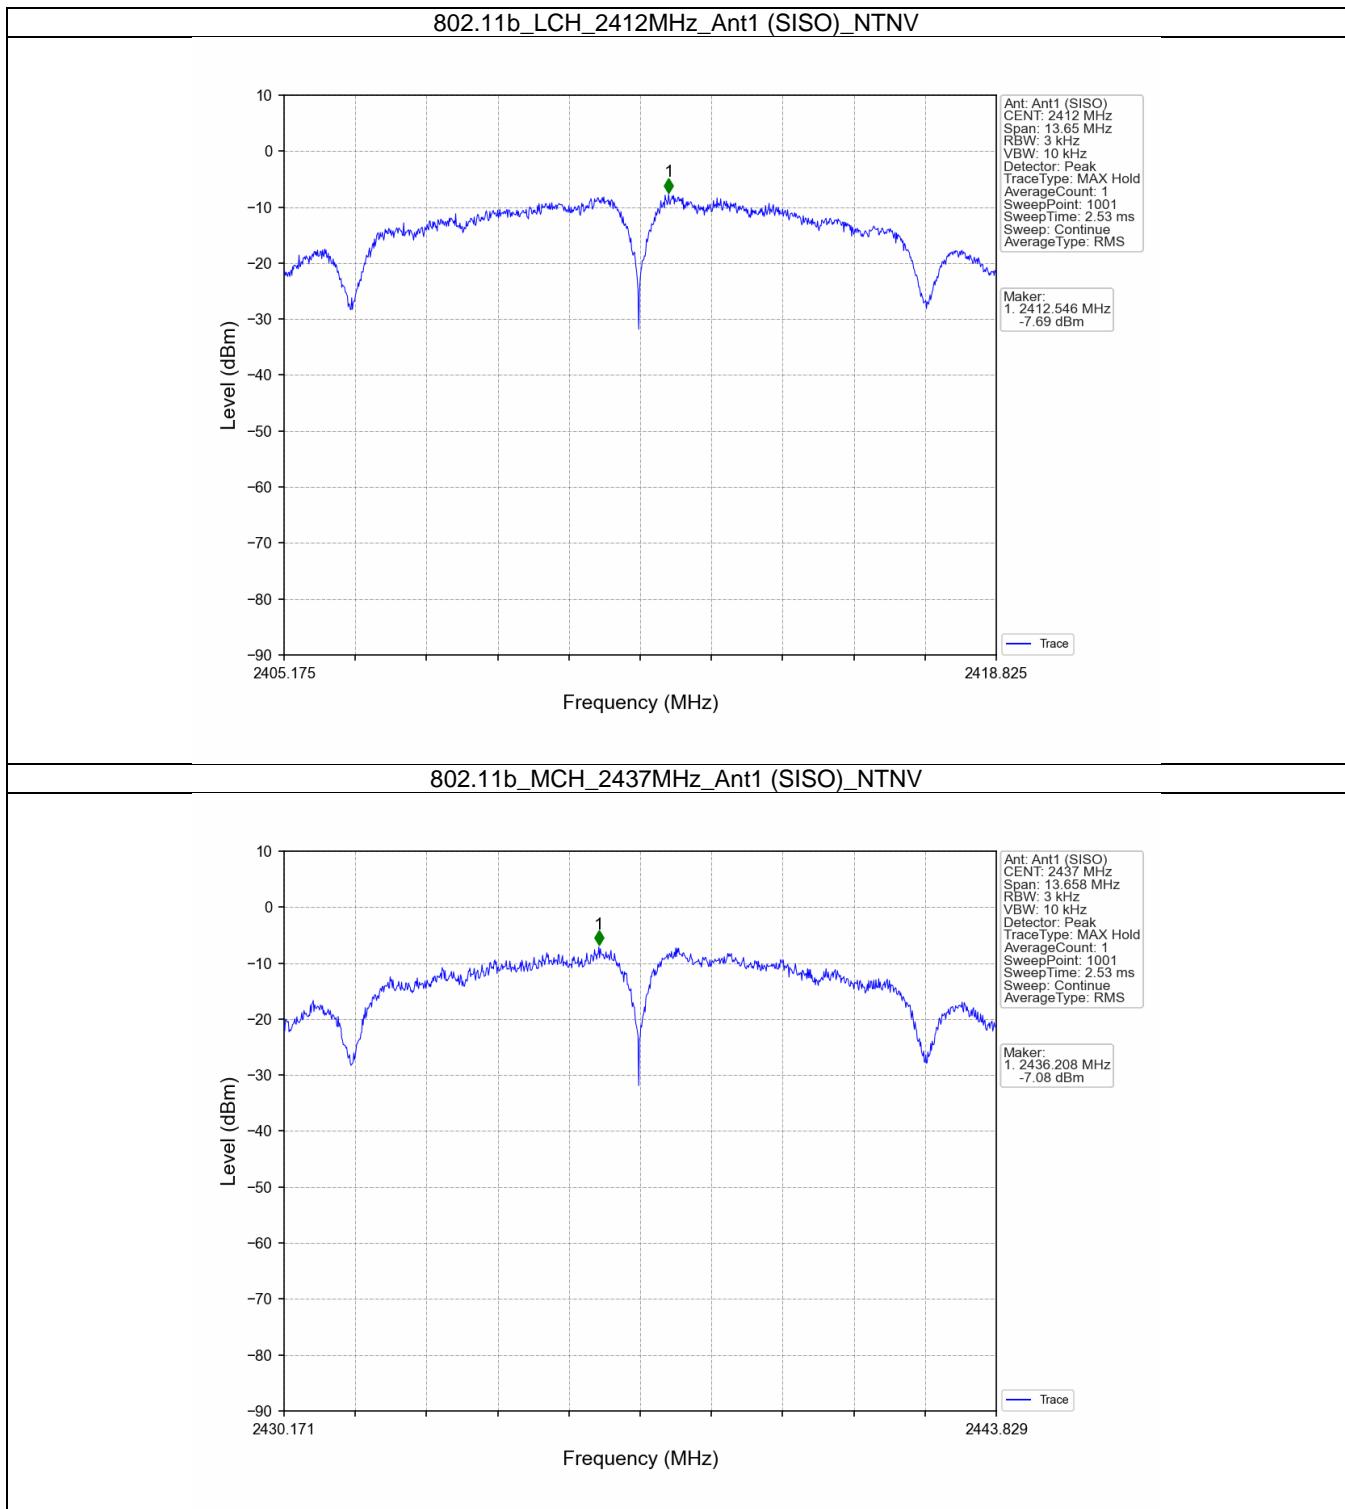


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

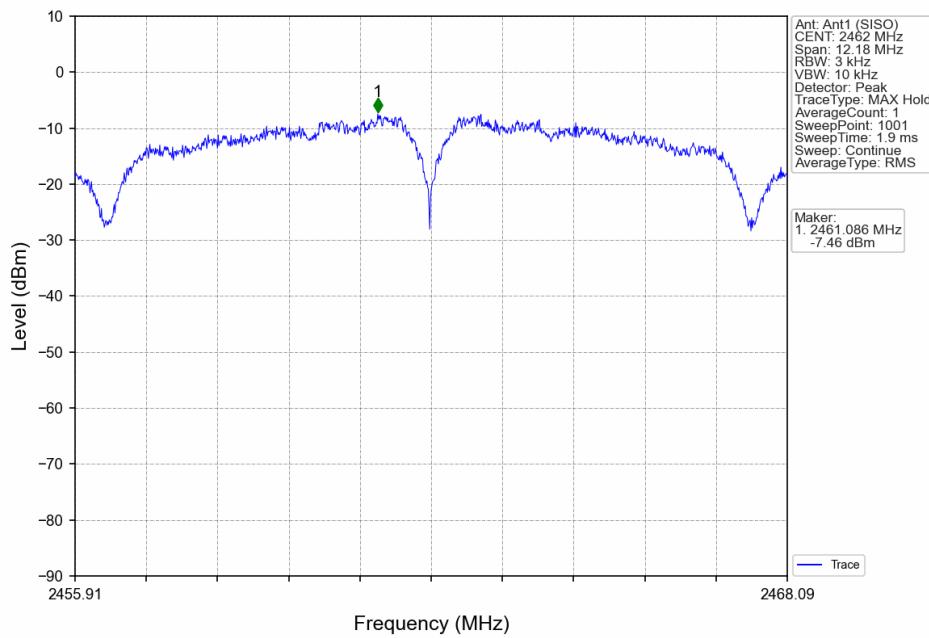


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

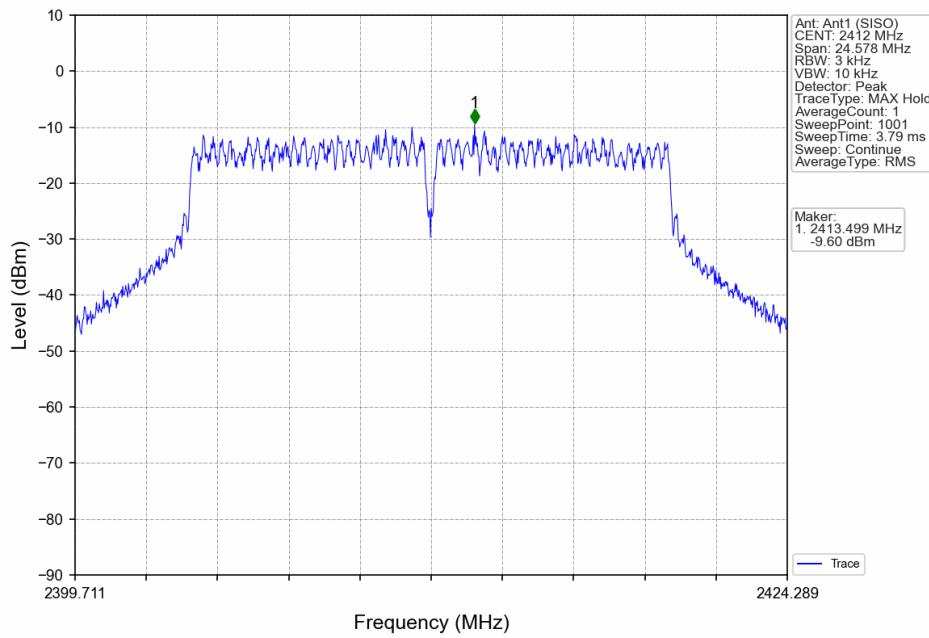



802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

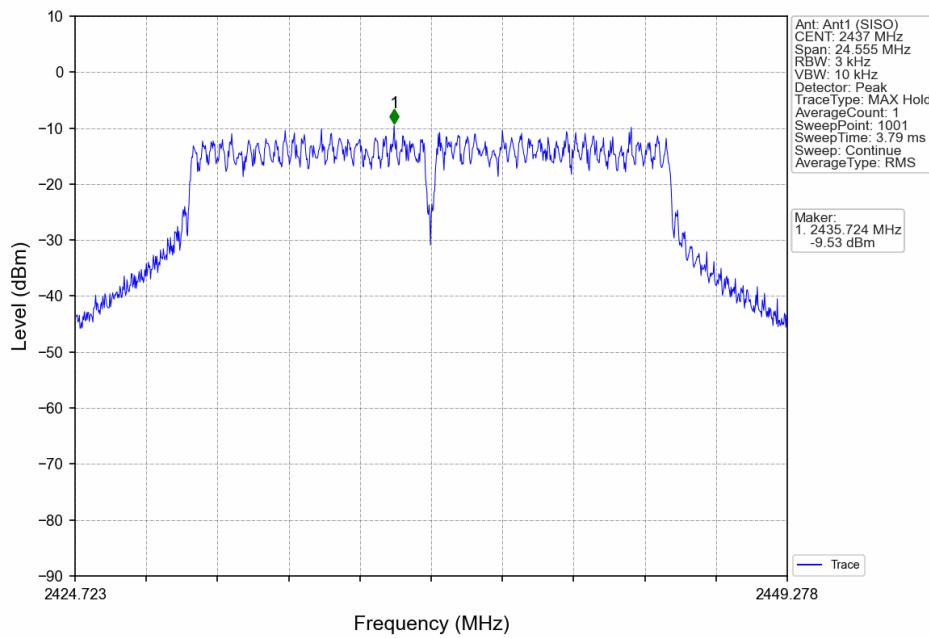

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

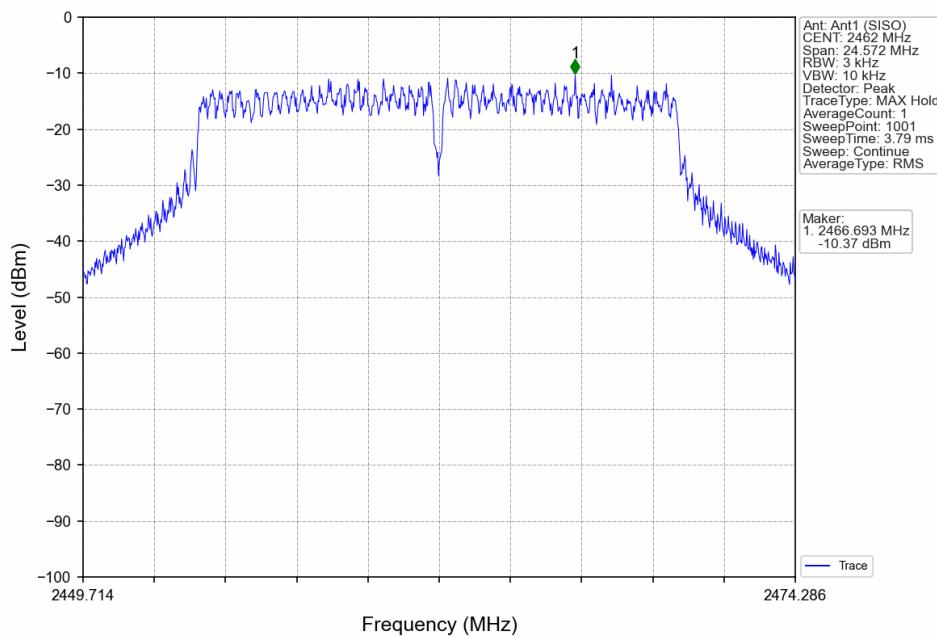

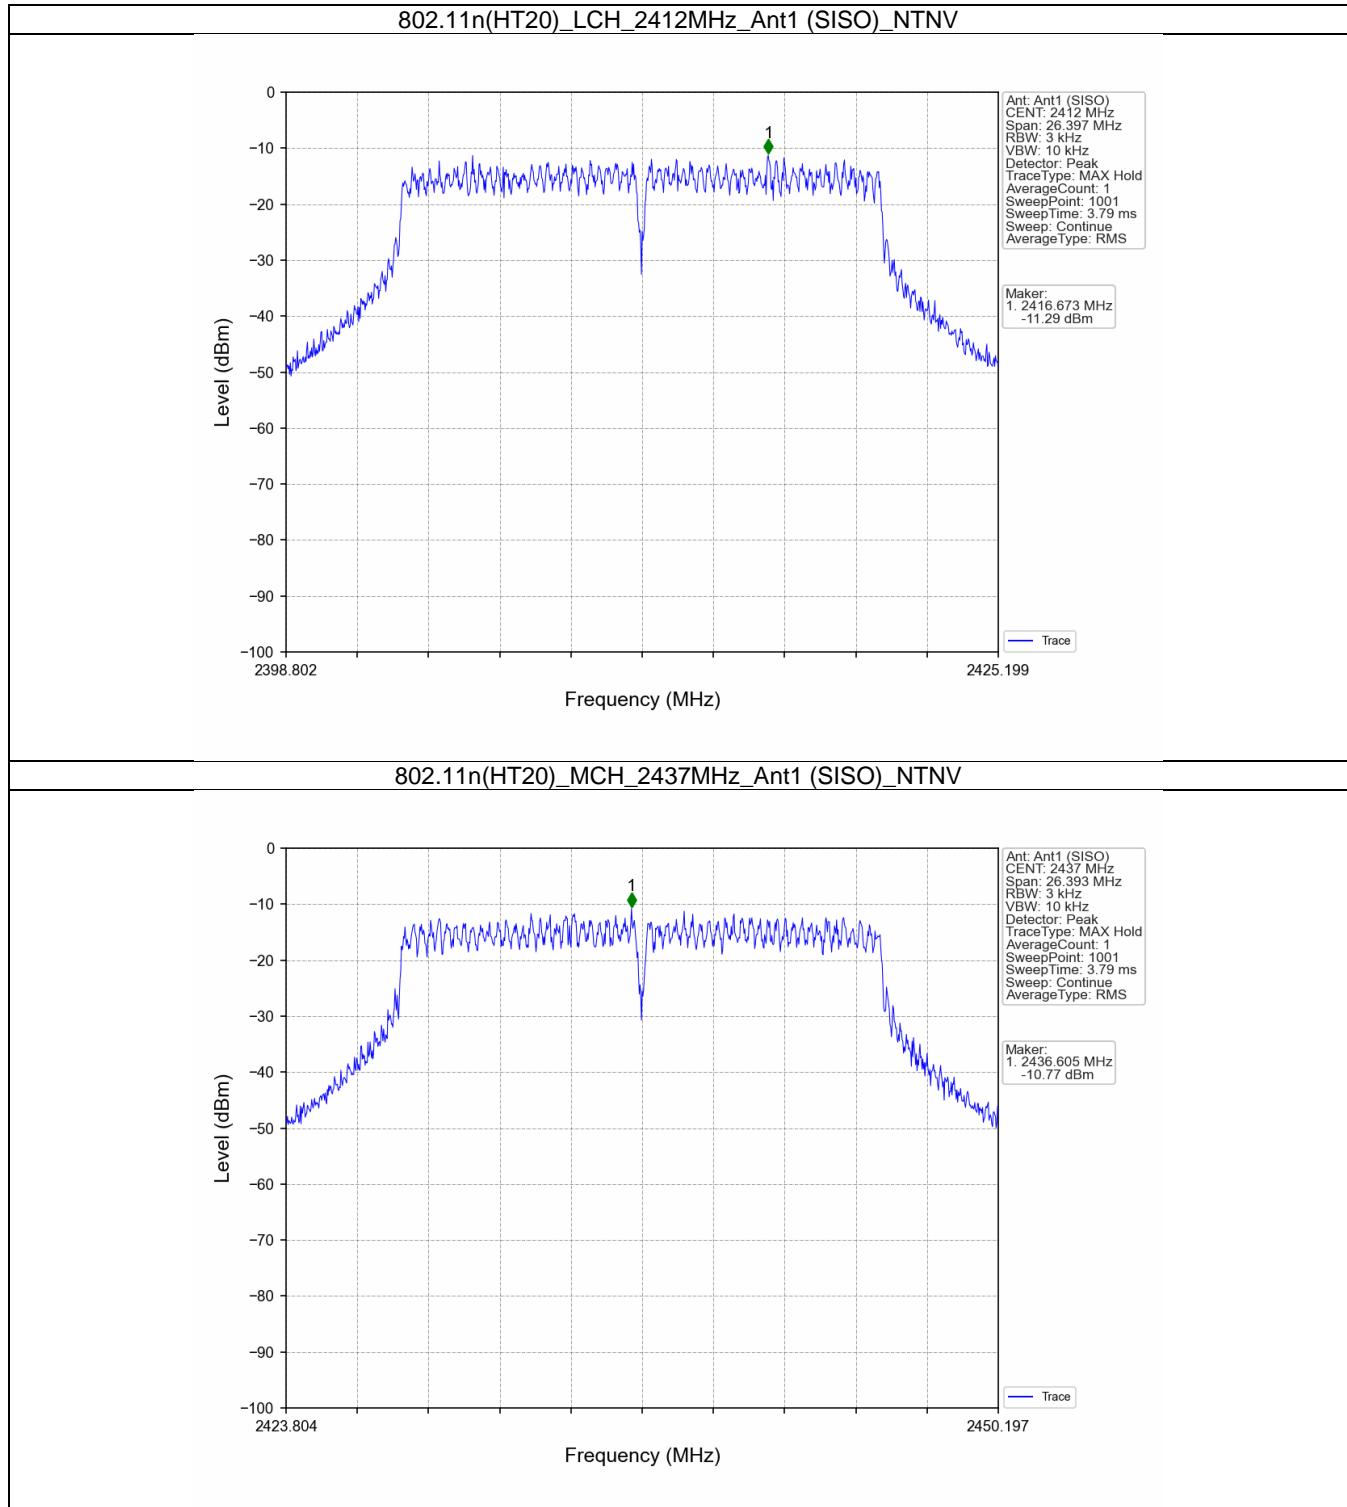

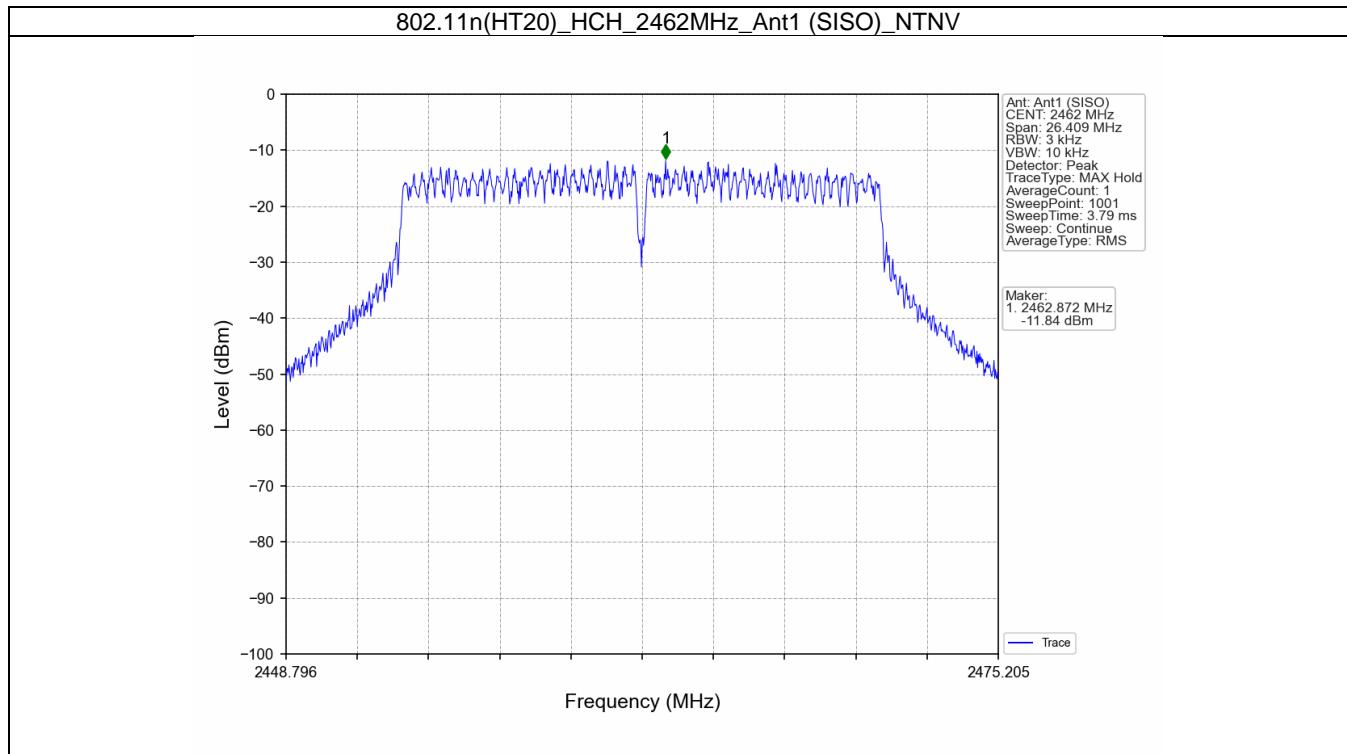

9.5 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test results

Reference:

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
802.11b	SISO	2412	1	6.33
		2437	1	6.33
		2462	1	6.54
802.11g	SISO	2412	1	4.09
		2437	1	4.12
		2462	1	3.47
802.11n (HT20)	SISO	2412	1	3.01
		2437	1	3.08
		2462	1	2.58

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Conducted spurious emission:


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	SISO	2412	1	6.54	-13.46	Pass
		2437	1	6.54	-13.46	Pass
		2462	1	6.54	-13.46	Pass
802.11g	SISO	2412	1	4.12	-15.88	Pass
		2437	1	4.12	-15.88	Pass
		2462	1	4.12	-15.88	Pass
802.11n (HT20)	SISO	2412	1	3.08	-16.92	Pass
		2437	1	3.08	-16.92	Pass
		2462	1	3.08	-16.92	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


Test Graphs


Reference


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

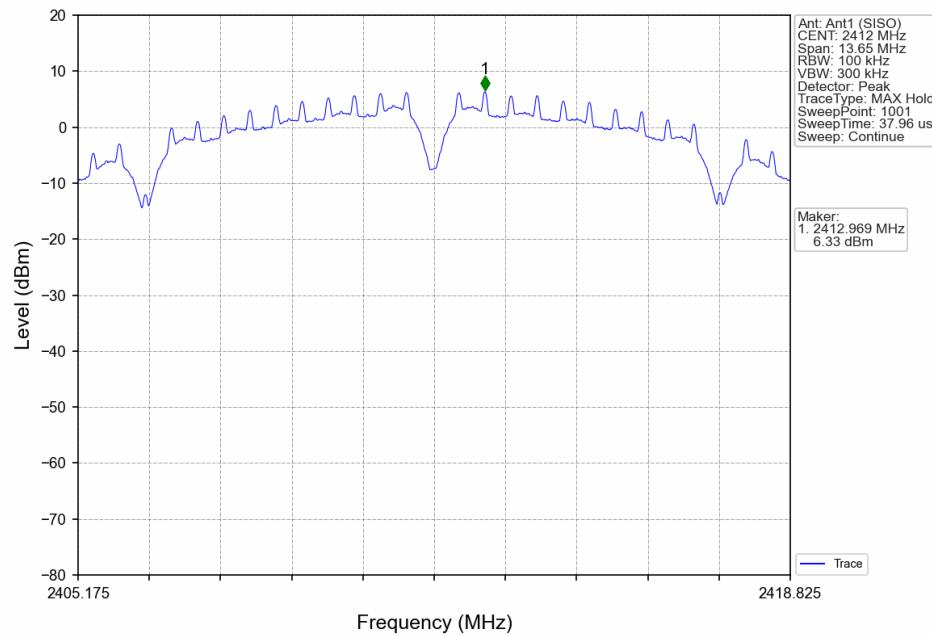




802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

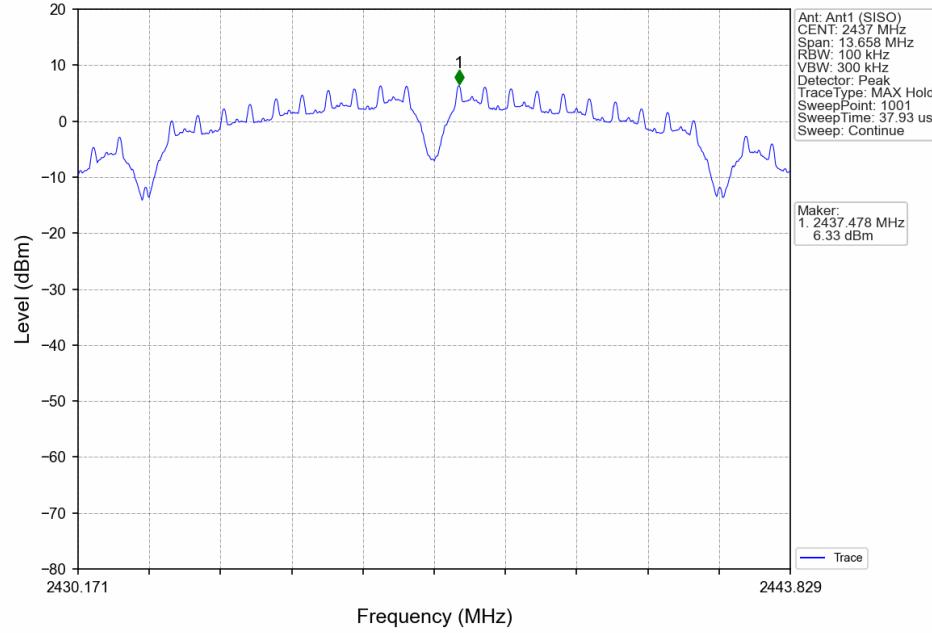


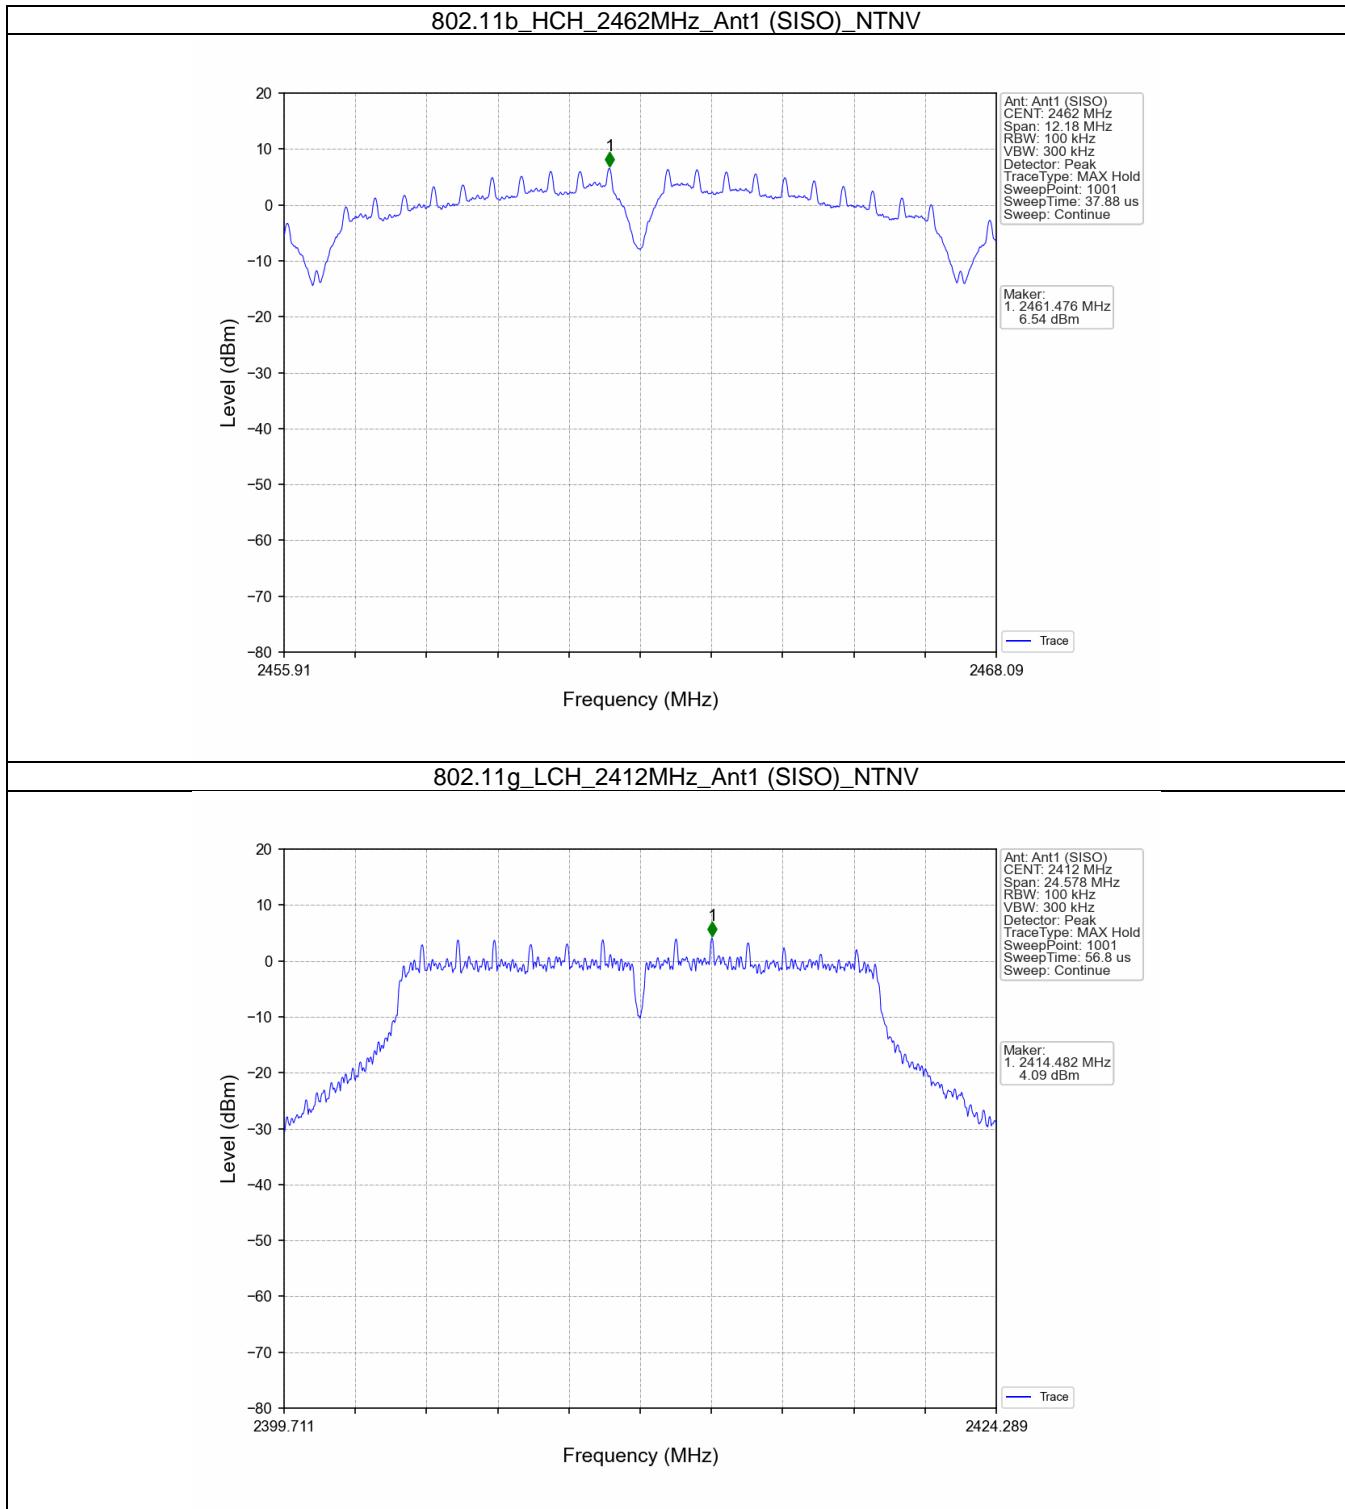

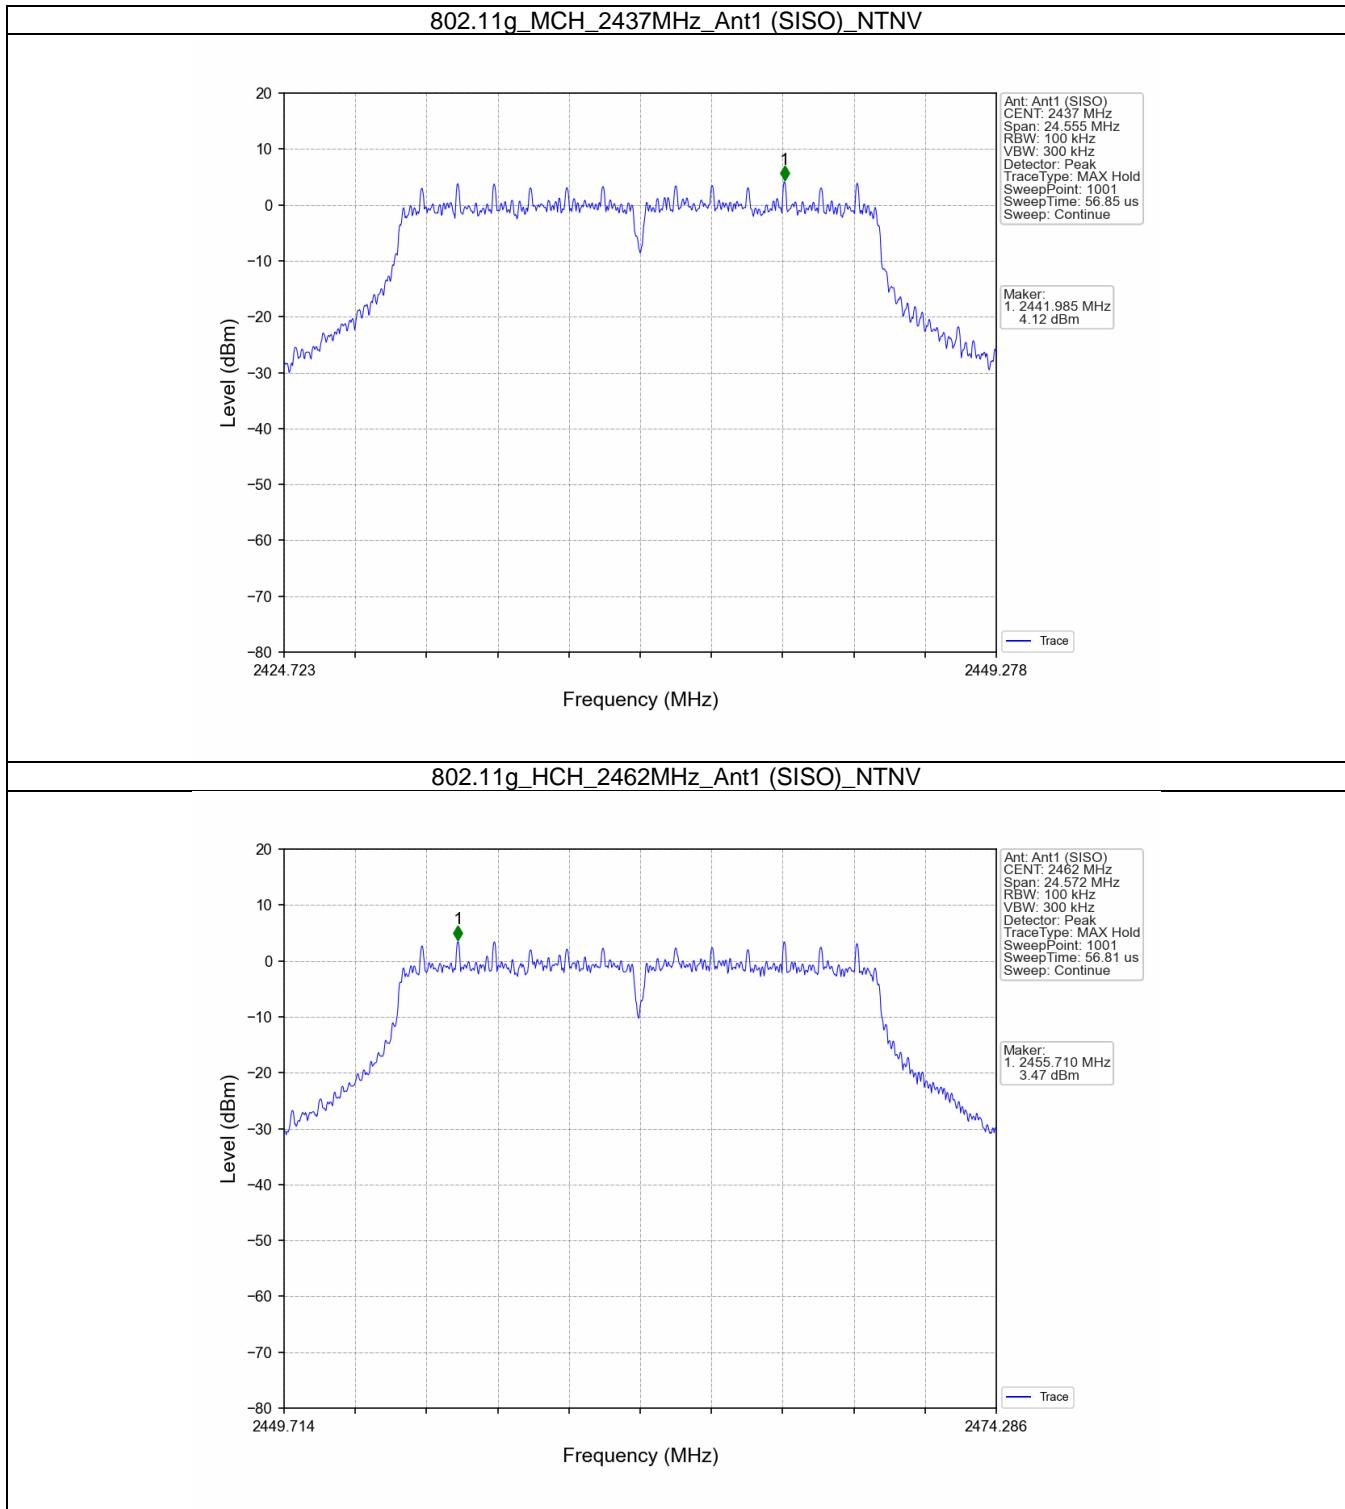


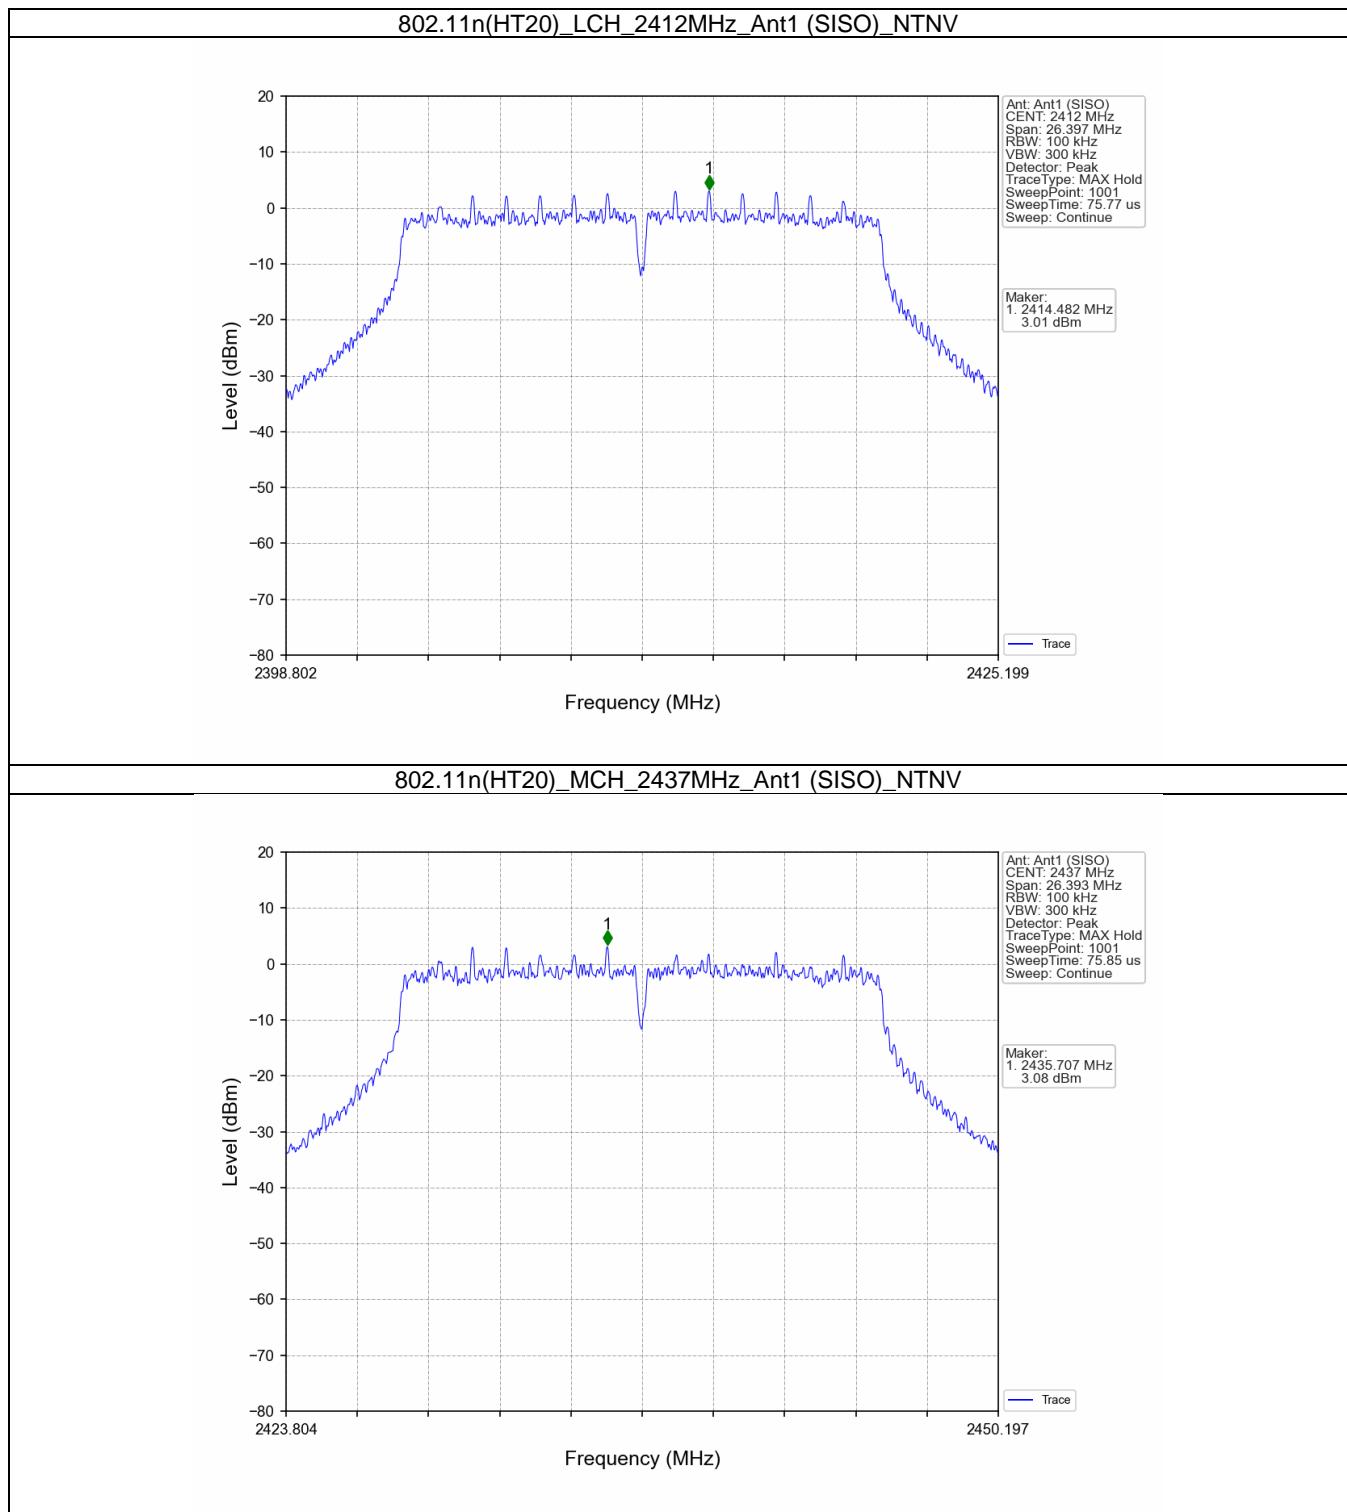

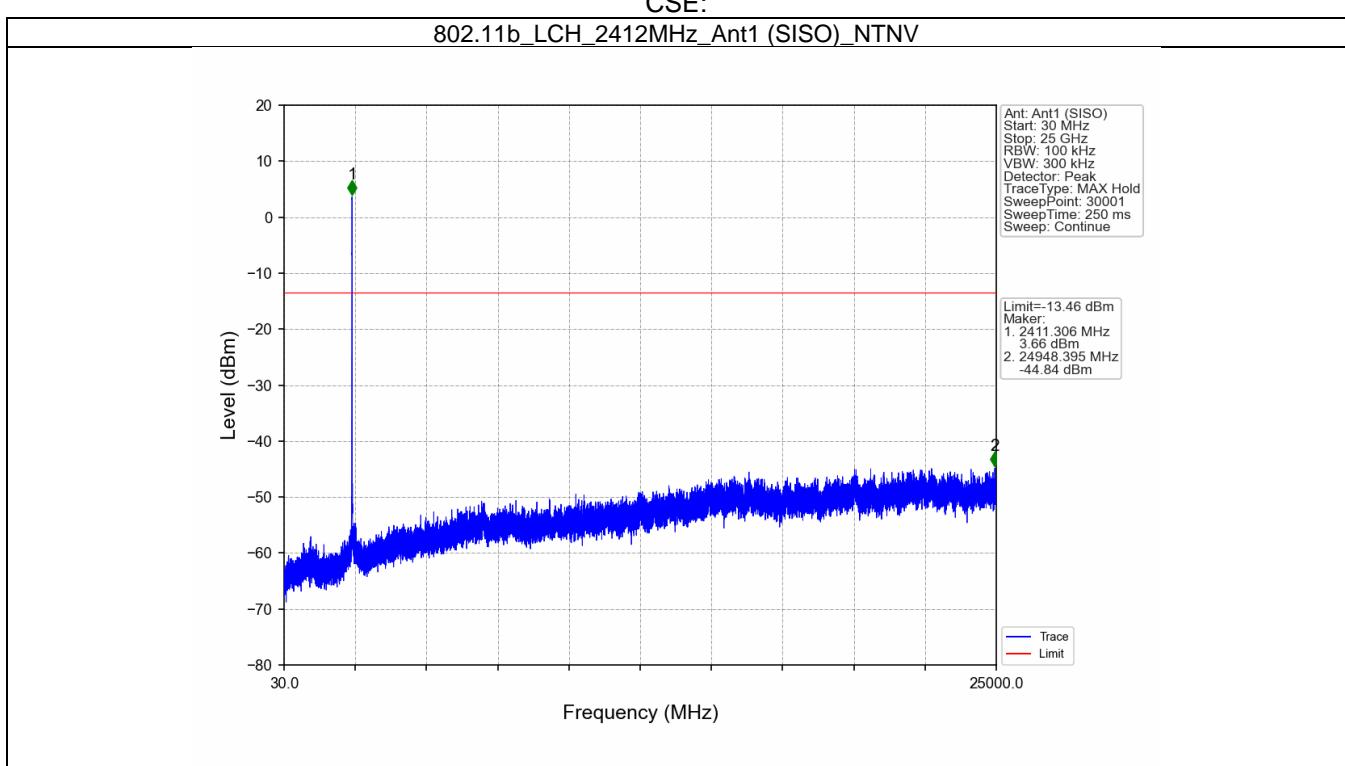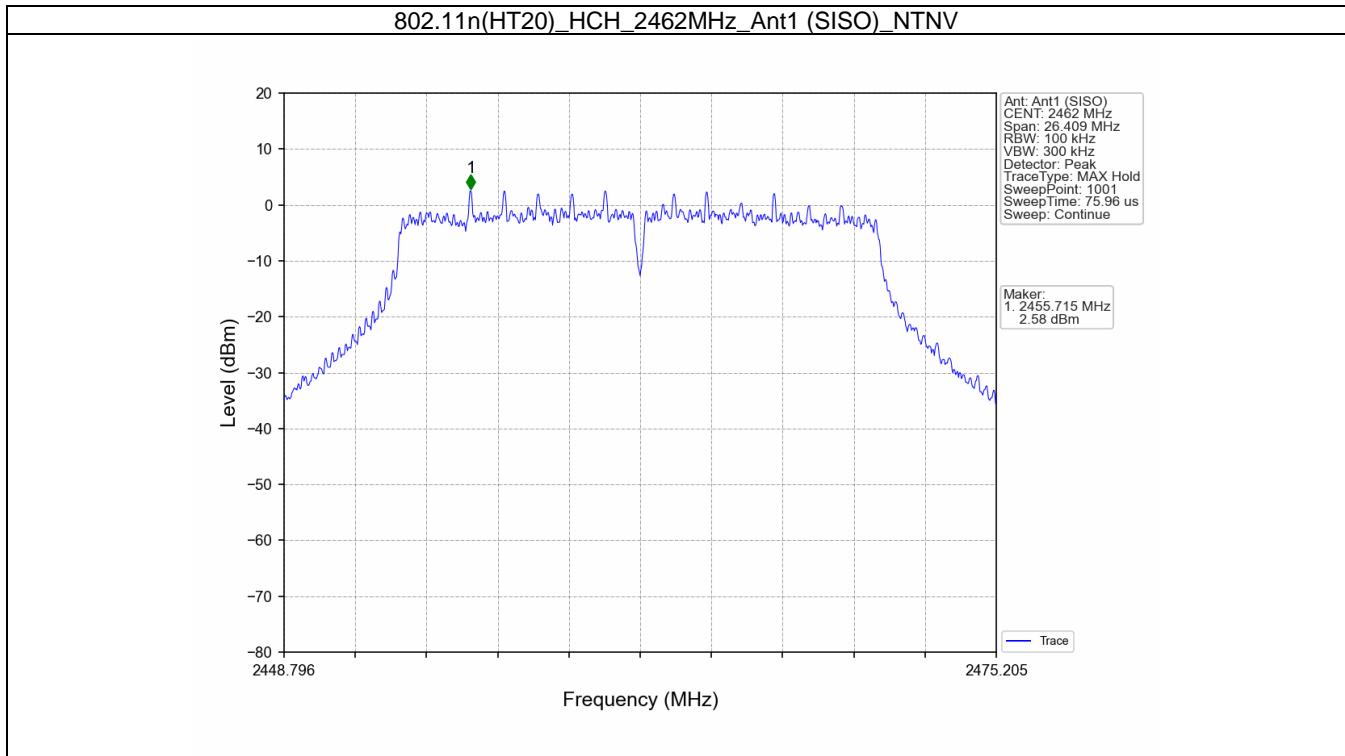


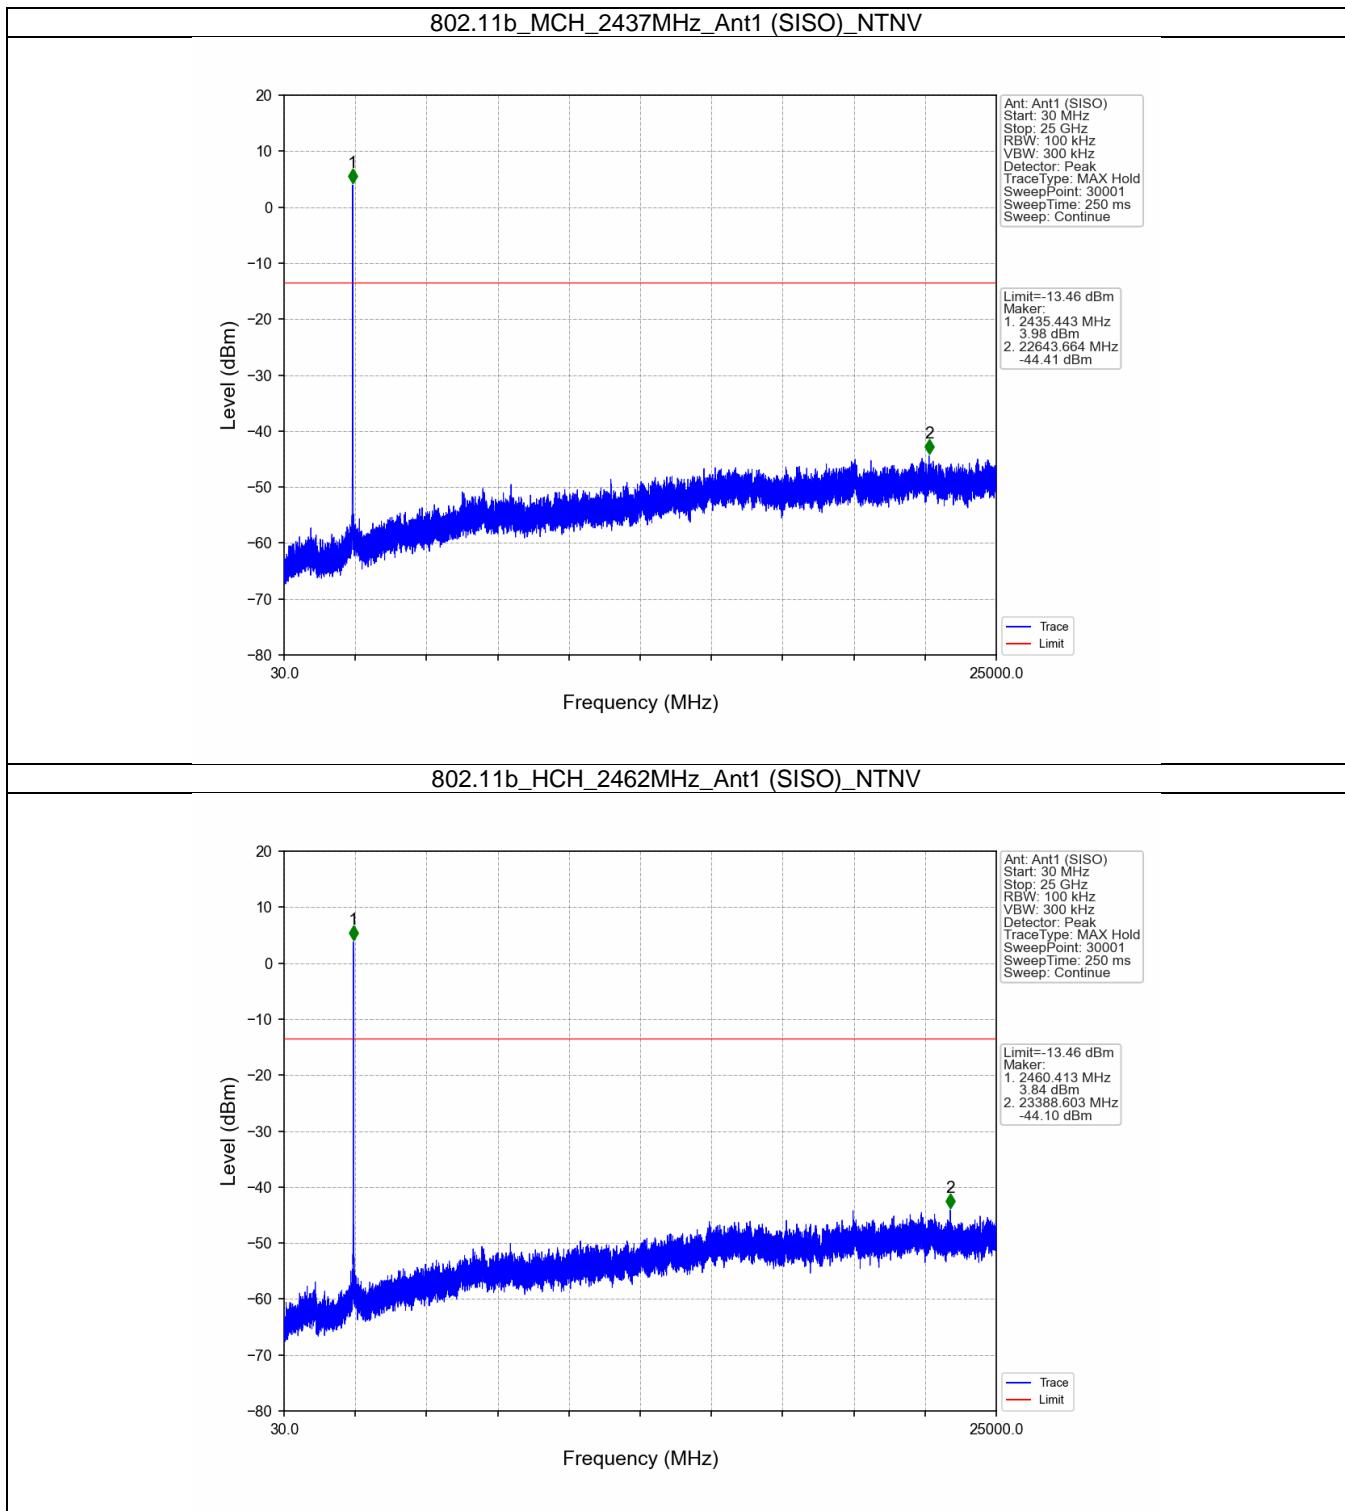



802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

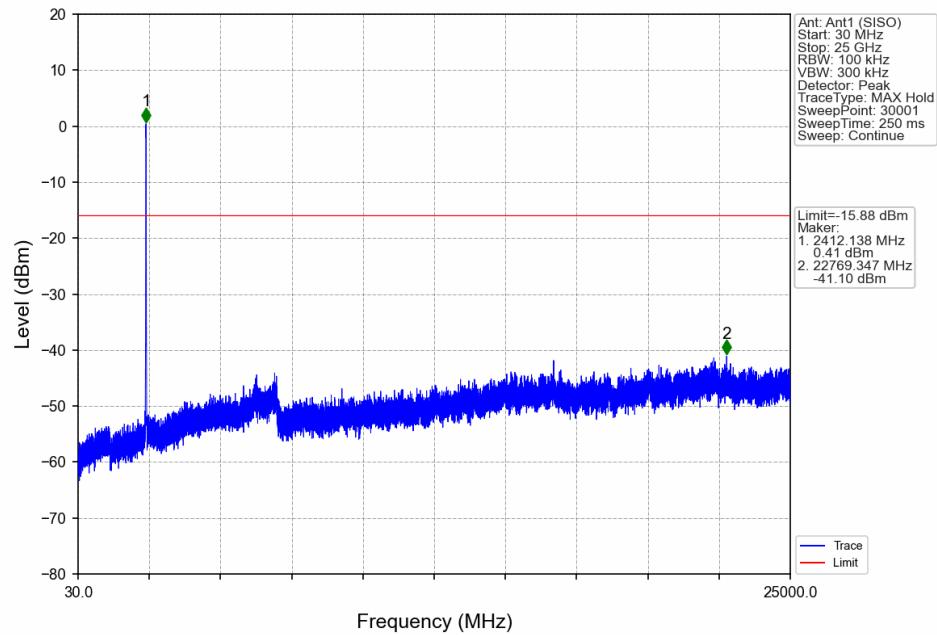

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

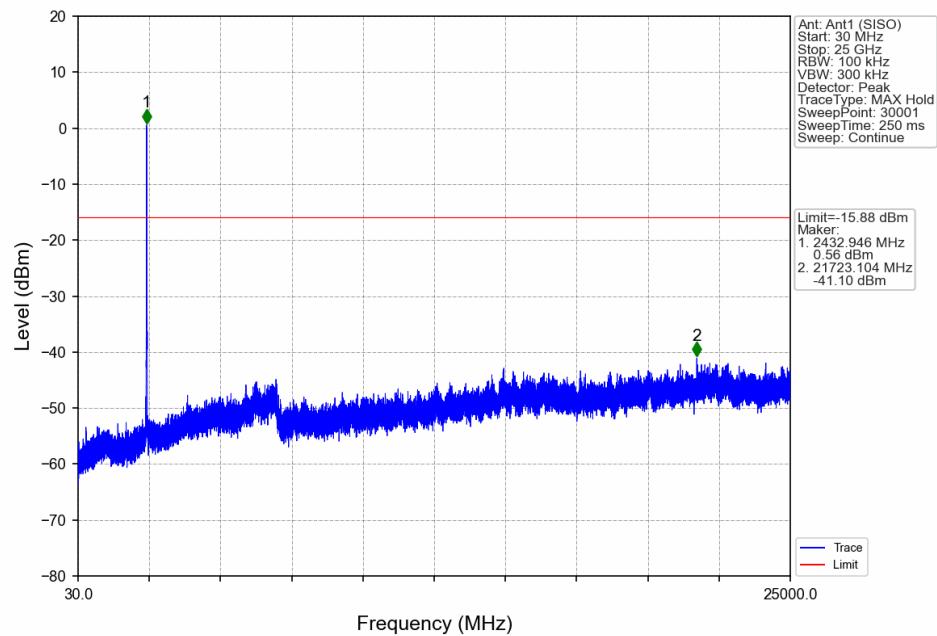

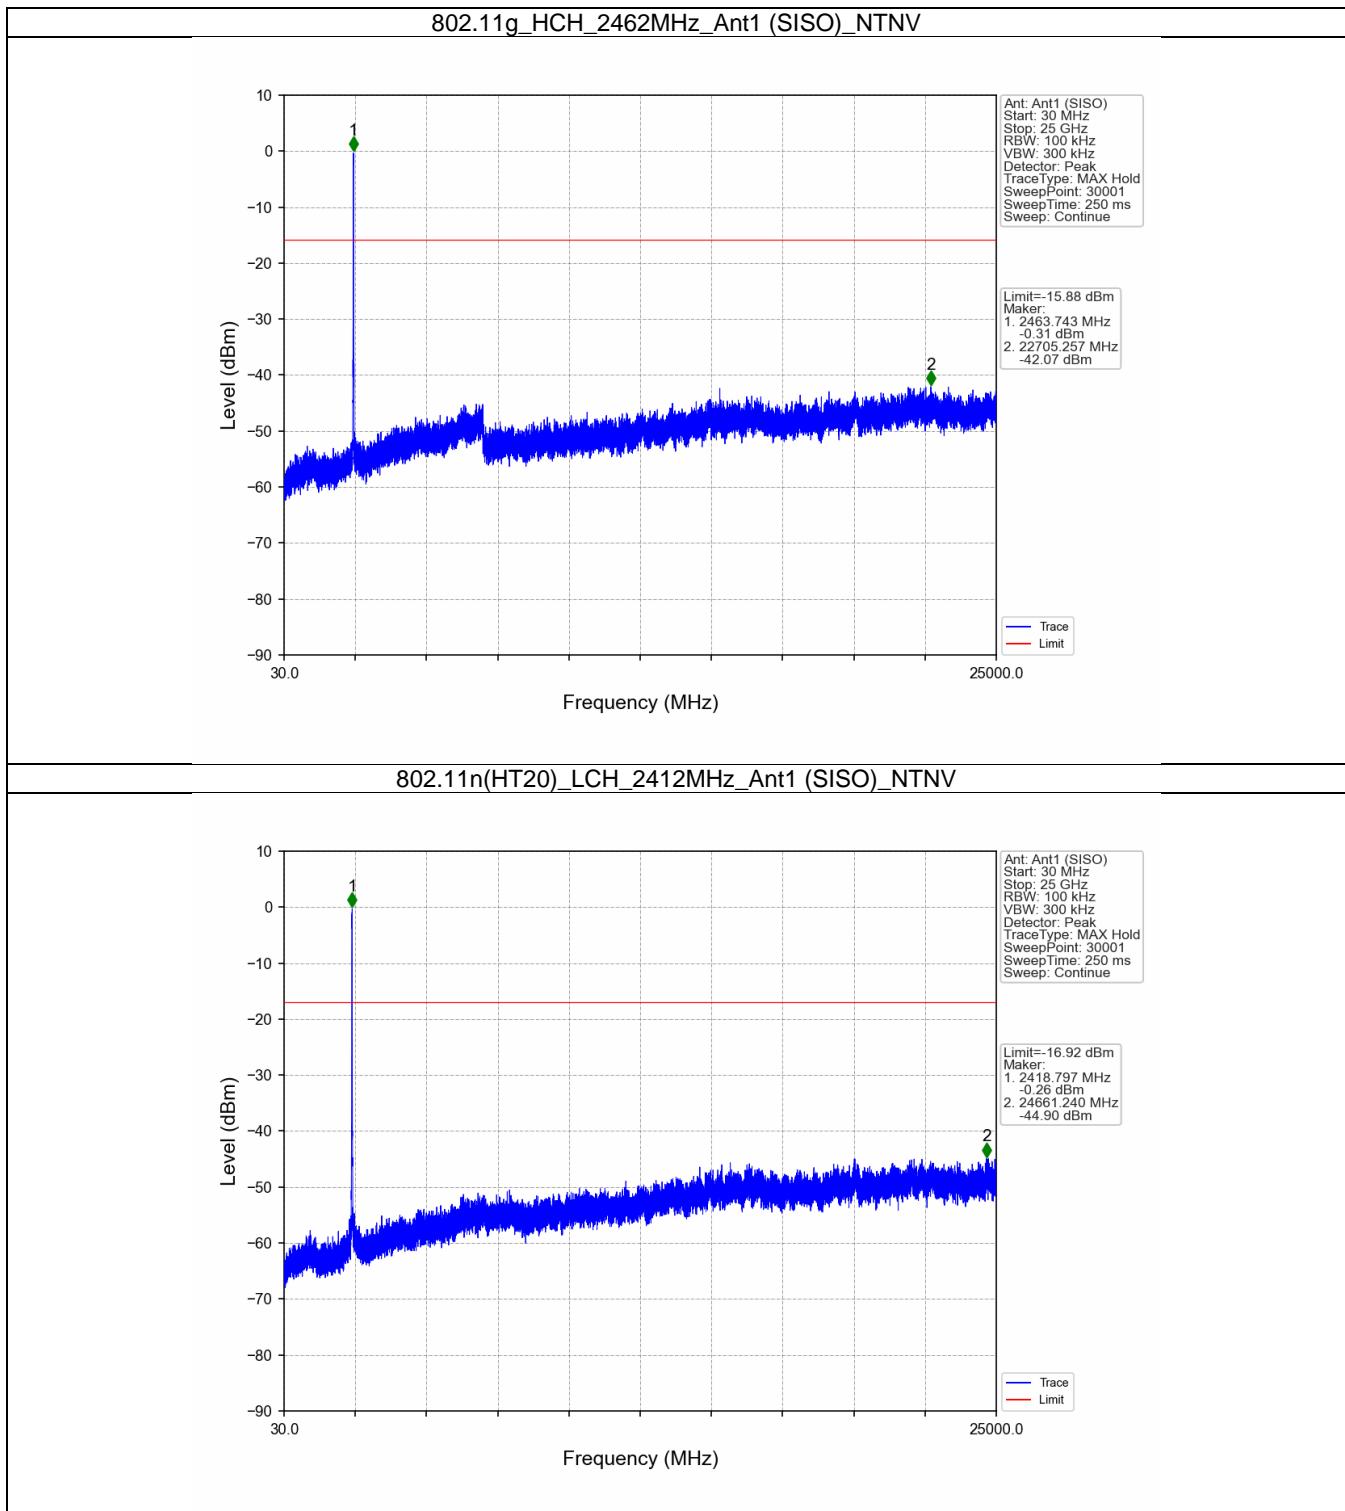

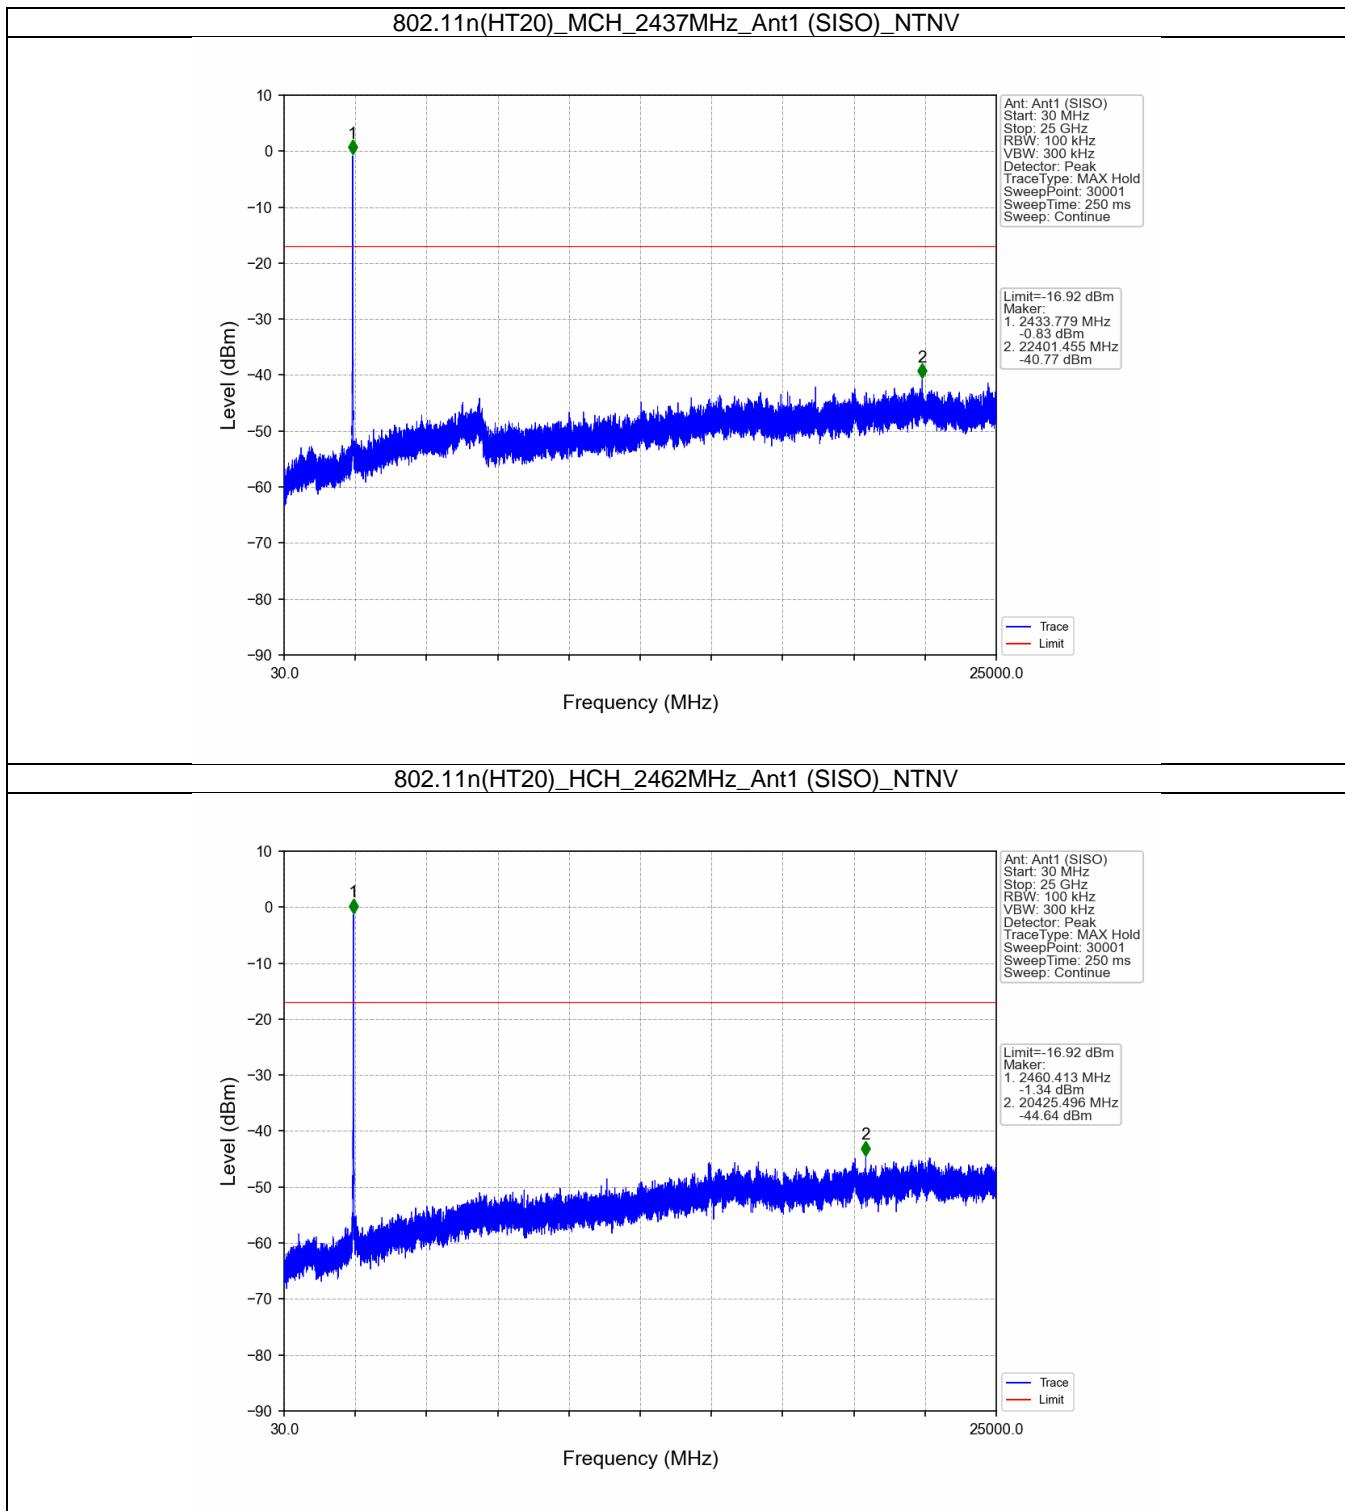

9.6 Band edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.


Frequency Range MHz	Limit (dBc)
30-25000	-20


Test results


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	SISO	2412	1	6.54	-13.46	Pass
		2437	1	6.54	-13.46	Pass
		2462	1	6.54	-13.46	Pass
802.11g	SISO	2412	1	4.12	-15.88	Pass
		2437	1	4.12	-15.88	Pass
		2462	1	4.12	-15.88	Pass
802.11n (HT20)	SISO	2412	1	3.08	-16.92	Pass
		2437	1	3.08	-16.92	Pass
		2462	1	3.08	-16.92	Pass

Test Graphs

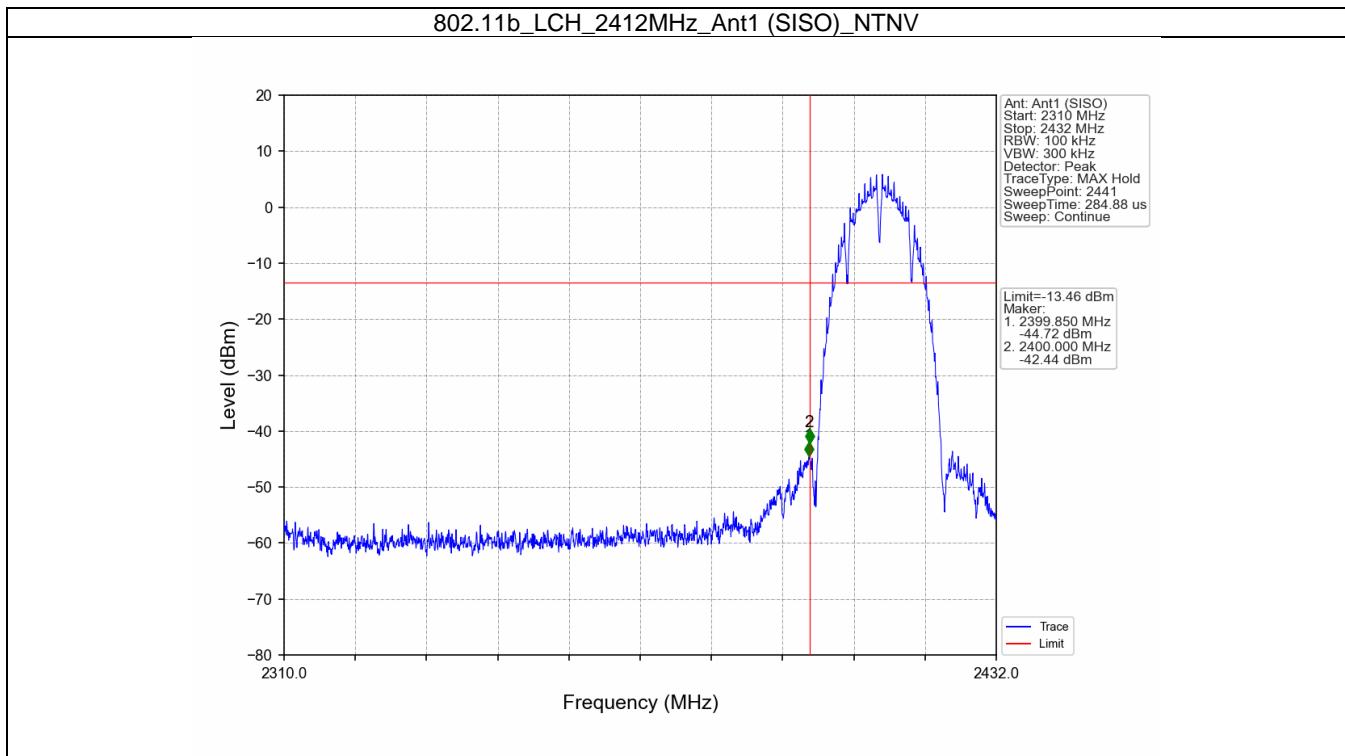

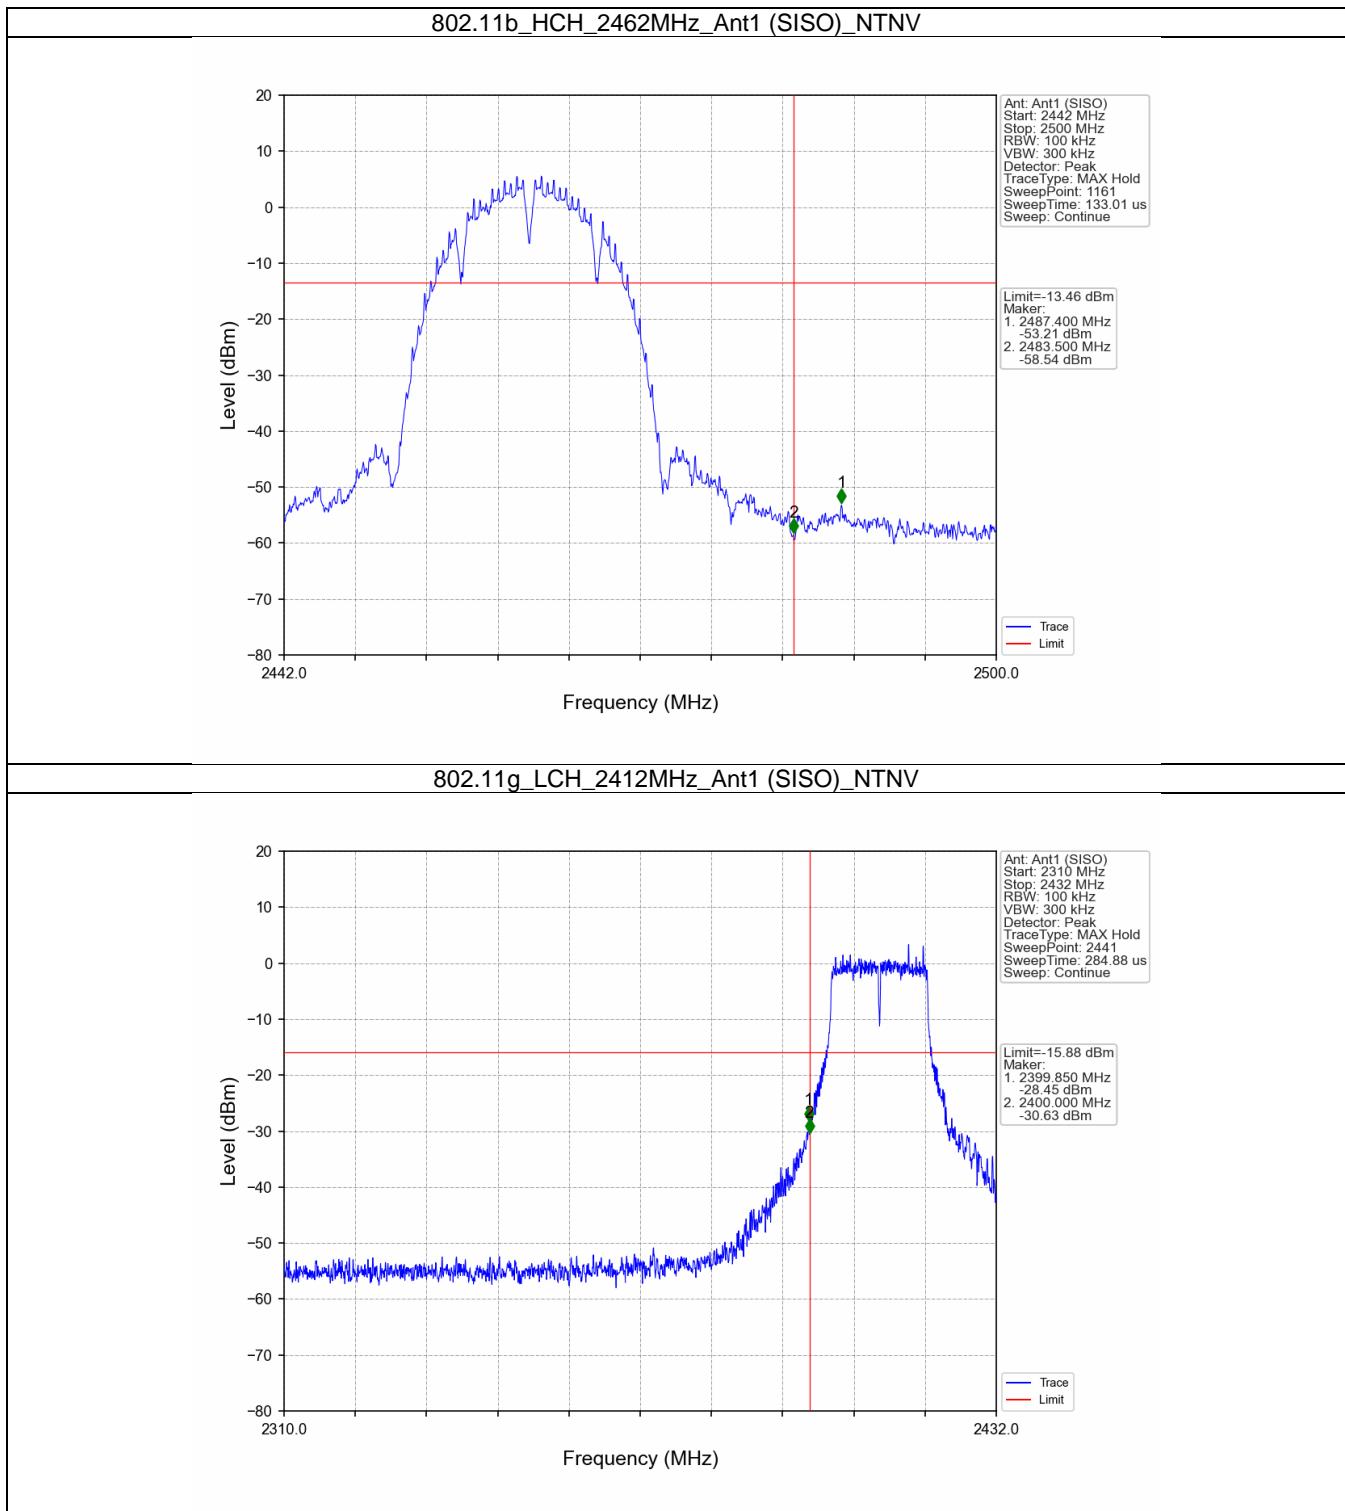

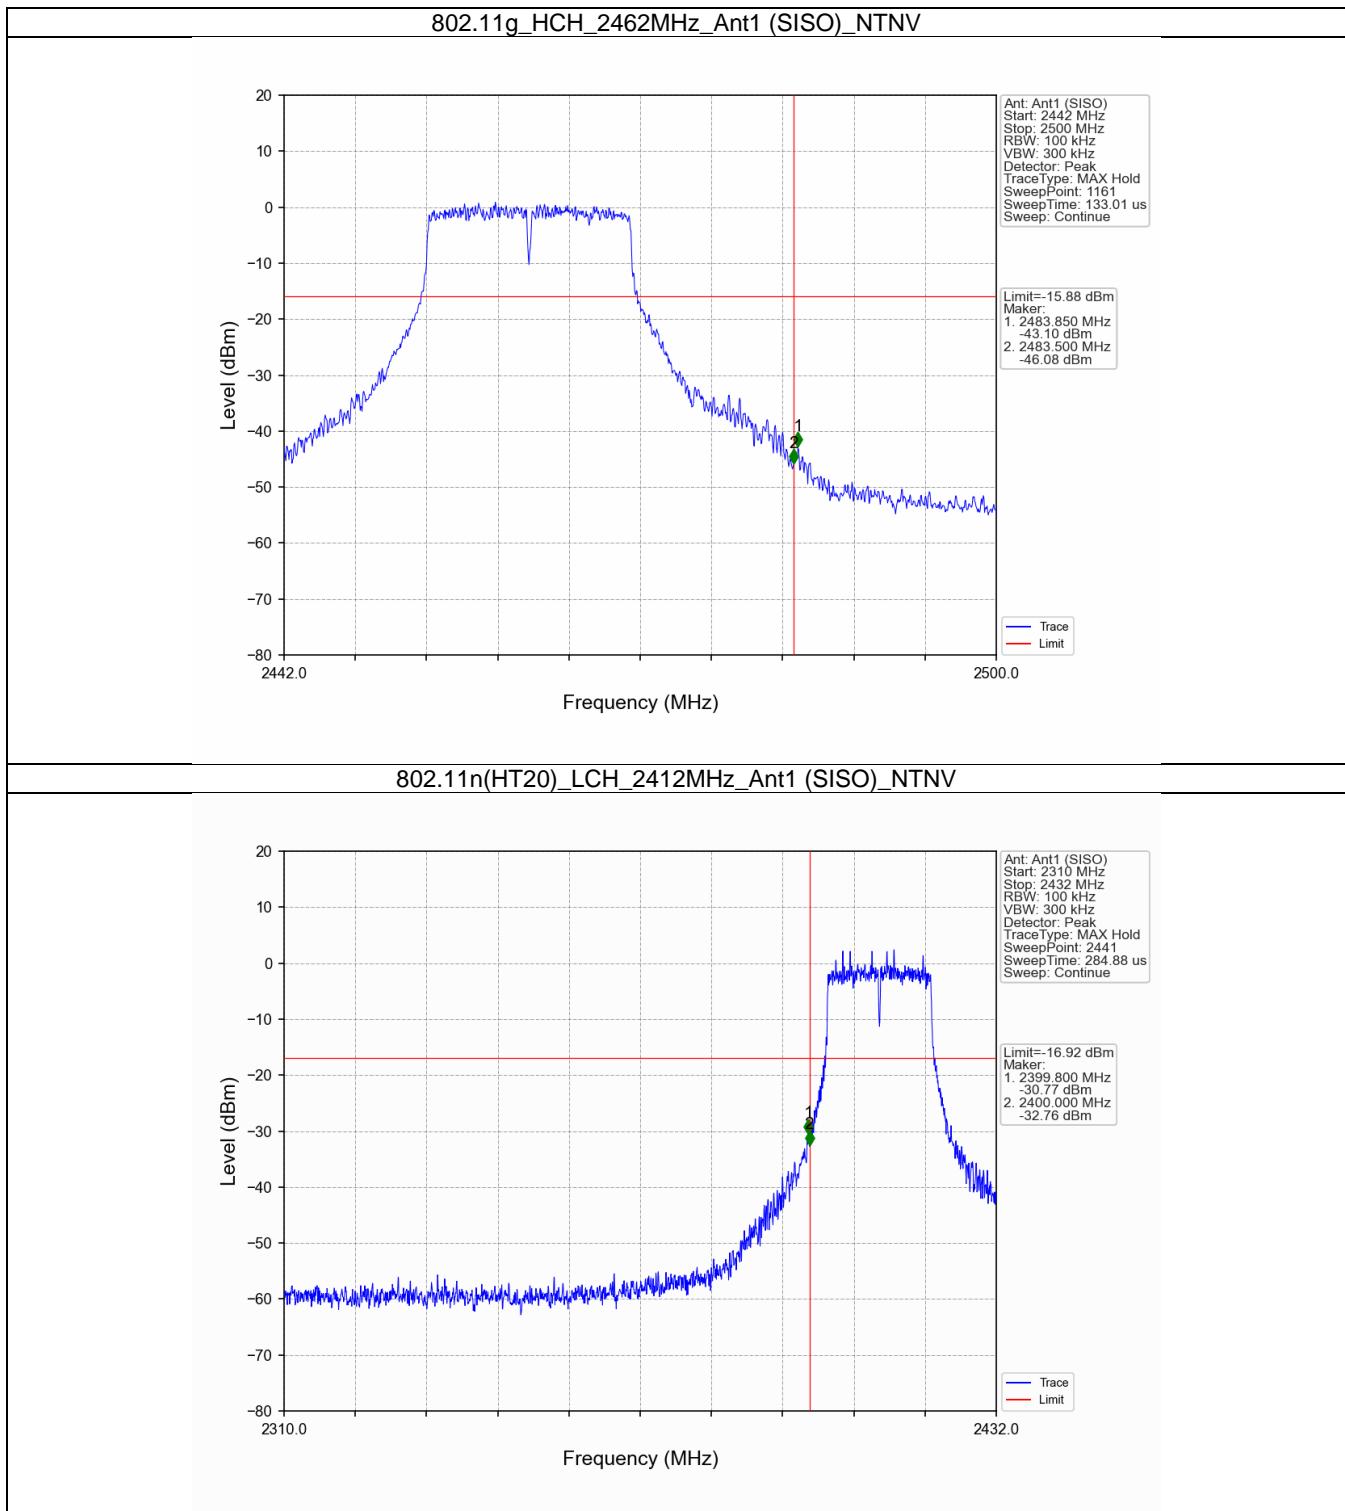

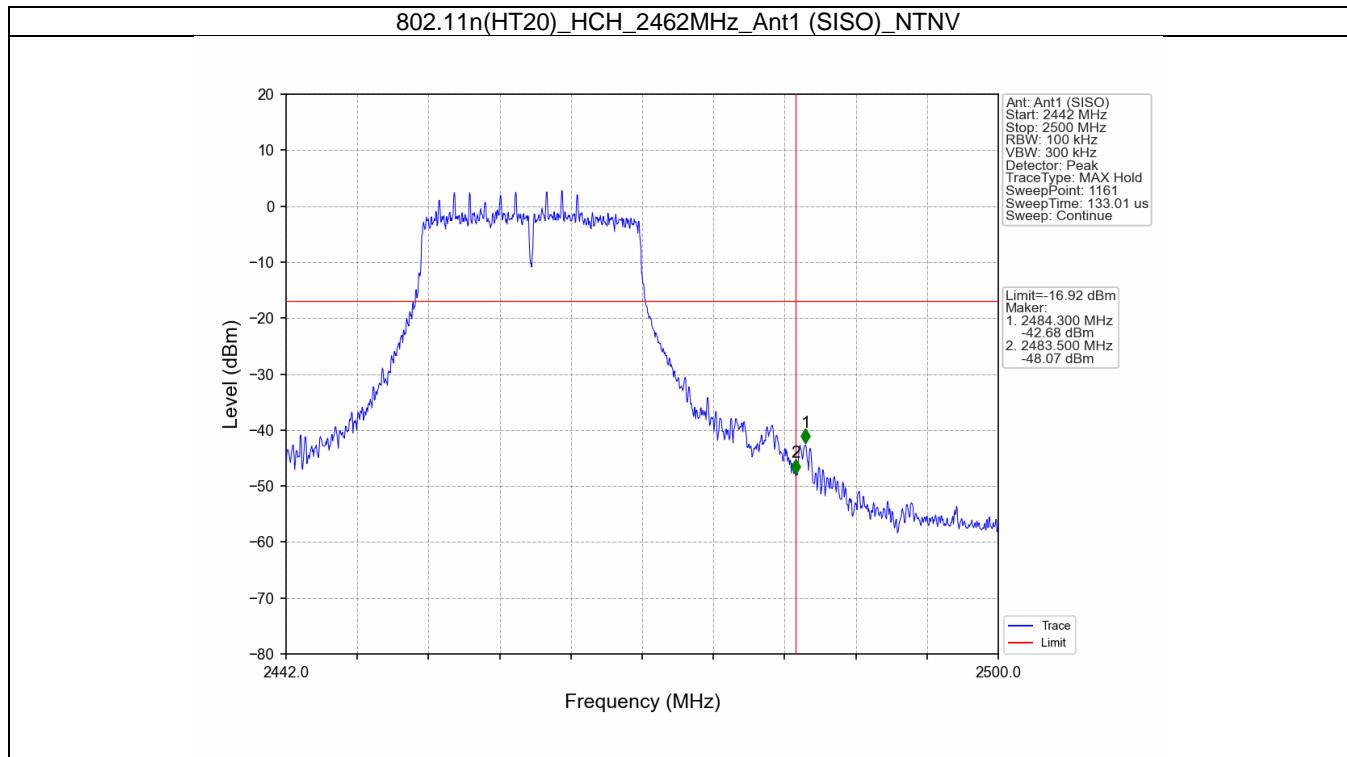

9.7 Spurious radiated emissions for transmitter

Test Method

1. The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 3) Procedures for average unwanted emissions measurements above 1000 MHz
 - a) RBW = 1MHz.
 - b) VBW \ [3 x RBW].
 - c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction

factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission(AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

Frequency MHz	Field Strength μV/m	Field Strength dBμV/m	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3m(dB\mu V/m) = Limit 300m(dB\mu V/m) + 40\log(300m/3m)$ (Below 30MHz)

Note 2: Limit $3m(dB\mu V/m) = Limit 30m(dB\mu V/m) + 40\log(30m/3m)$ (Below 30MHz)


Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Only the worst case (802.11g) test result is listed in the report.

Transmitting spurious emission test result as below:


Below 1G -Horizontal

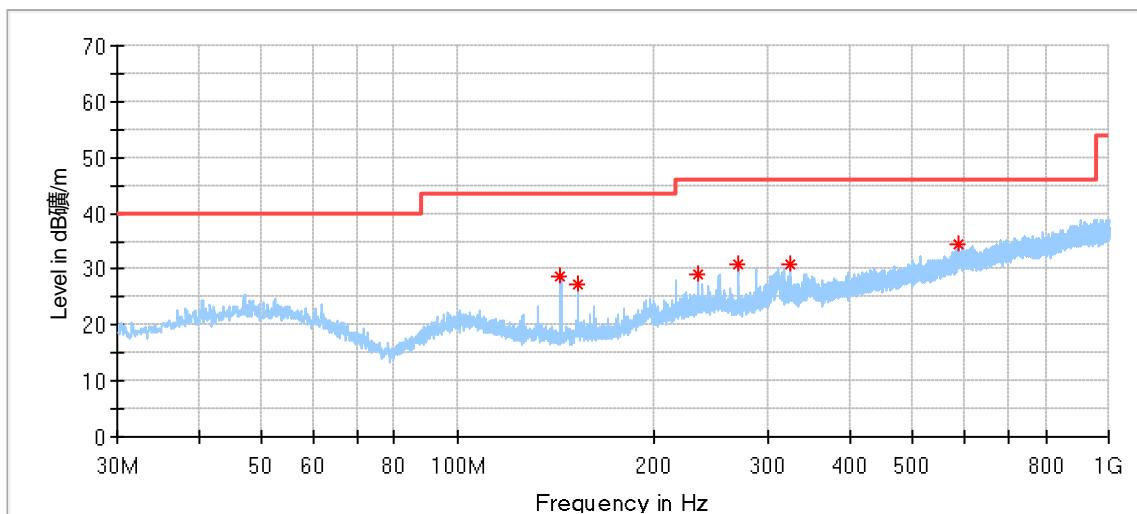

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
144.028889	28.77	43.50	14.73	200.0	H	313.0	12.53
152.974444	27.26	43.50	16.24	100.0	H	356.0	12.89
233.861667	28.96	46.00	17.04	100.0	H	7.0	16.95
269.859444*	30.86	46.00	15.14	100.0	H	356.0	17.77
324.125556*	31.02	46.00	14.98	100.0	H	152.0	19.24
588.881667	34.51	46.00	11.49	200.0	H	124.0	24.89


Below 1G - Vertical

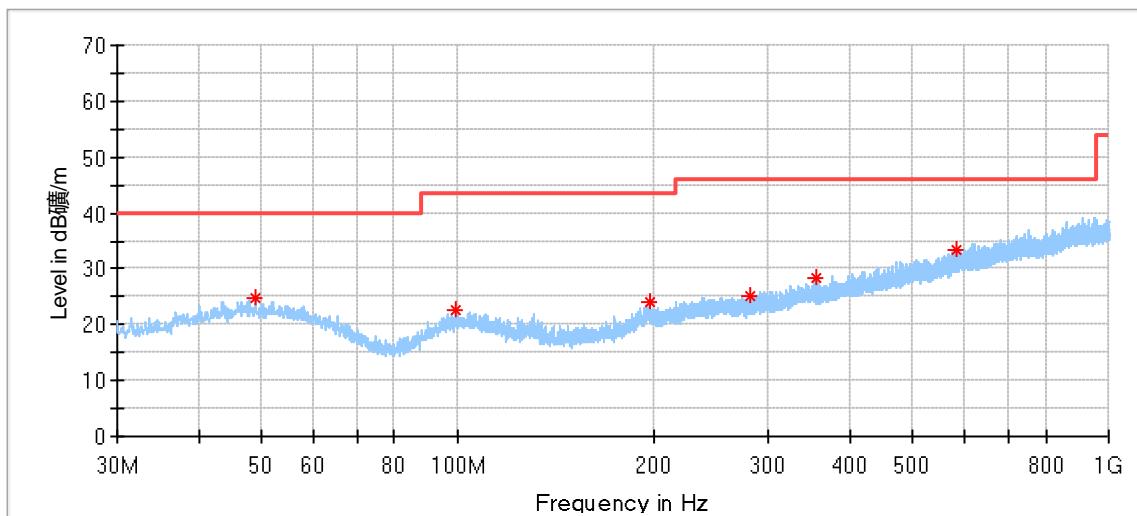

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.861111	24.83	40.00	15.17	200.0	V	341.0	18.29
99.570556	22.79	43.50	20.71	200.0	V	181.0	15.88
197.486667	24.02	43.50	19.48	100.0	V	19.0	16.27
280.637222*	25.24	46.00	20.76	100.0	V	61.0	18.02
354.788333	28.43	46.00	17.57	100.0	V	4.0	19.76
585.756111	33.36	46.00	12.64	200.0	V	33.0	24.76

Low channel 2412MHz - Horizontal

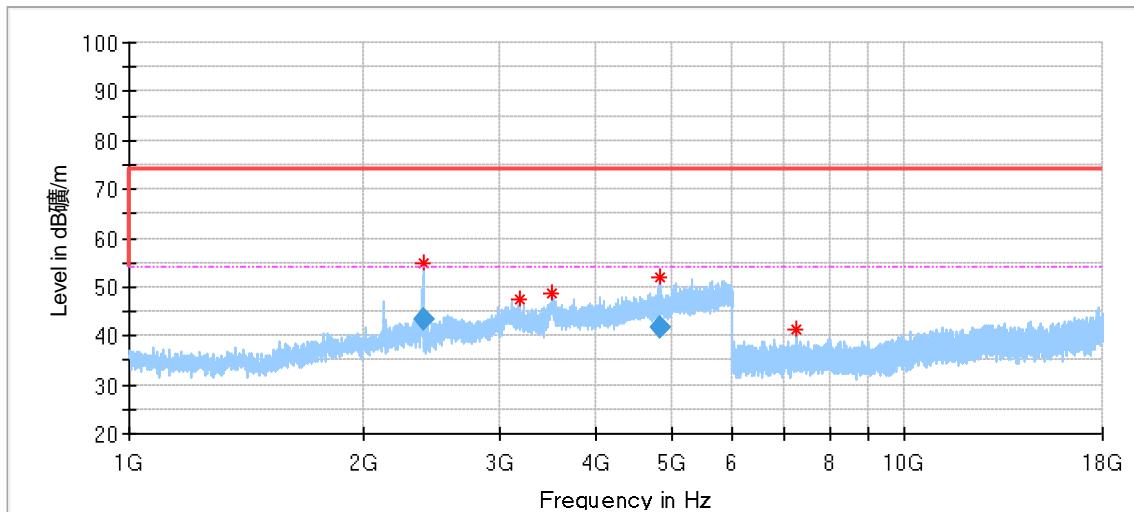


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2394.000000	55.01	74.00	18.99	150.0	H	151.0	-2.41	---
3188.000000	47.51	74.00	26.49	150.0	H	338.0	0.65	---
3502.000000	48.60	74.00	25.40	150.0	H	84.0	4.39	---
4821.500000*	52.13	74.00	21.87	150.0	H	45.0	5.02	---
7255.500000*	41.39	74.00	32.61	150.0	H	304.0	6.47	---

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2394.000000	43.41	54.00	10.59	150.0	H	151.0	-2.41	---
4821.500000*	41.86	54.00	12.14	150.0	H	45.0	5.02	---

Low channel 2412MHz - Vertical

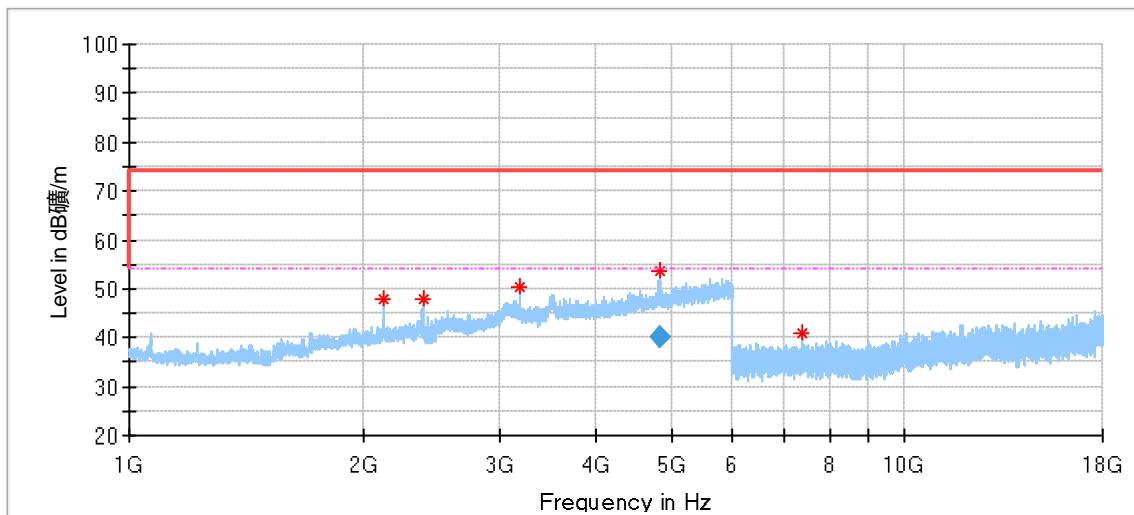
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2124.000000	47.87	74.00	26.14	150.0	V	88.0	-3.73	---
2391.500000	47.97	74.00	26.03	150.0	V	170.0	-2.43	---
3192.500000	50.48	74.00	23.52	150.0	V	170.0	0.62	---
4830.500000*	53.66	74.00	20.34	150.0	V	16.0	5.04	---
7392.000000*	41.11	74.00	32.89	150.0	V	94.0	6.51	---

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
4830.500000*	40.12	54.00	13.88	150.0	V	16.0	5.04	---

Middle channel 2437MHz – Horizontal

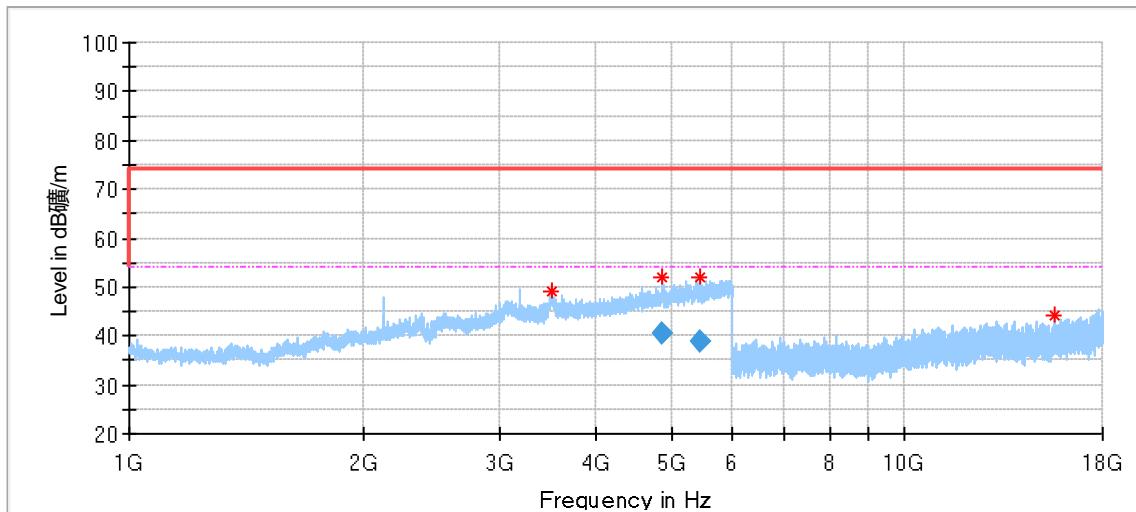
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3501.500000	49.29	74.00	24.71	150.0	H	23.0	4.41
4872.500000*	52.14	74.00	21.86	150.0	H	34.0	5.10
5455.500000*	52.17	74.00	21.83	150.0	H	341.0	6.81
15609.000000*	44.21	74.00	29.79	150.0	H	70.0	15.18

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4872.500000*	40.31	54.00	13.69	150.0	H	34.0	5.10
5455.500000*	38.69	54.00	15.31	150.0	H	341.0	6.81

Middle channel 2437MHz – Vertical

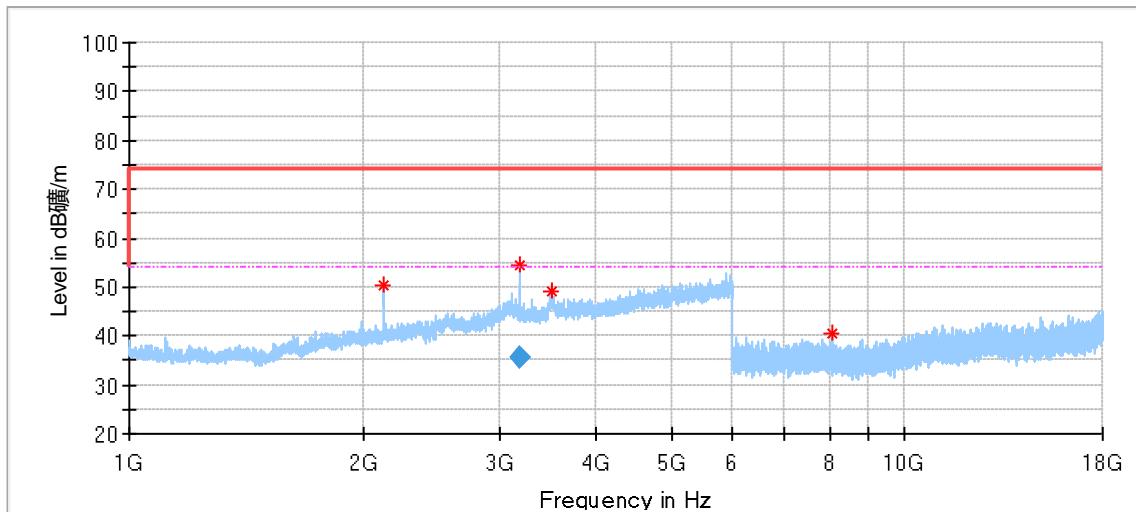
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2125.000000	50.27	74.00	23.73	150.0	V	157.0	-3.71
3195.000000	54.49	74.00	19.51	150.0	V	208.0	0.61
3504.500000	49.22	74.00	24.78	150.0	V	44.0	4.26
8084.500000*	40.58	74.00	33.42	150.0	V	266.0	7.49

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3195.000000	35.69	54.00	18.31	150.0	V	208.0	0.61

High channel 2462MHz – Horizontal

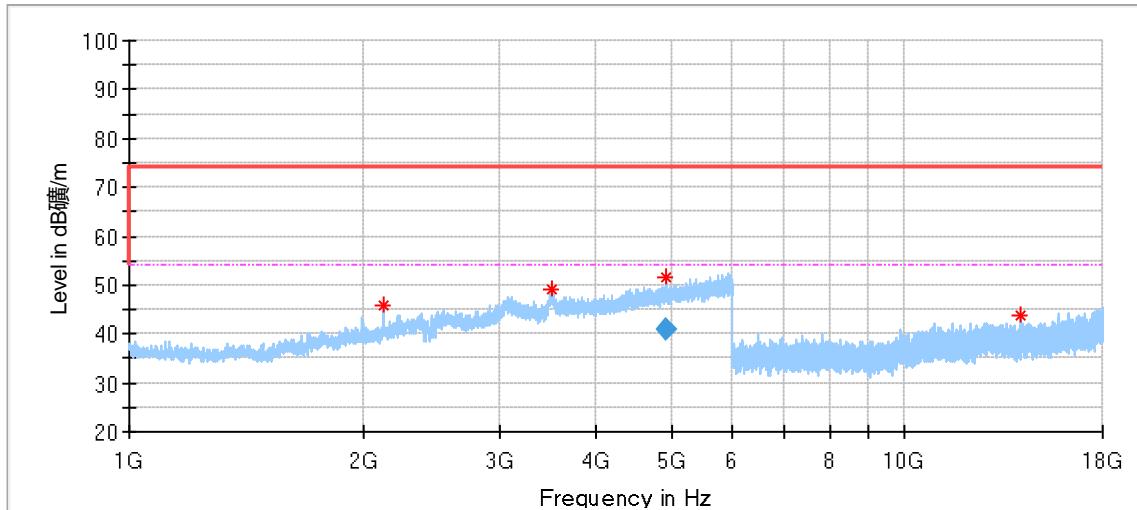
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2128.500000	46.04	74.00	27.96	150.0	H	244.0	-3.63
3504.000000	49.30	74.00	24.70	150.0	H	150.0	4.29
4918.500000*	51.60	74.00	22.40	150.0	H	37.0	5.09
14115.000000	43.69	74.00	30.31	150.0	H	240.0	12.77

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4918.500000*	41.02	54.00	12.98	150.0	H	37.0	5.09

High channel 2462MHz – Vertical

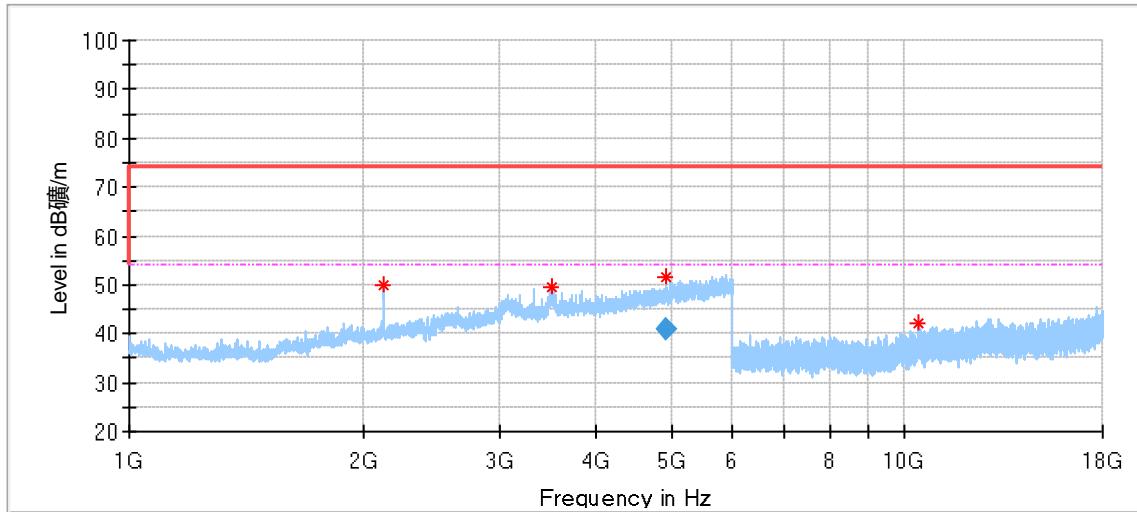

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2127.000000	49.98	74.00	24.02	150.0	V	152.0	-3.66
3502.500000	49.67	74.00	24.33	150.0	V	111.0	4.36
4924.500000*	51.64	74.00	22.36	150.0	V	9.0	5.12
10395.500000	41.99	74.00	32.01	150.0	V	180.0	10.14

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.500000*	40.96	54.00	13.04	150.0	V	9.0	5.12

Remark:

- (1) ** means the emission(s) appear within the restrict bands shall follow the requirement of § 15.205.
- (2) Data of measurement within frequency ranges 9kHz-30MHz and 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report,
- (3) Level= Reading Level + Correction Factor
- (4) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

Conducted Emission Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Cal interval (year)	Cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2024-5-19
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2024-5-20
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2024-5-19
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version 10.35.02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	3	2025-10-15

Radiated Emission Test, SAC-3 #1

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Cal interval (year)	Cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2024-5-20
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2024-8-7
Pre-amplifier	Rohde & Schwarz	SCU 18	68-4-29-14-001	102230	1	2024-5-19
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-001	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test, SAC-3 #2

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Cal interval (year)	Cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2024-3-5
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2024-4-26
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2024-5-19
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2024-5-19
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2024-7-11
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Conducted Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Cal interval (year)	Cal. due date
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2024-5-19
RF Switch Module	Rohde & Schwarz	OSP120/OS P-B157W	68-4-93-14-003	101226/100929	1	2024-5-20
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission in new shielding room (68-4-90-19-005) 150kHz-30MHz (for test using AMN ENV216)	3.33dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.08dB; Vertical: 5.09dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) above 18000MHz	Horizontal: 3.14dB; Vertical: 3.12dB
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10^{-8} or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

---END OF REPORT---