

# Product Specification

## A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >20%

Impedance 50 Ohm

Gain 0.59DBi

Polarization mode: linear polarization

## B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.4 white

Connector Type : NO

## C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

# Test Equipment & Conditions


## 1. Network Analyzers :

Agilent 8753D 5071B


## 2. Communications Test Set:

Agilent E5515C


## 3. 3D Chamber Test System

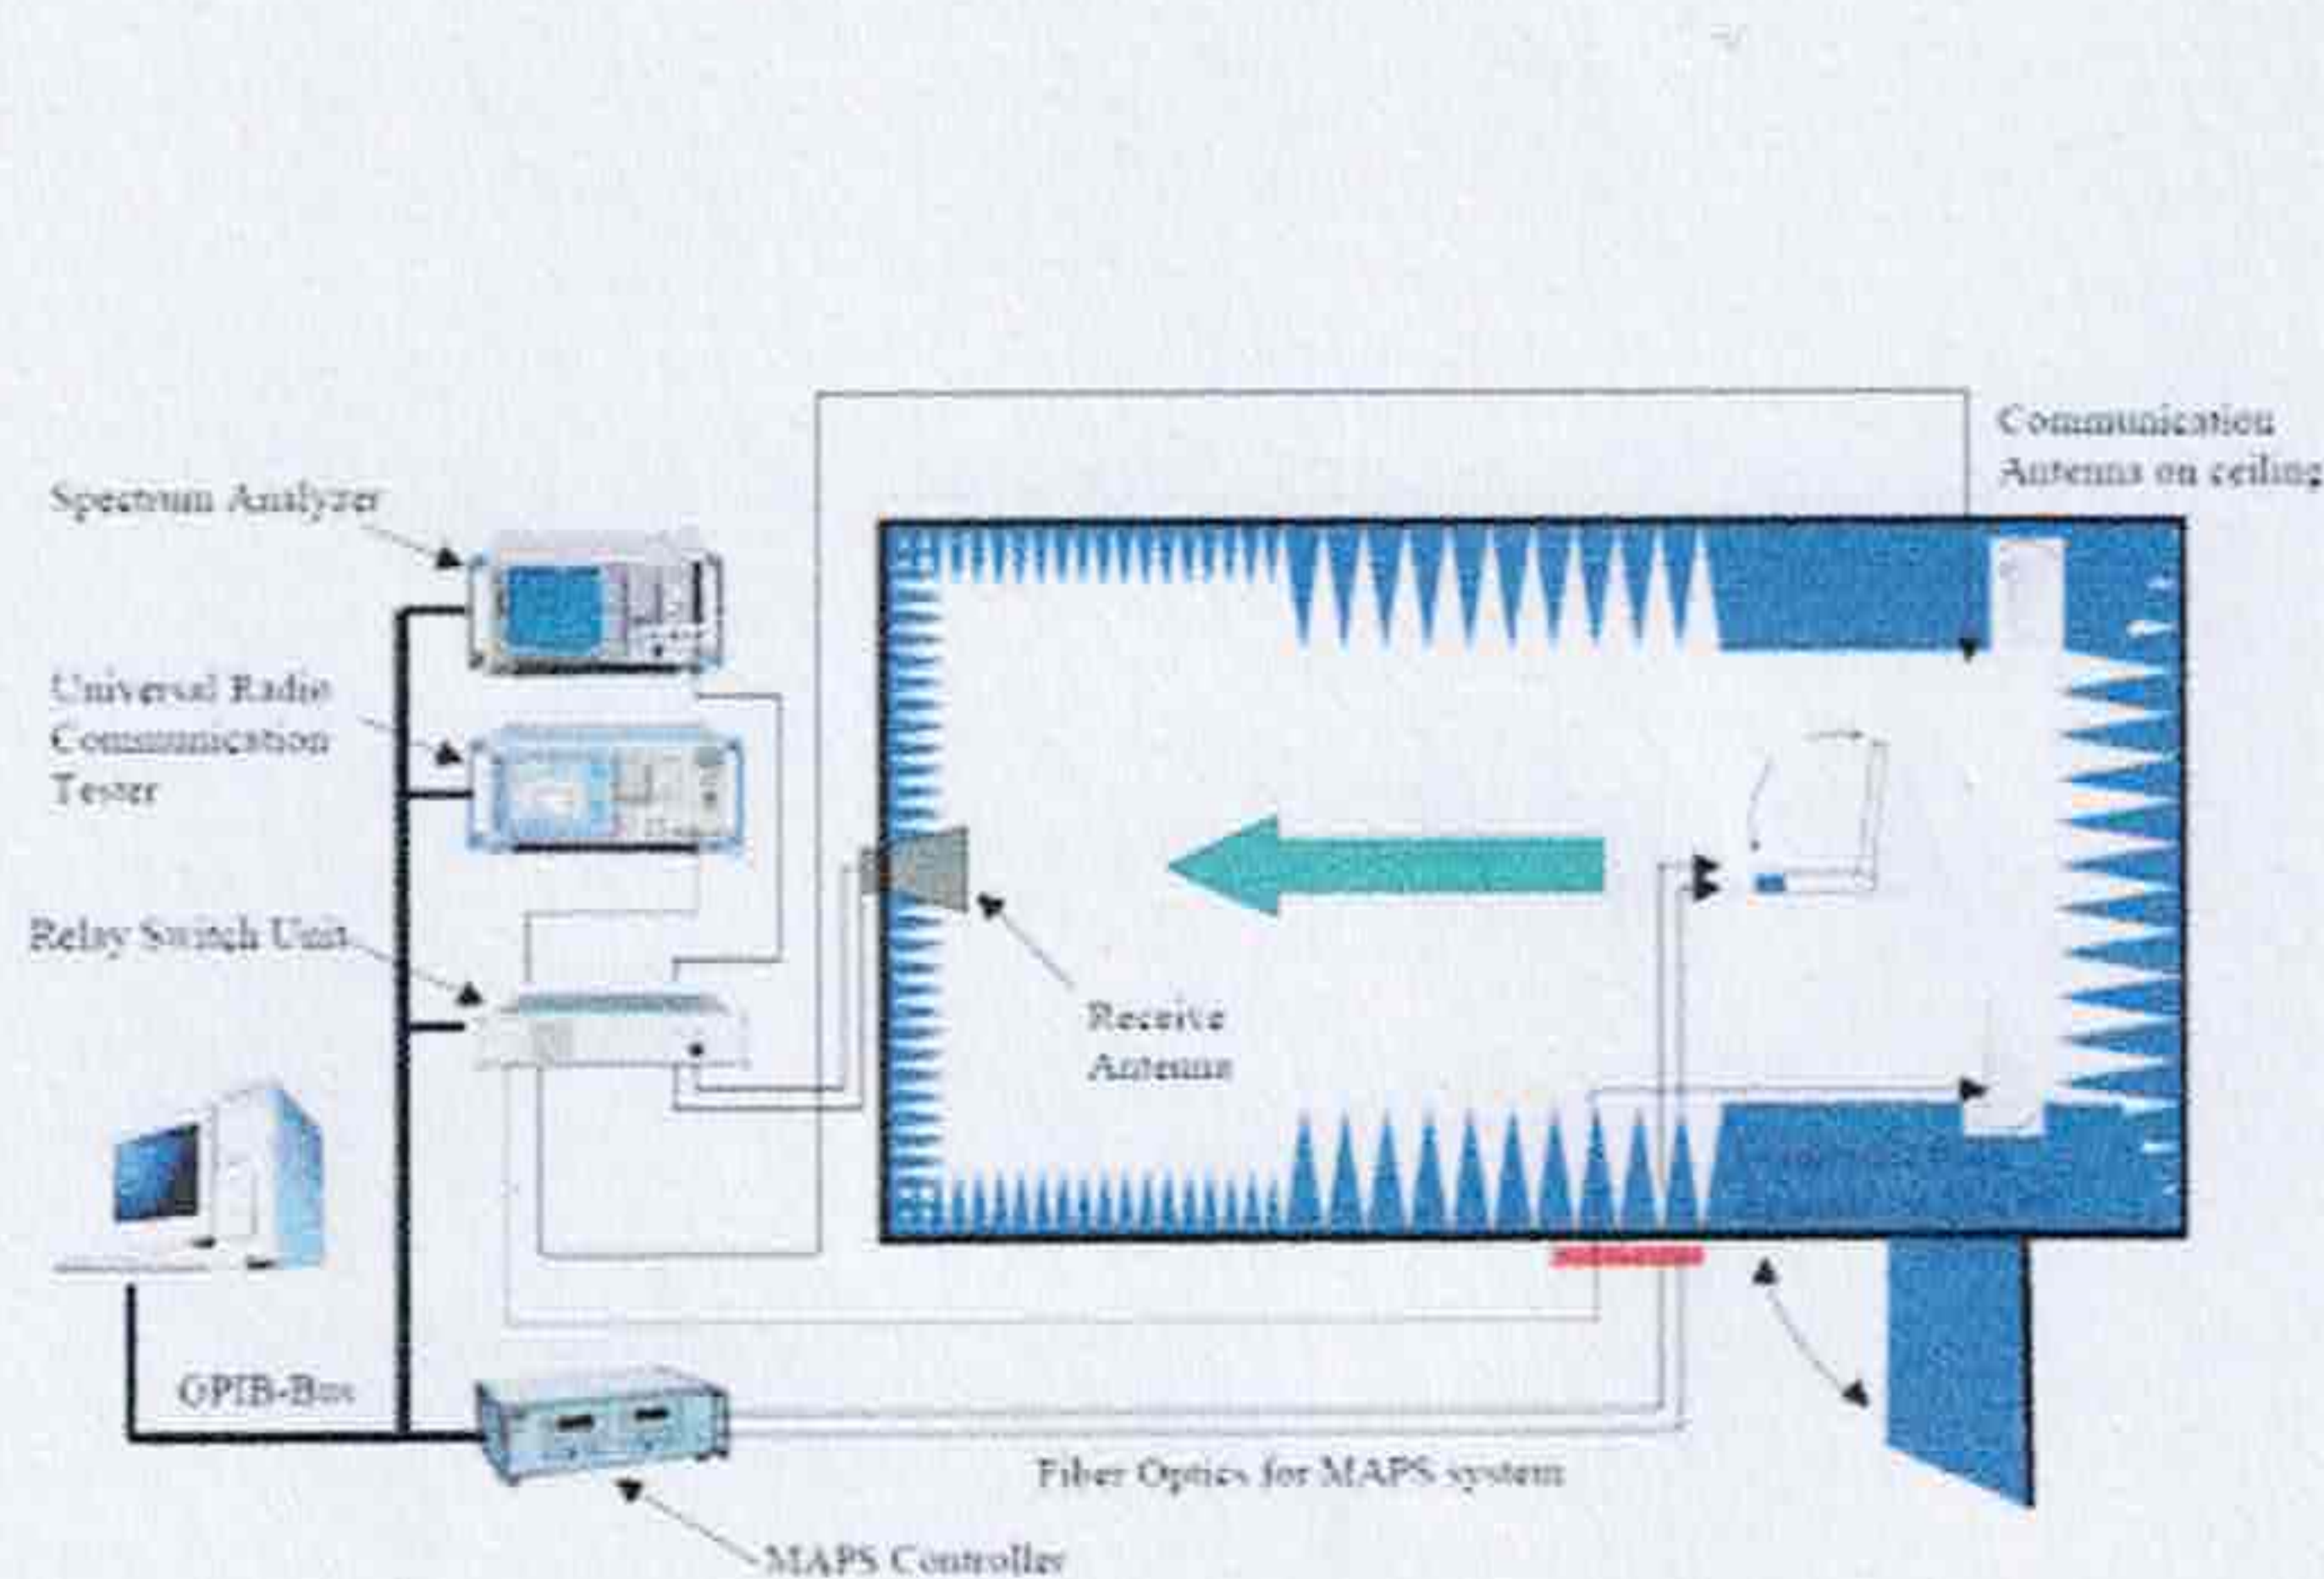

(Testing by 3D anechoic chamber)

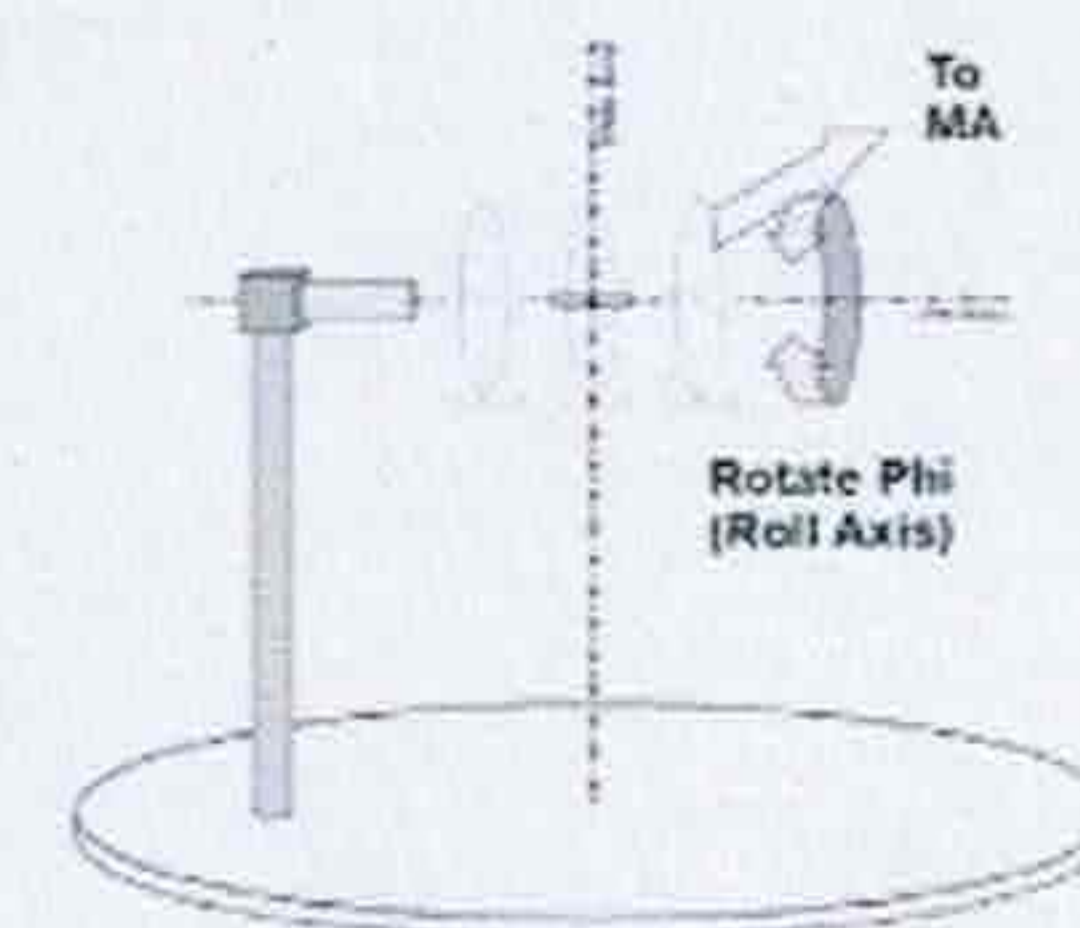

Phi axis test

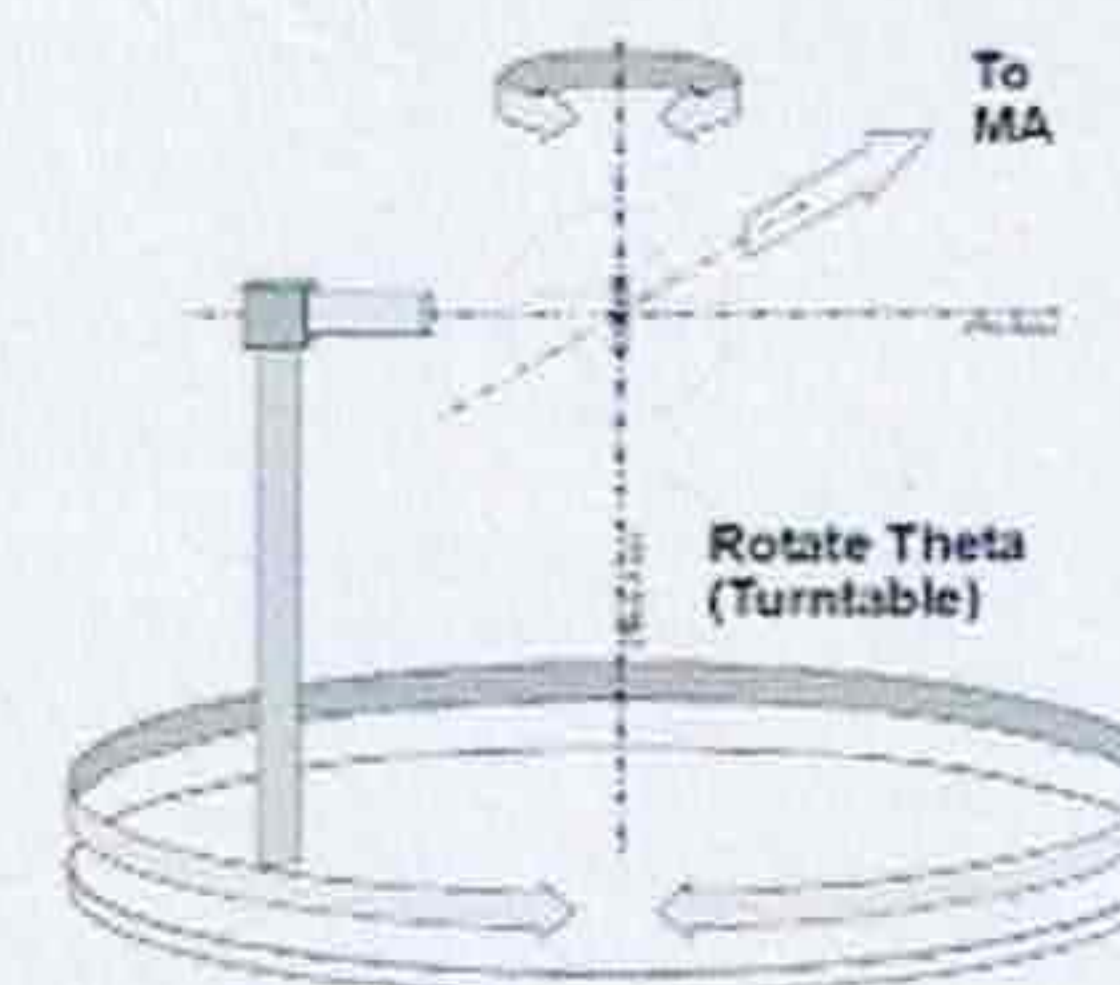

Theta axis test



## Efficiency & Gain

Freq (MHz)	Effi (%)	Gain (dBi)
2400	23.66	0.47
2410	23.19	0.38
2420	23.03	0.49
2430	22.41	0.42
2440	21.67	0.45
2450	20.24	0.52
2460	20.61	0.51
2470	21.41	0.59
2480	23.89	0.56
2490	26.46	0.53
2500	25.73	0.46