

# Bauer Hockey, LLC

## RF TEST REPORT

**Report Type:**

FCC Part 15.225 & ISED RSS-210 RF report

**Model:**

1062222

**REPORT NUMBER:**

230700938HZH-001

**ISSUE DATE:**

January 23, 2024

**DOCUMENT CONTROL NUMBER:**

TTRF15.225\_V1 © 2018 Intertek



**Applicant:** Bauer Hockey, LLC  
100 Domain Drive, Exeter, New Hampshire 03833, USA

**Manufacturer:** Bauer Hockey, LLC  
100 Domain Drive, Exeter, New Hampshire 03833, USA

**Factory:** Shandong Xinlongsheng Rail Transit Co., Ltd.  
No. 197 Shuangyuan Road, Jihongtan Street, Chengyang District, Qingdao  
City, Shandong Province, China

**FCC ID:** 2BD6O-1062222

**IC:** 31890-1062222

**SUMMARY:**

The equipment complies with the requirements according to the following standard(s) or Specification:

**47CFR Part 15 (2021):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2020):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

**RSS-210 Issue 10 (December 2019):** Licence-Exempt Radio Apparatus: Category I Equipment

**RSS-Gen Issue 5, Amendment 1 (March 2019):** General Requirements for Compliance of Radio Apparatus

**PREPARED BY:** \_\_\_\_\_ **REVIEWED BY:** \_\_\_\_\_



Project Engineer  
Offa Zhou

Reviewer  
Dylan Tang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**TEST REPORT**

**Content**

**REVISION HISTORY..... 4**

**MEASUREMENT RESULT SUMMARY ..... 5**

**1 GENERAL INFORMATION ..... 6**

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) ..... 6

1.2 TECHNICAL SPECIFICATION ..... 6

1.3 DESCRIPTION OF TEST FACILITY ..... 7

**2 TEST SPECIFICATIONS..... 8**

2.1 STANDARDS OR SPECIFICATION ..... 8

2.2 MODE OF OPERATION DURING THE TEST..... 8

2.3 TEST SOFTWARE LIST ..... 8

2.4 TEST PERIPHERALS LIST ..... 8

2.5 TEST ENVIRONMENT CONDITION:..... 8

2.6 INSTRUMENT LIST ..... 9

2.7 MEASUREMENT UNCERTAINTY ..... 10

**3 FUNDAMENTAL EMISSION ..... 11**

3.1 LIMIT ..... 11

3.2 MEASUREMENT PROCEDURE ..... 11

3.3 TEST CONFIGURATION ..... 12

3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS ..... 13

**4 SPURIOUS EMISSION ..... 15**

4.1 LIMIT ..... 15

4.2 MEASUREMENT PROCEDURE ..... 15

4.3 TEST RESULTS OF RADIATED EMISSIONS ..... 17

**5 FREQUENCY STABILITY (TEMPERATURE VARIATION) ..... 22**

5.1 TEST LIMIT ..... 22

5.2 TEST CONFIGURATION ..... 22

5.3 TEST PROCEDURE AND TEST SETUP ..... 23

5.4 TEST PROTOCOL ..... 23

**6 FREQUENCY STABILITY (VOLTAGE VARIATION) ..... 24**

6.1 TEST LIMIT ..... 24

6.2 TEST CONFIGURATION ..... 24

6.3 TEST PROCEDURE AND TEST SETUP ..... 24

6.4 TEST PROTOCOL ..... 25

**7 CONDUCTED EMISSIONS ..... 26**

7.1 LIMIT ..... 26

7.2 TEST CONFIGURATION ..... 26

7.3 MEASUREMENT PROCEDURE ..... 27

7.4 TEST RESULTS OF CONDUCTED EMISSIONS..... 28

**8 20DB BANDWIDTH ..... 30**

8.1 LIMIT..... 30

8.2 TEST CONFIGURATION ..... 30

8.3 TEST PROCEDURE AND TEST SET UP ..... 31

8.4 TEST PROTOCOL ..... 32

**9 ANTENNA REQUIREMENT..... 33**

### Revision History

Report No.	Version	Description	Issued Date
230700938HZH-001	Rev. 01	Initial issue of report	January 23, 2024

### Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Fundamental emission	15.225(a) (b) (c)	RSS 210 B.6	Pass
Spurious emission	15.225(d)	RSS 210 B.6	Pass
Frequency stability	15.225(e)	RSS 210 B.6	Pass
Conducted emissions	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
99% and 20dB Bandwidth	15.215(c)	RSS-Gen Issue 5 Clause 6.6	Pass
Antenna requirement	15.203	RSS-GEN 6.8	Pass

Notes:

1. NA =Not Applicable
2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product name:	Skate Sharpening Machine
Type/Model:	1062222
Description of EUT:	The EUT covered in the report is skate sharpening machine. RFID card reader is incorporated in model for process control.
Rating:	Unit: 24VDC, Max. 96W Adaptor: Input: 100-240V~, 50/60Hz, 2.5A Output: 24VDC, 4A, 96W
EUT type:	<input checked="" type="checkbox"/> Tabletop <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Serial numbers:	A230915-13-001
Sample received date:	September 19, 2023
Date of test:	September 19, 2023 ~ December 20, 2023

### 1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna:	PCB antenna

### TEST REPORT

#### 1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-4243, G-845, C-4723, T-2252
	A2LA Accreditation Lab Certificate Number: 3309.02

**TEST REPORT**

**2 TEST SPECIFICATIONS**

**2.1 Standards or specification**

47CFR Part 15 (2021)  
 ANSI C63.10 (2020)  
 RSS-210 Issue 10 (December 2019)  
 RSS-Gen Issue 5, Amendment 1 (March 2019)

**2.2 Mode of operation during the test**

While testing, the internal modulation and continuously transmission was applied.

**2.3 Test software list**

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

**2.4 Test peripherals list**

Item No	Description	Band and Model	S/No
-	-	-	-

**2.5 Test environment condition:**

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH



## 2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2024-02-08
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-09
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2024-12-06
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2024-01-10
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-08-24
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-08-22
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2024-07-16
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-08
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2024-03-05
<input type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2024-03-05
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2024-03-05
<input type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2024-03-05
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxel	EC 5176	2024-01-11
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2024-03-05
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2024-06-15
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC 6209	2024-01-30
<input type="checkbox"/>	Signal generator	Agilent	N5182A	EC 6172	2024-08-08
<input type="checkbox"/>	Signal generator	Agilent	N5181A	EC 6171	2024-08-08
<input type="checkbox"/>	Horn antenna	Vdi	M12RH	EC6382	2024-03-12
<input type="checkbox"/>	Horn antenna	Vdi	M15RH	EC6381	2024-03-12
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2024-03-06
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2024-03-24
<input checked="" type="checkbox"/>	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2024-03-08

## 2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.06 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

### 3 Fundamental Emission

Test result: **PASS**

#### 3.1 Limit

Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50


#### 3.2 Measurement Procedure

- a) The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.


### 3.3 Test Configuration

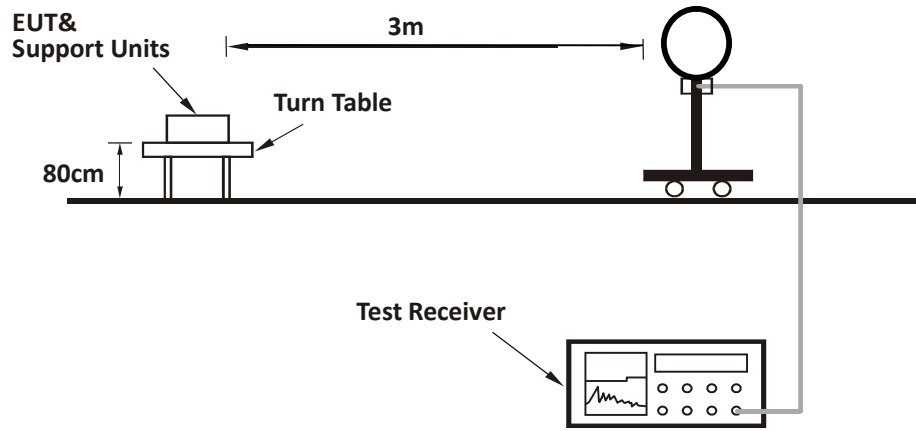


**TEST REPORT**

**3.4 Test Results of Fundamental Emissions**

Antenna Polarization: X axis

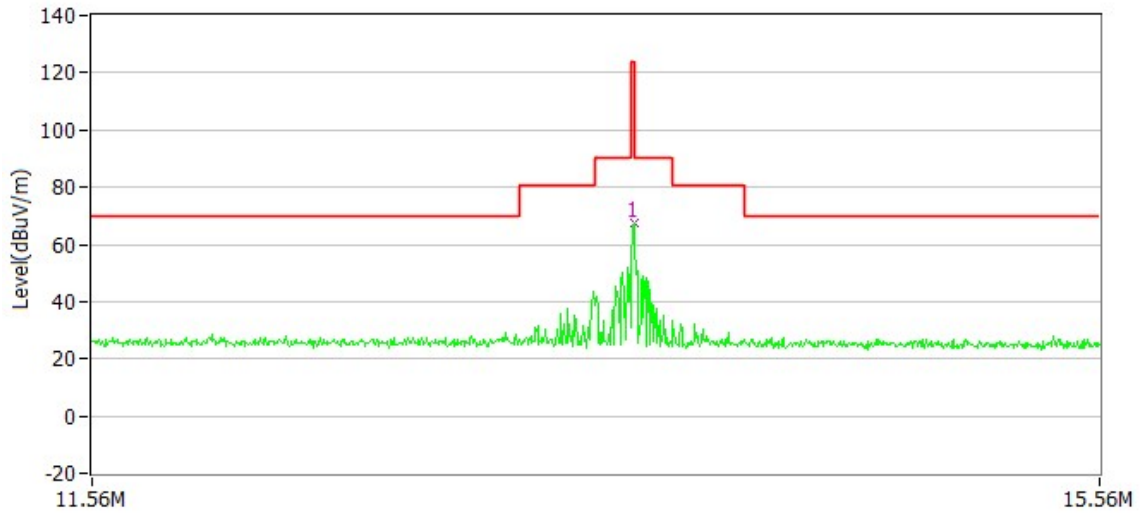


Antenna Polarization: Y axis

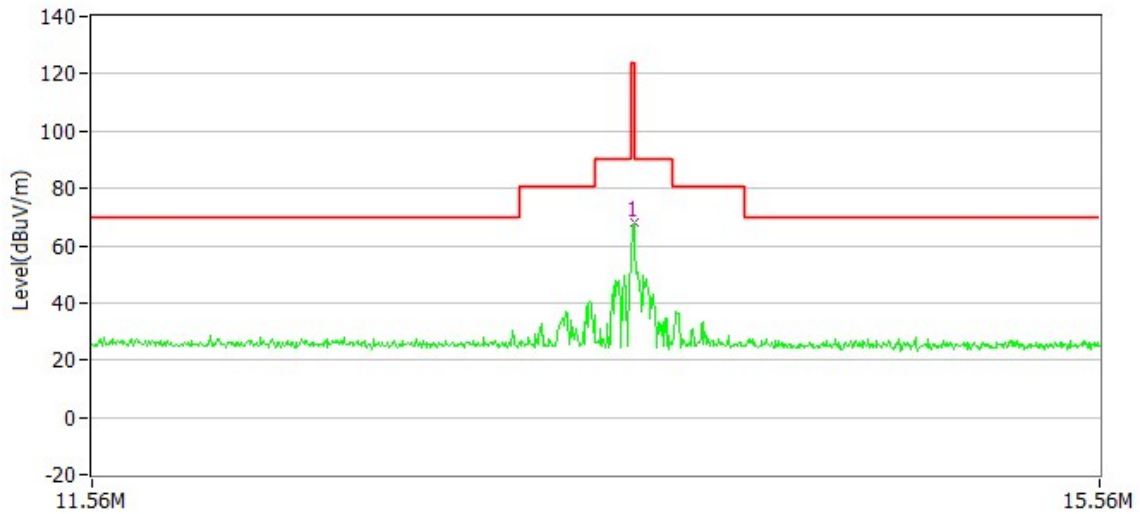

**TEST REPORT**

Antenna Polarization: Z axis

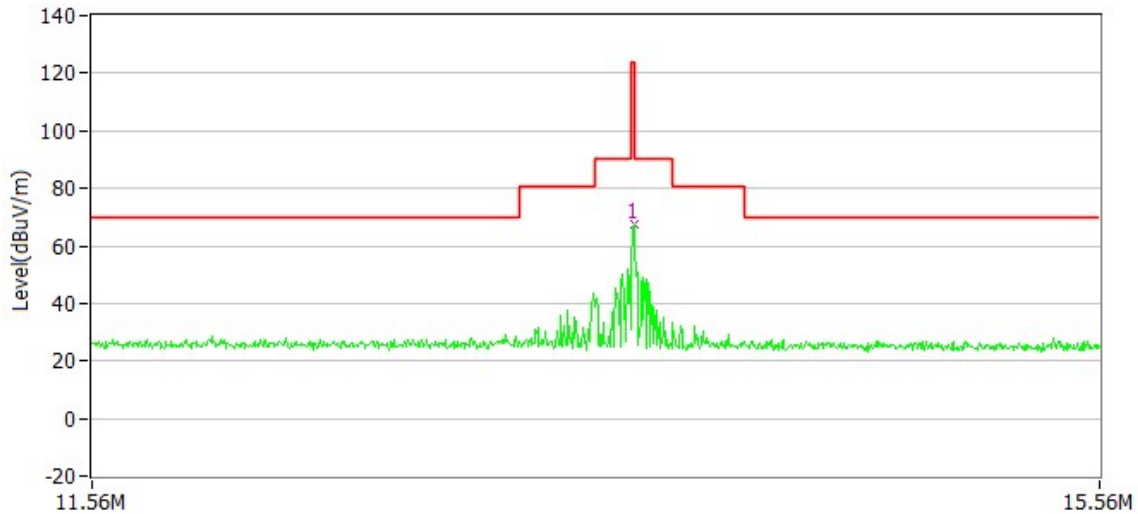

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
X	13.56	67.30	20.50	124.00	56.70	PK
Y	13.56	69.10	20.50	124.00	54.90	PK
Z	13.56	68.00	20.50	124.00	56.00	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB, Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, Limit = 40.00dBuV/m.

Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;

Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;

Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

## 4 Spurious Emission

Test result: **PASS**

### 4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 4.2 Measurement Procedure

#### For Radiated emission below 30MHz:

- f) The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- g) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- h) Both X and Y axes of the antenna are set to make the measurement.
- i) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- j) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### NOTE:

- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz:

- a) The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

**TEST REPORT**

- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. All modes of operation were evaluated and the worst-case emissions were reported





TEST REPORT

4.3 Test Results of Radiated Emissions


The EUT has been tested in all two orthogonal planes, it has the worst case when it is in horizontal position for both below 30MHz & above 30MHz.

Test Curve (below 30MHz):

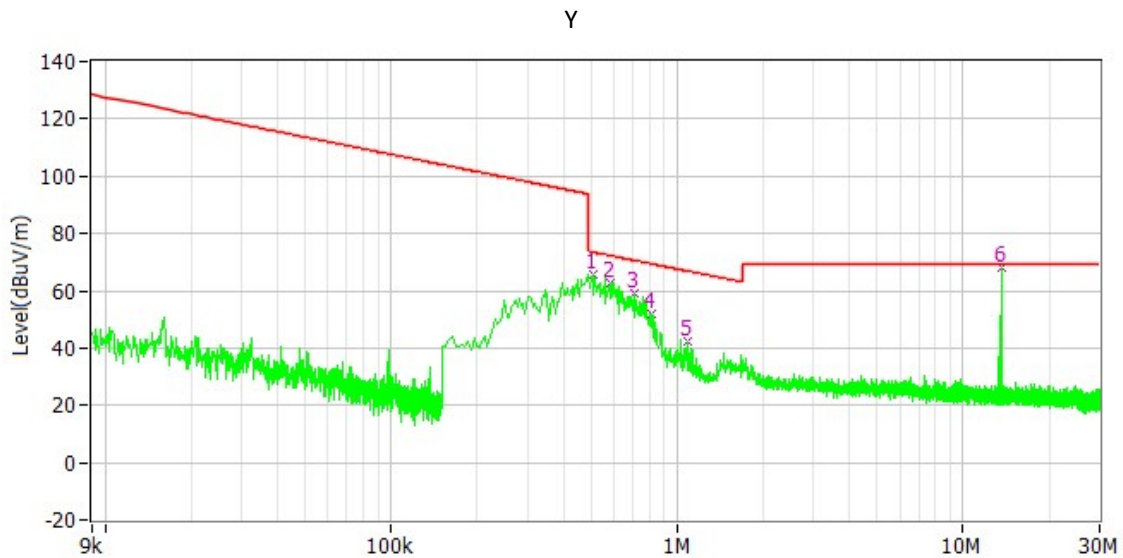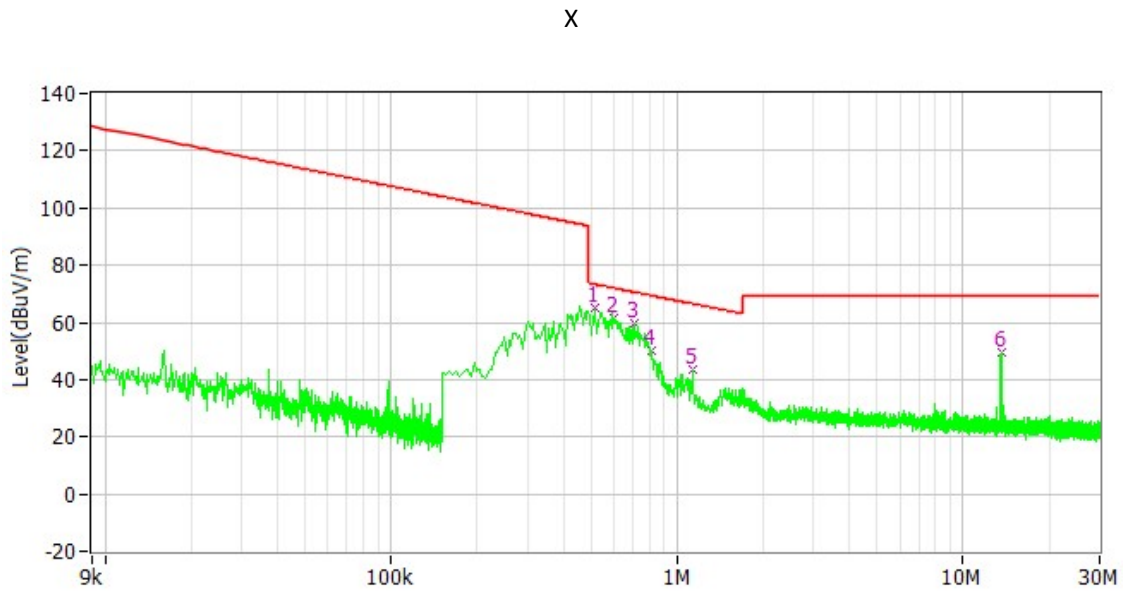

TEST REPORT

Z

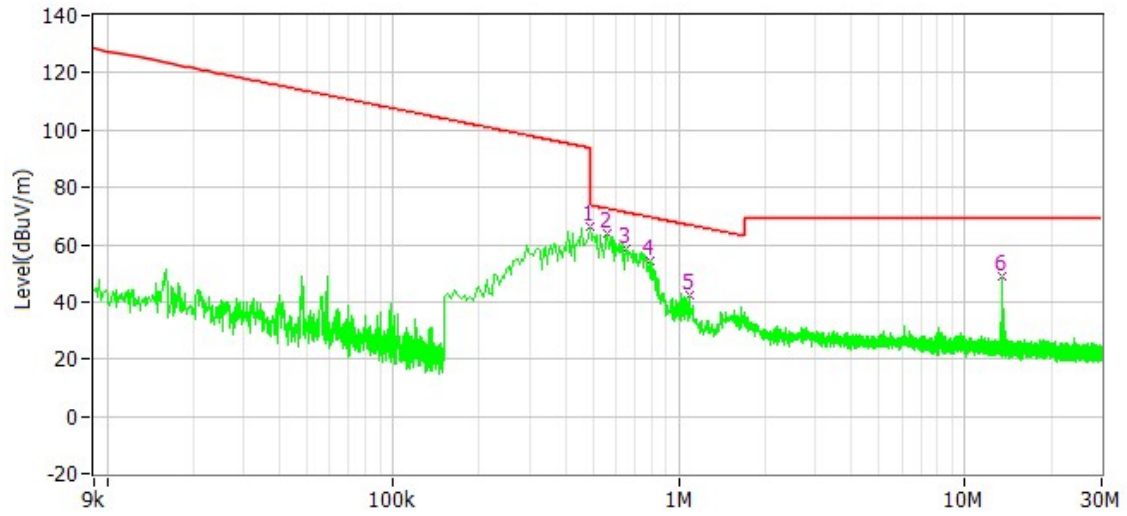

**TEST REPORT**

**Test data below 30MHz:**

Frequency	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Reading (dBuV)	Factor (dB/m)	Detector	Polarity
519.000kHz	73.30	64.80	8.50	44.60	20.20	PK	X
600.000kHz	72.00	61.70	10.30	41.50	20.20	PK	X
708.000kHz	70.60	59.90	10.80	39.70	20.20	PK	X
816.000kHz	69.40	50.00	19.40	29.90	20.10	PK	X
1.131MHz	66.60	43.50	23.10	23.40	20.10	PK	X
505.500kHz	73.50	65.60	7.90	45.40	20.20	PK	Y
586.500kHz	72.20	62.80	9.40	42.60	20.20	PK	Y
708.000kHz	70.60	59.30	11.30	39.10	20.20	PK	Y
816.000kHz	69.40	52.10	17.20	32.00	20.10	PK	Y
1.091MHz	66.90	42.50	24.40	22.40	20.10	PK	Y
487.500kHz	93.80	66.10	27.80	45.90	20.20	PK	Z
564.000kHz	72.60	63.70	8.80	43.50	20.20	PK	Z
654.000kHz	71.30	58.80	12.50	38.60	20.20	PK	Z
789.000kHz	69.70	54.20	15.40	34.10	20.10	PK	Z
1.082MHz	66.90	42.50	24.40	22.40	20.10	PK	Z


- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.  
 2. Corrected Reading = Original Receiver Reading + Correct Factor  
 3. Margin = Limit - Corrected Reading  
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,  
 Limit = 40.00dBuV/m.  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;  
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.


TEST REPORT

Test Curve (30MHz to 1000MHz):

Horizontal

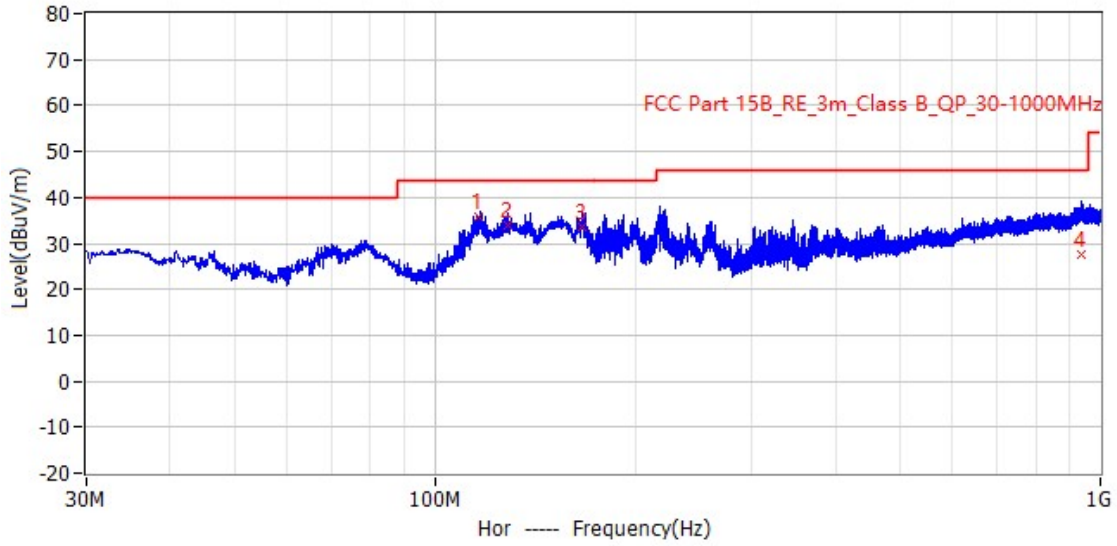

Vertical

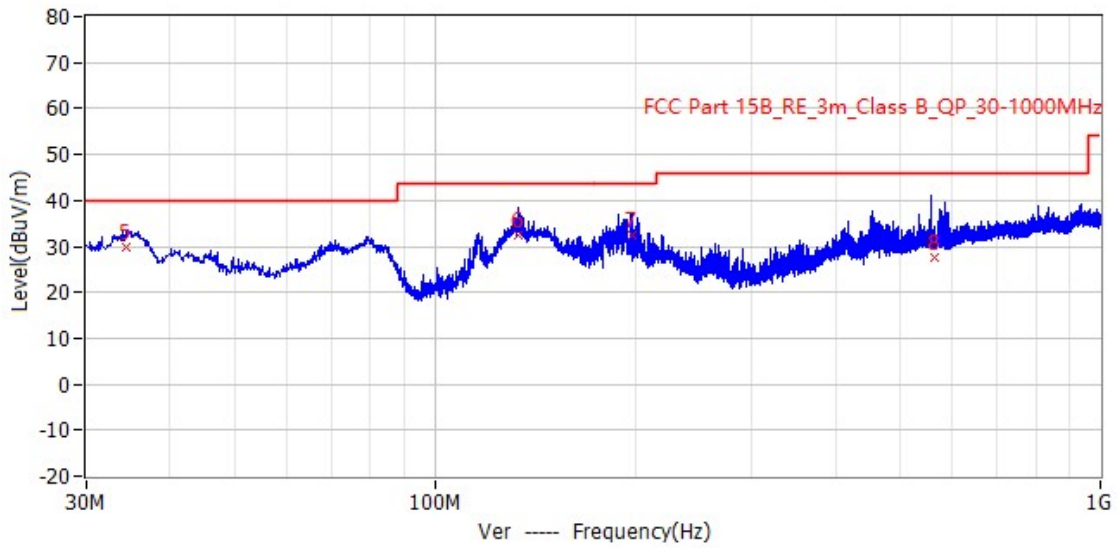

**TEST REPORT**

**Test data (30MHz to 1000MHz)**

Frequency	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Original Reading (dBuV)	Correct Factor (dB/m)	Detector	Polar
116.291MHz	43.50	35.90	7.60	27.70	8.20	QP	Hor
129.208MHz	43.50	33.90	9.60	25.50	8.40	QP	Hor
166.115MHz	43.50	33.60	9.90	23.50	10.10	QP	Hor
933.672MHz	46.00	27.40	18.60	0.60	26.80	QP	Hor
34.365MHz	40.00	30.00	10.00	16.50	13.50	QP	Ver
133.556MHz	43.50	32.60	10.90	23.90	8.70	QP	Ver
198.130MHz	43.50	32.40	11.10	21.60	10.80	QP	Ver
563.276MHz	46.00	27.50	18.50	6.00	21.50	QP	Ver

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.  
 2. Corrected Reading = Original Receiver Reading + Correct Factor  
 3. Margin = Limit - Corrected Reading  
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,  
 Limit = 40.00dBuV/m.  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;  
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.


## 5 Frequency Stability (Temperature Variation)

Test result: **PASS**

### 5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage.

### 5.2 Test Configuration

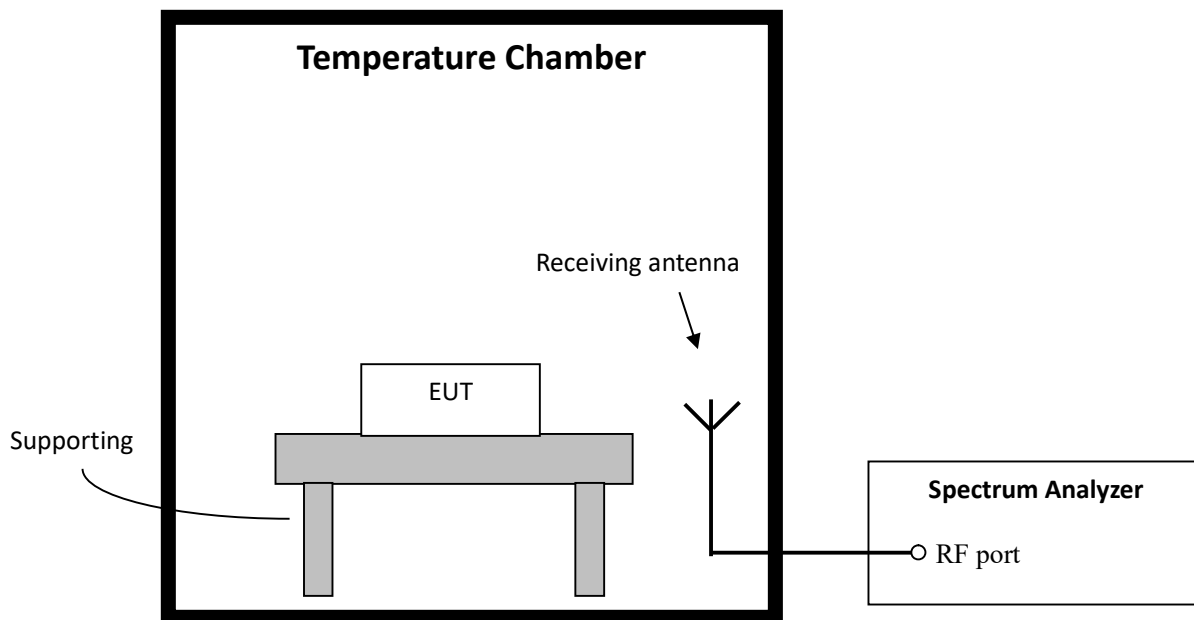

**TEST REPORT**

**5.3 Test procedure and test setup**

Test Procedure as per ANSI 63.10 clause 6.8.1.

**5.4 Test protocol**

Voltage (V)	Temp (°C)	Freq Measured (MHz)	Freq Nominal (MHz)	Tolerance (%)	Limit (%)
120	-20	13.5605	13.56	0.004	± 0.01
	-10	13.5602		0.001	
	0	13.5605		0.004	
	10	13.5606		0.004	
	20	13.5606		0.004	
	30	13.5606		0.004	
	40	13.5594		-0.004	
	50	13.5598		-0.001	


## 6 Frequency Stability (Voltage Variation)

Test result: **PASS**

### 6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 6.2 Test Configuration

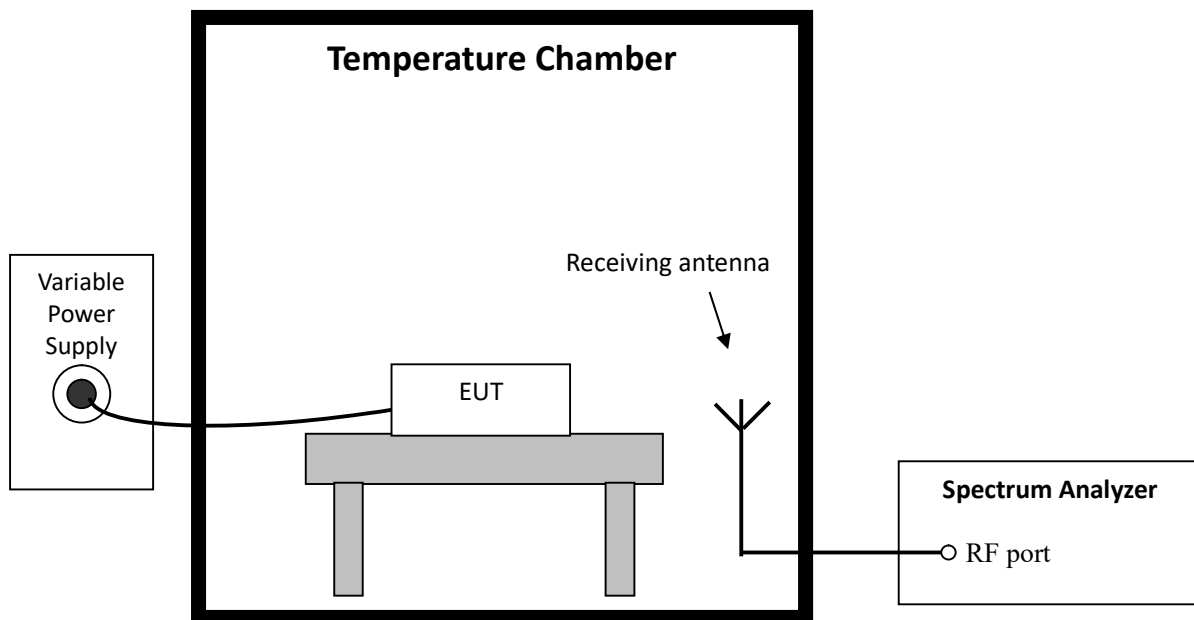

### 6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.



**TEST REPORT****6.4 Test protocol**

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	102	13.5605	13.56	0.004	± 0.01
	120	13.5608		0.006	
	138	13.5602		0.001	

## 7 Conducted emissions


Test result: **PASS**

### 7.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 7.2 Test Configuration

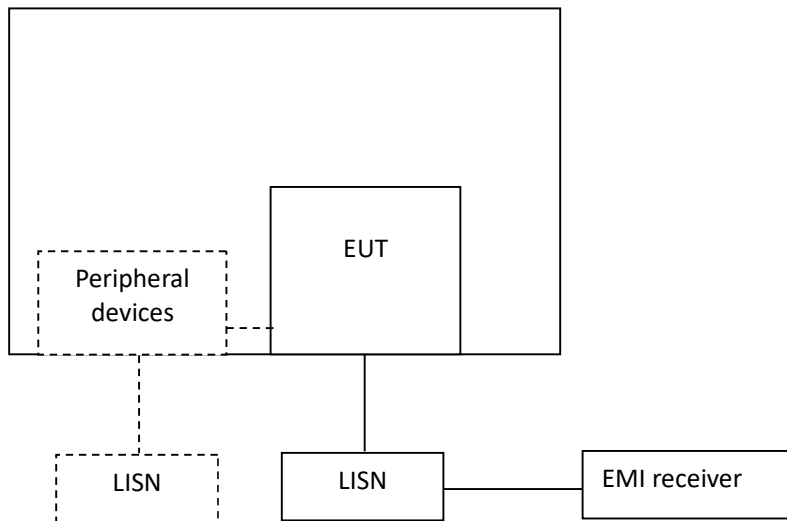

### 7.3 Measurement Procedure

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.



The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT

7.4 Test Results of Conducted Emissions

Test Voltage: 120VAC/60Hz

Test Curve:

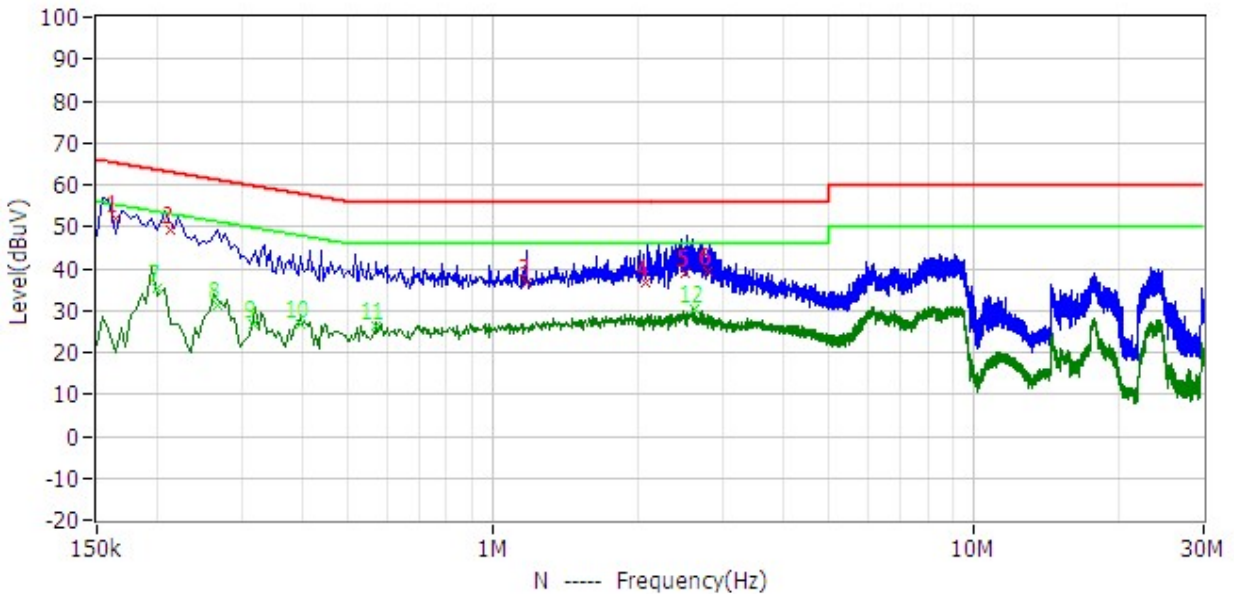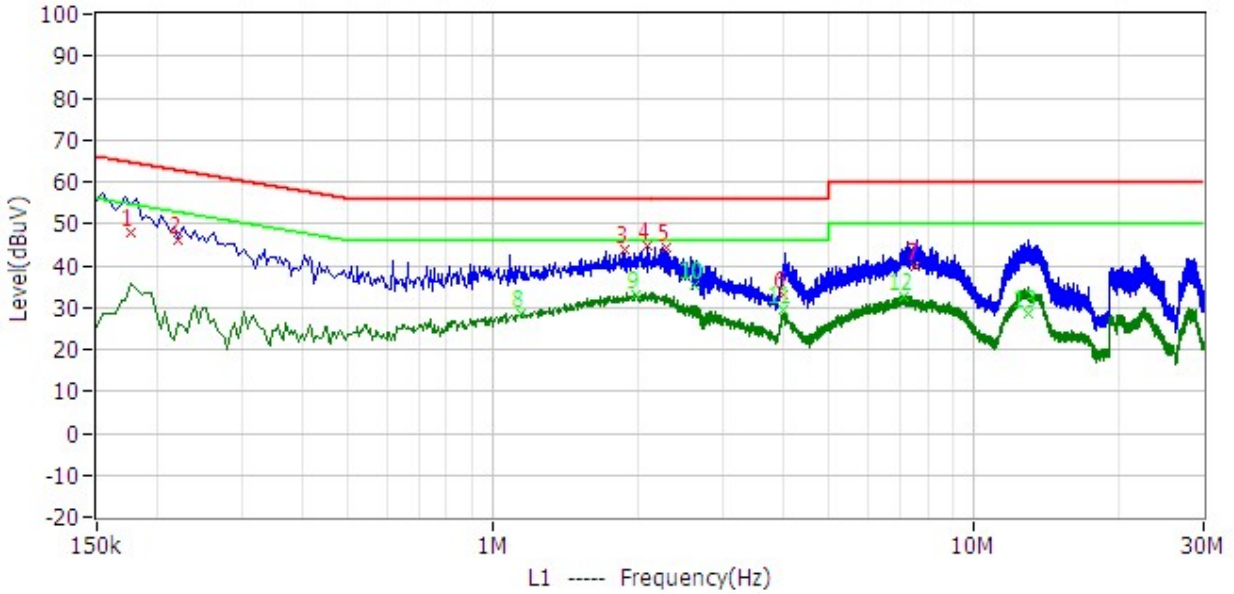

**TEST REPORT**

Frequency	Limit (dBuV)	Level (dBuV)	Delta (dB)	Original Receiver Reading (dBuV)	Correct Factor (dB)	Detector	Phase
177.000kHz	64.60	47.90	16.70	37.70	10.20	QP	L1
222.000kHz	62.70	45.90	16.80	35.70	10.20	QP	L1
1.878MHz	56.00	43.80	12.20	33.50	10.30	QP	L1
2.099MHz	56.00	44.60	11.40	34.30	10.30	QP	L1
2.297MHz	56.00	44.40	11.60	34.10	10.30	QP	L1
4.020MHz	56.00	33.10	22.90	22.70	10.40	QP	L1
7.562MHz	60.00	39.80	20.20	29.30	10.50	QP	L1
1.145MHz	46.00	28.40	17.60	18.10	10.30	CAV	L1
1.977MHz	46.00	33.20	12.80	22.90	10.30	CAV	L1
2.630MHz	46.00	35.30	10.70	25.00	10.30	CAV	L1
4.007MHz	46.00	29.60	16.40	19.20	10.40	CAV	L1
7.152MHz	50.00	32.60	17.40	22.10	10.50	CAV	L1
12.935MHz	50.00	28.70	21.30	17.90	10.80	CAV	L1
163.500kHz	65.30	52.00	13.30	41.80	10.20	QP	N
213.000kHz	63.10	49.30	13.80	39.00	10.30	QP	N
1.176MHz	56.00	36.60	19.40	26.30	10.30	QP	N
2.081MHz	56.00	36.80	19.20	26.40	10.40	QP	N
2.517MHz	56.00	38.70	17.30	28.30	10.40	QP	N
2.796MHz	56.00	39.40	16.60	29.00	10.40	QP	N
199.500kHz	53.60	35.20	18.40	24.90	10.30	CAV	N
267.000kHz	51.20	31.20	20.00	20.90	10.30	CAV	N
316.500kHz	49.80	26.80	23.00	16.50	10.30	CAV	N
397.500kHz	47.90	26.90	21.00	16.60	10.30	CAV	N
573.000kHz	46.00	26.20	19.80	15.90	10.30	CAV	N
2.621MHz	46.00	30.30	15.70	19.90	10.40	CAV	N

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.  
 2. Level = Original Receiver Reading + Correct Factor  
 3. Delta = Level - Limit  
 4. If the PK Level is lower than AV limit, the AV test can be elided.  
 5. the emissions of 13.56MHz are the product's RF signal.


## 8 20dB Bandwidth

Test result: **PASS**

### 8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.  
No limit for 99% bandwidth.

### 8.2 Test configuration

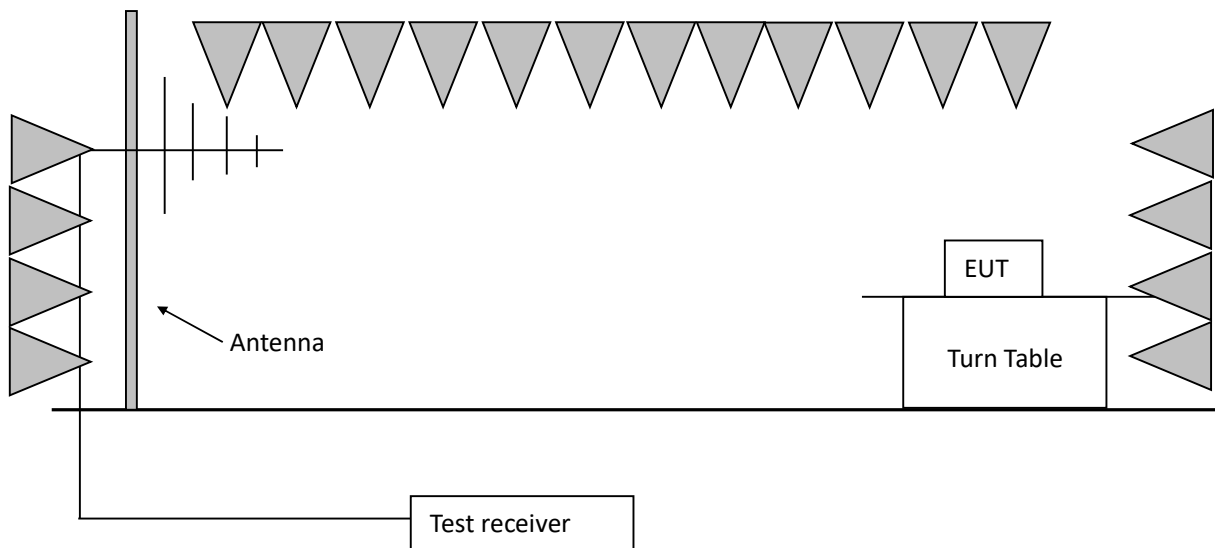

**TEST REPORT****8.3 Test procedure and test set up**

The measurement was applied in a 3m semi-anechoic chamber.

The center of the loop antenna shall be 1 m above the horizontal metal ground plane.


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW  $\geq 3 \cdot$  RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

## TEST REPORT

### 8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.560441	13.560753	0.312	13.553 ~ 13.567
Occupied bandwidth	13.560160	13.561058	0.898	13.553 ~ 13.567

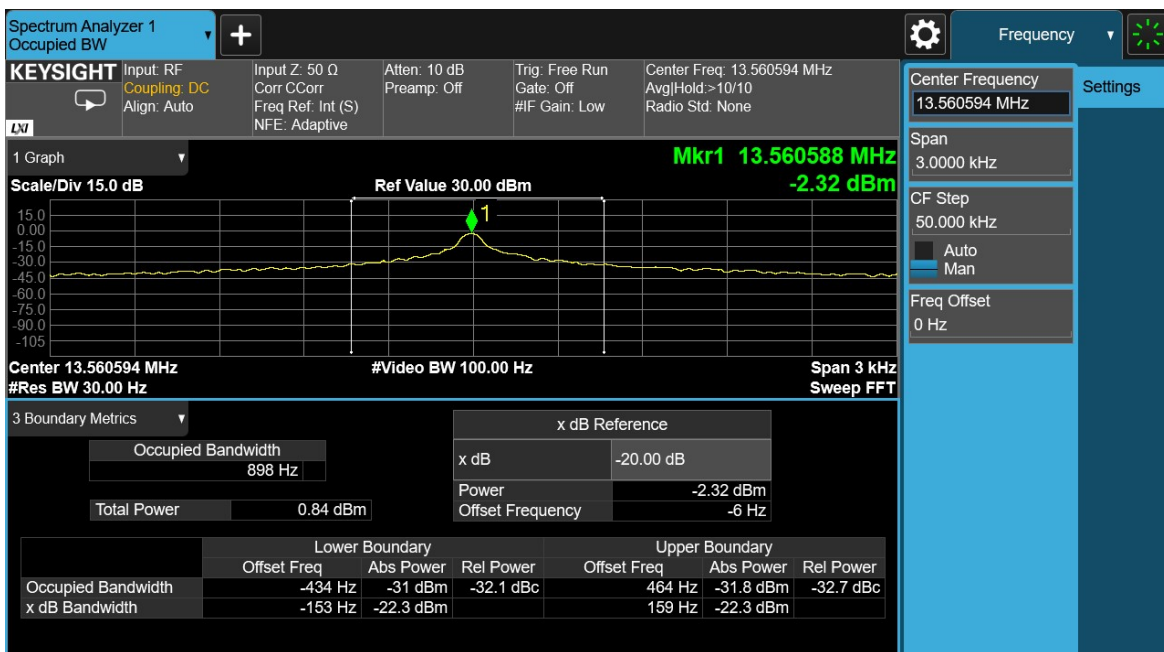



## 9 Antenna requirement

**Requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:**

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

\*\*\*\*\* END \*\*\*\*\*