

APPROVAL SHEET

CrossAir™ SMD antenna series
RoHS Compliance

PN: CA-S01

NB-IOT B5 B8 /Lora/ Sub-1g/ UHF band
antenna

CA-S01 Approval sheet


FEATURES

1. Surface Mounted Devices with a small dimension of 15.0 X 3.0 X 1.0 mm³ meet miniaturization trend.
2. Low power loss and high antenna efficiency.
3. High stability in Temperature and Humidity Change.

APPLICATIONS

1. NB-IoT B5 B8 band RF applications.
2. Lora 915M 868M 490M 433MHz band RF applications .
3. Sub-1g 915M 868M 490M 433MHz band RF applications.
4. UHF band (400M-800Mhz) RF applications.

CONSTRUCTION

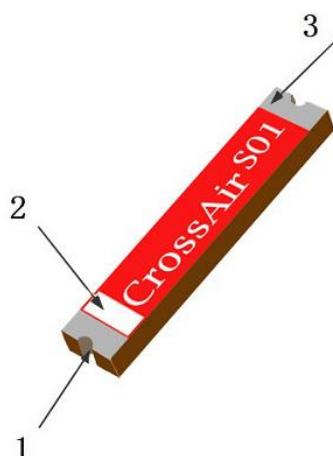


1、 Antenna Feeding

2、 Identification Mark

3、 Soldering terminal

DIMENSIONS

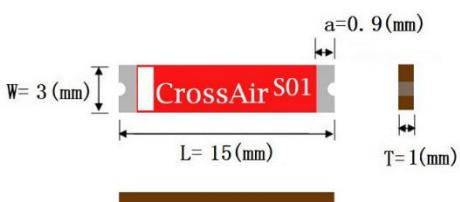
Figure	Symbol	Dimension(mm)
	L	15.0±0.2
	W	3.0±0.1
	T	1.0±0.05
	a	0.9±0.1

ELECTRICAL CHARACTERISTICS


CA-S01	Specification
Working Frequency Range	400Mhz-960Mhz
Fc(GHz)	950MHz
Band Width	>80MHz
Impedance	50 Ω
Gain(dBi)	7.2
VSWR	<2
Operation Temperature	-40°C~+85°C
Power Capacity	4W

The working frequency need be adjusted to working band with matching circuit.


SOLDER LAND PATTERN DESIGN

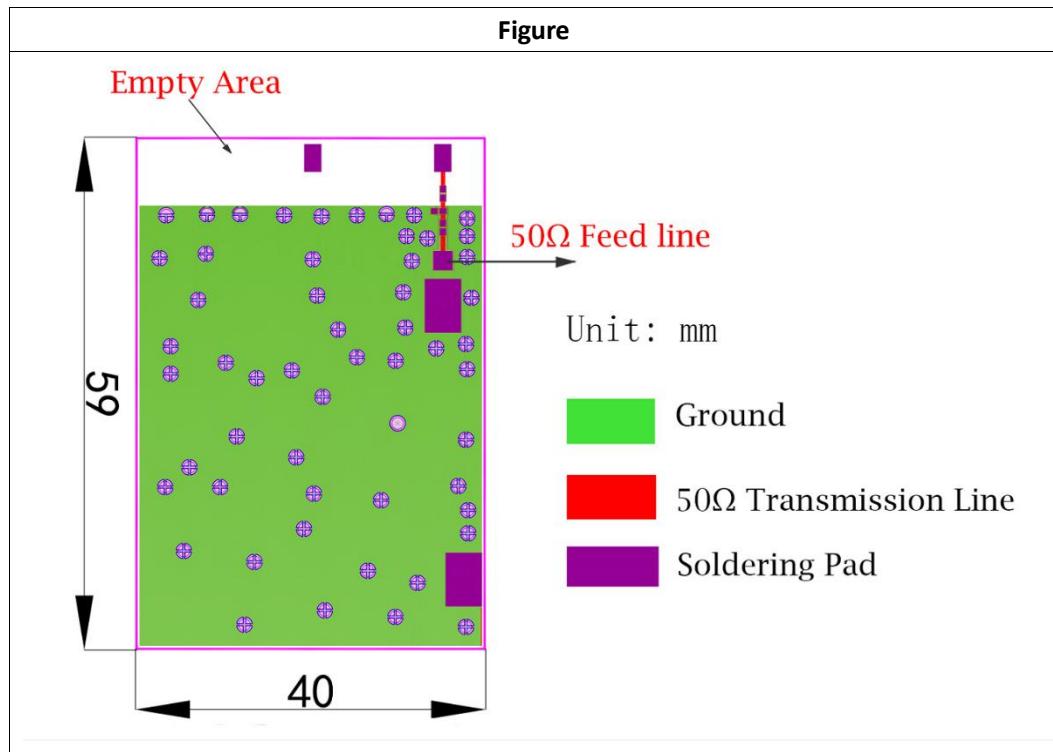

CA-S01 Approval sheet

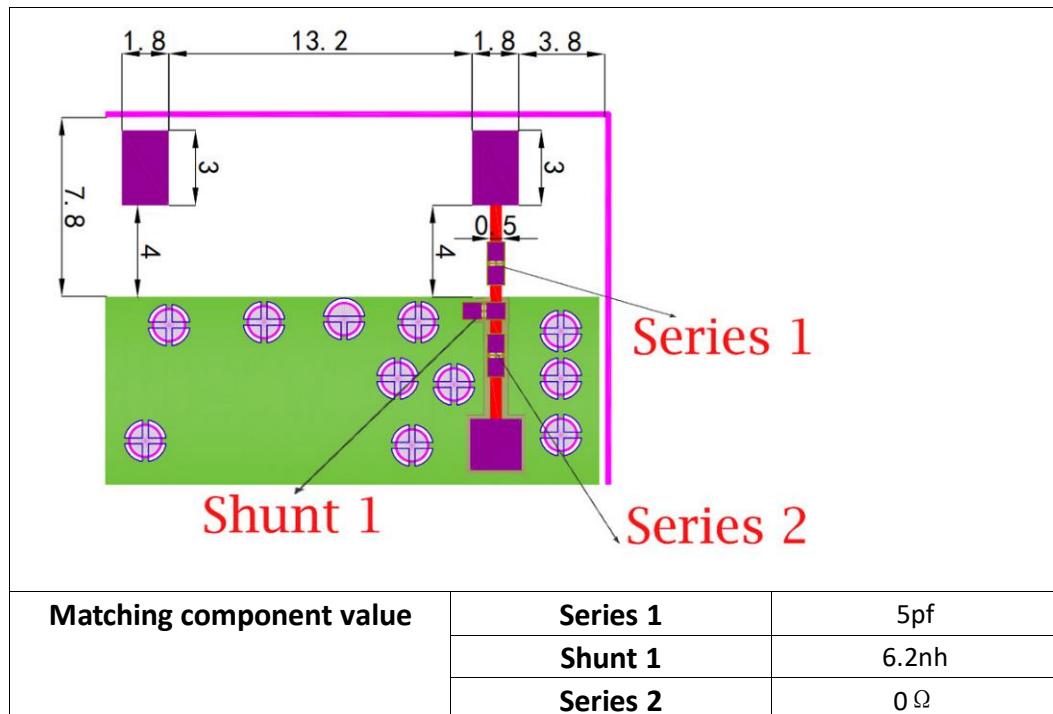


Antenna on Test Board (Thickness 1.0mm)

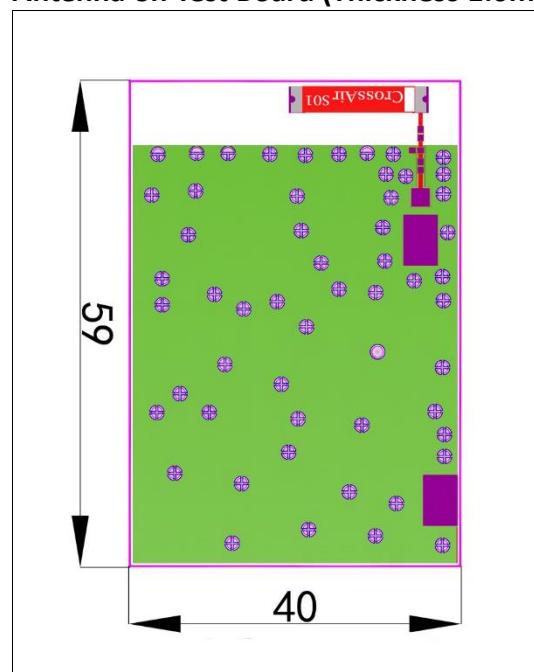

Antenna S11 on Test Board



CA-S01 Approval sheet

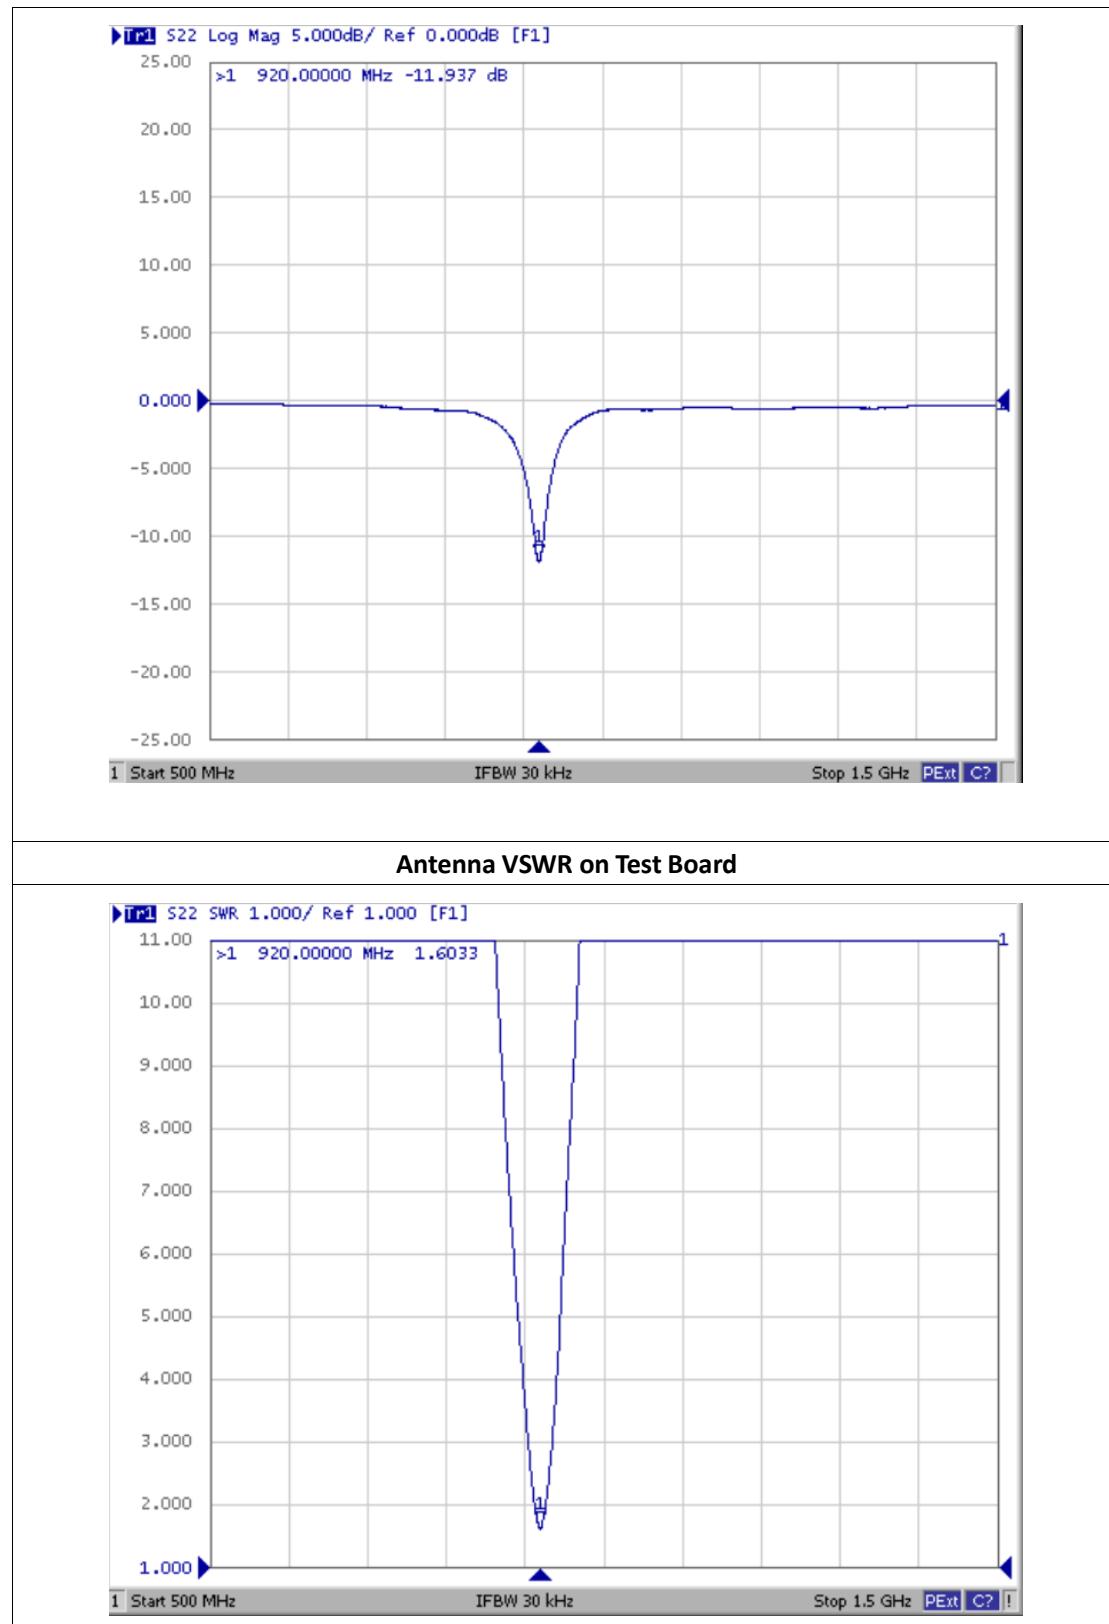


Efficiency and RADIATION PATTERN

Efficiency, Radiation Pattern and Gain were dependent on measurement board design. The specification of CA-S01 antenna was measured based on the PCB size and installation position as shown in the below figure test board. The test results were tested in ETS 3D Chamber.


CA-S01 Approval sheet

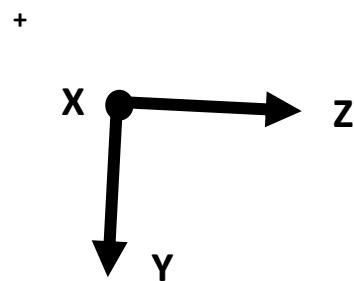

Gain and Efficiency		880M-960MHz
Peak Gain		7.2dBi
Average Gain across the band		5.6dBi
Gain Range across the band		2.2dBi~7.2dBi
Peak Efficiency		39.5%
Average Efficiency across the band		28.7%
Efficiency Range across the band		12.3%~39.5%

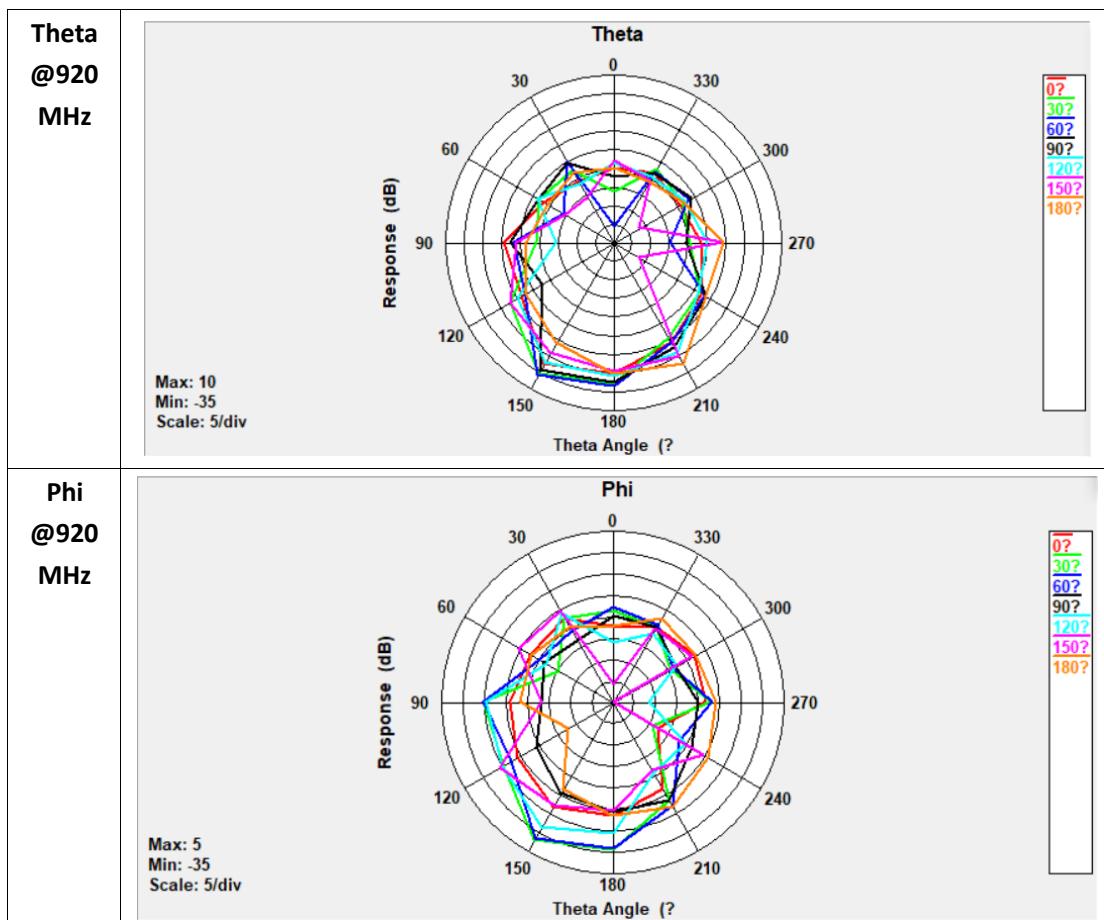


CA-S01 Approval sheet

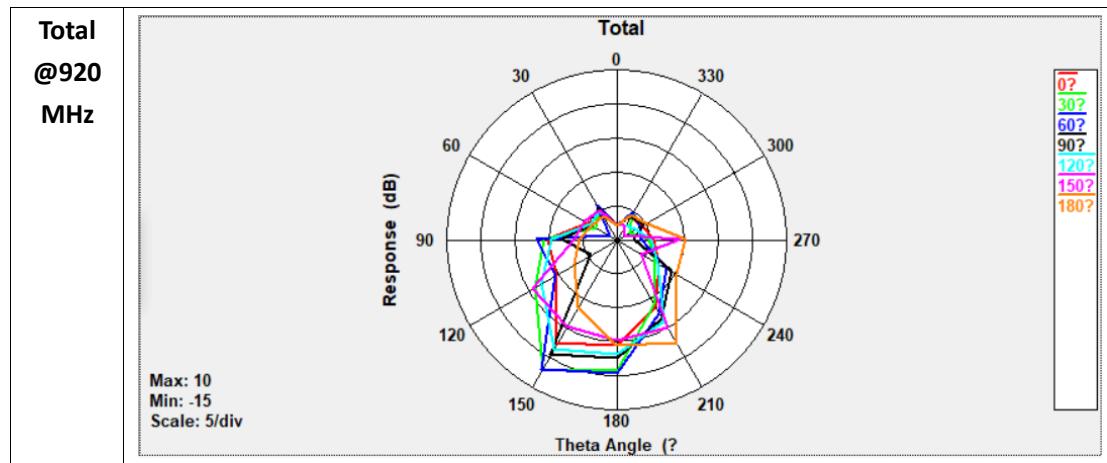

SOLDERING CONDITION


Typical examples of soldering processes that provide reliable joints without any damage is as follows:

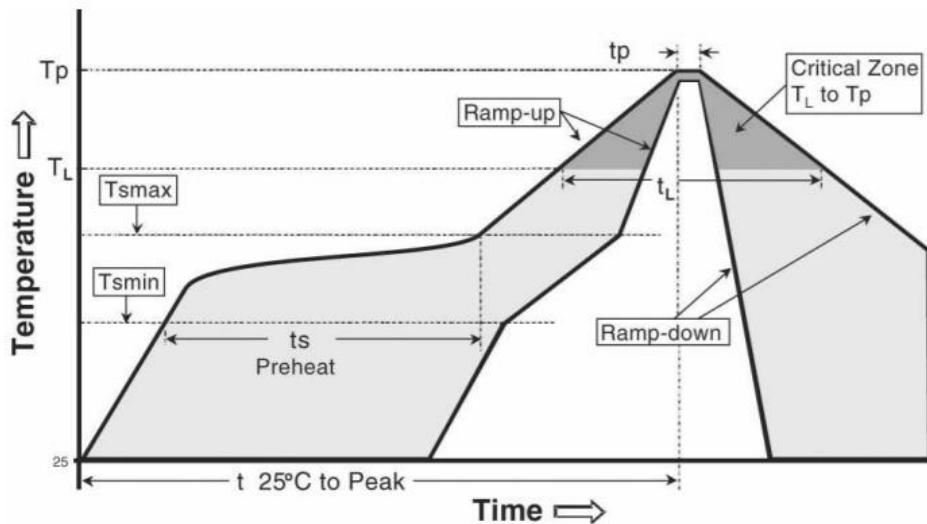

Phase	Profile features	Pb-Free assembly (SnAgCu)
RAMP-UP	Avg. Ramp-up Rate (Tsmax to Tp)	3 °C / second (max.)
PREHEAT	<ul style="list-style-type: none"> - Temperature Min (Tsmin) - Temperature Max (Tsmax) - Time (tsmin to tsmax) 	<ul style="list-style-type: none"> 150 °C 200 °C 60-180 seconds
REFLOW	<ul style="list-style-type: none"> - Temperature (TL) - Total Time above TL (tL) 	<ul style="list-style-type: none"> 217 °C 60-150 seconds
PEAK	<ul style="list-style-type: none"> - Temperature (Tp) - Time (tp) 	<ul style="list-style-type: none"> 260 °C 20-40 seconds
RAMP-DOWN	Rate	6 °C/second max
Time from 25 °C to Peak Temperature		8 minutes max

CA-S01 Approval sheet


PACKAGING

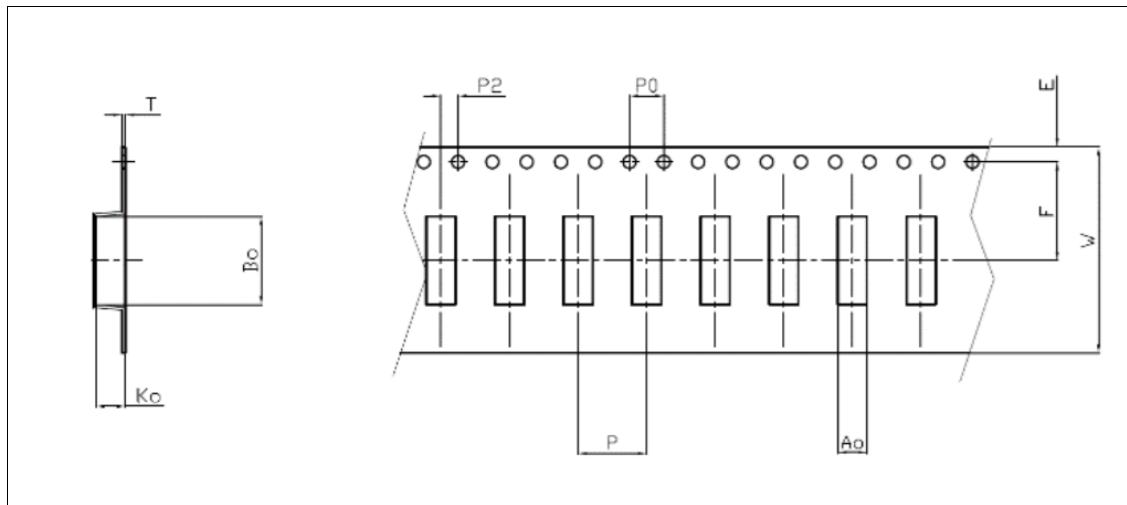

Plastic Tape specification (unit:mm)

Index	Ao	Bo	Ko	T	W
Dimension (mm)	3.3 ± 0.1	15.5 ± 0.1	1.3 ± 0.1	0.3 ± 0.05	24.0 ± 0.3
Index	E	F	P	P0	P2
Dimension (mm)	1.75 ± 0.1	11.0 ± 0.1	8.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.1

Reel dimensions

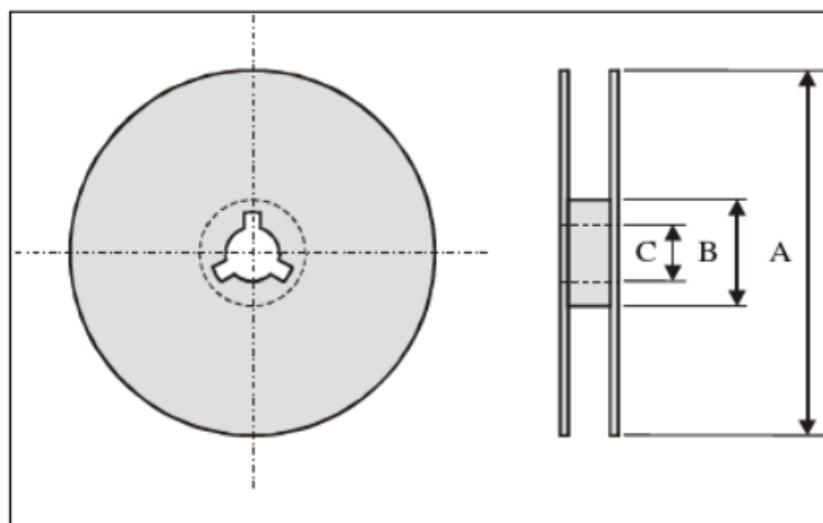

Index	A	B	C
Dimension(mm)	330	100	13.5

Typing Quantity: 2000 pieces per reel.

CAUTION OF HANDLING

Storage environment condition

Products should be stored in the warehouse on the following conditions:

CA-S01 Approval sheet

Temperature : -10°C~+40°C

Humidity : 30% to 70% relative humidity

Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.

Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.

Products should be storage under the airtight packaged condition.