


8 QINSHI RD QINSHI INDUSTRIAL PARK SANZAO TOWN
JINW AN DIST
ZHUHAI,GUANGDONG 519040 CHINA

F-type Bluetooth antenna specification

1. Antenna introduction

The Bluetooth antenna is directly used on the PCB board.

2. antenna shape

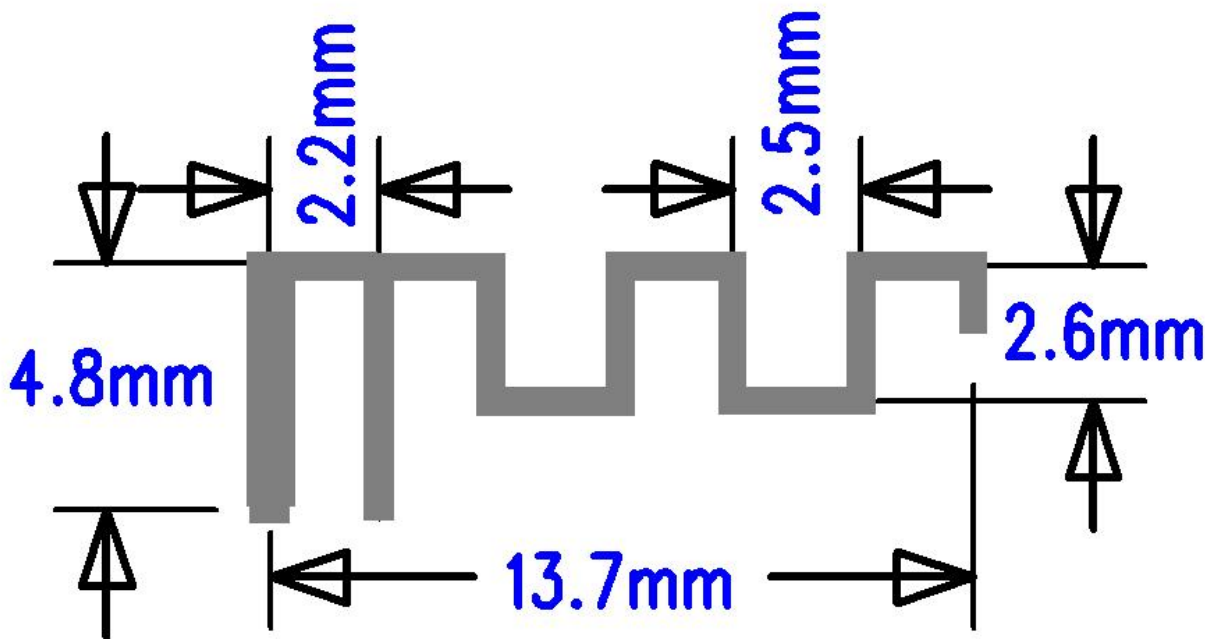

3. Antenna parameters

The Bluetooth antenna operates at 2400-2500MHz, and resonates in this band. The following table shows the main parameters of the antenna.

Bluetooth built-in antenna	
Frequency (MHz)	2400 ~ 2500 MHz
VSWR	≤ 1.92
Impedance	50 Ohm Nominal
Return Loss	-10 dB Max


Radiation	Omni-directional
Gain (Peak)	1.08443dBI
Polarization	Linear, Vertical
Admitted Power	2W
Connector	Tin

4. Antenna gain detection report


Spectrum Detector:	PK	Test Date :	June 8, 2013
Test By:	Andy	Temperature :	28°C
Test Result:	PASS	Humidity :	55 %
Modulation:	GFSK		

Frequency VNA (MHz)	E Total. dBI
2400MHz	0.0403503
2410MHz	0.0886264
2420MHz	0.267381
2430MHz	0.193012
2440MHz	0.26366
2450MHz	0.0723139
2460MHz	0.36895
2470MHz	0.551525
2480MHz	0.640702
2490MHz	1.05232
2500MHz	1.08443


Direction map:

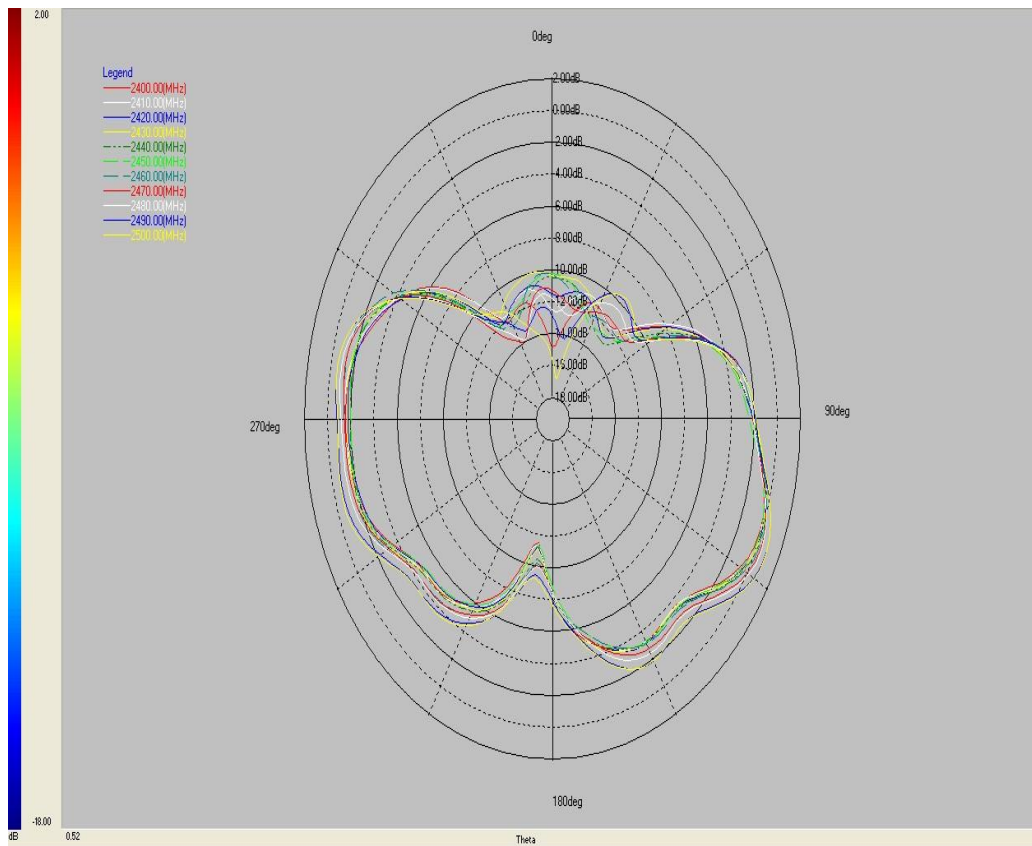

PHI 0 度

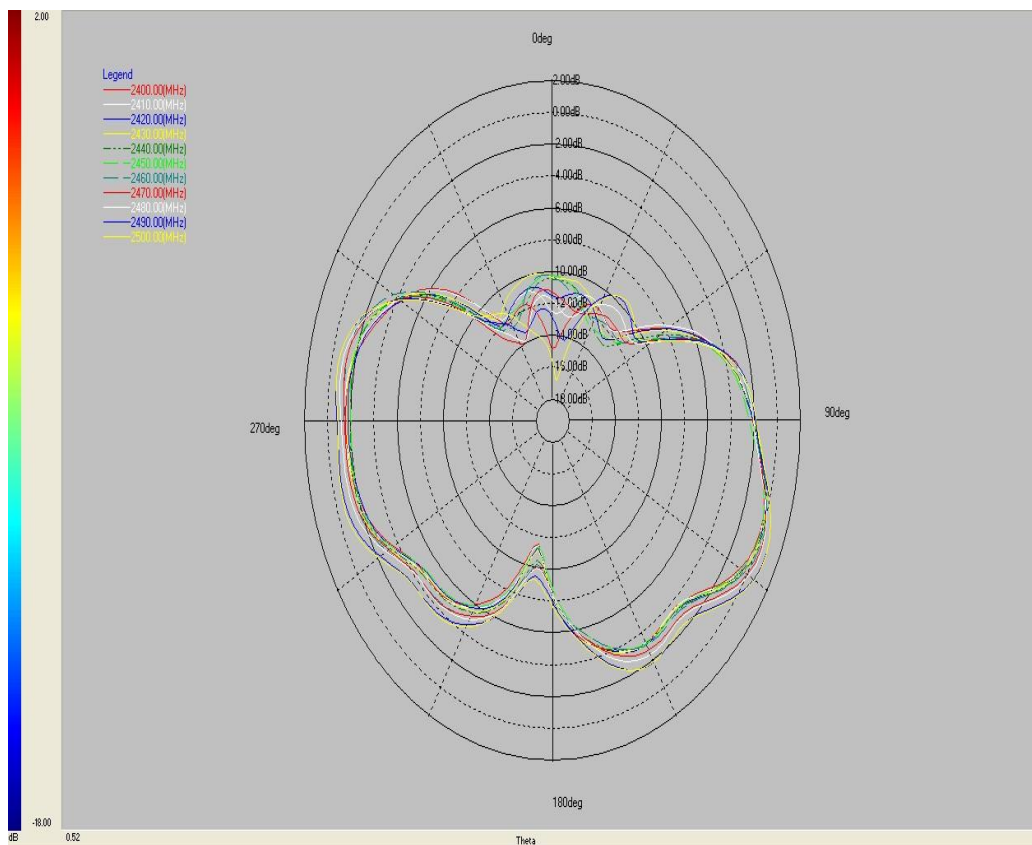


PHI 90 度

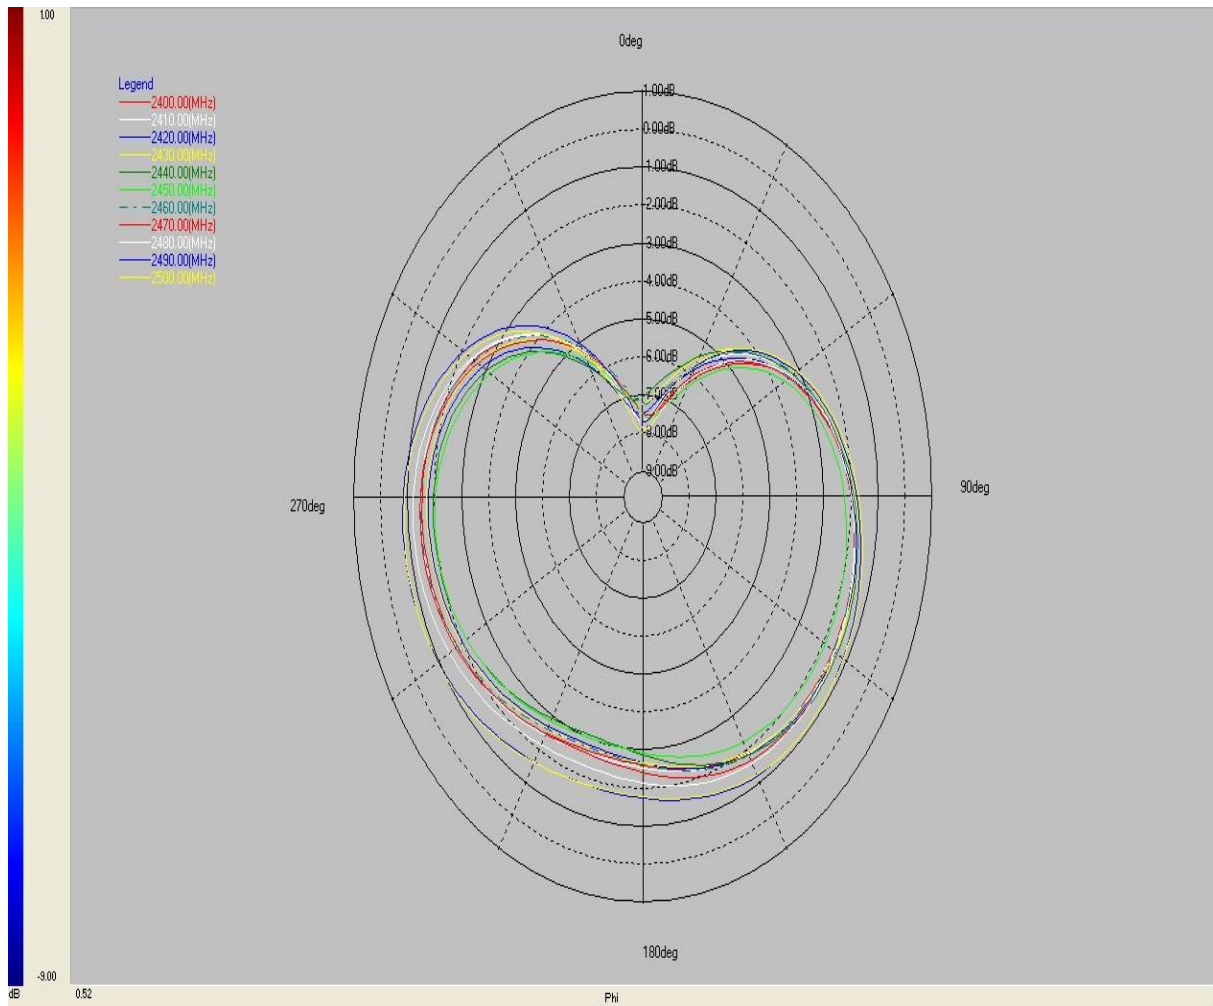

THETA 90 度

Standing wave ratio chart:

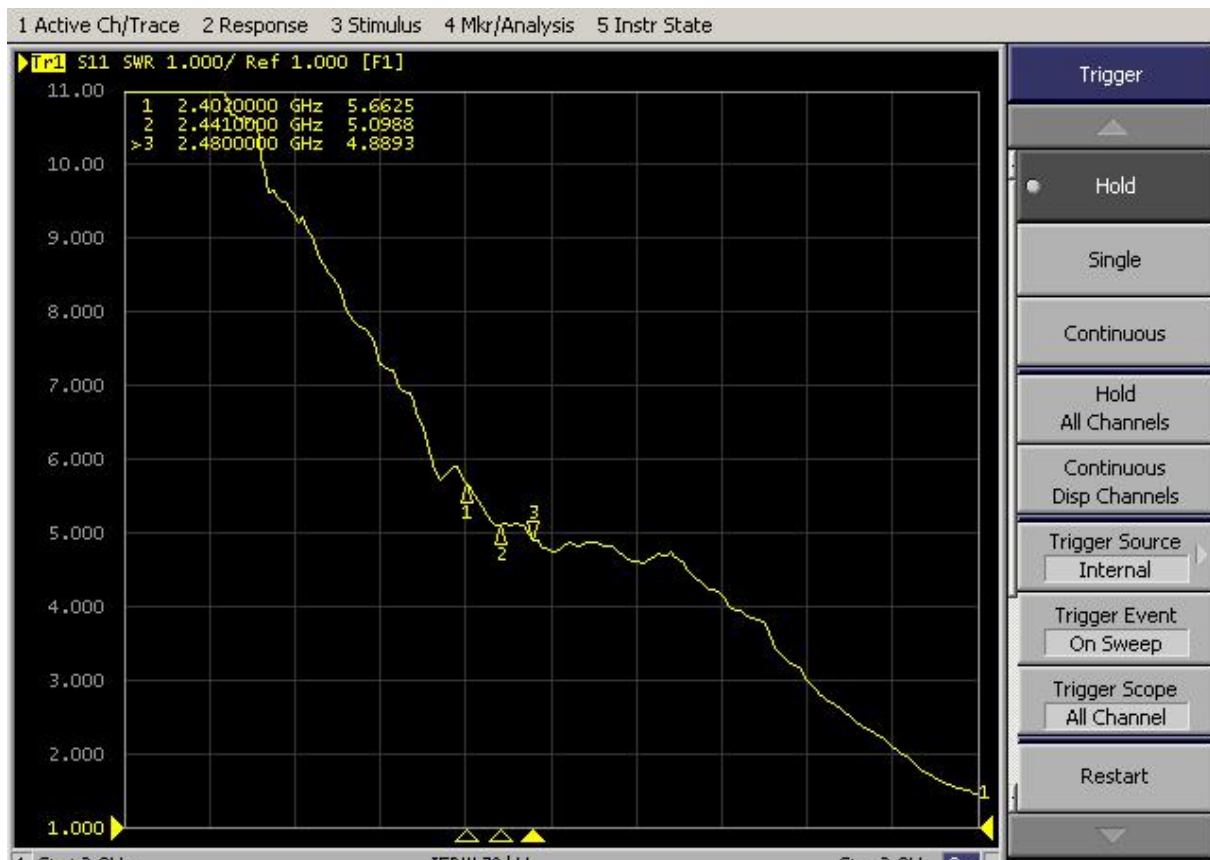

Product Description

The EUT is a short range, lower power, Splash designed as a Device. It is designed by way of utilizing the GFSK, 1/4Π-DQPSK and 8DPSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2400-2500MHz
- B). Modulation: GFSK, 1/4Π-DQPSK, 8DPSK
- C). Number of Channel: 79
- D). Channel space: 1MHz
- E). BIT Rate of Transmission: 1Mbps, 2Mbps, 3Mbps
- F). Antenna Type: PCB antenna
- G). Antenna **GAIN: 1.08443 dBI**