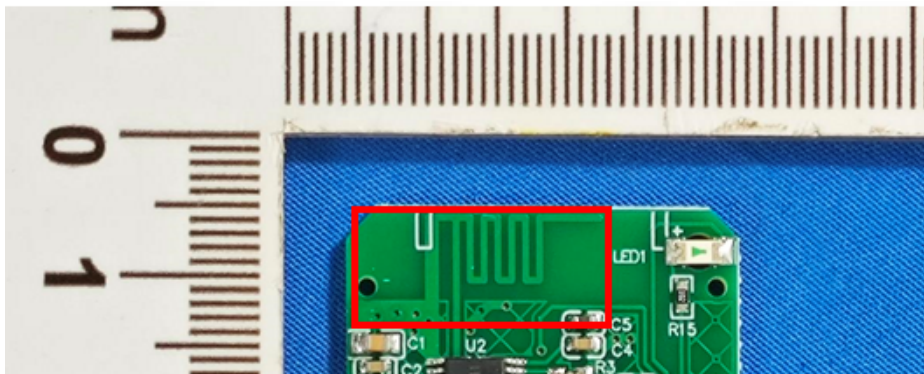

1. Description

Company : Shenzhen ATWE Antenna Co., Ltd

Gain: 2.5dBi




Type: PCB antenna

2. Location



3. Bluetooth TRP

Test	Bluetooth TRP
Result	
Frequency (MHz)	2478
TRP(dBm)	1.47
NHPRP(dBm) 45	0.28
MAX(dBm)	6.01
EIRP peak	6.01
Min(dBm)	-11.79
Attenuation Horizontal	41.18
Attenuation Vertical	41.17



4. Bluetooth TIS

Test	Bluetooth TIS
Result	
Frequency (MHz)	2478
TIS(dBm)	-85.72
NHPIS(dBm) 45	-84.50
RSSIAve	2.34

MaxPosRSSI	5.6
MaxPosSens	-89.07
MAX(dBm)	6.91
EIS peak	6.91
Min(dBm)	-10.87
Attenuation Horizontal	42.02
Attenuation Vertical	42.01

