



Report No.: BTEK231122011AE002

Page: 1 of 95

FCC ID: 2BDF9-W115KW

## TEST REPORT

**Application No.:**

BTEK231122011AE

**Applicant:**

Guangdong Fenergy Technology Co., Ltd

**Address of Applicant:**

Building 35, Zone 5, Huaide Cuigang Industrial Park, Fuyong Street, Bao 'an District, Shenzhen, China

**Manufacturer:**

Guangdong Fenergy Technology Co., Ltd

**Address of Manufacturer:**

Building 35, Zone 5, Huaide Cuigang Industrial Park, Fuyong Street, Bao 'an District, Shenzhen, China

**Factory:**

Guangdong Fenergy Technology Co., Ltd

**Address of Factory:**

Building 35, Zone 5, Huaide Cuigang Industrial Park, Fuyong Street, Bao 'an District, Shenzhen, China

**Equipment Under Test (EUT):****EUT Name:** Smart EV Charger**Model No.:** FE-W-US-B115D, XXX-W-US-XXXXX

(The first three 'X' represent the company name, which can be represented by letters A-Z; 'W' stands for wall-mounted, 'US' stands for the United States, and the fourth 'X' represents the housing type, which can be represented by the letters BCD; The fifth, sixth and seventh 'X' indicates the output power, which can be represented by the numbers 96 and 115; The last 'X' indicates the output plug type, which can be represented by the letter ABD.)

Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

**Trade Mark:**

N/A

**Standard(s) :**

47 CFR Part 15, Subpart C 15.247

**Date of Receipt:**

2023-11-28

**Date of Test:**

2023-11-28 to 2023-12-22

**Date of Issue:**

2024-01-29

**Test Result:**

Pass\*


\* In the configuration tested, the EUT complied with the standards specified above.

Damon Su  
EMC Laboratory Manager





Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2024-01-29		Original

Authorized for issue by			
		 Elma Yang /Project Engineer	
		 Carl Yang /Reviewer	



## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power		ANSI C63.10 (2013) Section 11.9.1.3	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

- Note:**

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

Model No.: FE-W-US-B115D, XXX-W-US-XXXXXX

(The first three 'X' represent the company name, which can be represented by letters A-Z; 'W' stands for wall-mounted, 'US' stands for the United States, and the fourth 'X' represents the housing type, which can be represented by the letters BCD; The fifth, sixth and seventh 'X' indicates the output power, which can be represented by the numbers 96 and 115; The last 'X' indicates the output plug type, which can be represented by the letter ABD.)

Only the model FE-W-US-B115D was tested. According to the declaration from the applicant, all of these models only the model name and appearance style are different, and everything else is the same. And parameter 48A and parameter 40A, the voltage is different because the input plug is inconsistent, 48A is the terminal, 40A is the plug.



### 3 Contents

	Page
<b>1 Cover Page .....</b>	<b>1</b>
<b>2 Test Summary .....</b>	<b>3</b>
<b>3 Contents .....</b>	<b>4</b>
<b>4 General Information .....</b>	<b>6</b>
4.1 Details of E.U.T .....	6
4.2 Description of Support Units .....	6
4.3 Measurement Uncertainty .....	6
4.4 Test Location.....	7
4.5 Deviation from Standards.....	7
4.6 Abnormalities from Standard Conditions .....	7
<b>5 Equipment List.....</b>	<b>8</b>
<b>6 Radio Spectrum Technical Requirement .....</b>	<b>10</b>
6.1 Antenna Requirement .....	10
6.1.1 Test Requirement: .....	10
6.1.2 Conclusion .....	10
<b>7 Radio Spectrum Matter Test Results.....</b>	<b>11</b>
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	11
7.1.1 E.U.T. Operation.....	11
7.1.2 Test Mode Description.....	11
7.1.3 Test Setup Diagram.....	12
7.1.4 Measurement Procedure and Data .....	12
7.2 Conducted Average Output Power .....	15
7.2.1 E.U.T. Operation .....	15
7.2.2 Test Mode Description .....	15
7.2.3 Test Setup Diagram.....	16
7.2.4 Measurement Procedure and Data .....	16
7.3 Minimum 6dB Bandwidth .....	17
7.3.1 E.U.T. Operation .....	17
7.3.2 Test Mode Description .....	17
7.3.3 Test Setup Diagram.....	17
7.3.4 Measurement Procedure and Data .....	17
7.4 Power Spectrum Density.....	18
7.4.1 E.U.T. Operation .....	18
7.4.2 Test Mode Description .....	18
7.4.3 Test Setup Diagram.....	18
7.4.4 Measurement Procedure and Data .....	18
7.5 Conducted Band Edges Measurement .....	19
7.5.1 E.U.T. Operation.....	19
7.5.2 Test Mode Description .....	19
7.5.3 Test Setup Diagram.....	20
7.5.4 Measurement Procedure and Data .....	20
7.6 Conducted Spurious Emissions .....	21
7.6.1 E.U.T. Operation .....	21
7.6.2 Test Mode Description .....	21
7.6.3 Test Setup Diagram.....	22
7.6.4 Measurement Procedure and Data .....	22
7.7 Radiated Emissions which fall in the restricted bands.....	23
7.7.1 E.U.T. Operation .....	23



7.7.2 Test Mode Description .....	23
7.7.3 Test Setup Diagram.....	24
7.7.4 Measurement Procedure and Data .....	24
7.8 Radiated Spurious Emissions (Below 1GHz).....	29
7.8.1 E.U.T. Operation.....	29
7.8.2 Test Mode Description.....	29
7.8.3 Test Setup Diagram.....	30
7.8.4 Measurement Procedure and Data .....	30
7.9 Radiated Spurious Emissions (Above 1GHz).....	33
7.9.1 E.U.T. Operation.....	33
7.9.2 Test Mode Description.....	33
7.9.3 Test Setup Diagram.....	34
7.9.4 Measurement Procedure and Data .....	35
<b>8 Test Setup Photo .....</b>	<b>43</b>
<b>9 EUT Constructional Details (EUT Photos) .....</b>	<b>44</b>
<b>10 Appendix .....</b>	<b>45</b>



## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	48A: Input/Output power: 110-240V~48A 60Hz 1-phase Charging capacity: Up to 11.52KW 40A: Input/Output power: 240V~40A 60Hz 1-phase Charging capacity: Up to 9.6KW
Cable(s):	N/A
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Numbers:	802.11b/g, 802.11n HT20: 11 Channels 802.11n HT40: 7 Channels
Channel Spacing:	5MHz
Antenna Type:	PCB ANT
Antenna Gain:	2.21 dBi
Hardware Version:	N/A
Software and Firmware Version:	N/A
Remark: The information in this section is provided by the applicant or manufacturer, BANTEK is not liable to the accuracy, suitability, reliability or/and integrity of the information.	
Sample No.:	BTEK231122011AE-01

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Corrugated resistance adjustable load box	Green work electron	AC220V35A	/

### 4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	±3.12dB
Conducted Peak Output Power	± 0.75dB
Minimum 6dB Bandwidth	± 3%
Power Spectrum Density	± 0.35dB
Conducted Band Edges Measurement	± 0.75dB
Conducted Spurious Emissions	± 0.75dB
Radiated Emissions which fall in the restricted bands	±5.08dB (1GHz-6GHz); ±5.14dB(above 6GHz)
Radiated Spurious Emissions (Below 1GHz)	±5.06dB (3m); ±4.46dB (10m)
Radiated Spurious Emissions (Above 1GHz)	±5.08dB (1GHz-6GHz); ±5.14dB(above 6GHz)



#### 4.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.,

A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518103

Tel:0755-2334 4200 Fax: 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

#### 4.5 Deviation from Standards

None

#### 4.6 Abnormalities from Standard Conditions

None



## 5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Shielding Room	YIHENG ENECLTRONIC	9*5*3.3	YH-BT-220304-04	2022-03-03	2025-03-02
EMI Test Receiver	Rohde&Schwarz	ESCI	101021	2023-06-12	2024-06-11
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	N/A	N/A
LISN	Rohde&Schwarz	ENV216	101472	2023-06-12	2024-06-11
LISN	Schwarzbeck	NSLK 8128	05127	2023-06-12	2024-06-11

RF Conducted					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Shielding Room	YIHENG ENECLTRONIC	5.5*3.1*3	YH-BT- 220304-03	2022-03-03	2025-03-02
EXA Signal Analyzer	KEYSIGHT	N9020A	MY54230486	2023-06-12	2024-06-11
DC Power Supply	E3632A	E3642A	KR75304416	2023-06-12	2024-06-11
Attenuator	RswTech	SMA-JK-6dB	N/A	2023-06-12	2024-06-11
Attenuator	RswTech	SMA-JK-3dB	N/A	2023-06-12	2024-06-11
RF Control Unit	Techy	TR1029-1	N/A	2023-06-12	2024-06-11
RF Sensor Unit	Techy	TR1029-2	N/A	2023-06-12	2024-06-11
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	141258	2023-06-12	2024-06-11
MXG Vector Signal Generator	Agilent	N5182A	US46240522	2023-06-12	2024-06-11
Programmable Temperature&Humidity Chamber	GRT	GR-HWX1000	GR22051001	2023-06-12	2024-06-11
Measurement Software	TACHOY	RF TestSoft V2.0.0.0	N/A	N/A	N/A

RSE					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	YIHENG ENECLTRONIC	966	YH-BT- 220304-01	2022-05-06	2025-05-05
EMI Test Receiver	Rohde&Schwarz	ESCI	100694	2023-06-12	2024-06-11
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	01324	2022-06-15	2025-06-14
Pre-Amplifier	Schwarzbeck	BBV 9745	#180	2023-06-12	2024-06-11
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	2023-06-12	2024-06-11
EXA Signal Analyzer	Keysight	N9020A	MY54440290	2023-06-12	2024-06-11
Horn Antenna	Schwarzbeck	BBHA 9120D	02695	2022-06-15	2025-06-14
Pre-Amplifier	Tonscend	TAP0118045	AP20K806109	2023-06-12	2024-06-11
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2022-06-15	2025-06-14





# Shenzhen BANTEK Testing Co., Ltd.

Report No.: BTEK231122011AE002

Page: 9 of 95

Low Noise Pre-amplifier	SKET	LNPA-1840G-50	SK2022032902	2023-06-12	2024-06-11
Signal analyzer	ROHDE&SCHWARZ	FSQ40	100010	2023-06-12	2024-06-11
Loop Antenna	ETS	6502	00201177	2022-06-15	2025-06-14

## General used equipment

Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Humidity/Temperature/B arometric Pressure Indicator	KUMAR	F132	N/A	2023-06-12	2024-06-11
Humidity/Temperature/B arometric Pressure Indicator	KUMAR	F132	N/A	2023-06-12	2024-06-11



## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.


15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.21dBi.

Please refer to internal photos.

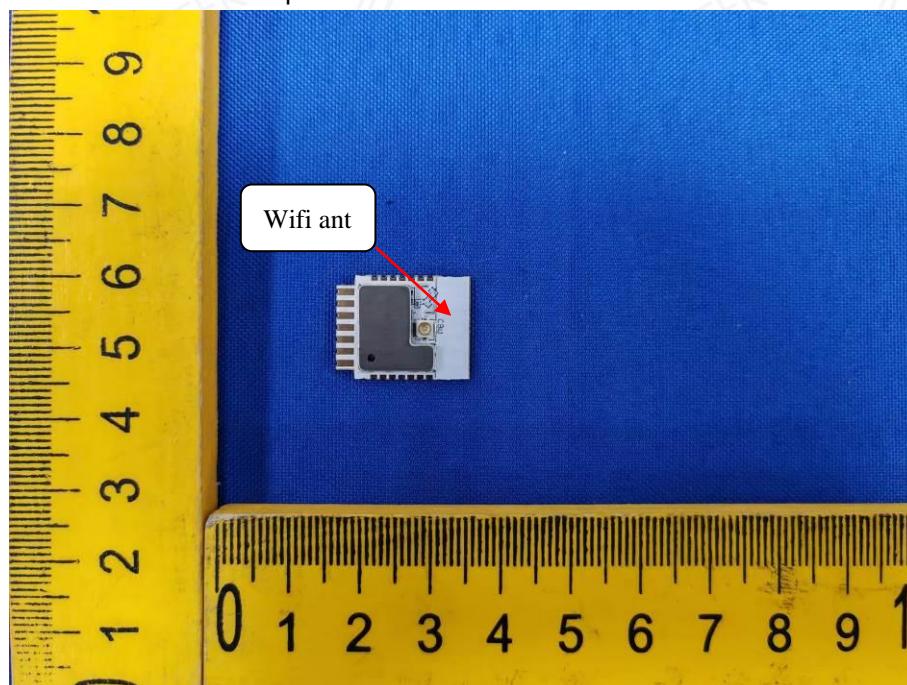

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

#### 7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 22.2 °C      Humidity: 60.5 % RH      Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Mode Final test	Mode Code	Description
Final test	01	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



### 7.1.3 Test Setup Diagram

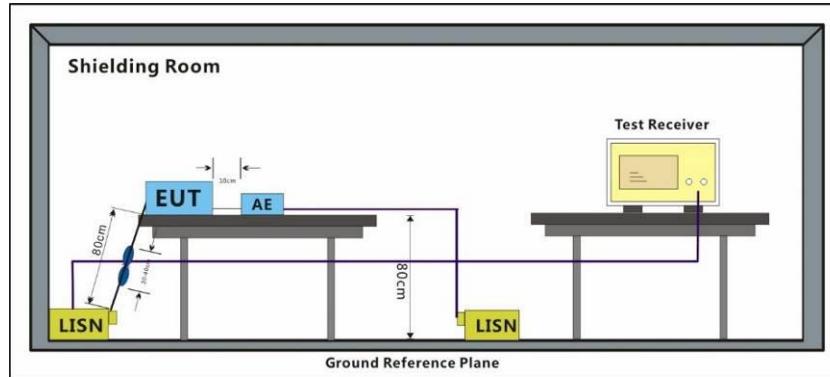

### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\text{ohm}/50\mu\text{H} + 5\text{ohm}$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.




Test Mode: 01; Line: Live line; Modulation:802.11b; Bandwidth:20MHz; Channel:Low



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2328	40.15	9.55	49.70	62.35	-12.65	QP	P	
2	0.2328	19.35	9.55	28.90	52.35	-23.45	AVG	P	
3	0.5792	35.58	9.62	45.20	56.00	-10.80	QP	P	
4	0.5792	14.53	9.62	24.15	46.00	-21.85	AVG	P	
5 *	1.4052	37.69	9.81	47.50	56.00	-8.50	QP	P	
6	1.4144	18.91	9.81	28.72	46.00	-17.28	AVG	P	
7	3.4845	35.38	9.92	45.30	56.00	-10.70	QP	P	
8	3.4980	18.96	9.91	28.87	46.00	-17.13	AVG	P	
9	8.0790	23.57	10.18	33.75	50.00	-16.25	AVG	P	
10	8.1195	40.02	10.18	50.20	60.00	-9.80	QP	P	
11	13.1370	39.73	10.17	49.90	60.00	-10.10	QP	P	
12	13.1370	25.85	10.17	36.02	50.00	-13.98	AVG	P	



Test Mode: 01; Line: Neutral Line; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

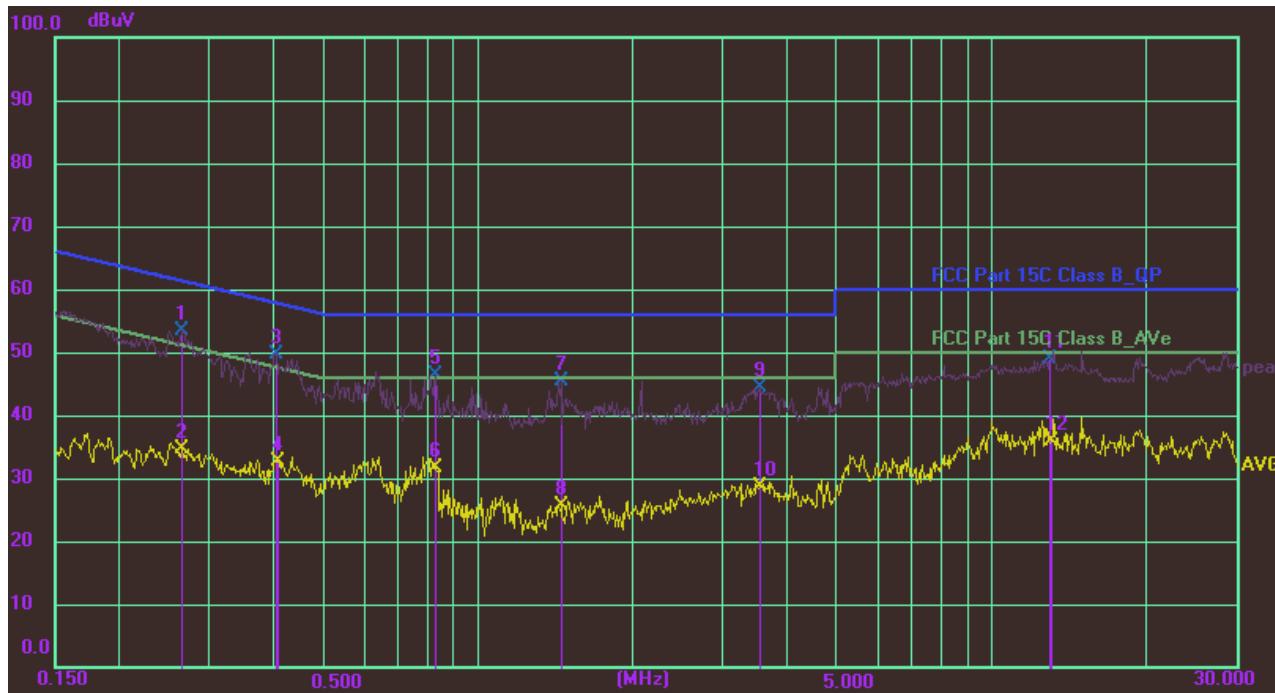

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.2644	43.92	9.58	53.50	61.29	-7.79	QP	P	
2	0.2644	25.02	9.58	34.60	51.29	-16.69	AVG	P	
3	0.4020	40.11	9.59	49.70	57.81	-8.11	QP	P	
4	0.4061	23.04	9.59	32.63	47.73	-15.10	AVG	P	
5	0.8295	36.58	9.72	46.30	56.00	-9.70	QP	P	
6	0.8295	21.98	9.72	31.70	46.00	-14.30	AVG	P	
7	1.4500	35.48	9.82	45.30	56.00	-10.70	QP	P	
8	1.4500	15.84	9.82	25.66	46.00	-20.34	AVG	P	
9	3.5520	34.45	9.95	44.40	56.00	-11.60	QP	P	
10	3.5520	18.71	9.95	28.66	46.00	-17.34	AVG	P	
11	12.9885	38.81	10.19	49.00	60.00	-11.00	QP	P	
12	13.1190	25.60	10.19	35.79	50.00	-14.21	AVG	P	

**Note:**

- 1) Pre-scan all modes and recorded the worst case results in this report(Low Channel).
- 2) Level= Reading+ Factor; Margin=Level-limit.



## 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.3

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 20.5 °C      Humidity: 50.0 % RH      Atmospheric Pressure: 1010 mbar

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



### 7.2.3 Test Setup Diagram

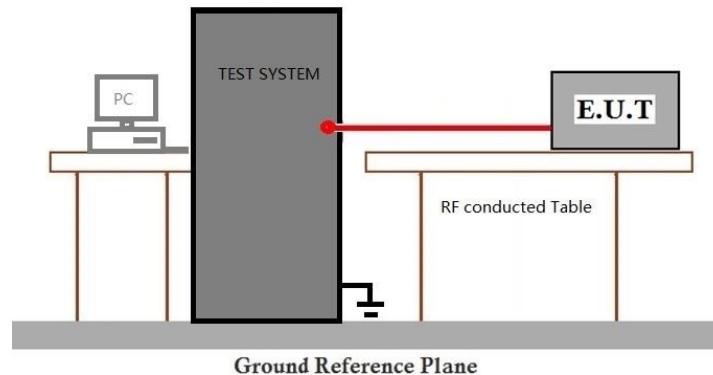

### 7.2.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



### 7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)  
Test Method: ANSI C63.10 (2013) Section 11.8.1  
Limit:  $\geq 500$  kHz


#### 7.3.1 E.U.T. Operation

Operating Environment:  
Temperature: 20.5 °C      Humidity: 50.0 % RH      Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

#### 7.3.3 Test Setup Diagram

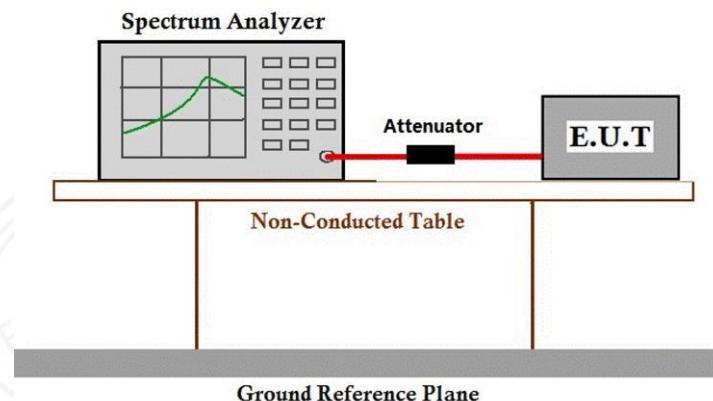

#### 7.3.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



## 7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C      Humidity: 50.0 % RH      Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

### 7.4.3 Test Setup Diagram

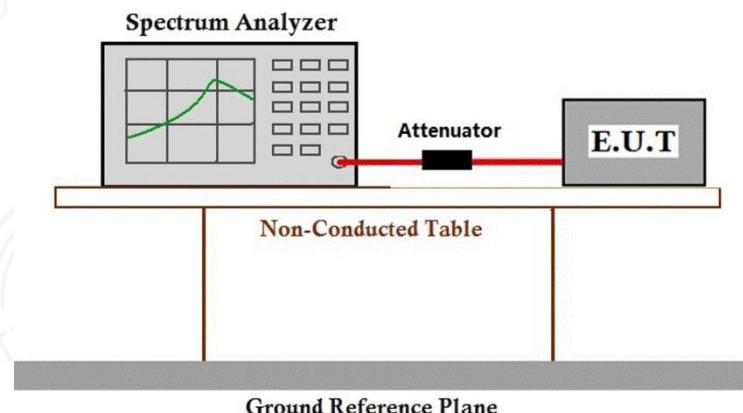

### 7.4.4 Measurement Procedure and Data

cable loss=0.9dB

- Please Refer to Appendix for Details



## 7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 20.5 °C      Humidity: 50.0 % RH      Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



### 7.5.3 Test Setup Diagram

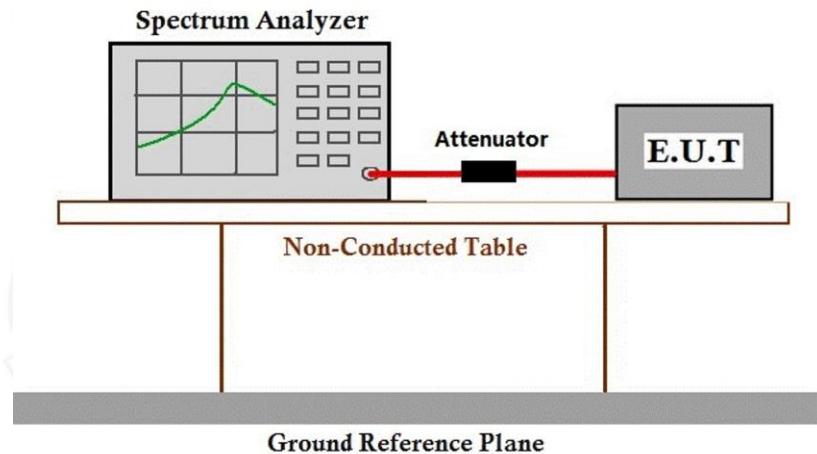

### 7.5.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



## 7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 20.5 °C      Humidity: 50.0 % RH      Atmospheric Pressure: 1010 mbar

### 7.6.2 Test Mode Description

Pre-scan / Mode Final test	Mode Code	Description
Pre-scan	00	TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



### 7.6.3 Test Setup Diagram

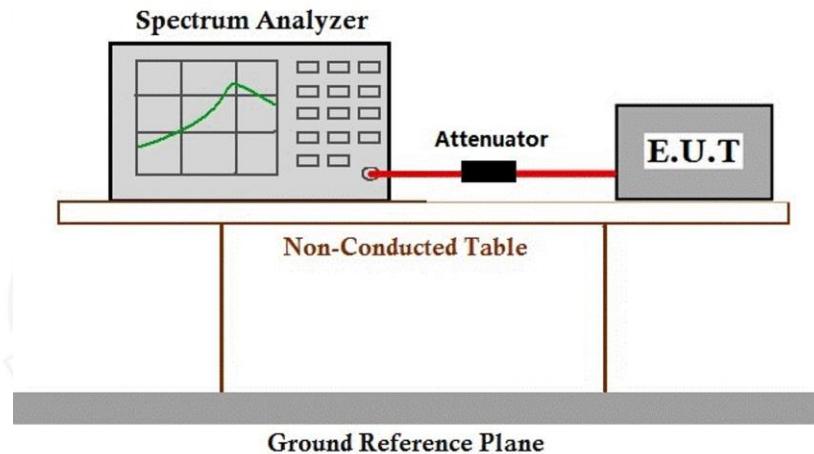

### 7.6.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



## 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.7.1 E.U.T. Operation

Operating Environment:


Temperature: 21.4 °C      Humidity: 54.3 % RH      Atmospheric Pressure: 1010 mbar

### 7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode _Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode _Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



### 7.7.3 Test Setup Diagram

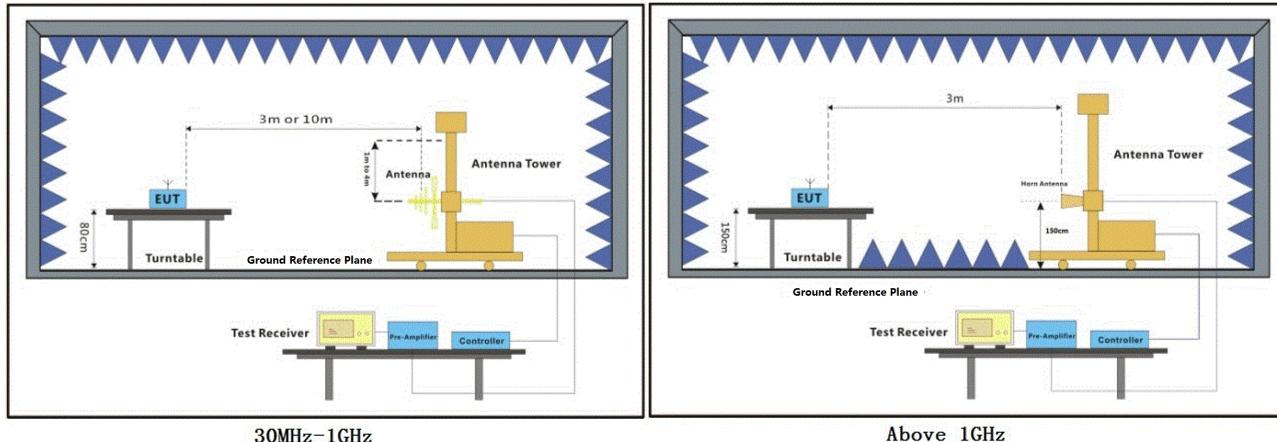

### 7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	68.04	-30.59	37.45	74.00	-36.55	peak	P
2	2390.000	69.51	-30.49	39.02	74.00	-34.98	peak	P
3	2400.000	77.73	-30.48	47.25	74.00	-26.75	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	68.28	-30.59	37.69	74.00	-36.31	peak	P
2	2390.000	70.10	-30.49	39.61	74.00	-34.39	peak	P
3	2400.000	78.34	-30.48	47.86	74.00	-26.14	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	80.85	-30.39	50.46	74.00	-23.54	peak	P
2	2500.000	71.41	-30.37	41.04	74.00	-32.96	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	80.79	-30.39	50.40	74.00	-23.60	peak	P
2	2500.000	71.06	-30.37	40.69	74.00	-33.31	peak	P



Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin( dB)	Detector	P/F
1	2310.000	67.72	-30.59	37.13	74.00	-36.87	peak	P
2	2390.000	70.85	-30.49	40.36	74.00	-33.64	peak	P
3	2400.000	77.67	-30.48	47.19	74.00	-26.81	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin( dB)	Detector	P/F
1	2310.000	68.10	-30.59	37.51	74.00	-36.49	peak	P
2	2390.000	69.45	-30.49	38.96	74.00	-35.04	peak	P
3	2400.000	77.64	-30.48	47.16	74.00	-26.84	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin( dB)	Detector	P/F
1	2483.500	79.25	-30.39	48.86	74.00	-25.14	peak	P
2	2500.000	71.97	-30.37	41.60	74.00	-32.40	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin( dB)	Detector	P/F
1	2483.500	79.82	-30.39	49.43	74.00	-24.57	peak	P
2	2500.000	71.55	-30.37	41.18	74.00	-32.82	peak	P



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2310.000	67.43	-30.59	36.84	74.00	-37.16	peak	P
2	2390.000	70.77	-30.49	40.28	74.00	-33.72	peak	P
3	2400.000	78.97	-30.48	48.49	74.00	-25.51	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2310.000	68.99	-30.59	38.40	74.00	-35.60	peak	P
2	2390.000	69.10	-30.49	38.61	74.00	-35.39	peak	P
3	2400.000	78.14	-30.48	47.66	74.00	-26.34	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2483.500	79.82	-30.39	49.43	74.00	-24.57	peak	P
2	2500.000	71.33	-30.37	40.96	74.00	-33.04	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2483.500	80.88	-30.39	50.49	74.00	-23.51	peak	P
2	2500.000	70.76	-30.37	40.39	74.00	-33.61	peak	P



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2310.000	67.41	-30.59	36.82	74.00	-37.18	peak	P
2	2390.000	70.27	-30.49	39.78	74.00	-34.22	peak	P
3	2400.000	79.02	-30.48	48.54	74.00	-25.46	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2310.000	68.73	-30.59	38.14	74.00	-35.86	peak	P
2	2390.000	70.87	-30.49	40.38	74.00	-33.62	peak	P
3	2400.000	77.78	-30.48	47.30	74.00	-26.70	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2483.500	80.82	-30.39	50.43	74.00	-23.57	peak	P
2	2500.000	71.94	-30.37	41.57	74.00	-32.43	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2483.500	79.63	-30.39	49.24	74.00	-24.76	peak	P
2	2500.000	71.63	-30.37	41.26	74.00	-32.74	peak	P

Note: Level = Reading level + Factor

Factor= Antenna Factor+ Cable Loss-Preamp Factor



## 7.8 Radiated Spurious Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 25.5 °C      Humidity: 68.6 % RH      Atmospheric Pressure: 1010 mbar

### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode _Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode _Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



### 7.8.3 Test Setup Diagram

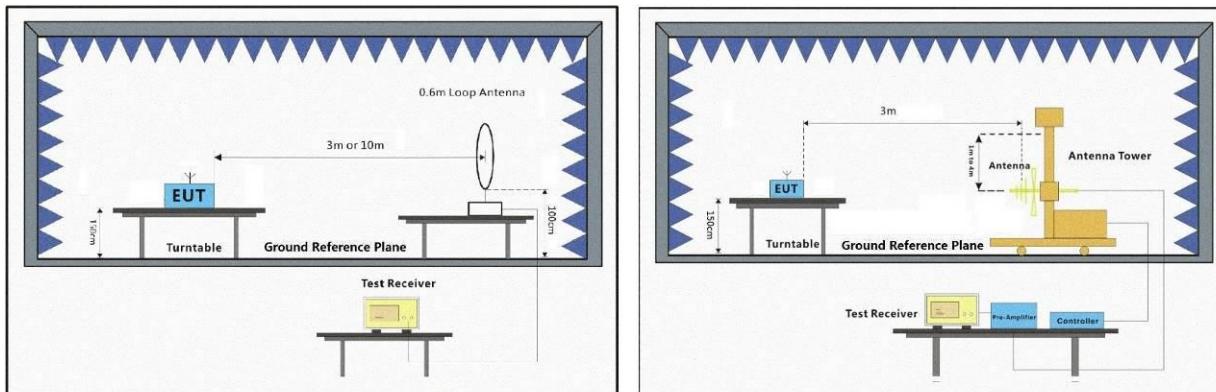

### 7.8.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) Through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 3) Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.1550	48.49	-17.19	31.30	40.00	-8.70	QP
2 *	72.8465	53.45	-20.65	32.80	40.00	-7.20	QP
3	109.7960	53.00	-20.00	33.00	43.50	-10.50	QP
4	202.8103	56.92	-21.32	35.60	43.50	-7.90	QP
5	283.9791	52.34	-18.14	34.20	46.00	-11.80	QP
6	584.7894	43.17	-12.07	31.10	46.00	-14.90	QP



Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

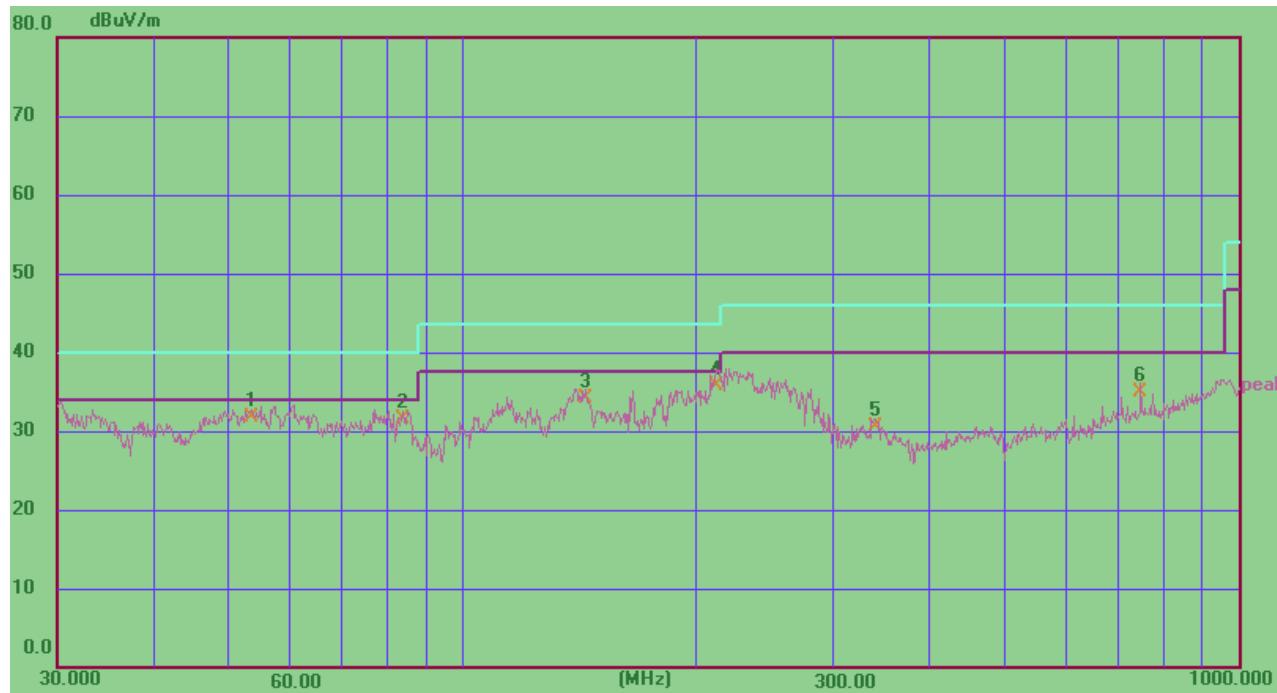**Note:**

- 1) Pre-scan all modes and recorded the worst case results in this report (Low Channel).
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) Level= Reading+ Factor, Margin= Level- Limit, Factor= Antenna Factor Cable Loss-Preamp Factor



## 7.9 Radiated Spurious Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.9.1 E.U.T. Operation

Operating Environment:


Temperature: 21.4 °C      Humidity: 54.3 % RH      Atmospheric Pressure: 1010 mbar

### 7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode _Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	Charge + TX mode _Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



### 7.9.3 Test Setup Diagram

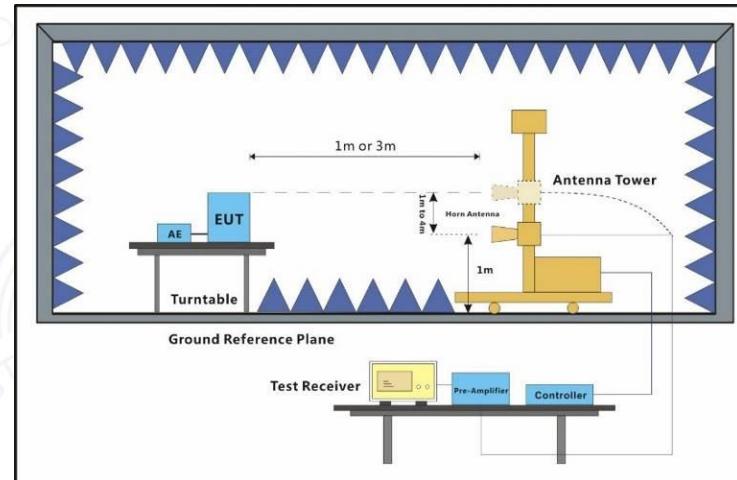

#### 7.9.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) The field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2913.786	69.76	-30.04	39.71	74.00	-34.29	peak	P
2	4277.797	67.27	-29.86	37.40	74.00	-36.60	peak	P
3	6084.958	65.10	-25.78	39.32	74.00	-34.68	peak	P
4	8645.255	68.79	-25.52	43.28	74.00	-30.72	peak	P
5	11048.035	67.70	-23.38	44.32	74.00	-29.68	peak	P
6	14217.469	70.47	-20.73	49.74	74.00	-24.26	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2972.992	67.65	-30.09	37.56	74.00	-36.44	peak	P
2	4313.908	69.49	-29.61	39.88	74.00	-34.12	peak	P
3	6352.337	66.51	-26.21	40.30	74.00	-33.70	peak	P
4	8575.430	68.83	-25.66	43.17	74.00	-30.83	peak	P
5	11286.695	68.47	-23.23	45.25	74.00	-28.75	peak	P
6	14955.845	70.68	-19.53	51.15	74.00	-22.85	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2914.402	69.09	-30.02	39.07	74.00	-34.93	peak	P
2	4276.457	67.77	-29.01	38.75	74.00	-35.25	peak	P
3	6086.172	64.83	-24.73	40.10	74.00	-33.90	peak	P
4	8645.095	70.19	-25.72	44.47	74.00	-29.53	peak	P
5	11047.172	68.84	-23.95	44.89	74.00	-29.11	peak	P
6	14218.203	71.14	-20.46	50.68	74.00	-23.32	peak	P



Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2972.852	66.14	-28.61	37.53	74.00	-36.47	peak	P
2	4312.729	69.39	-29.29	40.10	74.00	-33.90	peak	P
3	6353.251	67.89	-25.66	42.22	74.00	-31.78	peak	P
4	8575.441	68.86	-24.99	43.87	74.00	-30.13	peak	P
5	11286.655	68.83	-23.91	44.92	74.00	-29.08	peak	P
6	14956.668	71.37	-20.44	50.93	74.00	-23.07	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2913.756	69.00	-29.36	39.63	74.00	-34.37	peak	P
2	4276.387	67.99	-29.67	38.32	74.00	-35.68	peak	P
3	6086.431	65.48	-25.64	39.84	74.00	-34.16	peak	P
4	8646.546	69.76	-24.48	45.28	74.00	-28.72	peak	P
5	11046.396	67.20	-23.49	43.71	74.00	-30.29	peak	P
6	14218.868	70.17	-20.47	49.70	74.00	-24.30	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2973.171	67.93	-29.83	38.10	74.00	-35.90	peak	P
2	4314.071	69.22	-28.95	40.27	74.00	-33.73	peak	P
3	6352.694	68.13	-25.38	42.76	74.00	-31.24	peak	P
4	8576.177	70.47	-25.48	44.99	74.00	-29.01	peak	P
5	11285.954	67.49	-23.91	43.58	74.00	-30.42	peak	P
6	14955.683	70.97	-21.14	49.83	74.00	-24.17	peak	P



Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2915.275	70.44	-29.33	41.11	74.00	-32.89	peak	P
2	4277.903	67.67	-29.49	38.18	74.00	-35.82	peak	P
3	6085.950	65.52	-24.33	41.18	74.00	-32.82	peak	P
4	8646.117	69.03	-24.18	44.85	74.00	-29.15	peak	P
5	11046.984	68.93	-23.06	45.87	74.00	-28.13	peak	P
6	14217.558	70.78	-20.74	50.04	74.00	-23.96	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2974.206	67.79	-29.95	37.84	74.00	-36.16	peak	P
2	4312.234	69.52	-28.61	40.91	74.00	-33.09	peak	P
3	6353.613	67.78	-26.39	41.40	74.00	-32.60	peak	P
4	8576.266	68.94	-25.96	42.98	74.00	-31.02	peak	P
5	11285.789	67.54	-24.20	43.34	74.00	-30.66	peak	P
6	14955.743	70.85	-20.39	50.46	74.00	-23.54	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2914.973	68.99	-28.99	40.00	74.00	-34.00	peak	P
2	4276.549	69.01	-29.38	39.63	74.00	-34.37	peak	P
3	6086.207	64.55	-25.50	39.05	74.00	-34.95	peak	P
4	8645.625	68.80	-24.64	44.15	74.00	-29.85	peak	P
5	11047.314	67.90	-23.81	44.09	74.00	-29.91	peak	P
6	14217.956	69.99	-21.58	48.42	74.00	-25.58	peak	P



Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2972.354	66.81	-29.33	37.48	74.00	-36.52	peak	P
2	4313.086	68.87	-28.48	40.39	74.00	-33.61	peak	P
3	6352.830	68.37	-24.42	43.95	74.00	-30.05	peak	P
4	8576.493	70.14	-24.67	45.46	74.00	-28.54	peak	P
5	11287.020	68.35	-23.29	45.06	74.00	-28.94	peak	P
6	14954.980	71.65	-19.66	51.99	74.00	-22.01	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2915.302	68.90	-30.33	38.57	74.00	-35.43	peak	P
2	4276.161	67.35	-29.19	38.16	74.00	-35.84	peak	P
3	6084.610	64.66	-24.65	40.01	74.00	-33.99	peak	P
4	8645.175	70.79	-25.49	45.29	74.00	-28.71	peak	P
5	11048.120	67.19	-23.50	43.70	74.00	-30.30	peak	P
6	14218.182	71.11	-20.82	50.29	74.00	-23.71	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2974.229	67.64	-29.32	38.31	74.00	-35.69	peak	P
2	4312.411	68.48	-27.94	40.54	74.00	-33.46	peak	P
3	6354.103	67.43	-25.76	41.67	74.00	-32.33	peak	P
4	8576.301	70.46	-25.24	45.23	74.00	-28.77	peak	P
5	11286.731	68.43	-23.54	44.90	74.00	-29.10	peak	P
6	14956.395	70.25	-20.11	50.13	74.00	-23.87	peak	P



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2914.062	70.10	-30.59	39.51	74.00	-34.49	peak	P
2	4277.961	67.49	-28.76	38.73	74.00	-35.27	peak	P
3	6085.144	64.54	-25.68	38.85	74.00	-35.15	peak	P
4	8646.579	69.75	-24.31	45.44	74.00	-28.56	peak	P
5	11047.164	67.74	-22.53	45.21	74.00	-28.79	peak	P
6	14217.800	70.76	-21.60	49.16	74.00	-24.84	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2972.808	67.85	-28.78	39.07	74.00	-34.93	peak	P
2	4312.669	68.04	-28.05	39.99	74.00	-34.01	peak	P
3	6352.693	67.50	-24.65	42.85	74.00	-31.15	peak	P
4	8576.122	70.24	-25.76	44.49	74.00	-29.51	peak	P
5	11286.274	68.47	-22.58	45.89	74.00	-28.11	peak	P
6	14955.539	70.20	-19.52	50.68	74.00	-23.32	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2914.158	70.49	-29.49	41.01	74.00	-32.99	peak	P
2	4277.661	69.16	-28.42	40.73	74.00	-33.27	peak	P
3	6086.257	64.29	-24.39	39.90	74.00	-34.10	peak	P
4	8645.565	69.56	-24.15	45.41	74.00	-28.59	peak	P
5	11047.331	68.79	-23.98	44.81	74.00	-29.19	peak	P
6	14217.581	70.16	-21.97	48.19	74.00	-25.81	peak	P



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2973.517	66.35	-29.48	36.87	74.00	-37.13	peak	P
2	4312.474	68.19	-28.81	39.38	74.00	-34.62	peak	P
3	6352.286	67.98	-25.19	42.79	74.00	-31.21	peak	P
4	8576.878	68.86	-25.51	43.35	74.00	-30.65	peak	P
5	11286.557	68.10	-23.31	44.79	74.00	-29.21	peak	P
6	14955.592	71.21	-19.54	51.67	74.00	-22.33	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2914.477	69.41	-29.90	39.51	74.00	-34.49	peak	P
2	4276.192	68.80	-27.93	40.87	74.00	-33.13	peak	P
3	6084.895	65.20	-25.23	39.96	74.00	-34.04	peak	P
4	8645.455	70.00	-24.11	45.89	74.00	-28.11	peak	P
5	11046.759	67.04	-22.57	44.47	74.00	-29.53	peak	P
6	14218.305	70.81	-20.23	50.58	74.00	-23.42	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2972.958	67.51	-29.31	38.21	74.00	-35.79	peak	P
2	4313.851	67.95	-29.16	38.78	74.00	-35.22	peak	P
3	6353.517	66.88	-25.72	41.15	74.00	-32.85	peak	P
4	8575.593	70.10	-26.06	44.04	74.00	-29.96	peak	P
5	11285.244	68.53	-22.67	45.87	74.00	-28.13	peak	P
6	14956.573	70.48	-19.70	50.78	74.00	-23.22	peak	P



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2915.332	70.30	-29.17	41.13	74.00	-32.87	peak	P
2	4276.227	68.46	-27.97	40.49	74.00	-33.51	peak	P
3	6084.494	64.20	-24.91	39.28	74.00	-34.72	peak	P
4	8645.960	70.57	-24.17	46.40	74.00	-27.60	peak	P
5	11046.977	67.26	-22.53	44.73	74.00	-29.27	peak	P
6	14218.768	71.79	-21.68	50.11	74.00	-23.89	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2973.835	67.53	-30.08	37.44	74.00	-36.56	peak	P
2	4313.690	68.48	-29.39	39.09	74.00	-34.91	peak	P
3	6354.204	67.41	-25.63	41.78	74.00	-32.22	peak	P
4	8575.517	69.60	-24.77	44.83	74.00	-29.17	peak	P
5	11286.309	68.84	-22.58	46.26	74.00	-27.74	peak	P
6	14956.111	70.93	-19.58	51.35	74.00	-22.65	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2914.786	69.74	-30.04	39.70	74.00	-34.30	peak	P
2	4277.466	68.57	-29.83	38.74	74.00	-35.26	peak	P
3	6085.316	65.60	-24.65	40.95	74.00	-33.05	peak	P
4	8646.548	70.02	-25.66	44.36	74.00	-29.64	peak	P
5	11046.843	67.22	-23.15	44.08	74.00	-29.92	peak	P
6	14217.942	69.83	-21.66	48.18	74.00	-25.82	peak	P



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2973.453	67.90	-30.13	37.77	74.00	-36.23	peak	P
2	4312.719	69.00	-29.13	39.86	74.00	-34.14	peak	P
3	6353.560	66.62	-26.01	40.61	74.00	-33.39	peak	P
4	8575.752	69.01	-25.89	43.12	74.00	-30.88	peak	P
5	11286.256	67.44	-23.10	44.34	74.00	-29.66	peak	P
6	14955.068	71.37	-19.40	51.97	74.00	-22.03	peak	P

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2914.320	68.91	-29.98	38.93	74.00	-35.07	peak	P
2	4276.178	69.18	-29.31	39.86	74.00	-34.14	peak	P
3	6084.814	63.98	-26.20	37.77	74.00	-36.23	peak	P
4	8646.044	69.11	-24.49	44.62	74.00	-29.38	peak	P
5	11047.992	67.22	-23.14	44.08	74.00	-29.92	peak	P
6	14217.158	71.31	-20.96	50.35	74.00	-23.65	peak	P

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m )	Limit (dBuv/m )	Margin( dB)	Detector	P/F
1	2973.071	67.36	-29.61	37.75	74.00	-36.25	peak	P
2	4313.680	67.92	-29.77	38.14	74.00	-35.86	peak	P
3	6353.698	66.73	-25.93	40.80	74.00	-33.20	peak	P
4	8575.675	69.21	-25.17	44.03	74.00	-29.97	peak	P
5	11285.350	67.13	-23.83	43.30	74.00	-30.70	peak	P
6	14956.101	70.01	-19.54	50.47	74.00	-23.53	peak	P

## 8 Test Setup Photo

Please Refer to appendix – Test Setup Photos for BTEK231122011AE

ShenZhen BANTEK Testing Co.,Ltd.

Add : A5&amp;A6, Building B1&amp;B2, No.45 Gangtou Road, Bogang Community, Shajing Street

Bao'an District, Shenzhen, Guangdong, China 518104

Tel : +(86)755-2334 4200 E-mail : Service@btek-lab.com Web : www.btek-lab.com





## 9 EUT Constructional Details (EUT Photos)


Please Refer to appendix - External and Internal Photos for BTEK231122011AE







## 10 Appendix



### 1. -6dB Bandwidth



Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	10.62	500	Pass
NVNT	ANT1	802.11b	2437.00	11.57	500	Pass
NVNT	ANT1	802.11b	2462.00	11.10	500	Pass
NVNT	ANT1	802.11g	2412.00	17.40	500	Pass
NVNT	ANT1	802.11g	2437.00	17.27	500	Pass
NVNT	ANT1	802.11g	2462.00	17.22	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	16.67	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	18.20	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	15.42	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	34.14	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	34.98	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	33.90	500	Pass


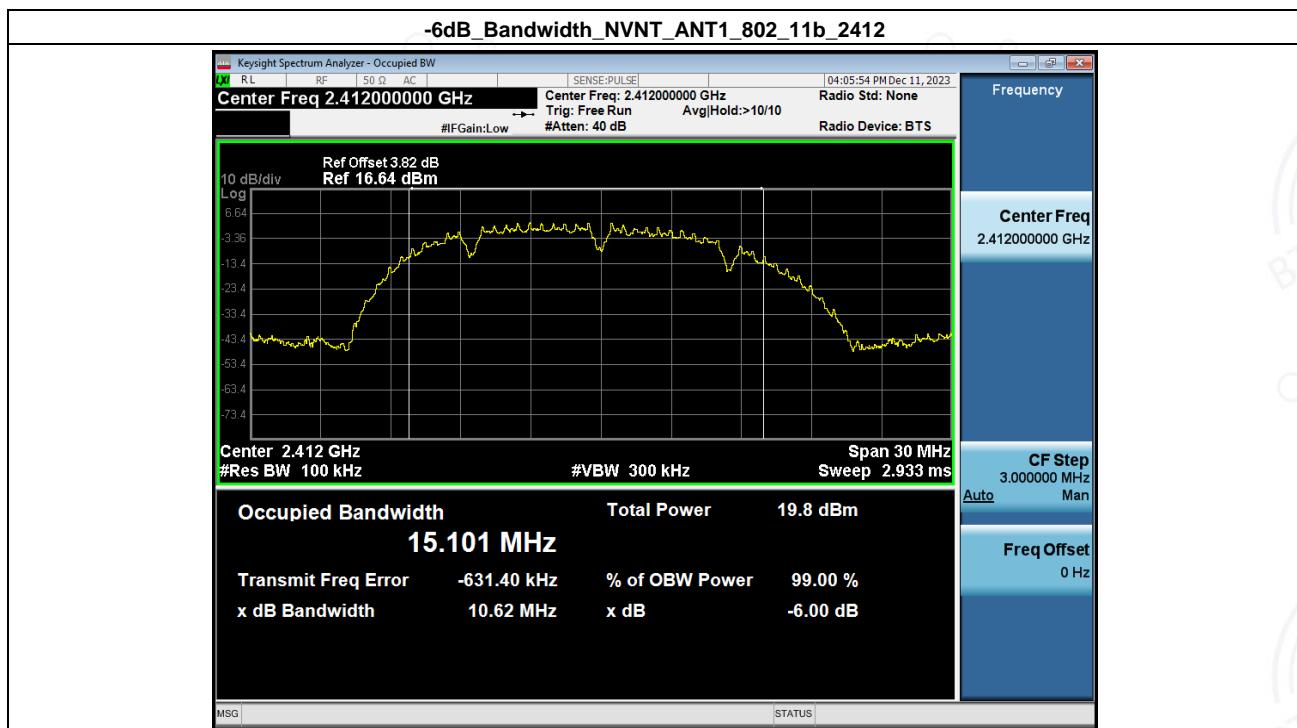


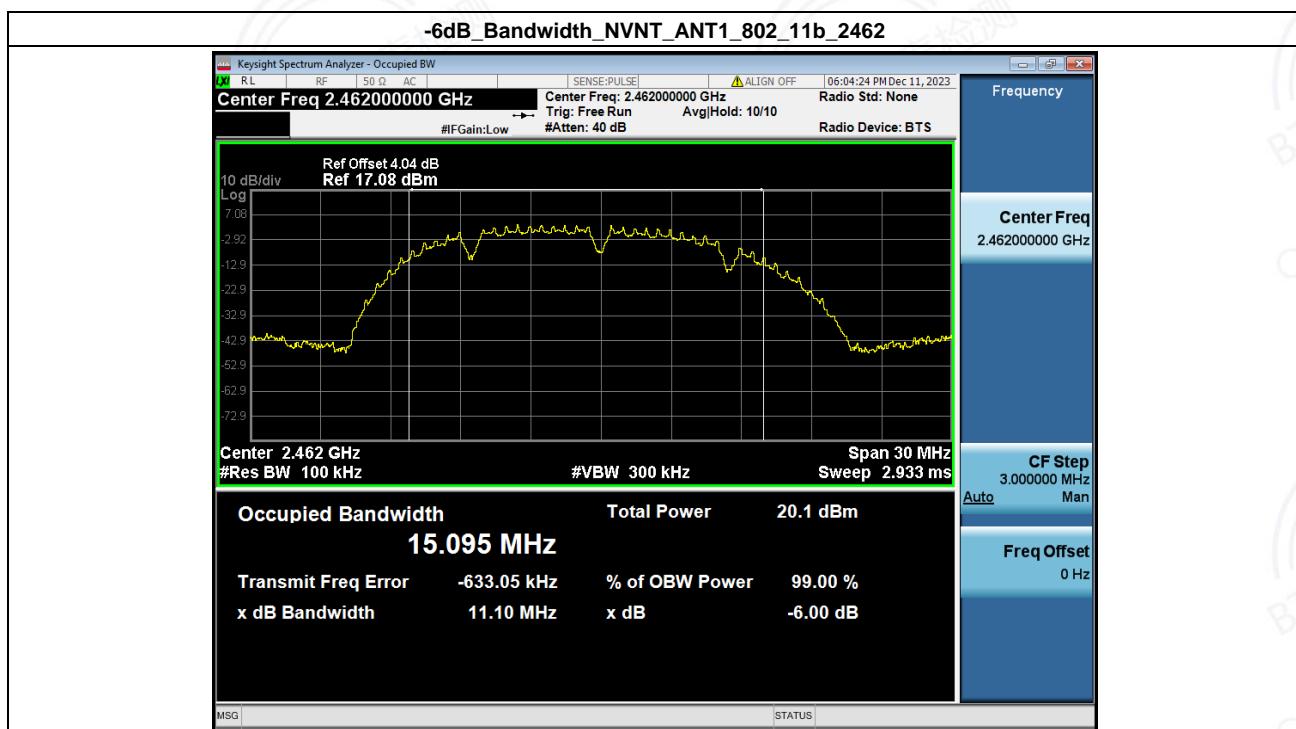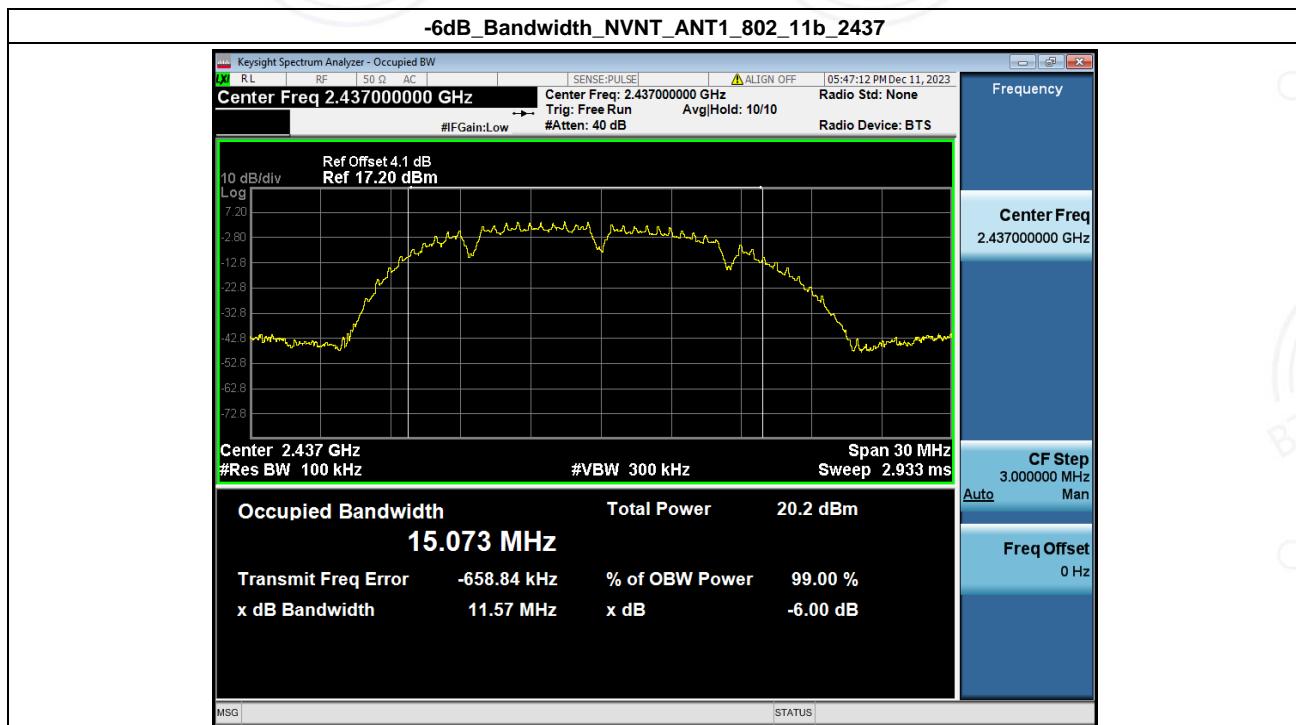


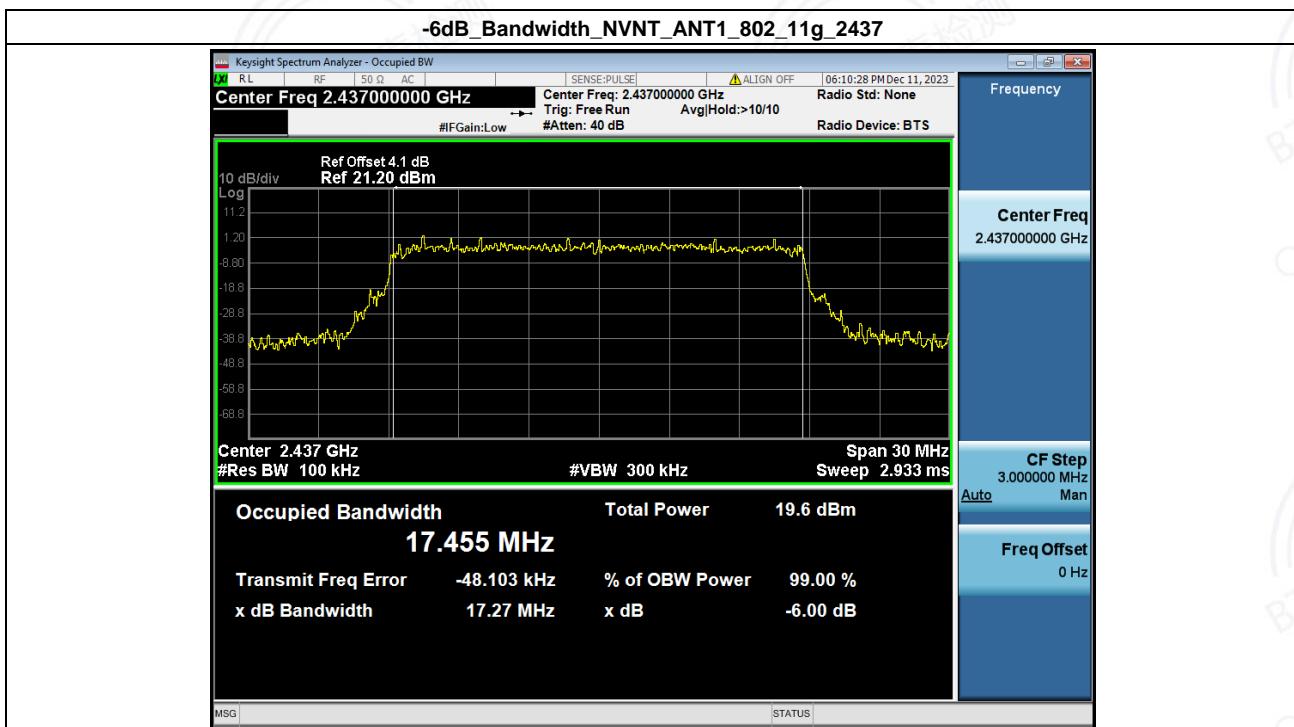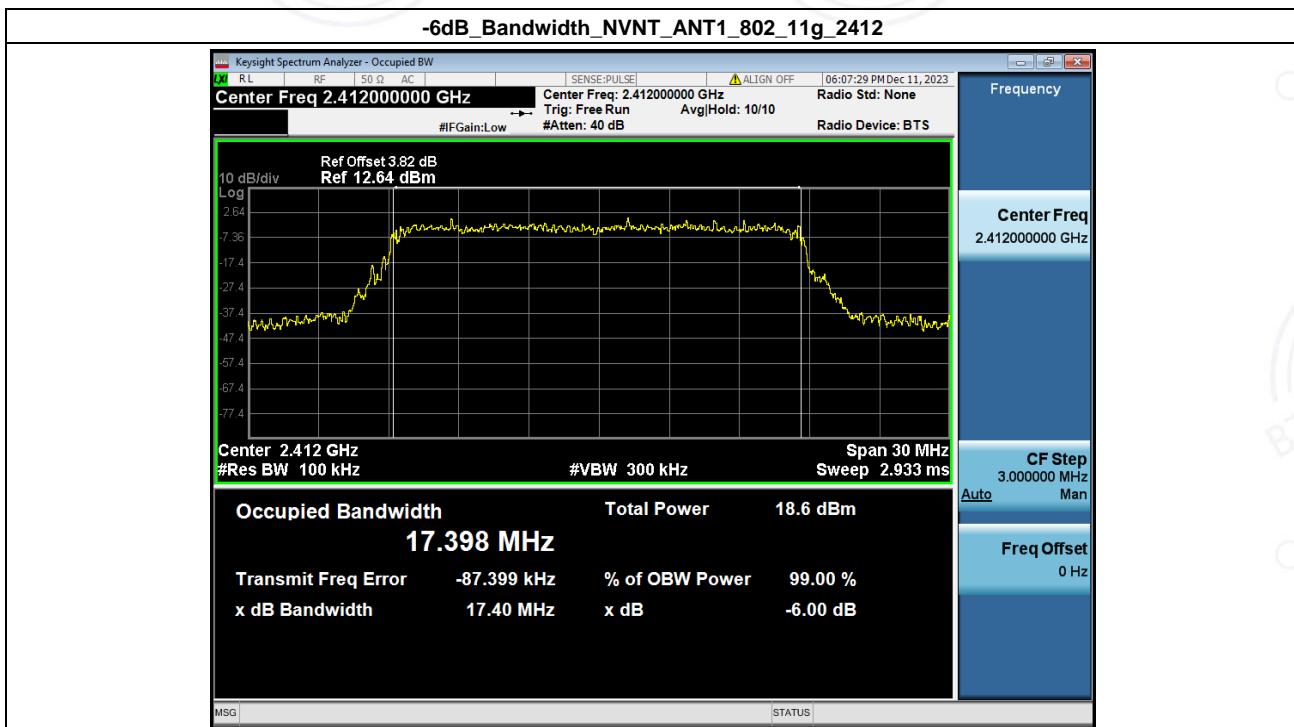

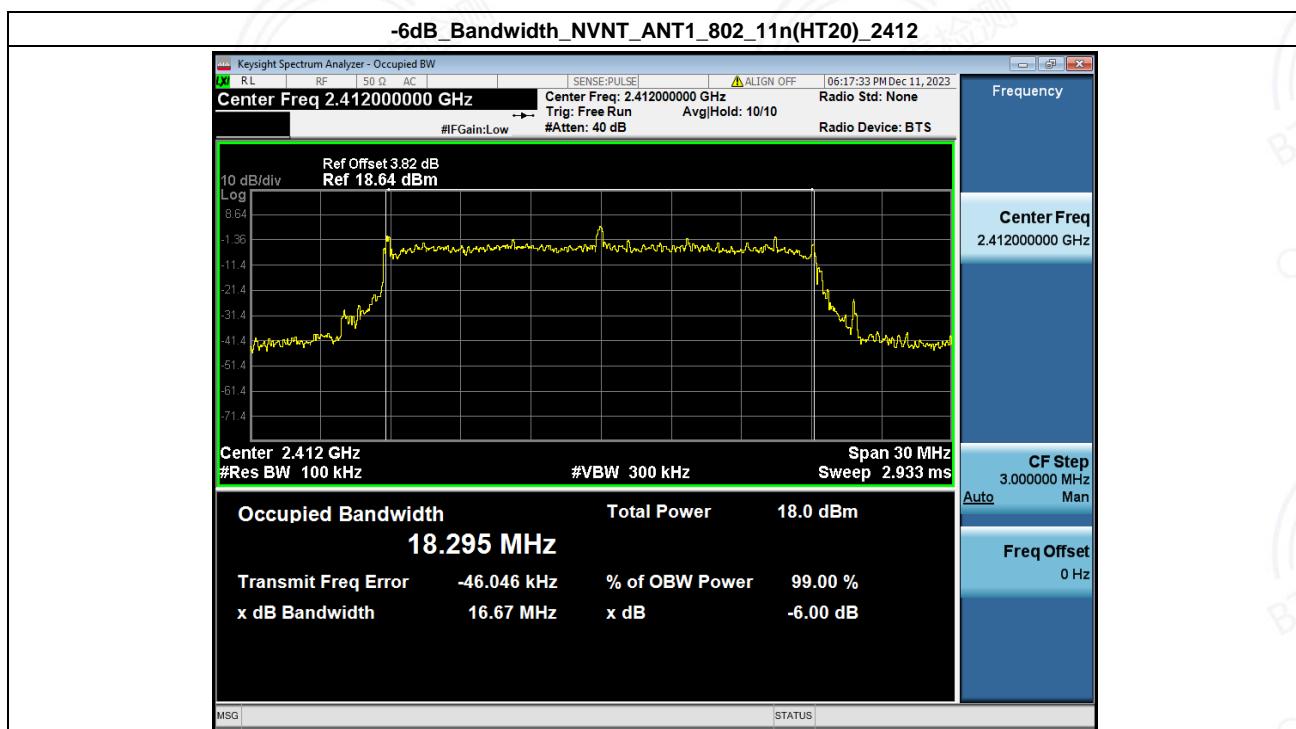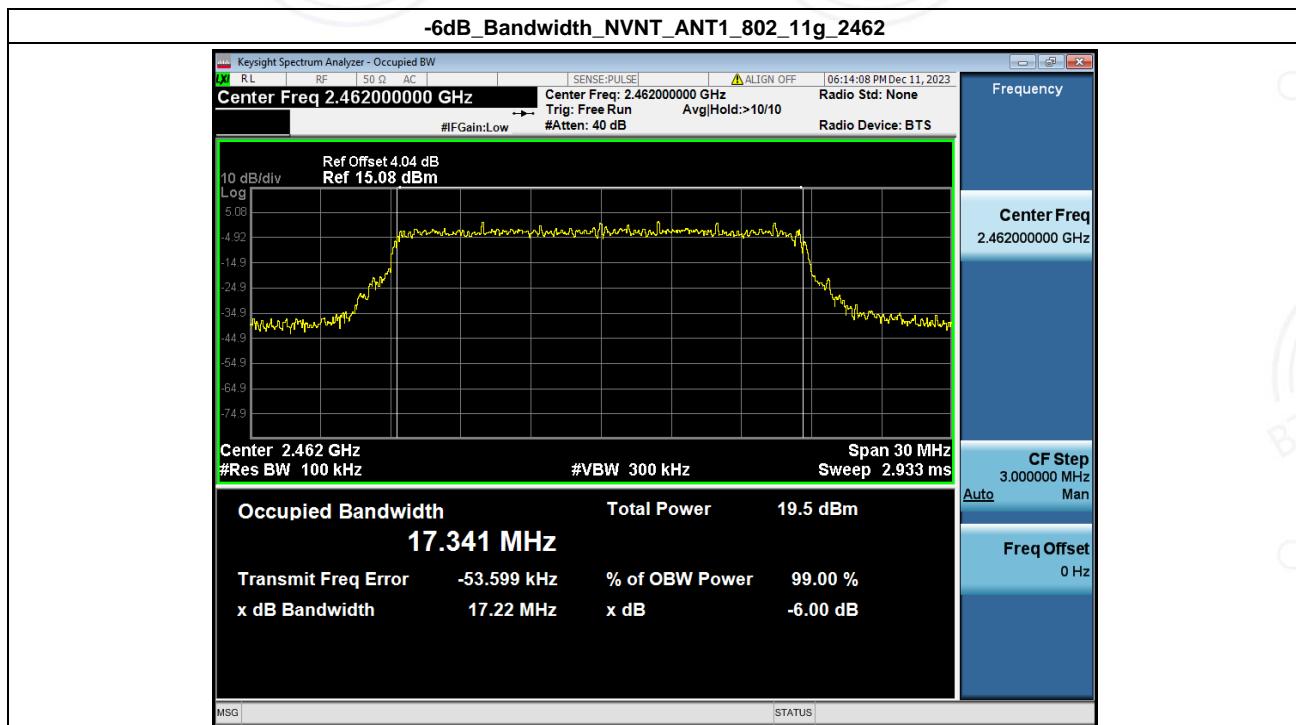

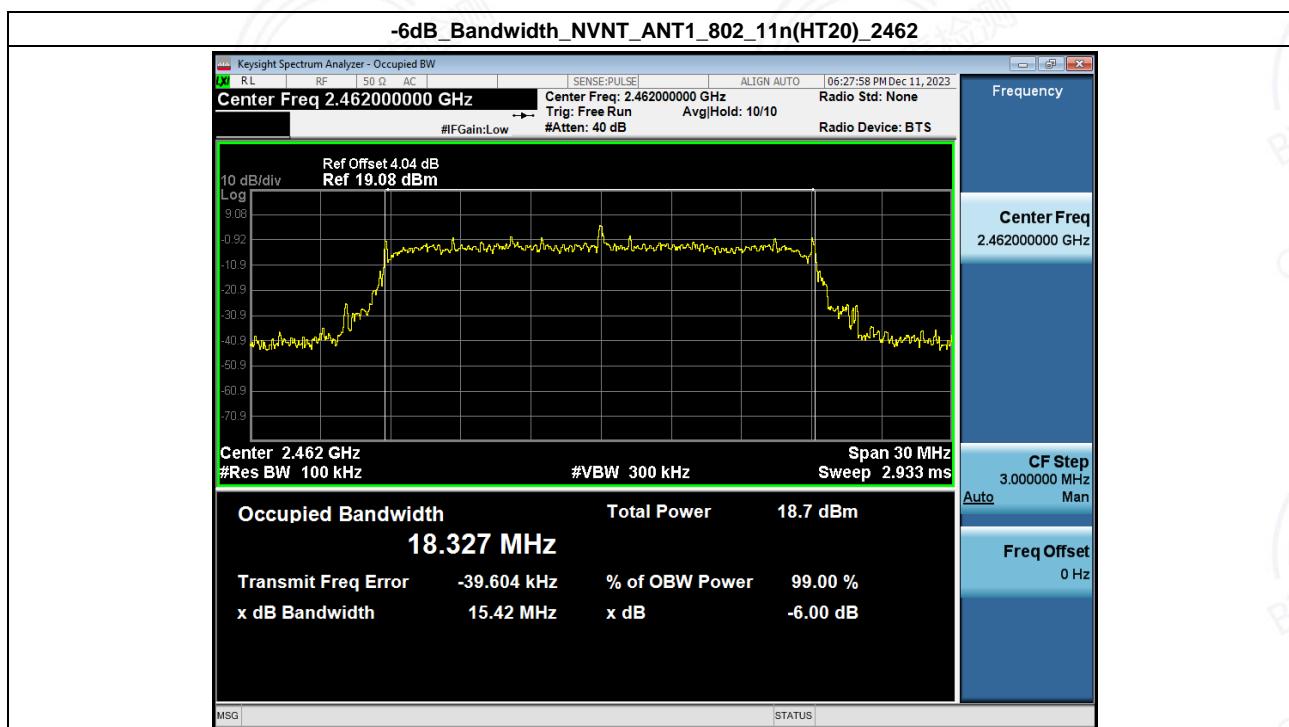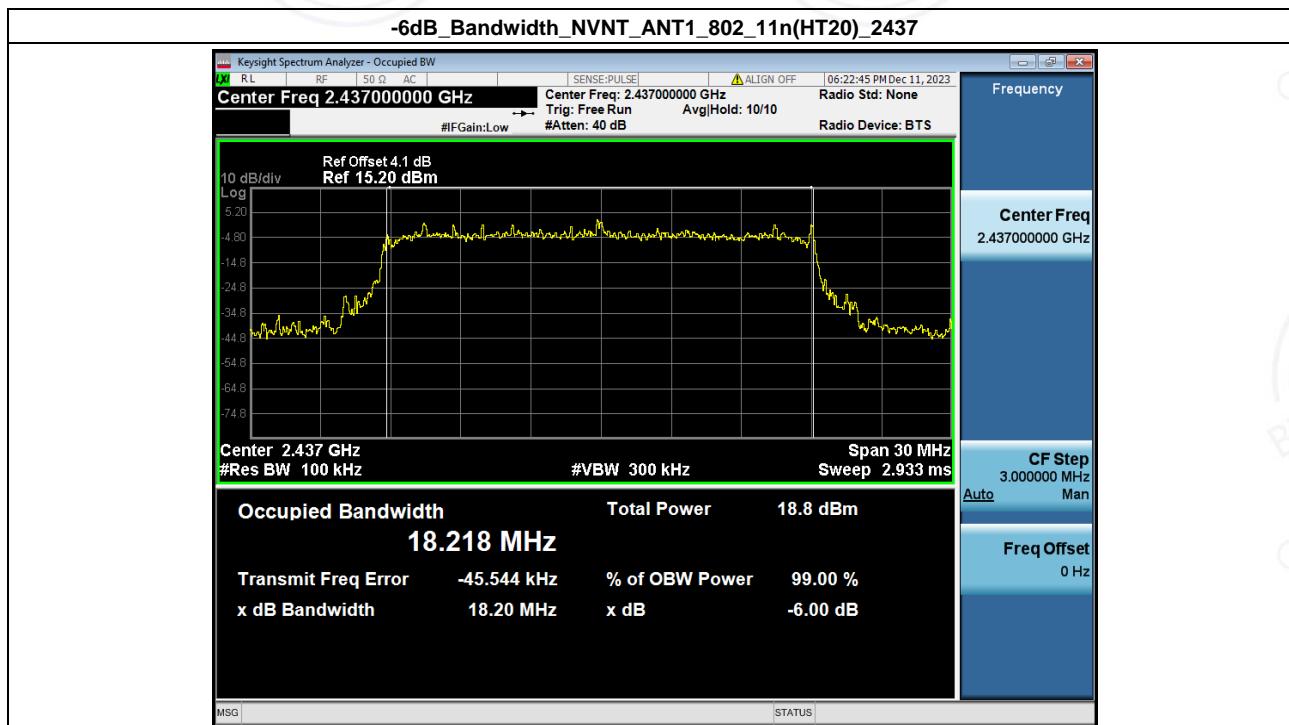


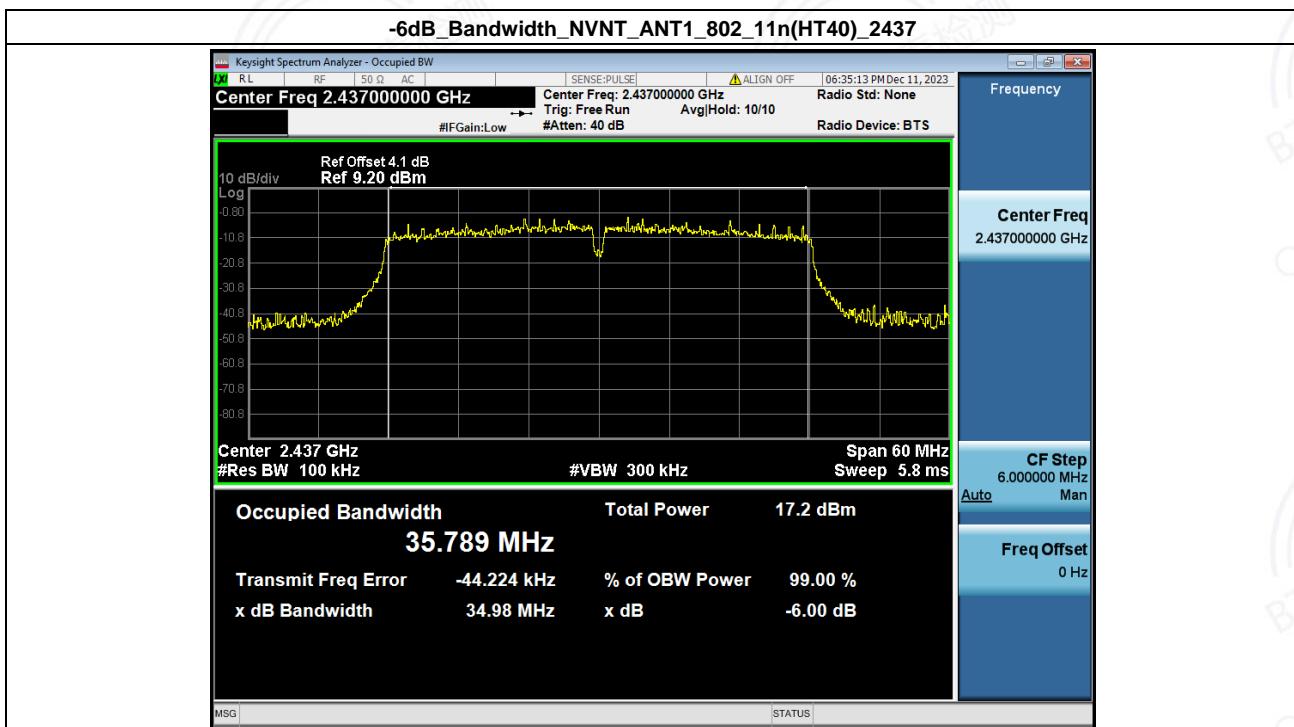
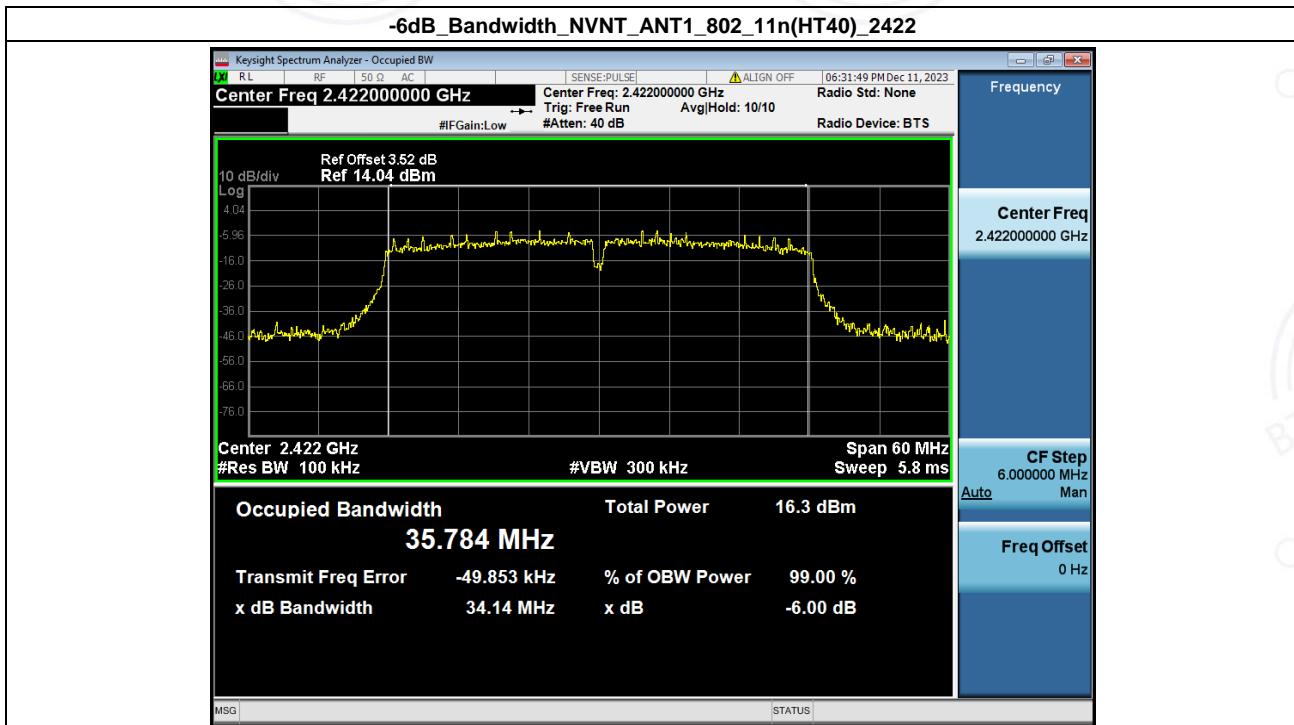



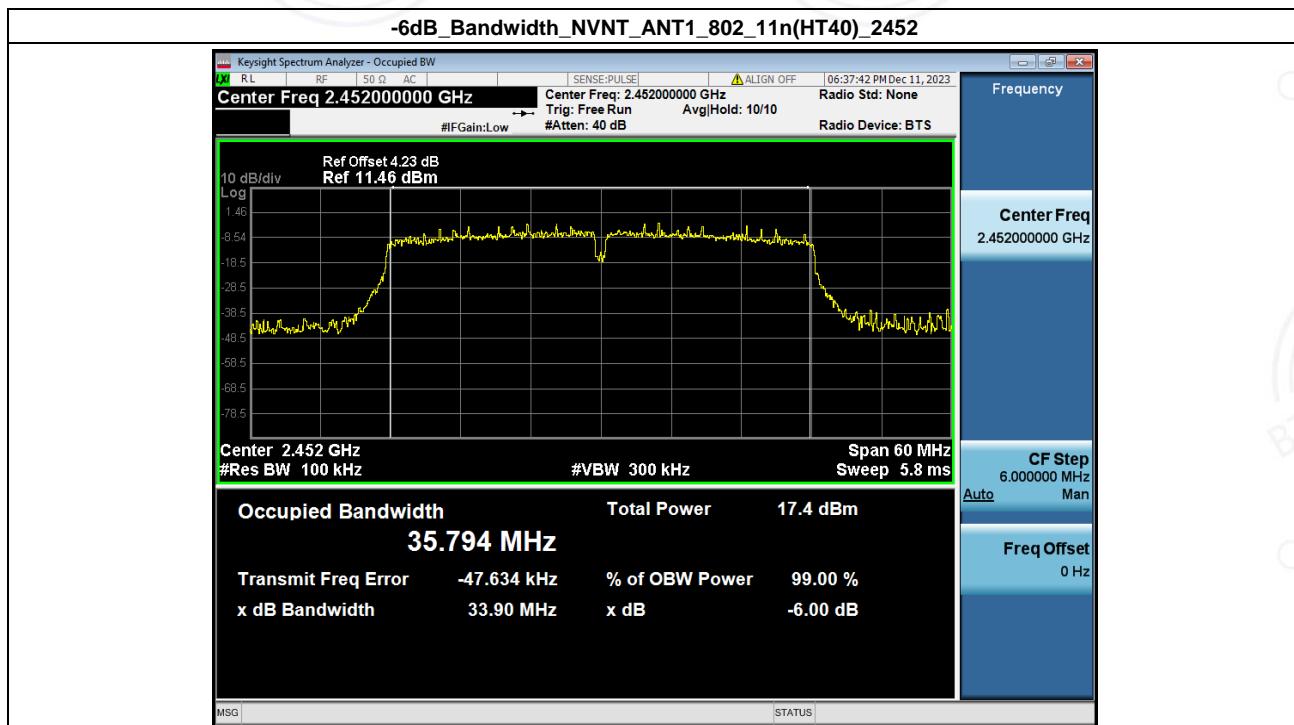




## 2. 99% Occupied Bandwidth



Condition	Antenna	Modulation	Frequency (MHz)	99% BW(MHz)
NVNT	ANT1	802.11b	2412.00	15.148
NVNT	ANT1	802.11b	2437.00	15.131
NVNT	ANT1	802.11b	2462.00	15.146
NVNT	ANT1	802.11g	2412.00	17.684
NVNT	ANT1	802.11g	2437.00	17.815
NVNT	ANT1	802.11g	2462.00	17.706
NVNT	ANT1	802.11n(HT20)	2412.00	18.576
NVNT	ANT1	802.11n(HT20)	2437.00	18.618
NVNT	ANT1	802.11n(HT20)	2462.00	18.573
NVNT	ANT1	802.11n(HT40)	2422.00	36.089
NVNT	ANT1	802.11n(HT40)	2437.00	36.093
NVNT	ANT1	802.11n(HT40)	2452.00	36.100


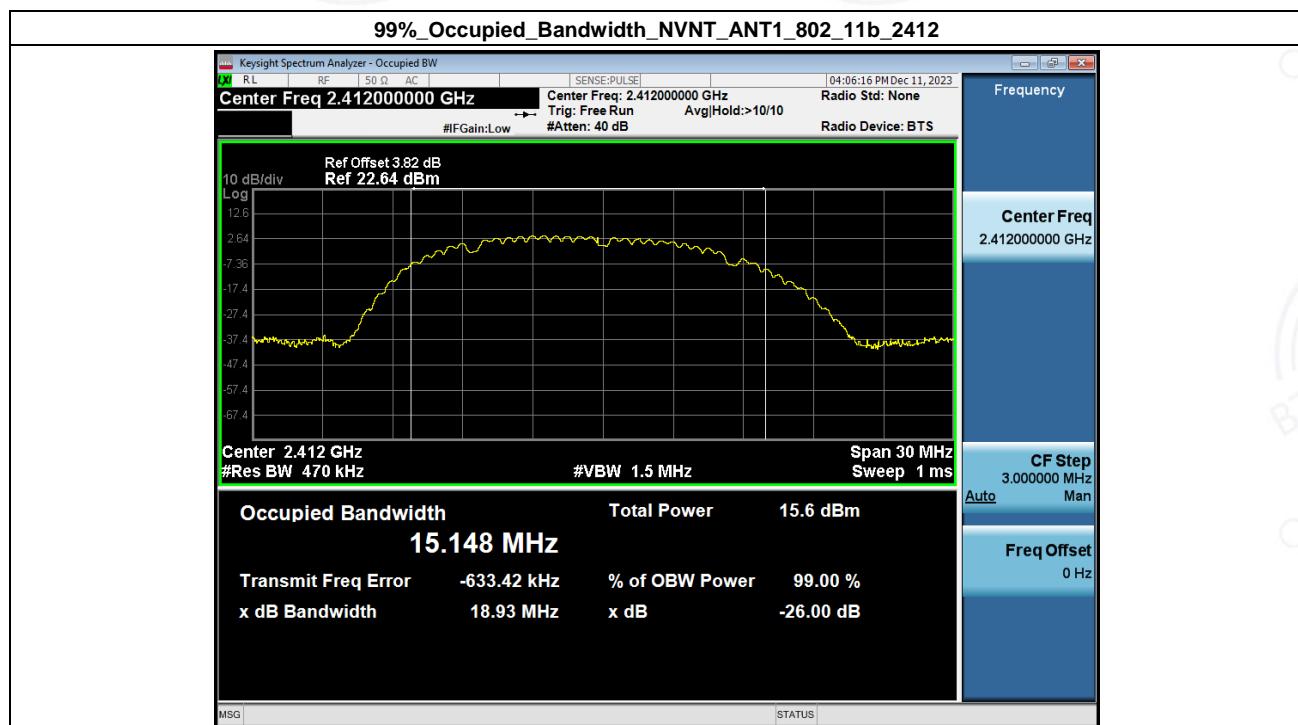


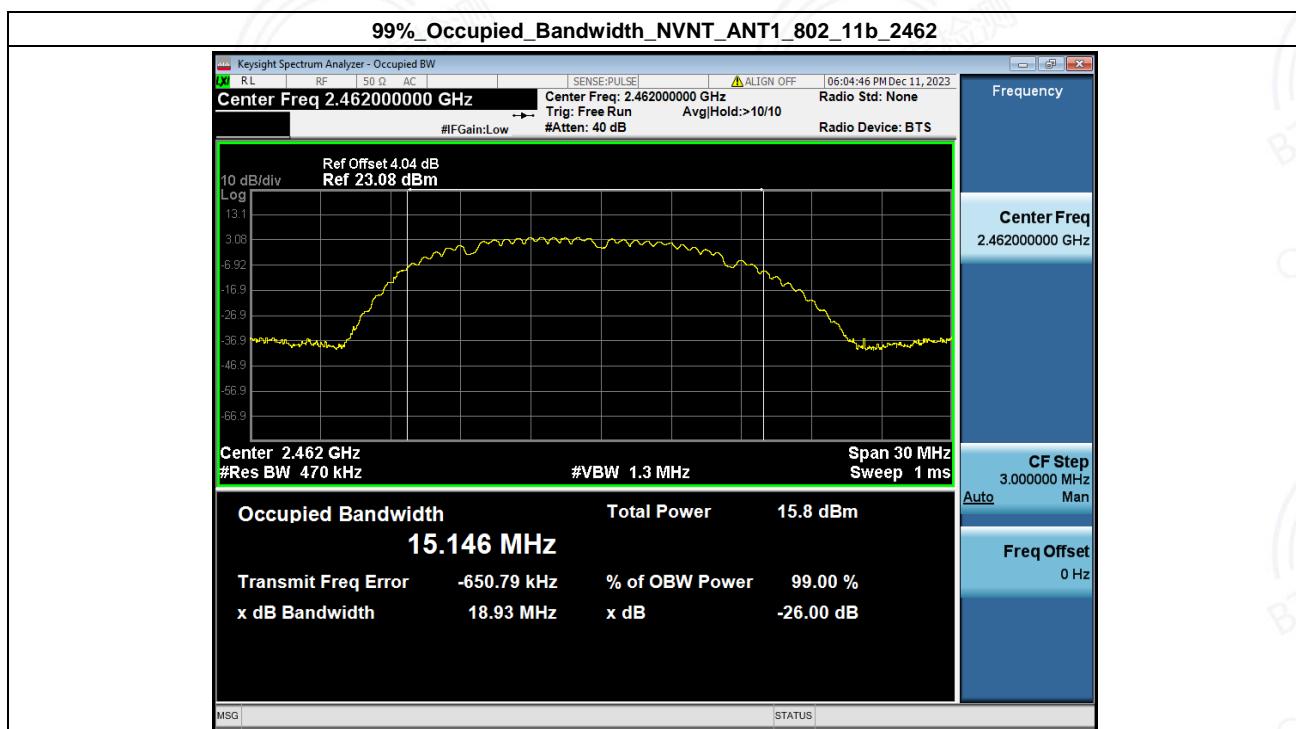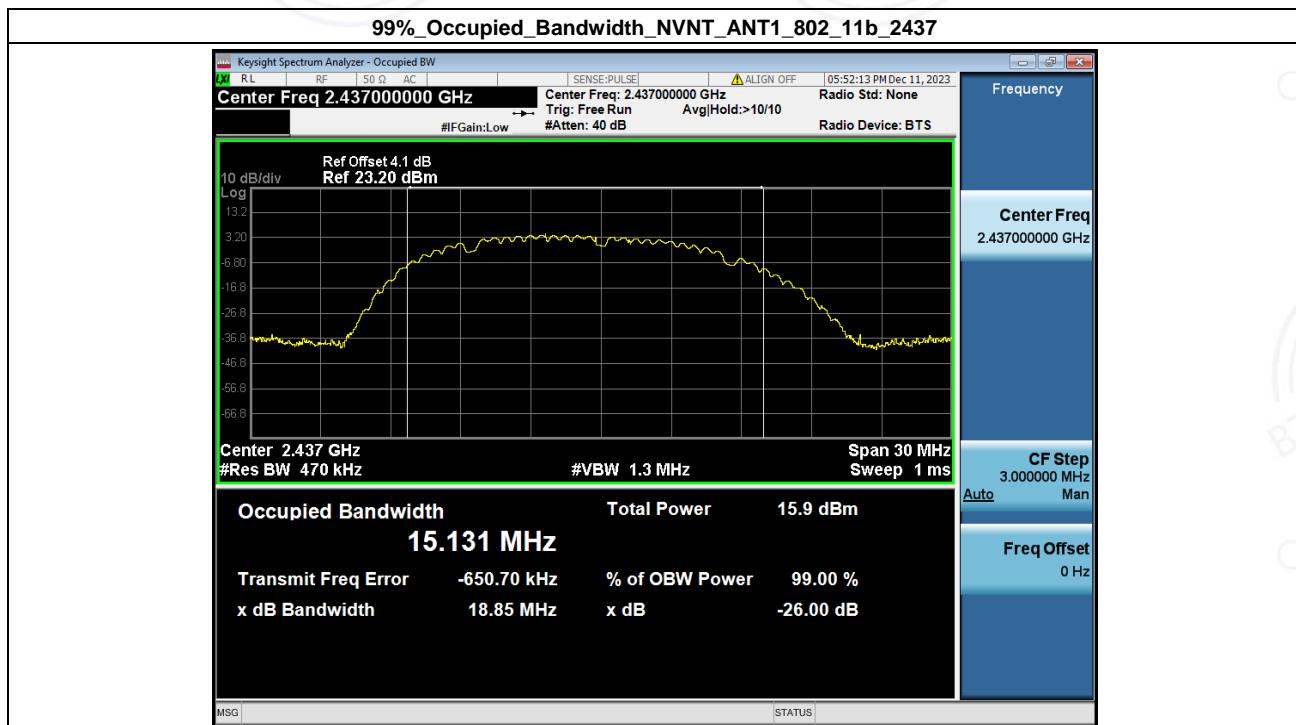


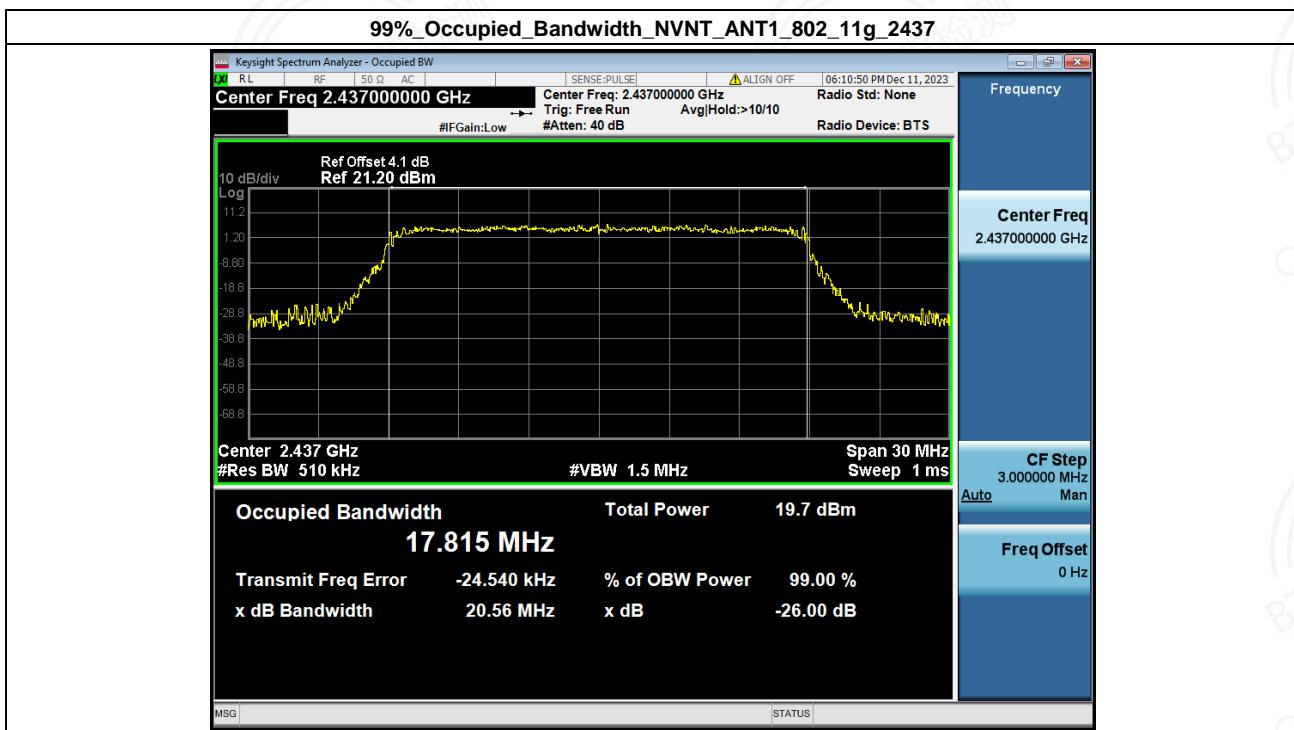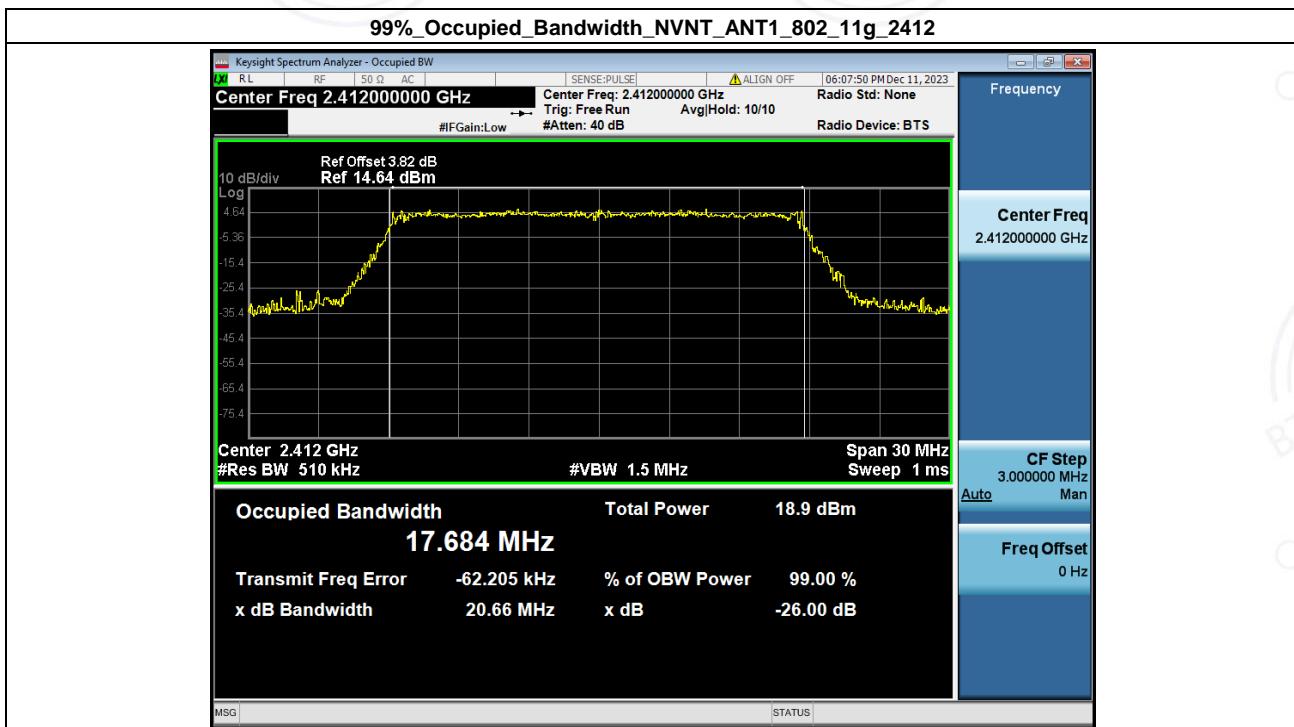

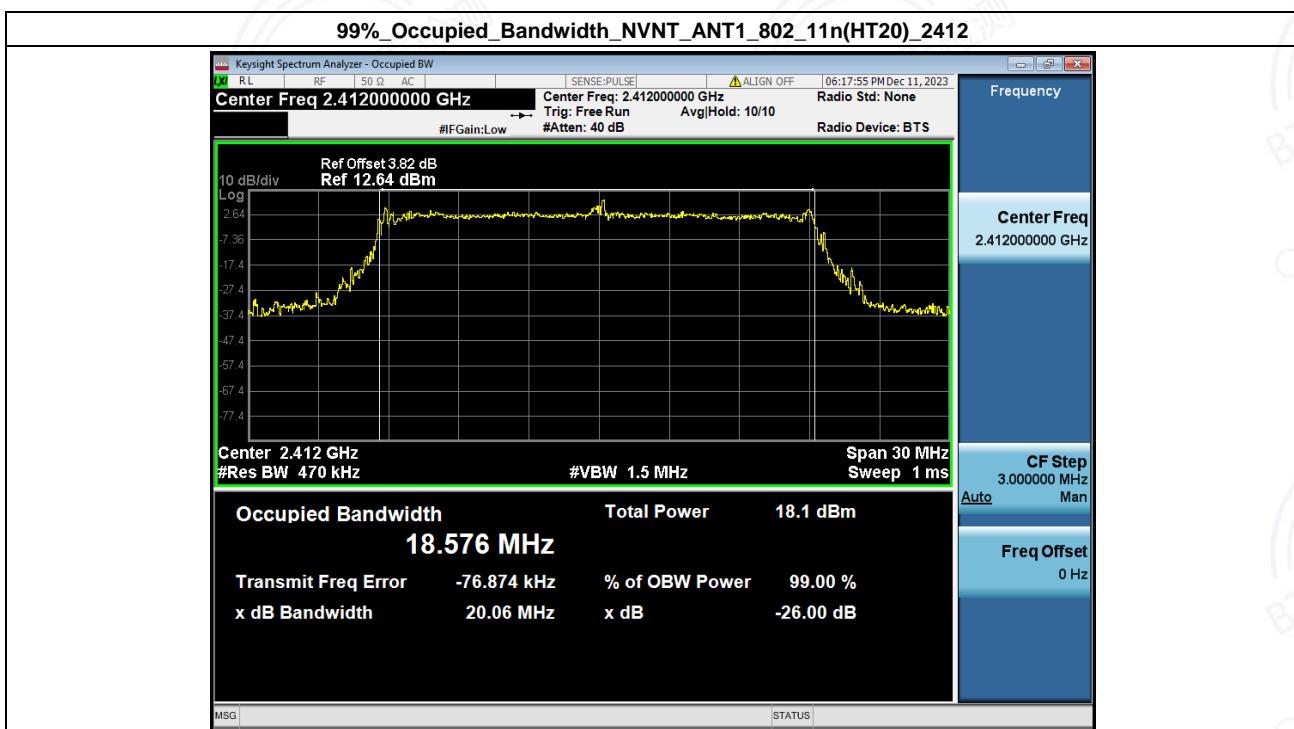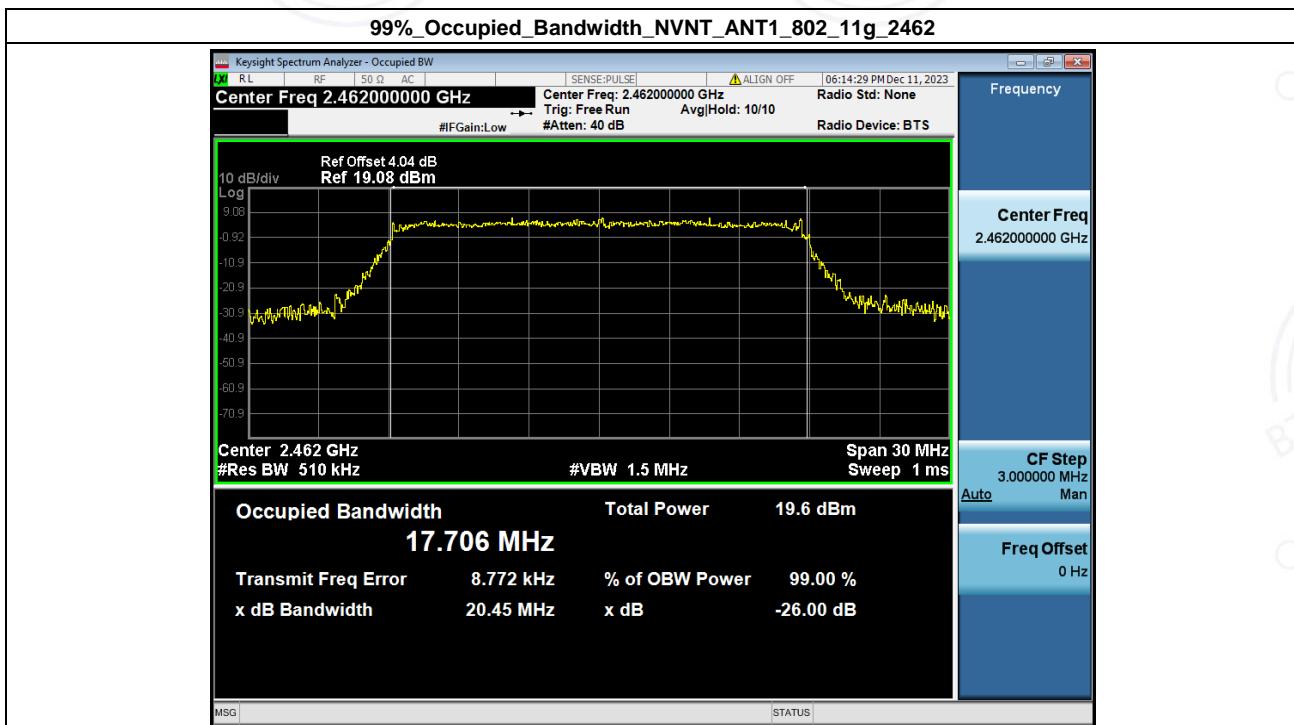

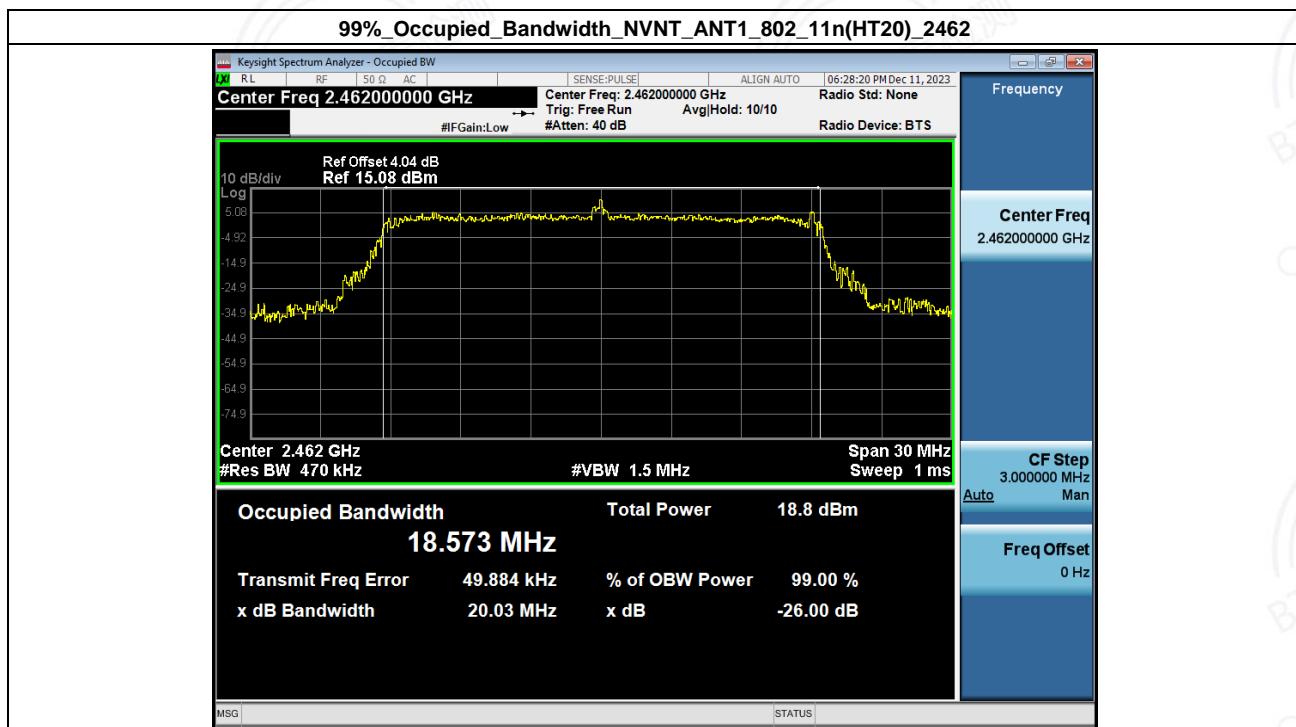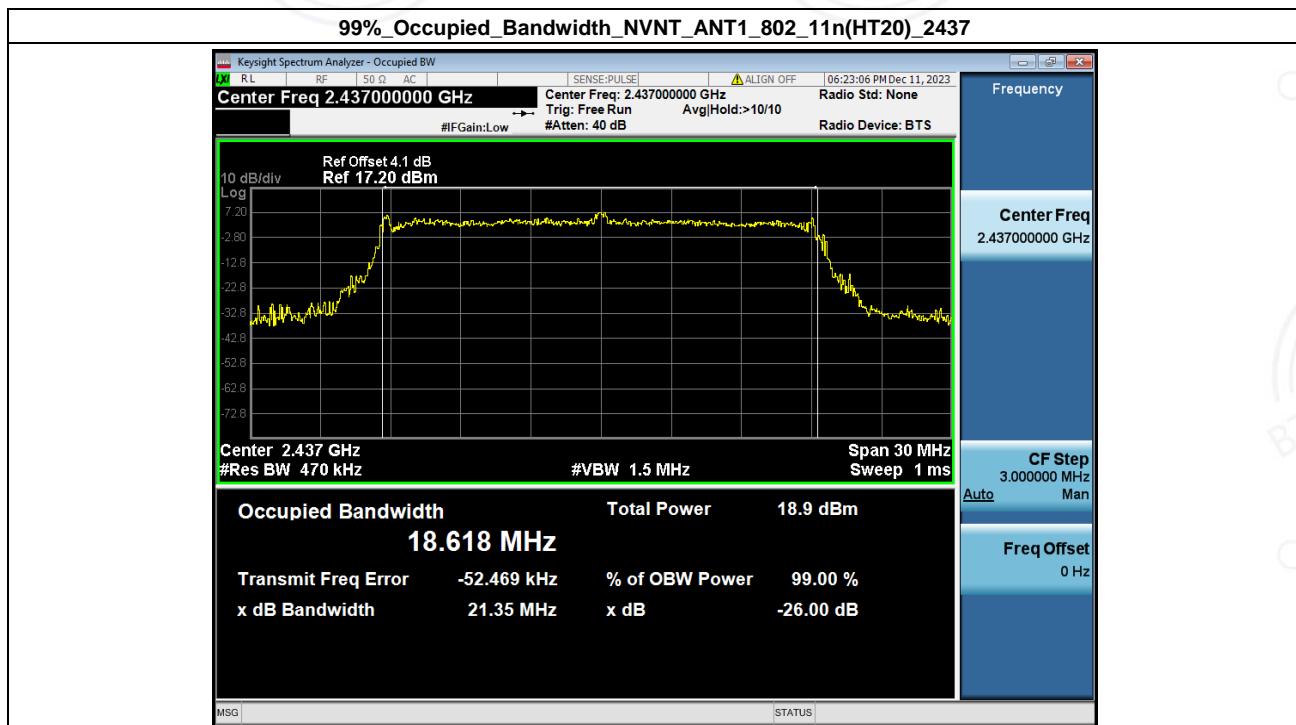


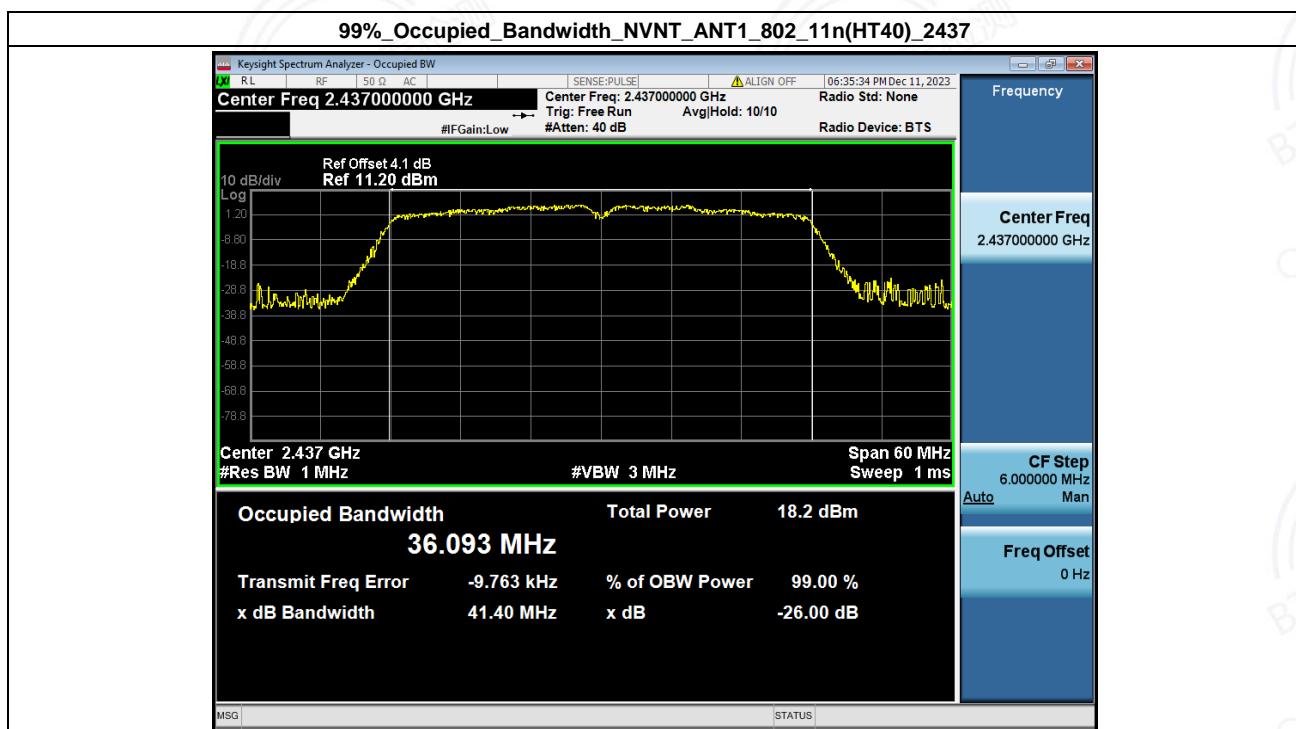
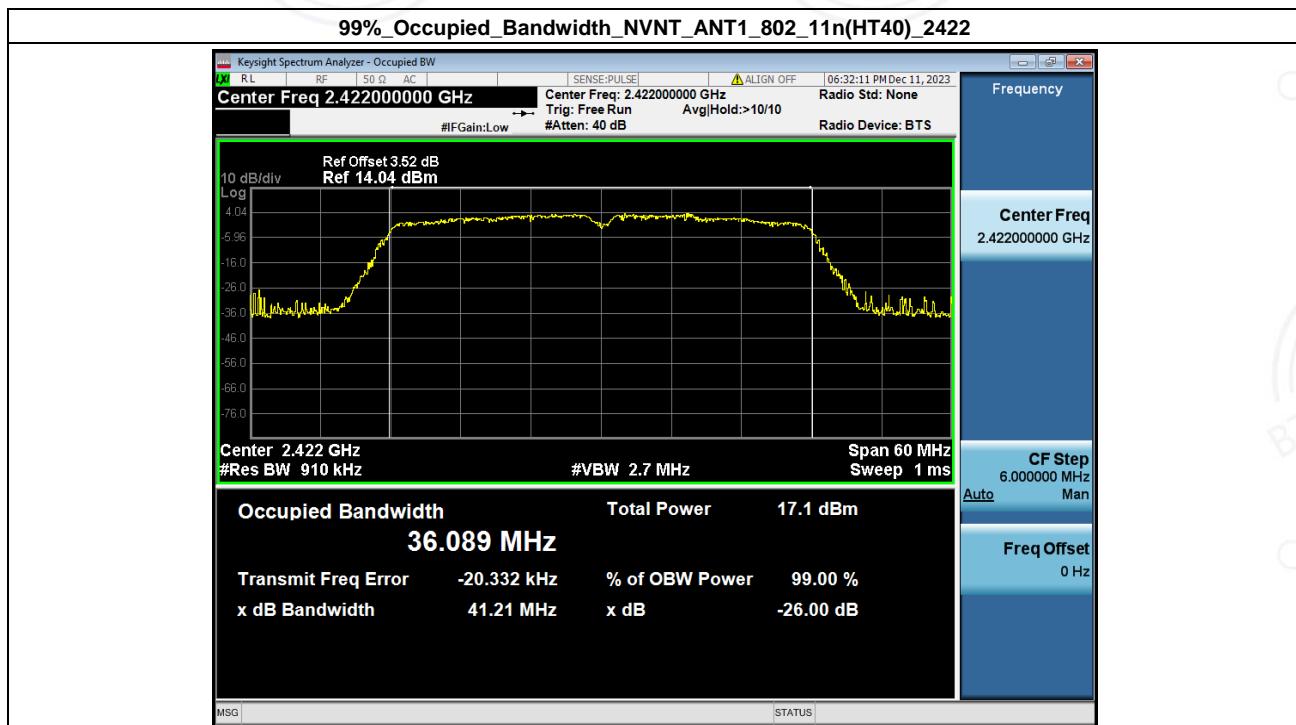



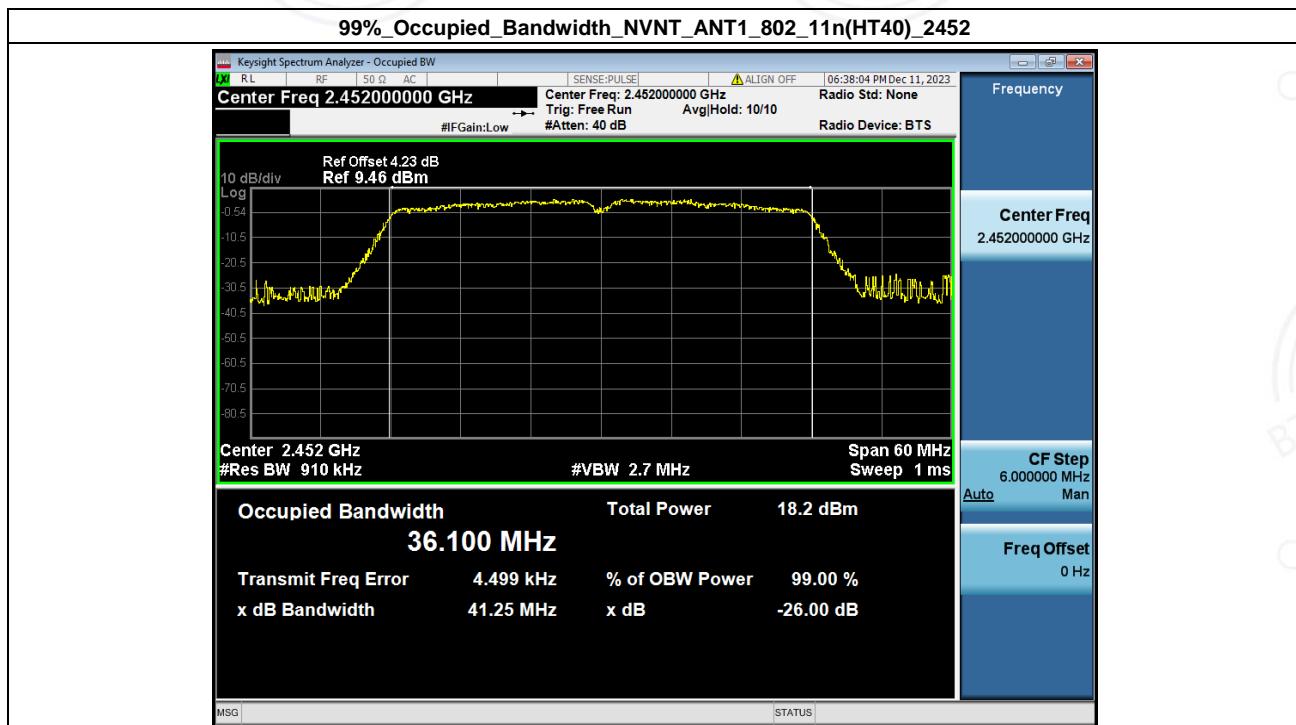




### 3. Duty Cycle



Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT1	802.11b	2412.00	100	0.00
NVNT	ANT1	802.11b	2437.00	100	0.00
NVNT	ANT1	802.11b	2462.00	100	0.00
NVNT	ANT1	802.11g	2412.00	98.59	0.00
NVNT	ANT1	802.11g	2437.00	99.30	0.00
NVNT	ANT1	802.11g	2462.00	98.59	0.00
NVNT	ANT1	802.11n(HT20)	2412.00	98.51	0.00
NVNT	ANT1	802.11n(HT20)	2437.00	98.51	0.00
NVNT	ANT1	802.11n(HT20)	2462.00	98.51	0.00
NVNT	ANT1	802.11n(HT40)	2422.00	97.06	0.13
NVNT	ANT1	802.11n(HT40)	2437.00	98.51	0.00
NVNT	ANT1	802.11n(HT40)	2452.00	97.06	0.13


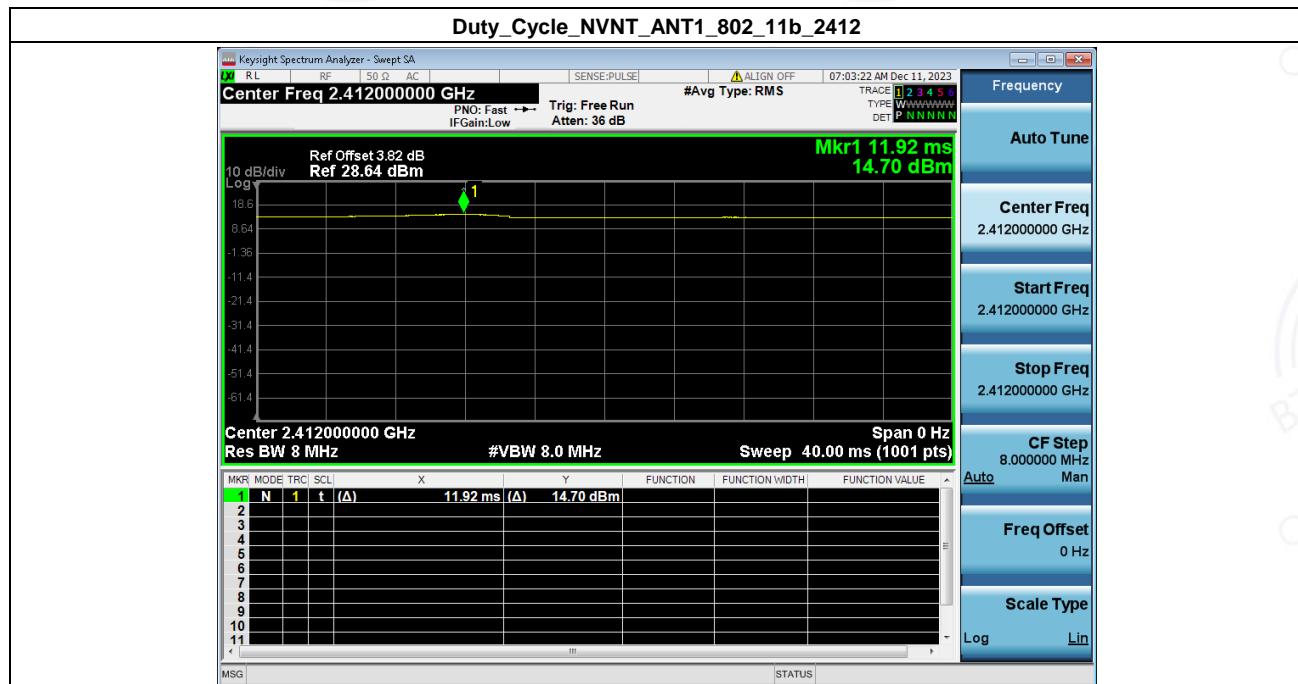


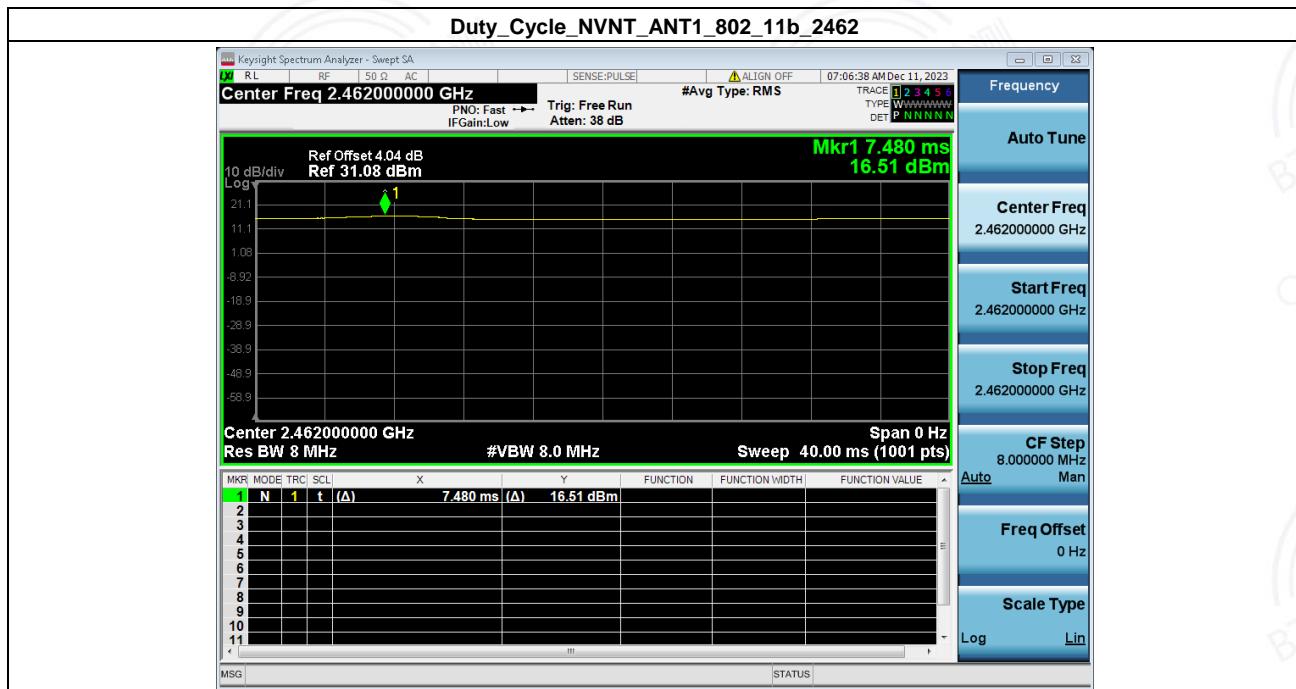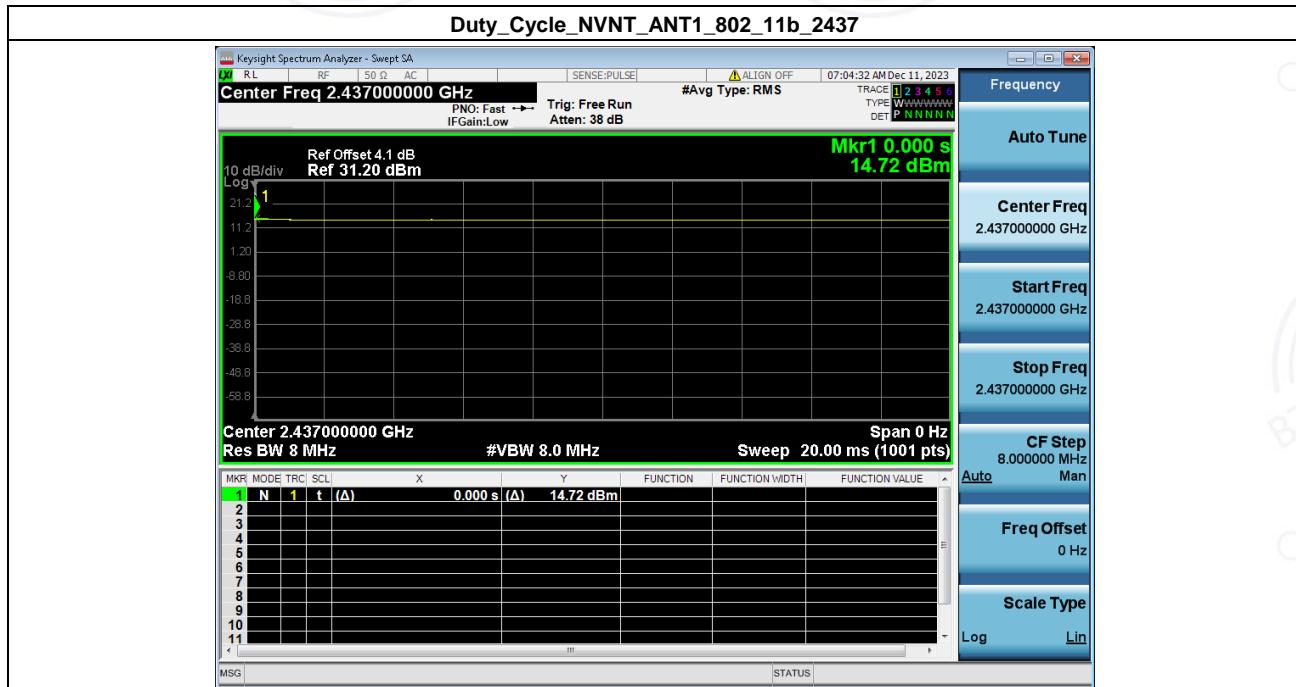


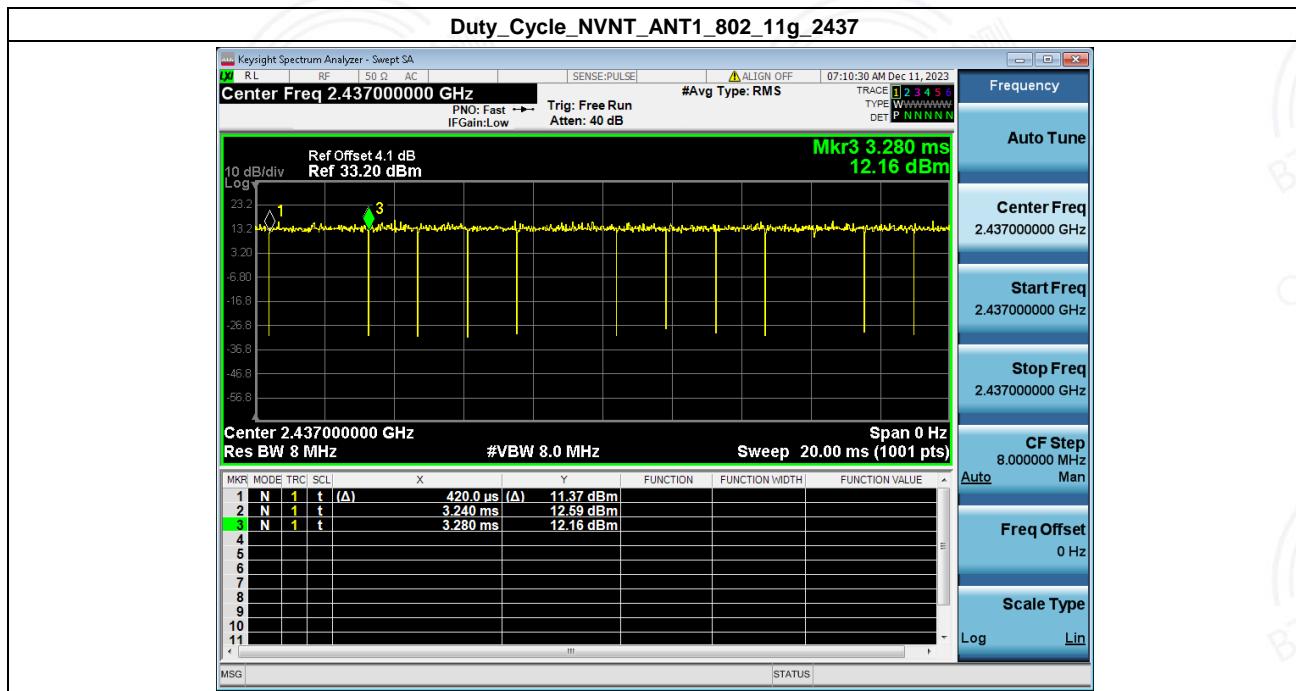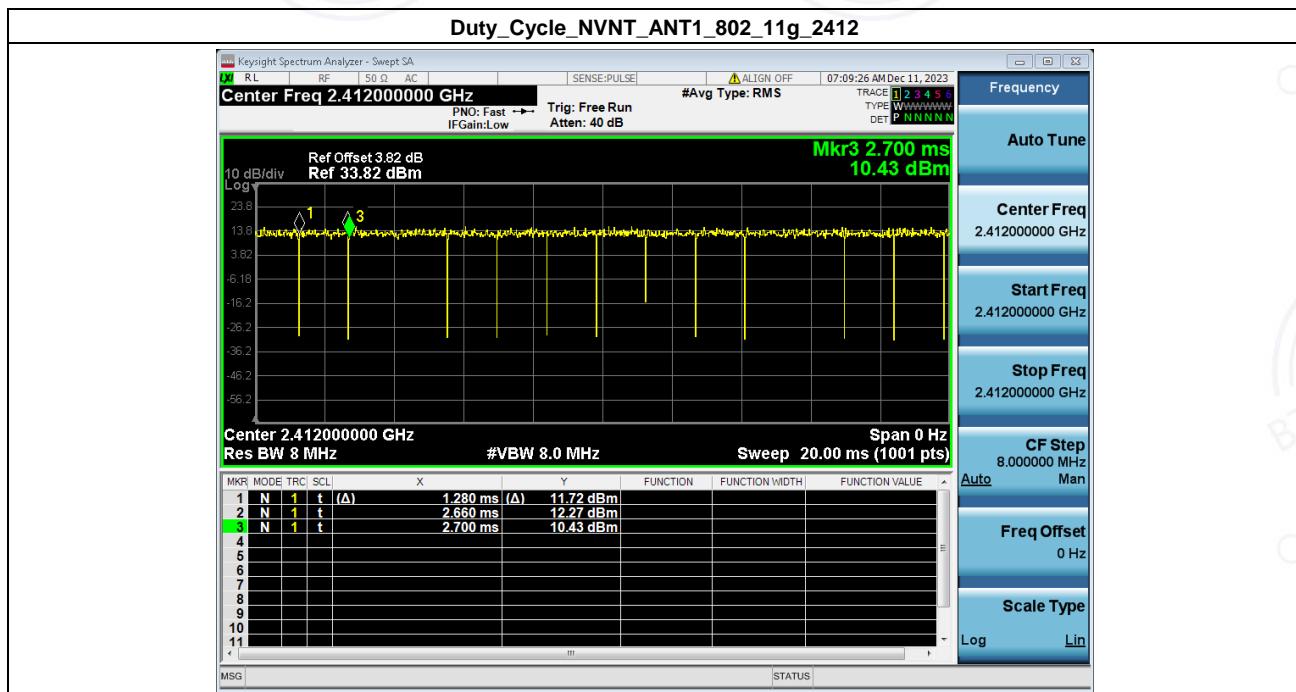

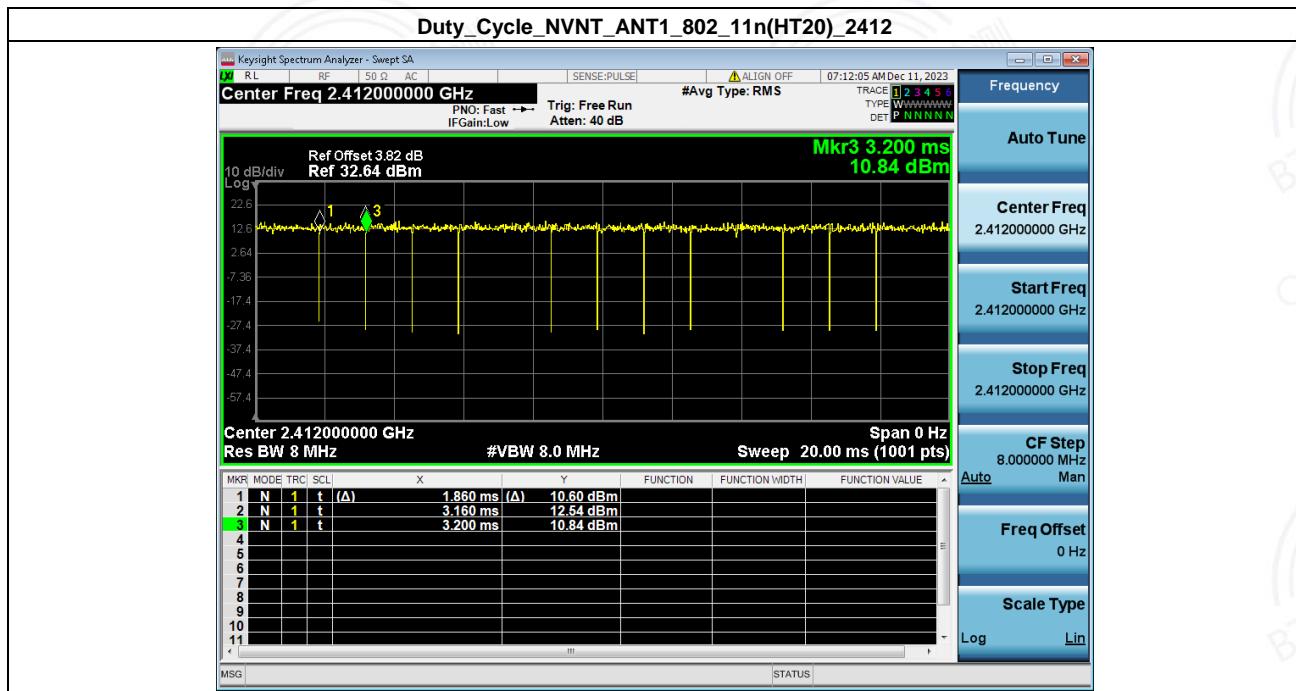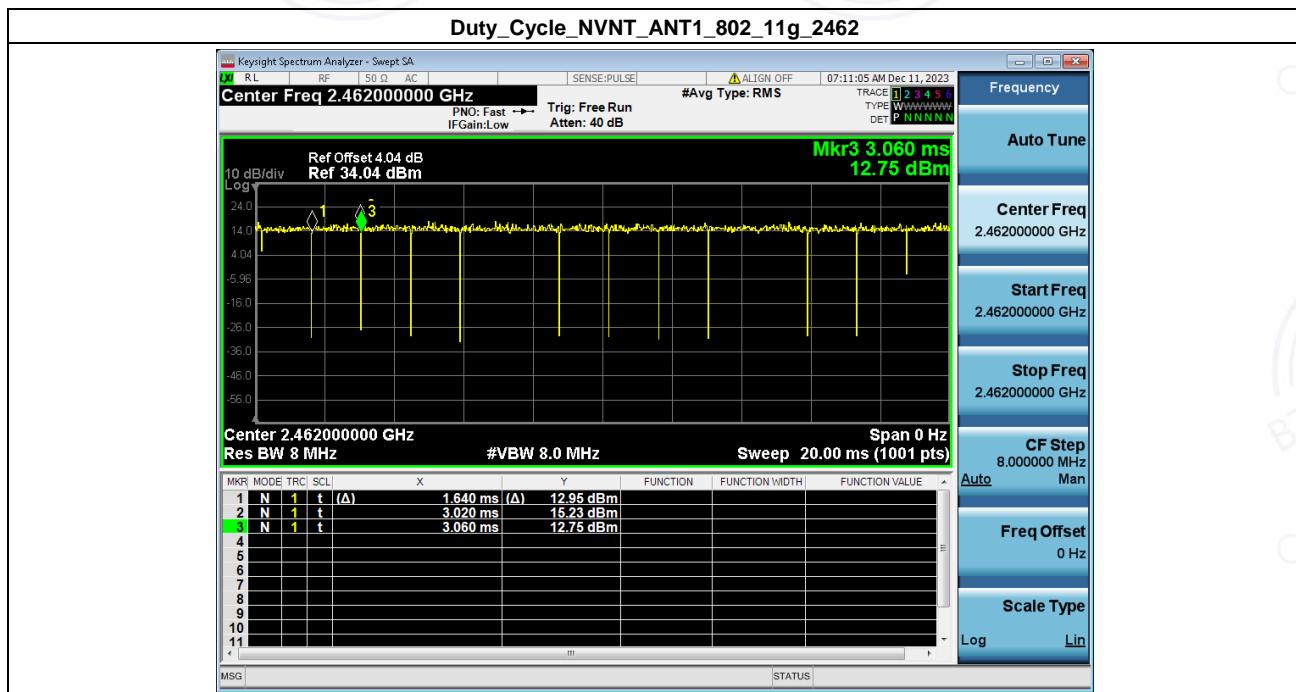

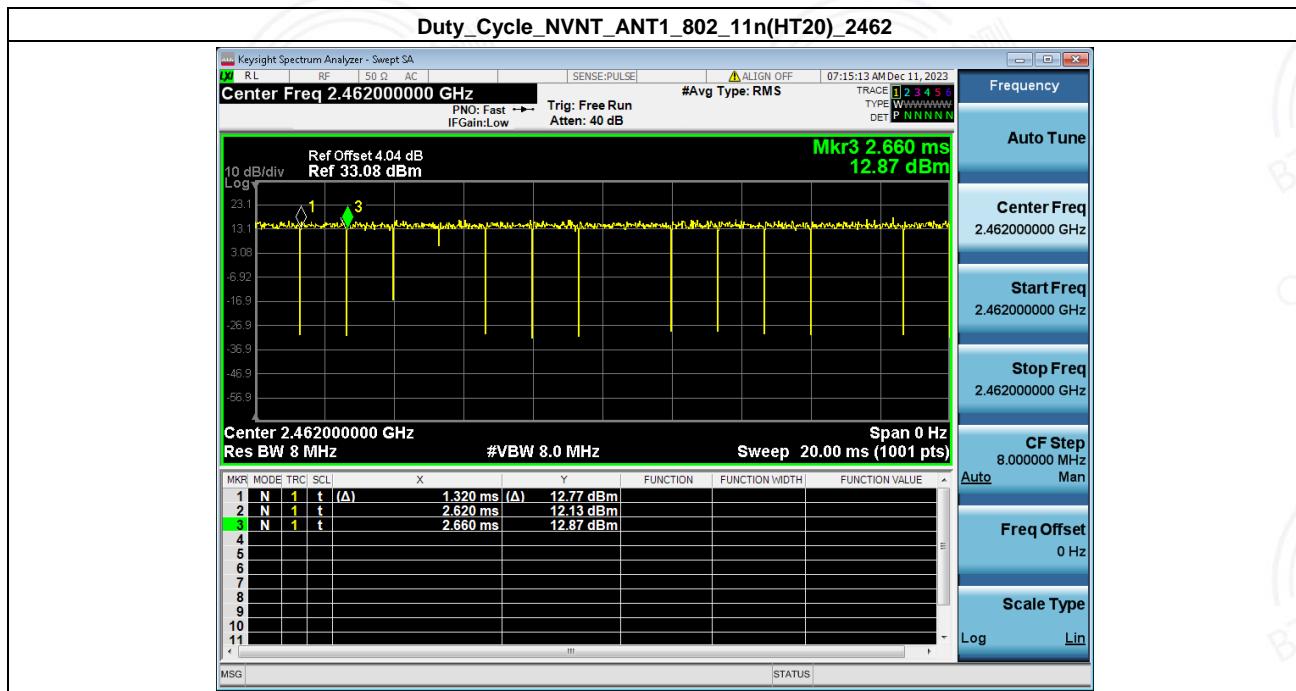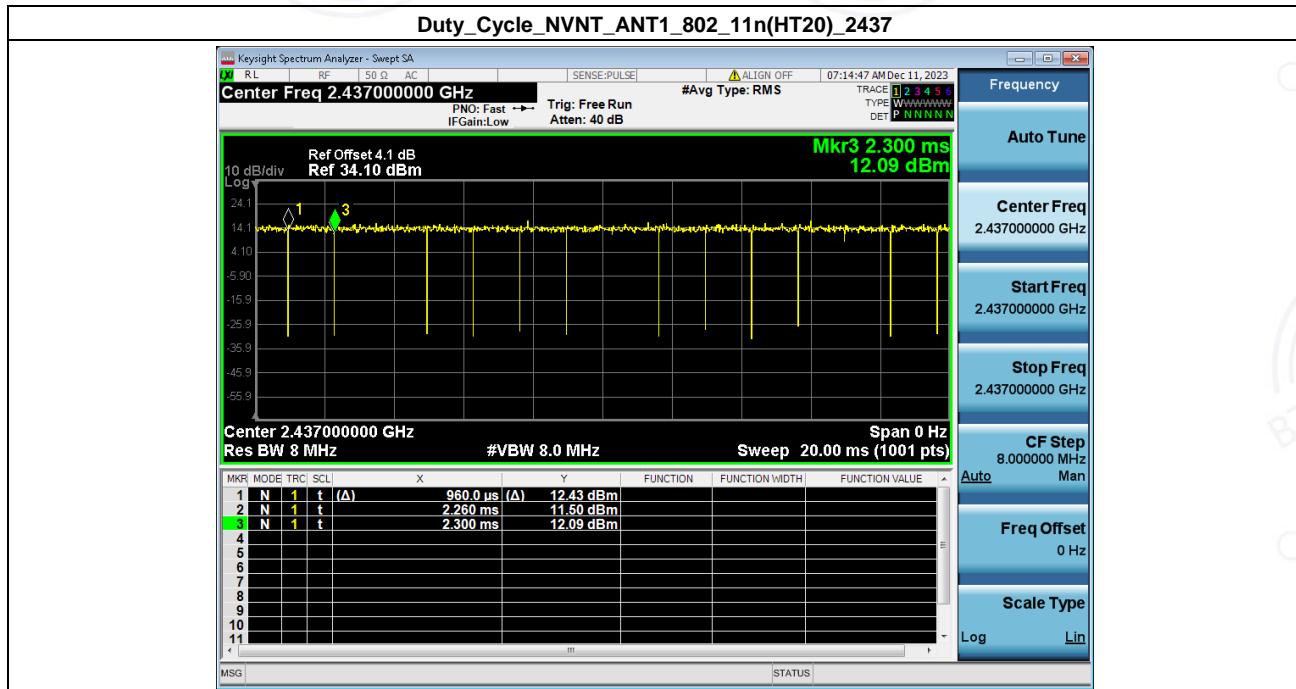

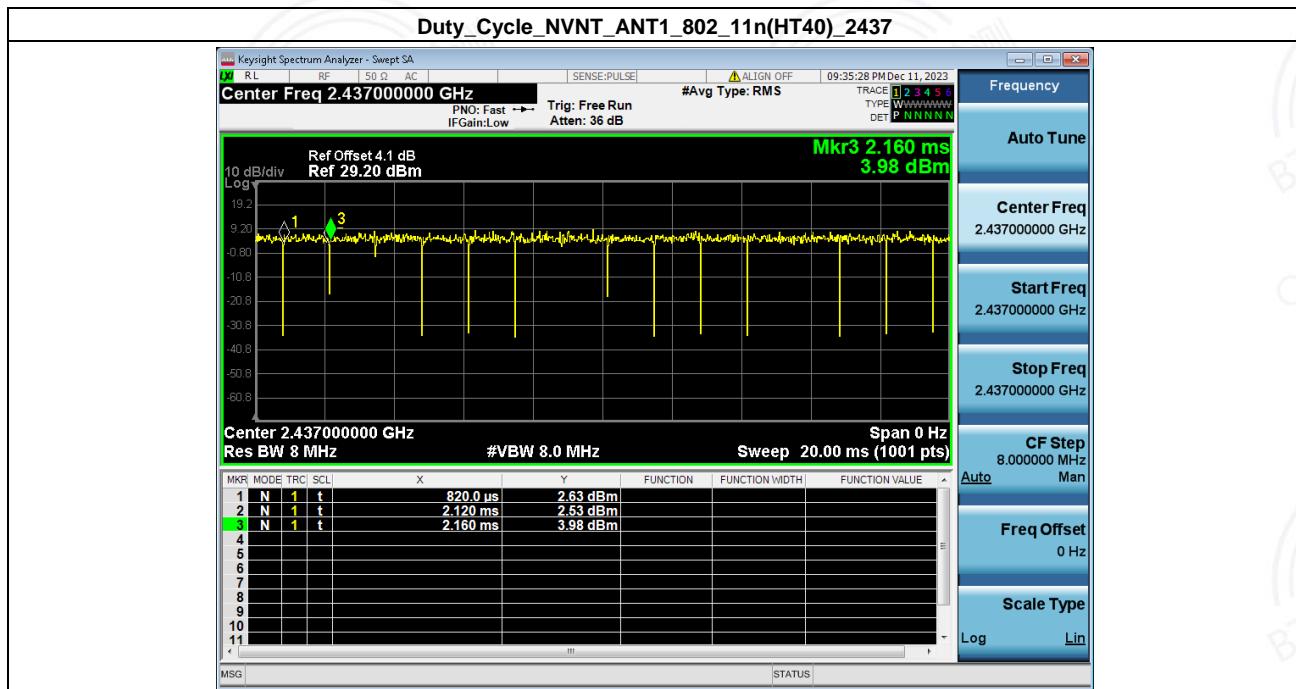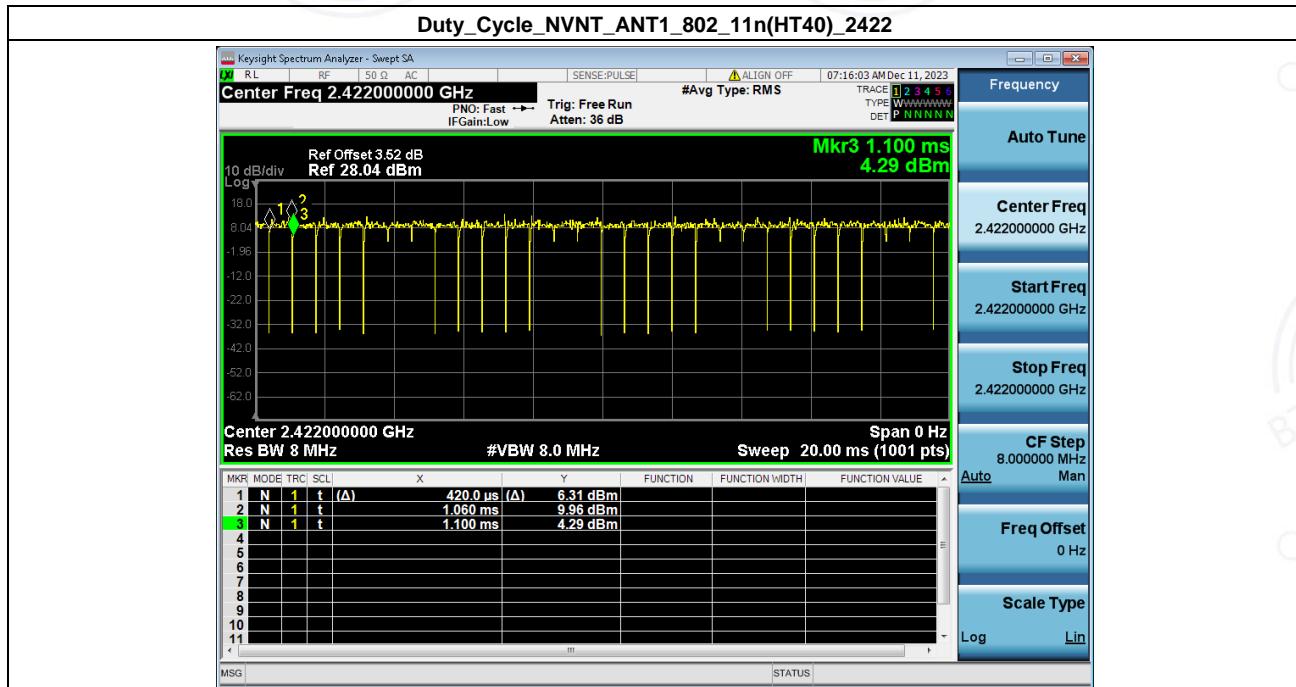

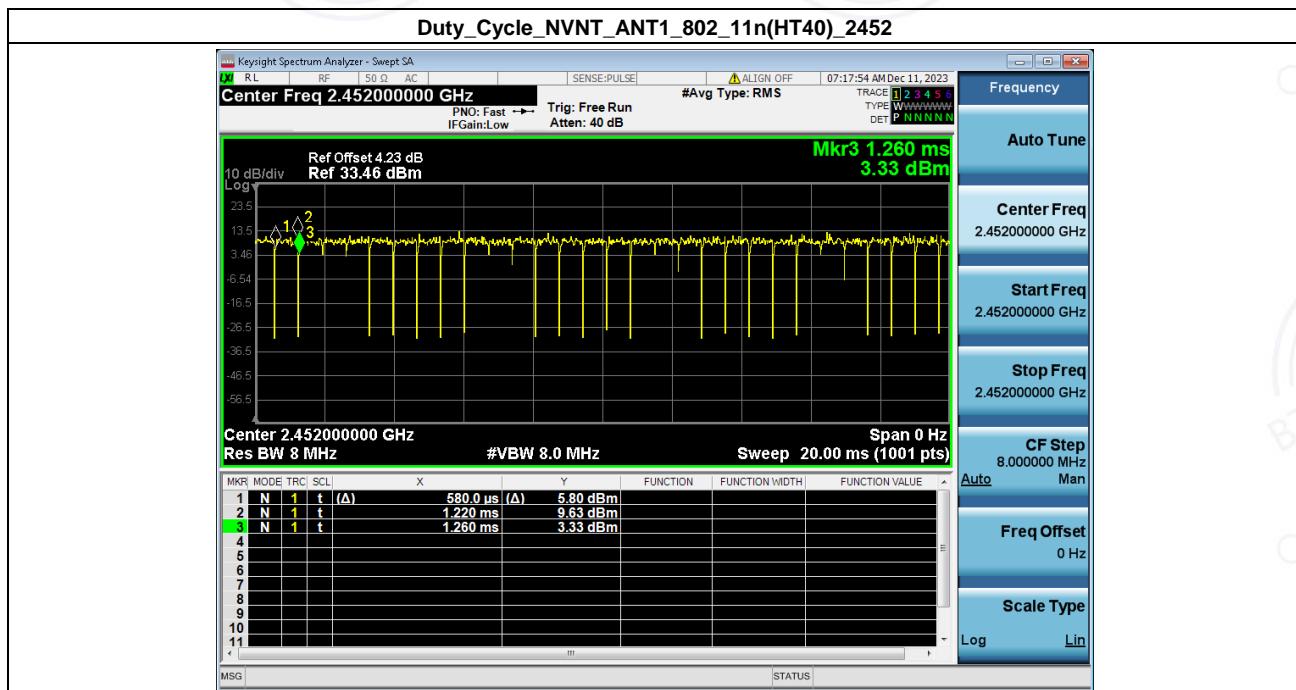


## 4. MAX. Output Power



Condition	Antenna	Modulation	Frequency (MHz)	Detector	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	15.82	N/A	15.82	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	16.15	N/A	16.15	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	16.22	N/A	16.22	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	19.39	N/A	19.39	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	20.16	N/A	20.16	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	20.24	N/A	20.24	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	18.43	N/A	18.43	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	19.29	N/A	19.29	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	19.36	N/A	19.36	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	Peak	16.69	N/A	16.69	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	Peak	17.60	N/A	17.60	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	Peak	17.84	N/A	17.84	30	Pass







## 5. Power Spectral Density



Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/30kHz)	Duty factor(dB)	RB factor(dB)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	-1.76	N/A	-10.00	-11.76	8	
NVNT	ANT1	802.11b	2437.00	-1.16	N/A	-10.00	-11.16	8	
NVNT	ANT1	802.11b	2462.00	-1.45	N/A	-10.00	-11.45	8	
NVNT	ANT1	802.11g	2412.00	-3.48	N/A	-10.00	-13.48	8	
NVNT	ANT1	802.11g	2437.00	-3.39	N/A	-10.00	-13.39	8	
NVNT	ANT1	802.11g	2462.00	-2.65	N/A	-10.00	-12.65	8	
NVNT	ANT1	802.11n(HT20)	2412.00	-5.08	N/A	-10.00	-15.08	8	
NVNT	ANT1	802.11n(HT20)	2437.00	-4.28	N/A	-10.00	-14.28	8	
NVNT	ANT1	802.11n(HT20)	2462.00	-3.89	N/A	-10.00	-13.89	8	
NVNT	ANT1	802.11n(HT40)	2422.00	-8.91	N/A	-10.00	-18.91	8	
NVNT	ANT1	802.11n(HT40)	2437.00	-7.30	N/A	-10.00	-17.30	8	
NVNT	ANT1	802.11n(HT40)	2452.00	-7.80	N/A	-10.00	-17.80	8	


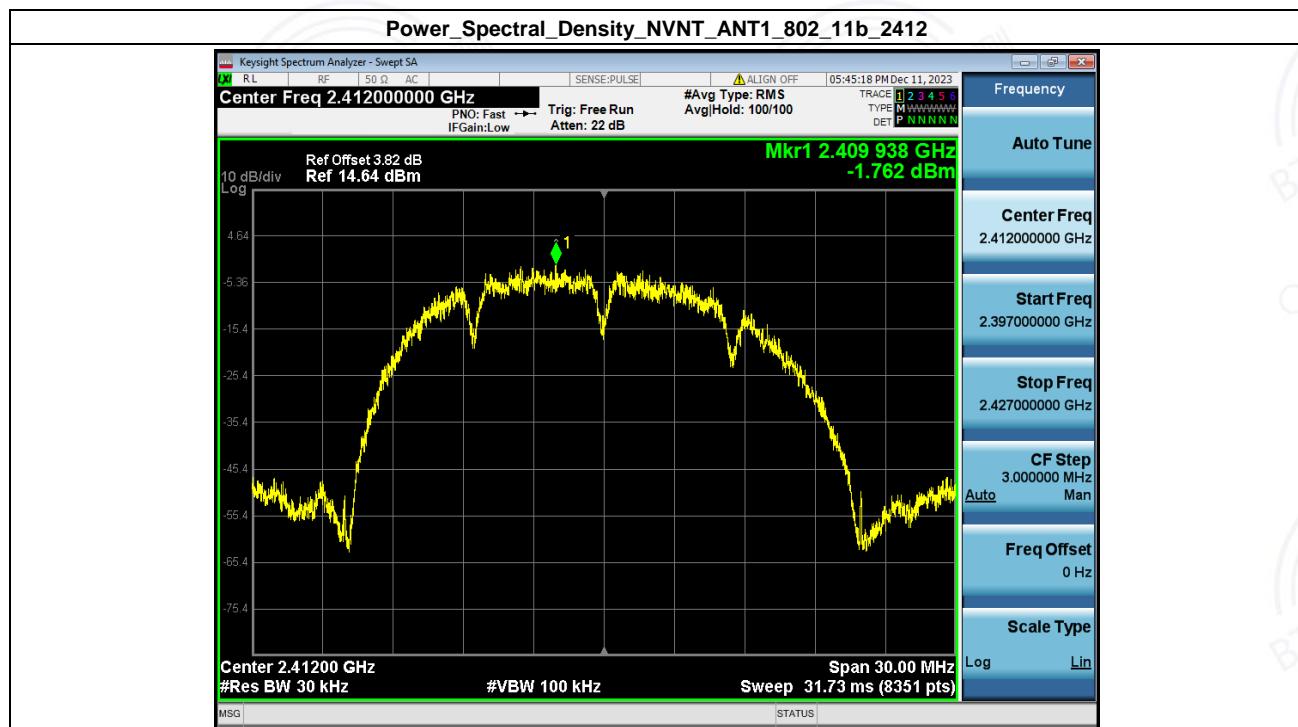


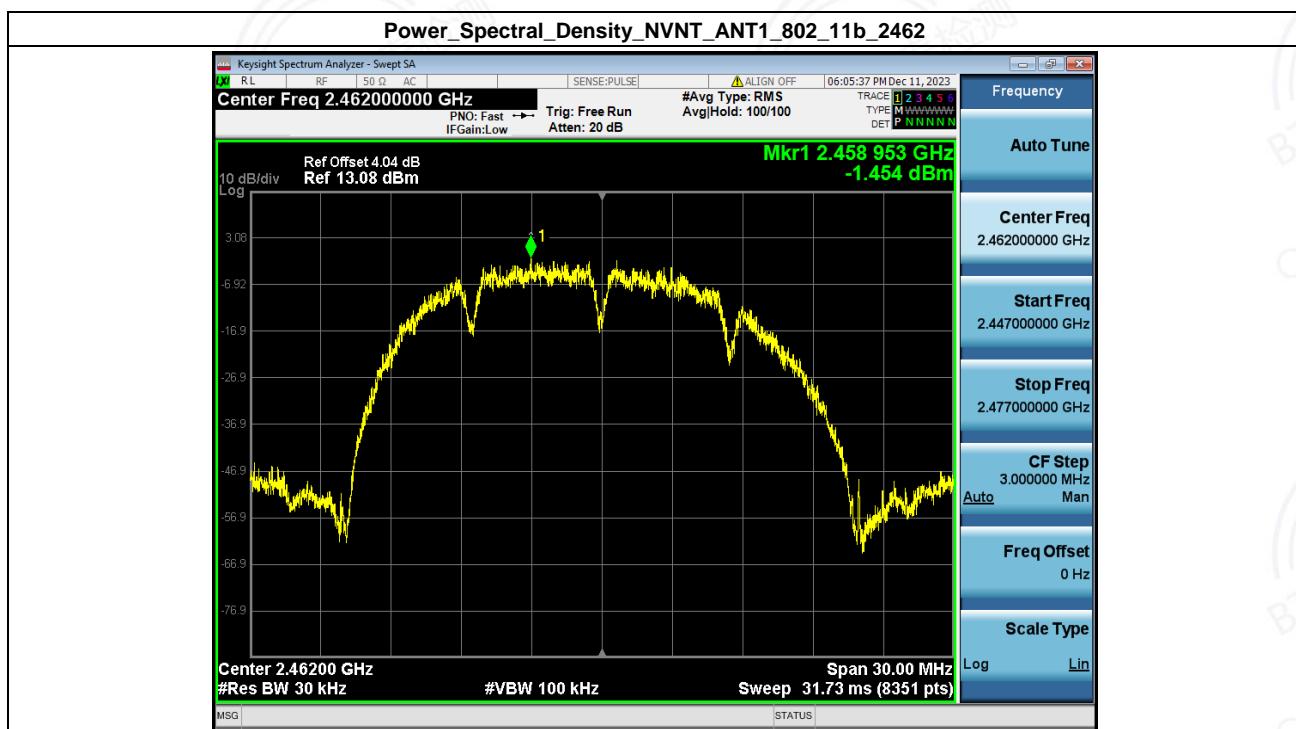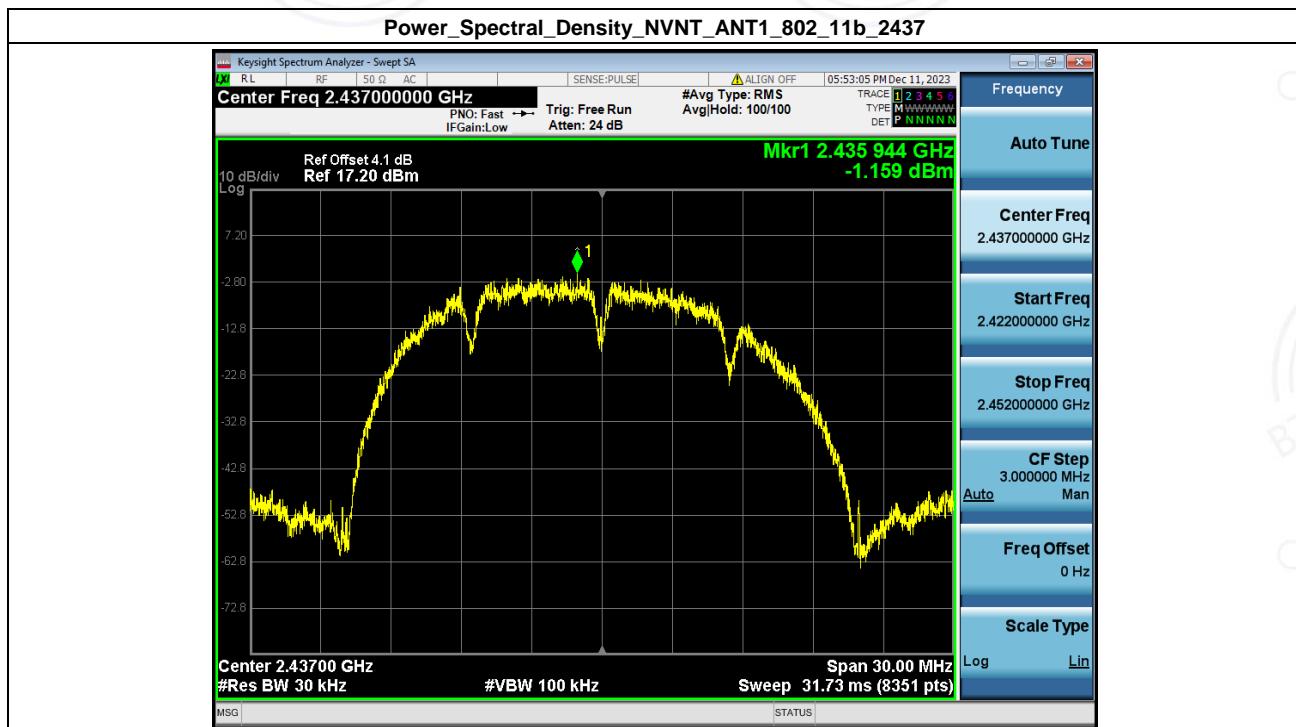


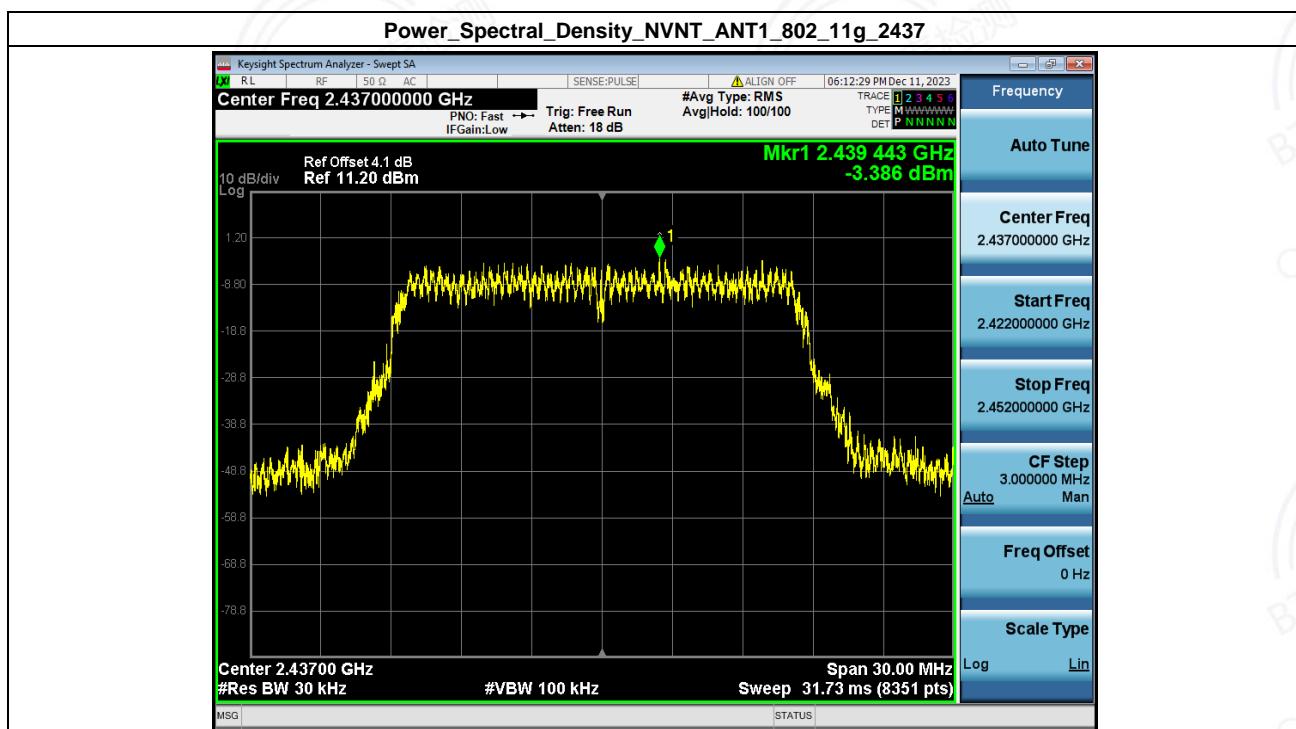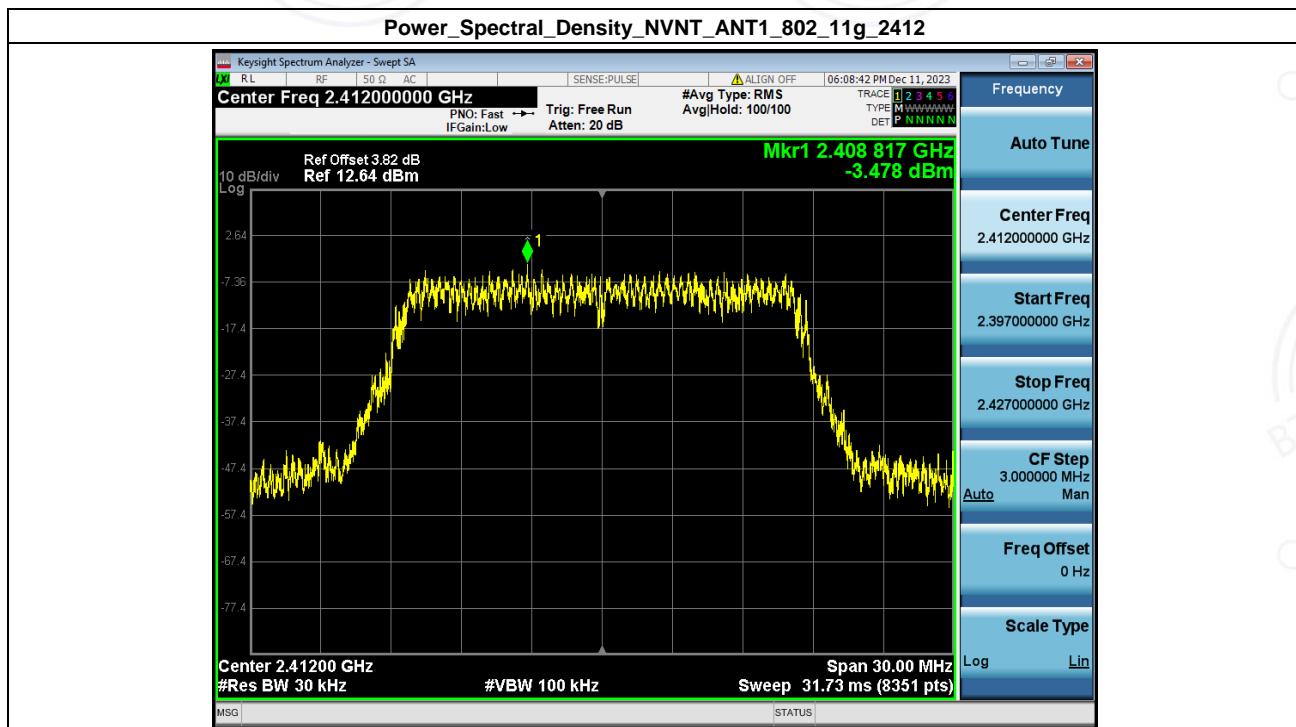

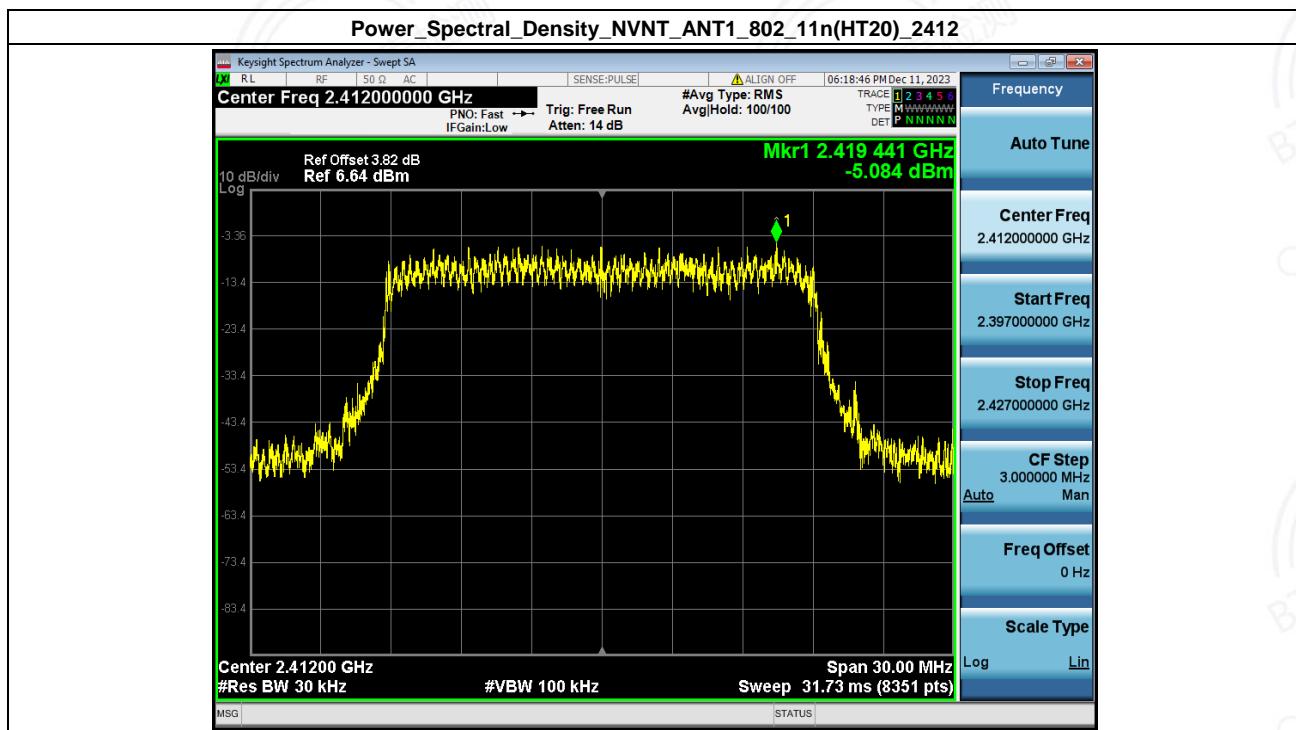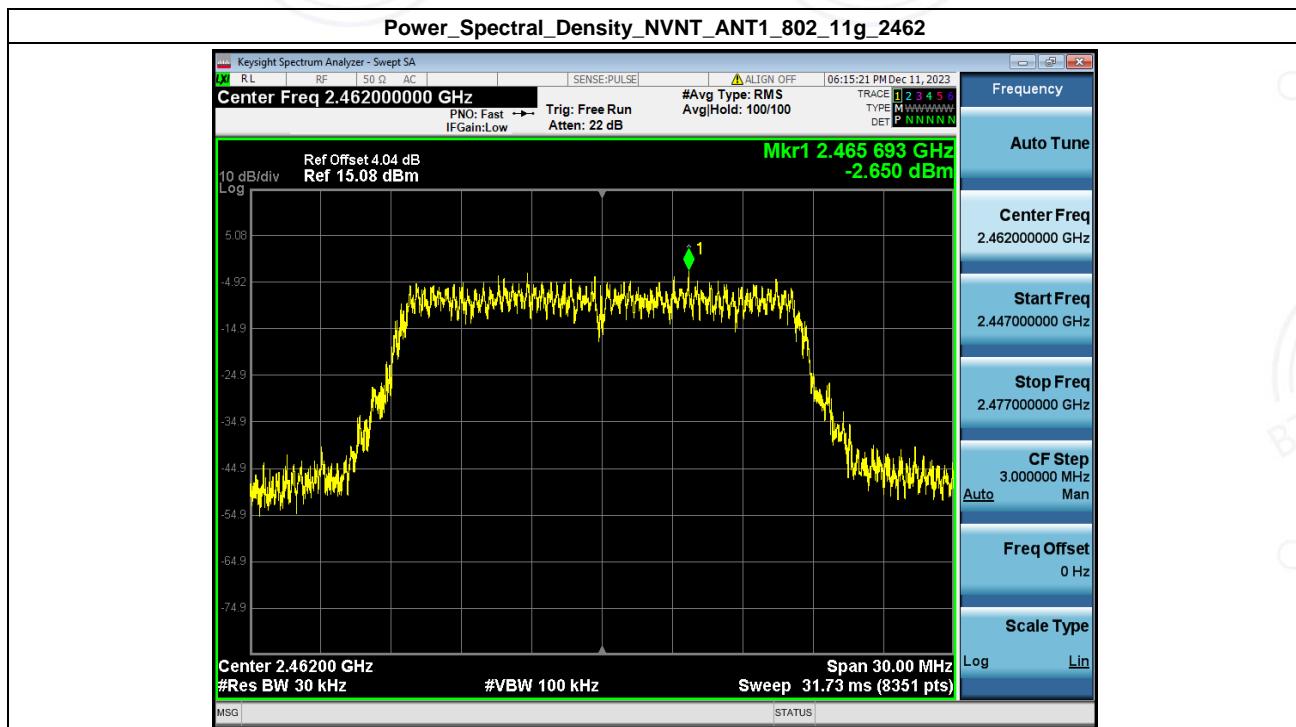

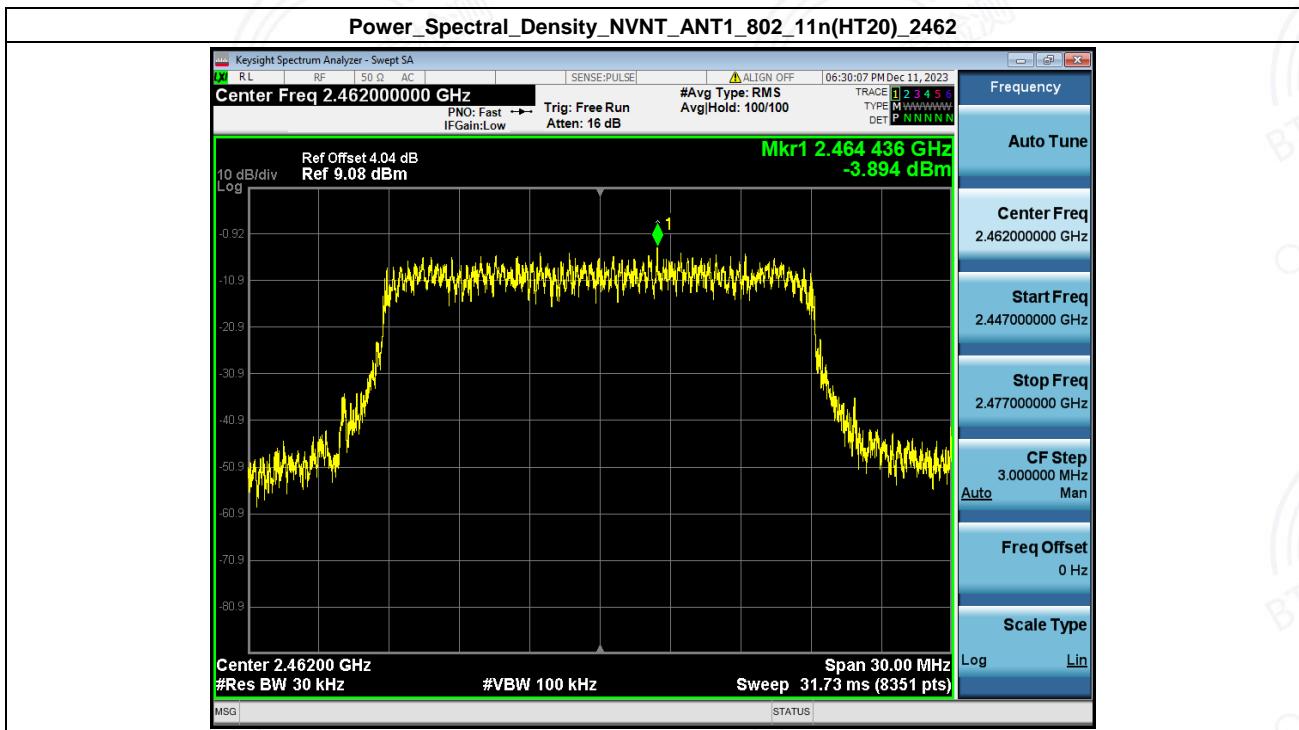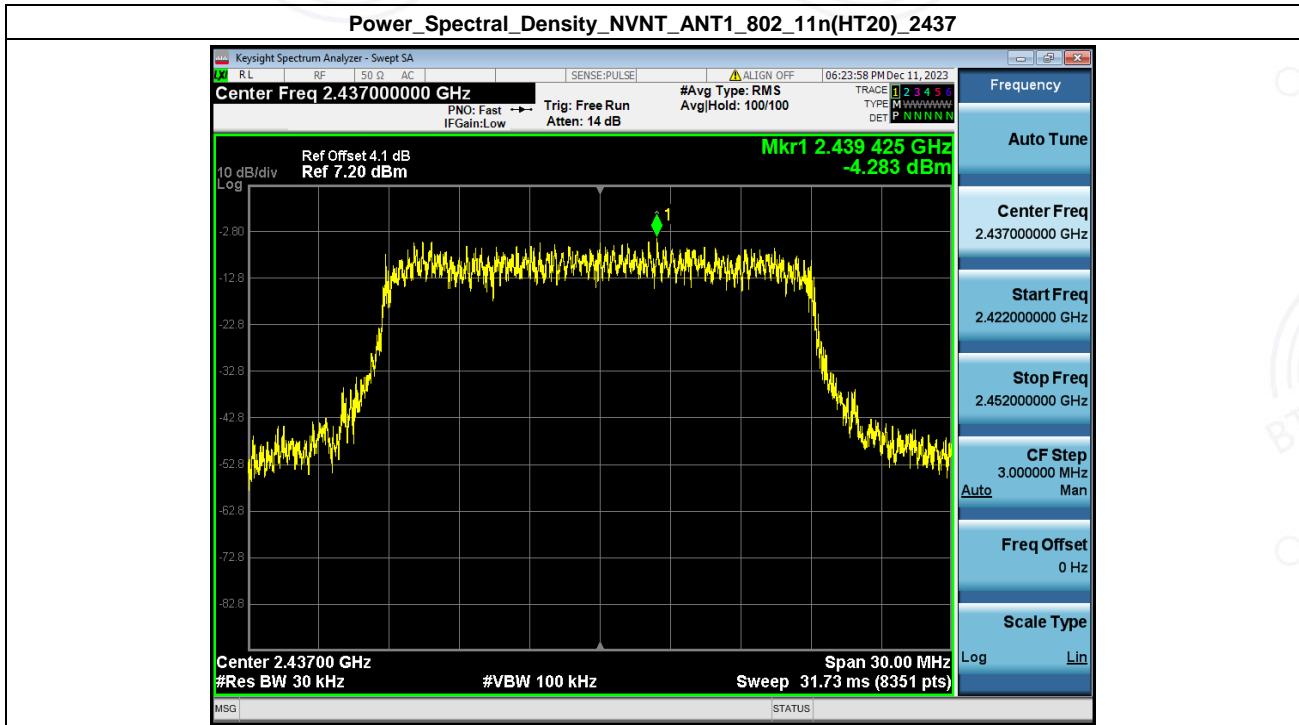


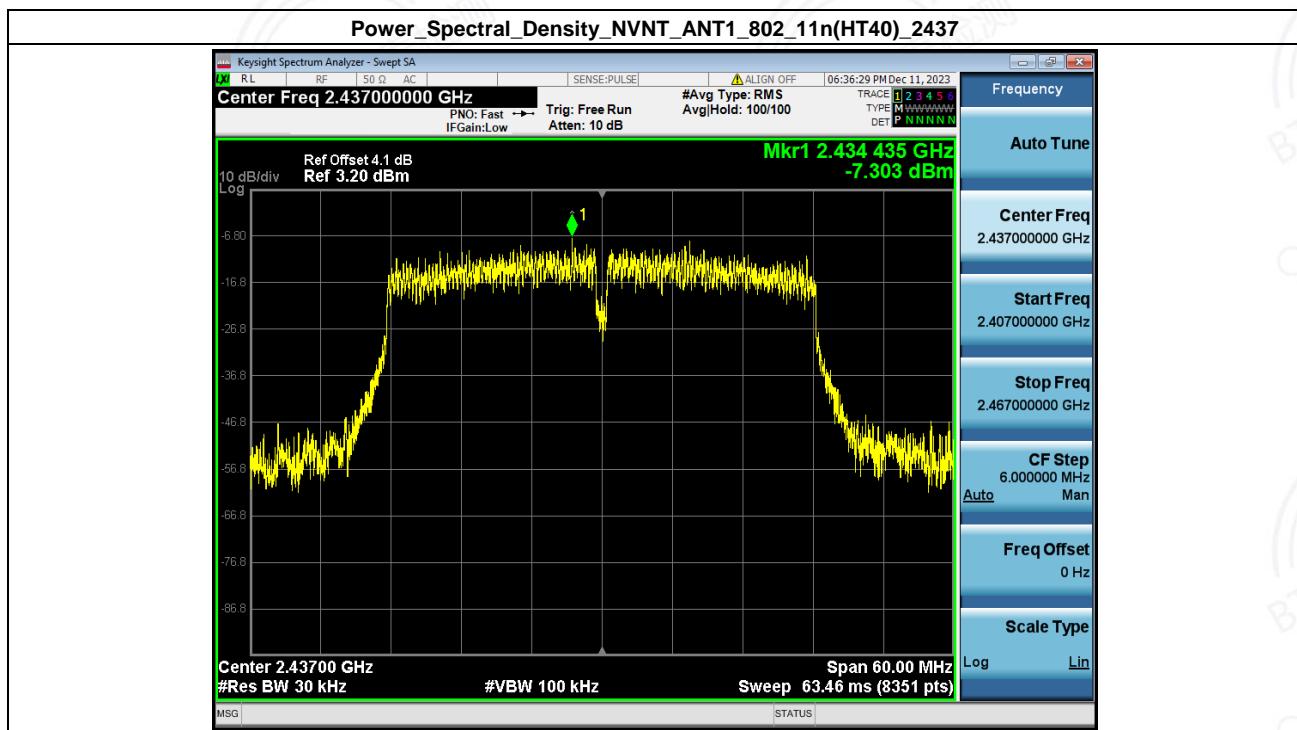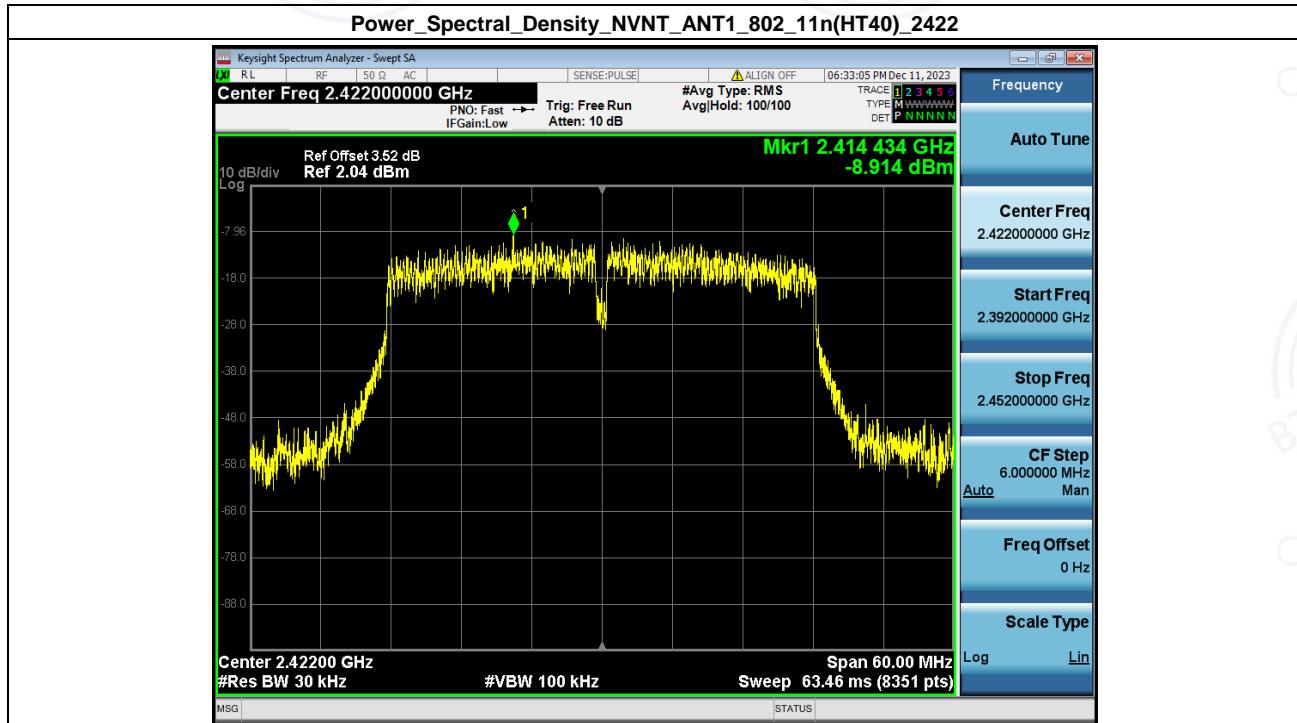



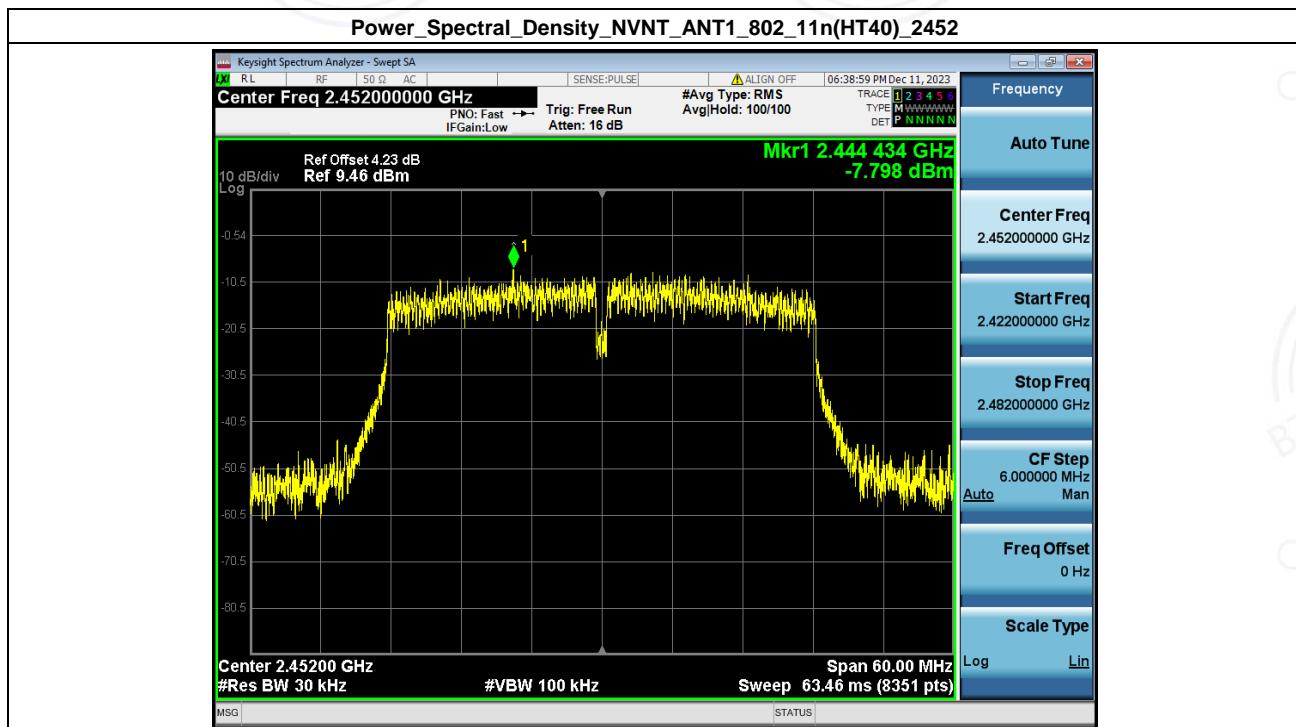




## 6. Bandedge



Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	2397.024	-43.665	-17.899	Pass
NVNT	ANT1	802.11b	2462.00	2484.976	-55.559	-17.326	Pass
NVNT	ANT1	802.11g	2412.00	2397.024	-38.812	-19.797	Pass
NVNT	ANT1	802.11g	2462.00	2484.880	-42.388	-20.401	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	2399.936	-40.544	-20.203	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	2484.064	-39.785	-16.501	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	2399.100	-44.736	-23.988	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	2487.556	-42.916	-22.886	Pass


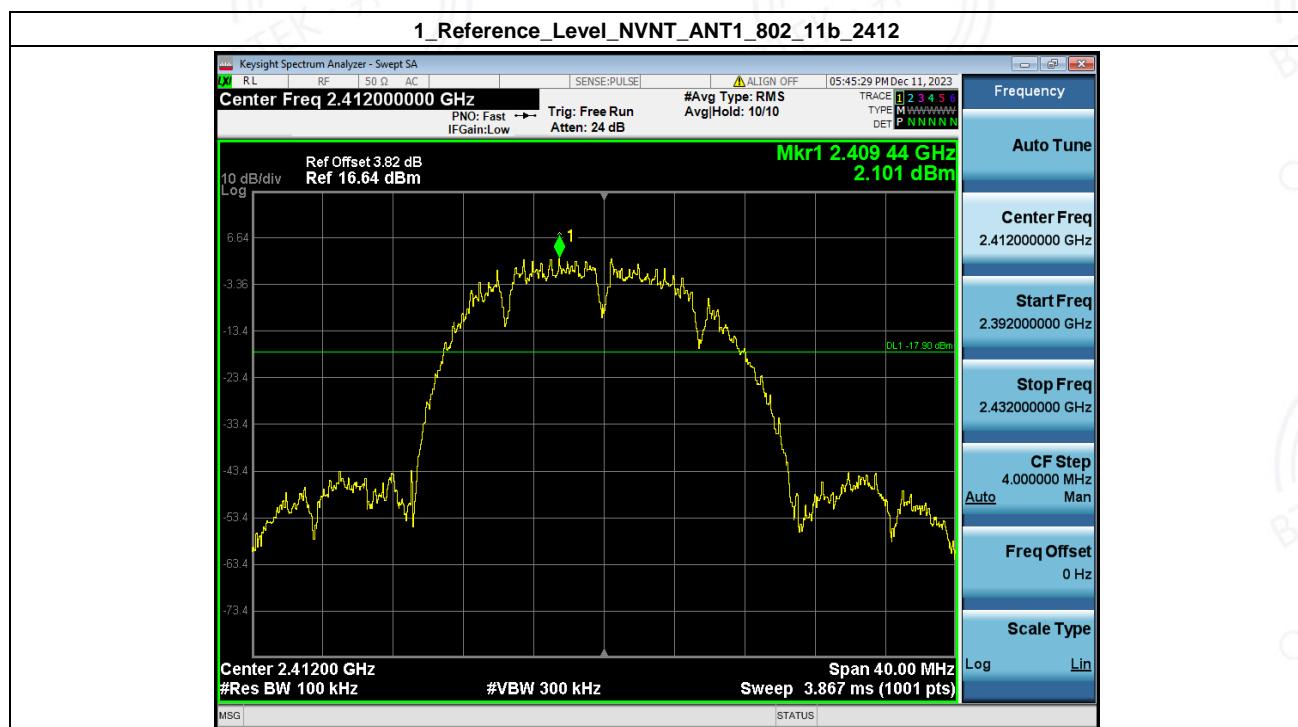



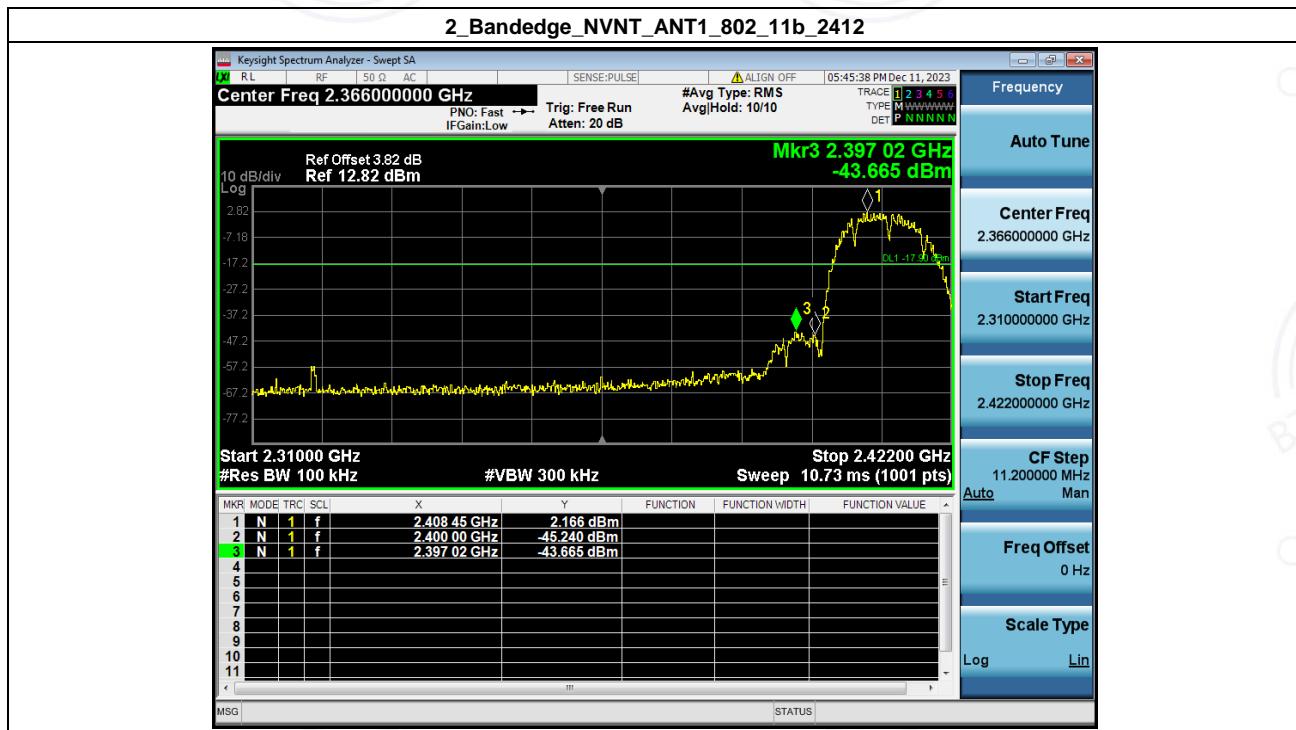


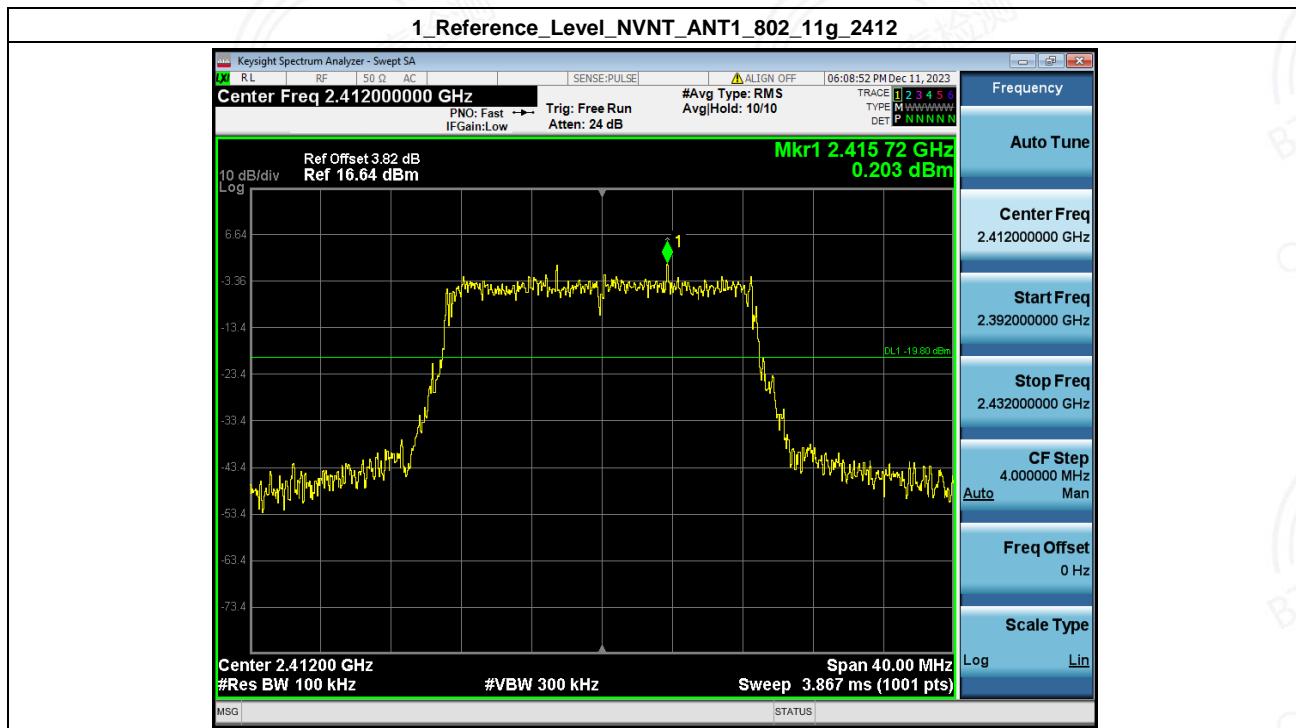
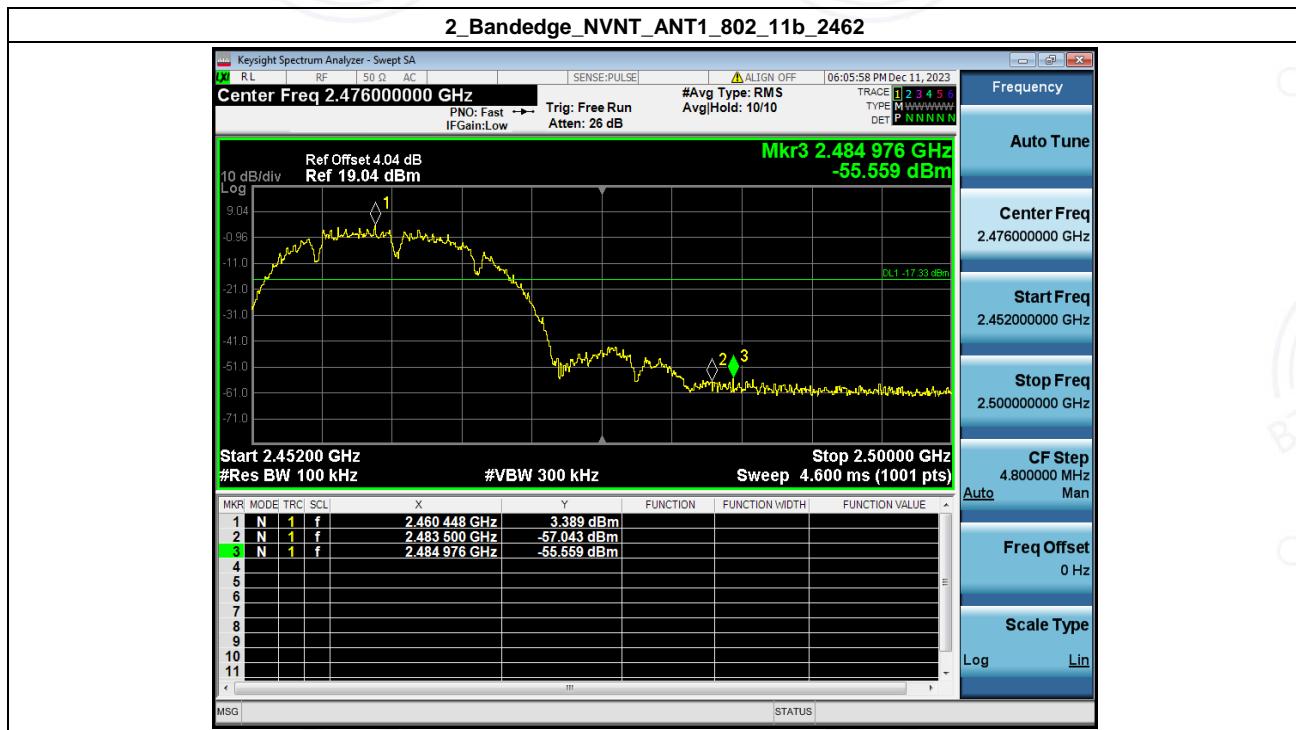


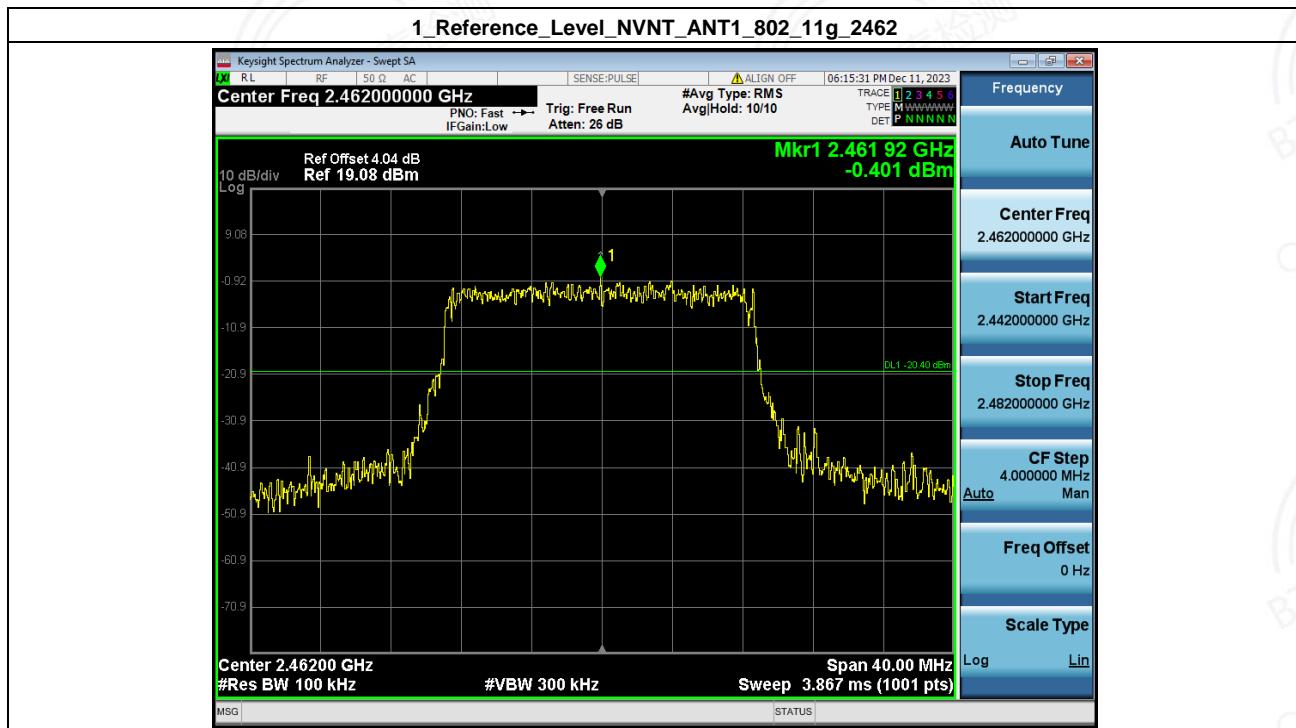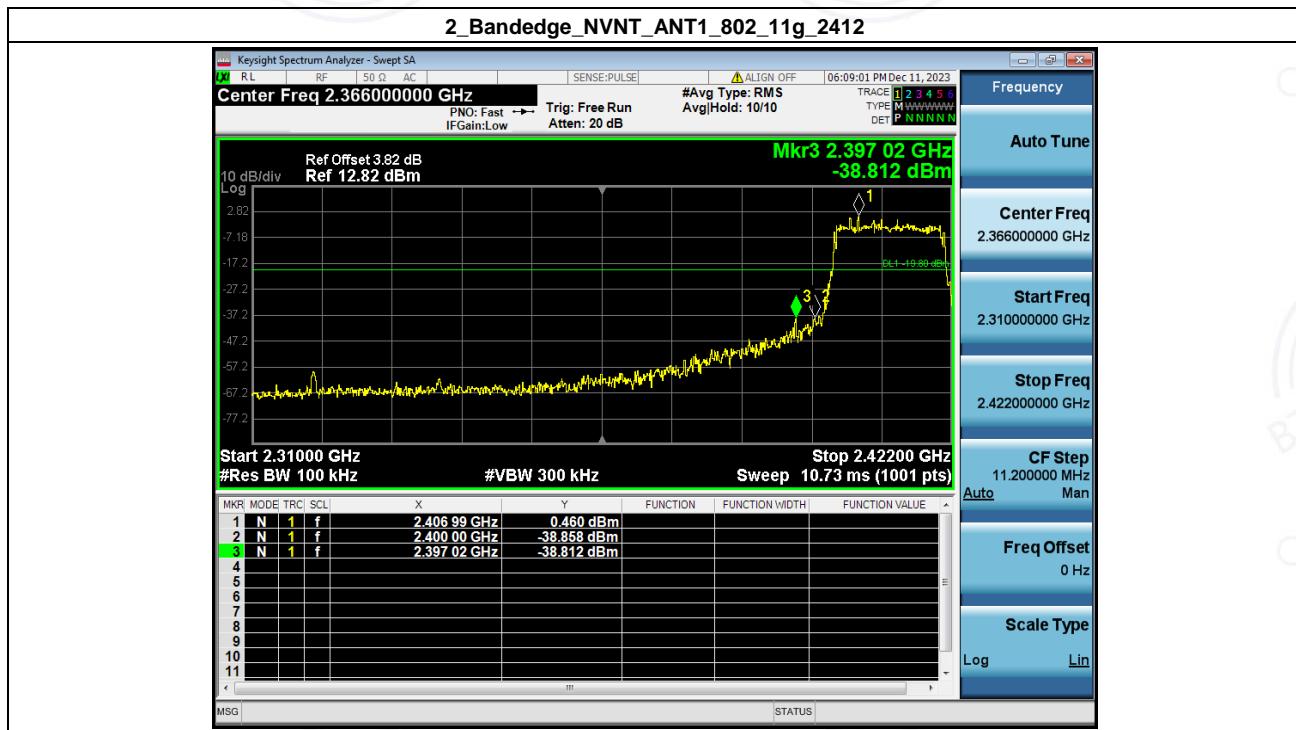


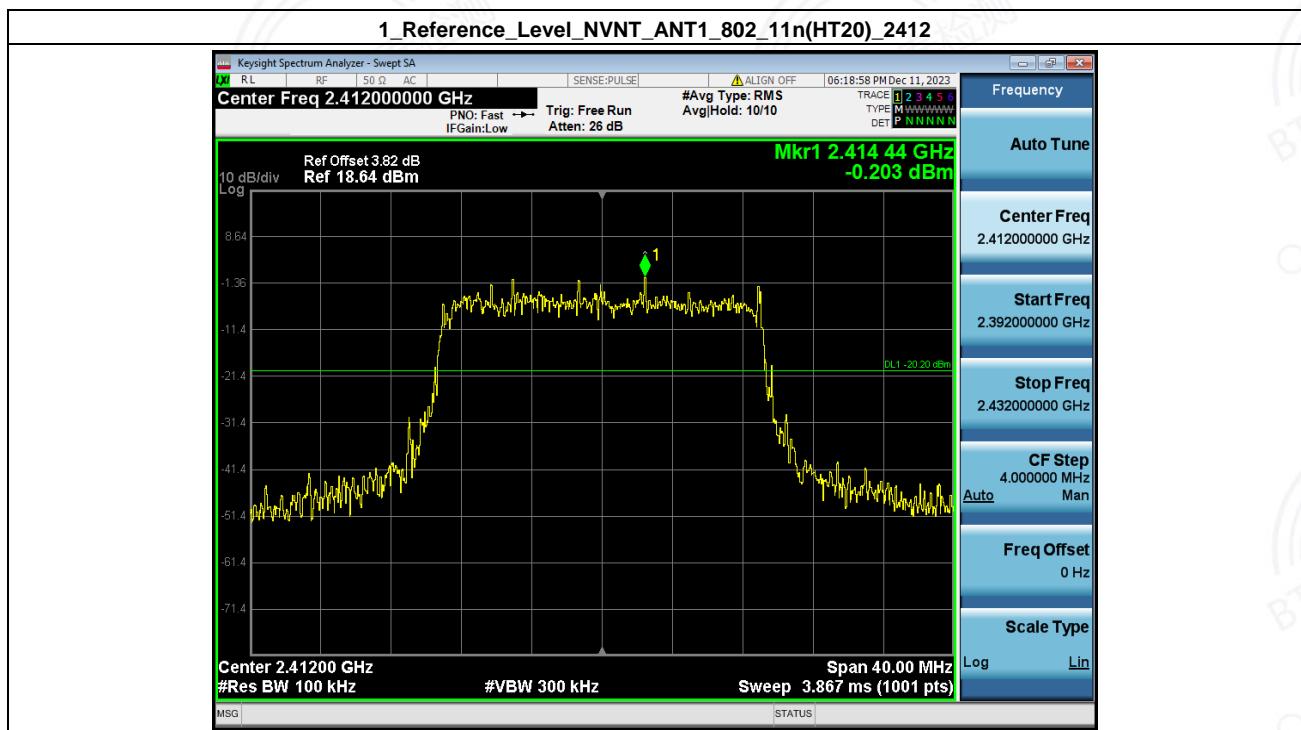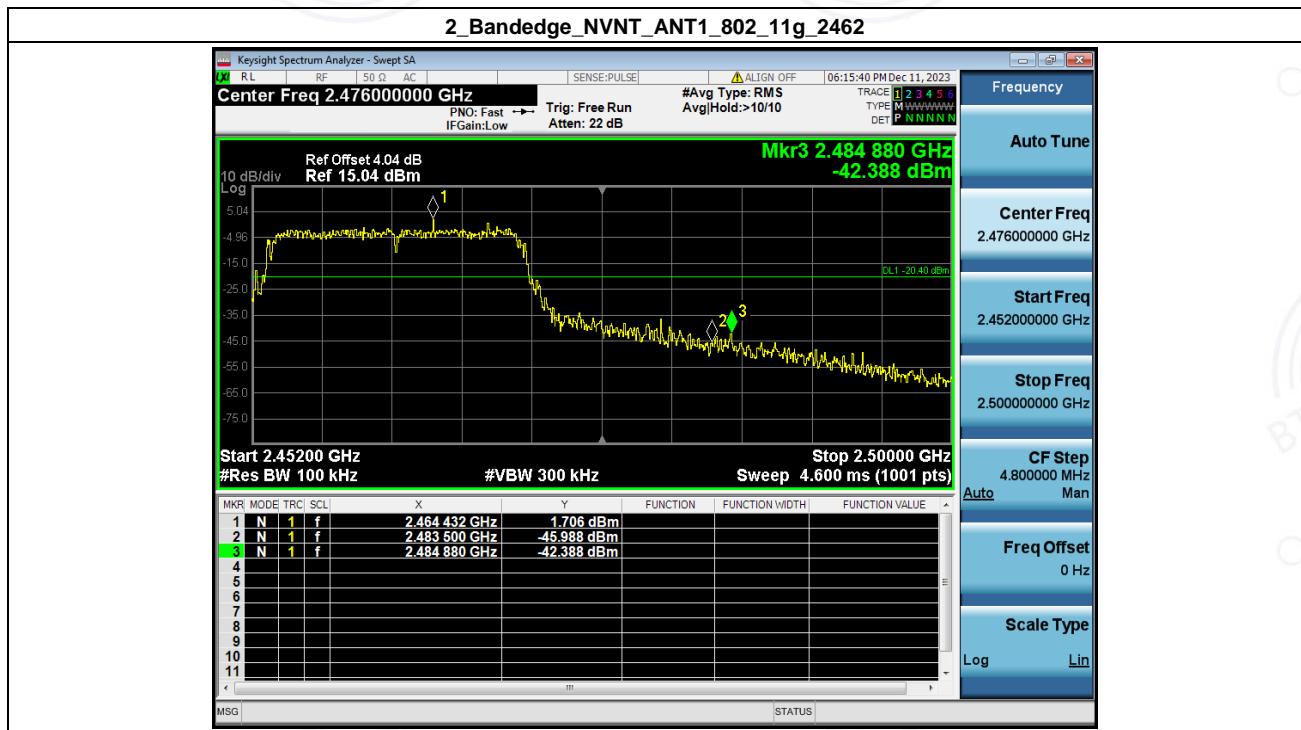

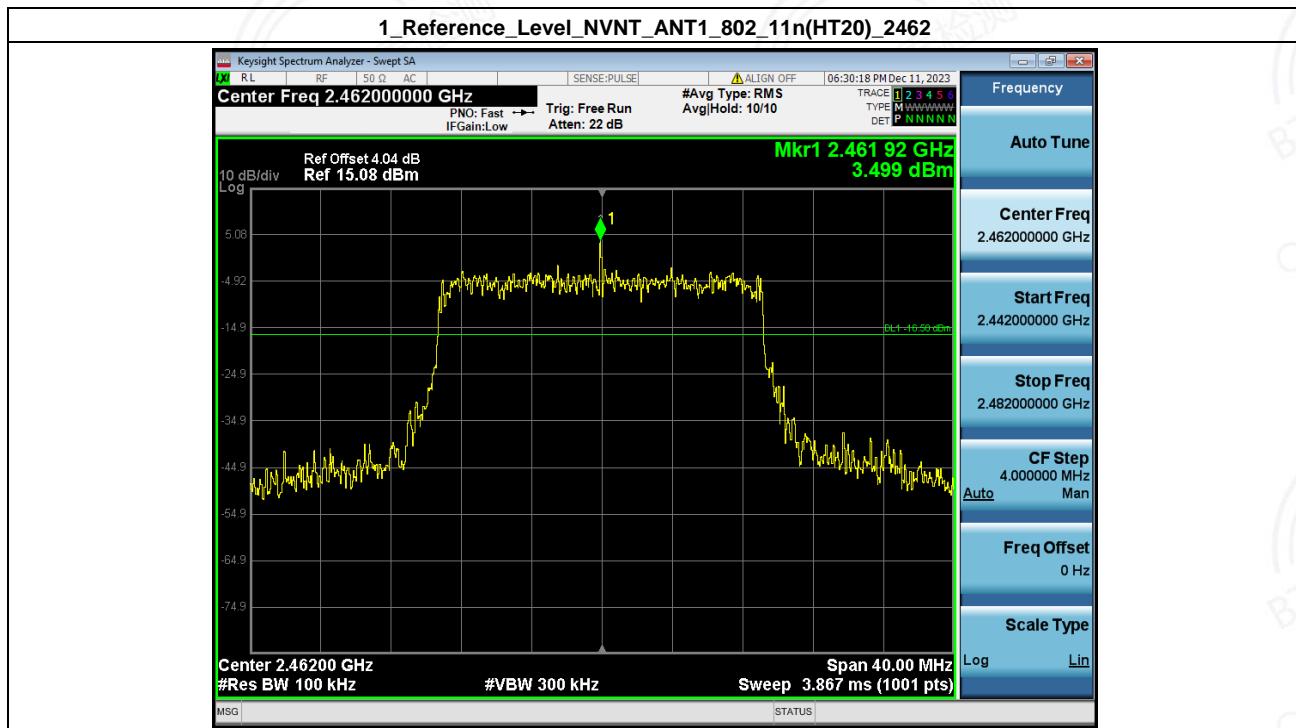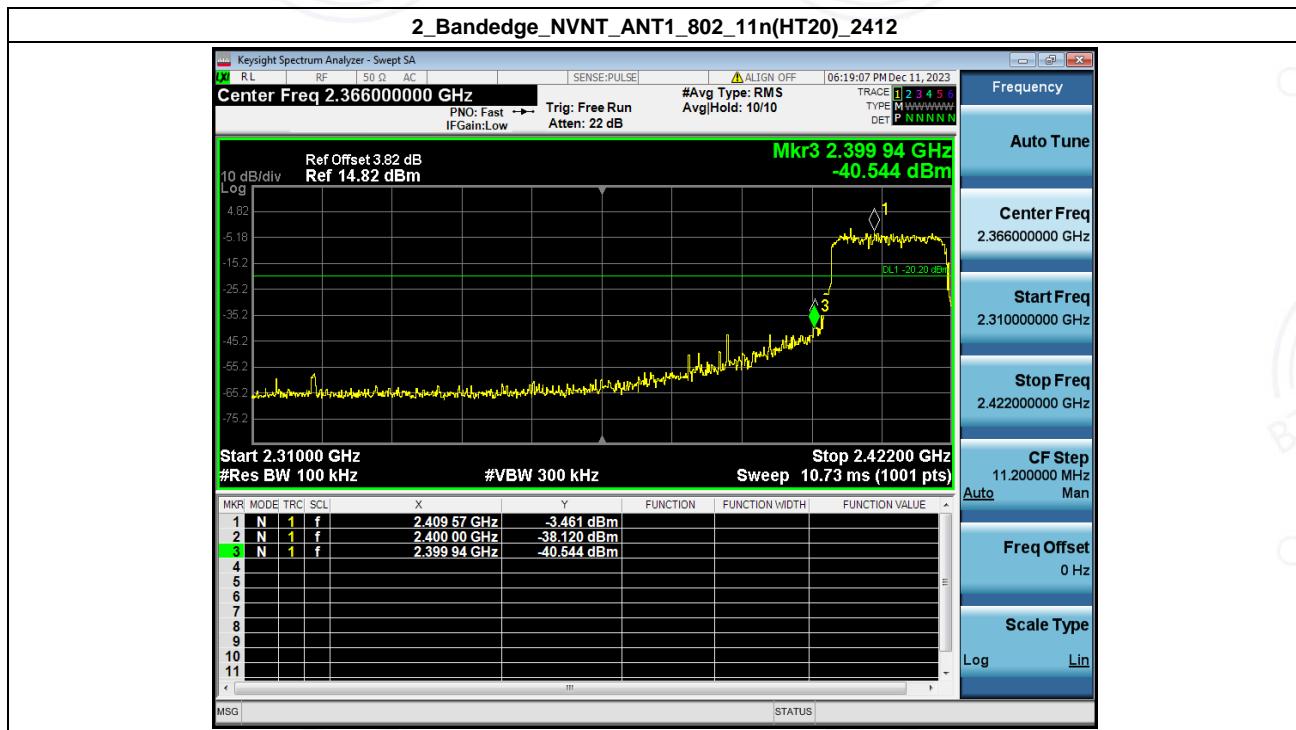

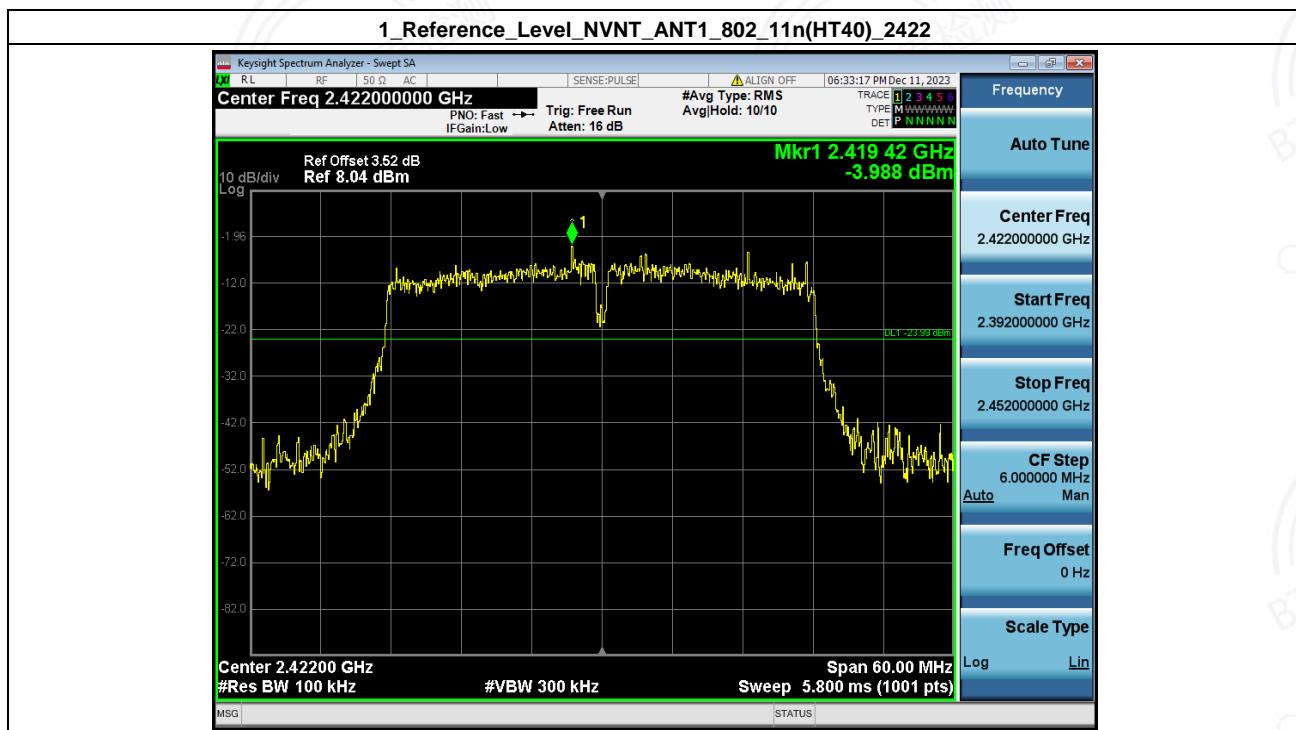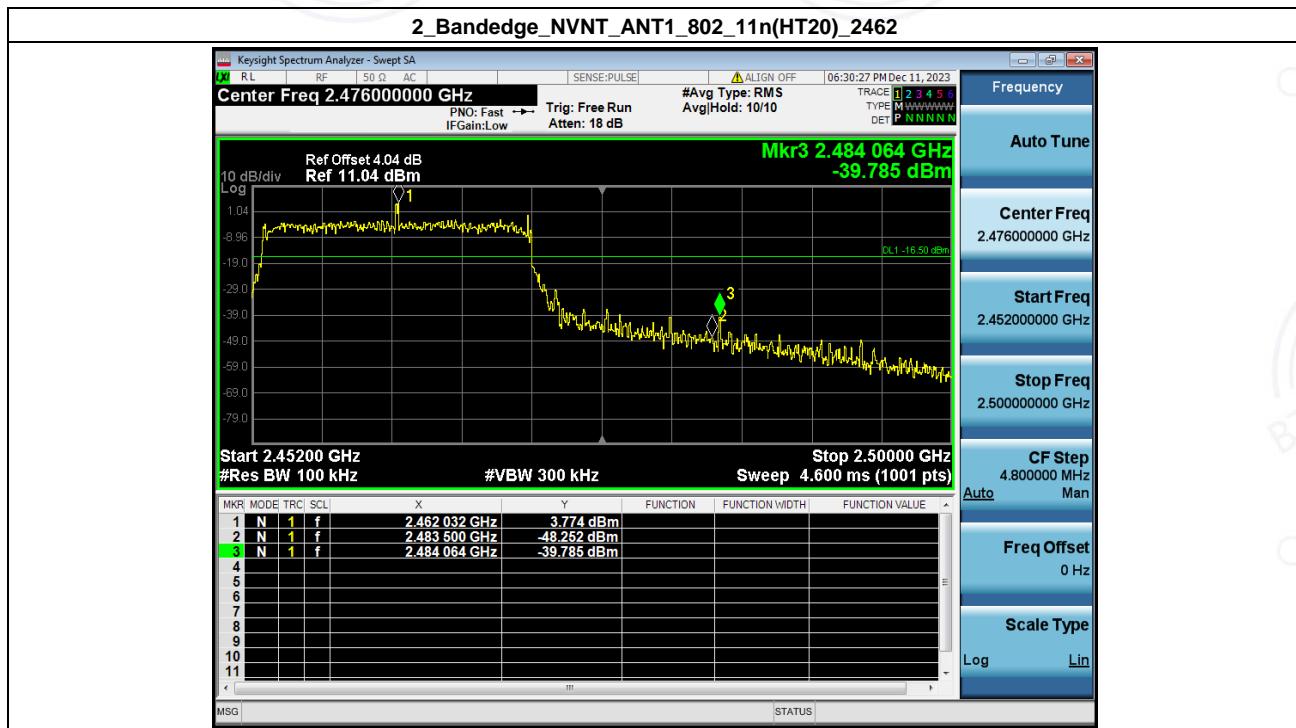


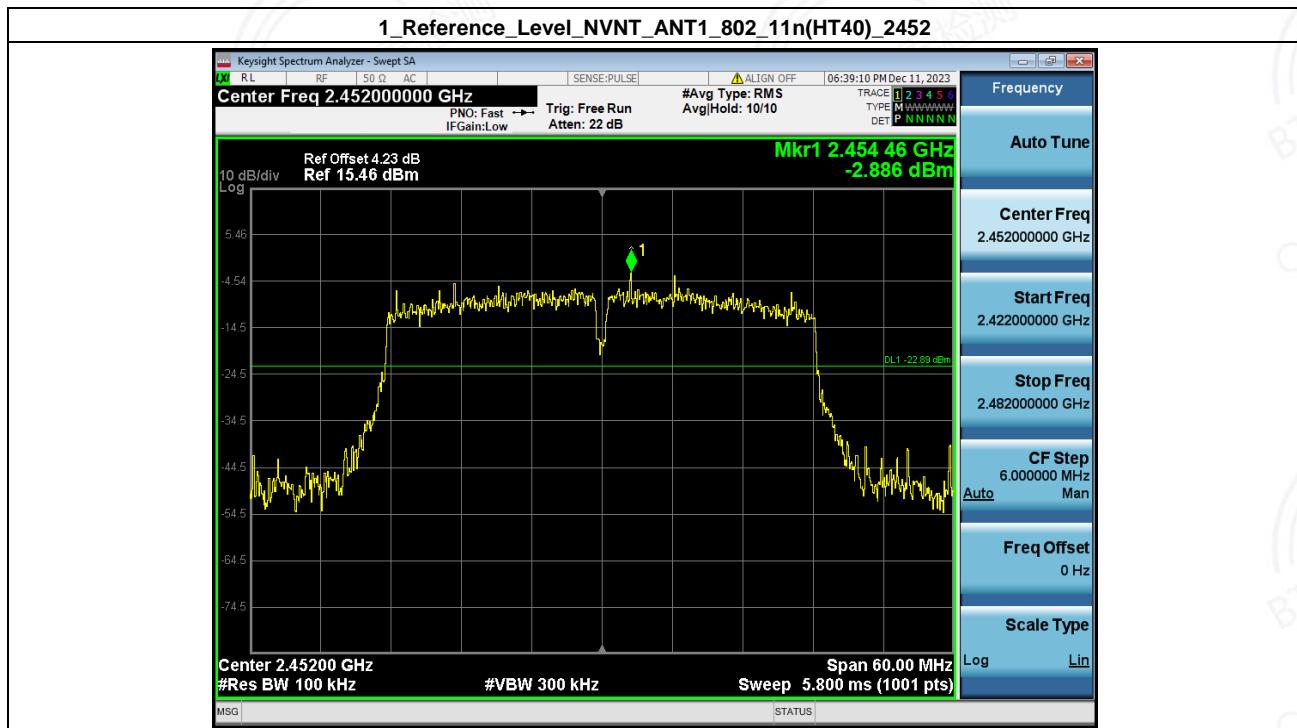
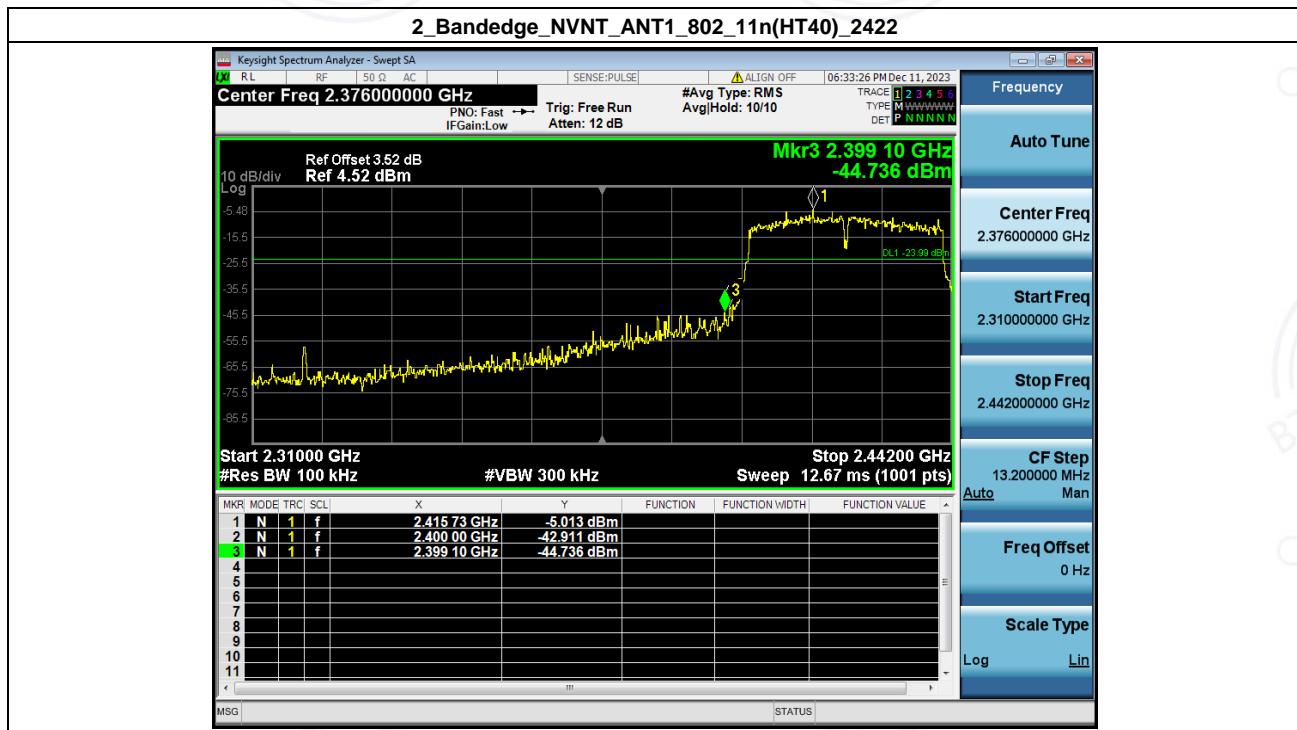


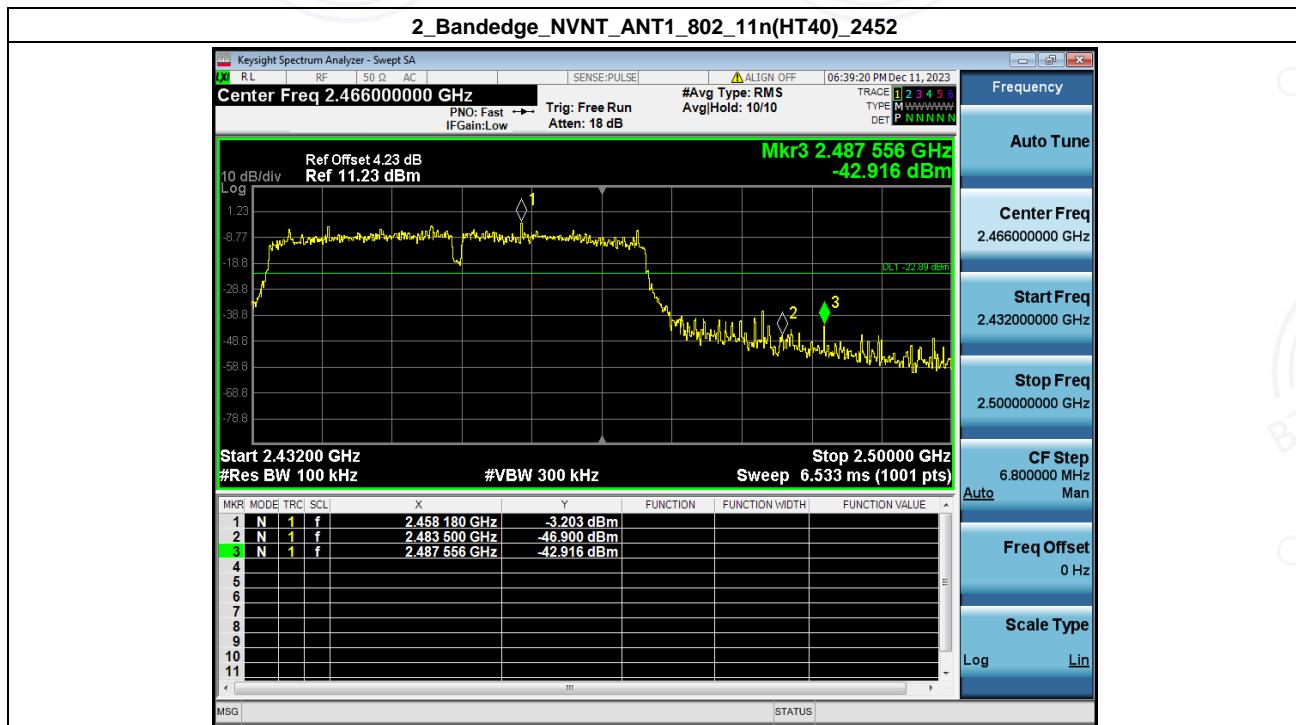




## 7. Spurious Emission



Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	2239.845	-51.174	-17.899	Pass
NVNT	ANT1	802.11b	2437.00	2559.461	-51.023	-17.648	Pass
NVNT	ANT1	802.11b	2462.00	24780.264	-44.751	-12.346	Pass
NVNT	ANT1	802.11g	2412.00	2507.024	-51.146	-17.063	Pass
NVNT	ANT1	802.11g	2437.00	24573.013	-50.769	-19.394	Pass
NVNT	ANT1	802.11g	2462.00	2559.461	-51.906	-20.401	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	24737.815	-50.259	-18.079	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	2559.461	-52.754	-20.637	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	2239.845	-56.362	-16.501	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	2559.461	-51.270	-23.988	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	24712.845	-54.503	-24.460	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	2559.461	-52.986	-22.886	Pass


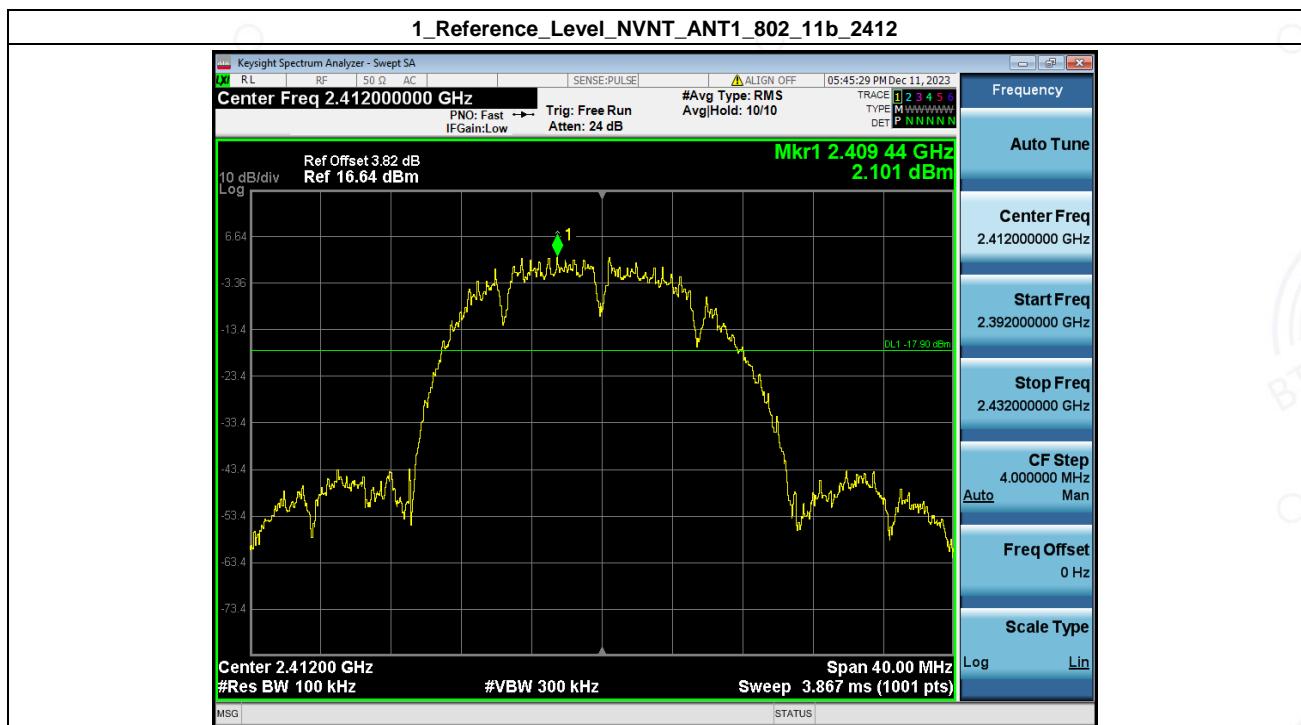


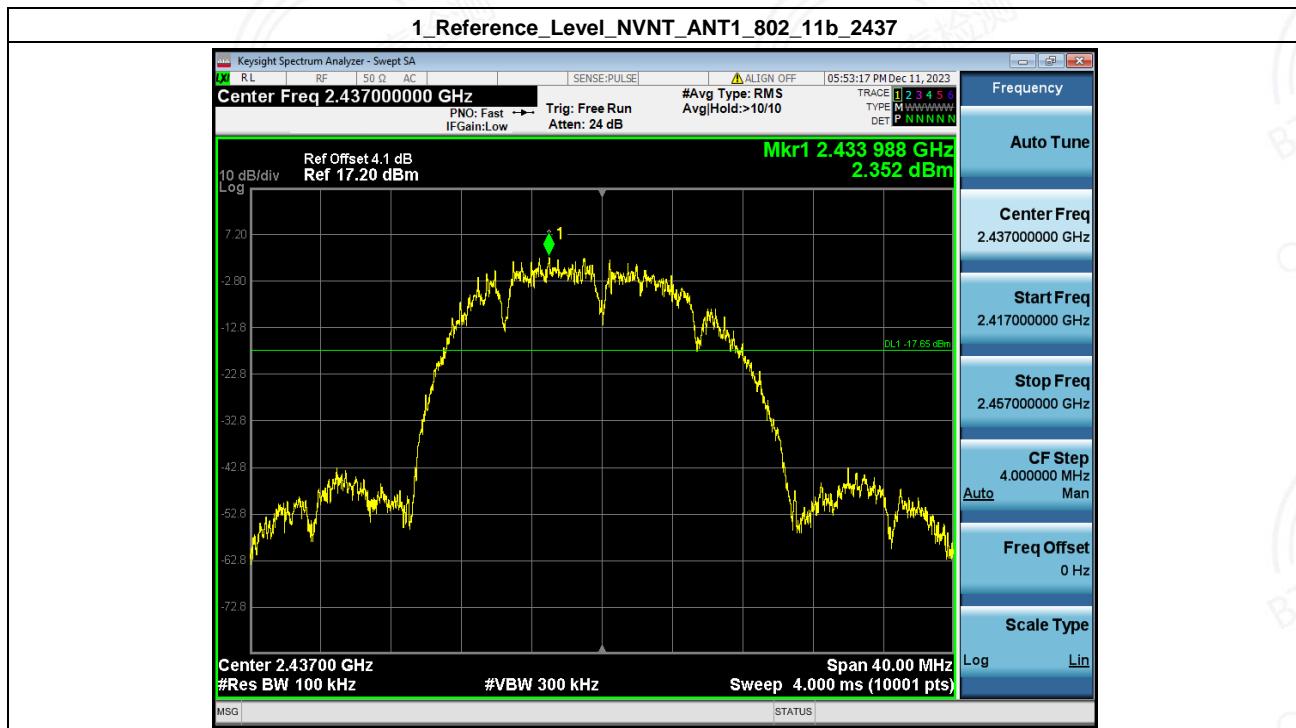
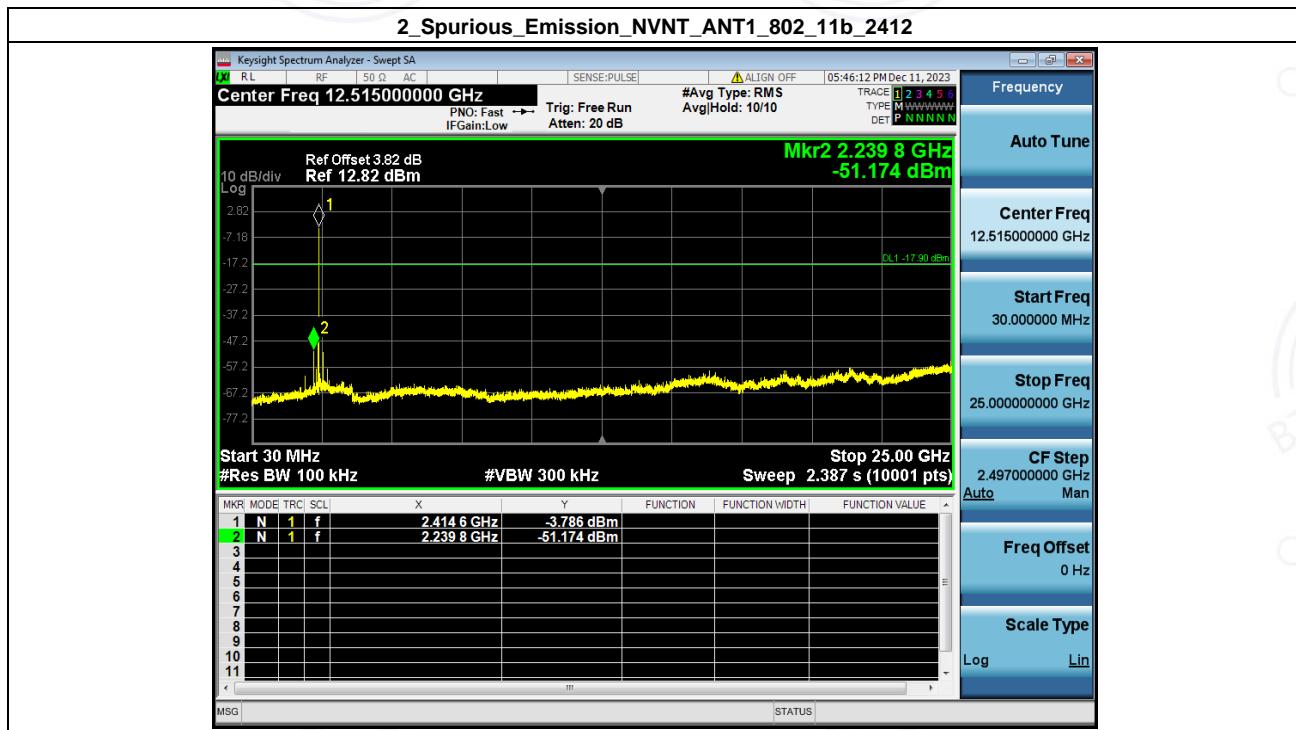



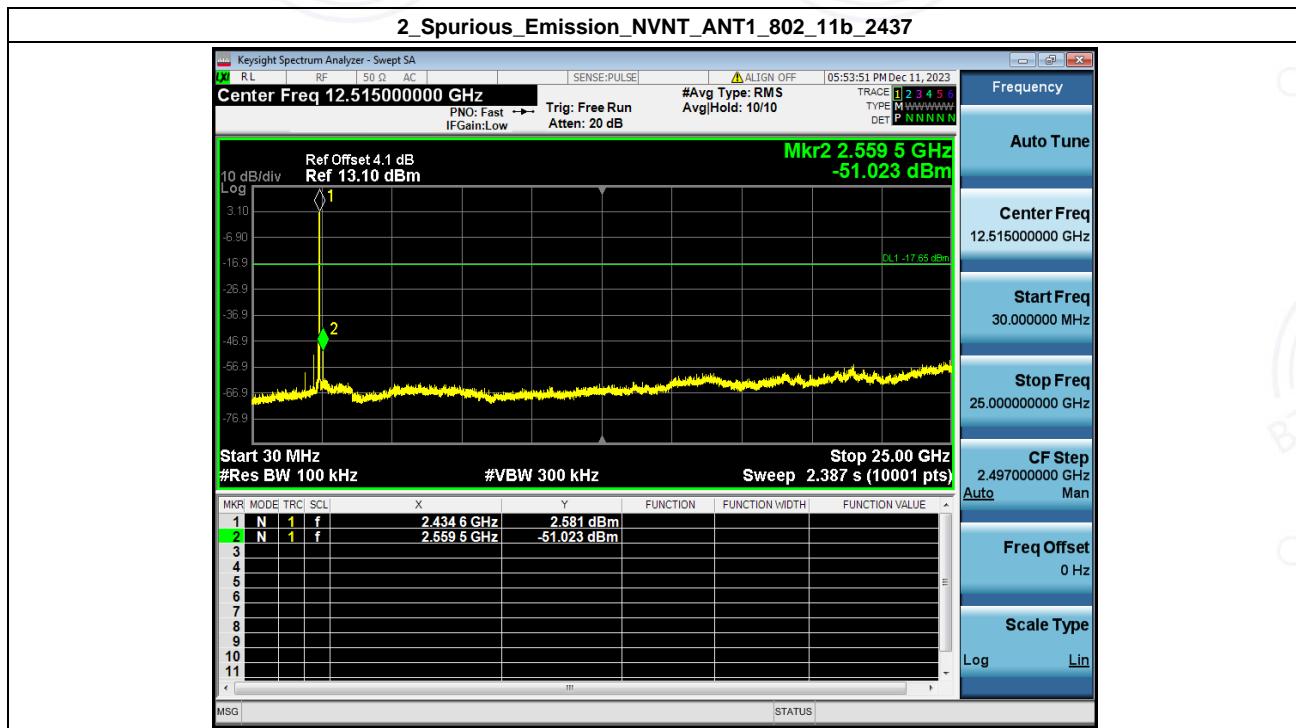


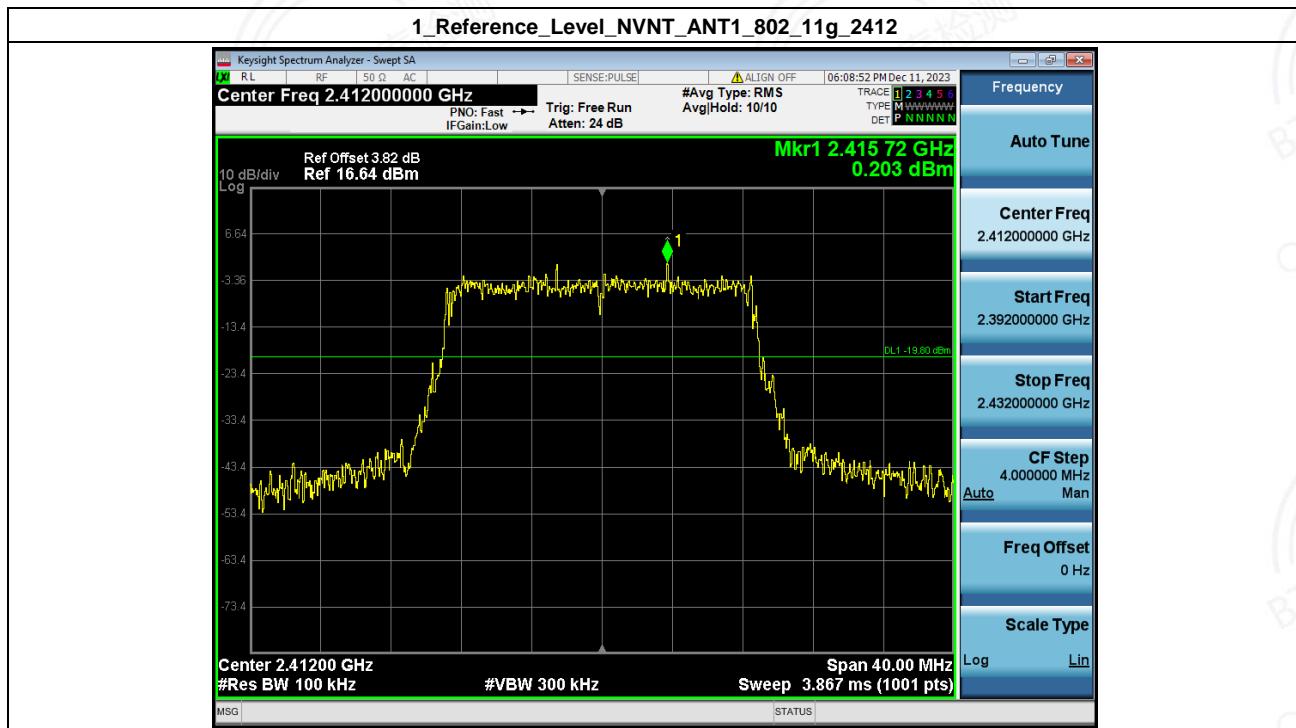
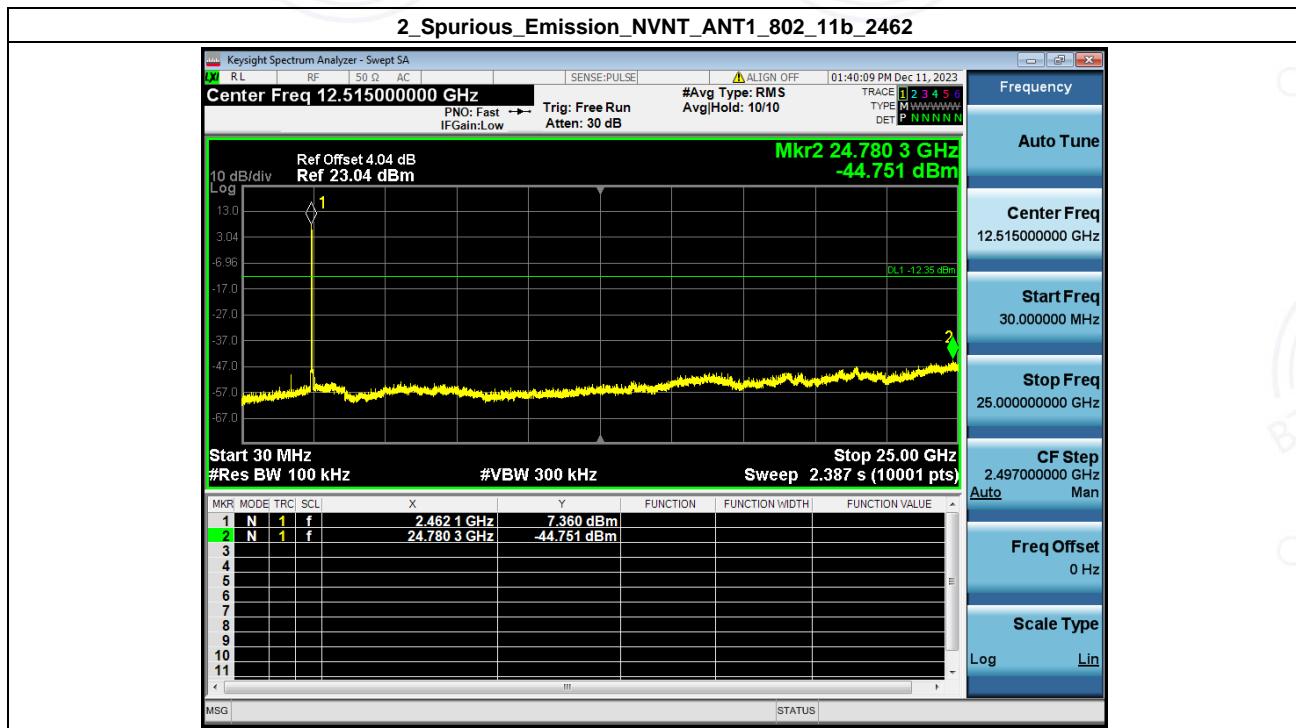


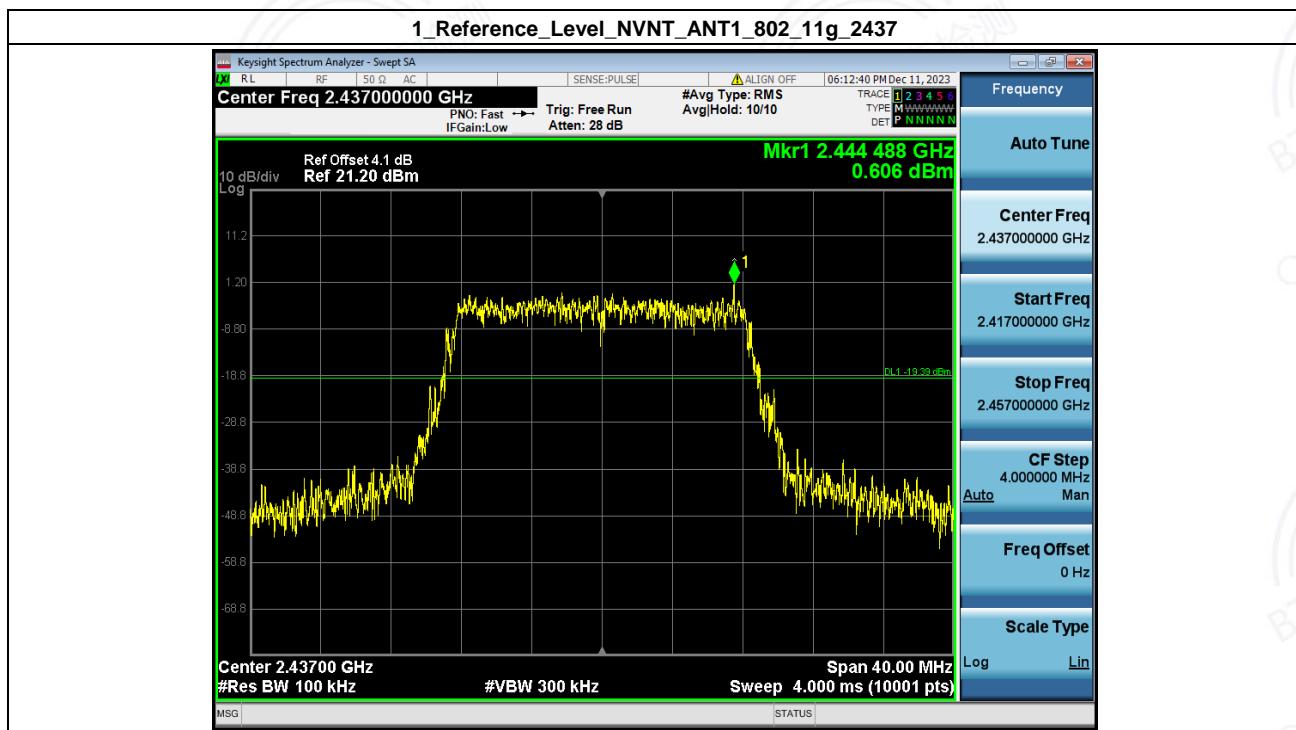
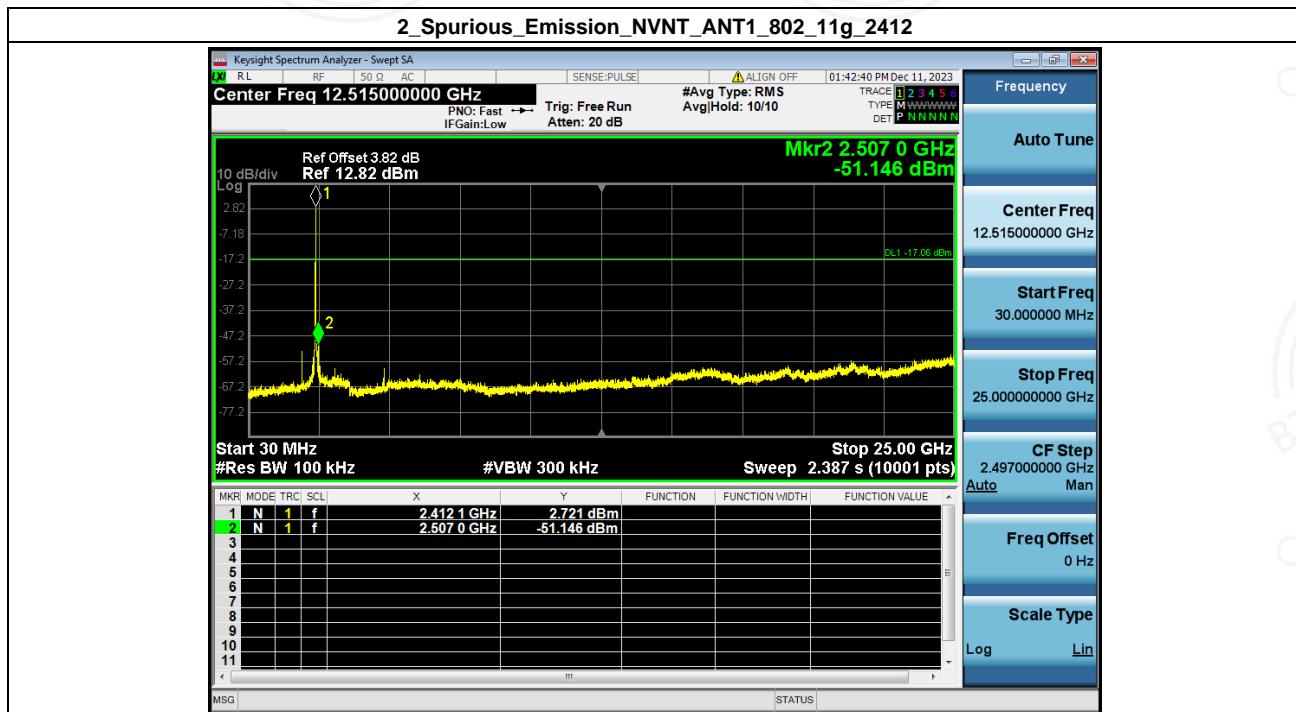


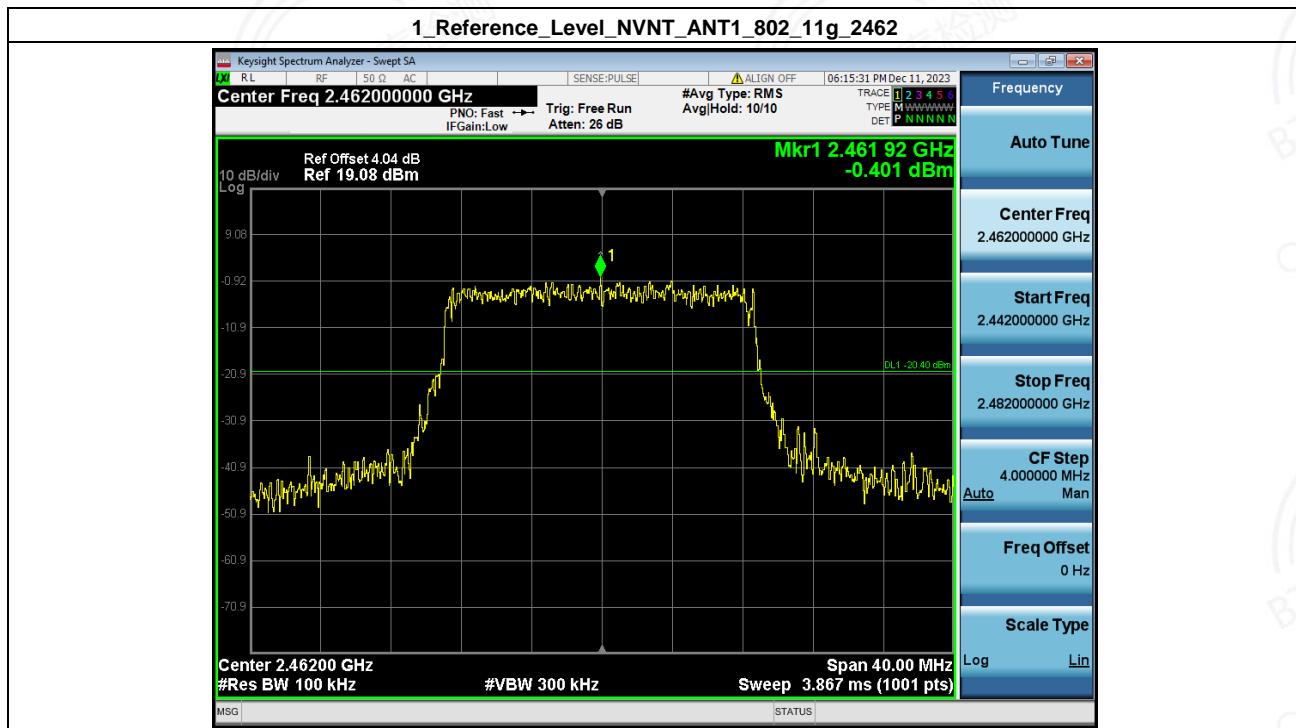
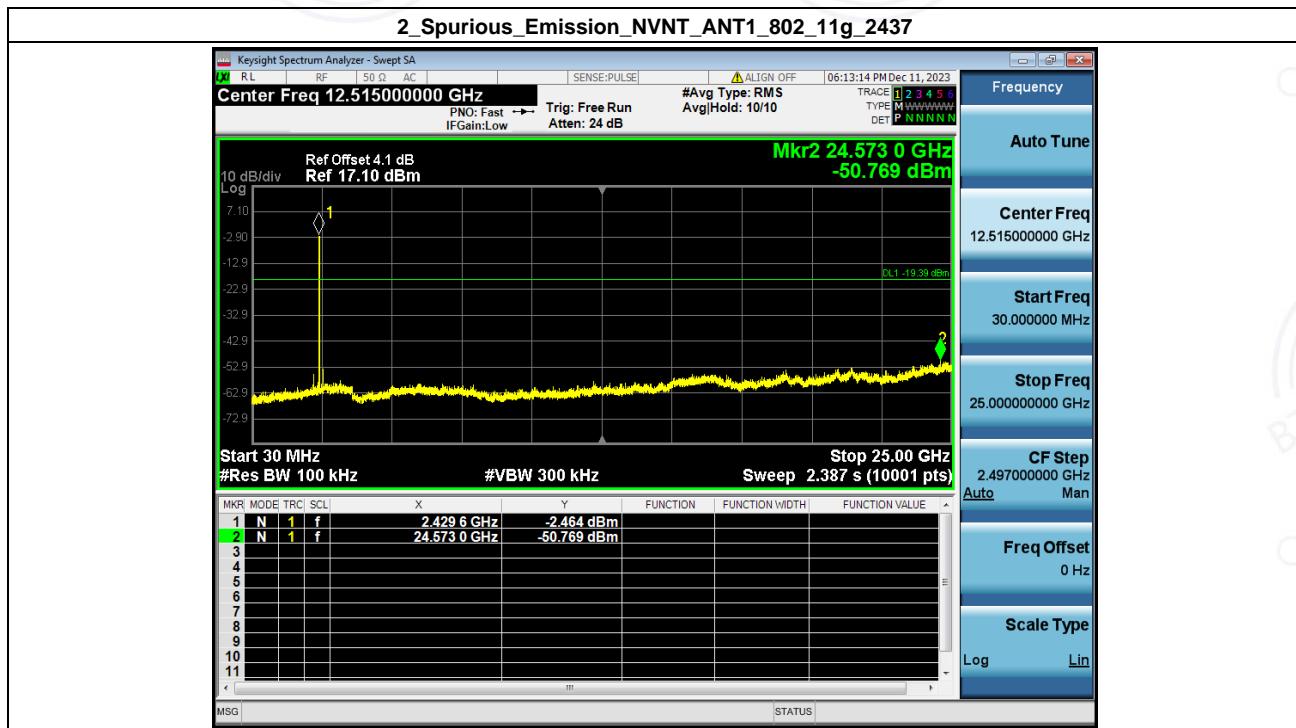


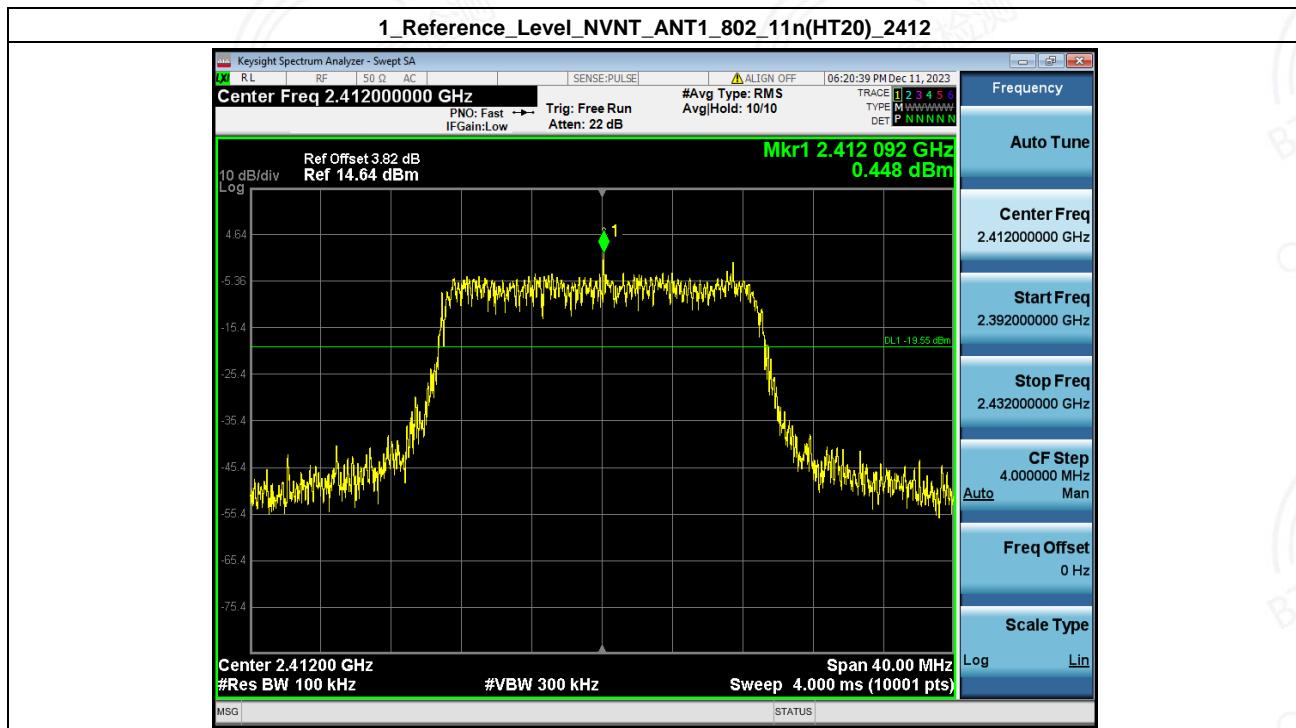
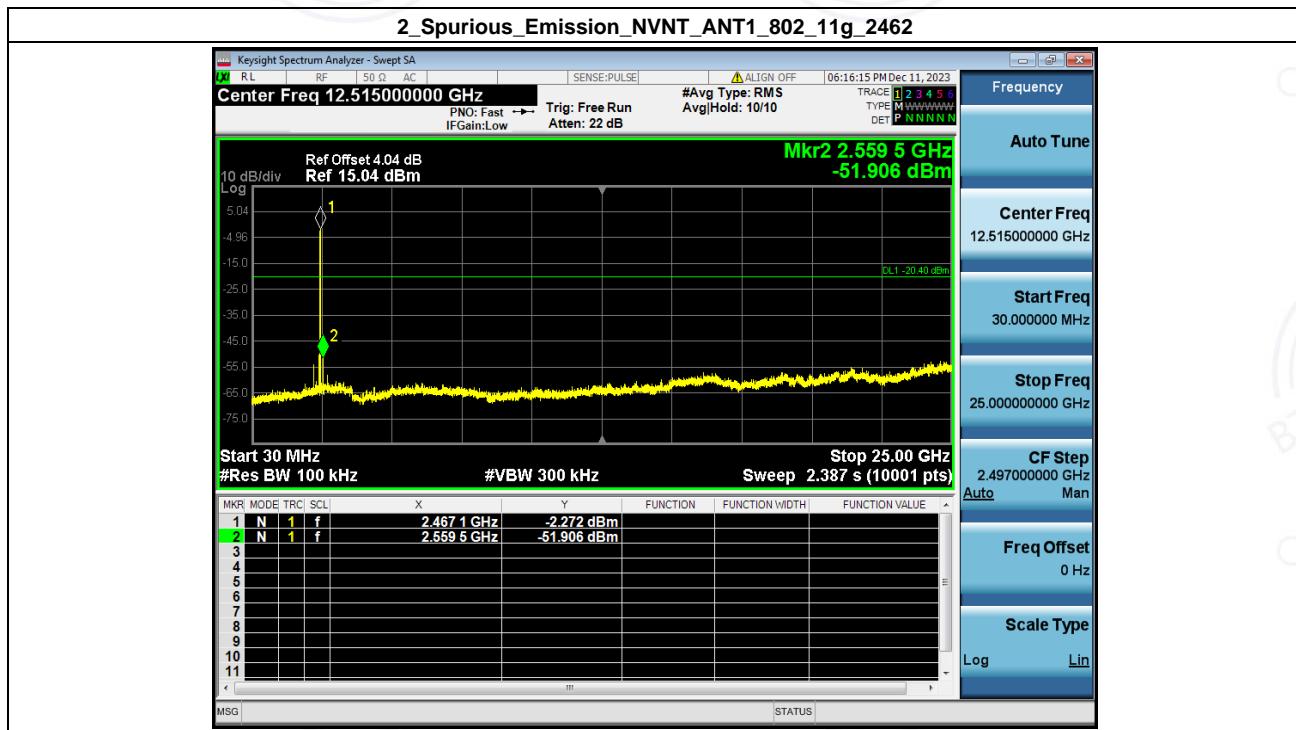


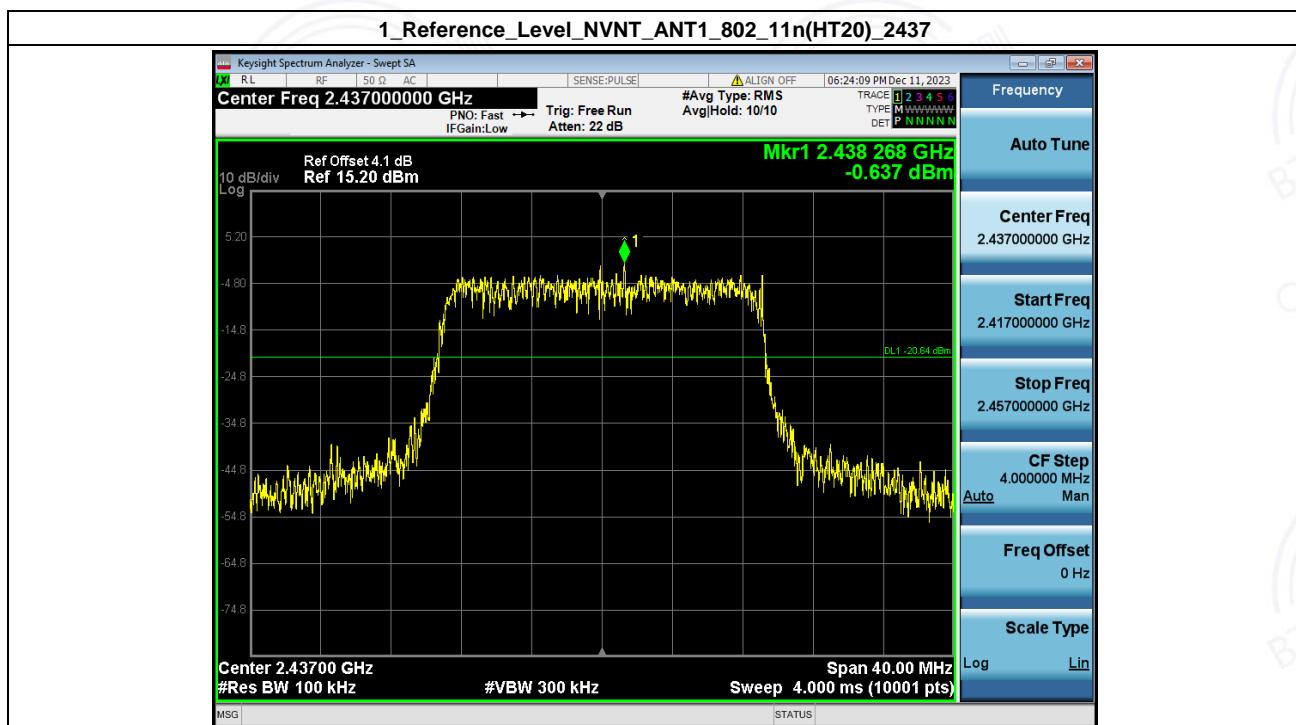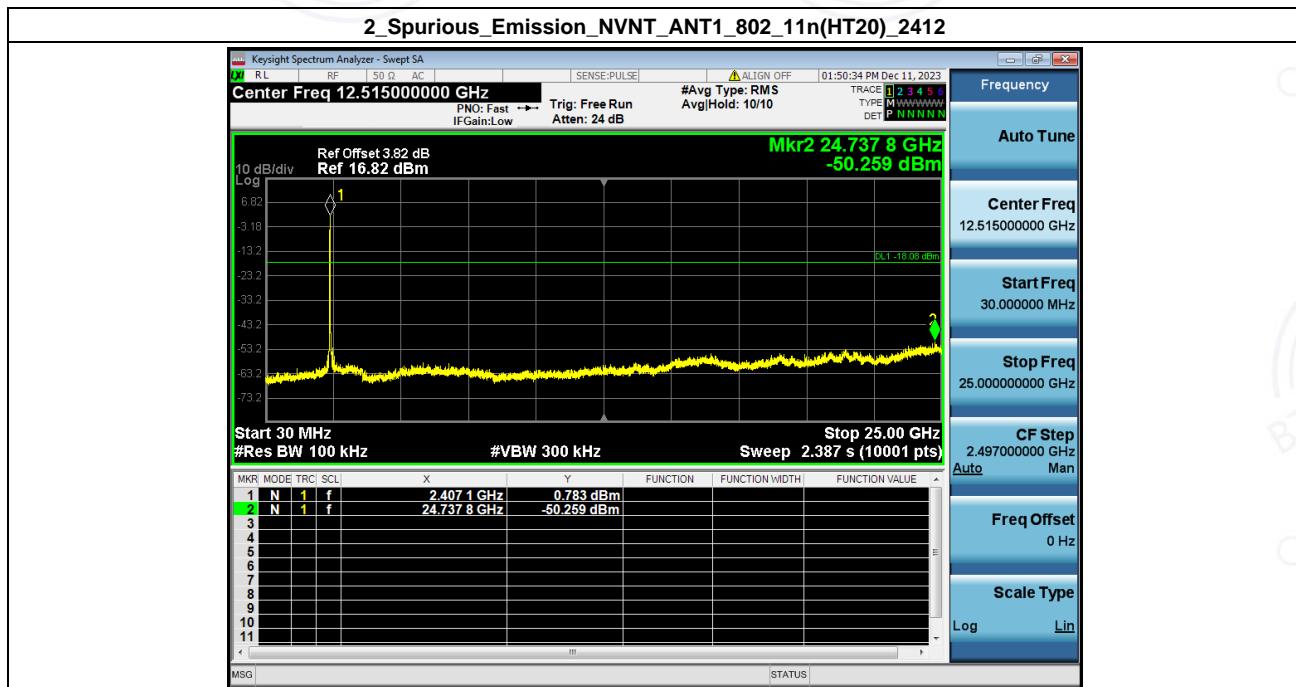


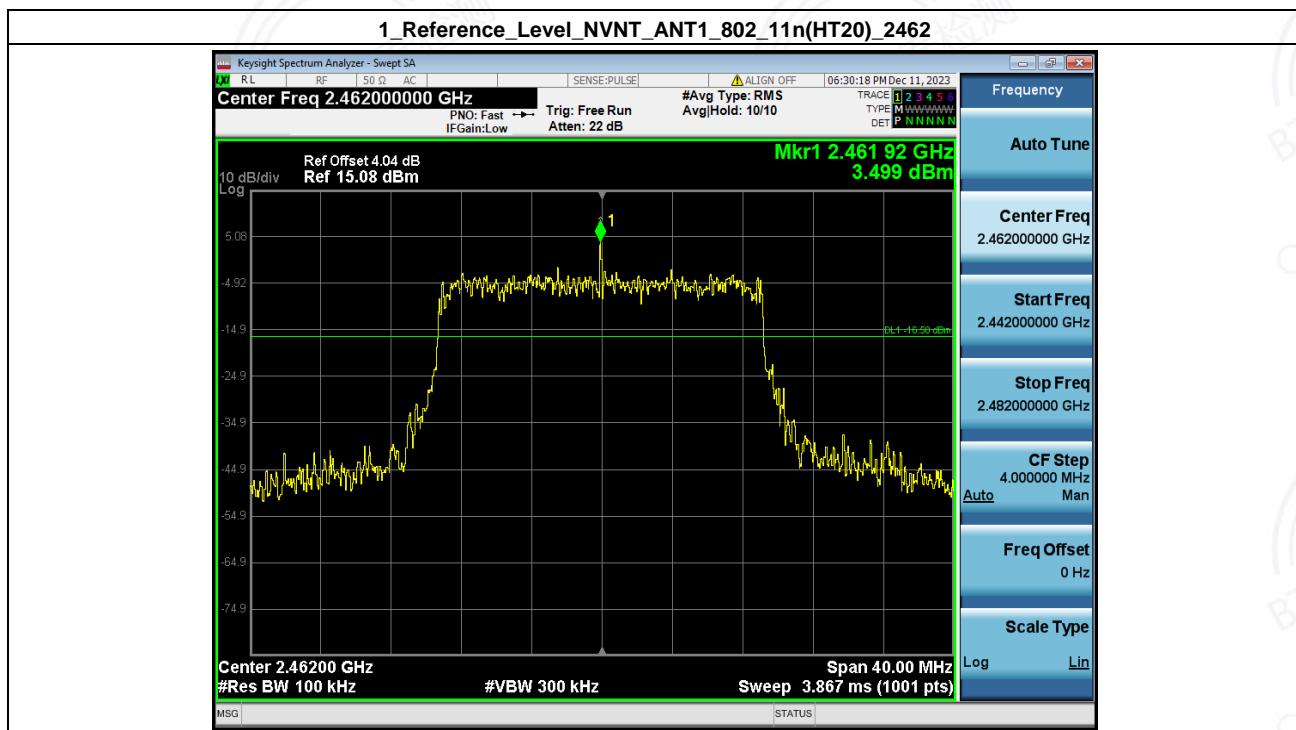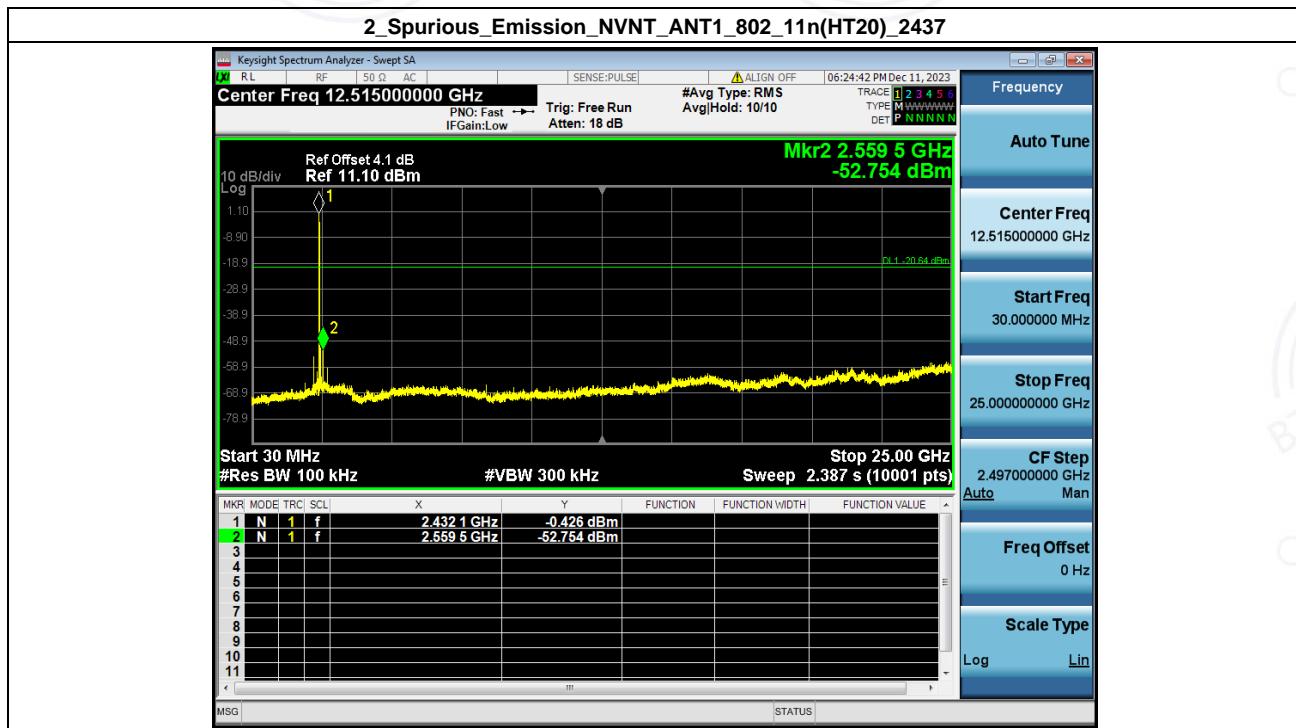

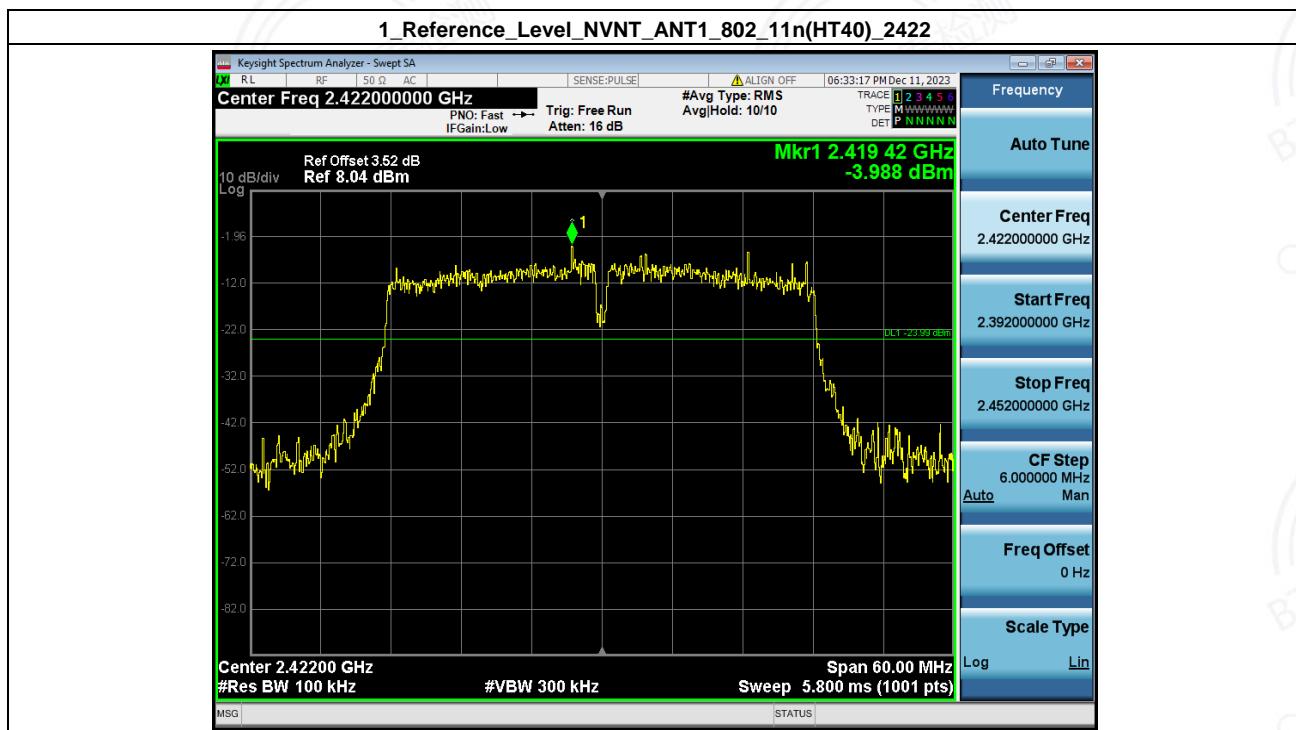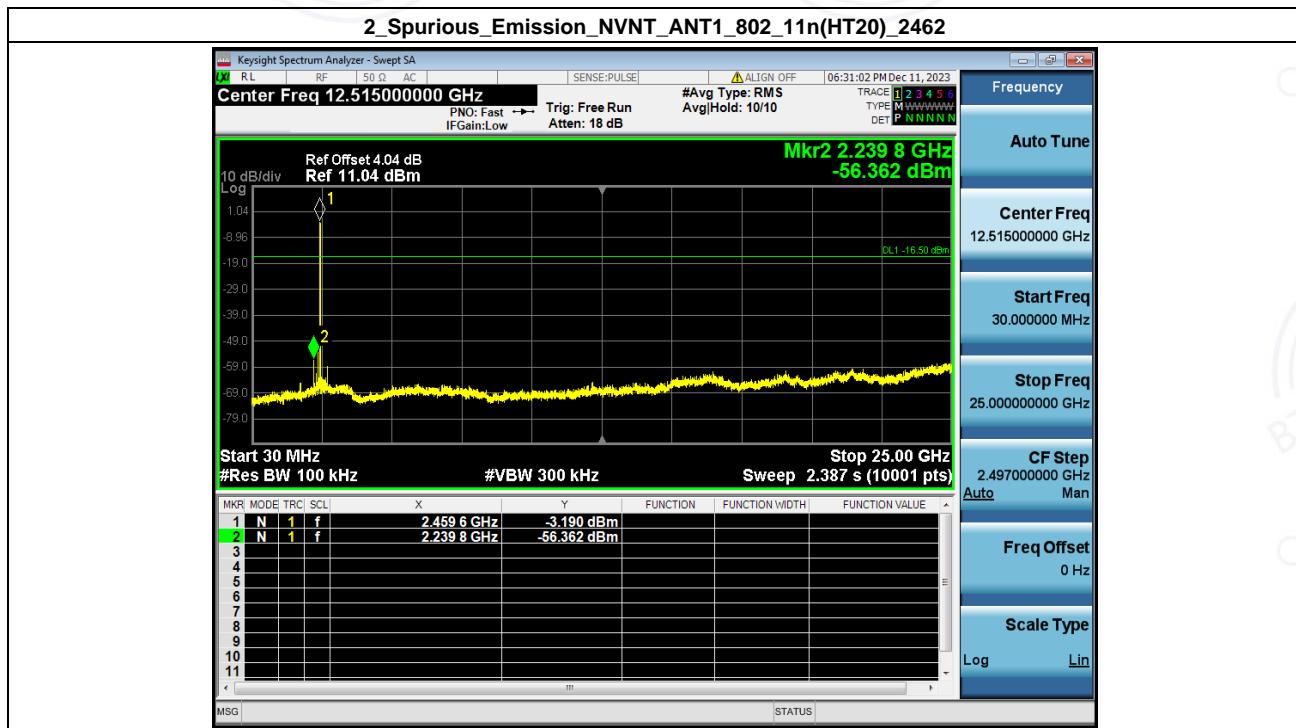

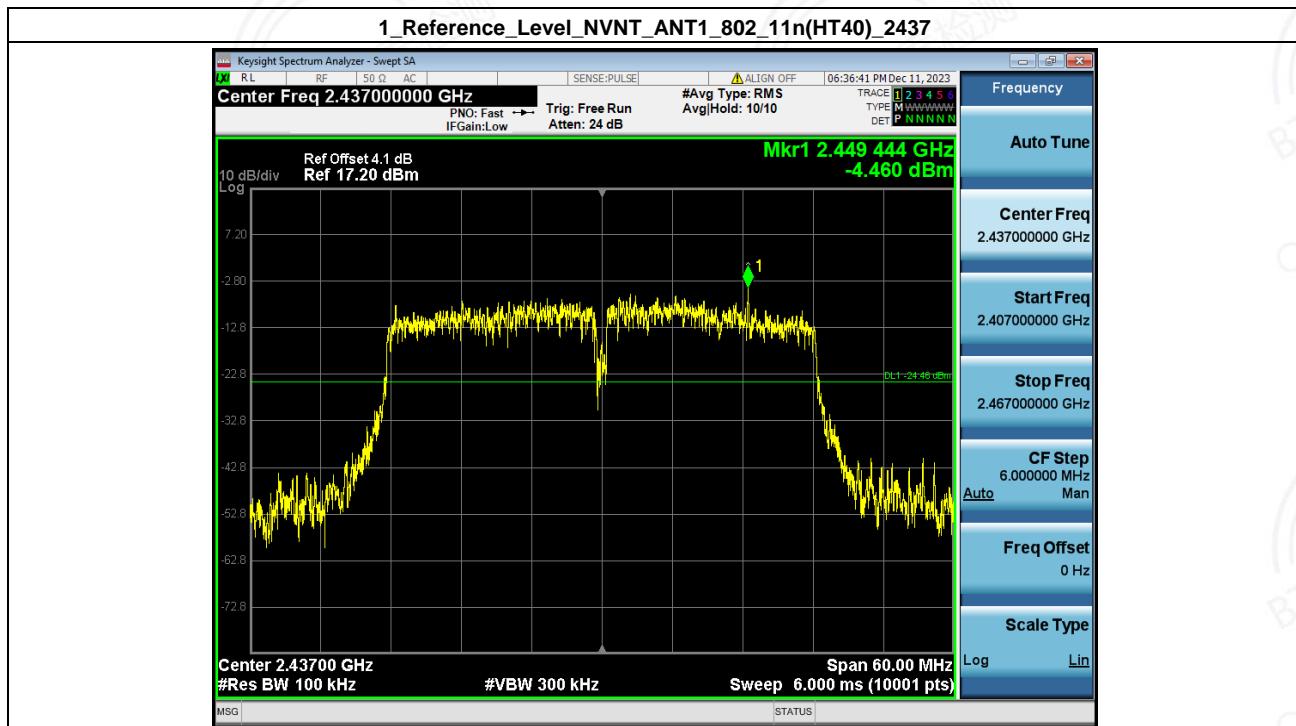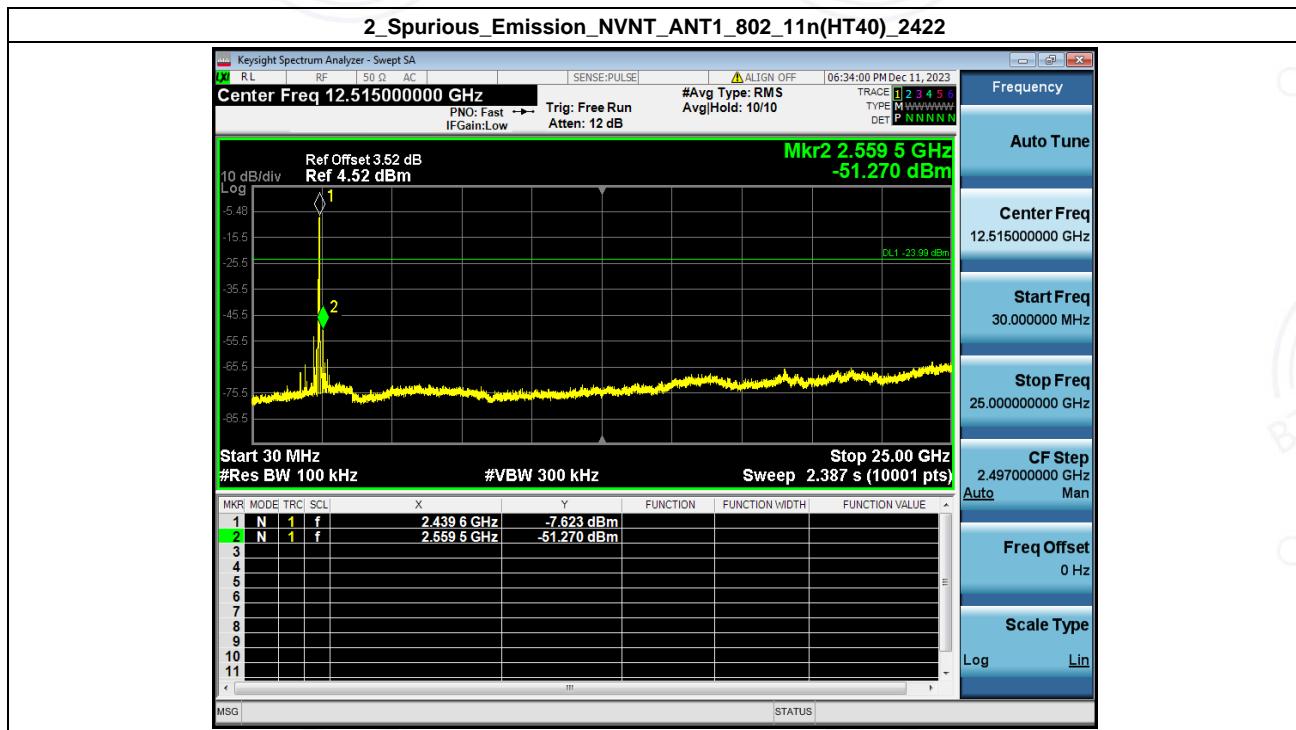

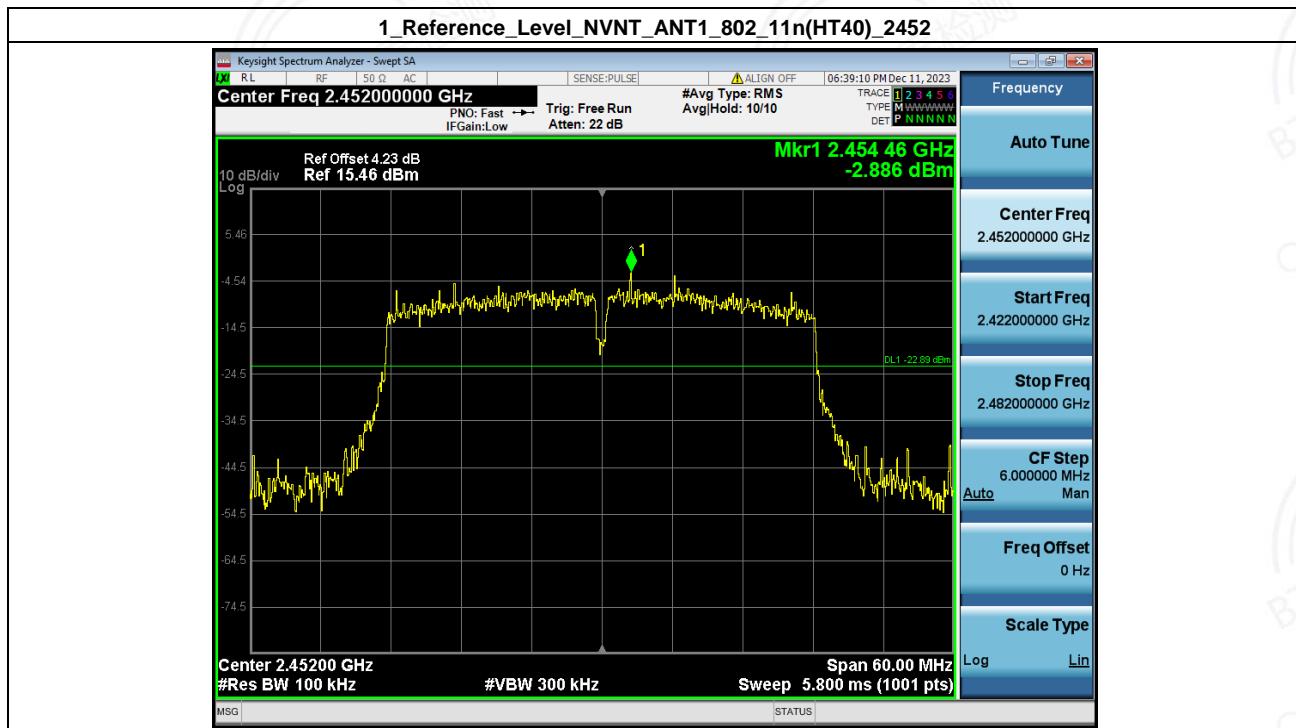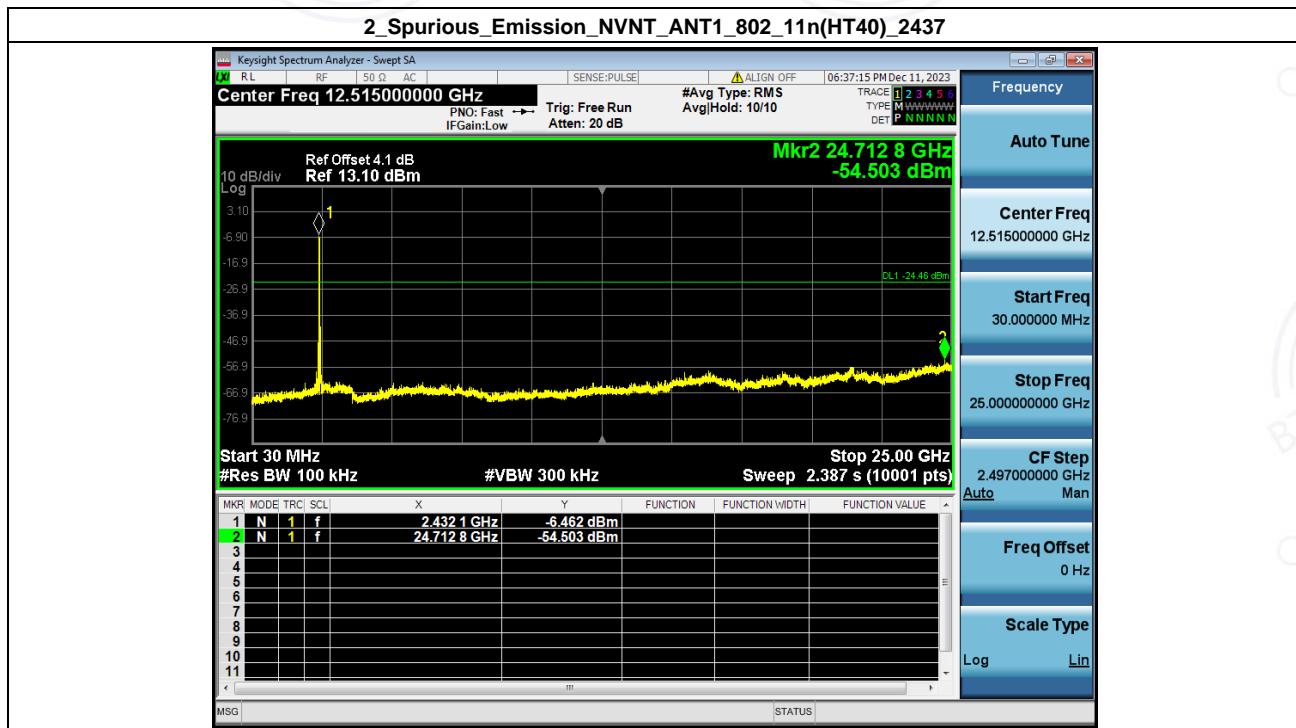

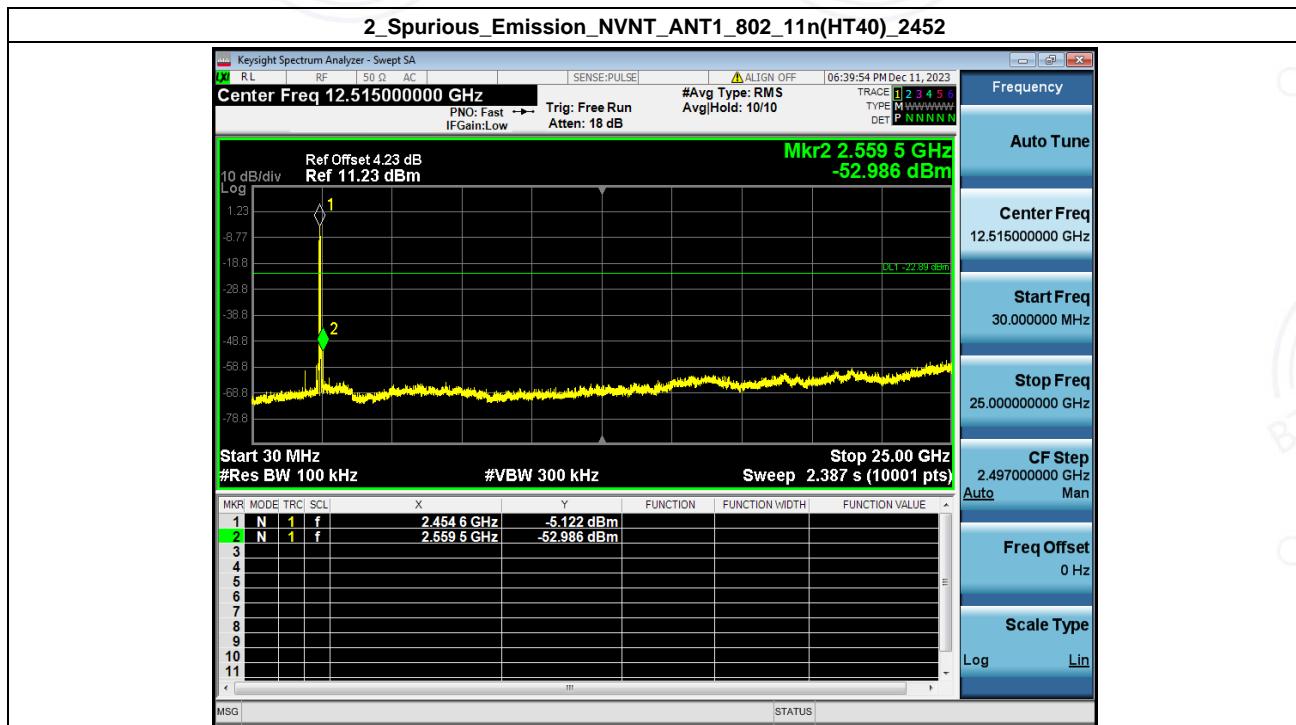

- End of the Report -

