

VCI Connection

For Android devices, tap Bluetooth icon near the top right of the Home screen under iSmartDiag app. For the iOS devices, tap Setting > Bluetooth on your iOS device to open the Bluetooth function. Then tap the Bluetooth icon under iSmartDiag app on the screen to pair it with the device. The Bluetooth name starts with VD.

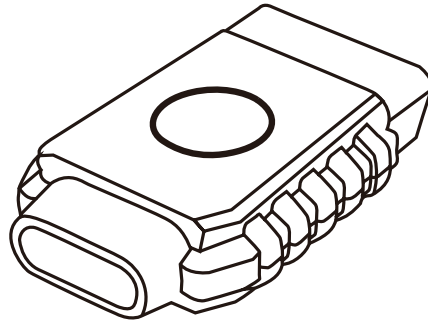
- Ensure your device's Bluetooth is turned on.
- When the device is successfully paired with the dongle, the Bluetooth icon on the iSmartDiag app will turn to green.



Finish Installation

- Your iSmartDiag scan tool dongle is now ready for use.

Quick Reference Guide



UPDATE

Software: The diagnostic software can be downloaded through Management > Update. When a new version is available, an Update button will display. Tap the button to update the software.

VCI Firmware: Tap Setting > VCI Management > VCI UPGRADE to update the firmware if a new version is available.

PRINT

1.For iOS devices, the saved report can be printed via the Print function on the device.

2.For Android devices, download and install a third-party Print app to print the saved report.

NOTE: The device needs to be connected with a printer to print.

For service and support, please contact us.

[Http://www.videnttech.com](http://www.videnttech.com) / support-online@videnttech.com /
0086-755-2830-5016
@Shenzhen Vident Technology Co.,Ltd. All Rights Reserved.



Thank you for purchasing this VIDENT scan tool. When using the scan tool please strictly follow up these instructions, would help you achieve years of trouble-free performance.

Getting Started

Before operating this unit, please read these instructions and the user manual carefully and pay extra attention to the safety warning and precautions. Please use this unit as instructed. Failure to do so may cause damage and/or personal injury and will void the product warranty.



The operation steps for these two tools are the same. The images and illustrations depicted in this quick guide may differ slightly from the actual ones. The user interfaces for iOS & Android devices might be slightly different. The screenshots in this quick guide are captured from the iOS device app.

1**Download & install app**

- Scan the QR code or search iSmartDiag in the App Store or Google Play to download and install the app to your device.

2**Register & login**


- Open the iSmartDiag app and tap Register in the central of the screen.
- Follow the on-screen instructions to complete the registration.
- The registered username and password will log in automatically.

3**Bind VCI with device**


- On the Bind VCI interface, press Bluetooth icon switch to founded VCI and press it to pair dongle with device.

4**Data Management & updates software**

- Tap Management below the list to manage and install the software selected. All the vehicle diagnostic software are downloaded and installed free of charge.

5**Find OBDII Port**

- Plug the connector of the Bluetooth dongle into the vehicle's OBDII port.
- The vehicle's OBDII port is generally located under the vehicle dashboard (Consult vehicle user manual for specific location).

6**Key On, Engine Off**

- Turn the vehicle ignition to Key On, Engine Off position.
- The LED on the dongle will light on when connected.

<p>FCC ID:2BDGQ-MINIVCI</p> <p>FCC Statement</p> <p>This equipment has been tested and found to comply with the limits for a ClassB digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.</p>	<p>However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: -Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help. To assure continued compliance, any changes or modifications not expressly approved by the party.</p>	<p>Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).</p> <p>This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:</p> <p>(1) This device may not cause harmful interference, and</p> <p>(2) This device must accept any interference received, including interference that may cause undesired operation.</p>	<p>FCC Radiation Exposure Statement:</p> <p>The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body</p>
--	--	---	---