



Smart Audio Sunglasses

Mode:S1

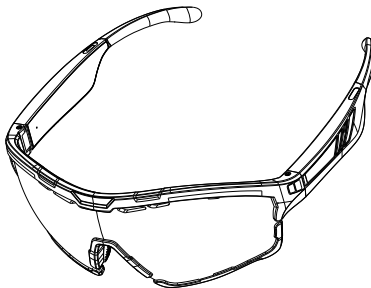

■ Exterior

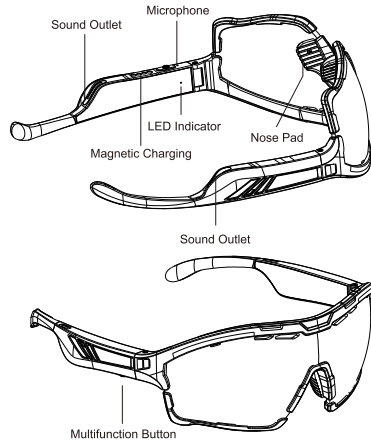

■ Product Specifications

Model	S1
Bluetooth Version	V5.3
Support Profile	HFP/A2DP/AVRCP
Distance	≥ 12M
Speaker	Dural Microphone, Stereo
Music Playtime	6.5H (70%Volume)
Play Time	6H
Charge Time	1.5H
Input	DC 5V 1A
Battery	140mAh
Frame Materials	PC、TR90
Glasses Materials	PC
Net Weight	45g

■ Turn on/ Turn off

Turn on: Press the multi-funcation button for 1 second till the LED light to blue, you will hear the voice of “Power on”
Turn off: Press the multi-funcation button for 5 second till the LED light to red, you will hear the voice of “Power off”

■ Paring

Turn on the smart glasses, it will enter the Bluetooth paring mode, The red and blue lights flash alternately.
Turn on the Bluetooth of you devices(cellphone or audio player), searching and connect the S1.

When you hear the voice of “ Connected” from the glasses, you can play music or make and answer calls.

If you devices lose connect, the S1 will turn off automaticly after 5 minutes.

■ Paring new devices

Only in Paring mode, the S1 can be searched and connected by other devices.

■ Automatic connect

S1 will automatic connected once your turn on if you have paring the devices before.

■ Play/ Pause/ Previous/Next

Paly/Pause: Single click of the multifunction button during the playing.
Next : Double click the multifunction button during the playing.
Previous: Triple click the multifunction button during the playing.

■ Make- Reject call

Answer/Reject call: Single click the multifunction button during the calling.
Reject call: Double click the multifunction button during the calling.

■ Voice Assistant

Press the multifunction button for 2 seconds on the connecting mode that will start the Siri or google voice assistant. (Suit for most of iPhone or Android cellphone.)

■ Charging and Lower battery

Charging: The Led light will turn red when insert charge cable, it will turn off after full charged. Please use the charge cable included in the package.
Lower battery: If will be better to have charge when you see the Led turn to red and hear the voice of “Battery low”.


■ Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and,if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or televisionreception, which can be determined by turning the equipment off and on,the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate thereceiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.
The device has evaluated to meet general RF exposure requirement. The device can be used be in portable exposure without restriction.

■ Glasses Replacement

1. Remove the nose pad in the middle for both side, then press the glasses frame from the left or right size corner.
3. You can insert the replacement glassesri the frame.



2. Take out the glasses



4. Press the nose pad from inside to outside, insert the glasses into the frame.

