

1. Antenna Description:

Antenna type	PIFA antenna
Model	HTB-CCT616
Frequency range	2400-2500MHz,5180-5240MHz, 5745-5825MHz
Manufacturer	QINGDAO HAINERGY TECHONOLY CORP.,LIMITED
ANT Peak Gain	2400-2500MHz :0.78 dBi;5180-5240MHz:1.12 dBi; 5745-5825MHz: 1.12 dBi

2. Antenna Photo:

Length :40.39mm
Width:14.30mm



3. Test Equipment & Conditions

3.1 Test instrument

VSWR is tested using Agilent E5071B connected to a hand mechanism, and the status is free space.

3.2 Test environment and methods


Dark room specifications: ETS-743

TD-SCDMA test equipment: StarPoint SP6010/Agilent 8960


LTE-TDD/FDD-SCDMA test equipment: StarPoint SP8011/CMW500

WCDMA/GSM/CDMA test equipment: Agilent 8960


Passive efficiency testing equipment: Agilent Technologies E5071B

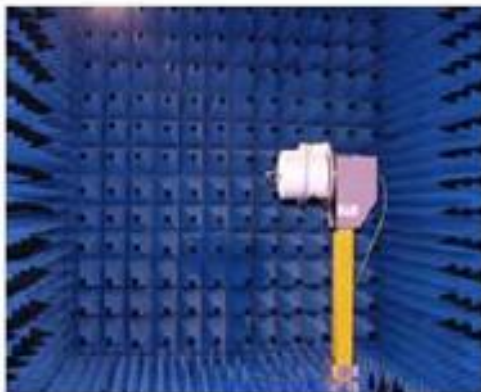


4 . Antenna Radiation Pattern




2400MHz

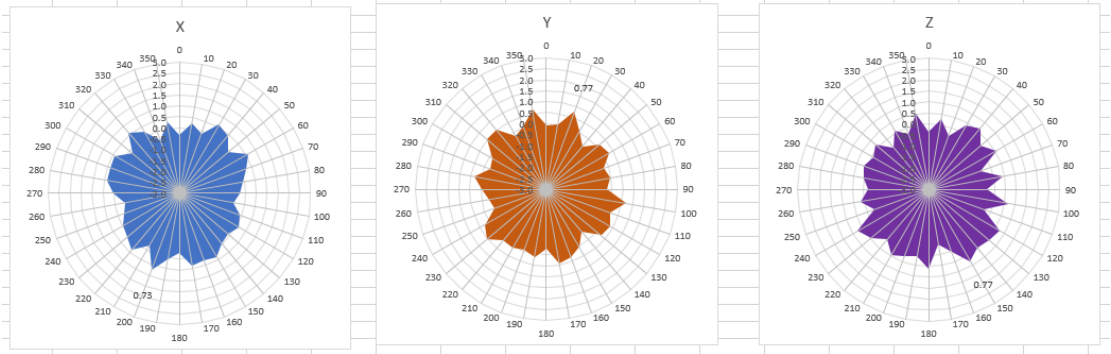


2450MHz

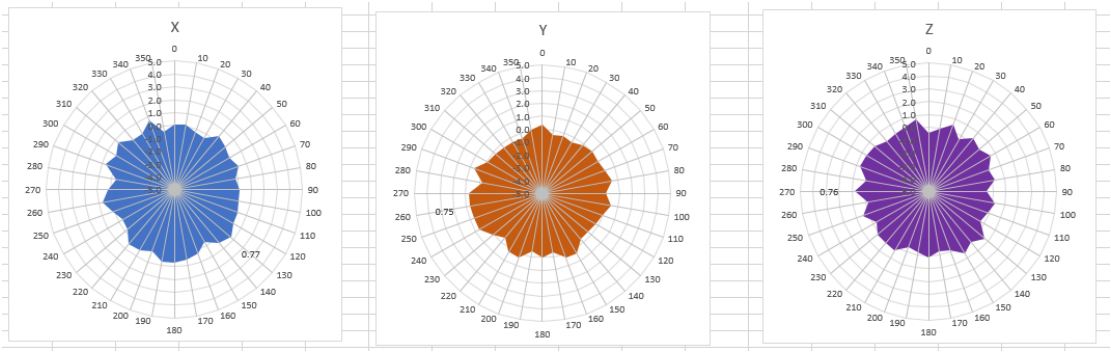


2500MHz

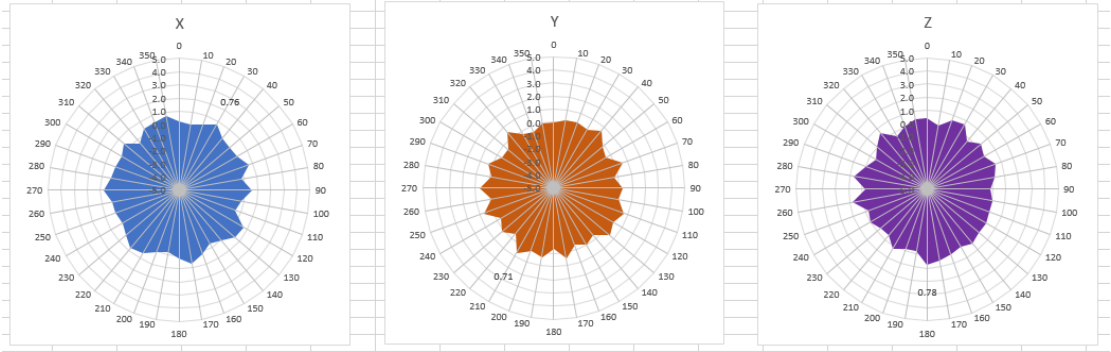



5180MHz

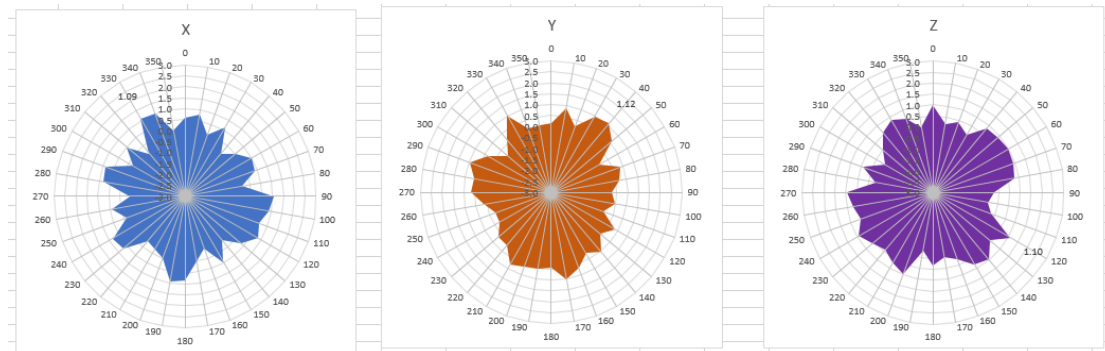


5220MHz

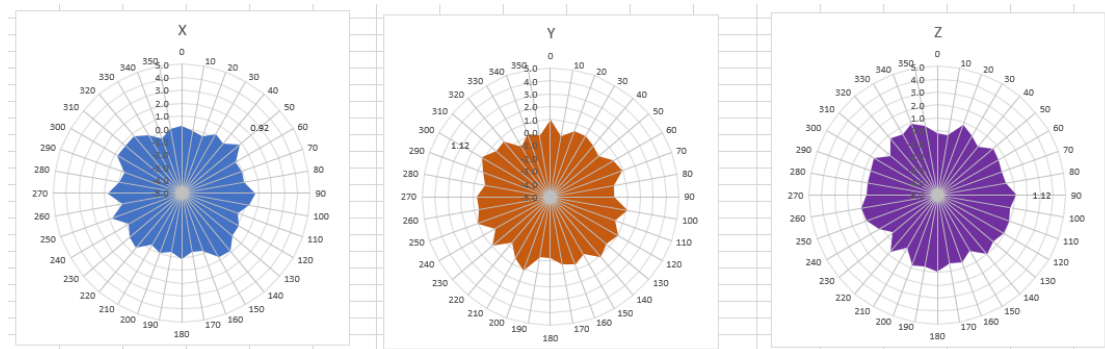


5240MHz

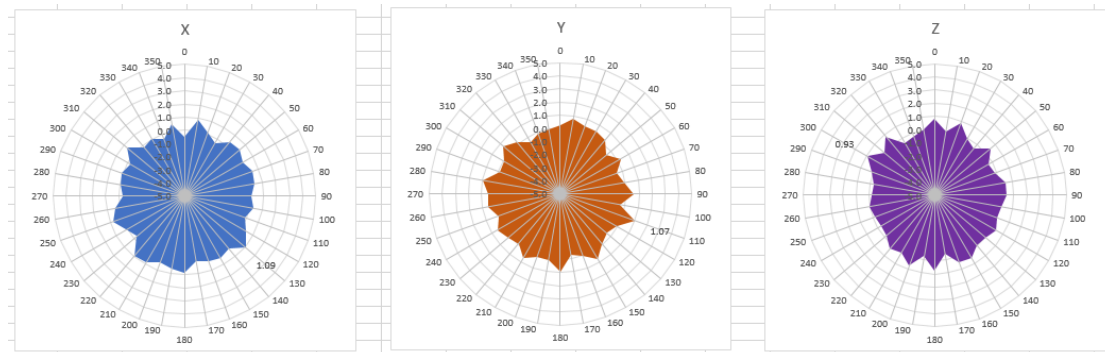

5745MHz

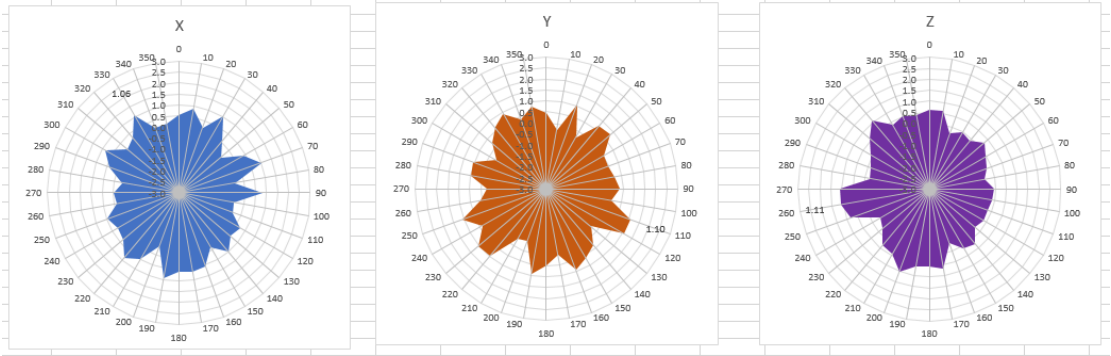

5785MHz

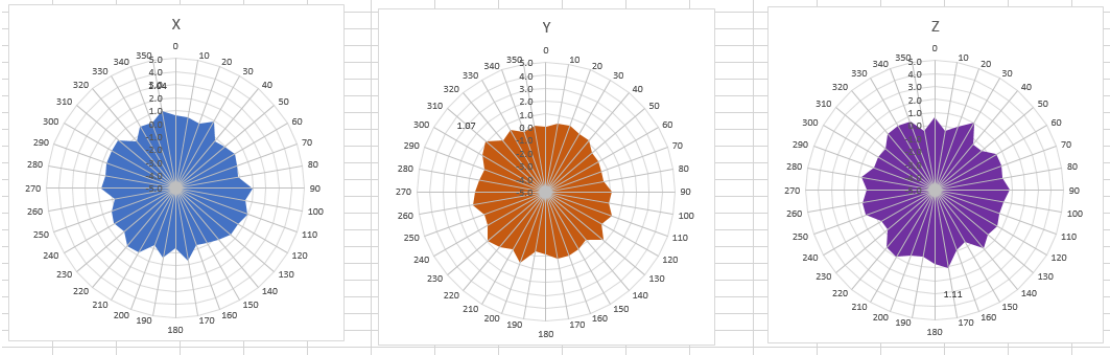

5825MHz

