



# RF Test Report

## FCC ID: 2BDR5-56R

**Report No.** : TBR-C-202405-0030-1  
**Applicant** : Videotimes Technology (Hubei) Co., Ltd  
**Equipment Under Test (EUT)**  
**EUT Name** : 2.4GHz Digital Wireless Video Baby Monitor  
**Model No.** : BG1058  
**Series Model No.** : HB6256, HB6256-2, BBM825, FK5363, FK5363-2, BBM820, VT506, VT506-2, BBM823, BL9057, BL9057-2, BBM828, BG1058-2, BBM832, HB6359, HB6359-2, BBM836, VV6010, VV6010-2, BBM838, JA2303, JA2303-2, BBM821, HB6053, HB6053-2, BBM824, HB6059, HB6059-2, BBM835  
**Brand Name** : ----  
**Sample ID** : HC-C-202405-0030-1-01-1# HC-C-202405-0030-1-01-2#  
**Receipt Date** : 2024-05-16  
**Test Date** : 2024-05-16 to 2024-06-04  
**Issue Date** : 2024-06-04  
**Standards** : FCC Part 15, Subpart C 15.247  
**Test Method** : ANSI C63.10:2013  
KDB 558074 D01 15.247 Meas Guidance v05r02  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

**Tested By** : ZKN Zhou ZKN Zhou  
**Reviewed By** : Henry Huang Henry Huang  
**Approved By** : Ivan Su Ivan Su



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

# Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT.....</b>	<b>5</b>
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test) .....	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units .....	7
1.5 Description of Test Mode.....	7
1.6 Description of Test Software Setting .....	8
1.7 Measurement Uncertainty .....	8
1.8 Test Facility.....	9
<b>2. TEST SUMMARY.....</b>	<b>10</b>
<b>3. TEST SOFTWARE.....</b>	<b>10</b>
<b>4. TEST EQUIPMENT AND TEST SITE.....</b>	<b>11</b>
<b>5. CONDUCTED EMISSION TEST .....</b>	<b>12</b>
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode .....	13
5.6 Test Data.....	13
<b>6. RADIATED EMISSION TEST .....</b>	<b>14</b>
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Condition .....	17
6.6 Test Data.....	17
<b>7. RESTRICTED BANDS AND BAND-EDGE TEST.....</b>	<b>18</b>
7.1 Test Standard and Limit.....	18
7.2 Test Setup.....	18
7.3 Test Procedure.....	19
7.4 Deviation From Test Standard.....	20
7.5 EUT Operating Condition .....	20
7.6 Test Data.....	20
<b>8. NUMBER OF HOPPING CHANNEL .....</b>	<b>21</b>
8.1 Test Standard and Limit.....	21
8.2 Test Setup.....	21
8.3 Test Procedure.....	21
8.4 Deviation From Test Standard.....	21
8.5 EUT Operating Condition .....	21



---

8.6 Test Data.....	21
<b>9. AVERAGE TIME OF OCCUPANCY.....</b>	<b>22</b>
9.1 Test Standard and Limit.....	22
9.2 Test Setup.....	22
9.3 Test Procedure.....	22
9.4 EUT Operating Condition .....	22
9.4 Deviation From Test Standard.....	22
9.5 Test Data.....	22
<b>10. CHANNEL SEPARATION AND BANDWIDTH TEST.....</b>	<b>23</b>
10.1 Test Standard and Limit .....	23
10.2 Test Setup.....	23
10.3 Test Procedure.....	23
10.4 Deviation From Test Standard.....	23
10.5 EUT Operating Condition .....	23
10.6 Test Data.....	23
<b>11. PEAK OUTPUT POWER TEST.....</b>	<b>24</b>
11.1 Test Standard and Limit .....	24
11.2 Test Setup.....	24
11.3 Test Procedure.....	24
11.4 Deviation From Test Standard.....	24
11.5 EUT Operating Condition .....	24
11.6 Test Data.....	24
<b>12. ANTENNA REQUIREMENT.....</b>	<b>25</b>
12.1 Standard Requirement.....	25
12.2 Deviation From Test Standard.....	25
12.3 Antenna Connected Construction .....	25
12.4 Result.....	25
<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>	<b>26</b>
<b>ATTACHMENT B-- RADIATED EMISSION TEST DATA .....</b>	<b>32</b>
<b>ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA.....</b>	<b>44</b>
<b>ATTACHMENT D-- NUMBER OF HOPPING CHANNEL TEST DATA.....</b>	<b>53</b>
<b>ATTACHMENT E-- AVERAGE TIME OF OCCUPANCY TEST DATA.....</b>	<b>54</b>
<b>ATTACHMENT F-- CHANNEL SEPARATION AND BANDWIDTH TEST DATA.....</b>	<b>55</b>
<b>ATTACHMENT G-- PEAK OUTPUT POWER TEST DATA .....</b>	<b>60</b>



## Revision History

Report No.	Version	Description	Issued Date
TBR-C-202405-0030-1	Rev.01	Initial issue of report	2024-06-04



# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	Videotimes Technology (Hubei) Co., Ltd
<b>Address</b>	:	B5-1,B5-2, Electronic Information Industry Park, Wuxue, Huanggang, Hubei, China.
<b>Manufacturer</b>	:	Videotimes Technology (Hubei) Co., Ltd
<b>Address</b>	:	B5-1,B5-2, Electronic Information Industry Park, Wuxue, Huanggang, Hubei, China.

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	2.4GHz Digital Wireless Video Baby Monitor	
<b>Models No.</b>	:	BG1058, HB6256, HB6256-2, BBM825, FK5363, FK5363-2, BBM820, VT506, VT506-2, BBM823, BL9057, BL9057-2, BBM828, BG1058-2, BBM832, HB6359, HB6359-2, BBM836, VV6010, VV6010-2, BBM838, JA2303, JA2303-2, BBM821, HB6053, HB6053-2, BBM824, HB6059, HB6059-2, BBM835	
<b>Model Difference</b>	:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name.	
<b>Product Description</b>	:	Operation Frequency:	2.4G: 2412MHz~2469MHz
	:	Number of Channel:	58 Channels See Note 2
	:	Antenna Gain:	2.5dBi Copper Tube Antenna
	:	Modulation Type:	GFSK
<b>Power Rating</b>	:	AC Adapter #1 (K05S050100U) Input: 100-240V~50/60Hz, 0.2A Output: 5.0V=1.0A AC Adapter #2 (A318-050100W-US2) Input: 100-240V~50/60Hz, 0.2A Output: 5.0V=1.0A AC Adapter #3 (K05E050100U) Input: 100-240V~50/60Hz, 0.2A Output: 5.0V=1.0A DC 3.7V by 4000mAh 14.8Wh Rechargeable Li-ion battery	
<b>Software Version</b>	:	1.0	
<b>Hardware Version</b>	:	1.1	

Remark: The adapter and antenna gain from the manufacturer, the verified for the RF conduction test provided by TOBY test lab. The above antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

**Note:**

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



(2) Channel List:


Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>00</b>	<b>2412</b>	20	2432	40	2452
01	2413	21	2433	41	2453
02	2414	22	2434	42	2454
03	2415	23	2435	43	2455
04	2416	24	2436	44	2456
05	2417	25	2437	45	2457
06	2418	26	2438	46	2458
07	2419	27	2439	47	2459
08	2420	28	2440	48	2460
09	2421	29	2441	49	2461
10	2422	<b>30</b>	<b>2442</b>	50	2462
11	2423	31	2443	51	2463
12	2424	32	2444	52	2464
13	2425	33	2445	53	2465
14	2426	34	2446	54	2466
15	2427	35	2447	55	2467
16	2428	36	2448	56	2468
17	2429	37	2449	<b>57</b>	<b>2469</b>
18	2430	38	2450		
19	2431	39	2451		

**Note: Test frequencies are lowest channel: 2412MHz, middle channel: 2442MHz and highest channel: 2469MHz.**

(3) The Antenna information about the equipment is provided by the applicant.

### 1.3 Block Diagram Showing the Configuration of System Tested

#### Adapter & TX Mode

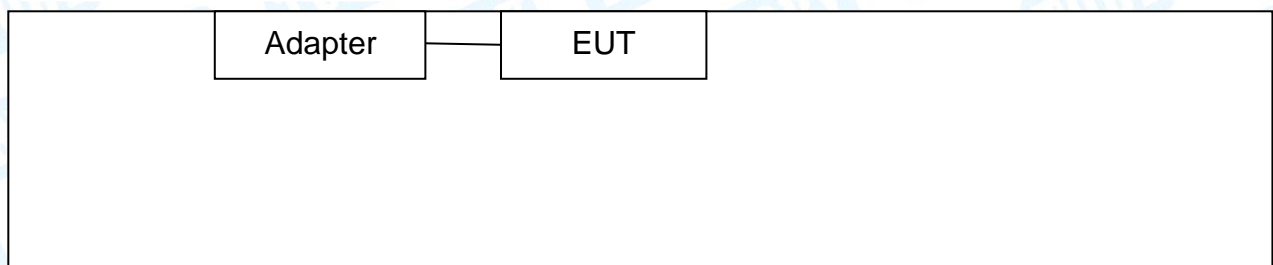

## 1.4 Description of Support Units

The EUT has been tested as an independent unit.

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter#1+ TX Mode Channel 00
Mode 2	Adapter#2+ TX Mode Channel 00
Mode 3	Adapter#3+ TX Mode Channel 00
For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter#1+ TX Mode Channel 00
Mode 2	Adapter#2+ TX Mode Channel 00
Mode 3	Adapter#3+ TX Mode Channel 00
Mode 4	TX Mode Channel 00/30/57
Mode 5	Hopping TX Mode

**Note:**

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

TX Mode: GFSK

- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.



## 1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	Adjust and control the corresponding transmission frequency through the EUT entity key.		
Frequency	2412MHz	2442MHz	2469MHz
GFSK	DEF	DEF	DEF

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	$\pm 3.50$ dB $\pm 3.10$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.20$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB





## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

### **IC Registration No.: (11950A)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.



## 2. Test Summary

Standard Section	Test Item	Test Sample(s)	Judgment	Remark
FCC				
FCC 15.207(a)	Conducted Emission	HC-C-202403-0030-01--1#	PASS	N/A
FCC 15.209 & 15.247(d)	Radiated Unwanted Emissions	HC-C-202403-0030-01--1#	PASS	N/A
FCC 15.203	Antenna Requirement	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.247(a)	99% Occupied Bandwidth & 20dB Bandwidth	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.247(b)(1)	Peak Output Power	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.247(a)(1)	Carrier frequency separation	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.247(a)(1)	Time of occupancy	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.247(b)(1)	Number of Hopping Frequency	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.247(d)	Band Edge	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.207(a)	Conducted Unwanted Emissions	HC-C-202403-0030-01--2#	PASS	N/A
FCC 15.205	Emissions in Restricted Bands	HC-C-202403-0030-01--2#	PASS	N/A

**Note:** N/A is an abbreviation for Not Applicable.

## 3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Emission	EZ-EMC	EZ	FA-03A2RE+
RF Conducted Measurement	MTS-8310	MWRftest	V2.0.0.0
RF Test System	JS1120-3	Tonscend	V3.2.22



## 4. Test Equipment and Test Site

Test Site					
No.	Test Site	Manufacturer	Specification	Used	
TB-EMCSR001	Shielding Chamber #1	YIHENG	7.5*4.0*3.0 ( m )	√	
TB-EMCSR002	Shielding Chamber #2	YIHENG	8.0*4.0*3.0 ( m )	√	
TB-EMCCA001	3m Anechoic Chamber #A	ETS	9.0*6.0*6.0 ( m )	X	
TB-EMCCB002	3m Anechoic Chamber #B	YIHENG	9.0*6.0*6.0 ( m )	√	

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 20, 2023	Jun. 19, 2024
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 20, 2023	Jun. 19, 2024
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 20, 2023	Jun. 19, 2024
Radiation Emission Test (B Site)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 30, 2023	Aug. 29, 2024
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 20, 2023	Jun. 19, 2024
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 23, 2024	Feb. 22, 2025
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Nov. 13, 2023	Nov. 12, 2025
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Jun. 26, 2022	Jun. 25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Feb. 23, 2024	Feb. 22, 2025
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun.25, 2024
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Aug. 30, 2023	Aug. 29, 2024
HF Amplifier	Tonscend	TAP051845	AP21C806141	Aug. 30, 2023	Aug. 29, 2024
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Aug. 30, 2023	Aug. 29, 2024
Highpass Filter	CD	HPM-6.4/18G	---	N/A	N/A
Highpass Filter	CD	HPM-2.8/18G	---	N/A	N/A
Highpass Filter	XINBO	XBLBQ-HTA67(8-25G)	22052702-1	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jun. 20, 2023	Jun. 19, 2024
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 20, 2023	Jun. 19, 2024
MXA Signal Analyzer	KEYSIGHT	N9020B	MY60110172	Aug. 30, 2023	Aug. 29, 2024
MXA Signal Analyzer	Agilent	N9020A	MY47380425	Aug. 30, 2023	Aug. 29, 2024
Vector Signal Generator	Agilent	N5182A	MY50141294	Aug. 30, 2023	Aug. 29, 2024
Analog Signal Generator	Agilent	N5181A	MY48180463	Aug. 30, 2023	Aug. 29, 2024
Vector Signal Generator	KEYSIGHT	N5182B	MY59101429	Aug. 30, 2023	Aug. 29, 2024
Analog Signal Generator	KEYSIGHT	N5173B	MY61252685	Aug. 30, 2023	Aug. 29, 2024
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO26	Aug. 30, 2023	Aug. 29, 2024
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO29	Aug. 30, 2023	Aug. 29, 2024
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO31	Aug. 30, 2023	Aug. 29, 2024
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO33	Aug. 30, 2023	Aug. 29, 2024
RF Control Unit	Tonsced	JS0806-2	21F8060439	Aug. 30, 2023	Aug. 29, 2024
Power Control Box	Tonsced	JS0806-4ADC	21C8060387	N/A	N/A
Temperature and Humidity Chamber	ZhengHang	ZH-QTH-1500	ZH2107264	Jun. 20, 2023	Jun. 19, 2024



## 5. Conducted Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard FCC Part 15.207

#### 5.1.2 Test Limit


**Conducted Emission Test Limit**

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.2 Test Setup

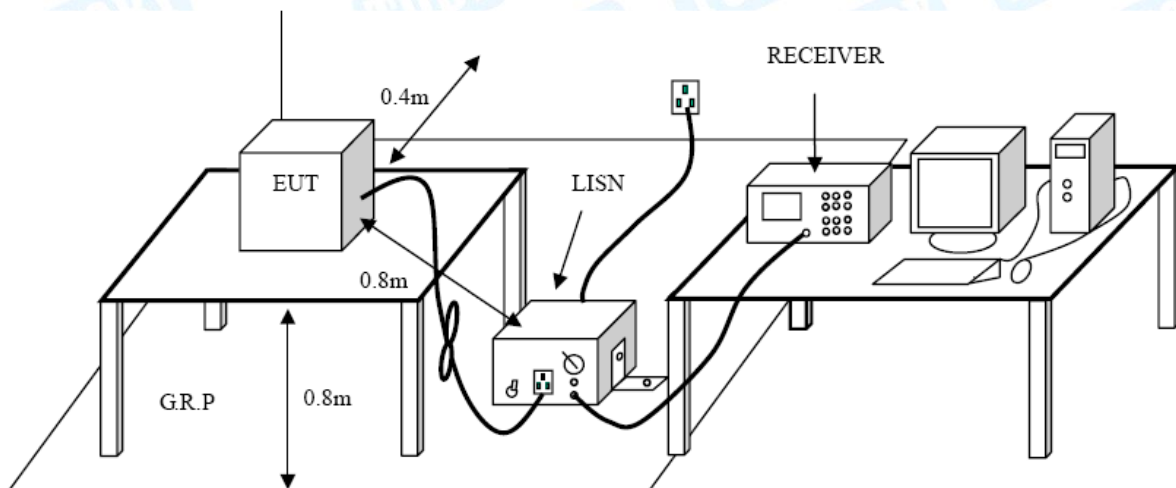

### 5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

### 5.4 Deviation From Test Standard

No deviation

### 5.5 EUT Operating Mode

Please refer to the description of test mode.

### 5.6 Test Data

Please refer to the Attachment A.



## 6. Radiated Emission Test

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

**FCC Part 15.209 & FCC Part 15.247(d)**

#### 6.1.2 Test Limit

#### Radiated Emission Limit (9 kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Radiated Emission Limit (Above 1000MHz)


Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54

**Note:**


- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)



## 6.2 Test Setup

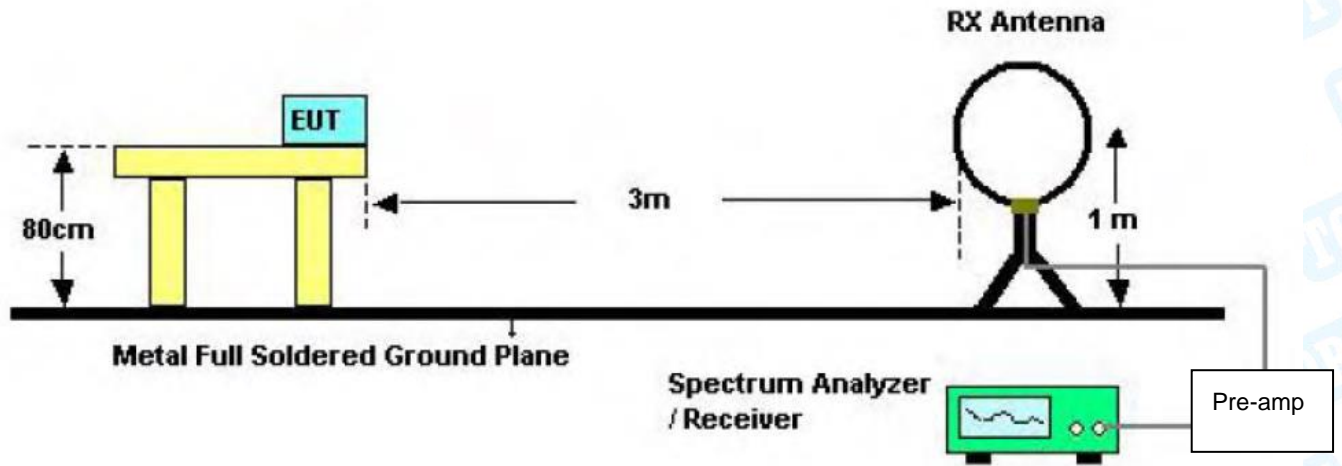


Below 30MHz Test Setup

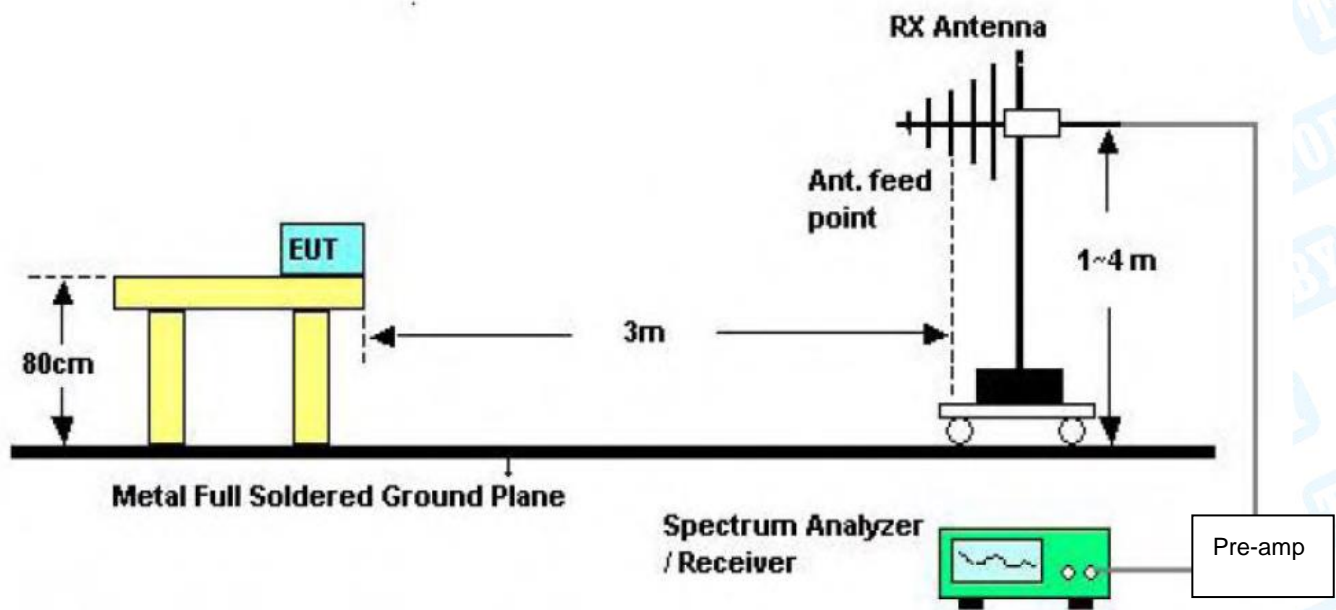

Below 1000MHz Test Setup



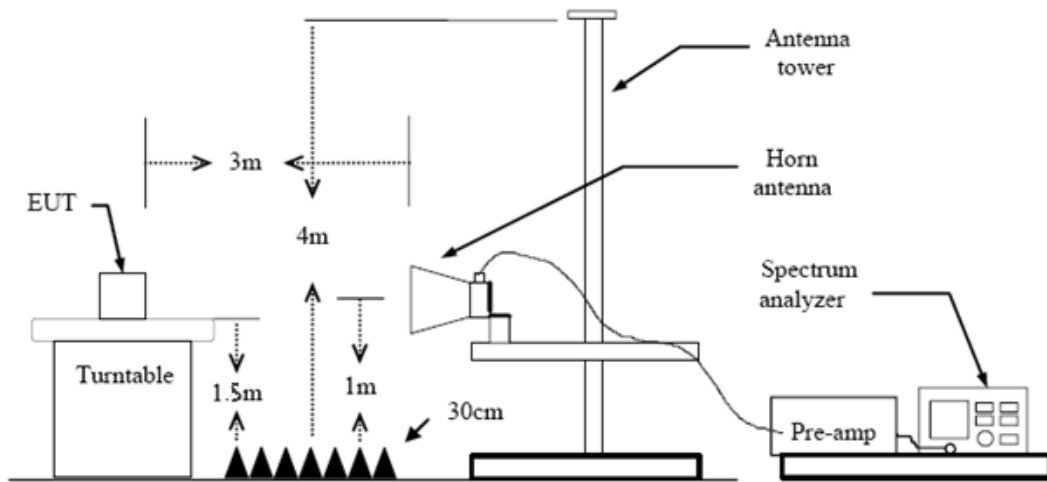

Above 1GHz Test Setup

### 6.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.





---

## 6.4 Deviation From Test Standard

No deviation

## 6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

## 6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.



## 7. Restricted Bands and Band-edge test

### 7.1 Test Standard and Limit

#### 7.1.1 Test Standard

**FCC Part 15.205 & FCC Part 15.247(d)**


#### 7.1.2 Test Limit

Radiated measurement		
Restricted Frequency Band (MHz)	Distance Meters(at 3m)	
	Peak (dBuV/m)	Average (dBuV/m)
2310 ~2390	74	54
2483.5 ~2500	74	54
Conducted measurement		
	Peak (dBm) <sub>see 7.3 e)</sub>	Average (dBm) <sub>see 7.3 e)</sub>
2310 ~2390	-41.20	-21.20
2483.5 ~2500	-41.20	-21.20

Note: According to the ANSI C63.10 11.12.2 antenna-port conducted measurements may also be used as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions is required.


### 7.2 Test Setup

#### Radiated measurement

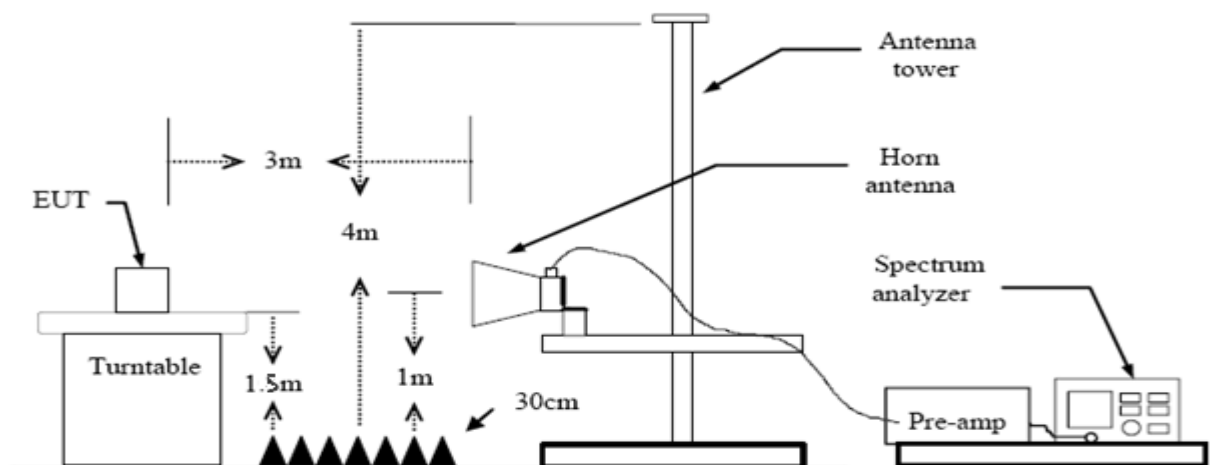

#### Conducted measurement





### 7.3 Test Procedure

#### ---Radiated measurement

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

#### ---Conducted measurement

- a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).
- c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies  $\leq 30$  MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies  $> 1000$  MHz).
- d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).
- e) Convert the resultant EIRP to an equivalent electric field strength using the following



---

relationship:

$$E = \text{EIRP} - 20 \log d + 104.8$$

where

$E$  is the electric field strength in dBuV/m

EIRP is the equivalent isotropically radiated power in dBm

$d$  is the specified measurement distance in m

f) Compare the resultant electric field strength level with the applicable regulatory limit.

g) Perform the radiated spurious emission test.

#### 7.4 Deviation From Test Standard

No deviation

#### 7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 7.6 Test Data

Please refer to the Attachment C.




## 8. Number of Hopping Channel

### 8.1 Test Standard and Limit

- 8.1.1 Test Standard  
**FCC Part 15.247 (a)(1)**
- 8.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

### 8.2 Test Setup



### 8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.

### 8.4 Deviation From Test Standard

No deviation

### 8.5 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.

### 8.6 Test Data

Please refer to the Attachment D.



## 9. Average Time of Occupancy

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

**FCC Part 15.247 (a)(1)**

#### 9.1.2 Test Limit

Test Item	Limit
Average Time of Occupancy	0.4 sec

### 9.2 Test Setup



### 9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100KHz, VBW=300KHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

### 9.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4 [s] * \text{hopping number} = 0.4 [s] * 20 [ch] = 8.0 [s*ch]$ ;

The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 8.0s =  $3 * (8.0/0.24) = 100$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.

### 9.4 Deviation From Test Standard

No deviation

### 9.5 Test Data

Please refer to the Attachment E.



## 10. Channel Separation and Bandwidth Test

### 10.1 Test Standard and Limit


#### 10.1.1 Test Standard

**FCC Part 15.247**

#### 10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	$\leq 1$ MHz (20dB bandwidth)	2400~2483.5
Channel Separation	$>25$ KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

### 10.2 Test Setup



### 10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Channel Separation: RBW=100 kHz, VBW=100 kHz.  
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

### 10.4 Deviation From Test Standard

No deviation

### 10.5 EUT Operating Condition

The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.

### 10.6 Test Data

Please refer to the Attachment F.



## 11. Peak Output Power Test

### 11.1 Test Standard and Limit


#### 11.1.1 Test Standard

**FCC Part 15.247 (b) (1)**

#### 11.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

### 11.2 Test Setup



### 11.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

### 11.4 Deviation From Test Standard

No deviation

### 11.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

### 11.6 Test Data

Please refer to the Attachment G.





## 12. Antenna Requirement

### 12.1 Standard Requirement

#### 12.1.1 Standard

##### **FCC Part 15.203**

#### 12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 12.2 Deviation From Test Standard

No deviation

### 12.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 2.5dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 12.4 Result


The EUT antenna is a Copper Tube Antenna. It complies with the standard requirement.

<b>Antenna Type</b>
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna



## Attachment A-- Conducted Emission Test Data

<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Line
<b>Test Mode:</b>	Mode 1 Adapter#1
<b>Remark:</b>	Only worse case is reported.

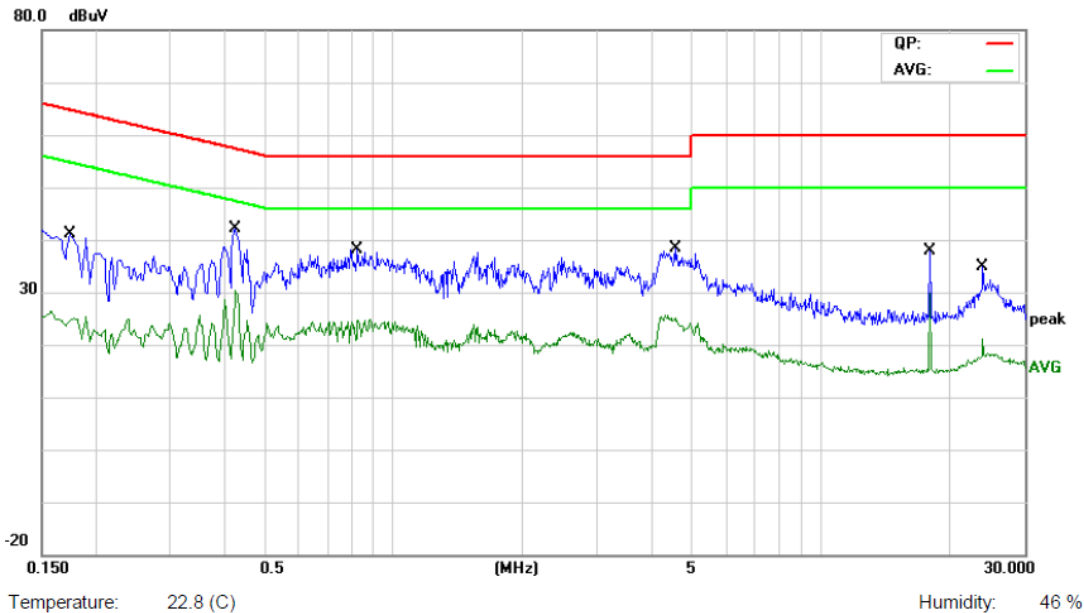


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1740	25.34	9.81	35.15	64.77	-29.62	QP
2		0.1740	12.43	9.81	22.24	54.77	-32.53	AVG
3		0.4260	25.35	10.06	35.41	57.33	-21.92	QP
4	*	0.4260	18.52	10.06	28.58	47.33	-18.75	AVG
5		0.8220	22.79	9.92	32.71	56.00	-23.29	QP
6		0.8220	11.48	9.92	21.40	46.00	-24.60	AVG
7		4.5500	15.35	9.63	24.98	56.00	-31.02	QP
8		4.5500	8.63	9.63	18.26	46.00	-27.74	AVG
9		17.9980	26.17	10.31	36.48	60.00	-23.52	QP
10		17.9980	19.71	10.31	30.02	50.00	-19.98	AVG
11		24.0060	17.16	10.44	27.60	60.00	-32.40	QP
12		24.0060	8.03	10.44	18.47	50.00	-31.53	AVG

**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Neutral
<b>Test Mode:</b>	Mode 1 Adapter#1
<b>Remark:</b>	Only worse case is reported.

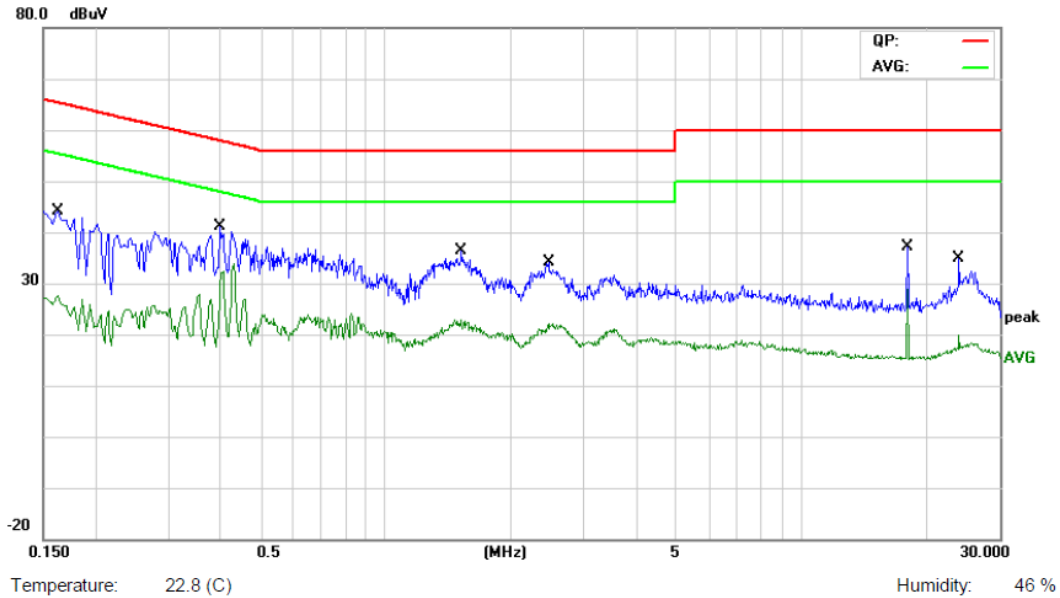


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	29.95	9.84	39.79	65.36	-25.57	QP
2		0.1620	14.74	9.84	24.58	55.36	-30.78	AVG
3		0.3980	26.81	9.85	36.66	57.90	-21.24	QP
4	*	0.3980	20.10	9.85	29.95	47.90	-17.95	AVG
5		1.5220	20.27	9.76	30.03	56.00	-25.97	QP
6		1.5220	11.45	9.76	21.21	46.00	-24.79	AVG
7		2.4620	19.76	9.85	29.61	56.00	-26.39	QP
8		2.4620	11.44	9.85	21.29	46.00	-24.71	AVG
9		17.9980	24.97	9.84	34.81	60.00	-25.19	QP
10		17.9980	18.33	9.84	28.17	50.00	-21.83	AVG
11		23.9900	16.92	10.79	27.71	60.00	-32.29	QP
12		23.9900	7.56	10.79	18.35	50.00	-31.65	AVG

**Remark:**  
 1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)  
 2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Line
<b>Test Mode:</b>	Mode 2 Adapter#2
<b>Remark:</b>	Only worse case is reported.

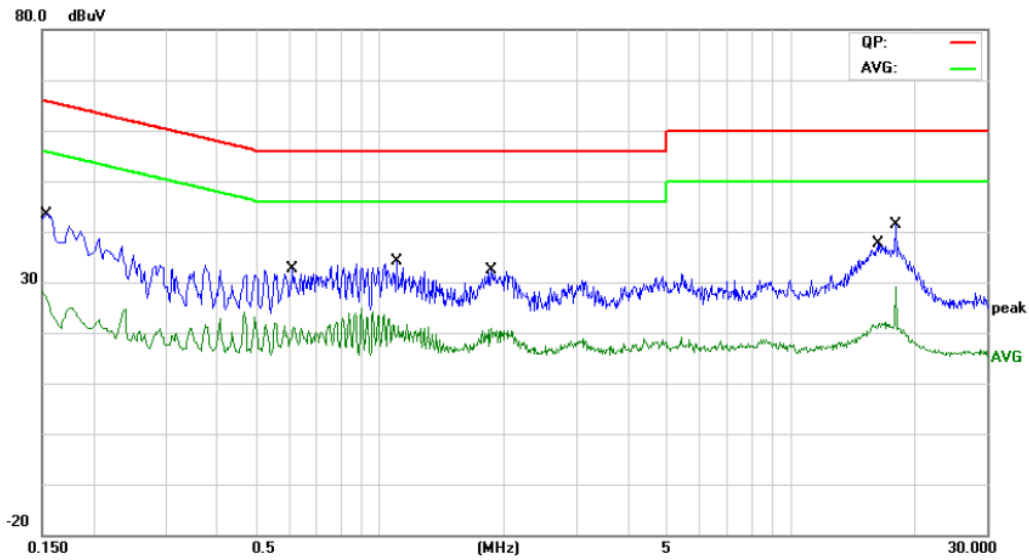

Temperature: 22.8 (C) Humidity: 46 %


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	30.48	9.87	40.35	65.79	-25.44	QP
2		0.1539	14.81	9.87	24.68	55.79	-31.11	AVG
3		0.6100	19.47	9.96	29.43	56.00	-26.57	QP
4		0.6100	11.55	9.96	21.51	46.00	-24.49	AVG
5		1.0940	17.57	10.07	27.64	56.00	-28.36	QP
6		1.0940	9.01	10.07	19.08	46.00	-26.92	AVG
7		1.8660	17.20	9.87	27.07	56.00	-28.93	QP
8		1.8660	8.09	9.87	17.96	46.00	-28.04	AVG
9		16.3300	20.53	10.23	30.76	60.00	-29.24	QP
10		16.3300	10.20	10.23	20.43	50.00	-29.57	AVG
11		17.9980	27.55	10.31	37.86	60.00	-22.14	QP
12	*	17.9980	19.35	10.31	29.66	50.00	-20.34	AVG

**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Neutral
<b>Test Mode:</b>	Mode 2 Adapter#2
<b>Remark:</b>	Only worse case is reported.

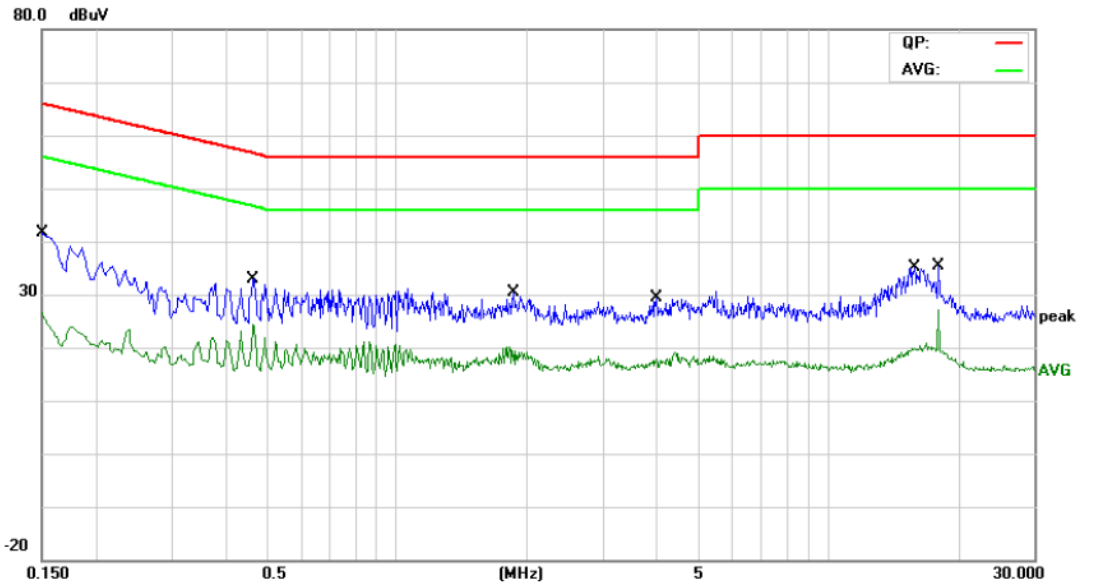

Temperature: 22.8 (C)

Humidity: 46 %


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	27.52	9.86	37.38	66.00	-28.62	QP
2		0.1500	15.24	9.86	25.10	56.00	-30.90	AVG
3		0.4620	18.09	9.67	27.76	56.66	-28.90	QP
4		0.4620	13.94	9.67	23.61	46.66	-23.05	AVG
5		1.8660	12.38	9.69	22.07	56.00	-33.93	QP
6		1.8660	6.48	9.69	16.17	46.00	-29.83	AVG
7		3.9860	11.28	9.91	21.19	56.00	-34.81	QP
8		3.9860	6.04	9.91	15.95	46.00	-30.05	AVG
9		15.8420	14.10	9.80	23.90	60.00	-36.10	QP
10		15.8420	7.73	9.80	17.53	50.00	-32.47	AVG
11		17.9980	20.15	9.84	29.99	60.00	-30.01	QP
12	*	17.9980	17.18	9.84	27.02	50.00	-22.98	AVG

**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Averag



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Line
<b>Test Mode:</b>	Mode 3 Adapter#3
<b>Remark:</b>	Only worse case is reported.

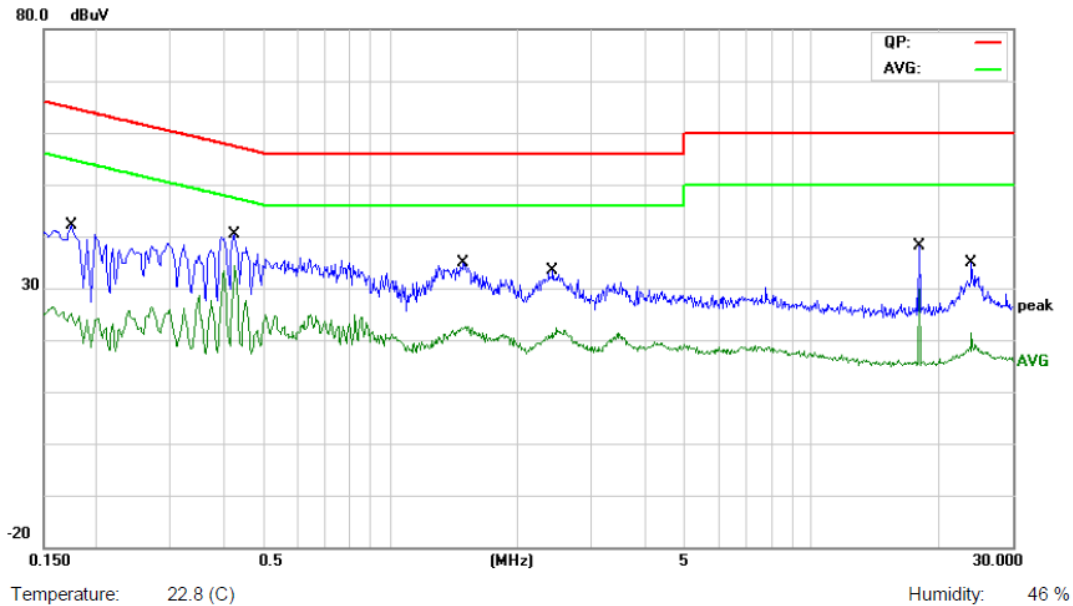


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1740	26.26	9.81	36.07	64.77	-28.70	QP
2		0.1740	11.62	9.81	21.43	54.77	-33.34	AVG
3		0.4220	27.34	10.05	37.39	57.41	-20.02	QP
4	*	0.4220	22.25	10.05	32.30	47.41	-15.11	AVG
5		1.4940	19.20	9.95	29.15	56.00	-26.85	QP
6		1.4940	11.66	9.95	21.61	46.00	-24.39	AVG
7		2.4260	17.85	9.99	27.84	56.00	-28.16	QP
8		2.4260	11.35	9.99	21.34	46.00	-24.66	AVG
9		18.0020	26.33	10.31	36.64	60.00	-23.36	QP
10		18.0020	19.08	10.31	29.39	50.00	-20.61	AVG
11		24.0060	18.67	10.44	29.11	60.00	-30.89	QP
12		24.0060	8.51	10.44	18.95	50.00	-31.05	AVG

**Remark:**  
 1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)  
 2. Margin (dB) = QuasiPeak/Average (dBuV)-Limit (dBuV)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Neutral
<b>Test Mode:</b>	Mode 3 Adapter#3
<b>Remark:</b>	Only worse case is reported.

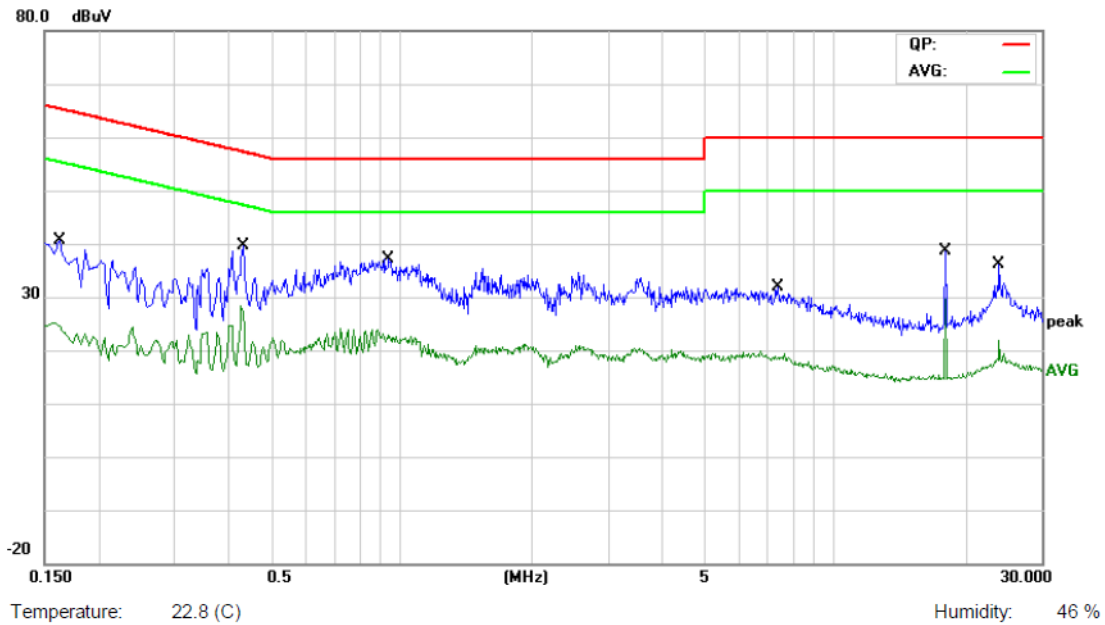

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	25.76	9.84	35.60	65.36	-29.76	QP
2		0.1620	12.90	9.84	22.74	55.36	-32.62	AVG
3		0.4300	26.18	9.76	35.94	57.25	-21.31	QP
4		0.4300	17.39	9.76	27.15	47.25	-20.10	AVG
5		0.9340	22.38	9.96	32.34	56.00	-23.66	QP
6		0.9340	12.40	9.96	22.36	46.00	-23.64	AVG
7		7.3780	13.97	9.96	23.93	60.00	-36.07	QP
8		7.3780	7.82	9.96	17.78	50.00	-32.22	AVG
9		17.9980	26.95	9.84	36.79	60.00	-23.21	QP
10	*	17.9980	20.23	9.84	30.07	50.00	-19.93	AVG
11		24.0060	19.03	10.79	29.82	60.00	-30.18	QP
12		24.0060	8.85	10.79	19.64	50.00	-30.36	AVG

**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV)-Limit (dBuV)

e (dBuV)-Limit (dBuV)



## Attachment B-- Radiated Emission Test Data


### 9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz~1GHz

<b>Test Voltage:</b>	AC 120V/60Hz
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	Mode 1 Adapter1#
<b>Remark:</b>	Only worse case is reported

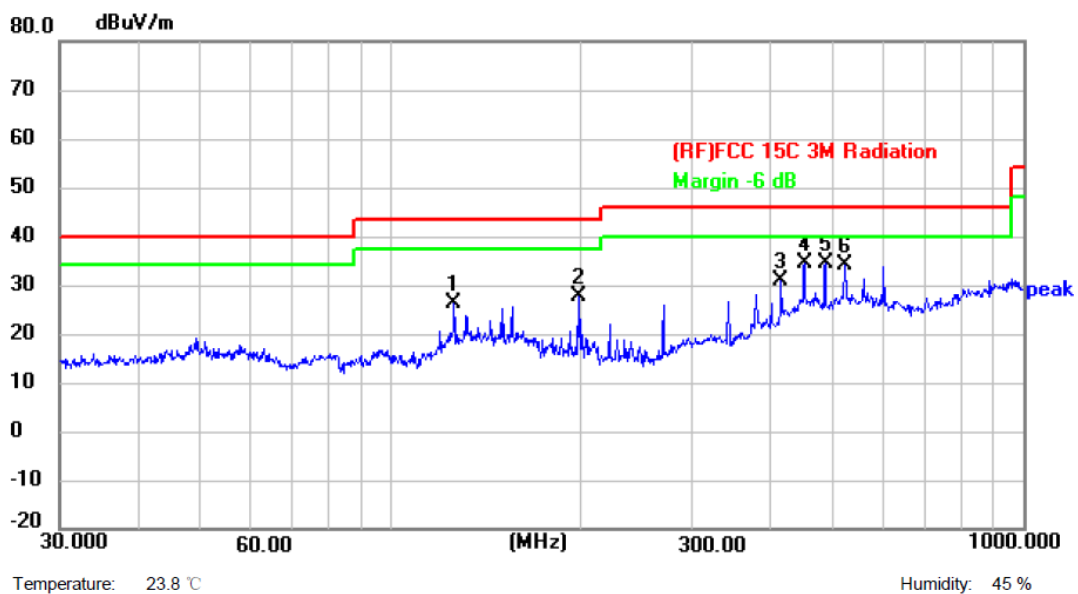

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	125.8863	49.88	-23.52	26.36	43.50	-17.14	peak	P
2	197.8925	52.32	-24.68	27.64	43.50	-15.86	peak	P
3	414.7223	49.22	-18.34	30.88	46.00	-15.12	peak	P
4	451.1350	51.45	-17.09	34.36	46.00	-11.64	peak	P
5 *	487.3150	51.52	-16.88	34.64	46.00	-11.36	peak	P
6	522.7180	50.26	-16.17	34.09	46.00	-11.91	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)





<b>Test Voltage:</b>	AC 120V/60Hz
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	Mode 1 Adapter1#
<b>Remark:</b>	Only worse case is reported

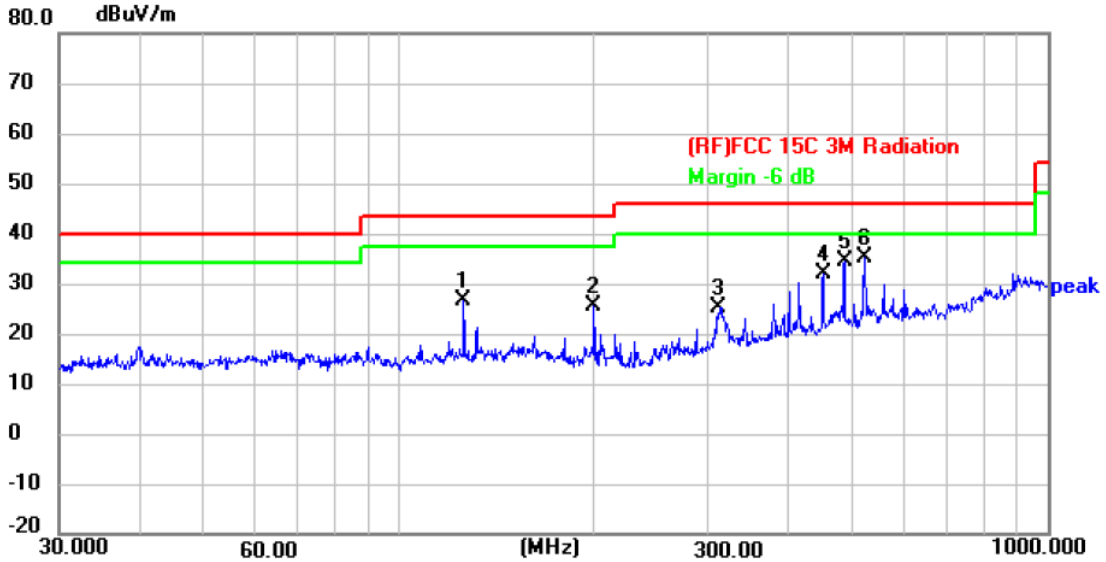

Temperature: 23.8 °C

Humidity: 45 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	125.8863	49.95	-23.52	26.43	43.50	-17.07	peak	P
2	199.9855	50.05	-24.67	25.38	43.50	-18.12	peak	P
3	312.1792	45.98	-20.76	25.22	46.00	-20.78	peak	P
4	451.1350	49.18	-17.09	32.09	46.00	-13.91	peak	P
5	487.3150	51.24	-16.88	34.36	46.00	-11.64	peak	P
6 *	522.7180	51.52	-16.17	35.35	46.00	-10.65	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	Mode 2 Adapter2#
<b>Remark:</b>	Only worse case is reported

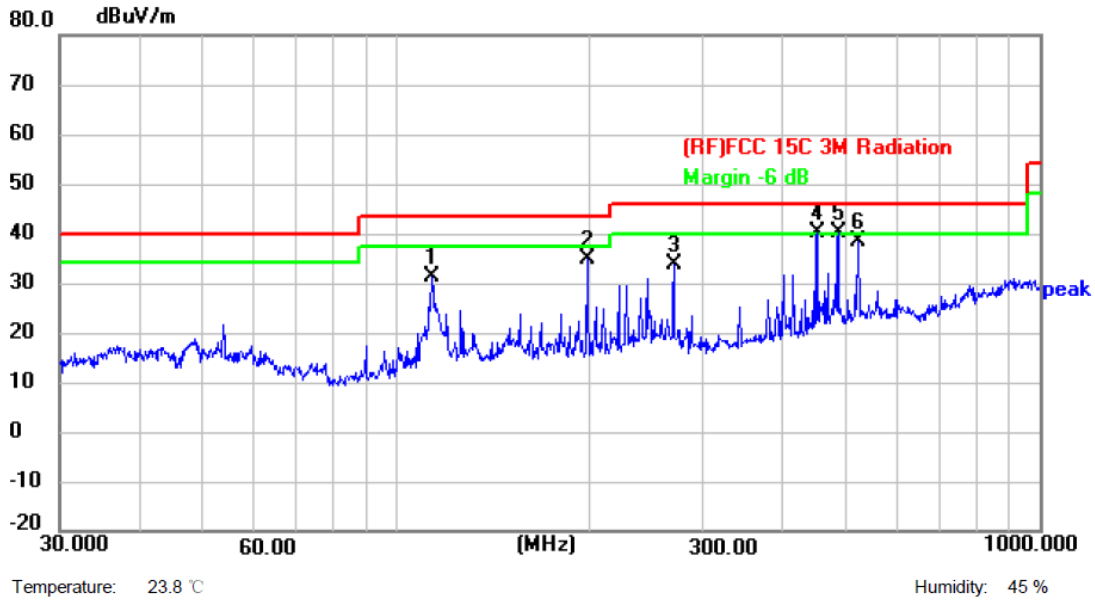


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	113.7142	55.37	-24.18	31.19	43.50	-12.31	peak	P
2	197.8925	59.55	-24.68	34.87	43.50	-8.63	peak	P
3	270.3747	56.00	-22.10	33.90	46.00	-12.10	peak	P
4 *	451.1350	57.41	-17.09	40.32	46.00	-5.68	peak	P
5 !	487.3150	56.90	-16.88	40.02	46.00	-5.98	peak	P
6	522.7180	54.53	-16.17	38.36	46.00	-7.64	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	Mode 2 Adapter2#
<b>Remark:</b>	Only worse case is reported

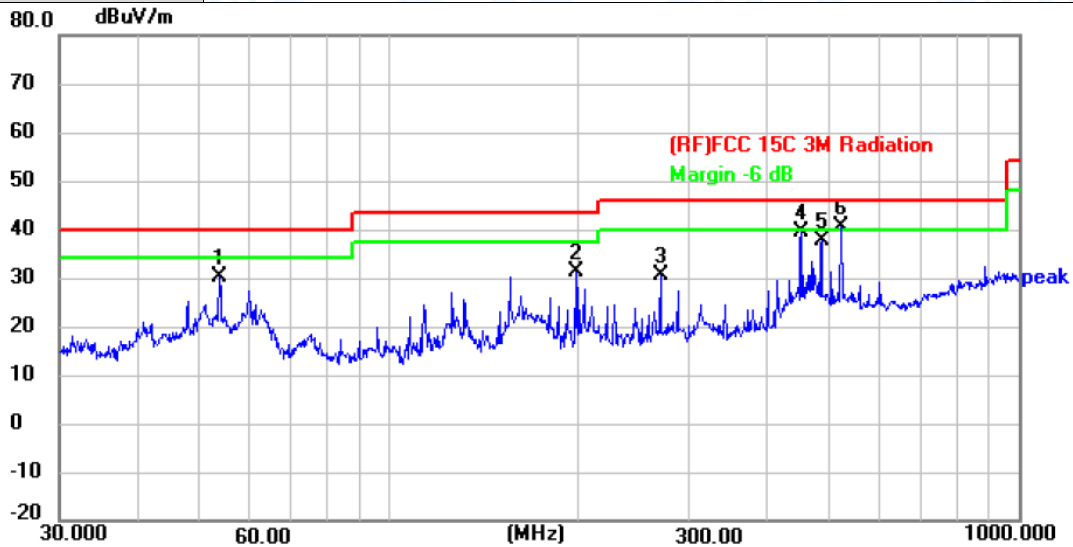

Temperature: 23.8 °C

Humidity: 45 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	53.8817	54.56	-24.53	30.03	40.00	-9.97	peak	P
2	197.8925	55.94	-24.68	31.26	43.50	-12.24	peak	P
3	270.3747	52.73	-22.10	30.63	46.00	-15.37	peak	P
4	451.1350	56.58	-17.09	39.49	46.00	-6.51	peak	P
5	487.3150	54.49	-16.88	37.61	46.00	-8.39	peak	P
6 *	522.7180	56.74	-16.17	40.57	46.00	-5.43	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	Mode 3 Adapter3#
<b>Remark:</b>	Only worse case is reported

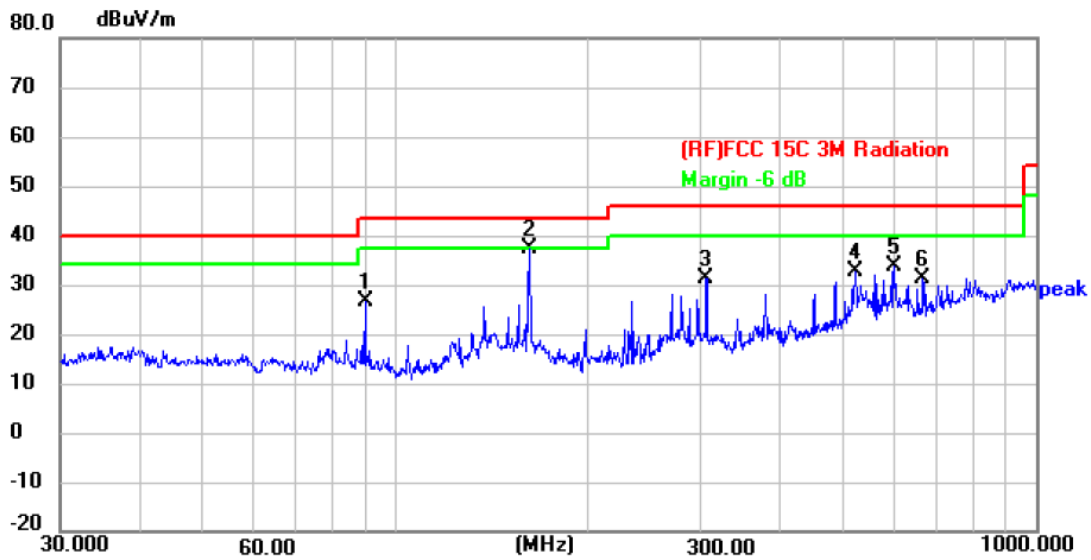

Temperature: 23.8 °C

Humidity: 45 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	89.9046	53.35	-26.86	26.49	43.50	-17.01	peak	P
2 *	162.0413	59.05	-21.88	37.17	43.50	-6.33	peak	P
3	305.6800	52.08	-20.74	31.34	46.00	-14.66	peak	P
4	522.7180	48.84	-16.17	32.67	46.00	-13.33	peak	P
5	601.4265	47.54	-13.83	33.71	46.00	-12.29	peak	P
6	665.8034	45.65	-14.29	31.36	46.00	-14.64	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	Mode 3 Adapter3#
<b>Remark:</b>	Only worse case is reported

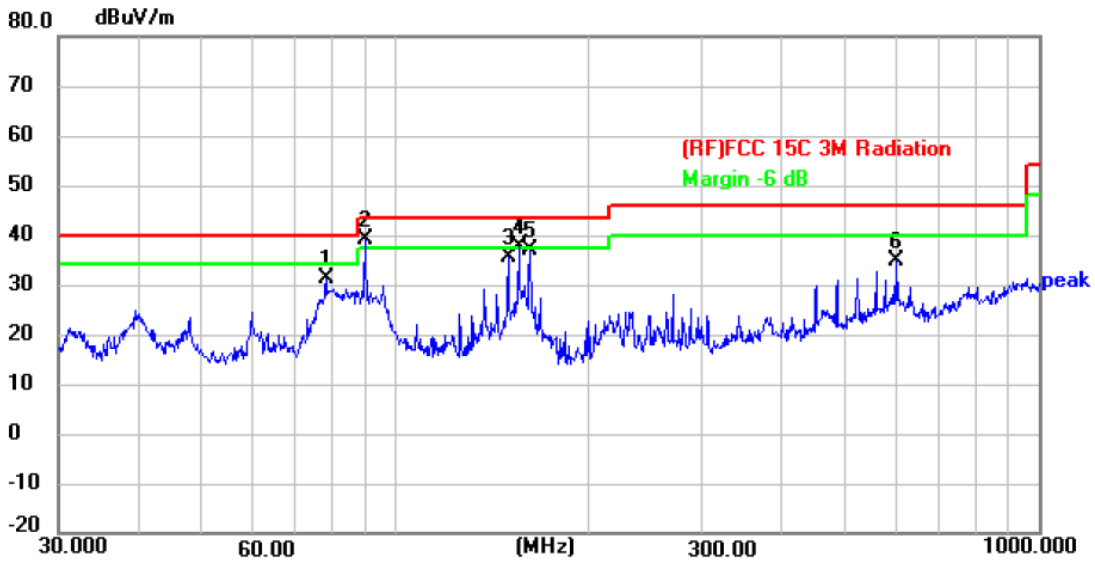

Temperature: 23.8 °C

Humidity: 45 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	78.1388	58.12	-27.00	31.12	40.00	-8.88	peak	P
2 *	89.9046	66.07	-26.86	39.21	43.50	-4.29	peak	P
3	150.0107	56.58	-21.21	35.37	43.50	-8.13	peak	P
4 !	155.9100	59.52	-21.75	37.77	43.50	-5.73	peak	P
5	162.0413	58.74	-21.88	36.86	43.50	-6.64	peak	P
6	601.4265	48.82	-13.83	34.99	46.00	-11.01	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



**Above 1GHz (Only worse case is reported)**

<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2412MHz		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11761.000	45.42	1.12	46.54	74.00	-27.46	peak	P
2 *	13546.000	46.14	2.22	48.36	74.00	-25.64	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value.

<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2412MHz		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10817.500	47.85	-0.36	47.49	74.00	-26.51	peak	P
2 *	13546.000	45.42	2.22	47.64	74.00	-26.36	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value.



<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2442MHz		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12118.000	45.46	1.49	46.95	74.00	-27.05	peak	P
2	13393.000	44.67	2.10	46.77	74.00	-27.23	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.

<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2442MHz		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11684.500	45.72	1.01	46.73	74.00	-27.27	peak	P
2 *	13571.500	45.41	2.25	47.66	74.00	-26.34	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2469MHz		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11251.000	47.15	0.40	47.55	74.00	-26.45	peak	P
2 *	13571.500	45.71	2.25	47.96	74.00	-26.04	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value.

<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2469MHz		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11965.000	45.66	1.40	47.06	74.00	-26.94	peak	P
2 *	13291.000	46.32	2.00	48.32	74.00	-25.68	peak	P

**Remark:**


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value.








**Conducted Emission Test Data**

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	No-Hopping	2412	-52.77	-20	Pass
NVNT	No-Hopping	2442	-50.55	-20	Pass
NVNT	No-Hopping	2469	-50.79	-20	Pass

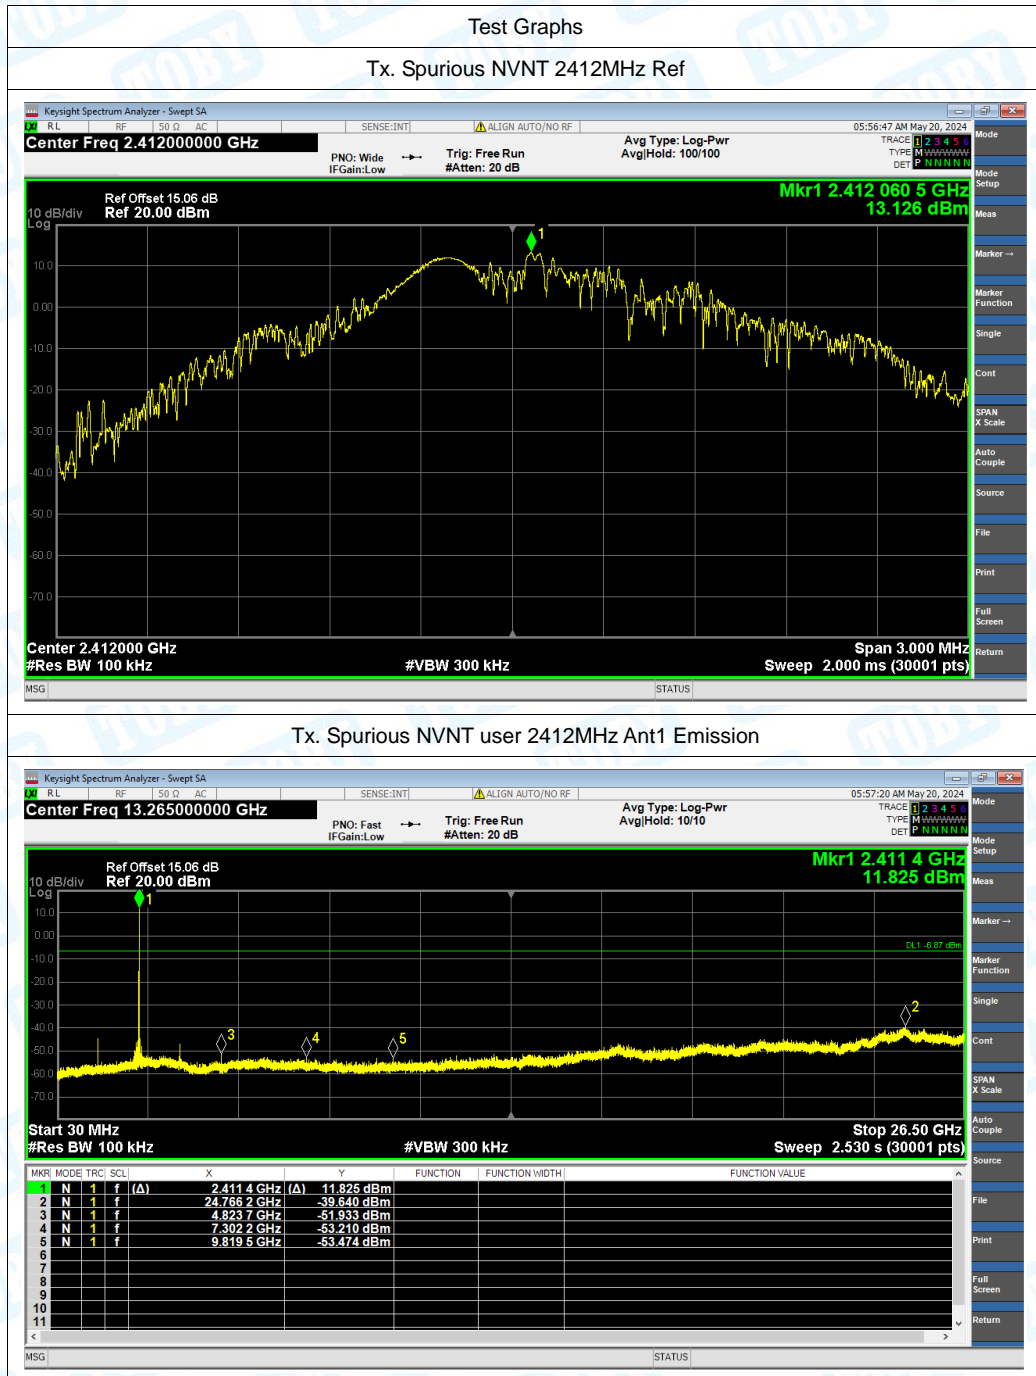


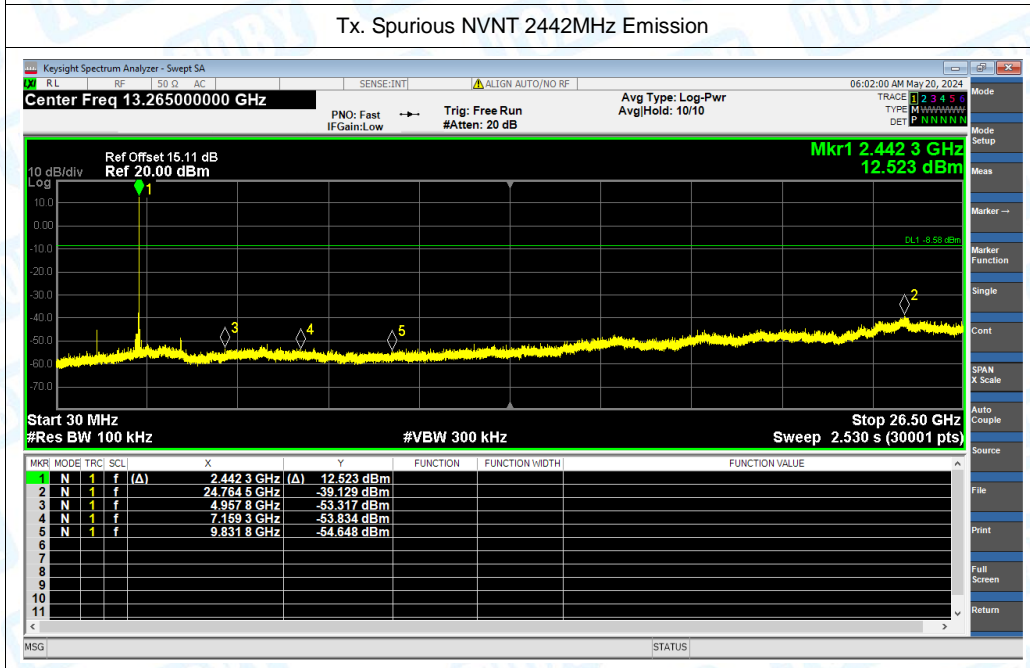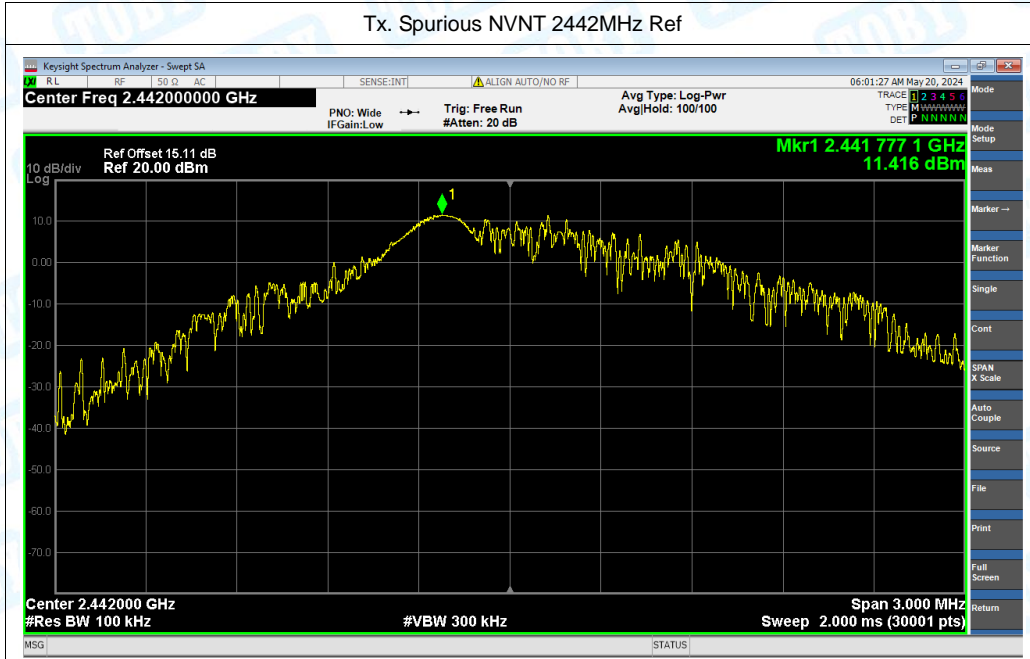

Tx. Spurious NVNT 2469MHz Ref

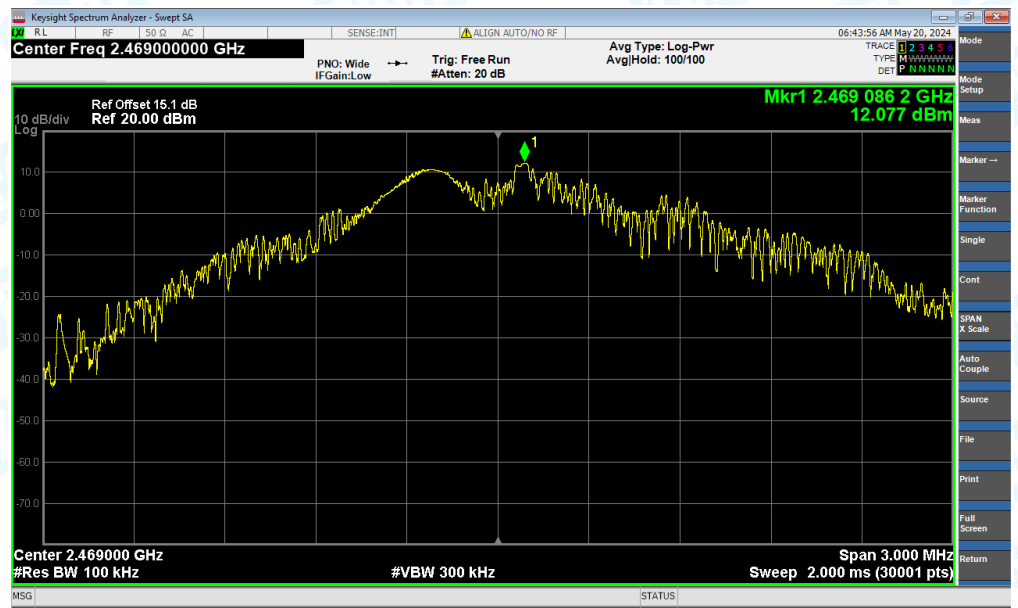


Tx. Spurious NVNT 2469MHz Emission


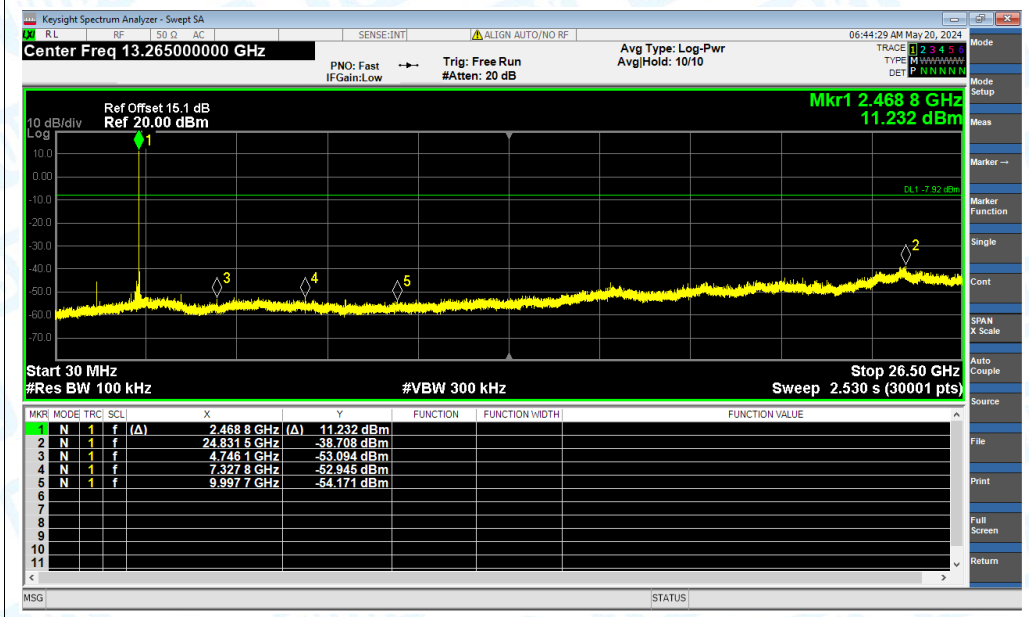


# Attachment C-- Restricted Bands Requirement Test Data

## 1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	No-Hopping	2412	Ant1	32.81	4.84	0.6
NVNT	No-Hopping	2442	Ant1	33.2	4.79	0.6
NVNT	No-Hopping	2469	Ant1	33.2	4.79	0.6

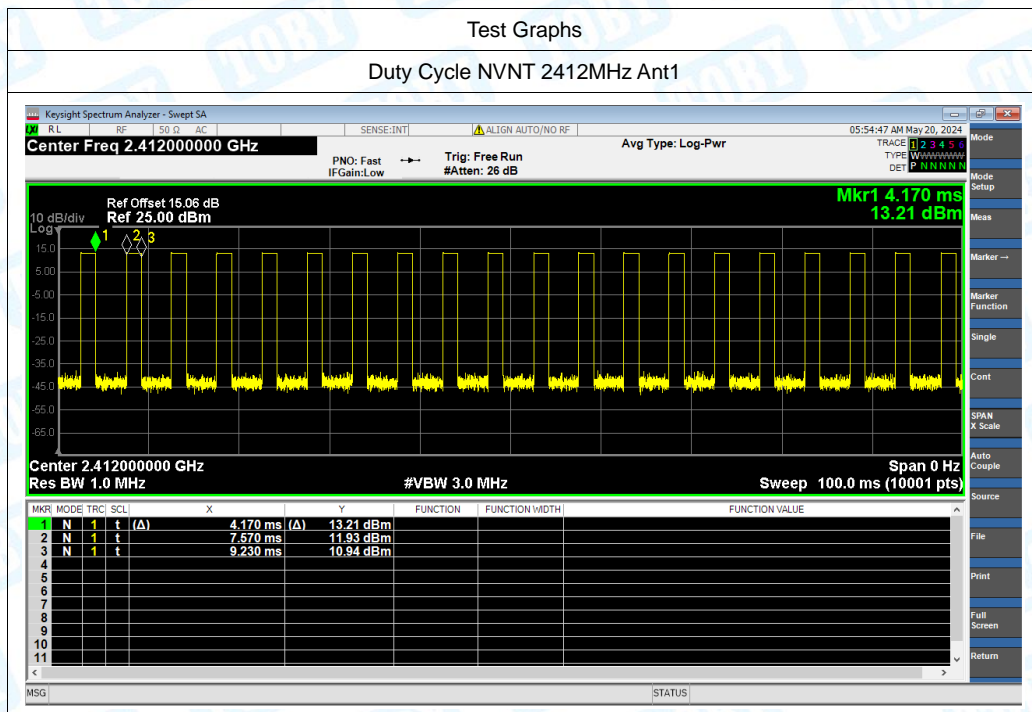

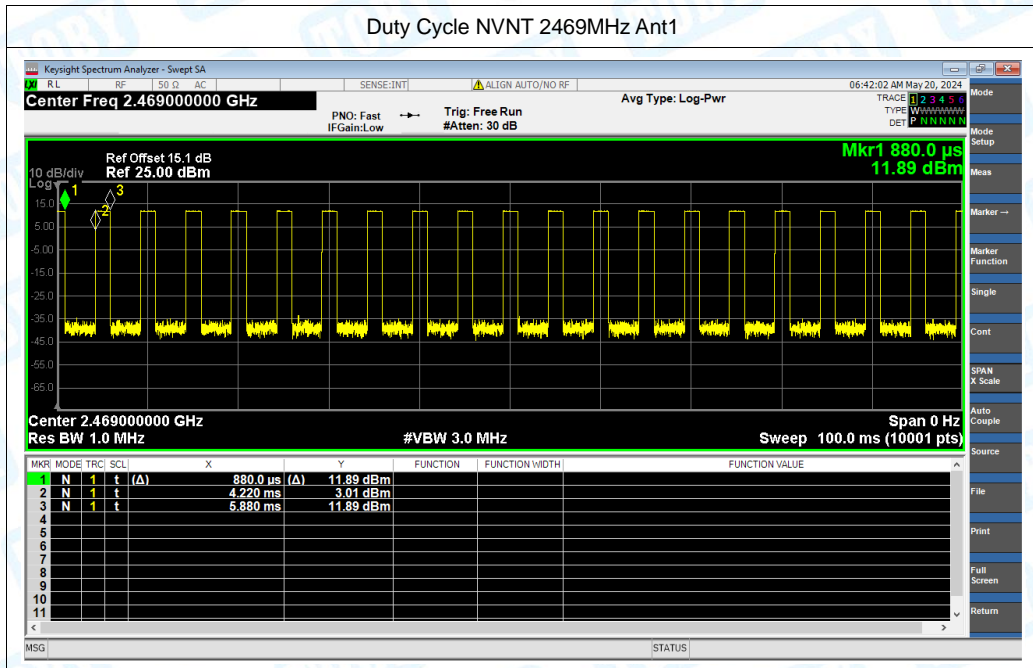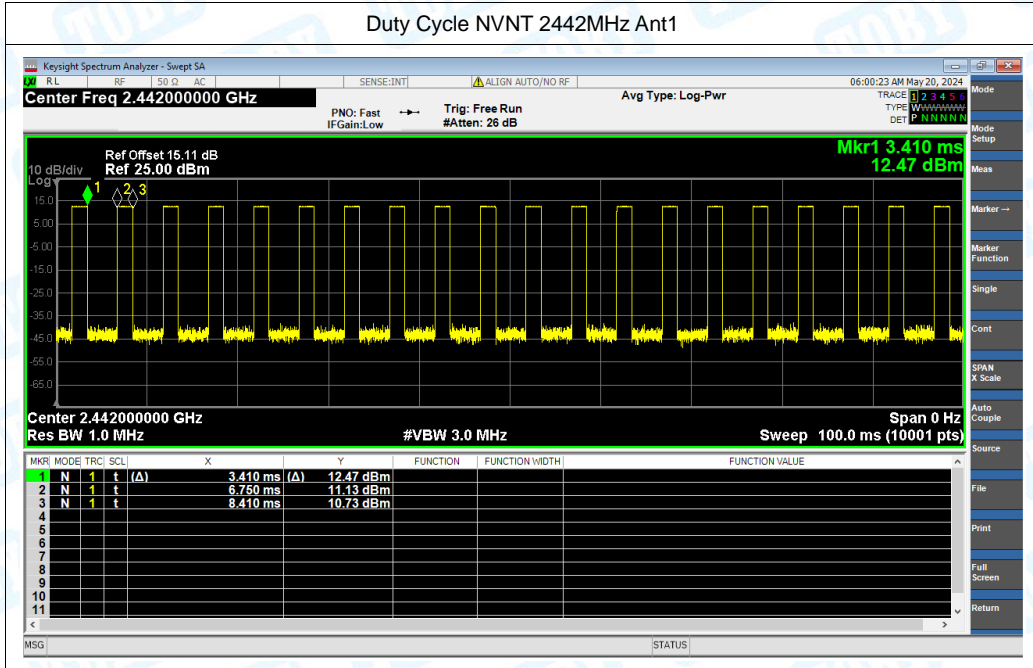


## 2.Restricted Bands Test Data

Condition	Frequency (MHz)	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	2412	No-Hopping	2310	-48.96	2.5	-	48.8	Peak	74	Pass
NVNT	2412	No-Hopping	2310	-55.22	2.5	4.84	47.38	Average	54	Pass
NVNT	2412	No-Hopping	2366.71	-31.91	2.5	-	65.85	Peak	74	Pass
NVNT	2412	No-Hopping	2380.278	-48.94	2.5	4.84	53.66	Average	54	Pass
NVNT	2412	No-Hopping	2390	-44.04	2.5	-	53.72	Peak	74	Pass
NVNT	2412	No-Hopping	2390	-55.38	2.5	4.84	47.22	Average	54	Pass
NVNT	2469	No-Hopping	2483.5	-42.47	2.5	-	55.29	Peak	74	Pass
NVNT	2469	No-Hopping	2483.5	-52.61	2.5	4.79	49.94	Average	54	Pass
NVNT	2469	No-Hopping	2484.95	-26.88	2.5	-	70.88	Peak	74	Pass
NVNT	2469	No-Hopping	2485.055	-48.69	2.5	4.79	53.86	Average	54	Pass
NVNT	2469	No-Hopping	2500	-43.3	2.5	-	54.46	Peak	74	Pass
NVNT	2469	No-Hopping	2500	-54.22	2.5	4.79	48.33	Average	54	Pass




Test Graphs


Restrict Band NVNT user 2412MHz No-Hopping Peak

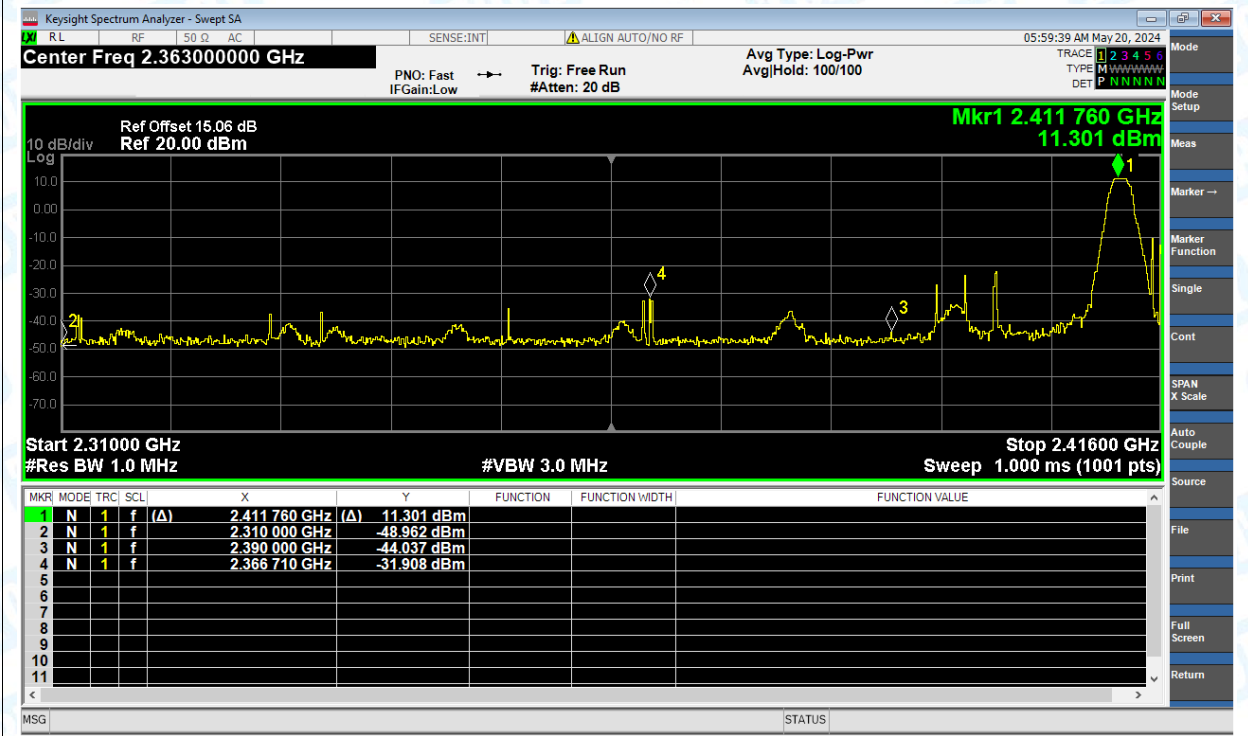


Restrict Band NVNT user 2412MHz No-Hopping Average

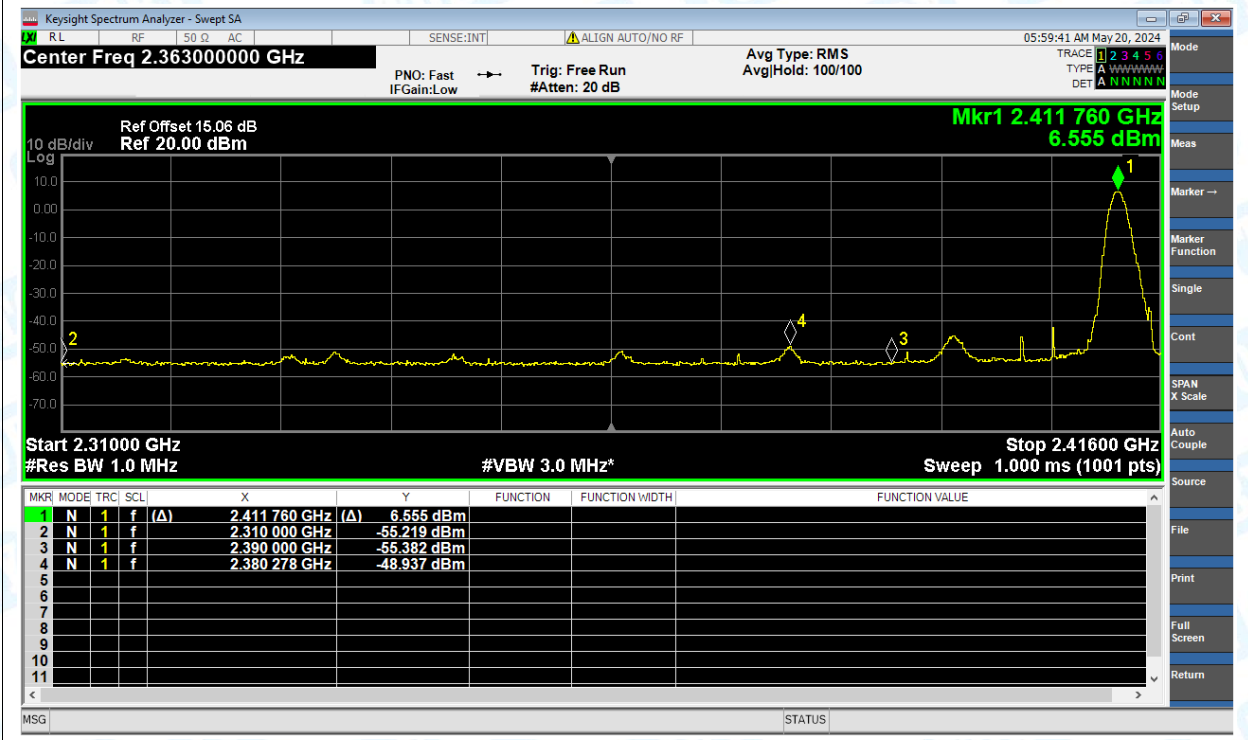

Restrict Band NVNT user 2469MHz No-Hopping Peak

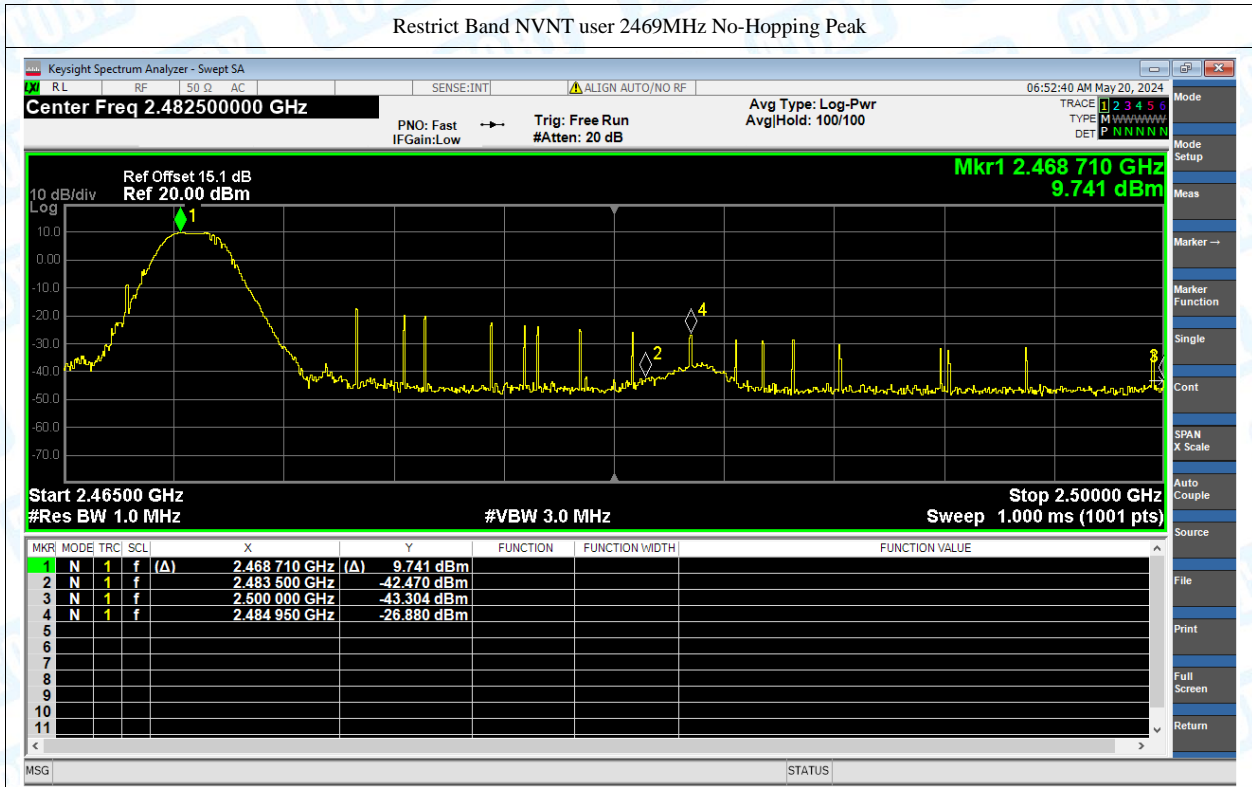


Restrict Band NVNT user 2469MHz No-Hopping Average

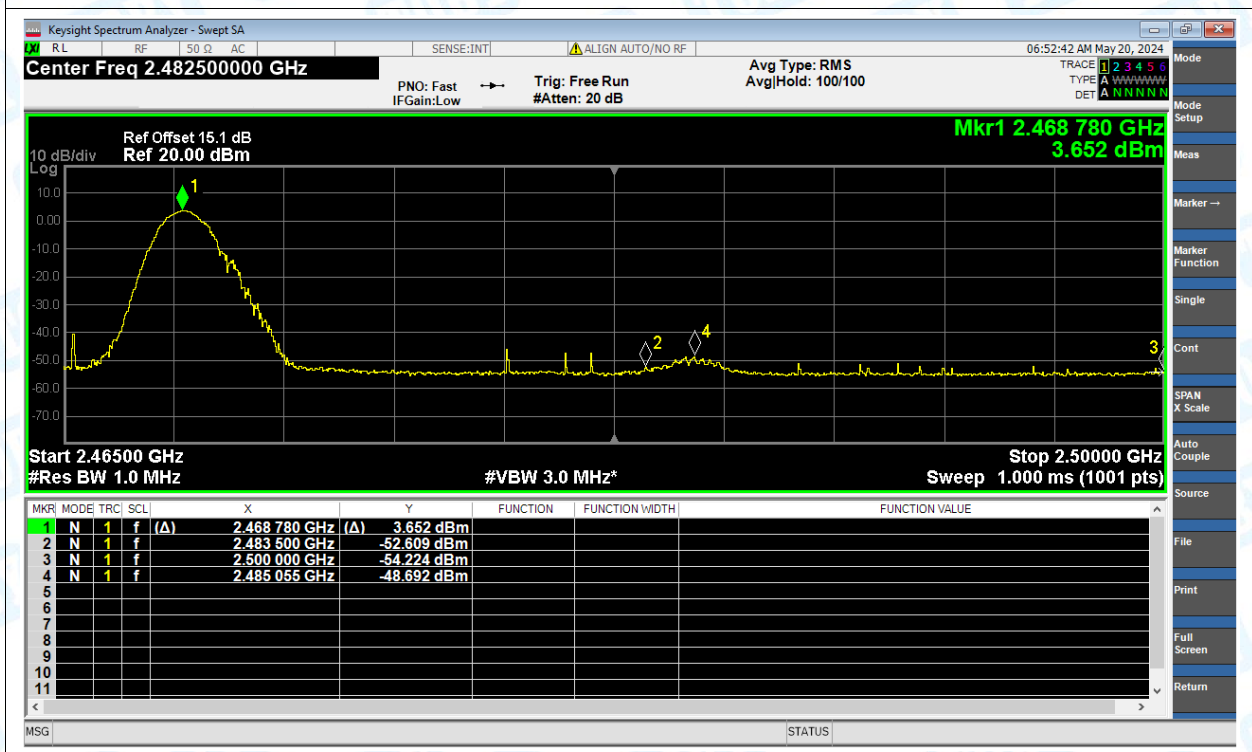




**(1) Band Edge**



Condition	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2412	No-Hopping	-50.62	-20	Pass
NVNT	2469	No-Hopping	-51.09	-20	Pass

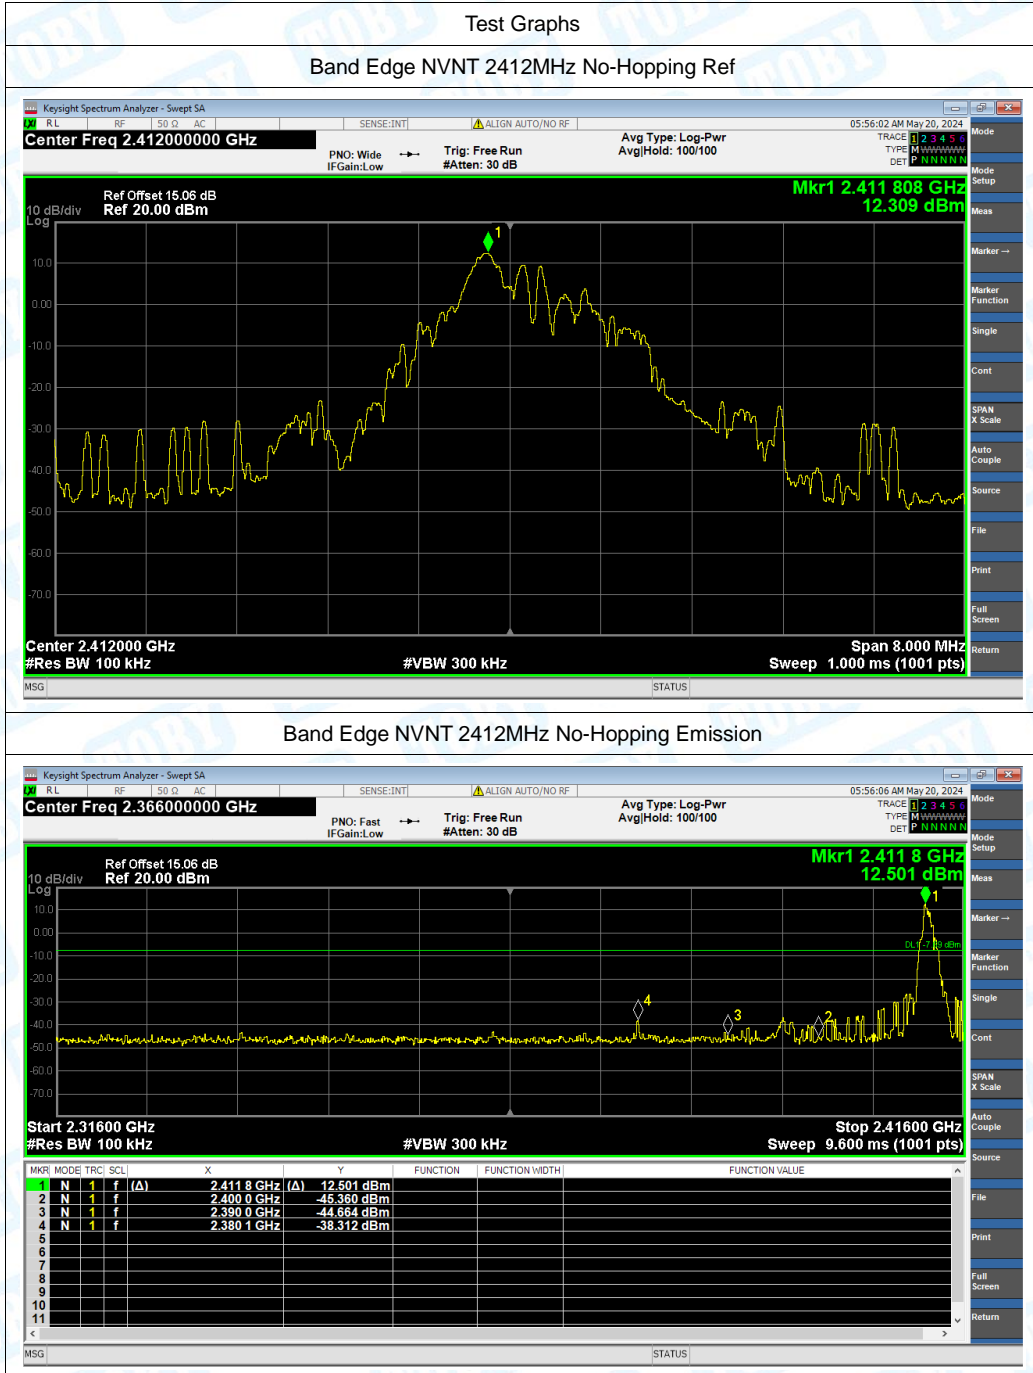

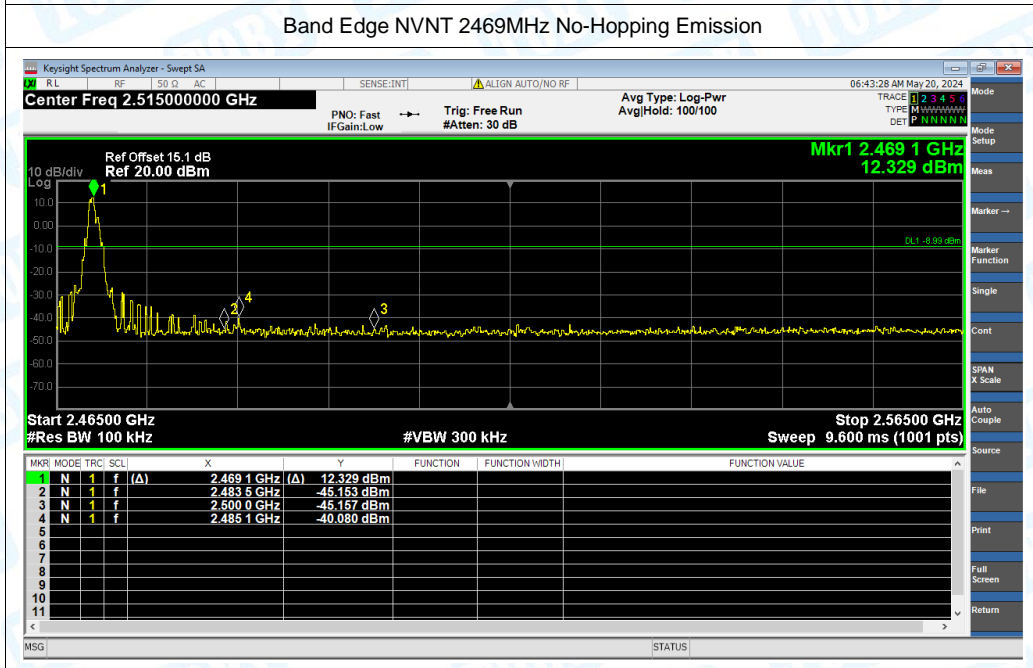


**(2) Band Edge(Hopping)**


Condition	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2412	Hopping	-50.62	-20	Pass
NVNT	2469	Hopping	-51.09	-20	Pass

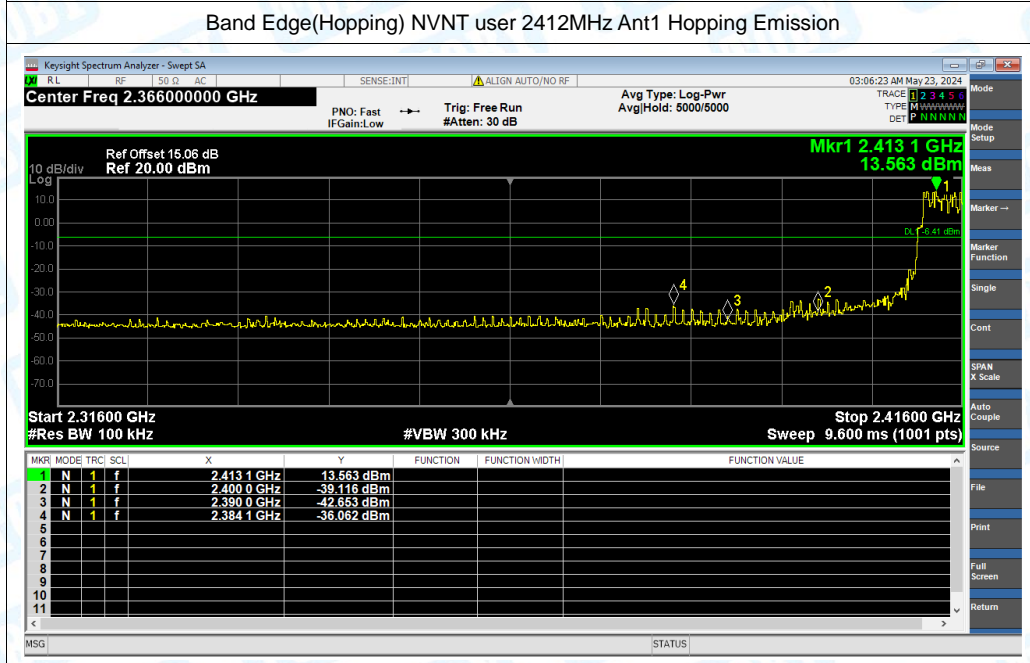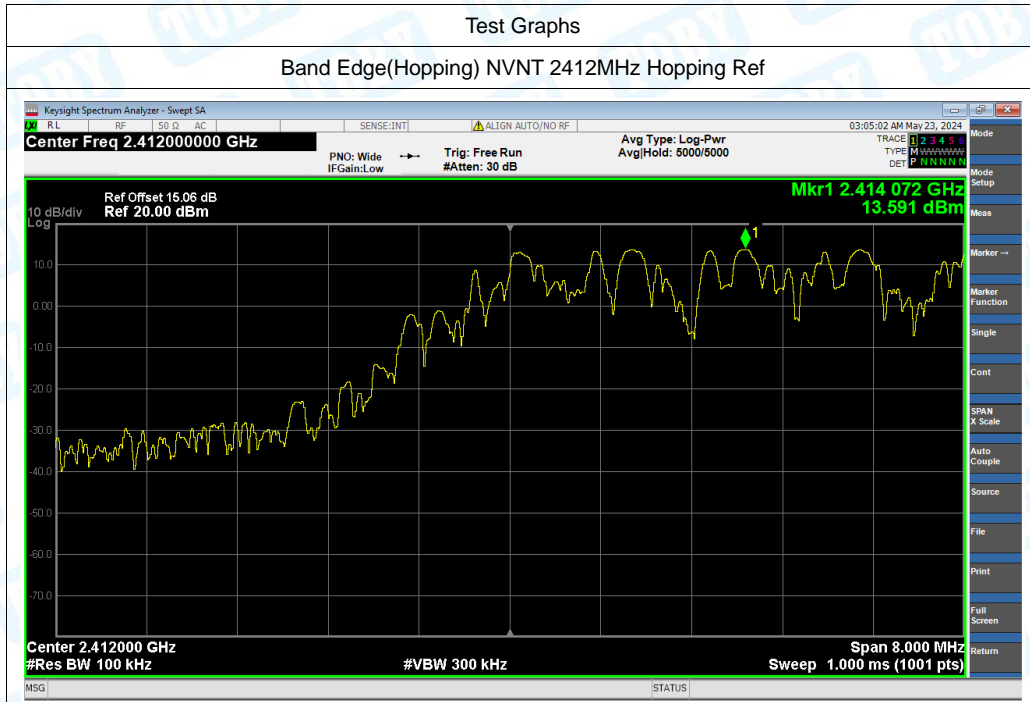

Band Edge(Hopping) NVNT user 2469MHzHopping Ref

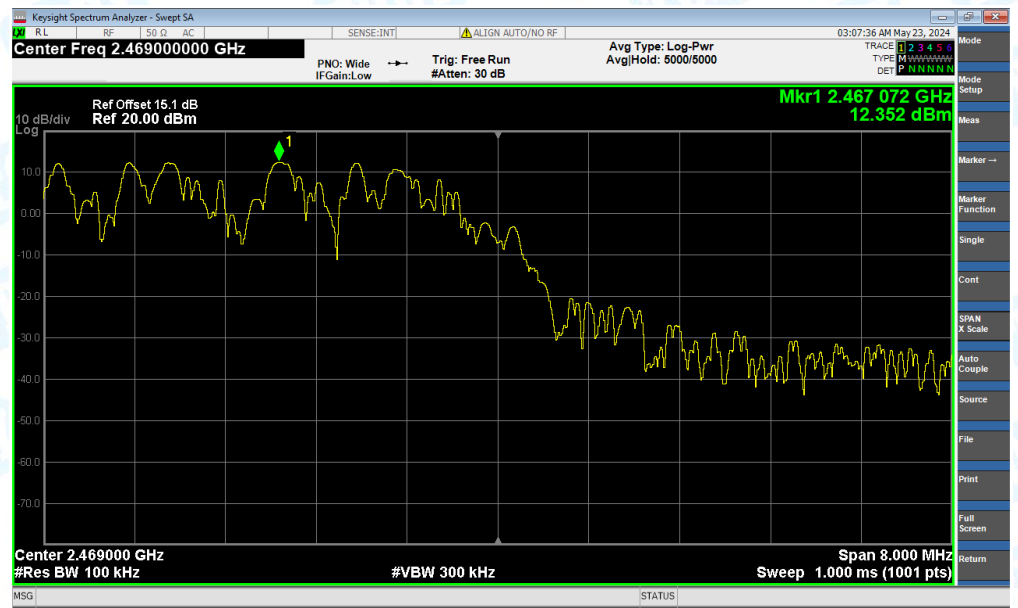


Band Edge(Hopping) NVNT 2469MHz Hopping Emission

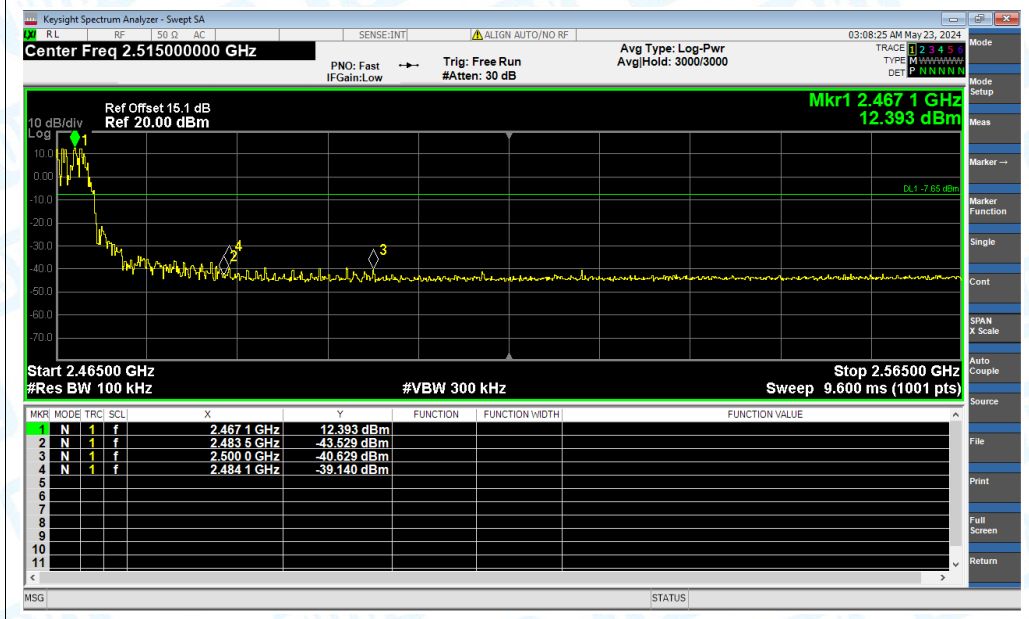

## Attachment D-- Number of Hopping Channel Test Data

Condition	Hopping Number	Limit	Verdict
NVNT	58	15	Pass


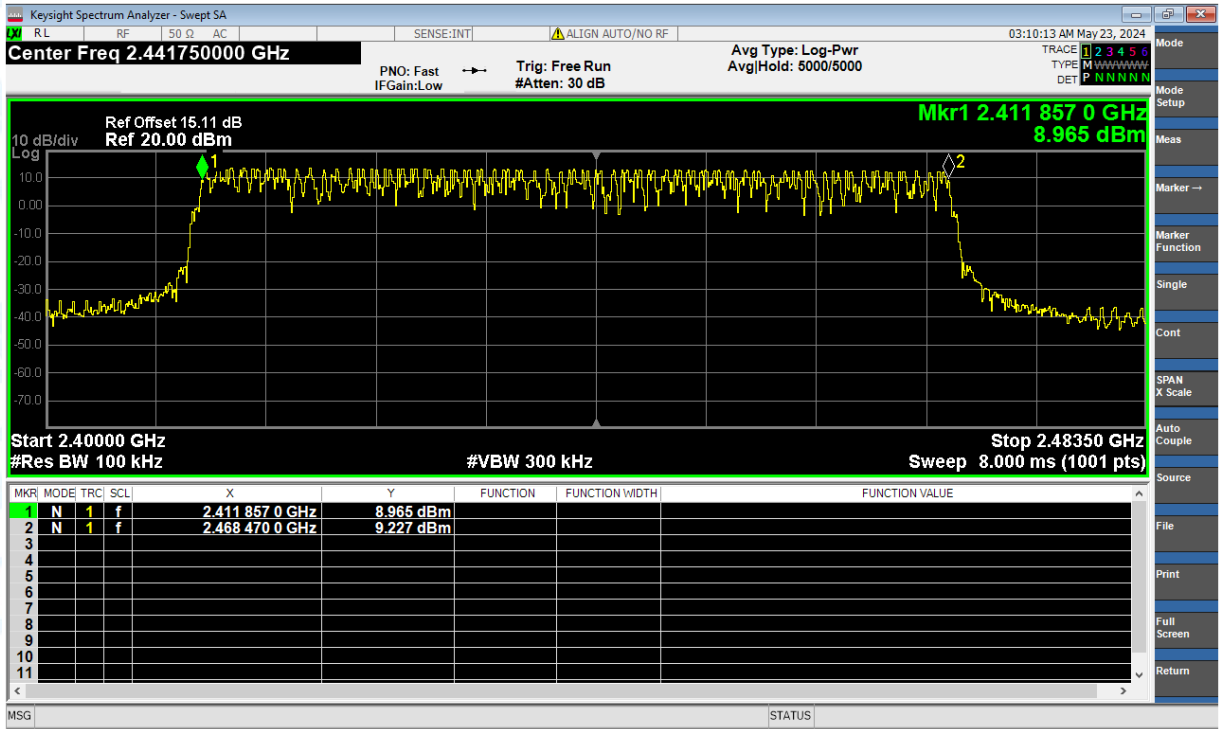


## Attachment E-- Average Time of Occupancy Test Data

<b>Temperature:</b> 25°C		<b>Relative Humidity:</b> 55%				
<b>Test Voltage:</b> AC 120V						
<b>Test Mode:</b> Hopping Mode (GFSK)						
Test Mode	Channel (MHz)	Reading Time (ms)	Total hops	Test Result (ms)	Limit (ms)	Result
GFSK	2442	2.050	26	53.3	400	PASS

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are shown as follows:  
 The duration for dwell time calculation: 0.4 [s] \* hopping number = 0.4 [s] \* 58 [ch] =23.2[s\*ch];  
 The burst width, which is directly measured, refers to the duration on one channel hop.  
 The maximum number of hopping channels in 23.2s is 26  
 Reading Time=2.050 ms

### GFSK Hopping Mode

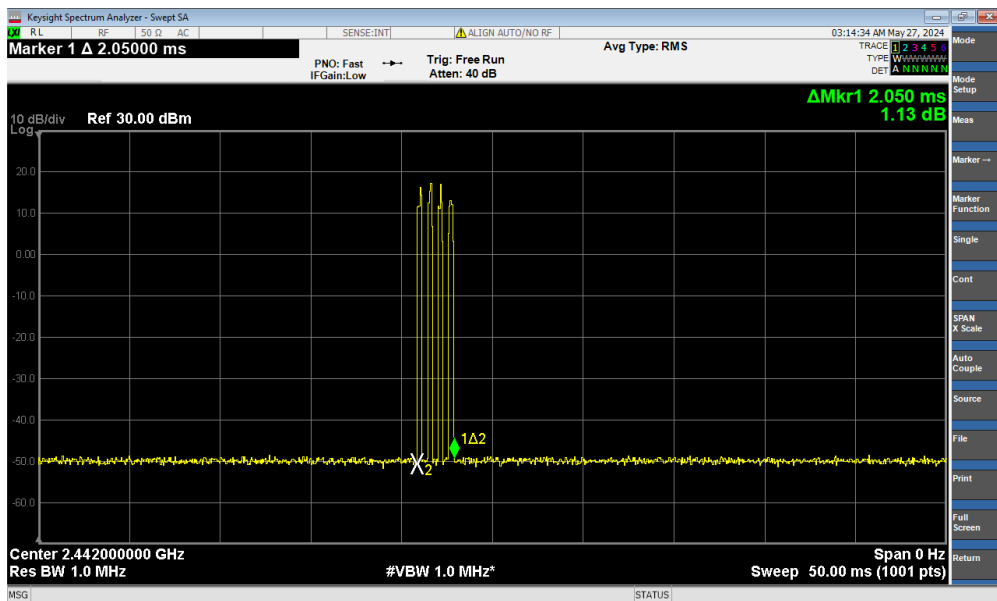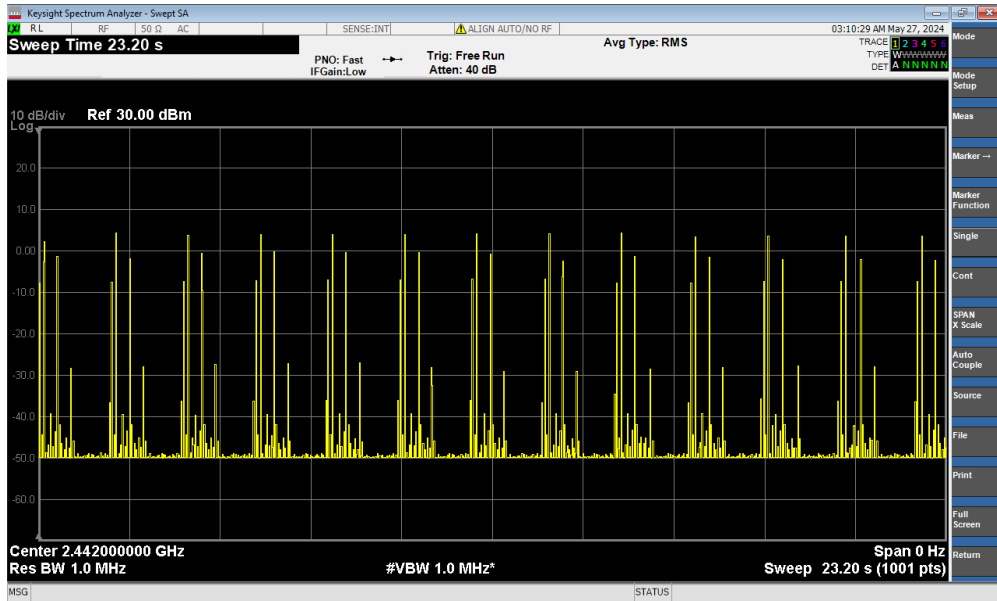


# Attachment F-- Channel Separation and Bandwidth Test


## Data

### Bandwidth Test Data:


Condition	Frequency (MHz)	-20 dB Bandwidth (MHz)	2/3 *-20 dB Bandwidth (MHz)
NVNT	2412	1.29	0.86
NVNT	2442	1.28	0.85
NVNT	2469	1.28	0.85

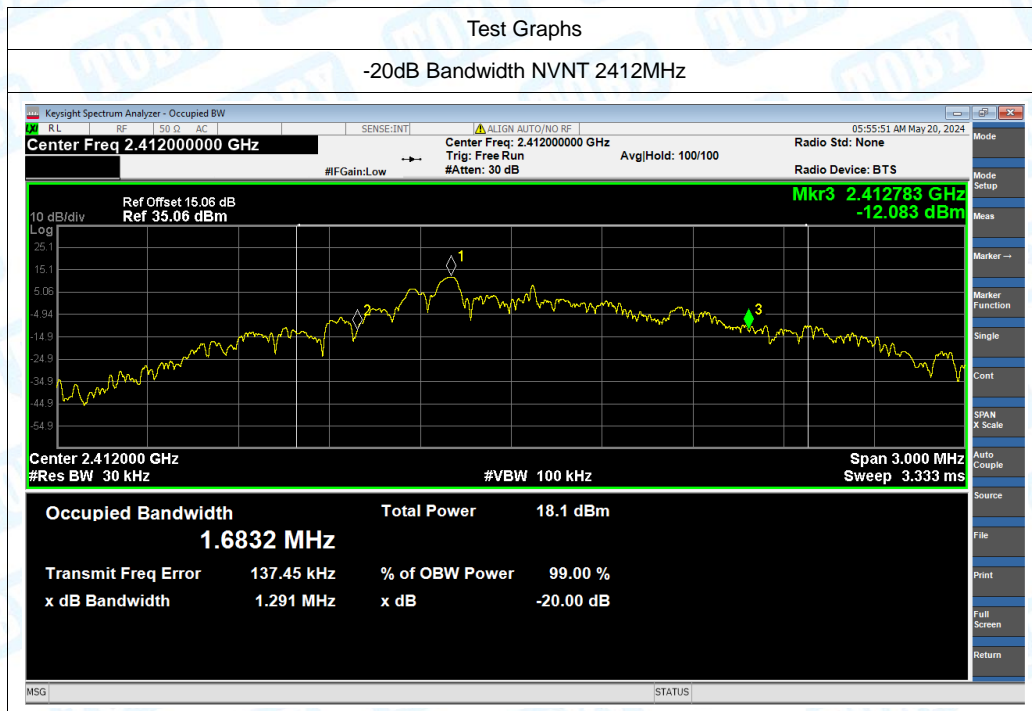

-20dB Bandwidth NVNT 2442MHz

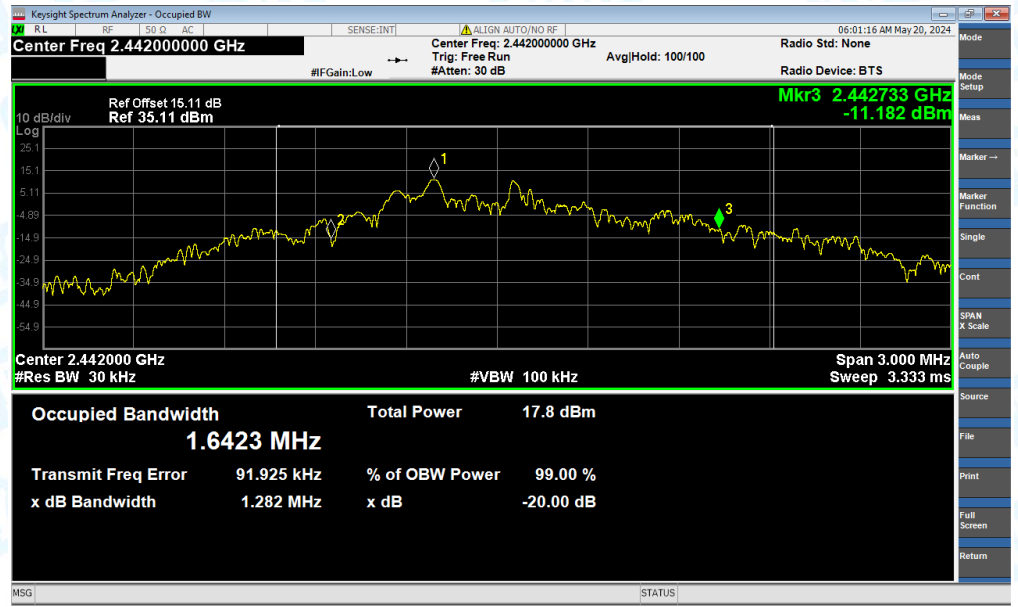




-20dB Bandwidth NVNT 2469MHz

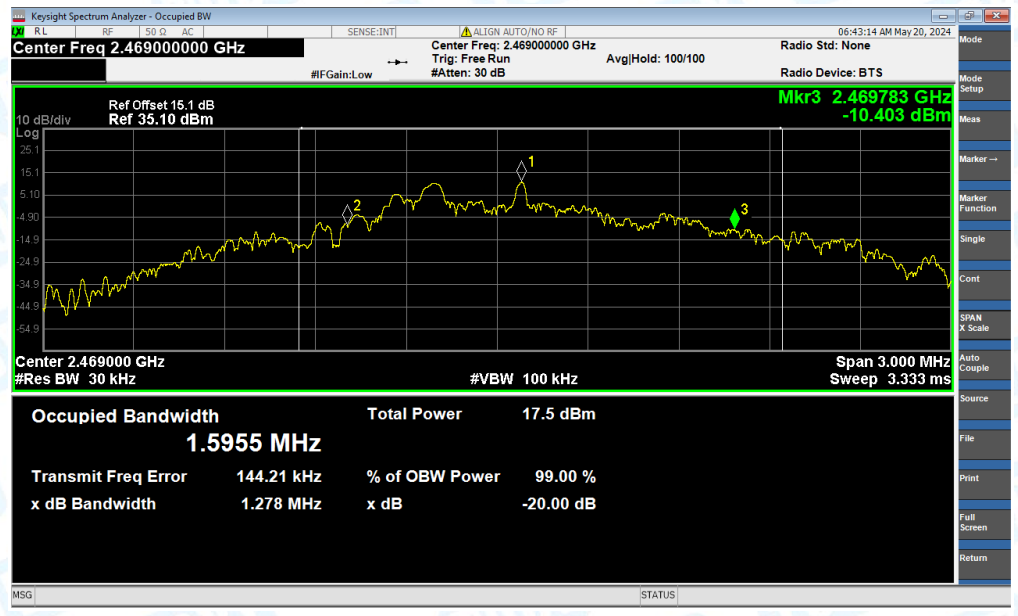




Condition	Frequency (MHz)	99% OBW (MHz)
NVNT	2412	1.663
NVNT	2442	1.643
NVNT	2469	1.568

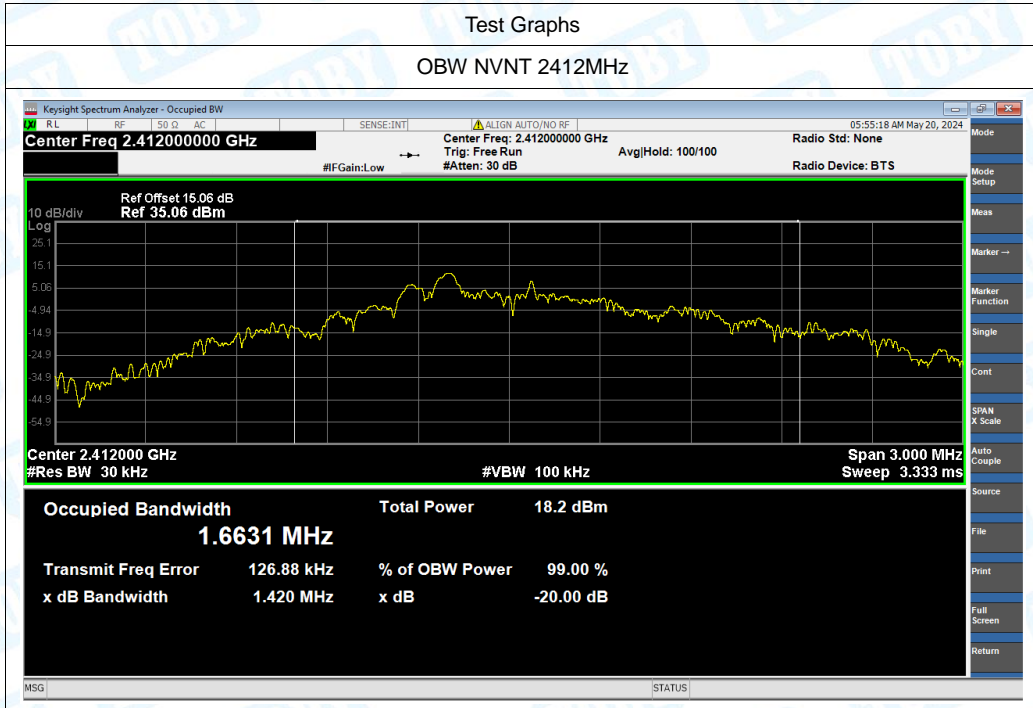

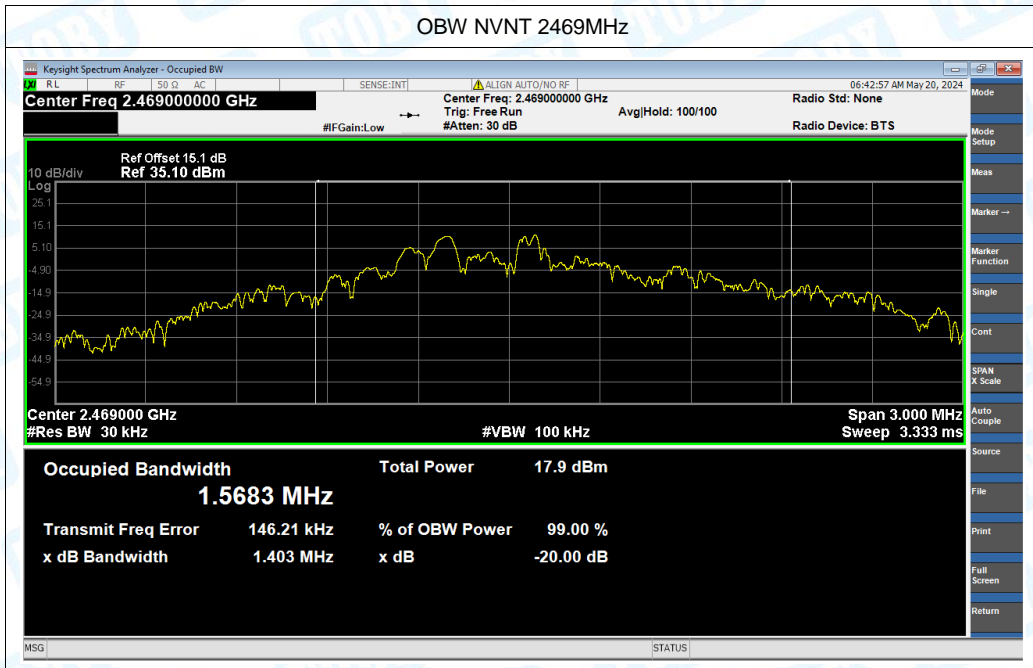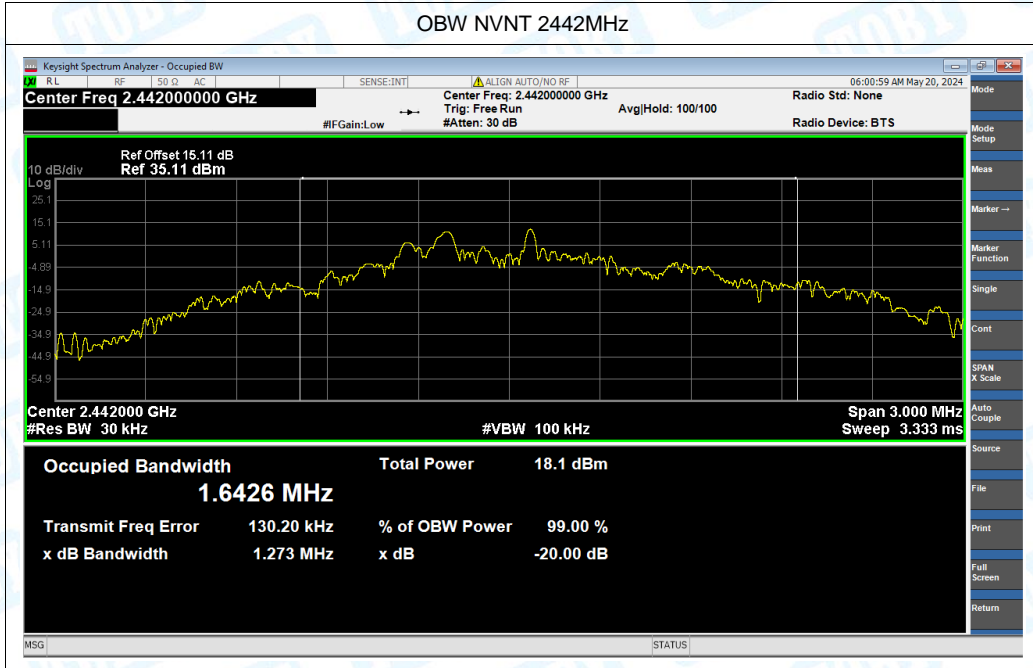


**Channel Separation Test data:**


Condition	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	2441.748	2442.75	1.041	0.86	Pass

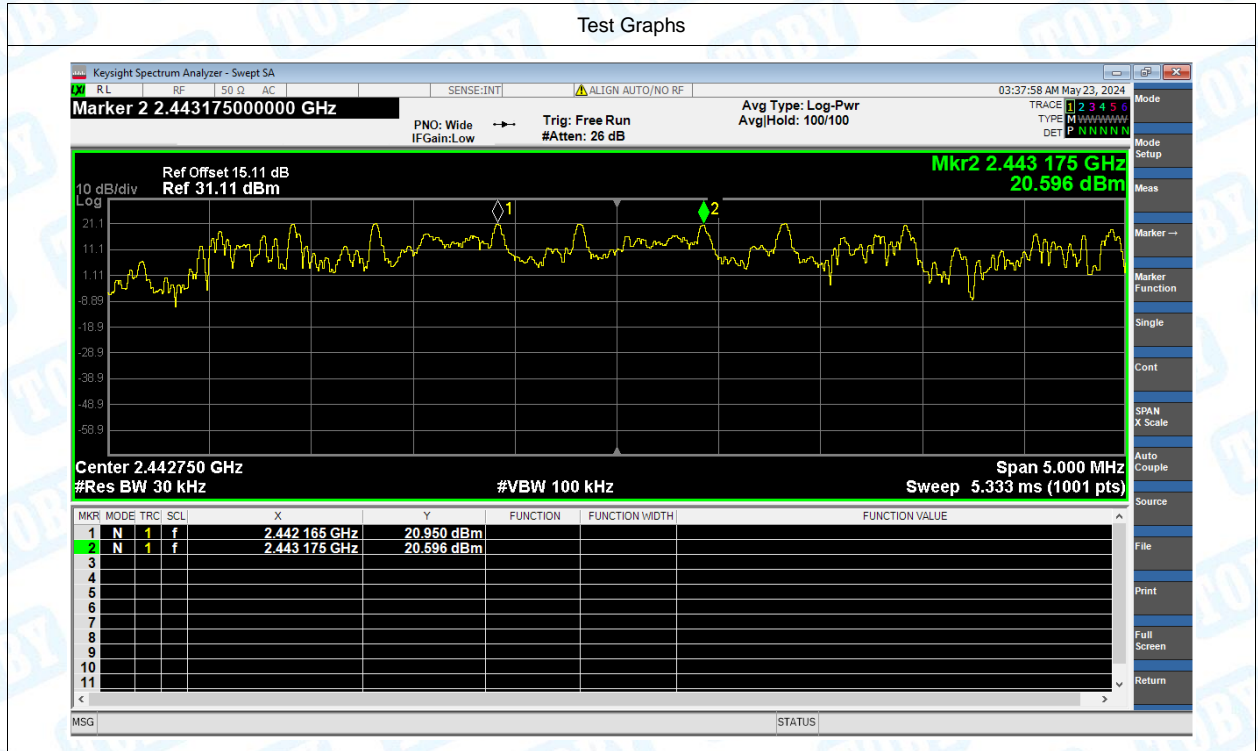

## Attachment G-- Peak Output Power Test Data

Condition	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	2412	13.496	21	Pass
NVNT	2442	12.936	21	Pass
NVNT	2469	12.210	21	Pass

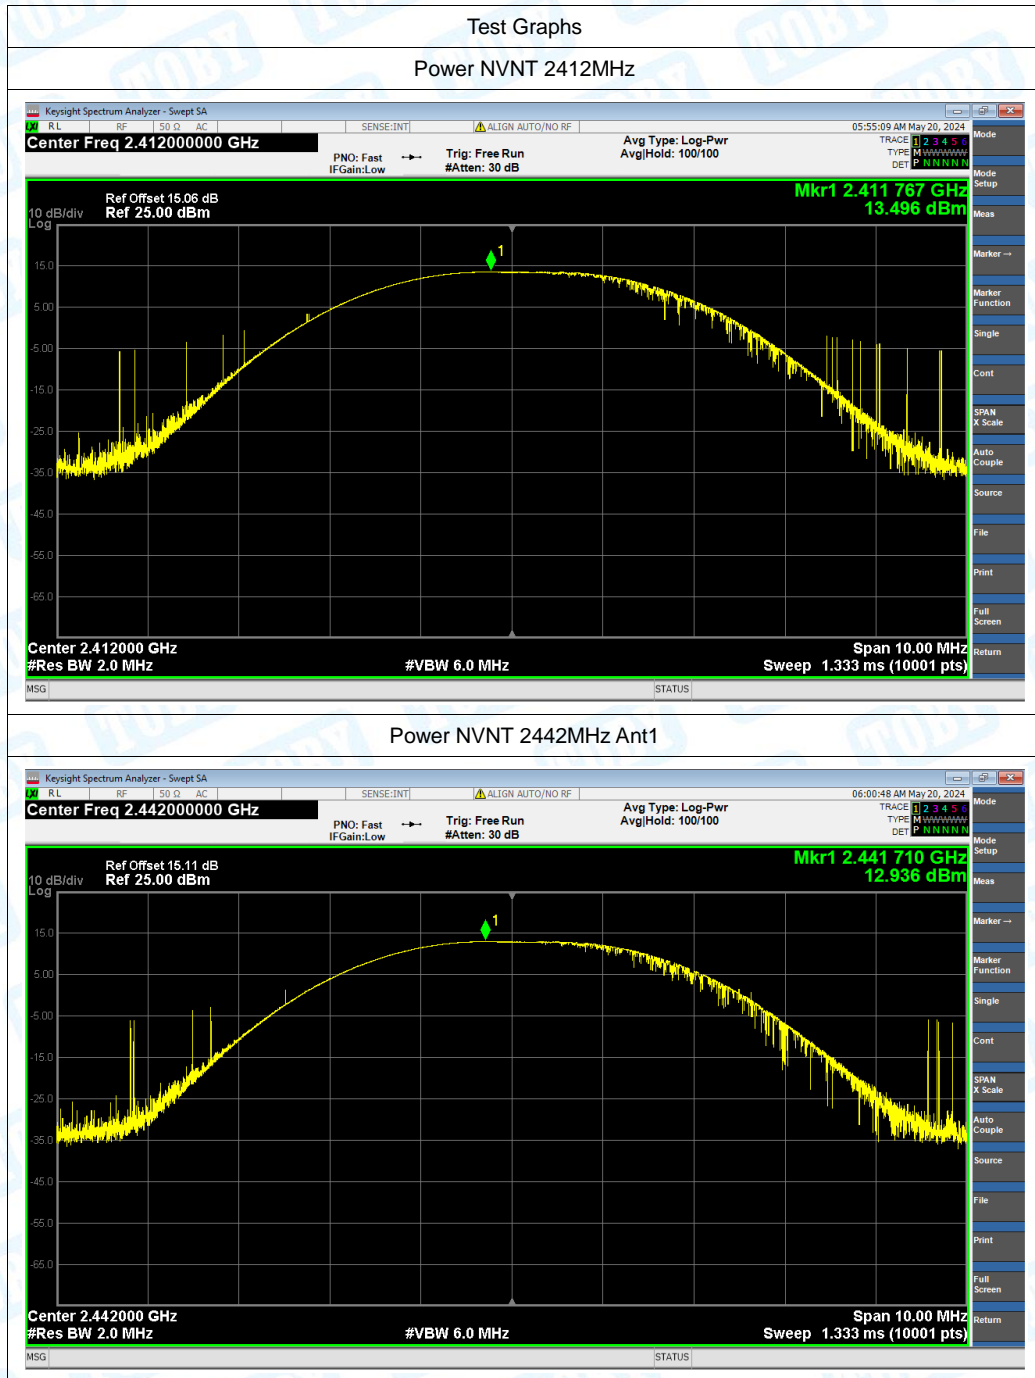

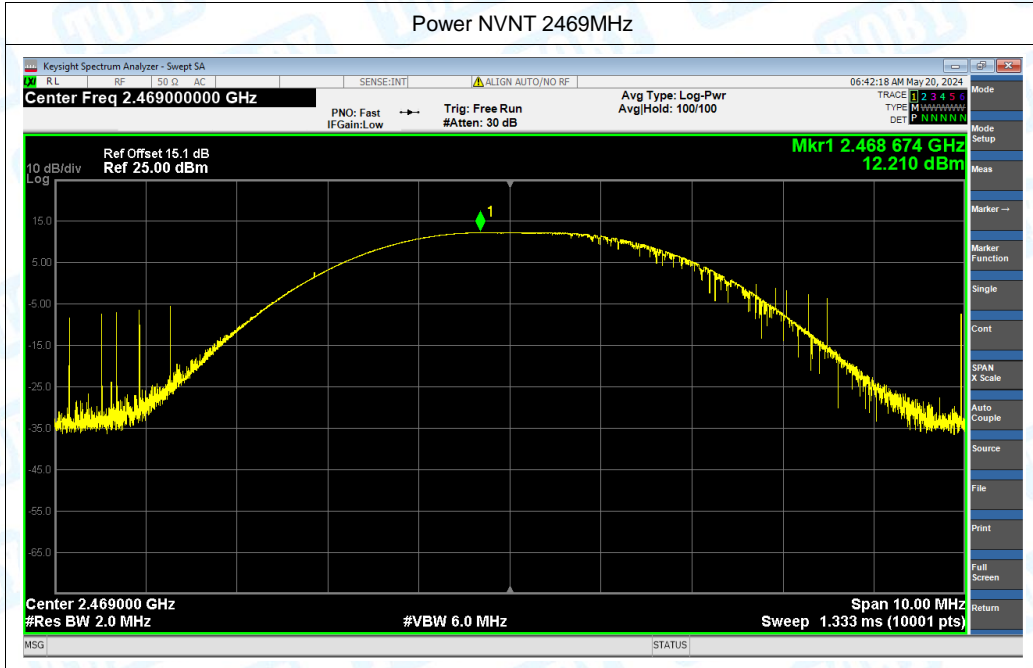

-----END OF THE REPORT-----

