

HelloBaby®

Ver: 1.0(JD)

User Manual

2.4GHz Digital Wireless Video Baby Monitor



Model: HB6560

The pictures are for reference only, please subject to practicality.

www.hellobaby.net.cn
service@hellobaby.net.cn

Thank you for purchasing the HB6560 Baby Monitor. With our baby monitor, you could see and hear your baby sleeping or playing in their room anytime.
Please retain your original dated sales receipt for your records. For warranty service of your product, you will need to provide a copy of your dated sales receipt to confirm warranty status. Registration is not required for warranty coverage.

PLEASE MAKE SURE THE FOLLOWING INCLUDED IN YOUR PACKAGE

Parent unit x 1 Camera unit x 1 Power adapter x 2
User manual x 1 Wall-mounting kit x 1

1. SAFETY INSTRUCTIONS

Caution: Keep the device away from children.

Strangulation hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3ft (0.9m) away). Never use extension cords with AC Adapters. Only use the AC Adapters provided.

Choking hazard: This product contains small parts, please be careful when unpack and assemble the product.

Read and keep to instructions: All the safety and operating instructions should be read before the video baby monitor is operated. This product cannot replace responsible adult supervision.

Water and moisture: The unit should not be exposed to rain, moisture, dripping or splashing. No objects filled with liquid should be placed on top of, or beside the product, such as a glass or vase. This item should not be used near water.

Do not: Use the appliance if the cord or plug is damaged. If your baby monitor is not operating properly or has suffered any damage, contact "service@hellobaby.net.cn" service center to request inspection and repair of the appliance in order to avoid any possible risk. **Do not:** Attempt to repair or adjust any of the electrical or mechanical functions of the unit. Otherwise, the guarantee will be made void.

Ventilation: This baby monitor should not be used on a bed, sofa, rug or similar surface that may block the ventilation openings, or be placed in an enclosed area such as a bookcase or drawer that may impede air flow.

Keep away from sources of heat: This unit should not be exposed to direct heat sources such as a candle, radiator, heat register, stove or other appliance that emits heat. The unit should not be left in direct sunlight.

Power source: This unit should only be used with the AC power adapters included in this package (rated 5V DC 1A).

Damage requiring service: This unit should be serviced by qualified personnel only when:

- Objects have fallen or liquid has been spilled into the product.
- The units have been exposed to rain.
- The units do not appear to operate normally or exhibits a distinct change in performance.
- The units have been dropped or the enclosure damaged.

2. WARRANTY TERMS

We offer one-year warranty from the original purchase date against defects in workmanship and materials. If you have warranty or support issues, please contact our after-sales service via email.

3. INSTALLATION GUIDELINES

- To use your parent unit and camera unit together, you have to establish a radio link between them, and the range will be affected by environmental conditions.
- Azyl large metal object, like a refrigerator, a mirror, a filling cabinet, metallic doors or reinforced concrete between the baby and parent unit may block the radio signal.
- The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TV, computers, cordless or mobile phones, fluorescent lights or dimmer switches.
- Use of other 2.4GHz product, such as wireless networks (Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the baby monitor away at least 5ft (1.5m) from such products, or turn them off if they cause interferences.

4. PLACEMENT OF THE BABY MONITOR

The camera can be placed on the desktop or mounted on the wall. Don't place baby monitor on soft quilts or blankets or in the corners of cupboards, shelves, etc. Keep the baby monitor away from heat sources such as radiators, chimneys, cookers and direct sunlight; Keep the baby unit away from TV sets, microwave oven and radios. If interference occurs, move the camera to elsewhere.
* Place the camera within 6 feet (2 meters) of the area being monitored for optimum performance.

5. GETTING STARTED

5.1 TURN ON THE BABY UNIT:

- Insert the DC plug of the power adapter into the DC jack in the rear of the Baby Unit.
- Insert the other end of the power adapter into a suitable electrical outlet.

Note: To prevent any disturbance to children, we have implemented an advanced invisible night vision light.

5.2 TURN ON THE PARENT UNIT:

- Insert the DC plug of the power adapter into the DC jack in the side of the Parent Unit.
- Insert the other end of the power adapter into a suitable electrical outlet.
- Press and hold the power key 3 seconds on the side of the parent unit.
- Once parent unit is on, the power LED will light up and the image will display on the LCD.

Note: When the product is in use, the antenna needs to be pulled up, so that the signal is the best.

5.3 PAIRING THE CAMERA AND PARENT UNITS

The baby unit is pre-registered to your parent unit, just watch your baby from the screen, enjoy it! If the two devices don't pair, follow the procedure below:

- Make sure the parent unit has power and the baby unit is plugged in.
(Please check in a dim environment to ensure that the camera is powered.)
- Enter "Camera" on the screen of the parent unit, and choose to add a camera.
- When the hourglass icon is displayed on the LCD screen, press the PAIR button on the back of the baby unit.


Note: The camera icon with " " means it is well registered. If doesn't work, contact service@hellobaby.net.cn.

5.4 INFRARED NIGHT VISION (AUTOMATIC)


The infrared night vision function allows the camera to pick up images in dark or low light conditions. In this mode, only black and white images will be displayed on the monitor, the optimum image lie in where baby unit is 6ft (2m) away from object. The camera is in night vision mode, the icon will be displayed on the top of screen.

6. PRODUCT OVERVIEW


6.1 BABY UNIT OVERVIEW:

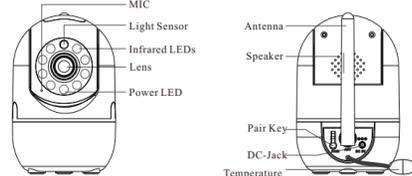

6.2 PARENT UNIT OVERVIEW:

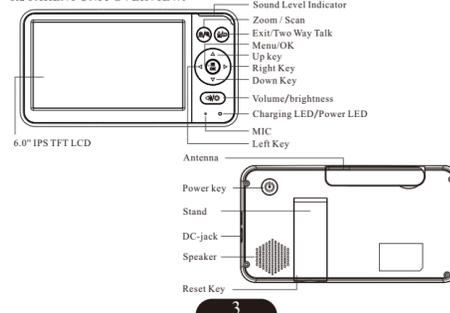

6.3 ICONS OVERVIEW:



7. KEY OPERATION

7.1 TURN ON/OFF

Press and hold the power key for 3 seconds to turn on / off the parents unit.

7.2 UP ▲ KEY

Press once to tilt the camera up by one step. Press and hold to tilt continuously.

7.3 DOWN ▼ KEY

Press once to tilt the camera down by one step. Press and hold to tilt continuously.

7.4 LEFT ◀ KEY

Press once to pan the camera left by one step. Press and hold to pan continuously.

7.5 RIGHT ▶ KEY

Press once to pan the camera right by one step. Press and hold to pan continuously.

7.6 CAMERA VIEW/SCAN

Split-Screen Function

The baby monitor is equipped with 2 cameras and SPLIT-SCREEN function, which allows you to see both cameras side by side on the same screen.

Press () key to view/scan camera:
Press 1 time: View camera 1, and icon 1 displays on the top of the screen.
Press 2 times: View camera 2, and icon 2 displays on the top of the screen.

Press 3 times: Loop scan camera 1 and camera 2, and icon 1 & 2 displays on the top of the screen. Each camera's video will display on the screen around 10 seconds.

Press 4 times: Enter into SPLIT-SCREEN mode, both the icon 1 and 2 displays on the top of the screen. You can see both cameras side by side on the same screen.

Note: In the split-screen interface, the cursor defaults to Camera 1. The video sound that the display screen plays comes from Camera 1. If you want to listen to the sound from Camera 2, please move the cursor to Camera 2. The video sound that the display screen plays will then come from Camera 2. (It cannot monitor the sound from two cameras simultaneously).

7.7 VOLUME/DISPLAY BRIGHTNESS

Press scan key to volume/display brightness.

Press the ◀ ▶ key to select the desired volume level from level 1-5.

Press ▲ ▼ keys to select the desired brightness level from level 1-5.
(The default brightness level setting is level 3.)

7.8 DIGITAL ZOOM

Under full screen mode, Press and hold the key around 2 seconds to operate zoom in/out.

7.9 TWO-WAY TALK

Under full screen mode, Press and hold key to enter two way talk mode. A microphone

icon will be displayed in the corner of the LCD screen. Release the key to stop.

Note: When you are in the two-way talk mode, the parent unit speaker is muted.

8. MENU OPERATION

8.1 PAIRING THE CAMERA AND PARENT UNITS

The baby unit is pre-registered to your parent unit. You do not need to register it again unless the baby unit loses its link with the parent unit. To re-register your baby unit, or register a new baby unit, follow the procedure below:

Note: Camera icon with " " means it is well registered. You should select and pair with the camera icon without " " sign.

8.1.1 ADD CAMERA

- Press the MENU key then the menu will pop up.
- Press the ◀ ▶ / ▲ ▼ key until the camera icon is selected.
- Press OK key to enter into sub-menu, then press ▲ ▼ key to select your desired camera.
- Press key enter into sub-menu; Press ▲ ▼ key to select key then press key.
- When the icon displayed on the LCD screen, press the PAIR button on the back of camera.
- Once paired, Successful pairing icon shows on the LCD screen.
- If fails, repeat the above steps.

8.1.2 DELETE CAMERA

- Use the MENU key and the menu will pop up.
- Press the ◀ ▶ / ▲ ▼ key until the camera icon is selected.
- Press OK key to enter into sub-menu, then press ▲ ▼ key to select the camera you want to delete.
- Press key enter into sub-menu; Press ▲ ▼ key to select key then press key.
- Press key to select icon to delete the camera.
- Press OK key to confirm the option.

8.2 TEMPERATURE UNIT SETTING

- Press the MENU key then the menu will pop up.
- Press the ◀ ▶ / ▲ ▼ key until the temperature icon is selected.
- Press the key enter into sub-menu.
- Press the ◀ ▶ key to select the °F or °C for setting temperature unit.
- Press key to confirm.

Note: The detected temperature range is 0°-50°C.

8.2.1 TEMPERATURE ALARM SETTING

- Press the ◀ ▶ / ▲ ▼ key to select for turning on alarm function; Press key to confirm.
- Press the ◀ ▶ / ▲ ▼ key to select for turning off alarm function; Press key to confirm.

8.2.2 SET TEMPERATURE HI/LO ALERT LIMITS

- Press ◀ ▶ to select or for Hi/Lo limits settings.
 - Press ▲ ▼ keys to adjust the Hi limit when (red) is selected.
 - Press ▲ ▼ keys to adjust the Lo limit when (green) is selected.
- Note:** The high temperature alarm default setting is 36 °C, and the low temperature alarm default setting is 8 °C. When the temperature goes above or below the settings, the temperature icon will display on the screen. It will alert user by beeps. Press any key on the parent unit to stop beeping and flashing.

8.3 LULLABY SETTING

You can soothe the baby to sleep by playing a gentle lullaby from the Camera unit.

- Press the MENU key and the menu will pop up.
- Press the ◀ ▶ / ▲ ▼ key until the lullaby icon is selected.
- Press the key enter into sub-menu.
- Press the ◀ ▶ / ▲ ▼ key to select one of the 8 available lullabies, and you can pick single playback, loop (all 8 lullabies) playback or stop.
- Press key to confirm.

Note: The lullaby default setting is OFF.

8.4 ALARM SETTING

- Press the MENU key and the menu will pop up.
- Press the ◀ ▶ / ▲ ▼ key until the alarm icon is selected.
- Press the key enter into sub-menu, Press the ◀ ▶ / ▲ ▼ key to selected the alarm time you need.
- Press key to confirm.

Note 1: The minimum unit is 0.5 hour. The maximum setting is 5 hours (7 levels).

Note 2: Once the alarm is turned on, alarm icon will display on the screen.

Note 3: The alarm default setting is OFF.

Note 4: When the alarm is ringing, press any key on the parent unit to turn the alarm off.

Note 5: If you don't turn off the alarm, the alarm will ring for 1 minute. After three minutes the alarm will ring again for 1 minute. The alarm will ring for three times in total, after this the alarm goes off.

8.5 ENERGY SAVING

This mode allows you to control the sound activation of your baby unit. If there is no sound around the baby unit within 30 seconds, it will stop audio transmission and turn off the screen of the parent unit. When the baby unit detects any sounds louder than the sensitivity level, it will start transmitting the signal to the parent unit again and turn on the screen of the parent unit. To change the ECO level, please follow the below instructions.

- Press the MENU key and the menu will pop up.
 - Press the ◀ ▶ / ▲ ▼ key until the ECO icon is selected.
 - Press key enter into sub-menu, then press ▲ ▼ key to select desired level.
 - Press key to confirm.
 - Press key to exit.
- Note:** is Low sensitivity level, the baby have to make a lot of sound before the ECO

function is activated.

Note: is Middle sensitivity level.

Note: is High sensitivity level, the baby don't have to make a lot of sound before the ECO function is activated.

8.6 LANGUAGE SETTING

- Language Settings are categorized by country. The country to be queried are searched by the abbreviation of the English name of the country.
- Press the MENU key and the menu will pop up.
 - Press the ◀ ▶ / ▲ ▼ keys until the language icon is selected.
 - Press key to enter into sub-menu, then press ◀ ▶ / ▲ ▼ key to select the language you need.
 - Press key to confirm.
 - Press key to exit.

9. TECHNICAL DATA

Frequency	2412MHz-2469MHz
Power Adapter	Parent Unit: Input: 100-240VAC 50/60Hz Output: 5V DC 1A Camera Unit: Input: 100-240VAC 50/60Hz Output: 5V DC 1A
Operating Range	Up to 1000ft (300m) outdoor (line of sight) Up to 165ft (50m) indoor
Display	6.0" IPS TFT LCD
Battery (Parent Unit)	Li-ion 3.7V 4000mAh (14.8Wh)
Battery Life	Up to 16 hours
Maximum Power	<19dBm
Operation Environment	Operation Temperature: +32F~+104F (0°C-40°C) Battery Charging Temperature: +50F~+104F (10°C-40°C) Relative Humidity: 15%-85%

10. MAINTENANCE

- Clean your baby monitor with a slightly damp or anti-static cloth.
- Never use cleaning agents or solvents.

11. DISPOSAL GUIDE FOR BATTERY AND PRODUCT

- Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit.
- Remember to dispose of the product in an environmentally responsible way.
- For proper collection and processing of these products, take them to the collection points designated by local authorities. You can also contact the store where you purchased the product.

Improper or incorrect use of batteries may cause corrosion or battery leakage, which could cause personal injury or damage to property. Use only the types of the batteries which are indicated in this manual.

CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above 45 degree C or Incinerate. Follow Manufacturer's Instructions.

- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
- The battery shall not be exposed to excessive heat such as sunshine, fire or the like.

Q: No Reception on the Monitor

- The power adapters may not be properly connected.
- The camera and monitor may be OFF.
- Camera may be far away from the monitor.
- Camera and monitor may not be paired, please follow the PAIRING instructions:
- Repower the baby unit (plug into the adapter, then plug it into the stock again)
- Press the RESET key at the back of parent unit, then enter to the MENU and select Add Camera.
- Press the PAIR key at the back of baby unit, waiting for pairing successfully.

Q: Interference or Poor Reception

- The monitor may be too far away from the camera.
- The camera or monitor may be too close to many metal objects.
- Other electronic devices may be interfering with the signal.
- The battery power may be too low.

Q: Audio Feedback(High Pitched Noise)

- The camera and monitor may be placed too close.
- The volume on the monitor may be set too high.
- Check the volume of the lullabies and the two-way calls, contact: service@hellobaby.net.cn if there is no sound.

Q: Frozen Picture on Screen

- Repower the baby unit (plug into the adapter, then plug it into the stock again)
- Press the RESET key at the back of parent unit, then turn it on again.

Q: No LED Light on Baby Unit

Please check whether the two units have been paired, successful pairing means that the baby unit is working properly (in order not to disturb the baby's rest and play, the baby unit of HelloBaby baby monitor does not have obvious LED lights, the lights can only be seen in a dark environment).

Q: Parent Unit often Goes Black

- Check if there is a ECO logo on the top of the screen. In this mode, parent unit will go black every 30 seconds, which saves a lot of power. To keep the screen on all the time, go to the menu and choose to turn off the "ECO" function.
- Check that the parent unit switches to night vision mode.

FCC & ISDE Compliance

This device complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Cet appareil est conforme à la partie 15 des règles de la FCC et aux normes RSS exemptées de licence d'Industrie Canada. Le fonctionnement est soumis aux deux conditions suivantes: (1) cet appareil ne doit pas causer d'interférences nuisibles, et (2) cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indésirable.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cr- 102 et conformité avec rrs 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

Radiation Exposure Statement for camera
This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

SAR Statement for Monitor
Specific Absorption Rate (SAR) information:
This Monitor meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. ISDE & FCC RF Exposure Information and Statement the SAR limit of

Canada (ISED & FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISDE RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISDE RF exposure requirements, and should be avoided.

Informations sur le débit d'absorption spécifique (DAS):
Cet appareil est conforme à la limite de DAS de 1.6 W/kg en moyenne sur un gramme de tissu. Types d'appareils: le Moniteur a également été testé par rapport à cette limite SAR. Cet appareil a été testé pour des opérations typiques portées sur le corps avec le dos de la Moniteur gardé à 0 mm du corps.

Pour maintenir la conformité avec les exigences d'exposition RF d'ISDE, utilisez des accessoires qui maintiennent une distance de séparation de 0 mm entre le corps de l'utilisateur et l'arrière de la Moniteur. L'utilisation de clips de ceinture, d'étuis et d'accessoires similaires ne doit pas contenir de composants métalliques dans son assemblage. L'utilisation d'accessoires qui ne satisfont pas à ces exigences peut ne pas être conforme aux exigences d'exposition aux RF d'ISDE et doit être évitée.

Information et déclaration d'ISDE sur l'exposition aux RF la limite DAS du Canada (ISDE) est de 1,6 W/kg en moyenne sur un gramme de tissu. Types d'appareils: la Moniteur a également été testée par rapport à cette limite SAR. Cet appareil a été testé pour des opérations typiques portées sur le corps avec le dos de la Moniteur gardé à 0 mm du corps.

Pour maintenir la conformité avec les exigences d'exposition RF d'ISDE, utilisez des accessoires qui maintiennent une distance de séparation de 0 mm entre le corps de l'utilisateur et l'arrière de la Moniteur. L'utilisation de clips de ceinture, d'étuis et d'accessoires similaires ne doit pas contenir de composants métalliques dans son assemblage. L'utilisation d'accessoires qui ne satisfont pas à ces exigences peut ne pas être conforme aux exigences d'exposition aux RF d'ISDE et doit être évitée.

Information and declaration of ISDE on the exposure to radio waves the SAR limit of Canada (ISDE) is 1.6 W/kg in average over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISDE RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISDE RF exposure requirements, and should be avoided.

Informations sur le débit d'absorption spécifique (DAS):
Cet appareil est conforme à la limite de DAS de 1.6 W/kg en moyenne sur un gramme de tissu. Types d'appareils: le Moniteur a également été testé par rapport à cette limite SAR. Cet appareil a été testé pour des opérations typiques portées sur le corps avec le dos de la Moniteur gardé à 0 mm du corps.

Pour maintenir la conformité avec les exigences d'exposition RF d'ISDE, utilisez des accessoires qui maintiennent une distance de séparation de 0 mm entre le corps de l'utilisateur et l'arrière de la Moniteur. L'utilisation de clips de ceinture, d'étuis et d'accessoires similaires ne doit pas contenir de composants métalliques dans son assemblage. L'utilisation d'accessoires qui ne satisfont pas à ces exigences peut ne pas être conforme aux exigences d'exposition aux RF d'ISDE et doit être évitée.

Information and declaration of ISDE on the exposure to radio waves the SAR limit of Canada (ISDE) is 1.6 W/kg in average over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISDE RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISDE RF exposure requirements, and should be avoided.

Information and declaration of ISDE on the exposure to radio waves the SAR limit of Canada (ISDE) is 1.6 W/kg in average over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISDE RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISDE RF exposure requirements, and should be avoided.

Information and declaration of ISDE on the exposure to radio waves the SAR limit of Canada (ISDE) is 1.6 W/kg in average over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISDE RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISDE RF exposure requirements, and should be avoided.

Information and declaration of ISDE on the exposure to radio waves the SAR limit of Canada (ISDE) is 1.6 W/kg in average over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISDE RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISDE RF exposure requirements, and should be avoided.

Information and declaration of ISDE on the exposure to radio waves the SAR limit of Canada (ISDE) is 1.6 W/kg in average over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISDE RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISDE RF exposure requirements, and should be avoided.