




Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

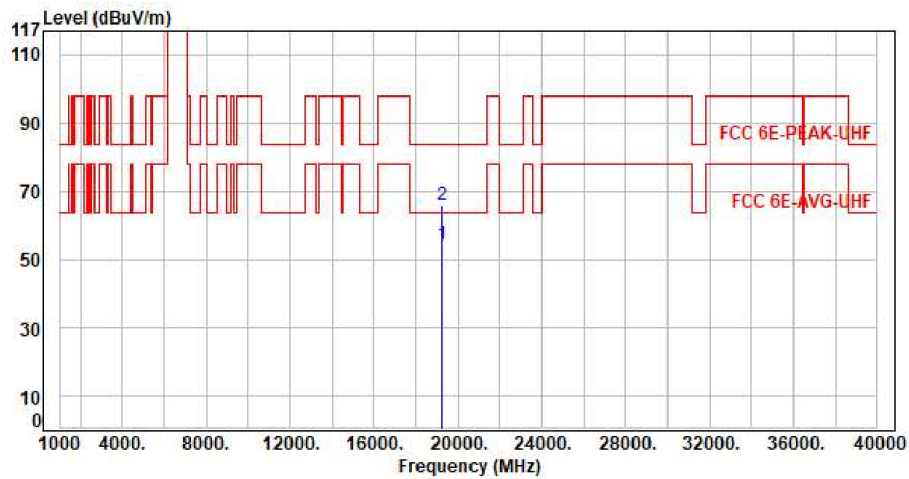


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	10.81	43.59	54.40	63.54	-9.14	Average	150	360	P
2	19245.00	10.81	55.10	65.91	83.54	-17.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

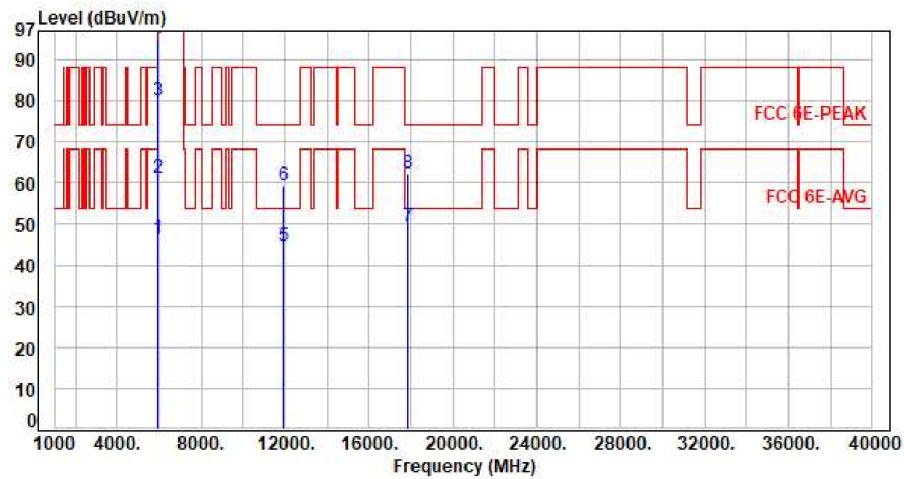


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.50	46.35	68.20	-21.85	Average	200	62	P
2	5925.00	0.85	60.44	61.29	88.20	-26.91	Peak	200	62	P
3	5965.00	0.86	79.27	80.13	200.00	-119.87	Average	200	62	P
4	5965.00	0.86	94.15	95.01	200.00	-104.99	Peak	200	62	P
5	11930.00	3.86	40.72	44.58	54.00	-9.42	Average	100	158	P
6	11930.00	3.86	55.43	59.29	74.00	-14.71	Peak	100	158	P
7	17895.00	4.99	44.35	49.34	54.00	-4.66	Average	100	21	P
8	17895.00	4.99	57.39	62.38	74.00	-11.62	Peak	100	21	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

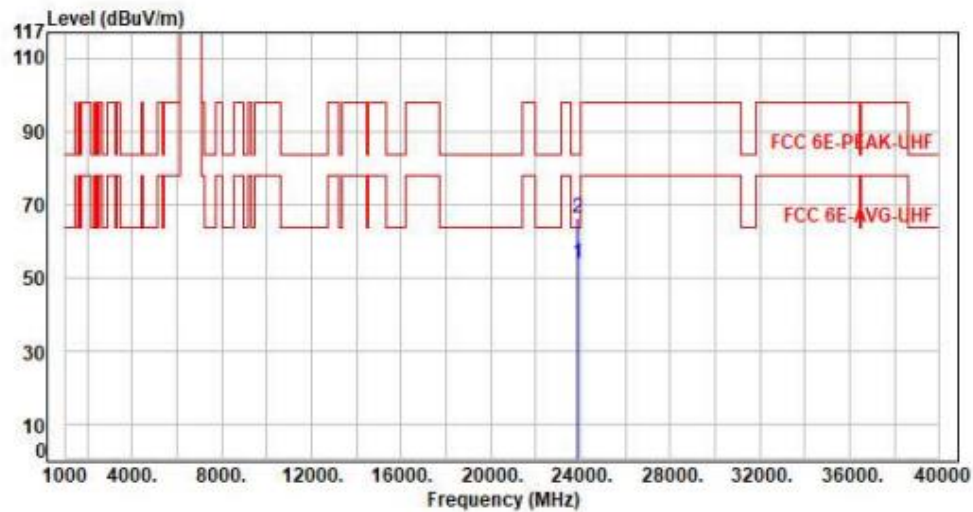

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.25	42.57	53.82	63.54	-9.72	Average	150	360	P
2	23860.00	11.25	54.88	66.13	83.54	-17.41	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

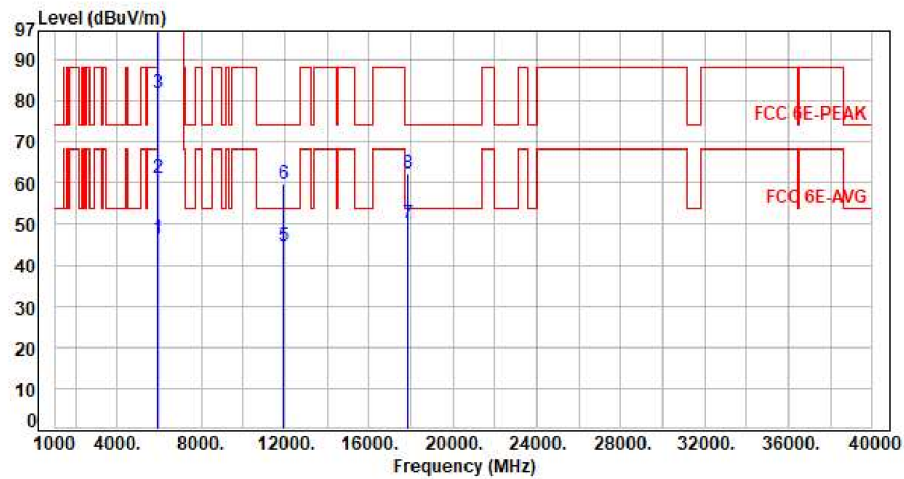


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.72	46.57	68.20	-21.63	Average	100	184	P
2	5925.00	0.85	60.33	61.18	88.20	-27.02	Peak	100	184	P
3	5965.00	0.86	80.88	81.74	200.00	-118.26	Average	100	184	P
4	5965.00	0.86	95.94	96.80	200.00	-103.20	Peak	100	184	P
5	11930.00	3.86	40.62	44.48	54.00	-9.52	Average	100	235	P
6	11930.00	3.86	55.90	59.76	74.00	-14.24	Peak	100	235	P
7	17895.00	4.99	45.20	50.19	54.00	-3.81	Average	100	271	P
8	17895.00	4.99	57.38	62.37	74.00	-11.63	Peak	100	271	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

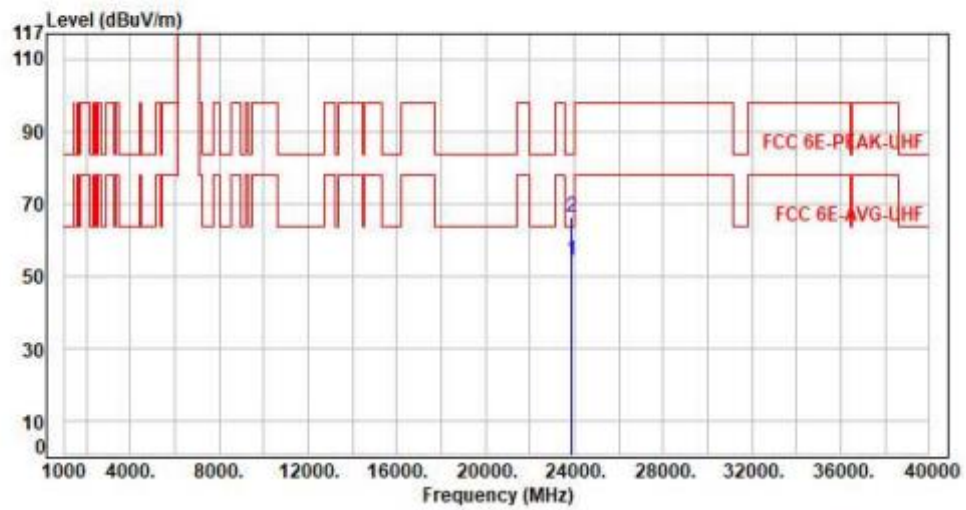

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.25	42.93	54.18	63.54	-9.36	Average	150	360	P
2	23860.00	11.25	55.12	66.37	83.54	-17.17	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

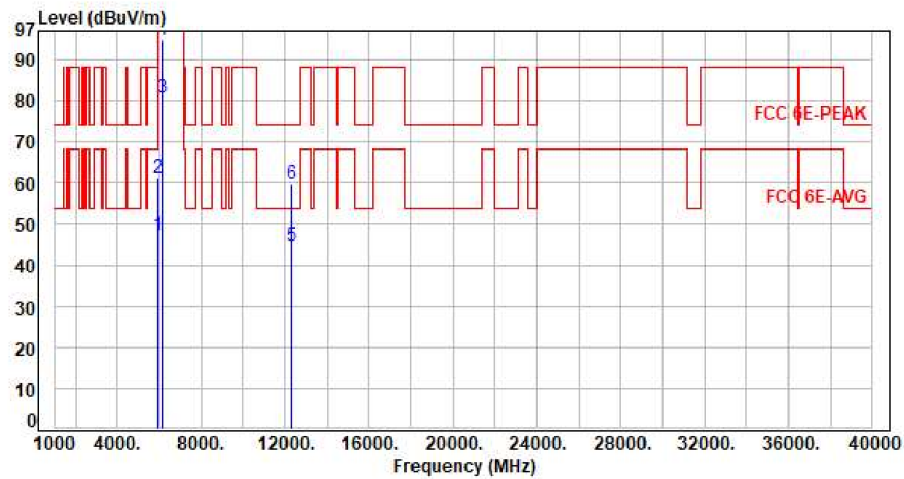


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	46.51	47.36	68.20	-20.84	Average	211	62	P
2	5925.00	0.85	60.36	61.21	88.20	-26.99	Peak	211	62	P
3	6165.00	1.51	79.16	80.67	200.00	-119.33	Average	211	62	P
4	6165.00	1.51	93.33	94.84	200.00	-105.16	Peak	211	62	P
5	12330.00	3.94	40.75	44.69	54.00	-9.31	Average	100	166	P
6	12330.00	3.94	55.94	59.88	74.00	-14.12	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

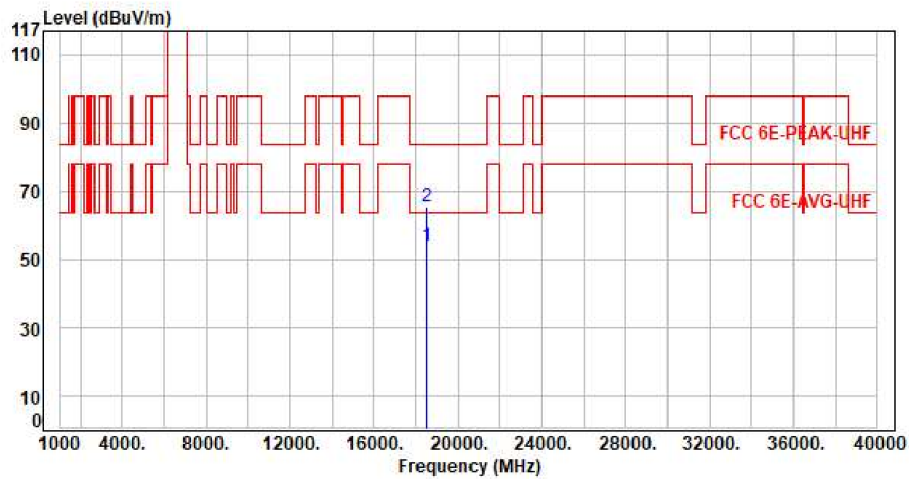


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.33	43.42	53.75	63.54	-9.79	Average	150	360	P
2	18495.00	10.33	54.87	65.20	83.54	-18.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

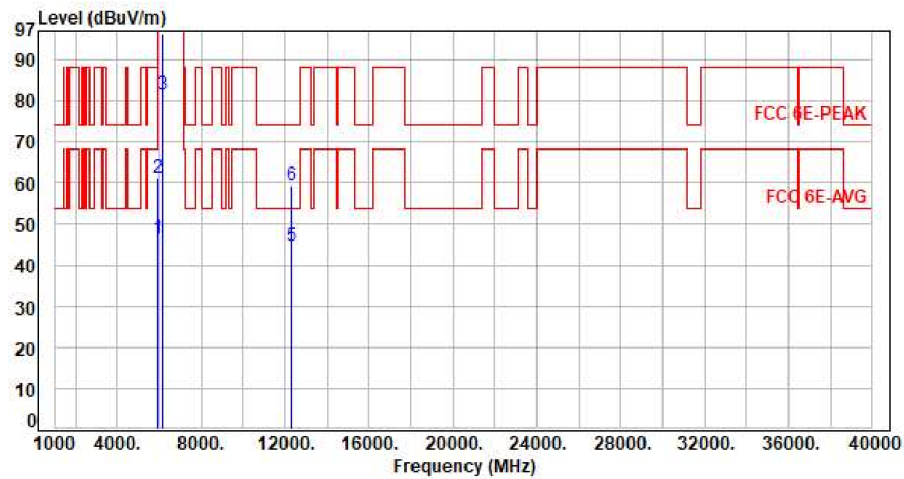


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.71	46.56	68.20	-21.64	Average	100	185	P
2	5925.00	0.85	60.36	61.21	88.20	-26.99	Peak	100	185	P
3	6165.00	1.51	80.02	81.53	200.00	-118.47	Average	100	185	P
4	6165.00	1.51	94.89	96.40	200.00	-103.60	Peak	100	185	P
5	12330.00	3.94	40.82	44.76	54.00	-9.24	Average	100	225	P
6	12330.00	3.94	55.60	59.54	74.00	-14.46	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

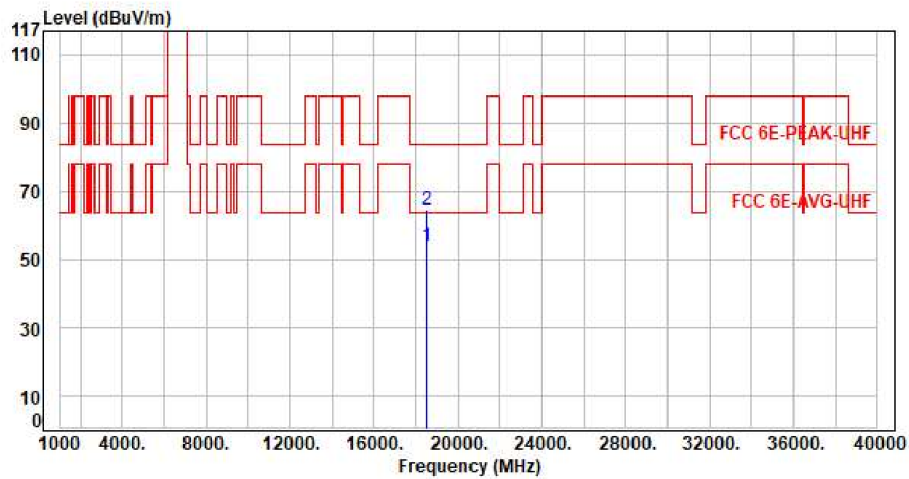


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.33	43.59	53.92	63.54	-9.62	Average	150	360	P
2	18495.00	10.33	54.36	64.69	83.54	-18.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

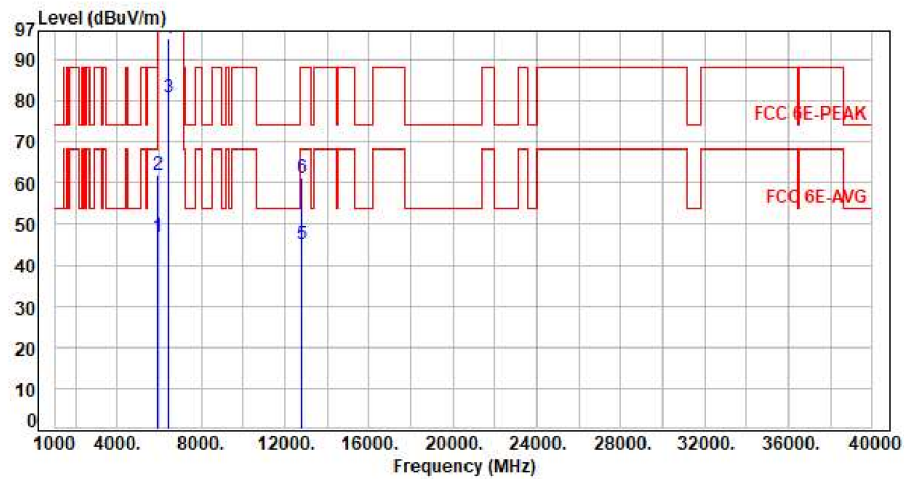


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.92	46.77	68.20	-21.43	Average	225	67	P
2	5925.00	0.85	61.01	61.86	88.20	-26.34	Peak	225	67	P
3	6405.00	2.90	77.83	80.73	200.00	-119.27	Average	225	67	P
4	6405.00	2.90	92.42	95.32	200.00	-104.68	Peak	225	67	P
5	12810.00	4.65	40.28	44.93	68.20	-23.27	Average	100	169	P
6	12810.00	4.65	56.48	61.13	88.20	-27.07	Peak	100	169	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

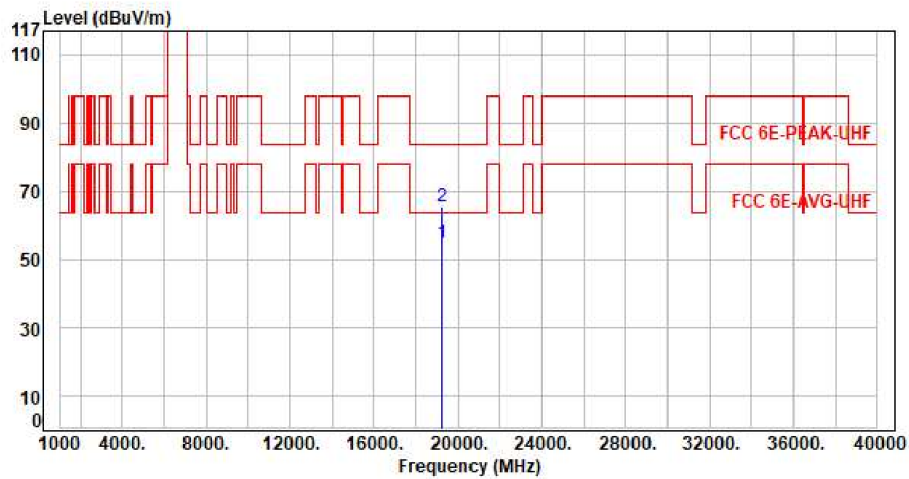


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	10.92	43.58	54.50	63.54	-9.04	Average	150	360	P
2	19215.00	10.92	54.28	65.20	83.54	-18.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

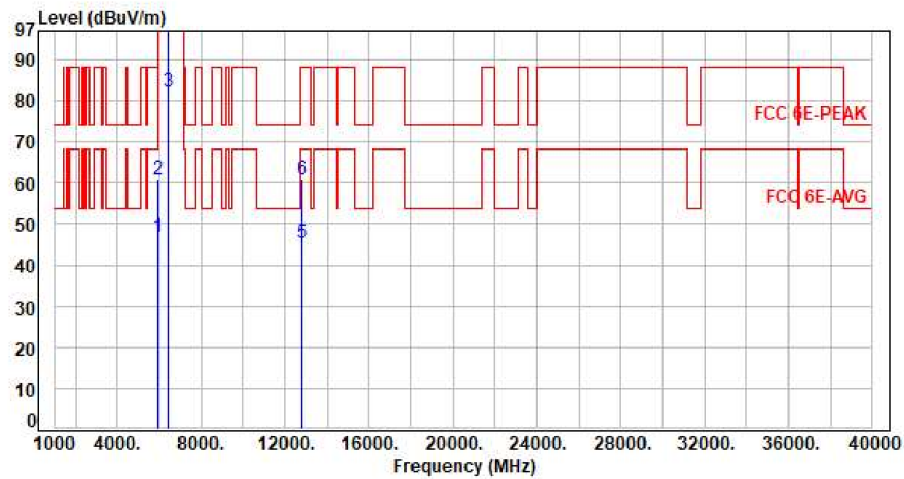


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.91	46.76	68.20	-21.44	Average	109	182	P
2	5925.00	0.85	60.13	60.98	88.20	-27.22	Peak	109	182	P
3	6405.00	2.90	79.35	82.25	200.00	-117.75	Average	109	182	P
4	6405.00	2.90	94.26	97.16	200.00	-102.84	Peak	109	182	P
5	12810.00	4.65	40.65	45.30	68.20	-22.90	Average	100	234	P
6	12810.00	4.65	56.07	60.72	88.20	-27.48	Peak	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

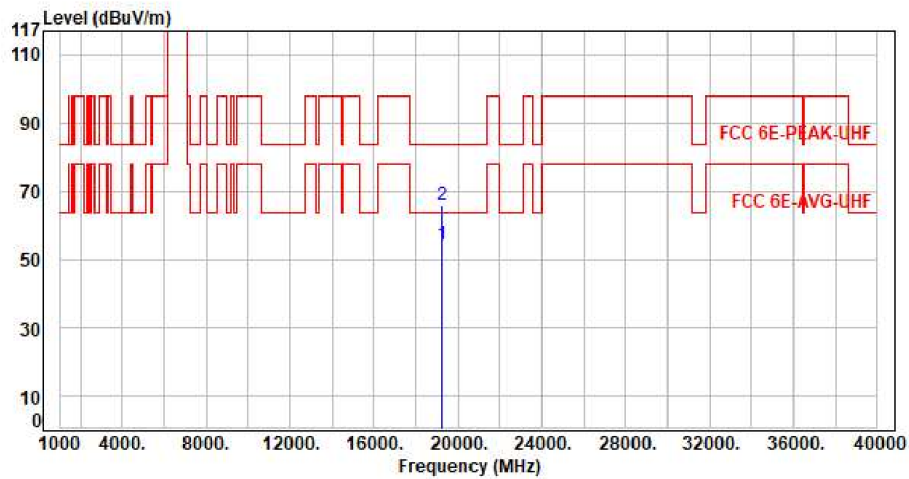


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	10.92	43.22	54.14	63.54	-9.40	Average	150	360	P
2	19215.00	10.92	55.05	65.97	83.54	-17.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

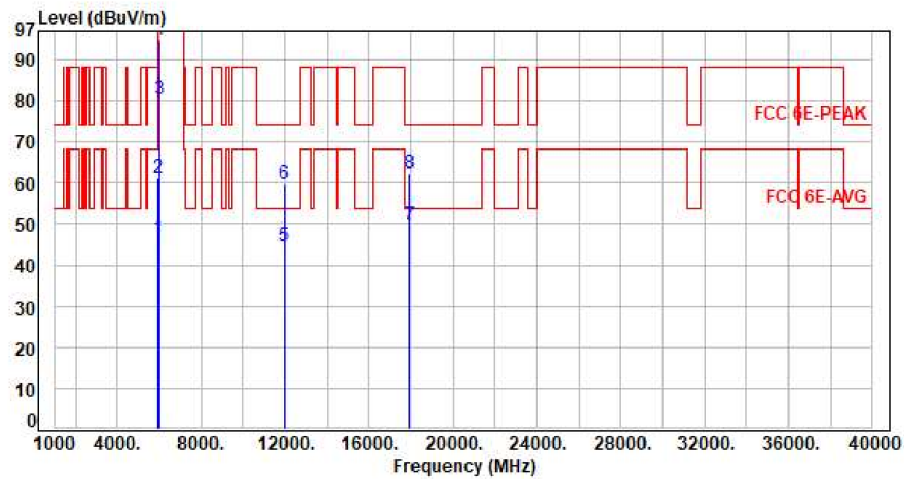


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.76	46.61	68.20	-21.59	Average	203	65	P
2	5925.00	0.85	60.25	61.10	88.20	-27.10	Peak	203	65	P
3	5985.00	0.82	79.53	80.35	200.00	-119.65	Average	203	65	P
4	5985.00	0.82	93.81	94.63	200.00	-105.37	Peak	203	65	P
5	11970.00	3.92	40.69	44.61	54.00	-9.39	Average	100	161	P
6	11970.00	3.92	55.75	59.67	74.00	-14.33	Peak	100	161	P
7	17955.00	5.03	44.58	49.61	54.00	-4.39	Average	100	24	P
8	17955.00	5.03	57.36	62.39	74.00	-11.61	Peak	100	24	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

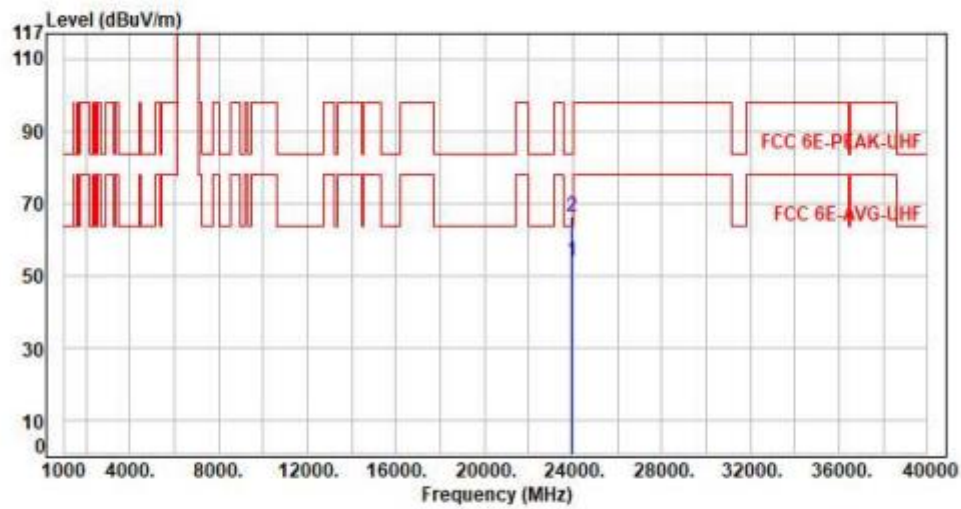


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.24	42.73	53.97	63.54	-9.57	Average	150	360	P
2	23940.00	11.24	54.97	66.21	83.54	-17.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

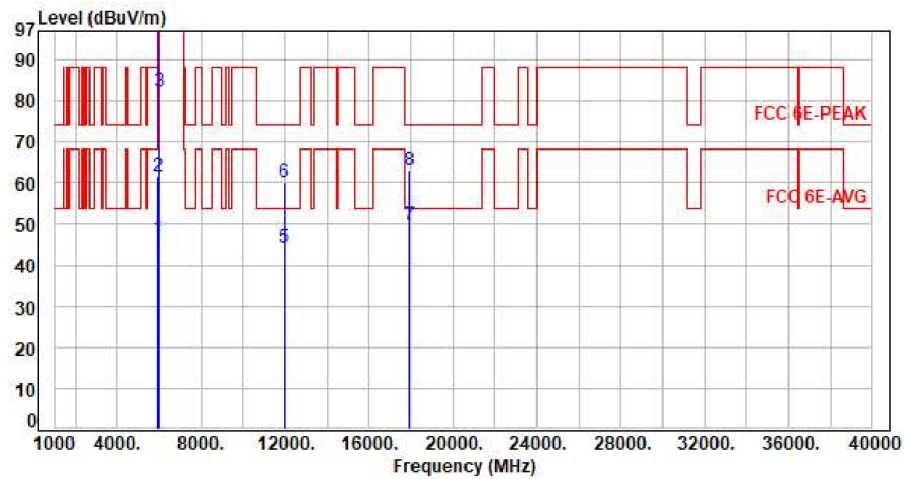

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.49	46.34	68.20	-21.86	Average	100	182	P
2	5925.00	0.85	60.58	61.43	88.20	-26.77	Peak	100	182	P
3	5985.00	0.82	81.58	82.40	200.00	-117.60	Average	100	182	P
4	5985.00	0.82	96.44	97.26	200.00	-102.74	Peak	100	182	P
5	11970.00	3.92	40.52	44.44	54.00	-9.56	Average	100	237	P
6	11970.00	3.92	56.31	60.23	74.00	-13.77	Peak	100	237	P
7	17955.00	5.03	44.87	49.90	54.00	-4.10	Average	100	264	P
8	17955.00	5.03	58.22	63.25	74.00	-10.75	Peak	100	264	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

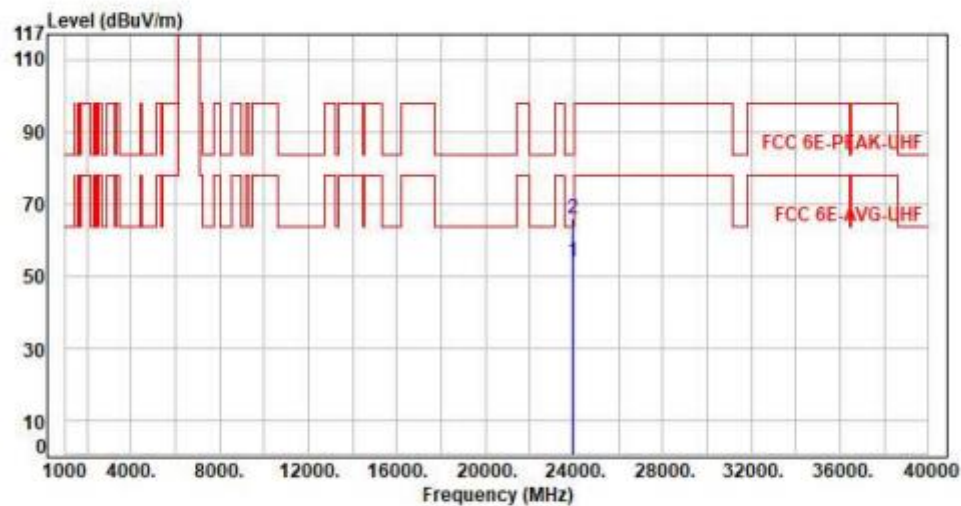

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.24	42.77	54.01	63.54	-9.53	Average	150	360	P
2	23940.00	11.24	54.65	65.89	83.54	-17.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor