




Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

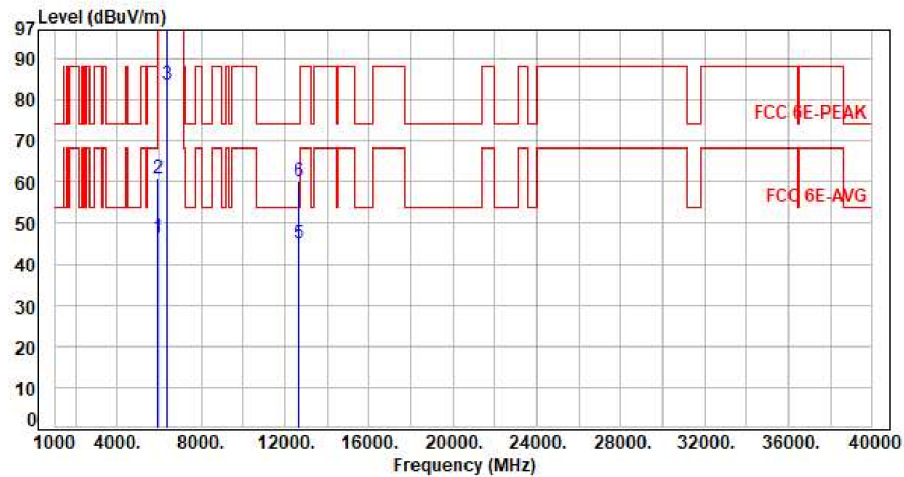


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.61	46.46	68.20	-21.74	Average	100	181	P
2	5925.00	0.85	59.99	60.84	88.20	-27.36	Peak	100	181	P
3	6345.00	2.66	80.96	83.62	200.00	-116.38	Average	100	181	P
4	6345.00	2.66	95.42	98.08	200.00	-101.92	Peak	100	181	P
5	12690.00	4.53	40.57	45.10	54.00	-8.90	Average	100	226	P
6	12690.00	4.53	55.43	59.96	74.00	-14.04	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

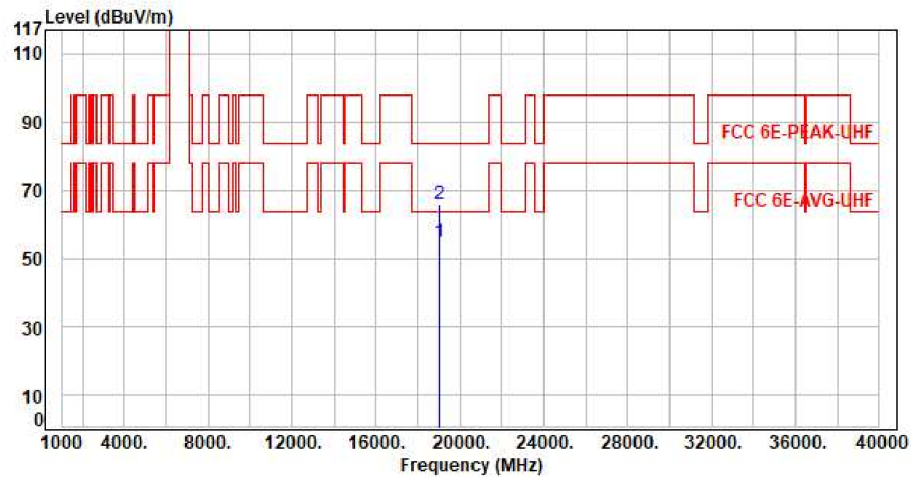


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	10.84	43.87	54.71	63.54	-8.83	Average	150	360	P
2	19035.00	10.84	54.85	65.69	83.54	-17.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

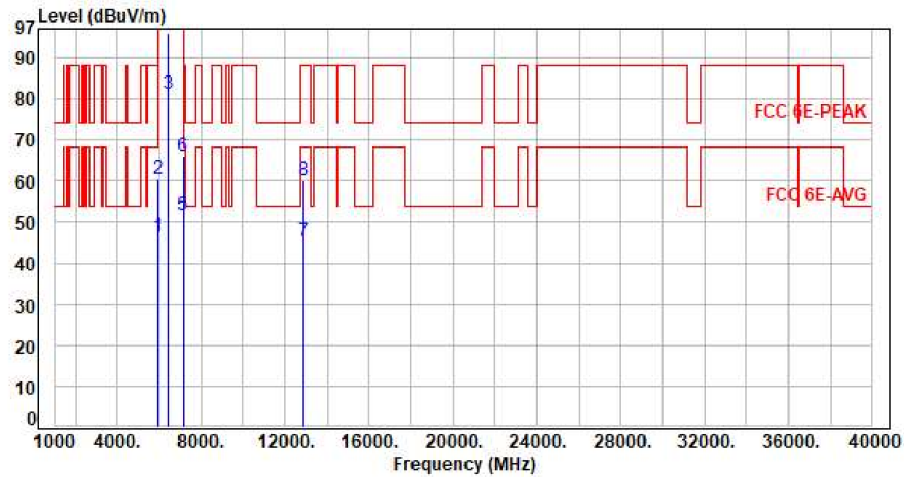


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.44	46.29	68.20	-21.91	Average	224	69	P
2	5925.00	0.85	59.66	60.51	88.20	-27.69	Peak	224	69	P
3	6435.00	2.96	78.01	80.97	200.00	-119.03	Average	224	69	P
4	6435.00	2.96	92.84	95.80	200.00	-104.20	Peak	224	69	P
5	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	224	69	P
6	7125.00	4.64	61.21	65.85	88.20	-22.35	Peak	224	69	P
7	12870.00	4.69	40.66	45.35	68.20	-22.85	Average	100	164	P
8	12870.00	4.69	55.45	60.14	88.20	-28.06	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

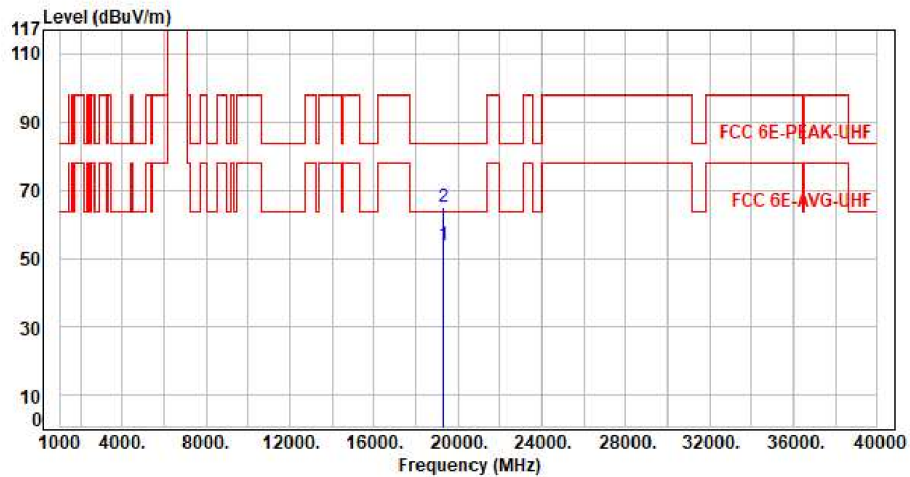


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.02	42.97	53.99	63.54	-9.55	Average	150	360	P
2	19305.00	11.02	53.78	64.80	83.54	-18.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

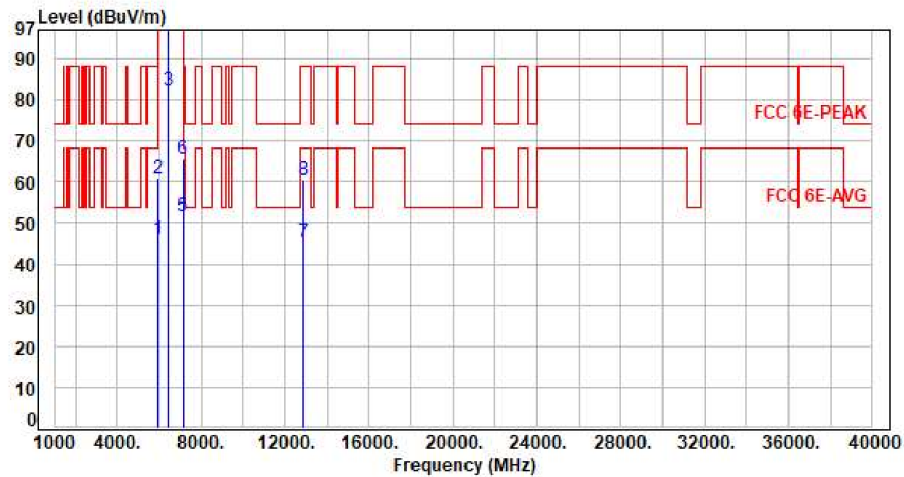


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.43	46.28	68.20	-21.92	Average	100	180	P
2	5925.00	0.85	59.97	60.82	88.20	-27.38	Peak	100	180	P
3	6435.00	2.96	79.37	82.33	200.00	-117.67	Average	100	180	P
4	6435.00	2.96	93.95	96.91	200.00	-103.09	Peak	100	180	P
5	7125.00	4.64	47.01	51.65	68.20	-16.55	Average	100	180	P
6	7125.00	4.64	61.12	65.76	88.20	-22.44	Peak	100	180	P
7	12870.00	4.69	40.75	45.44	68.20	-22.76	Average	100	233	P
8	12870.00	4.69	55.71	60.40	88.20	-27.80	Peak	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

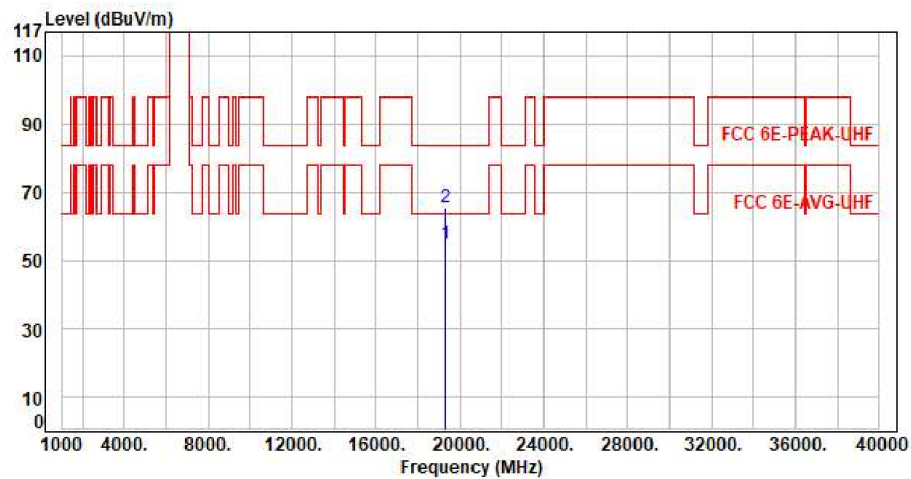


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.02	43.69	54.71	63.54	-8.83	Average	150	360	P
2	19305.00	11.02	54.28	65.30	83.54	-18.24	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

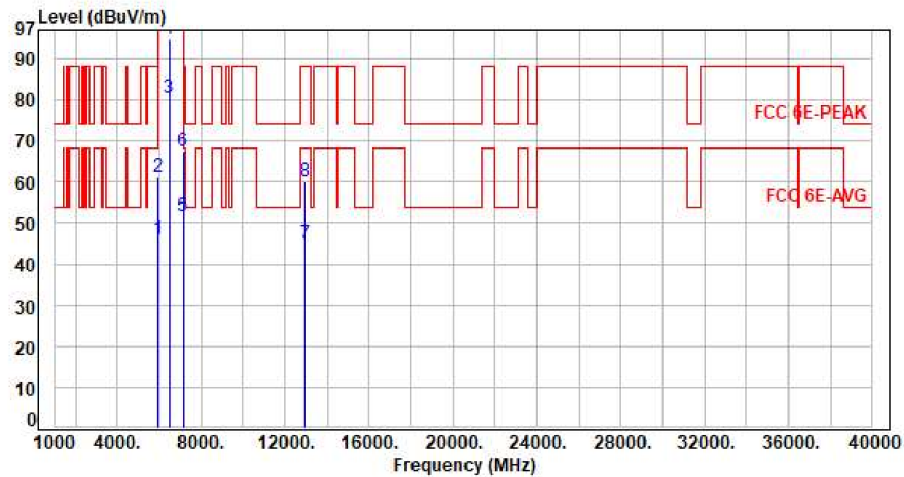


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.41	46.26	68.20	-21.94	Average	223	65	P
2	5925.00	0.85	60.40	61.25	88.20	-26.95	Peak	223	65	P
3	6475.00	3.04	77.42	80.46	200.00	-119.54	Average	223	65	P
4	6475.00	3.04	91.78	94.82	200.00	-105.18	Peak	223	65	P
5	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	223	65	P
6	7125.00	4.64	62.73	67.37	88.20	-20.83	Peak	223	65	P
7	12950.00	4.53	40.48	45.01	68.20	-23.19	Average	100	166	P
8	12950.00	4.53	55.61	60.14	88.20	-28.06	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

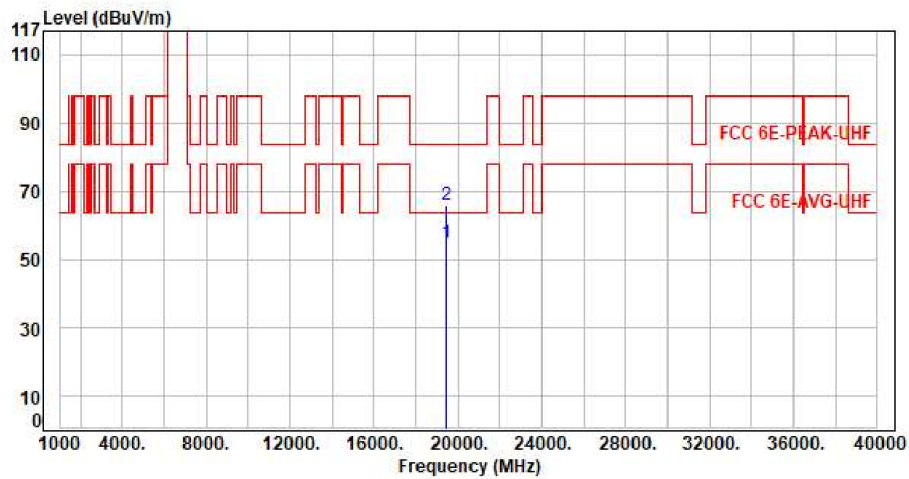


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.45	43.44	54.89	63.54	-8.65	Average	150	360	P
2	19425.00	11.45	54.25	65.70	83.54	-17.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

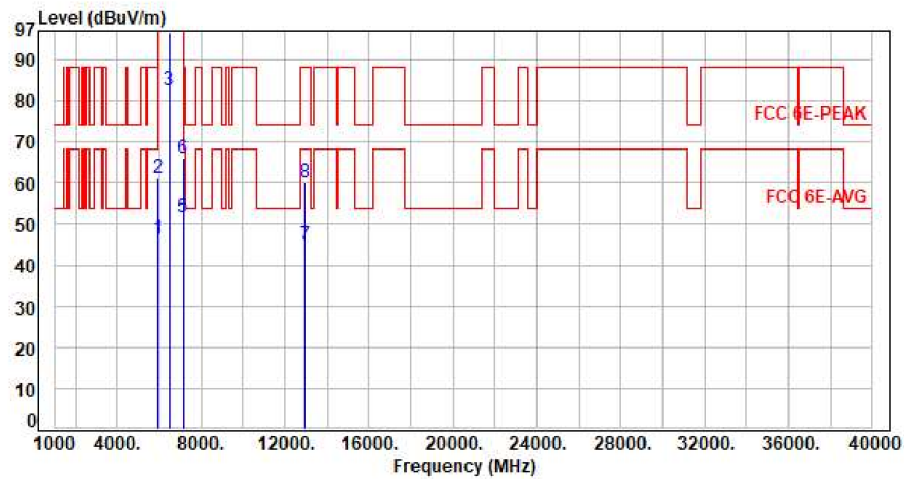

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.46	46.31	68.20	-21.89	Average	100	180	P
2	5925.00	0.85	60.28	61.13	88.20	-27.07	Peak	100	180	P
3	6475.00	3.04	79.55	82.59	200.00	-117.41	Average	100	180	P
4	6475.00	3.04	93.52	96.56	200.00	-103.44	Peak	100	180	P
5	7125.00	4.64	47.04	51.68	68.20	-16.52	Average	100	180	P
6	7125.00	4.64	61.34	65.98	88.20	-22.22	Peak	100	180	P
7	12950.00	4.53	40.45	44.98	68.20	-23.22	Average	100	230	P
8	12950.00	4.53	55.59	60.12	88.20	-28.08	Peak	100	230	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

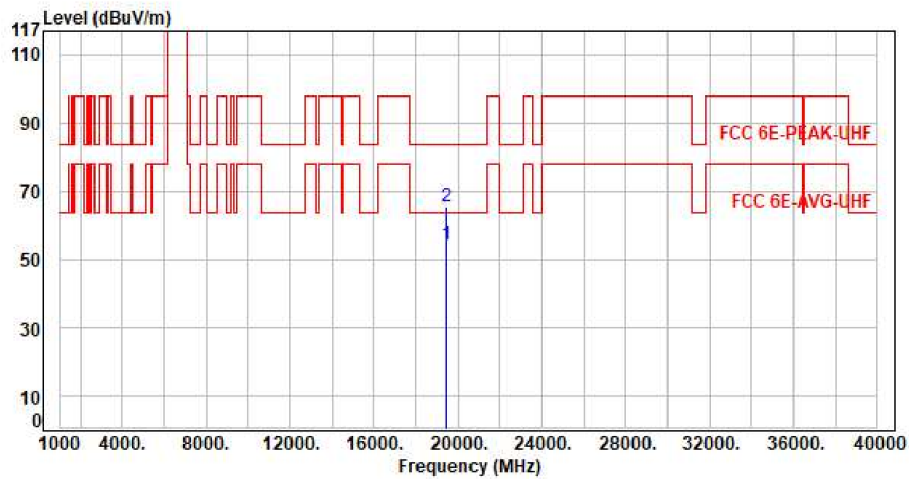


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.45	42.94	54.39	63.54	-9.15	Average	150	360	P
2	19425.00	11.45	54.03	65.48	83.54	-18.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

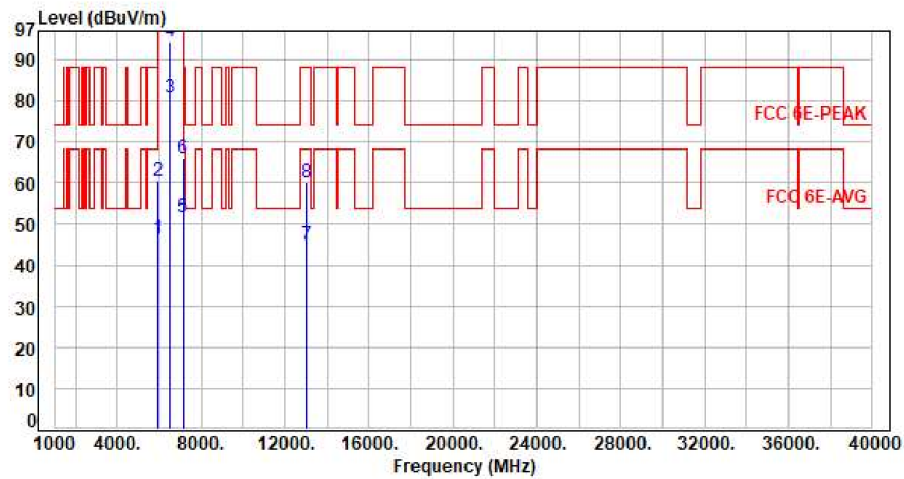


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.44	46.29	68.20	-21.91	Average	230	66	P
2	5925.00	0.85	59.62	60.47	88.20	-27.73	Peak	230	66	P
3	6515.00	3.12	77.49	80.61	200.00	-119.39	Average	230	66	P
4	6515.00	3.12	91.25	94.37	200.00	-105.63	Peak	230	66	P
5	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	230	66	P
6	7125.00	4.64	61.30	65.94	88.20	-22.26	Peak	230	66	P
7	13030.00	4.34	40.62	44.96	68.20	-23.24	Average	100	162	P
8	13030.00	4.34	55.73	60.07	88.20	-28.13	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

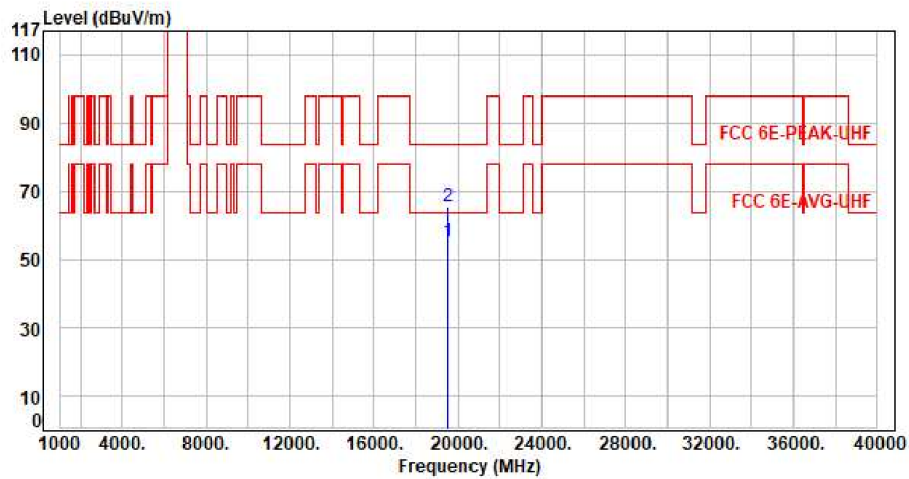


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	11.63	43.41	55.04	63.54	-8.50	Average	150	360	P
2	19545.00	11.63	53.67	65.30	83.54	-18.24	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

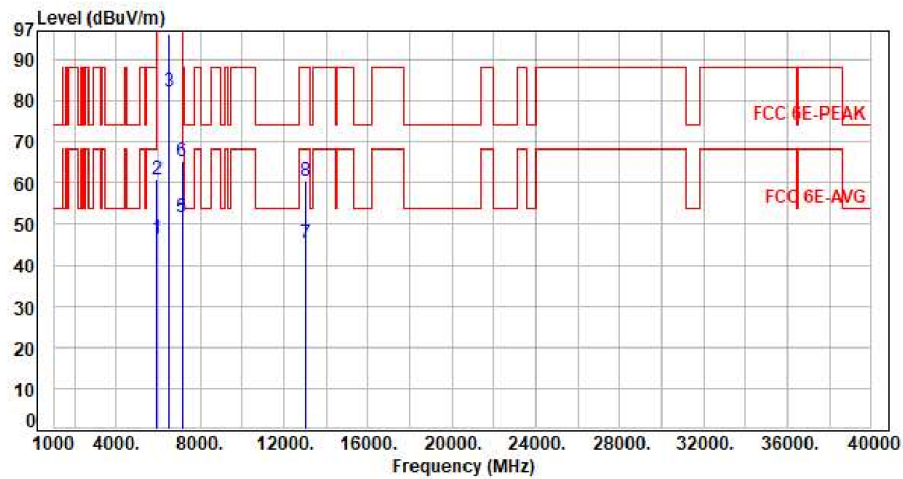


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.46	46.31	68.20	-21.89	Average	107	182	P
2	5925.00	0.85	60.00	60.85	88.20	-27.35	Peak	107	182	P
3	6515.00	3.12	78.98	82.10	200.00	-117.90	Average	107	182	P
4	6515.00	3.12	93.23	96.35	200.00	-103.65	Peak	107	182	P
5	7125.00	4.64	47.02	51.66	68.20	-16.54	Average	107	182	P
6	7125.00	4.64	60.63	65.27	88.20	-22.93	Peak	107	182	P
7	13030.00	4.34	40.88	45.22	68.20	-22.98	Average	100	236	P
8	13030.00	4.34	56.28	60.62	88.20	-27.58	Peak	100	236	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

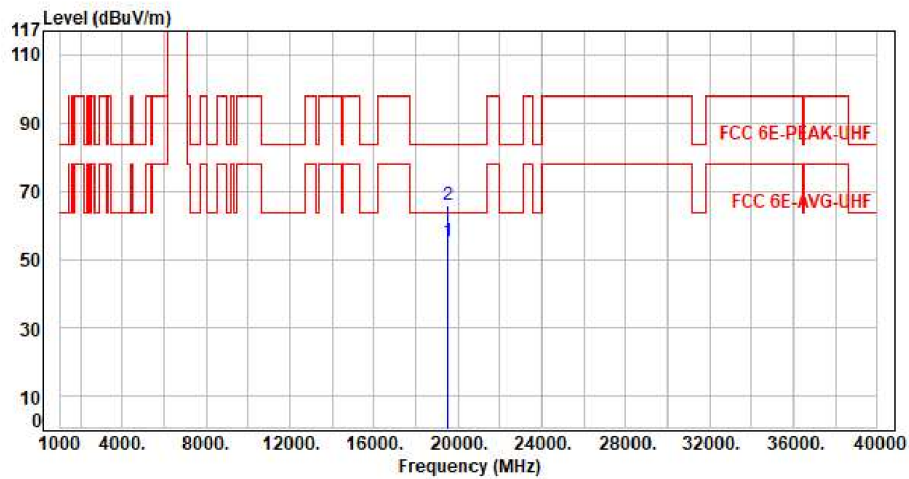


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	11.63	43.54	55.17	63.54	-8.37	Average	150	360	P
2	19545.00	11.63	54.43	66.06	83.54	-17.48	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

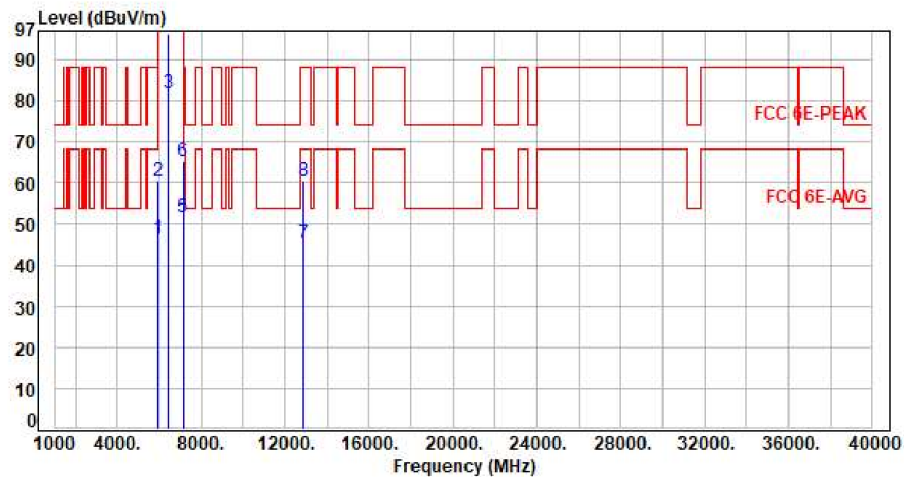

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.44	46.29	68.20	-21.91	Average	225	66	P
2	5925.00	0.85	59.58	60.43	88.20	-27.77	Peak	225	66	P
3	6445.00	2.98	78.84	81.82	200.00	-118.18	Average	225	66	P
4	6445.00	2.98	93.38	96.36	200.00	-103.64	Peak	225	66	P
5	7125.00	4.64	46.96	51.60	68.20	-16.60	Average	225	66	P
6	7125.00	4.64	60.82	65.46	88.20	-22.74	Peak	225	66	P
7	12890.00	4.68	40.72	45.40	68.20	-22.80	Average	100	168	P
8	12890.00	4.68	55.84	60.52	88.20	-27.68	Peak	100	168	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

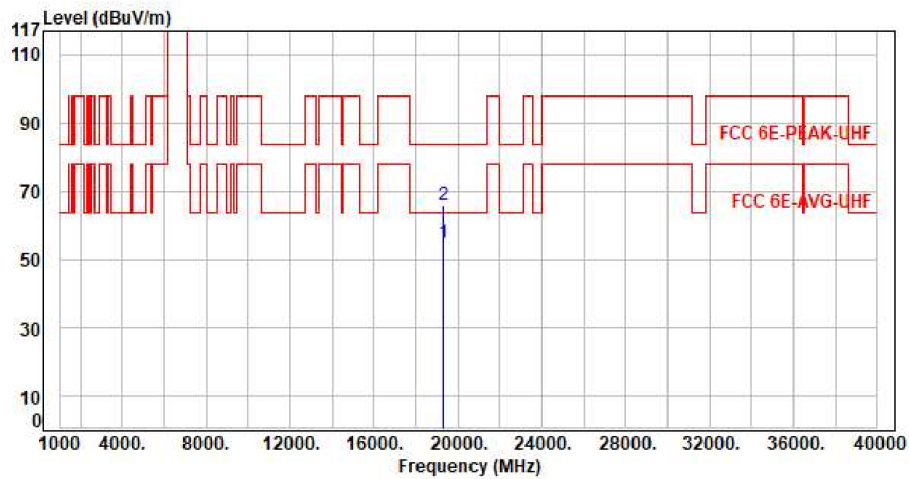


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.09	43.67	54.76	63.54	-8.78	Average	150	360	P
2	19335.00	11.09	54.56	65.65	83.54	-17.89	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

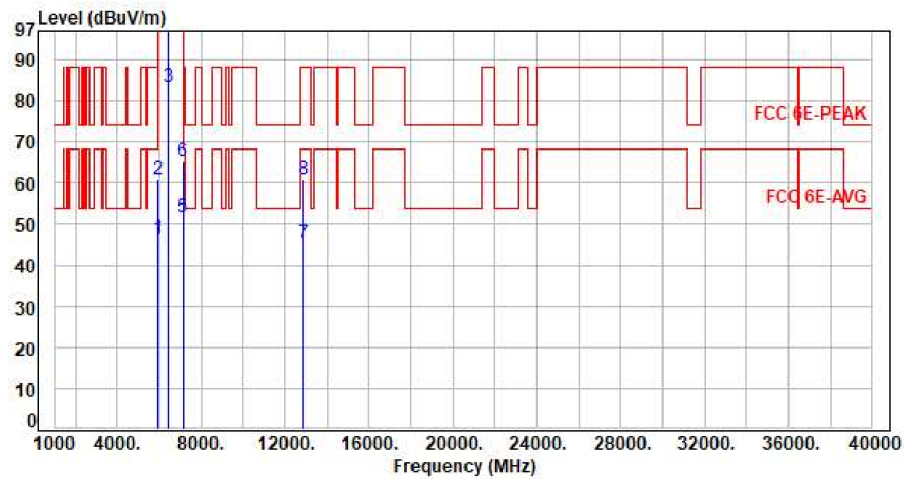

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.47	46.32	68.20	-21.88	Average	109	181	P
2	5925.00	0.85	60.13	60.98	88.20	-27.22	Peak	109	181	P
3	6445.00	2.98	80.44	83.42	200.00	-116.58	Average	109	181	P
4	6445.00	2.98	94.35	97.33	200.00	-102.67	Peak	109	181	P
5	7125.00	4.64	46.97	51.61	68.20	-16.59	Average	109	181	P
6	7125.00	4.64	60.67	65.31	88.20	-22.89	Peak	109	181	P
7	12890.00	4.68	40.63	45.31	68.20	-22.89	Average	100	230	P
8	12890.00	4.68	56.22	60.90	88.20	-27.30	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor