




Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

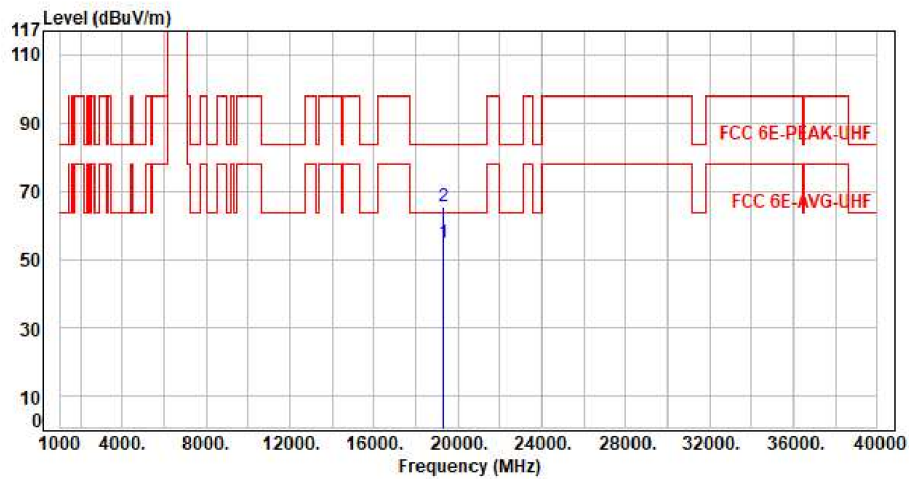


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.09	43.49	54.58	63.54	-8.96	Average	150	360	P
2	19335.00	11.09	54.35	65.44	83.54	-18.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

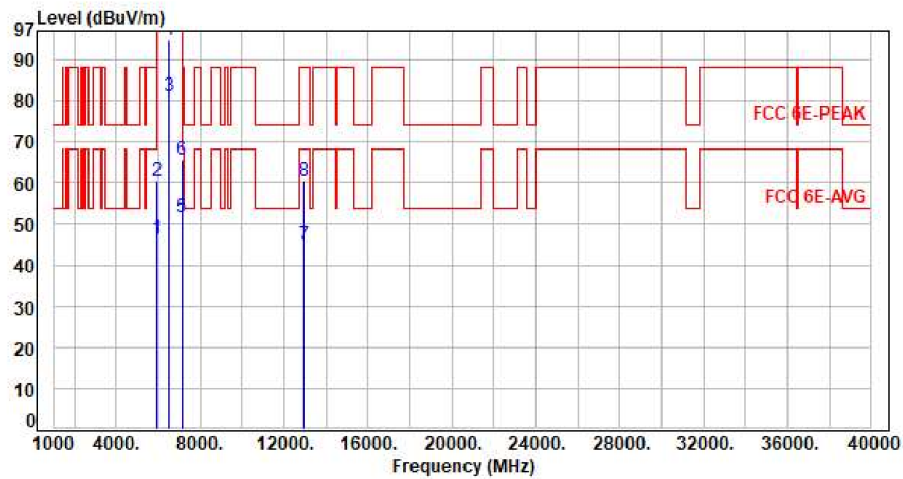

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.51	46.36	68.20	-21.84	Average	233	62	P
2	5925.00	0.85	59.48	60.33	88.20	-27.87	Peak	233	62	P
3	6485.00	3.06	78.13	81.19	200.00	-118.81	Average	233	62	P
4	6485.00	3.06	91.90	94.96	200.00	-105.04	Peak	233	62	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	233	62	P
6	7125.00	4.64	61.18	65.82	88.20	-22.38	Peak	233	62	P
7	12970.00	4.47	40.58	45.05	68.20	-23.15	Average	100	165	P
8	12970.00	4.47	56.04	60.51	88.20	-27.69	Peak	100	165	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

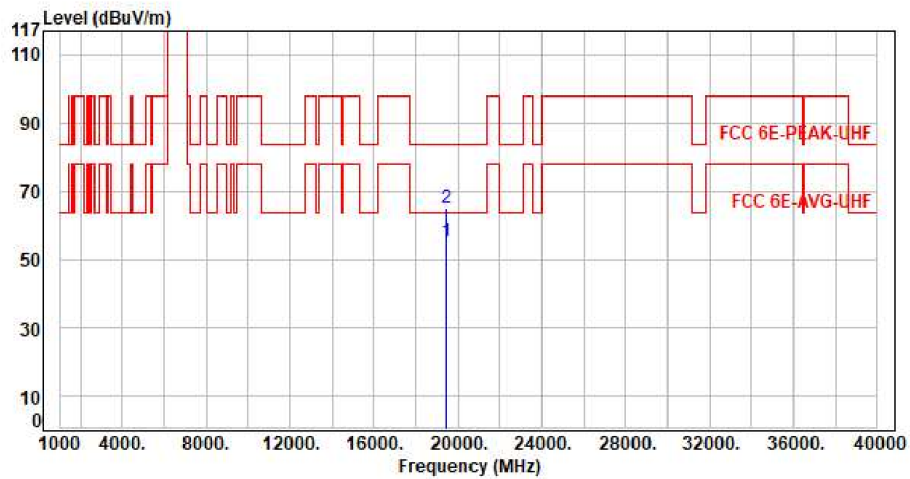

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.46	43.63	55.09	63.54	-8.45	Average	150	360	P
2	19455.00	11.46	53.69	65.15	83.54	-18.39	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

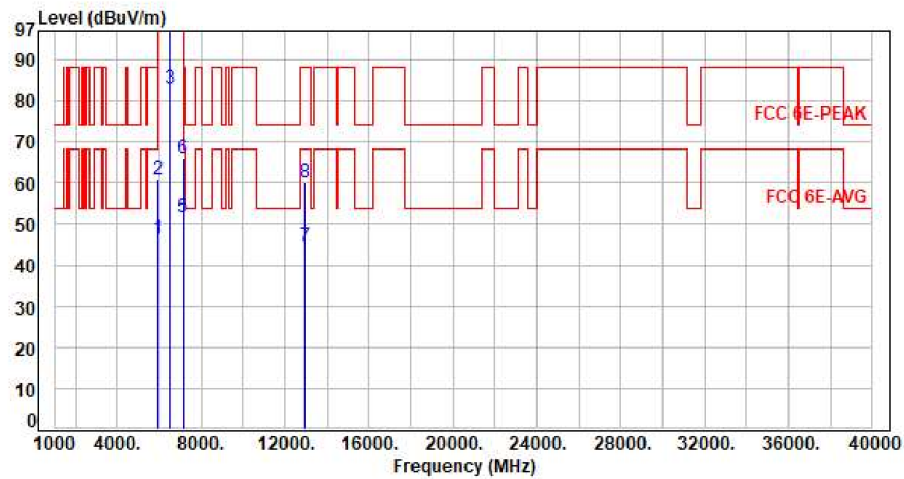


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.48	46.33	68.20	-21.87	Average	100	180	P
2	5925.00	0.85	59.83	60.68	88.20	-27.52	Peak	100	180	P
3	6485.00	3.06	80.10	83.16	200.00	-116.84	Average	100	180	P
4	6485.00	3.06	94.53	97.59	200.00	-102.41	Peak	100	180	P
5	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	100	180	P
6	7125.00	4.64	61.45	66.09	88.20	-22.11	Peak	100	180	P
7	12970.00	4.47	40.28	44.75	68.20	-23.45	Average	100	237	P
8	12970.00	4.47	55.74	60.21	88.20	-27.99	Peak	100	237	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

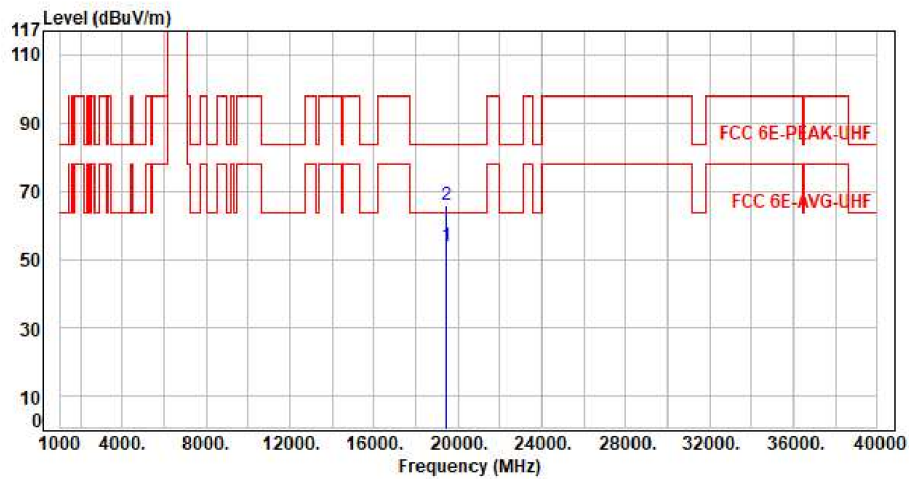

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.46	42.59	54.05	63.54	-9.49	Average	150	360	P
2	19455.00	11.46	54.28	65.74	83.54	-17.80	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

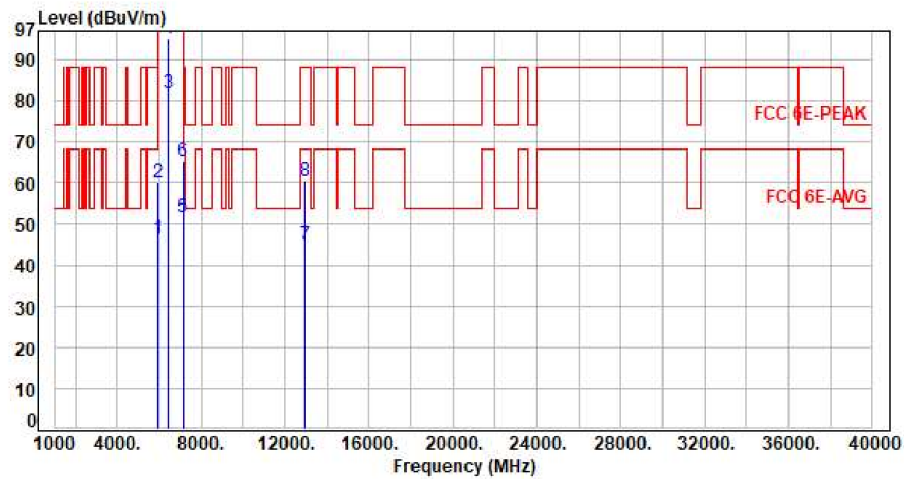


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.47	46.32	68.20	-21.88	Average	212	67	P
2	5925.00	0.85	59.23	60.08	88.20	-28.12	Peak	212	67	P
3	6465.00	3.02	78.72	81.74	200.00	-118.26	Average	212	67	P
4	6465.00	3.02	92.31	95.33	200.00	-104.67	Peak	212	67	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	212	67	P
6	7125.00	4.64	60.82	65.46	88.20	-22.74	Peak	212	67	P
7	12930.00	4.58	40.53	45.11	68.20	-23.09	Average	100	166	P
8	12930.00	4.58	55.74	60.32	88.20	-27.88	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

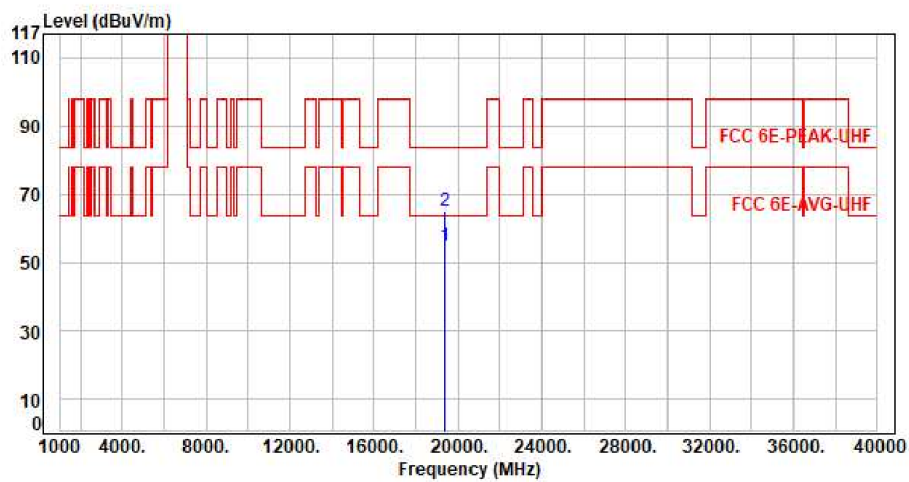


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.41	43.16	54.57	63.54	-8.97	Average	150	360	P
2	19395.00	11.41	53.57	64.98	83.54	-18.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

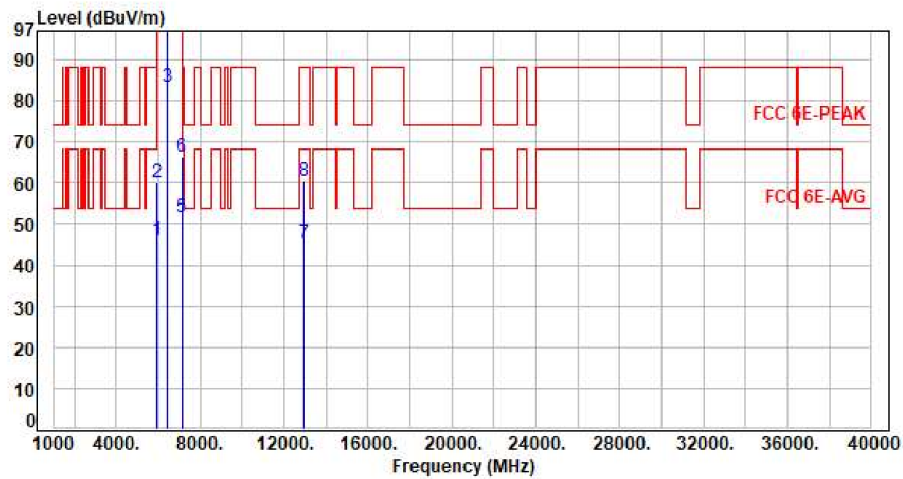


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.41	46.26	68.20	-21.94	Average	100	180	P
2	5925.00	0.85	59.36	60.21	88.20	-27.99	Peak	100	180	P
3	6465.00	3.02	80.47	83.49	200.00	-116.51	Average	100	180	P
4	6465.00	3.02	95.12	98.14	200.00	-101.86	Peak	100	180	P
5	7125.00	4.64	47.00	51.64	68.20	-16.56	Average	100	180	P
6	7125.00	4.64	61.66	66.30	88.20	-21.90	Peak	100	180	P
7	12930.00	4.58	40.69	45.27	68.20	-22.93	Average	100	232	P
8	12930.00	4.58	56.01	60.59	88.20	-27.61	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

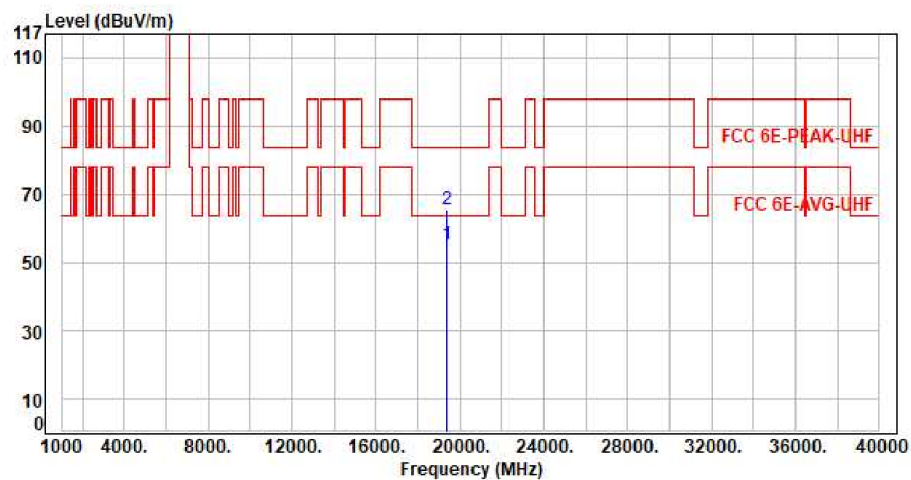


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.41	43.56	54.97	63.54	-8.57	Average	150	360	P
2	19395.00	11.41	54.19	65.60	83.54	-17.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

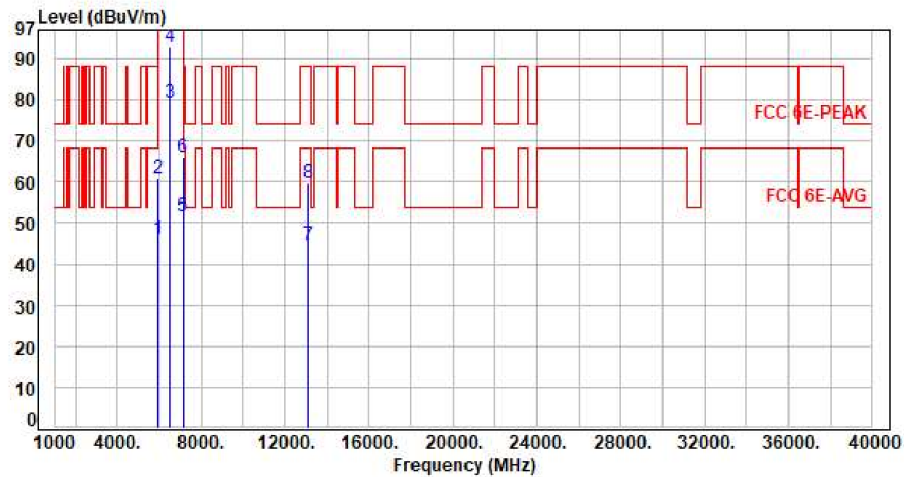


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.34	46.19	68.20	-22.01	Average	218	66	P
2	5925.00	0.85	60.06	60.91	88.20	-27.29	Peak	218	66	P
3	6535.00	3.15	76.04	79.19	200.00	-120.81	Average	218	66	P
4	6535.00	3.15	89.74	92.89	200.00	-107.11	Peak	218	66	P
5	7125.00	4.64	46.94	51.58	68.20	-16.62	Average	218	66	P
6	7125.00	4.64	61.22	65.86	88.20	-22.34	Peak	218	66	P
7	13070.00	4.31	40.39	44.70	68.20	-23.50	Average	100	164	P
8	13070.00	4.31	55.59	59.90	88.20	-28.30	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

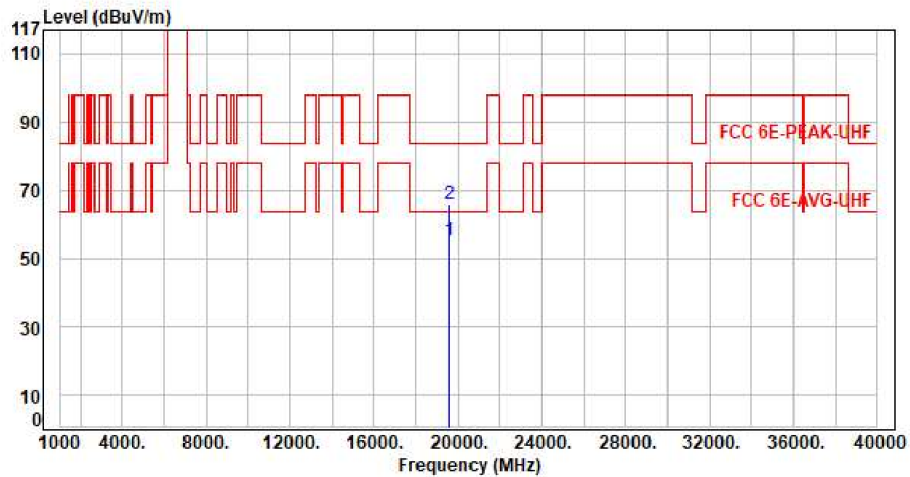


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.65	43.42	55.07	63.54	-8.47	Average	150	360	P
2	19605.00	11.65	54.38	66.03	83.54	-17.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

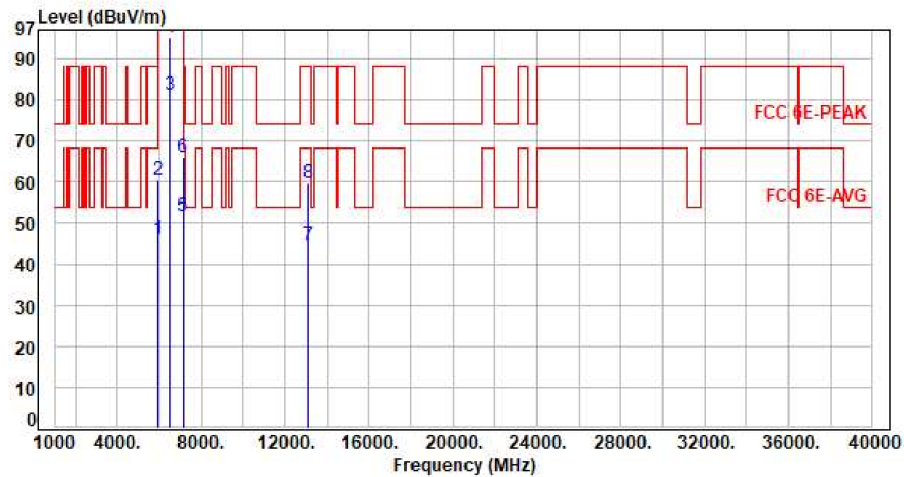


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.36	46.21	68.20	-21.99	Average	100	180	P
2	5925.00	0.85	59.63	60.48	88.20	-27.72	Peak	100	180	P
3	6535.00	3.15	78.15	81.30	200.00	-118.70	Average	100	180	P
4	6535.00	3.15	92.16	95.31	200.00	-104.69	Peak	100	180	P
5	7125.00	4.64	46.97	51.61	68.20	-16.59	Average	100	180	P
6	7125.00	4.64	61.23	65.87	88.20	-22.33	Peak	100	180	P
7	13070.00	4.31	40.30	44.61	68.20	-23.59	Average	100	232	P
8	13070.00	4.31	55.49	59.80	88.20	-28.40	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

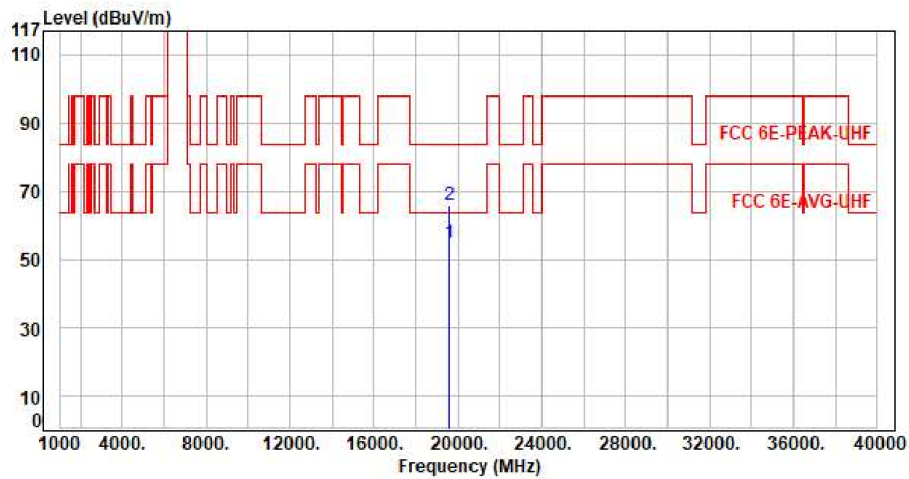


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.65	43.08	54.73	63.54	-8.81	Average	150	360	P
2	19605.00	11.65	54.21	65.86	83.54	-17.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

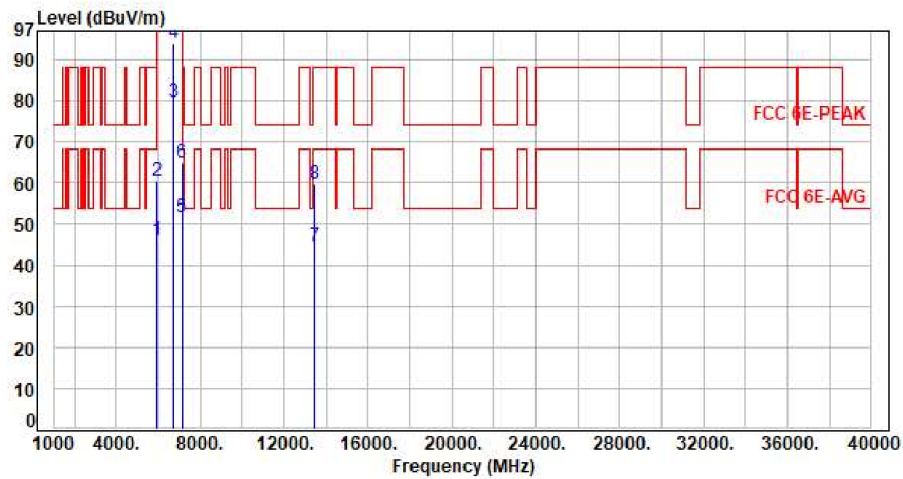


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.40	46.25	68.20	-21.95	Average	222	69	P
2	5925.00	0.85	59.63	60.48	88.20	-27.72	Peak	222	69	P
3	6715.00	3.19	76.32	79.51	200.00	-120.49	Average	222	69	P
4	6715.00	3.19	90.75	93.94	200.00	-106.06	Peak	222	69	P
5	7125.00	4.64	46.97	51.61	68.20	-16.59	Average	222	69	P
6	7125.00	4.64	60.32	64.96	88.20	-23.24	Peak	222	69	P
7	13430.00	3.99	40.56	44.55	68.20	-23.65	Average	100	163	P
8	13430.00	3.99	55.59	59.58	88.20	-28.62	Peak	100	163	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

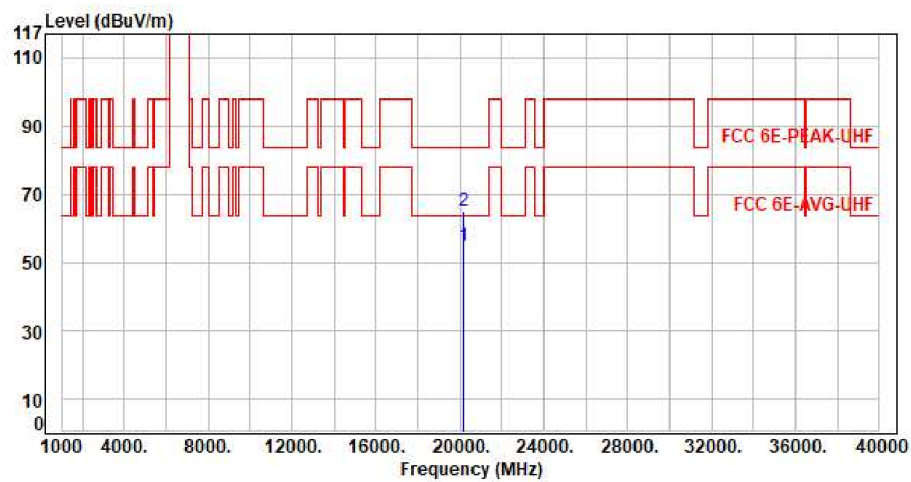


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.54	43.21	54.75	63.54	-8.79	Average	150	360	P
2	20145.00	11.54	53.45	64.99	83.54	-18.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

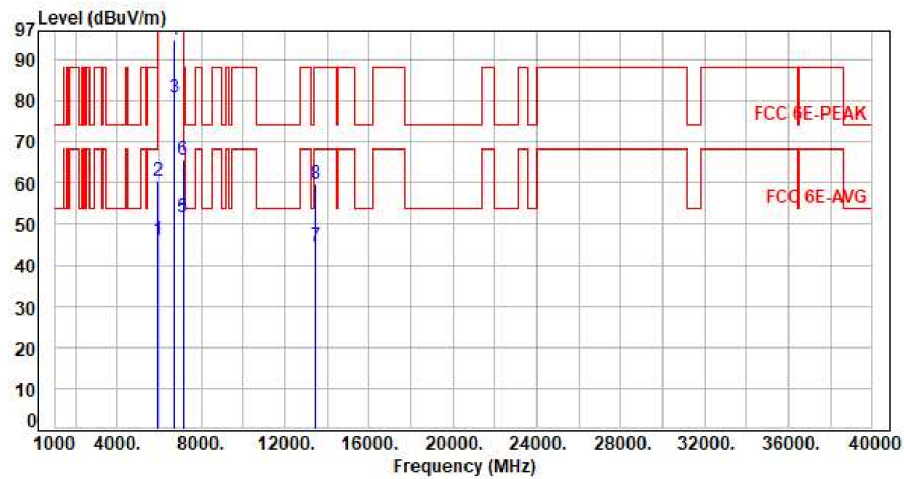


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.36	46.21	68.20	-21.99	Average	100	179	P
2	5925.00	0.85	59.47	60.32	88.20	-27.88	Peak	100	179	P
3	6715.00	3.19	77.49	80.68	200.00	-119.32	Average	100	179	P
4	6715.00	3.19	91.54	94.73	200.00	-105.27	Peak	100	179	P
5	7125.00	4.64	46.97	51.61	68.20	-16.59	Average	100	179	P
6	7125.00	4.64	61.13	65.77	88.20	-22.43	Peak	100	179	P
7	13430.00	3.99	40.55	44.54	68.20	-23.66	Average	100	230	P
8	13430.00	3.99	55.82	59.81	88.20	-28.39	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

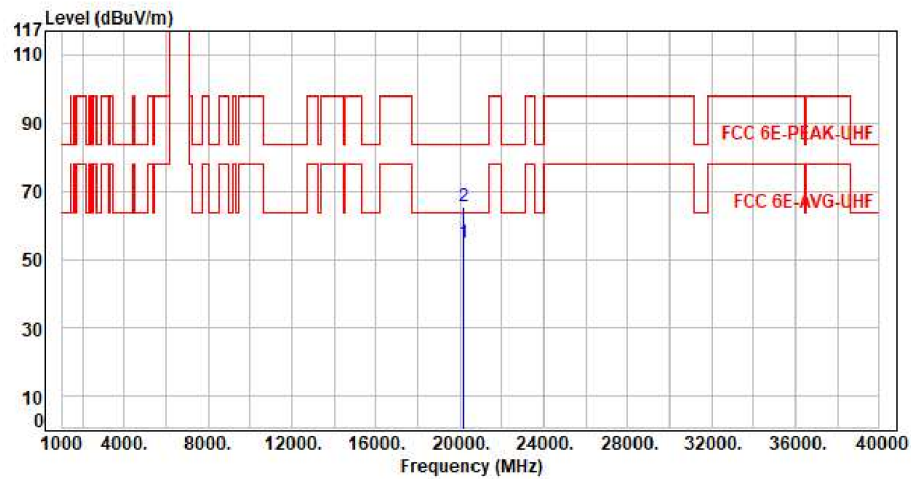

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.54	43.20	54.74	63.54	-8.80	Average	150	360	P
2	20145.00	11.54	53.86	65.40	83.54	-18.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor