




Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

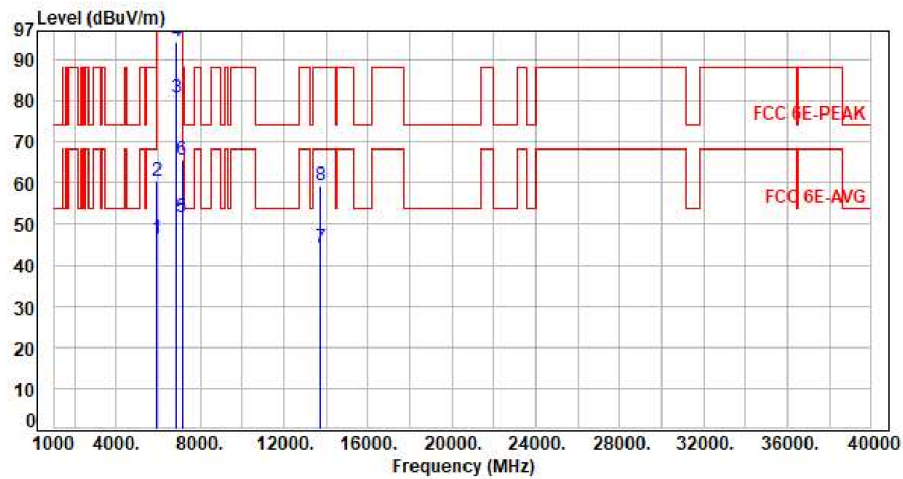


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.50	46.35	68.20	-21.85	Average	201	62	P
2	5925.00	0.85	59.52	60.37	88.20	-27.83	Peak	201	62	P
3	6855.00	3.44	77.31	80.75	200.00	-119.25	Average	201	62	P
4	6855.00	3.44	90.94	94.38	200.00	-105.62	Peak	201	62	P
5	7125.00	4.64	47.04	51.68	68.20	-16.52	Average	201	62	P
6	7125.00	4.64	60.87	65.51	88.20	-22.69	Peak	201	62	P
7	13710.00	3.91	40.37	44.28	68.20	-23.92	Average	100	161	P
8	13710.00	3.91	55.42	59.33	88.20	-28.87	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

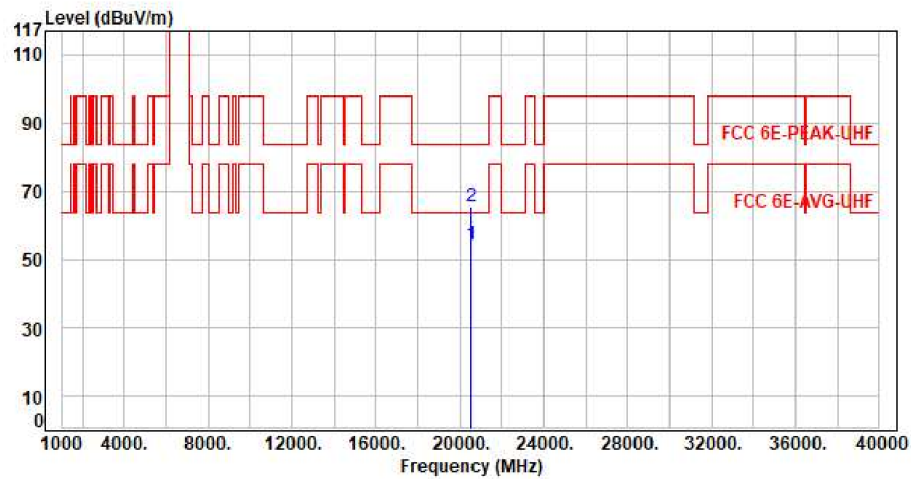

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.22	43.21	54.43	63.54	-9.11	Average	150	360	P
2	20565.00	11.22	54.20	65.42	83.54	-18.12	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

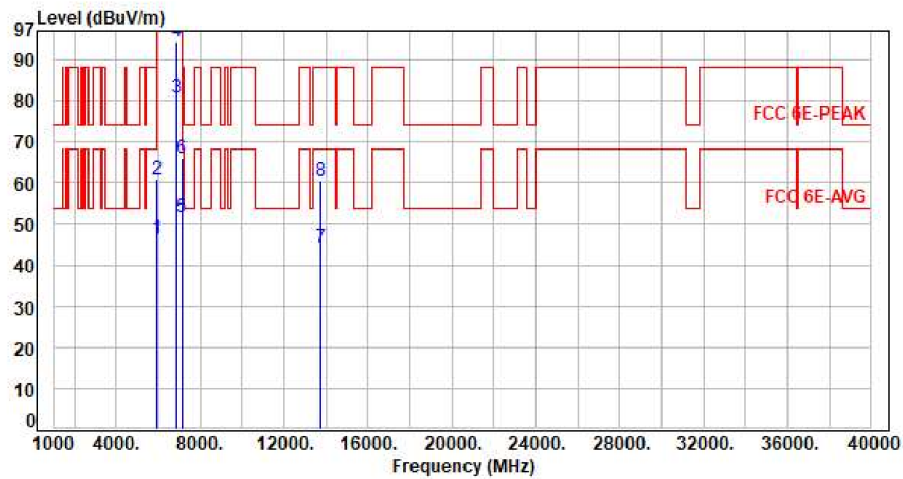


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.47	46.32	68.20	-21.88	Average	100	186	P
2	5925.00	0.85	59.87	60.72	88.20	-27.48	Peak	100	186	P
3	6855.00	3.44	77.20	80.64	200.00	-119.36	Average	100	186	P
4	6855.00	3.44	91.15	94.59	200.00	-105.41	Peak	100	186	P
5	7125.00	4.64	47.01	51.65	68.20	-16.55	Average	100	186	P
6	7125.00	4.64	61.24	65.88	88.20	-22.32	Peak	100	186	P
7	13710.00	3.91	40.37	44.28	68.20	-23.92	Average	100	238	P
8	13710.00	3.91	56.49	60.40	88.20	-27.80	Peak	100	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

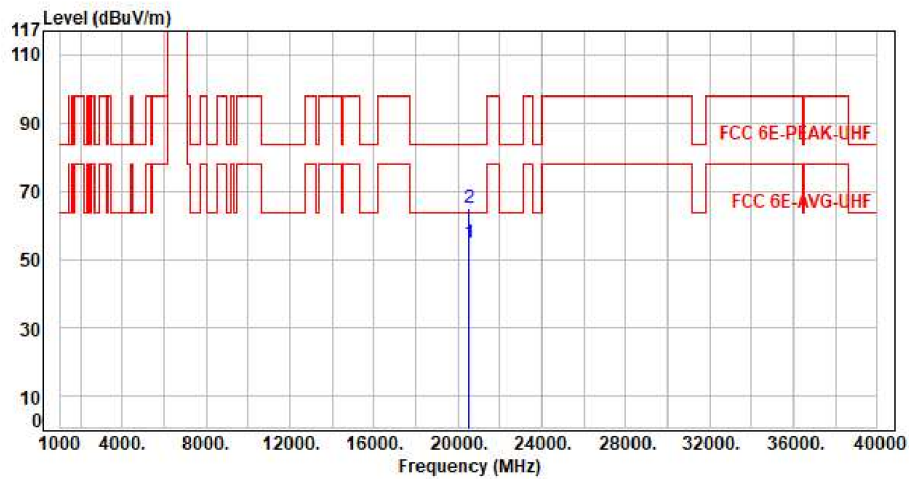


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.22	43.31	54.53	63.54	-9.01	Average	150	360	P
2	20565.00	11.22	53.58	64.80	83.54	-18.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

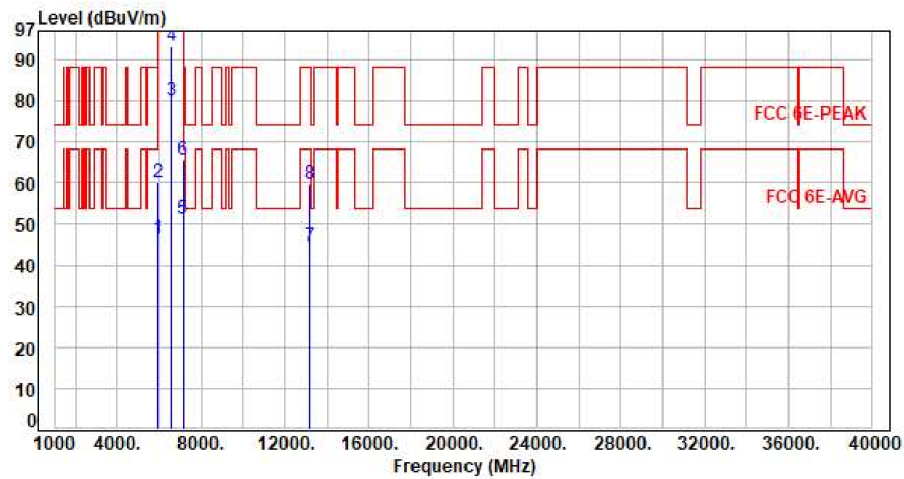


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.48	46.33	68.20	-21.87	Average	208	67	P
2	5925.00	0.85	59.25	60.10	88.20	-28.10	Peak	208	67	P
3	6565.00	3.19	76.87	80.06	200.00	-119.94	Average	208	67	P
4	6565.00	3.19	90.20	93.39	200.00	-106.61	Peak	208	67	P
5	7125.00	4.64	46.49	51.13	68.20	-17.07	Average	208	67	P
6	7125.00	4.64	61.14	65.78	88.20	-22.42	Peak	208	67	P
7	13130.00	4.34	40.22	44.56	68.20	-23.64	Average	100	163	P
8	13130.00	4.34	55.38	59.72	88.20	-28.48	Peak	100	163	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

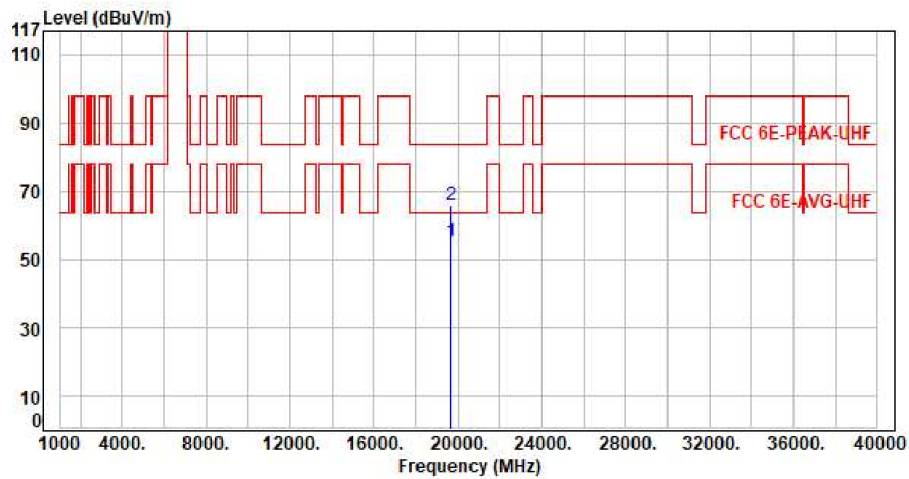

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	12.05	43.13	55.18	63.54	-8.36	Average	150	360	P
2	19695.00	12.05	53.83	65.88	83.54	-17.66	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

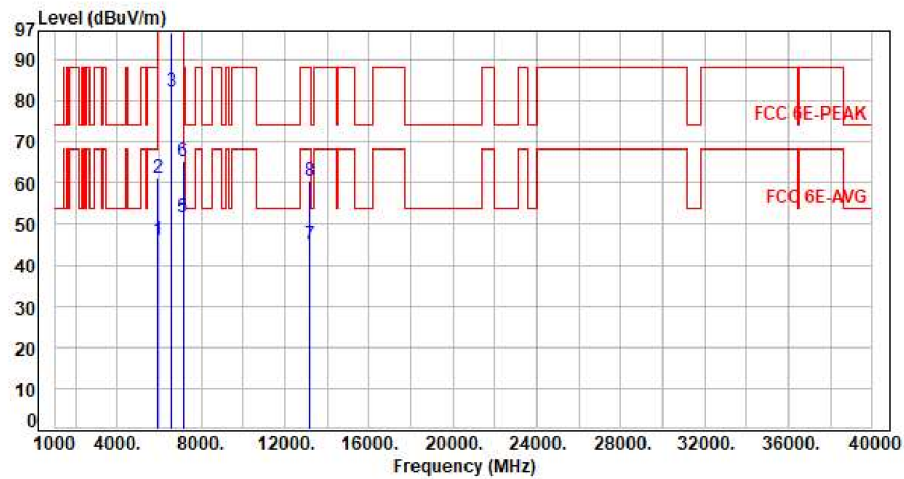


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.42	46.27	68.20	-21.93	Average	100	180	P
2	5925.00	0.85	60.41	61.26	88.20	-26.94	Peak	100	180	P
3	6565.00	3.19	79.20	82.39	200.00	-117.61	Average	100	180	P
4	6565.00	3.19	93.30	96.49	200.00	-103.51	Peak	100	180	P
5	7125.00	4.64	46.97	51.61	68.20	-16.59	Average	100	180	P
6	7125.00	4.64	60.67	65.31	88.20	-22.89	Peak	100	180	P
7	13130.00	4.34	40.64	44.98	68.20	-23.22	Average	100	232	P
8	13130.00	4.34	56.17	60.51	88.20	-27.69	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

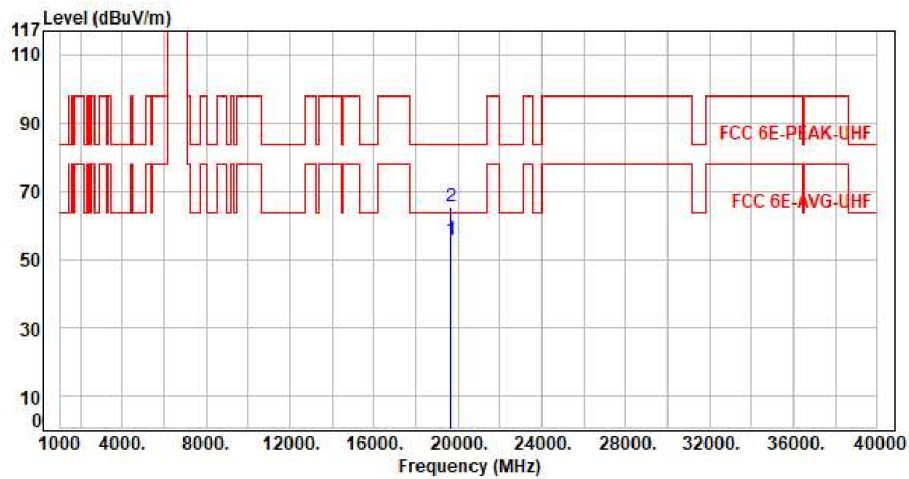

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	12.05	43.50	55.55	63.54	-7.99	Average	150	360	P
2	19695.00	12.05	53.45	65.50	83.54	-18.04	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

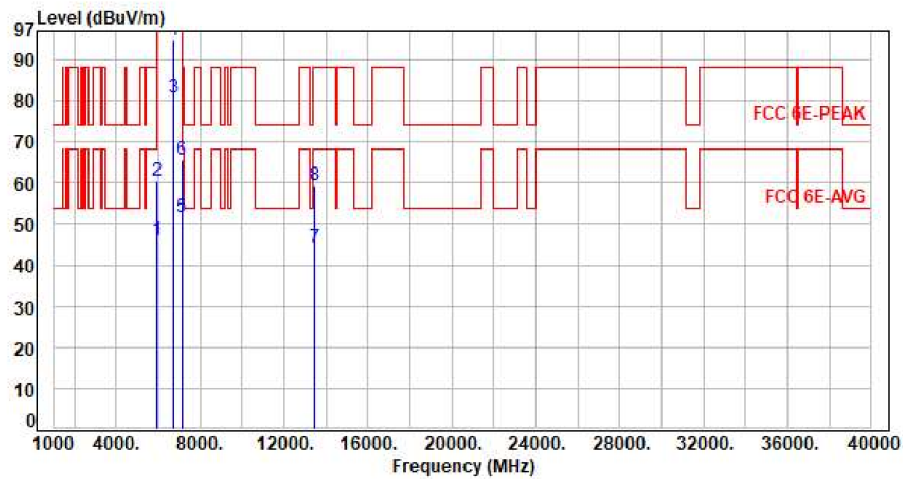


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.40	46.25	68.20	-21.95	Average	229	64	P
2	5925.00	0.85	59.49	60.34	88.20	-27.86	Peak	229	64	P
3	6725.00	3.22	77.51	80.73	200.00	-119.27	Average	229	64	P
4	6725.00	3.22	91.73	94.95	200.00	-105.05	Peak	229	64	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	229	64	P
6	7125.00	4.64	60.85	65.49	88.20	-22.71	Peak	229	64	P
7	13450.00	3.96	40.17	44.13	68.20	-24.07	Average	100	168	P
8	13450.00	3.96	55.41	59.37	88.20	-28.83	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

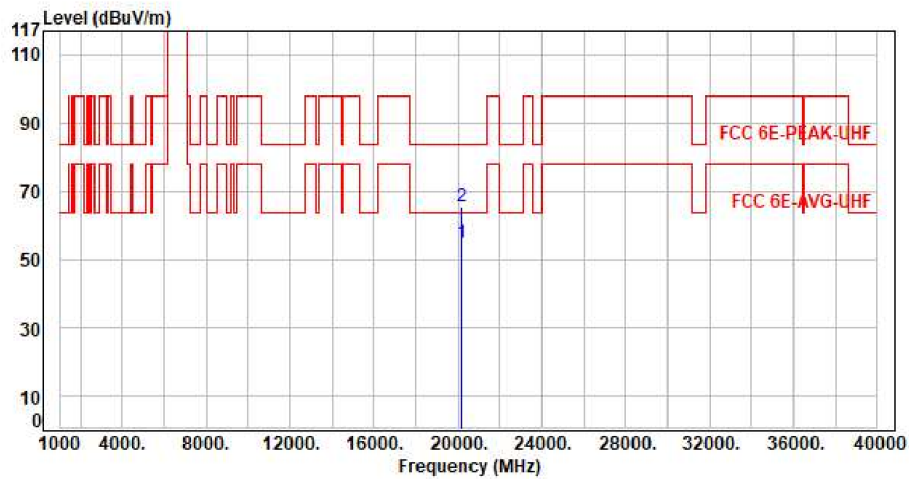


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.66	43.15	54.81	63.54	-8.73	Average	150	360	P
2	20175.00	11.66	53.84	65.50	83.54	-18.04	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

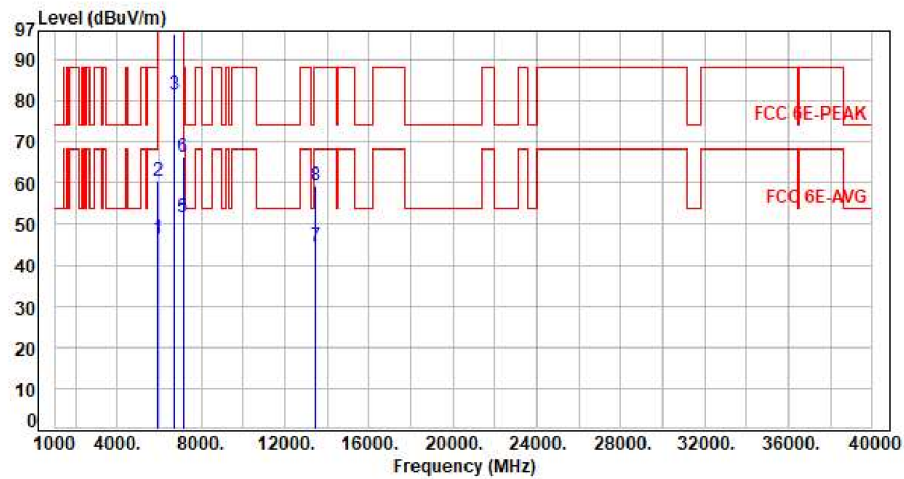


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.47	46.32	68.20	-21.88	Average	100	179	P
2	5925.00	0.85	59.55	60.40	88.20	-27.80	Peak	100	179	P
3	6725.00	3.22	78.29	81.51	200.00	-118.49	Average	100	179	P
4	6725.00	3.22	92.98	96.20	200.00	-103.80	Peak	100	179	P
5	7125.00	4.64	47.02	51.66	68.20	-16.54	Average	100	179	P
6	7125.00	4.64	61.63	66.27	88.20	-21.93	Peak	100	179	P
7	13450.00	3.96	40.70	44.66	68.20	-23.54	Average	100	228	P
8	13450.00	3.96	55.54	59.50	88.20	-28.70	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

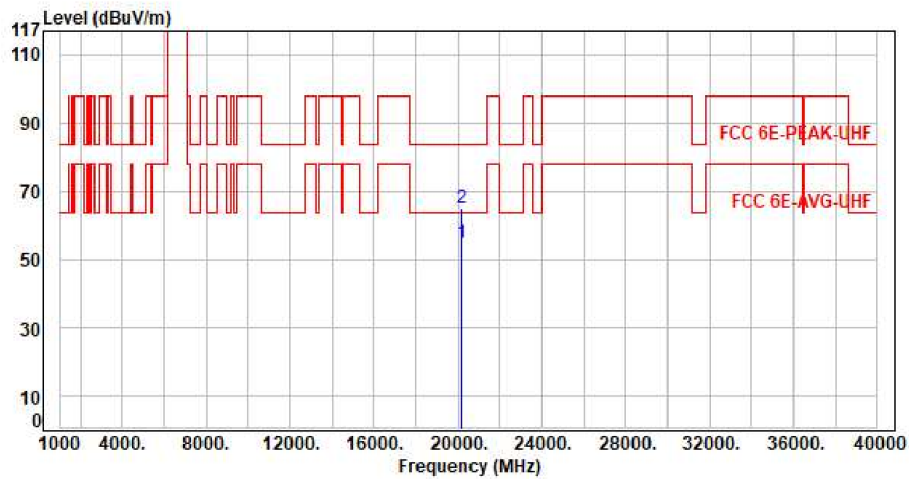


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.66	43.05	54.71	63.54	-8.83	Average	150	360	P
2	20175.00	11.66	53.40	65.06	83.54	-18.48	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

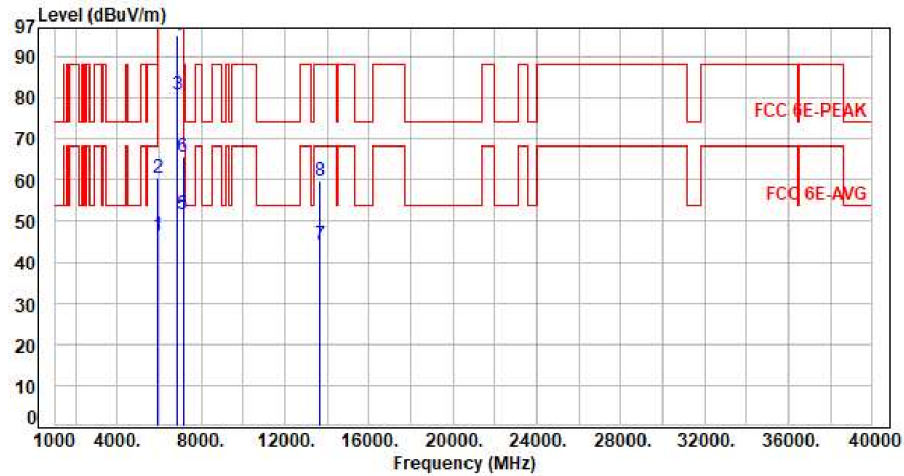

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.48	46.33	68.20	-21.87	Average	210	62	P
2	5925.00	0.85	59.71	60.56	88.20	-27.64	Peak	210	62	P
3	6845.00	3.45	77.48	80.93	200.00	-119.07	Average	210	62	P
4	6845.00	3.45	91.69	95.14	200.00	-104.86	Peak	210	62	P
5	7125.00	4.64	46.94	51.58	68.20	-16.62	Average	210	62	P
6	7125.00	4.64	61.08	65.72	88.20	-22.48	Peak	210	62	P
7	13690.00	3.88	40.38	44.26	68.20	-23.94	Average	100	161	P
8	13690.00	3.88	55.93	59.81	88.20	-28.39	Peak	100	161	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

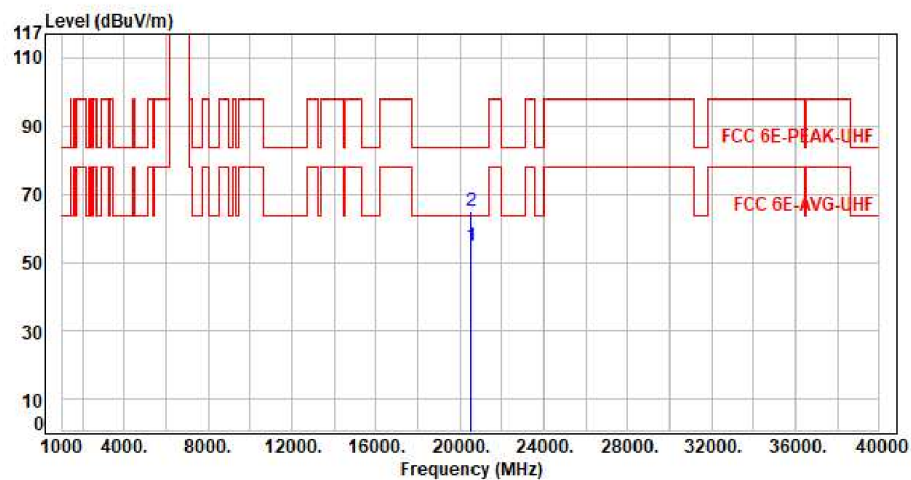

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.28	43.50	54.78	63.54	-8.76	Average	150	360	P
2	20535.00	11.28	53.56	64.84	83.54	-18.70	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

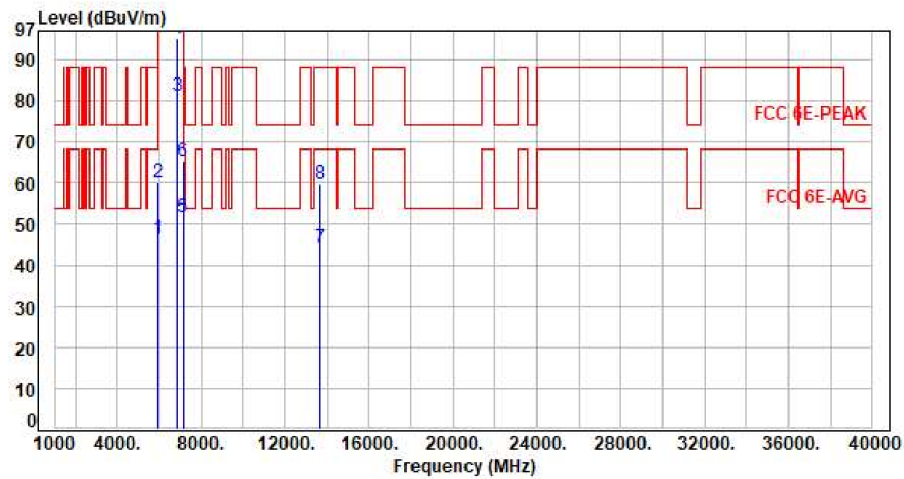


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.46	46.31	68.20	-21.89	Average	108	186	P
2	5925.00	0.85	59.23	60.08	88.20	-28.12	Peak	108	186	P
3	6845.00	3.45	77.58	81.03	200.00	-118.97	Average	108	186	P
4	6845.00	3.45	91.68	95.13	200.00	-104.87	Peak	108	186	P
5	7125.00	4.64	47.03	51.67	68.20	-16.53	Average	108	186	P
6	7125.00	4.64	60.61	65.25	88.20	-22.95	Peak	108	186	P
7	13690.00	3.88	40.39	44.27	68.20	-23.93	Average	100	228	P
8	13690.00	3.88	55.74	59.62	88.20	-28.58	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

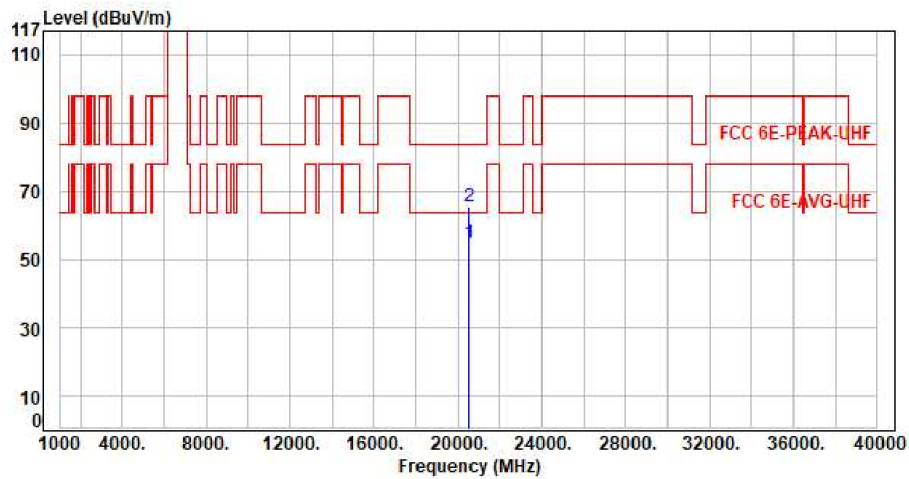


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.28	43.51	54.79	63.54	-8.75	Average	150	360	P
2	20535.00	11.28	54.12	65.40	83.54	-18.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

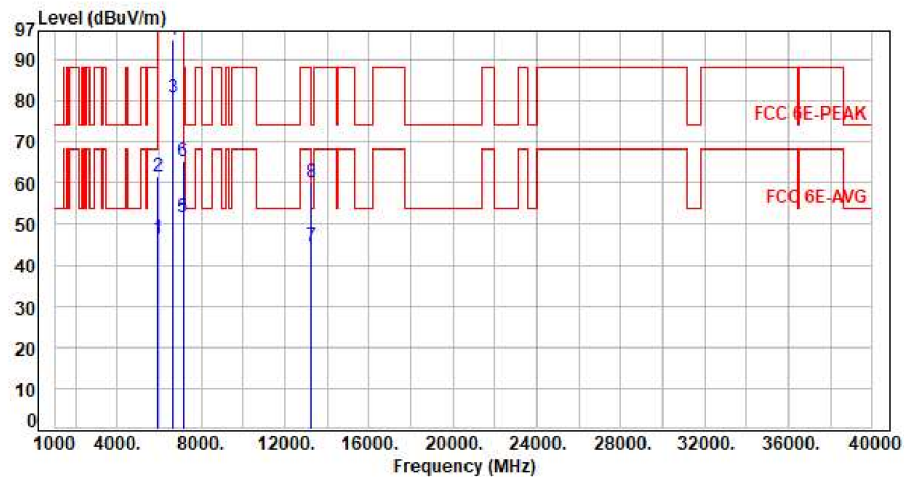

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.46	46.31	68.20	-21.89	Average	222	67	P
2	5925.00	0.85	60.56	61.41	88.20	-26.79	Peak	222	67	P
3	6625.00	3.13	77.61	80.74	200.00	-119.26	Average	222	67	P
4	6625.00	3.13	91.69	94.82	200.00	-105.18	Peak	222	67	P
5	7125.00	4.64	46.90	51.54	68.20	-16.66	Average	222	67	P
6	7125.00	4.64	60.68	65.32	88.20	-22.88	Peak	222	67	P
7	13250.00	4.17	40.30	44.47	54.00	-9.53	Average	100	167	P
8	13250.00	4.17	56.09	60.26	74.00	-13.74	Peak	100	167	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor