




Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

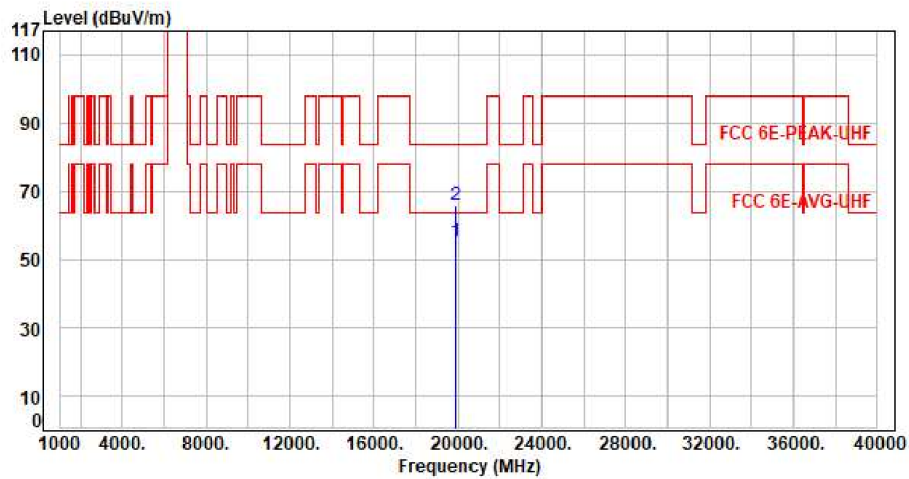


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.80	43.28	55.08	63.54	-8.46	Average	150	360	P
2	19875.00	11.80	53.89	65.69	83.54	-17.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

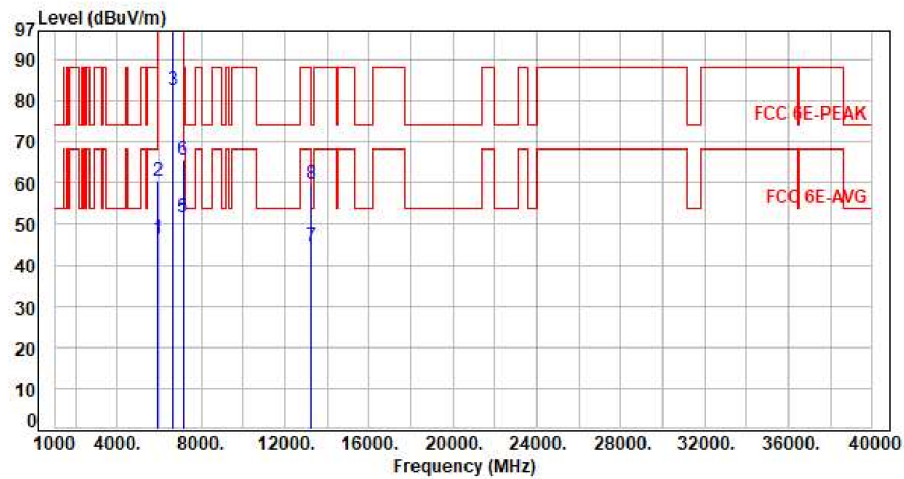


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.46	46.31	68.20	-21.89	Average	100	177	P
2	5925.00	0.85	59.70	60.55	88.20	-27.65	Peak	100	177	P
3	6625.00	3.13	79.65	82.78	200.00	-117.22	Average	100	177	P
4	6625.00	3.13	93.75	96.88	200.00	-103.12	Peak	100	177	P
5	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	100	177	P
6	7125.00	4.64	61.00	65.64	88.20	-22.56	Peak	100	177	P
7	13250.00	4.17	40.47	44.64	54.00	-9.36	Average	100	232	P
8	13250.00	4.17	55.50	59.67	74.00	-14.33	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

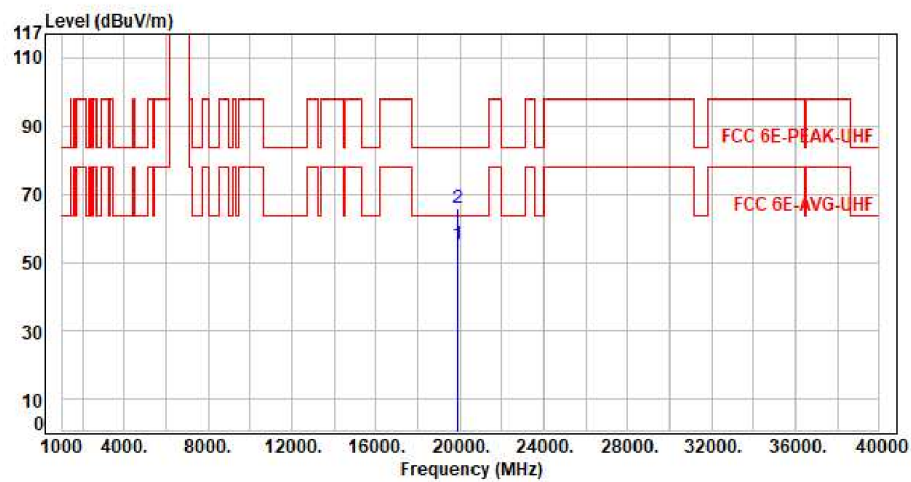


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.80	43.22	55.02	63.54	-8.52	Average	150	360	P
2	19875.00	11.80	53.86	65.66	83.54	-17.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

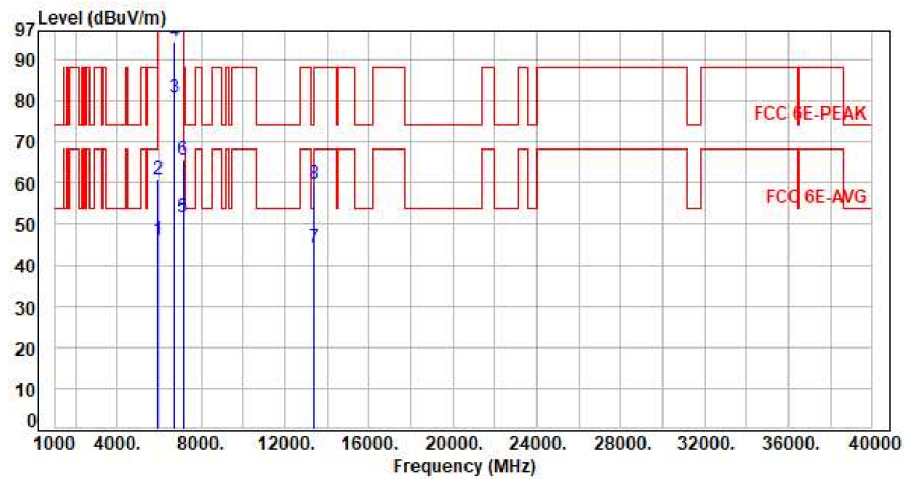


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.40	46.25	68.20	-21.95	Average	228	64	P
2	5925.00	0.85	60.09	60.94	88.20	-27.26	Peak	228	64	P
3	6705.00	3.17	77.68	80.85	200.00	-119.15	Average	228	64	P
4	6705.00	3.17	91.31	94.48	200.00	-105.52	Peak	228	64	P
5	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	228	64	P
6	7125.00	4.64	61.13	65.77	88.20	-22.43	Peak	228	64	P
7	13410.00	4.02	40.37	44.39	68.20	-23.81	Average	100	169	P
8	13410.00	4.02	55.89	59.91	88.20	-28.29	Peak	100	169	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

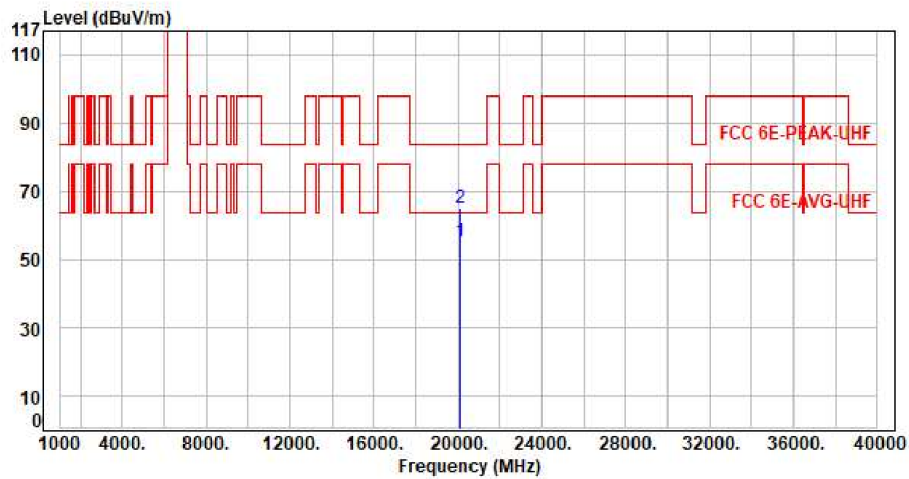


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.50	43.53	55.03	63.54	-8.51	Average	150	360	P
2	20115.00	11.50	53.38	64.88	83.54	-18.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

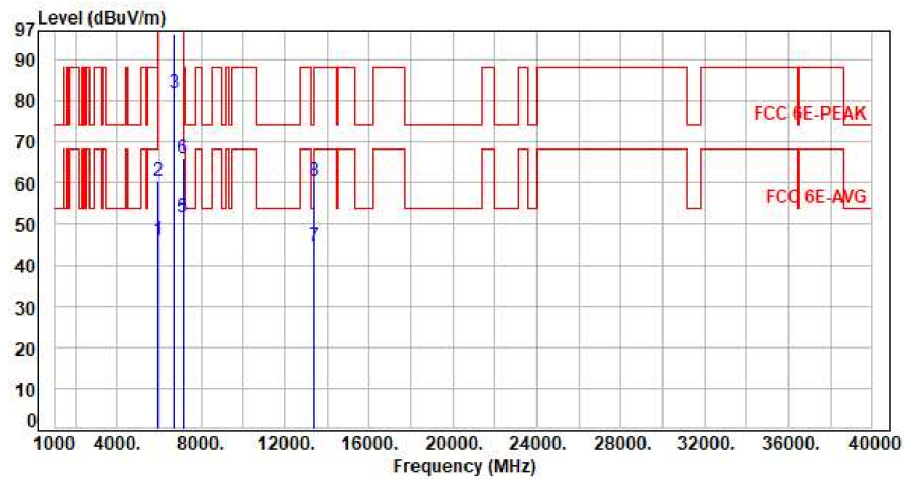


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.43	46.28	68.20	-21.92	Average	100	177	P
2	5925.00	0.85	59.47	60.32	88.20	-27.88	Peak	100	177	P
3	6705.00	3.17	78.53	81.70	200.00	-118.30	Average	100	177	P
4	6705.00	3.17	93.05	96.22	200.00	-103.78	Peak	100	177	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	100	177	P
6	7125.00	4.64	61.23	65.87	88.20	-22.33	Peak	100	177	P
7	13410.00	4.02	40.48	44.50	68.20	-23.70	Average	100	235	P
8	13410.00	4.02	56.43	60.45	88.20	-27.75	Peak	100	235	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

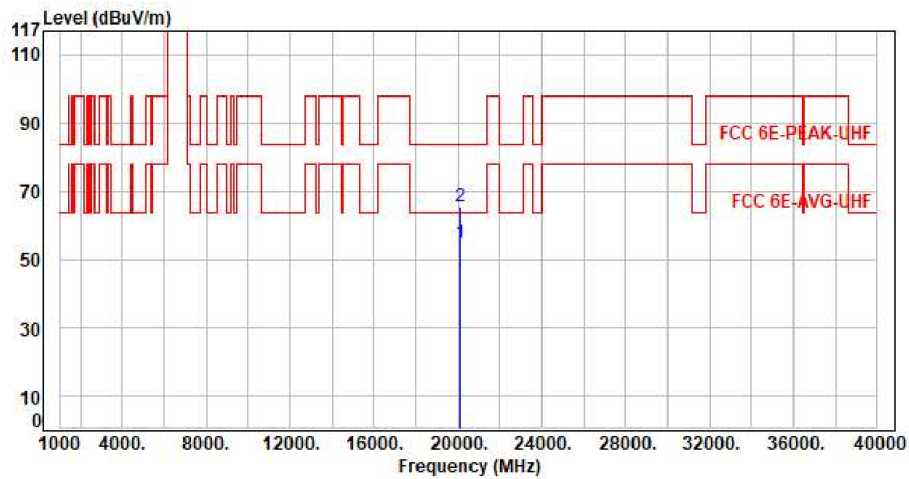


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.50	43.30	54.80	63.54	-8.74	Average	150	360	P
2	20115.00	11.50	54.00	65.50	83.54	-18.04	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

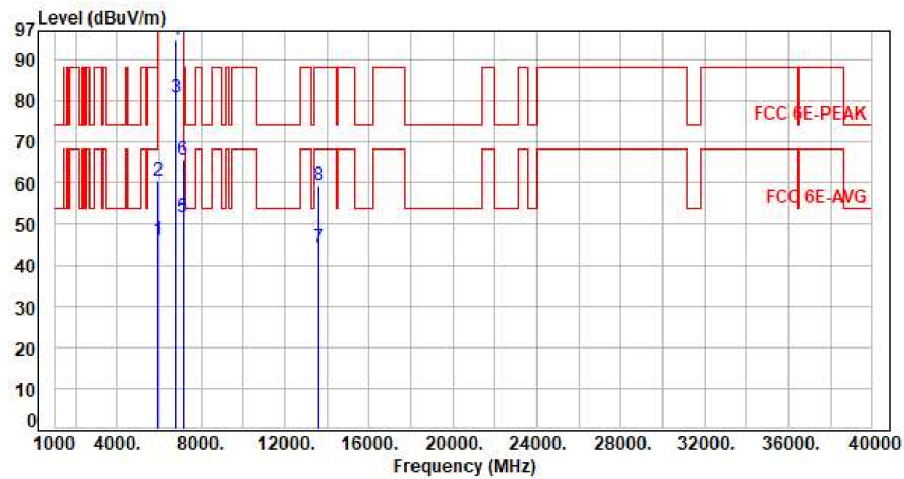


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.43	46.28	68.20	-21.92	Average	204	65	P
2	5925.00	0.85	59.64	60.49	88.20	-27.71	Peak	204	65	P
3	6785.00	3.40	77.49	80.89	200.00	-119.11	Average	204	65	P
4	6785.00	3.40	91.38	94.78	200.00	-105.22	Peak	204	65	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	204	65	P
6	7125.00	4.64	60.90	65.54	88.20	-22.66	Peak	204	65	P
7	13570.00	3.85	40.57	44.42	68.20	-23.78	Average	100	168	P
8	13570.00	3.85	55.42	59.27	88.20	-28.93	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

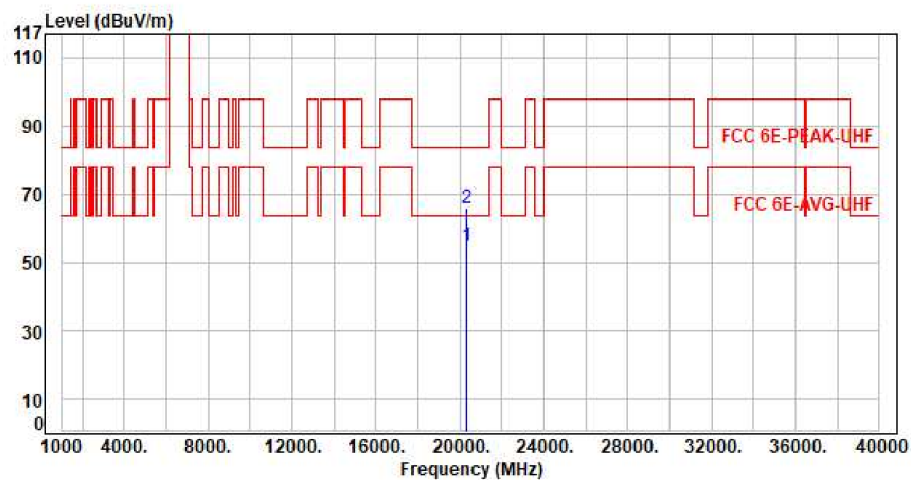

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.37	43.48	54.85	63.54	-8.69	Average	150	360	P
2	20355.00	11.37	54.28	65.65	83.54	-17.89	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

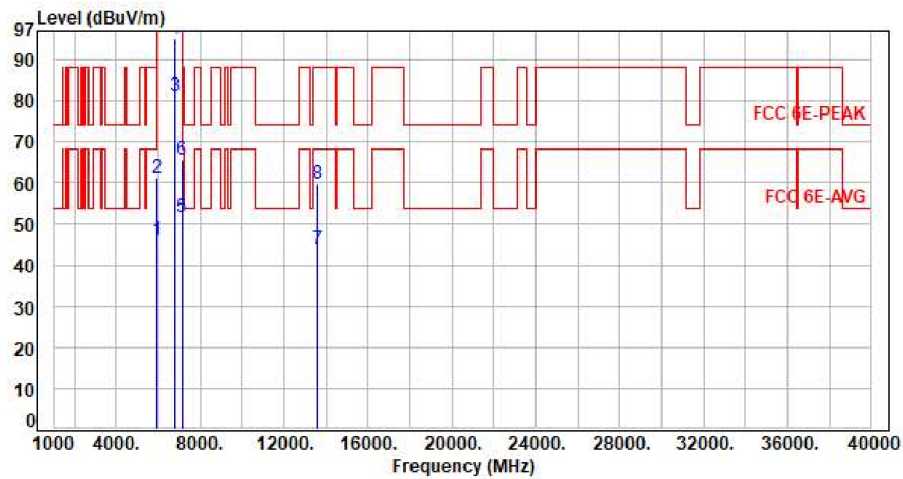


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.39	46.24	68.20	-21.96	Average	100	186	P
2	5925.00	0.85	60.38	61.23	88.20	-26.97	Peak	100	186	P
3	6785.00	3.40	77.67	81.07	200.00	-118.93	Average	100	186	P
4	6785.00	3.40	91.61	95.01	200.00	-104.99	Peak	100	186	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	100	186	P
6	7125.00	4.64	60.92	65.56	88.20	-22.64	Peak	100	186	P
7	13570.00	3.85	40.22	44.07	68.20	-24.13	Average	100	233	P
8	13570.00	3.85	55.93	59.78	88.20	-28.42	Peak	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

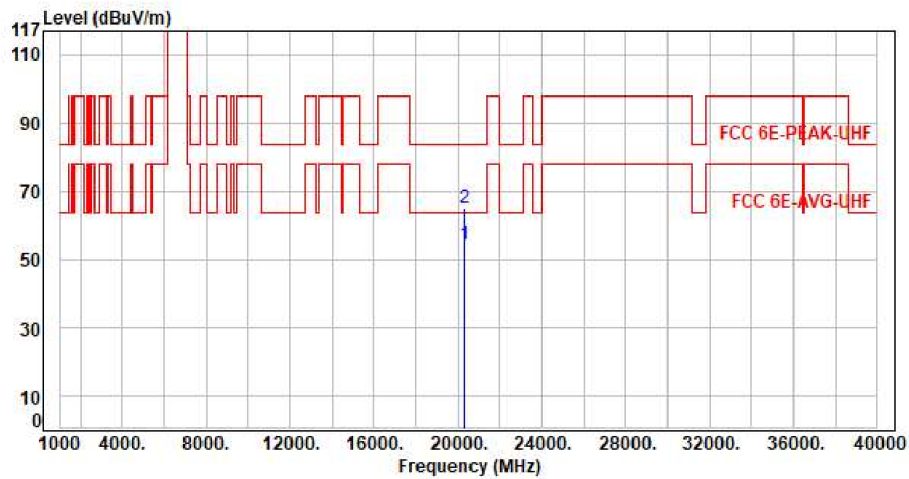


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.37	43.11	54.48	63.54	-9.06	Average	150	360	P
2	20355.00	11.37	53.62	64.99	83.54	-18.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

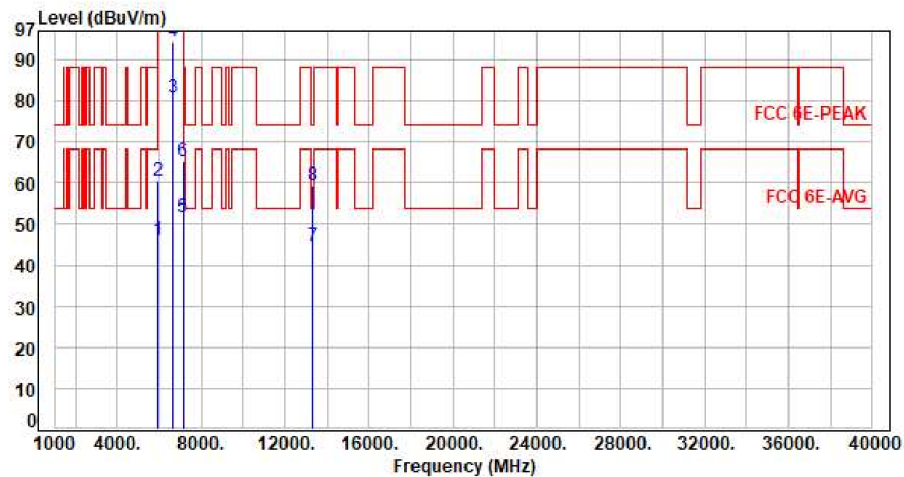


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.42	46.27	68.20	-21.93	Average	224	66	P
2	5925.00	0.85	59.80	60.65	88.20	-27.55	Peak	224	66	P
3	6665.00	3.10	77.63	80.73	200.00	-119.27	Average	224	66	P
4	6665.00	3.10	91.50	94.60	200.00	-105.40	Peak	224	66	P
5	7125.00	4.64	46.90	51.54	68.20	-16.66	Average	224	66	P
6	7125.00	4.64	60.82	65.46	88.20	-22.74	Peak	224	66	P
7	13330.00	4.15	40.59	44.74	54.00	-9.26	Average	100	160	P
8	13330.00	4.15	55.38	59.53	74.00	-14.47	Peak	100	160	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

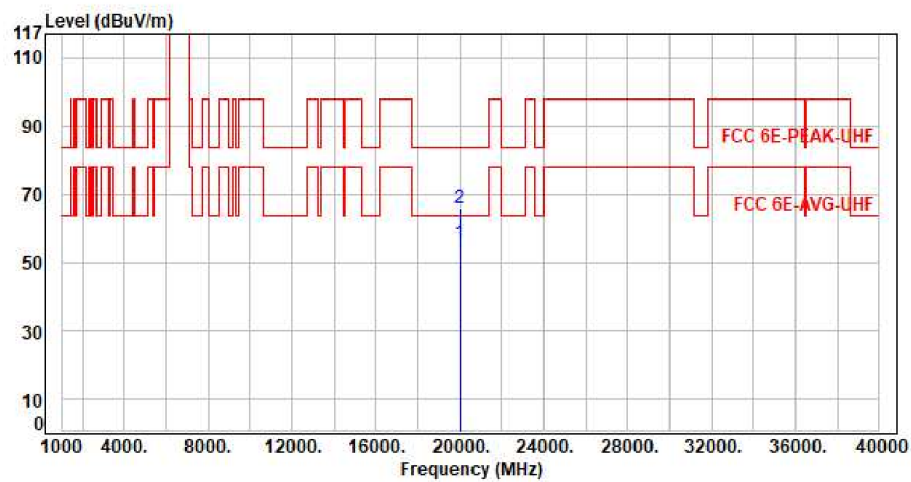


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.94	43.54	55.48	63.54	-8.06	Average	150	360	P
2	19995.00	11.94	53.86	65.80	83.54	-17.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

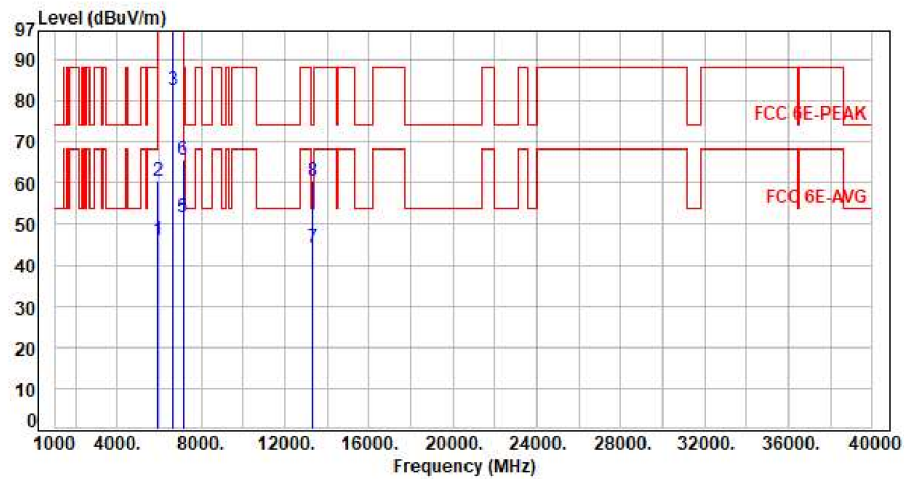


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.39	46.24	68.20	-21.96	Average	100	179	P
2	5925.00	0.85	59.67	60.52	88.20	-27.68	Peak	100	179	P
3	6665.00	3.10	79.53	82.63	200.00	-117.37	Average	100	179	P
4	6665.00	3.10	93.92	97.02	200.00	-102.98	Peak	100	179	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	100	179	P
6	7125.00	4.64	60.90	65.54	88.20	-22.66	Peak	100	179	P
7	13330.00	4.15	40.12	44.27	54.00	-9.73	Average	100	238	P
8	13330.00	4.15	56.47	60.62	74.00	-13.38	Peak	100	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

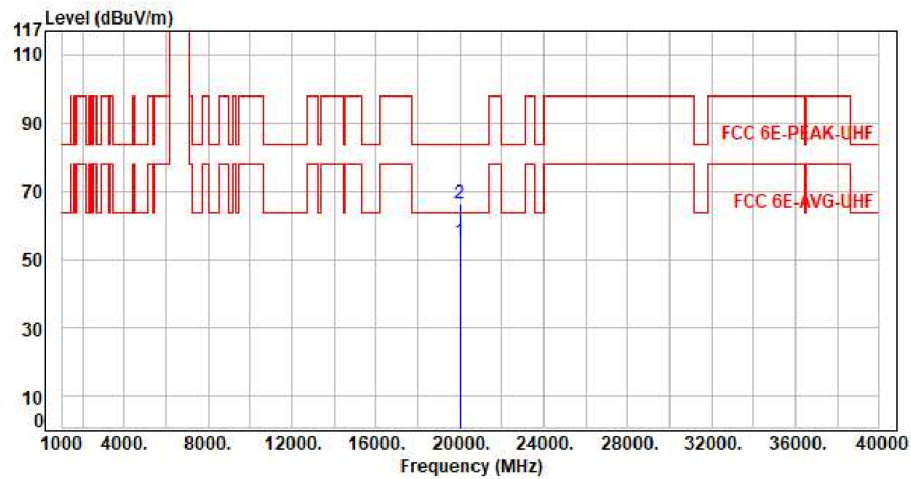

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.94	43.33	55.27	63.54	-8.27	Average	150	360	P
2	19995.00	11.94	54.42	66.36	83.54	-17.18	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

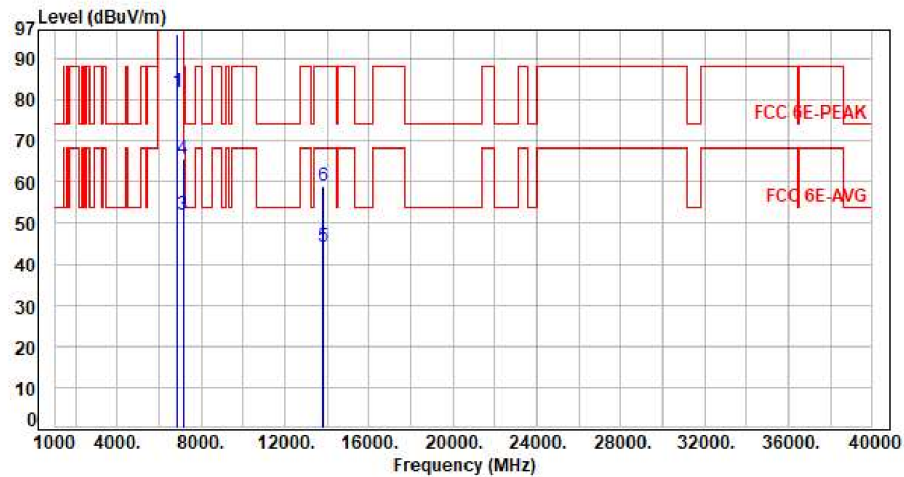


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	3.44	78.31	81.75	200.00	-118.25	Average	196	61	P
2	6895.00	3.44	92.61	96.05	200.00	-103.95	Peak	196	61	P
3	7125.00	4.64	47.46	52.10	68.20	-16.10	Average	196	61	P
4	7125.00	4.64	61.05	65.69	88.20	-22.51	Peak	196	61	P
5	13790.00	3.95	40.33	44.28	68.20	-23.92	Average	100	169	P
6	13790.00	3.95	55.15	59.10	88.20	-29.10	Peak	100	169	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

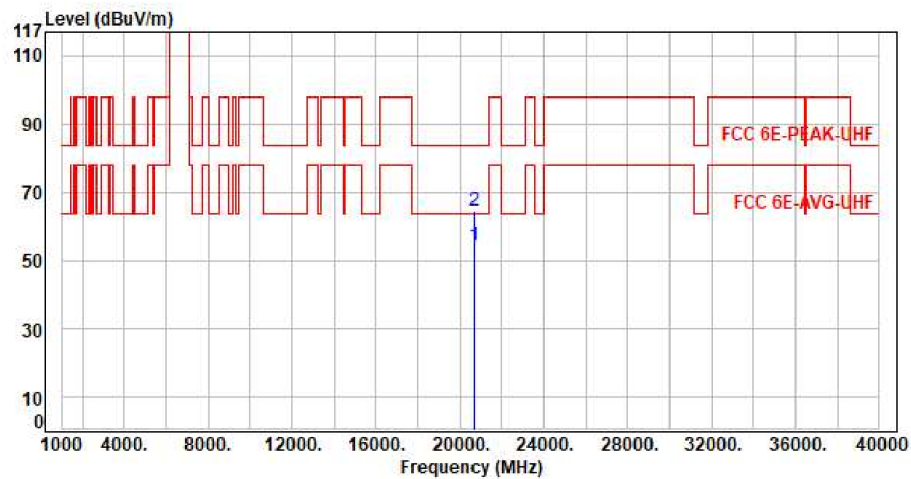

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.21	43.06	54.27	63.54	-9.27	Average	150	360	P
2	20685.00	11.21	53.24	64.45	83.54	-19.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor