




Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

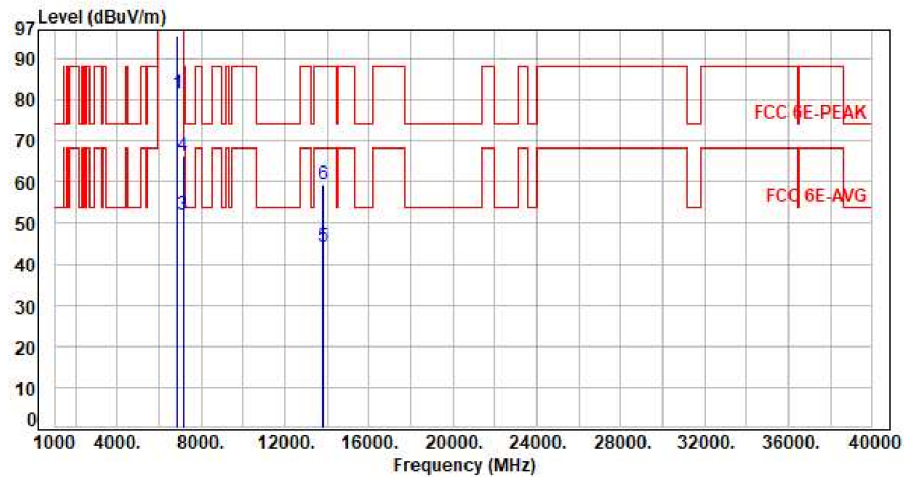


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	3.44	78.20	81.64	200.00	-118.36	Average	100	188	P
2	6895.00	3.44	92.15	95.59	200.00	-104.41	Peak	100	188	P
3	7125.00	4.64	47.29	51.93	68.20	-16.27	Average	100	188	P
4	7125.00	4.64	61.81	66.45	88.20	-21.75	Peak	100	188	P
5	13790.00	3.95	40.30	44.25	68.20	-23.95	Average	100	227	P
6	13790.00	3.95	55.42	59.37	88.20	-28.83	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

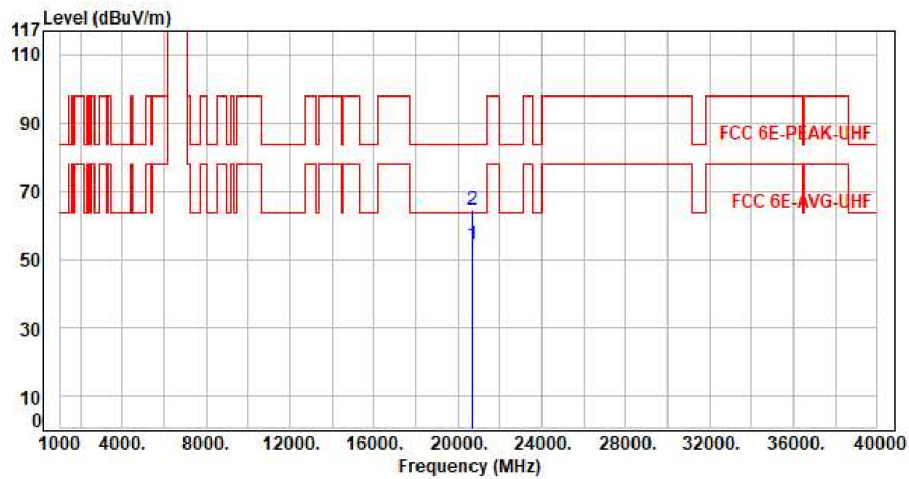


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.21	43.16	54.37	63.54	-9.17	Average	150	360	P
2	20685.00	11.21	53.48	64.69	83.54	-18.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

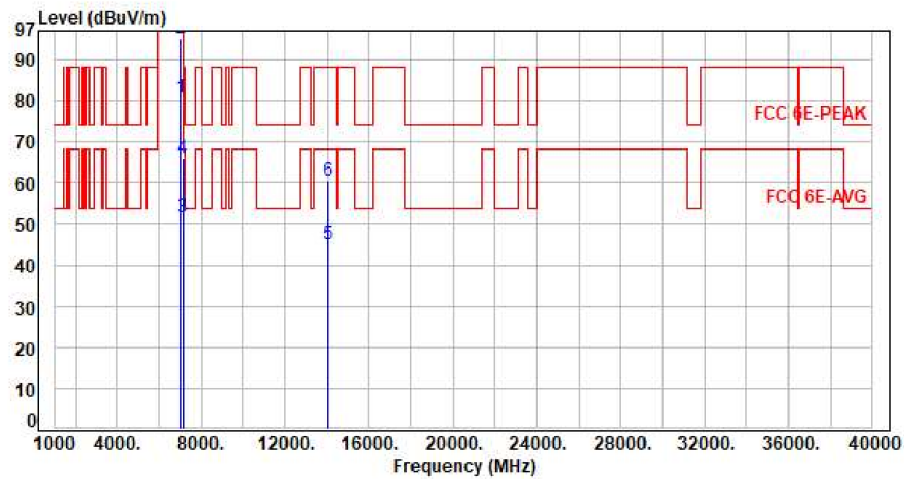


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	4.73	76.19	80.92	200.00	-119.08	Average	230	55	P
2	7015.00	4.73	90.47	95.20	200.00	-104.80	Peak	230	55	P
3	7125.00	4.64	47.12	51.76	68.20	-16.44	Average	230	55	P
4	7125.00	4.64	61.28	65.92	88.20	-22.28	Peak	230	55	P
5	14030.00	4.74	40.42	45.16	68.20	-23.04	Average	100	163	P
6	14030.00	4.74	55.67	60.41	88.20	-27.79	Peak	100	163	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

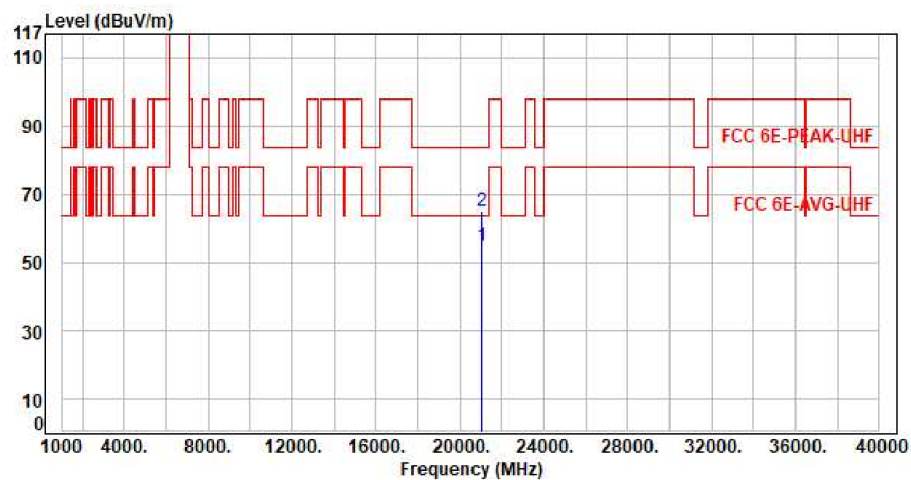

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.67	43.02	54.69	63.54	-8.85	Average	150	360	P
2	21045.00	11.67	53.32	64.99	83.54	-18.55	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

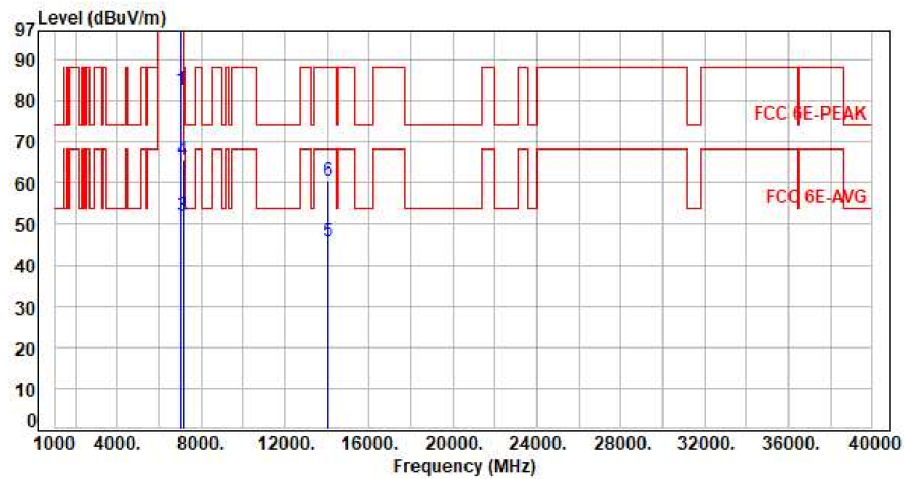


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	4.73	77.79	82.52	200.00	-117.48	Average	100	186	P
2	7015.00	4.73	92.64	97.37	200.00	-102.63	Peak	100	186	P
3	7125.00	4.64	47.22	51.86	68.20	-16.34	Average	100	186	P
4	7125.00	4.64	61.11	65.75	88.20	-22.45	Peak	100	186	P
5	14030.00	4.74	40.85	45.59	68.20	-22.61	Average	100	235	P
6	14030.00	4.74	55.75	60.49	88.20	-27.71	Peak	100	235	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

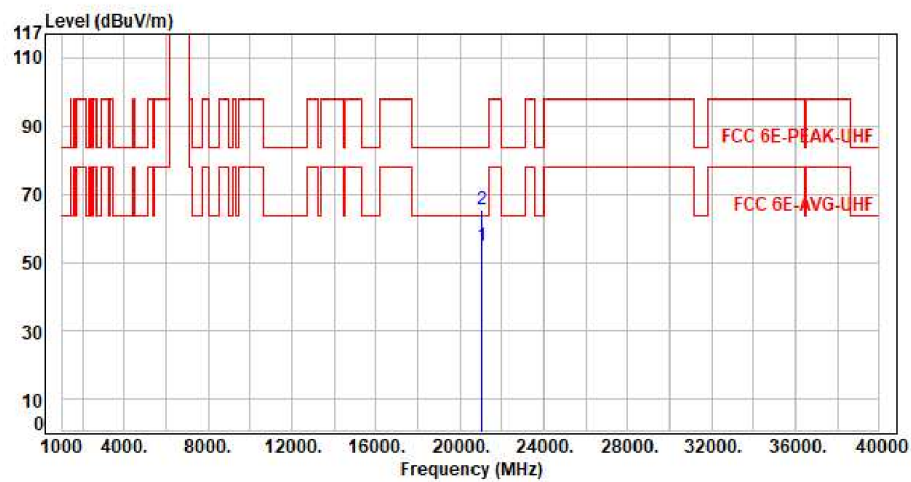


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.67	43.25	54.92	63.54	-8.62	Average	150	360	P
2	21045.00	11.67	53.57	65.24	83.54	-18.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

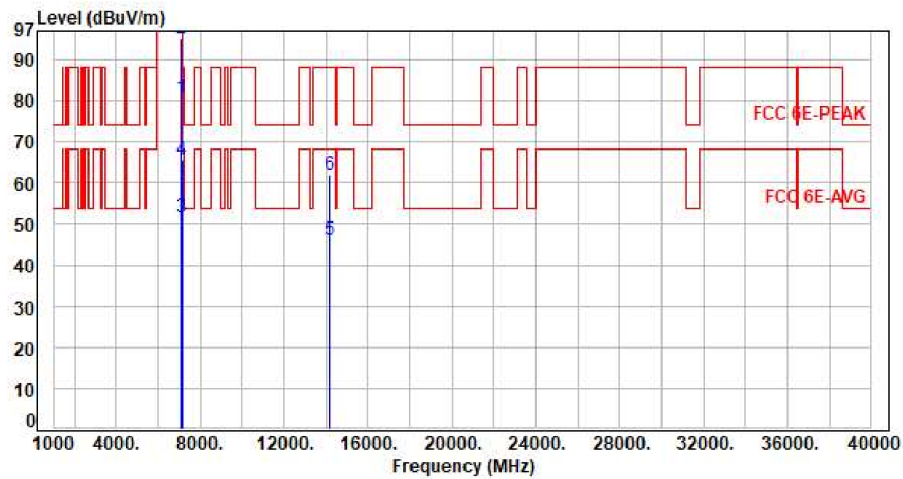


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	4.64	76.23	80.87	200.00	-119.13	Average	187	56	P
2	7095.00	4.64	90.42	95.06	200.00	-104.94	Peak	187	56	P
3	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	187	56	P
4	7125.00	4.64	60.99	65.63	88.20	-22.57	Peak	187	56	P
5	14190.00	5.58	40.55	46.13	68.20	-22.07	Average	100	162	P
6	14190.00	5.58	56.39	61.97	88.20	-26.23	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

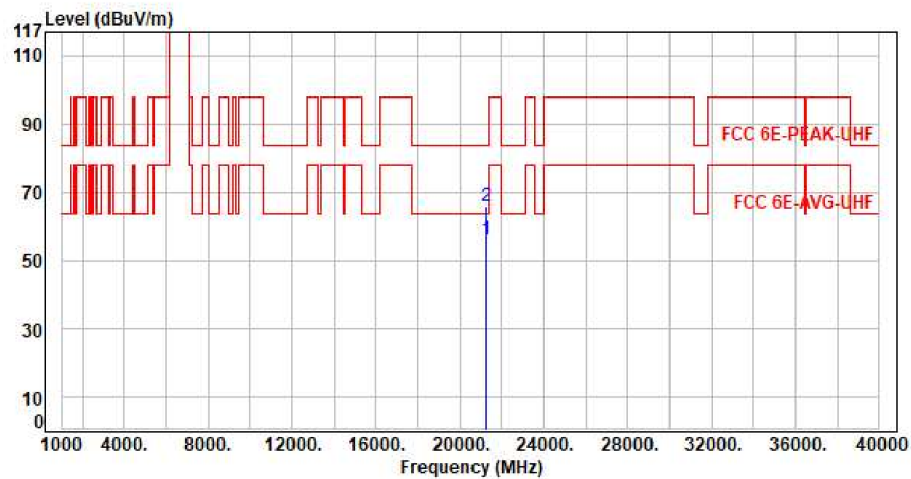


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	12.33	43.56	55.89	63.54	-7.65	Average	150	360	P
2	21285.00	12.33	53.38	65.71	83.54	-17.83	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

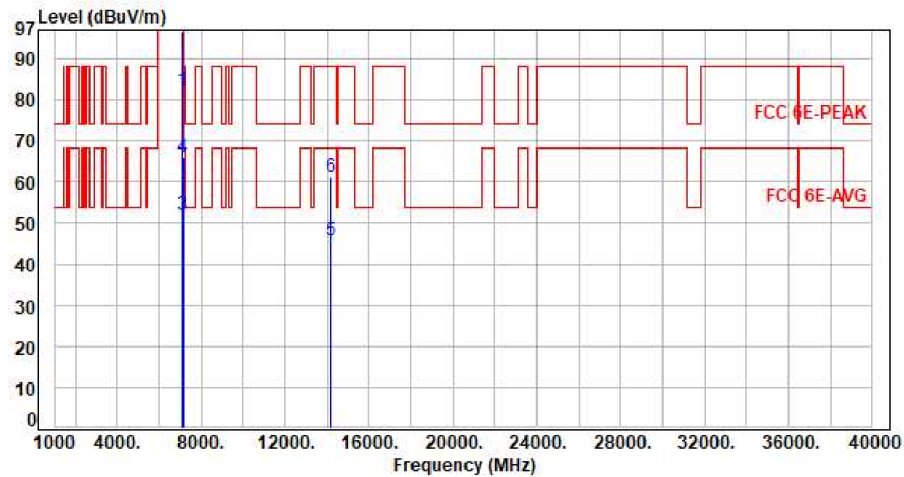


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	4.64	77.58	82.22	200.00	-117.78	Average	106	186	P
2	7095.00	4.64	92.02	96.66	200.00	-103.34	Peak	106	186	P
3	7125.00	4.64	47.19	51.83	68.20	-16.37	Average	106	186	P
4	7125.00	4.64	61.42	66.06	88.20	-22.14	Peak	106	186	P
5	14190.00	5.58	40.17	45.75	68.20	-22.45	Average	100	234	P
6	14190.00	5.58	55.59	61.17	88.20	-27.03	Peak	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

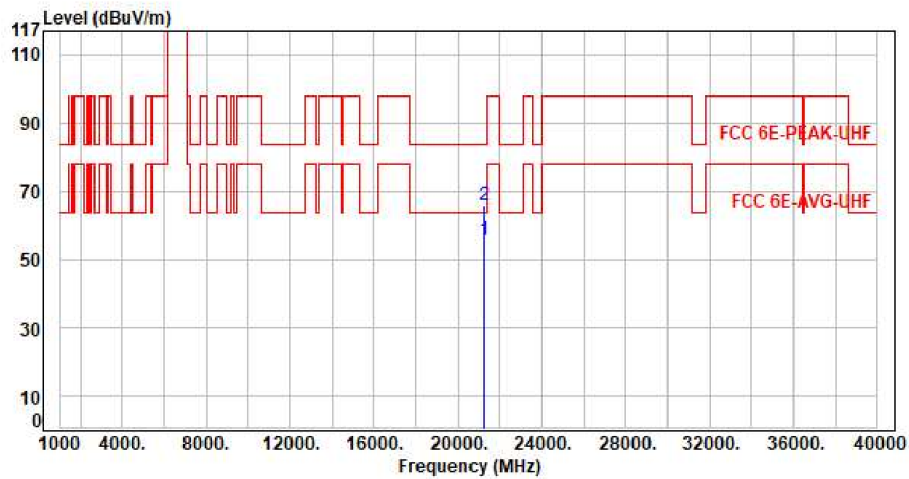


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	12.33	43.31	55.64	63.54	-7.90	Average	150	360	P
2	21285.00	12.33	53.58	65.91	83.54	-17.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

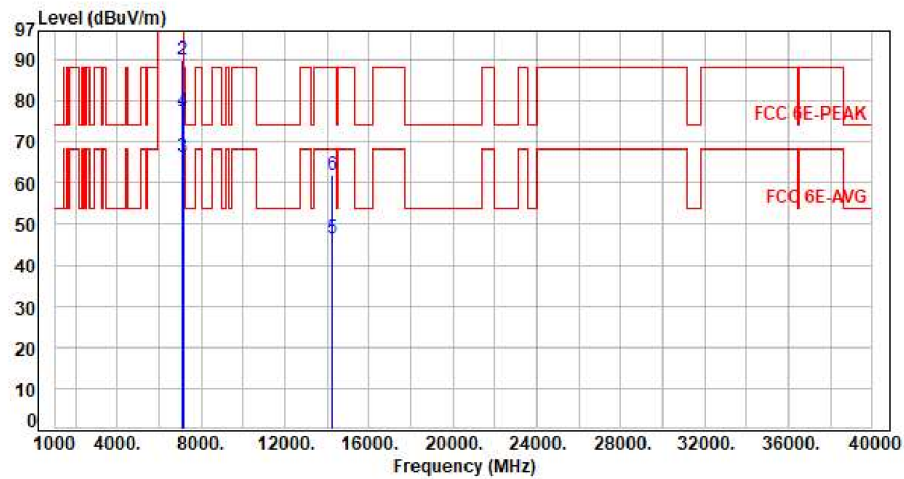


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	4.63	70.66	75.29	200.00	-124.71	Average	100	221	P
2	7115.00	4.63	85.26	89.89	200.00	-110.11	Peak	100	221	P
3	7125.00	4.64	61.70	66.34	68.20	-1.86	Average	100	221	P
4	7125.00	4.64	72.97	77.61	88.20	-10.59	Peak	100	221	P
5	14230.00	5.70	40.69	46.39	68.20	-21.81	Average	100	162	P
6	14230.00	5.70	56.36	62.06	88.20	-26.14	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

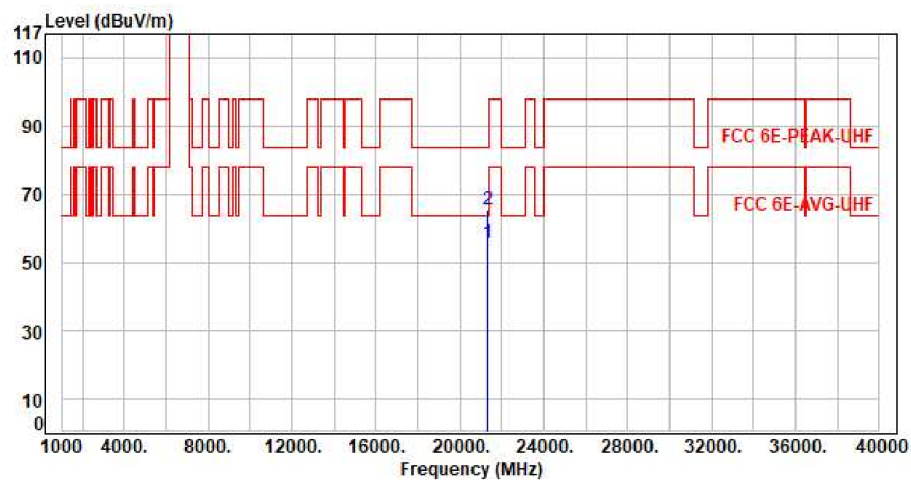


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	12.14	43.28	55.42	63.54	-8.12	Average	150	360	P
2	21345.00	12.14	53.32	65.46	83.54	-18.08	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

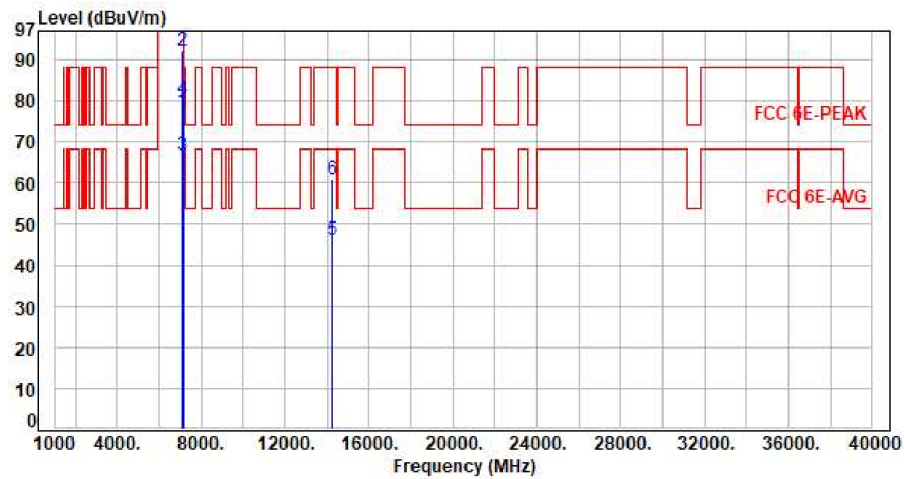


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	4.63	72.98	77.61	200.00	-122.39	Average	100	186	P
2	7115.00	4.63	87.53	92.16	200.00	-107.84	Peak	100	186	P
3	7125.00	4.64	62.22	66.86	68.20	-1.34	Average	100	186	P
4	7125.00	4.64	75.84	80.48	88.20	-7.72	Peak	100	186	P
5	14230.00	5.70	40.43	46.13	68.20	-22.07	Average	100	226	P
6	14230.00	5.70	55.21	60.91	88.20	-27.29	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

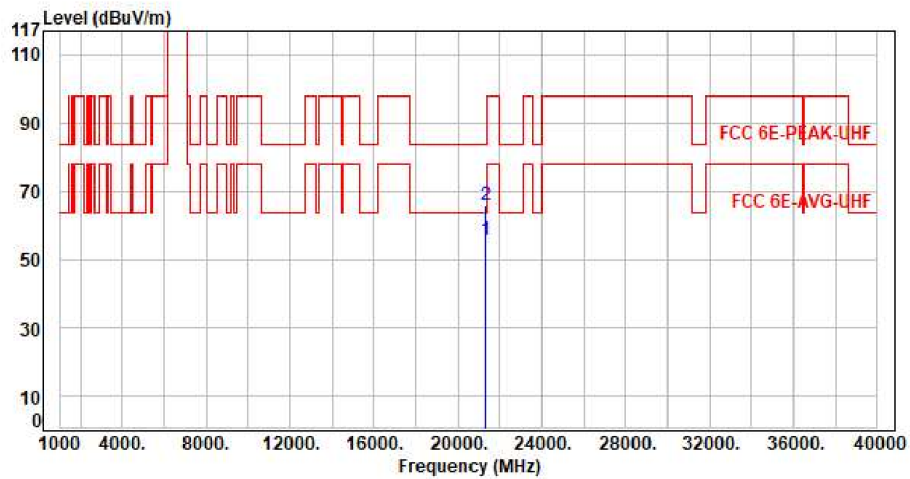


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	12.14	43.40	55.54	63.54	-8.00	Average	150	360	P
2	21345.00	12.14	53.64	65.78	83.54	-17.76	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

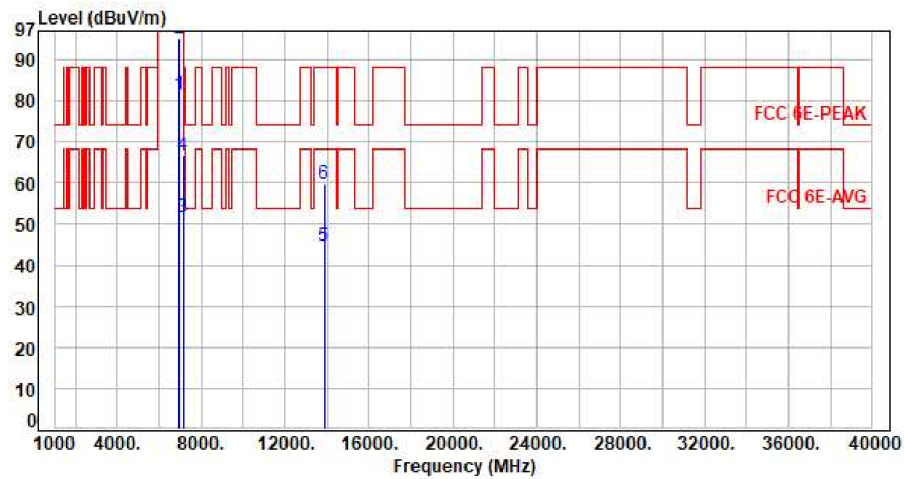


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	3.39	77.96	81.35	200.00	-118.65	Average	224	62	P
2	6925.00	3.39	91.84	95.23	200.00	-104.77	Peak	224	62	P
3	7125.00	4.64	47.08	51.72	68.20	-16.48	Average	224	62	P
4	7125.00	4.64	62.06	66.70	88.20	-21.50	Peak	224	62	P
5	13850.00	4.12	40.37	44.49	68.20	-23.71	Average	100	168	P
6	13850.00	4.12	55.47	59.59	88.20	-28.61	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

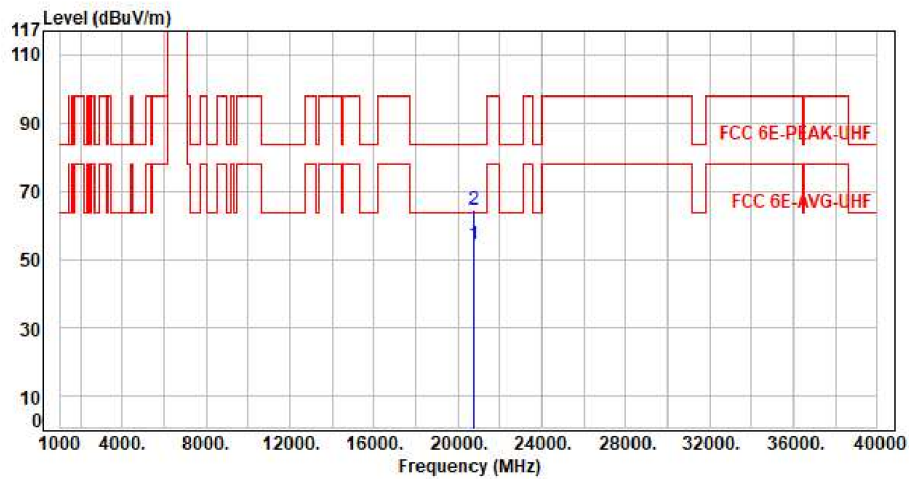


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.14	43.32	54.46	63.54	-9.08	Average	150	360	P
2	20775.00	11.14	53.47	64.61	83.54	-18.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

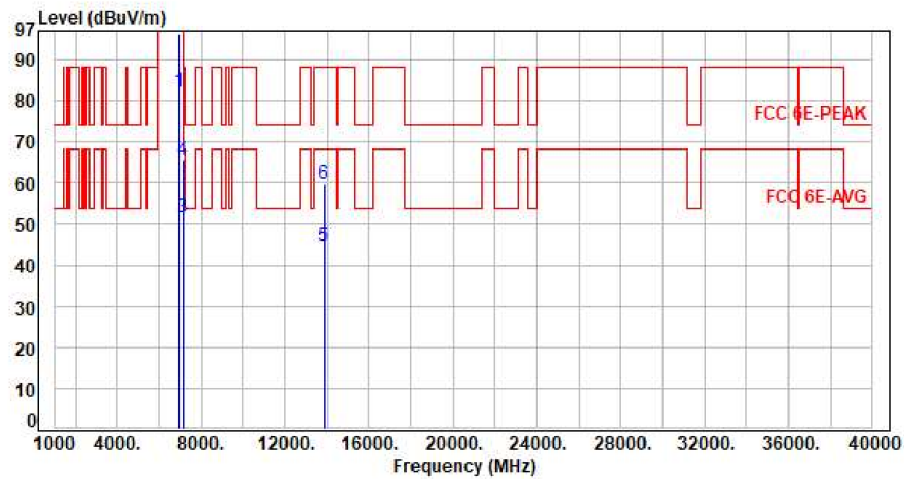

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	3.39	78.70	82.09	200.00	-117.91	Average	100	188	P
2	6925.00	3.39	92.99	96.38	200.00	-103.62	Peak	100	188	P
3	7125.00	4.64	47.07	51.71	68.20	-16.49	Average	100	188	P
4	7125.00	4.64	60.84	65.48	88.20	-22.72	Peak	100	188	P
5	13850.00	4.12	40.48	44.60	68.20	-23.60	Average	100	232	P
6	13850.00	4.12	55.73	59.85	88.20	-28.35	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor