




Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

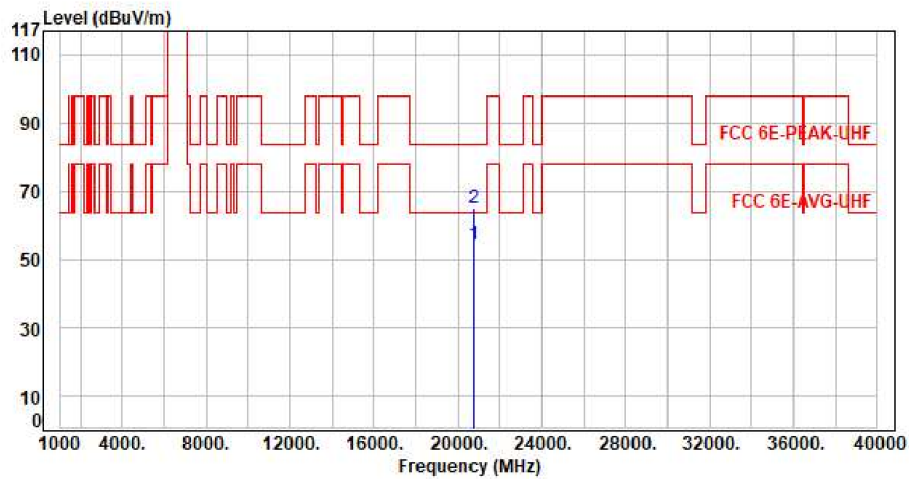


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.14	43.28	54.42	63.54	-9.12	Average	150	360	P
2	20775.00	11.14	53.62	64.76	83.54	-18.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

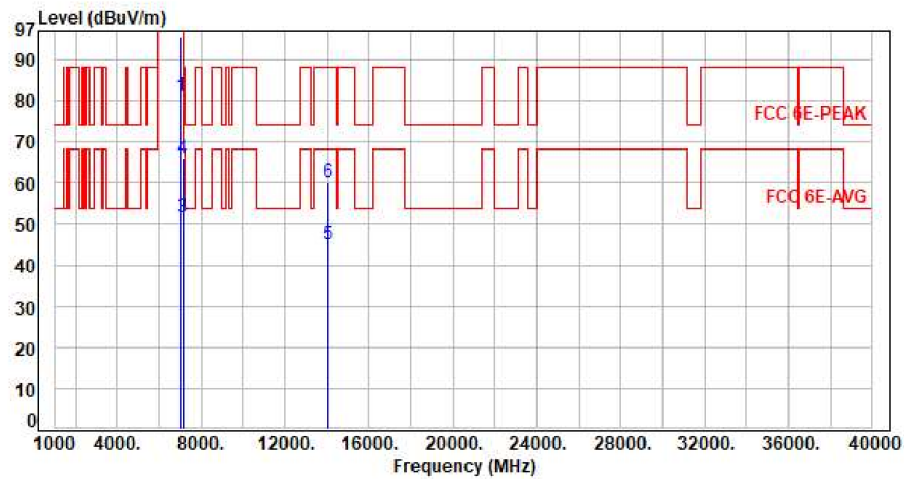


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	4.72	76.45	81.17	200.00	-118.83	Average	388	310	P
2	7005.00	4.72	90.73	95.45	200.00	-104.55	Peak	388	310	P
3	7125.00	4.64	47.02	51.66	68.20	-16.54	Average	388	310	P
4	7125.00	4.64	61.36	66.00	88.20	-22.20	Peak	388	310	P
5	14010.00	4.62	40.53	45.15	68.20	-23.05	Average	100	165	P
6	14010.00	4.62	55.44	60.06	88.20	-28.14	Peak	100	165	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

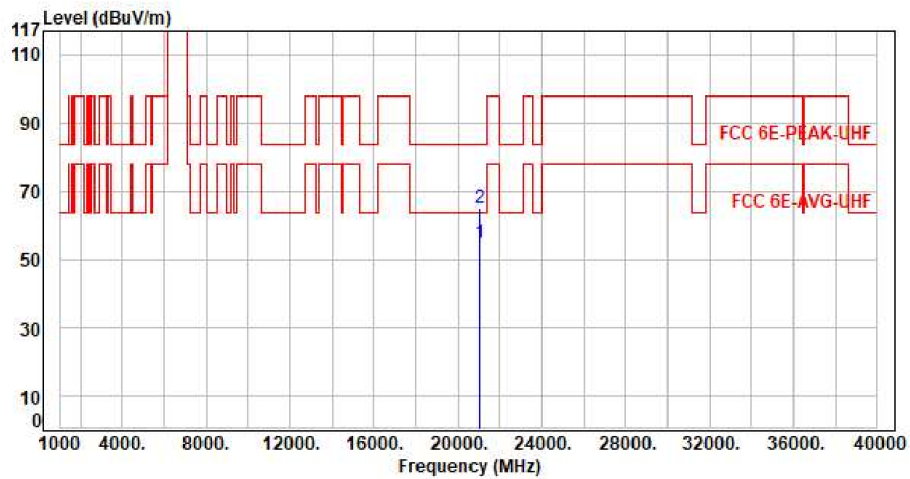

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.47	43.22	54.69	63.54	-8.85	Average	150	360	P
2	21015.00	11.47	53.48	64.95	83.54	-18.59	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

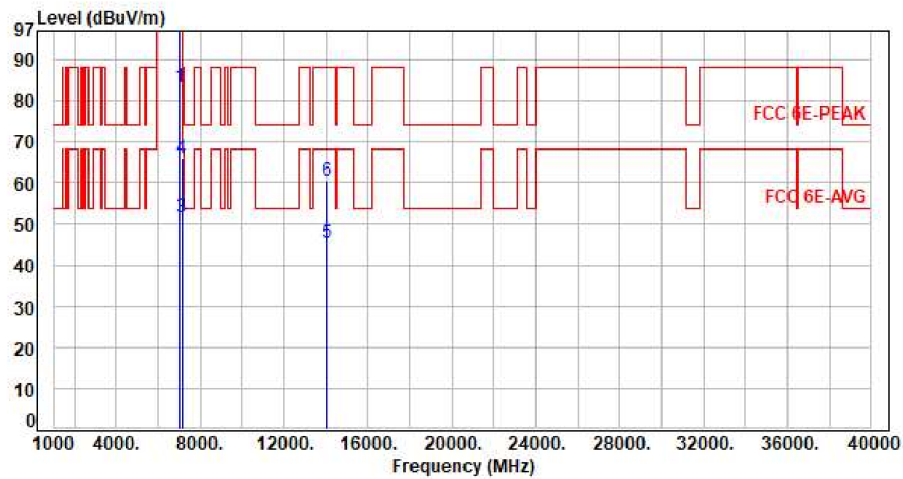


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	4.72	78.60	83.32	200.00	-116.68	Average	100	138	P
2	7005.00	4.72	92.86	97.58	200.00	-102.42	Peak	100	138	P
3	7125.00	4.64	47.04	51.68	68.20	-16.52	Average	100	138	P
4	7125.00	4.64	61.46	66.10	88.20	-22.10	Peak	100	138	P
5	14010.00	4.62	40.57	45.19	68.20	-23.01	Average	100	229	P
6	14010.00	4.62	55.86	60.48	88.20	-27.72	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

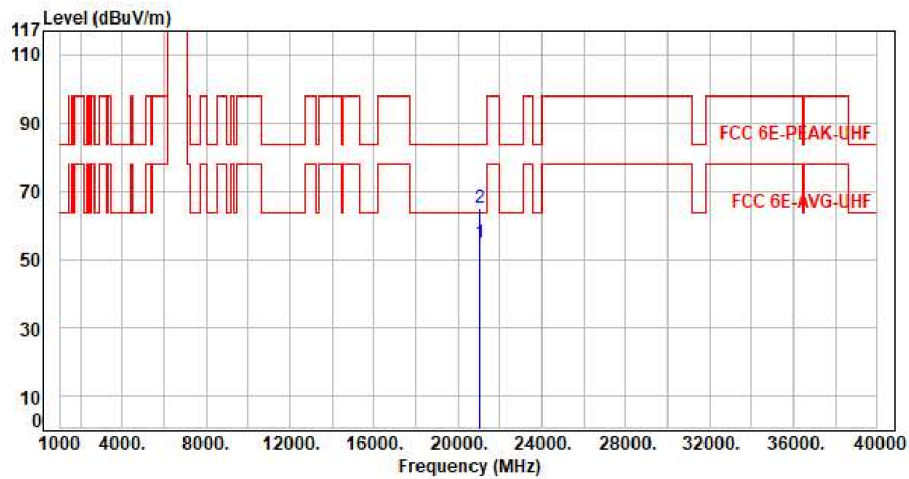

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.47	43.39	54.86	63.54	-8.68	Average	150	360	P
2	21015.00	11.47	53.52	64.99	83.54	-18.55	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

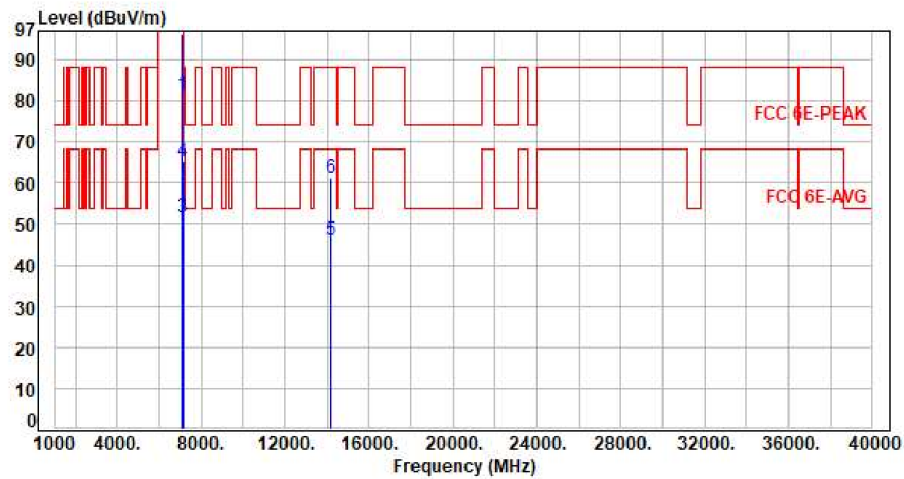


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	4.66	76.86	81.52	200.00	-118.48	Average	197	55	P
2	7085.00	4.66	91.55	96.21	200.00	-103.79	Peak	197	55	P
3	7125.00	4.64	47.06	51.70	68.20	-16.50	Average	197	55	P
4	7125.00	4.64	60.77	65.41	88.20	-22.79	Peak	197	55	P
5	14170.00	5.46	40.60	46.06	68.20	-22.14	Average	100	169	P
6	14170.00	5.46	55.85	61.31	88.20	-26.89	Peak	100	169	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

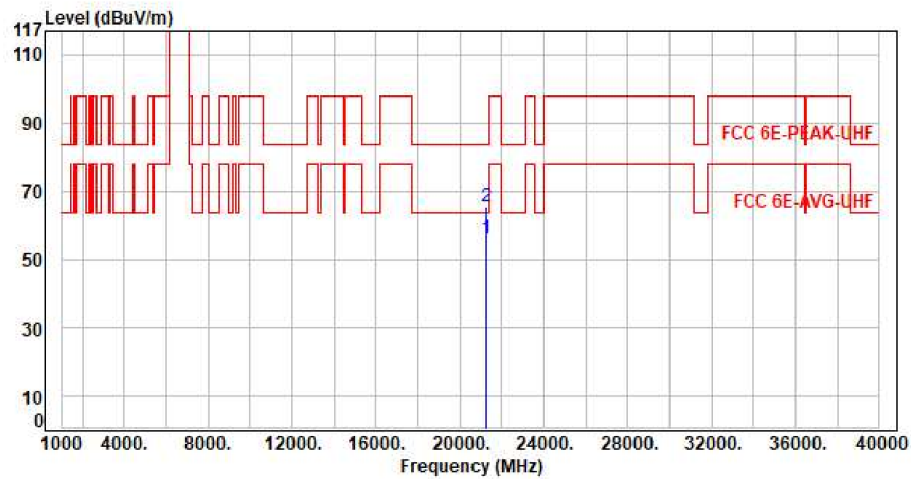


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	12.43	43.63	56.06	63.54	-7.48	Average	150	360	P
2	21255.00	12.43	53.15	65.58	83.54	-17.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

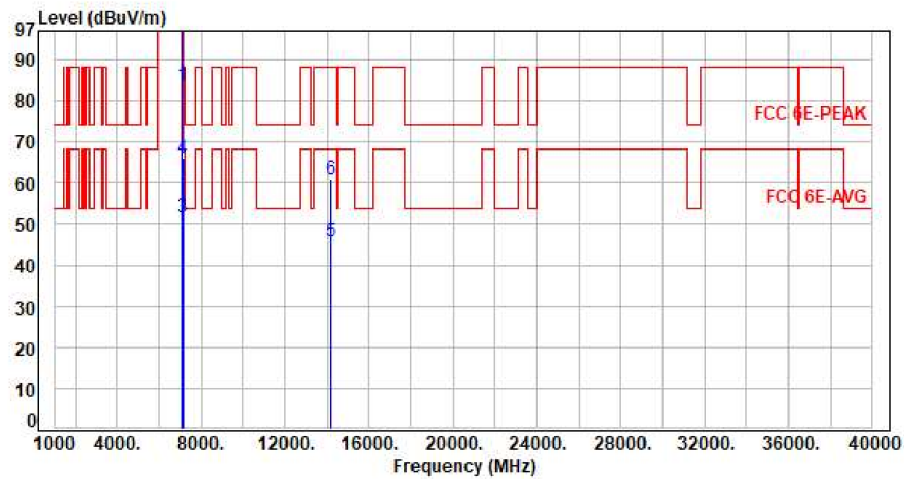


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	4.66	79.09	83.75	200.00	-116.25	Average	100	145	P
2	7085.00	4.66	93.58	98.24	200.00	-101.76	Peak	100	145	P
3	7125.00	4.64	47.08	51.72	68.20	-16.48	Average	100	145	P
4	7125.00	4.64	61.36	66.00	88.20	-22.20	Peak	100	145	P
5	14170.00	5.46	40.33	45.79	68.20	-22.41	Average	100	237	P
6	14170.00	5.46	55.48	60.94	88.20	-27.26	Peak	100	237	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

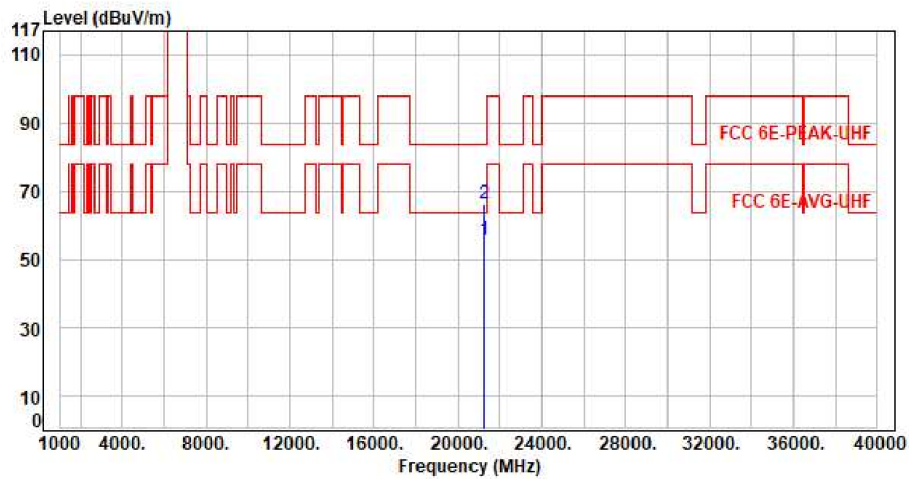

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	12.43	43.33	55.76	63.54	-7.78	Average	150	360	P
2	21255.00	12.43	53.75	66.18	83.54	-17.36	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

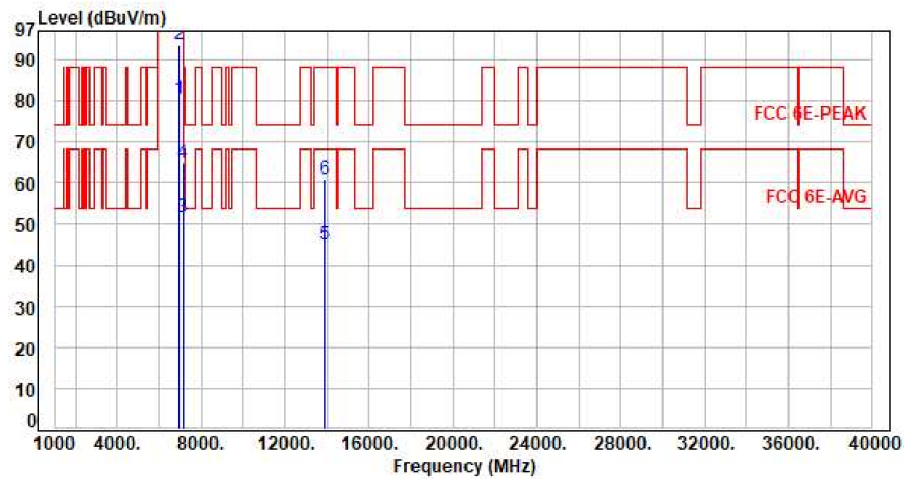


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	3.34	76.94	80.28	200.00	-119.72	Average	393	311	P
2	6945.00	3.34	90.42	93.76	200.00	-106.24	Peak	393	311	P
3	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	393	311	P
4	7125.00	4.64	60.37	65.01	88.20	-23.19	Peak	393	311	P
5	13890.00	4.35	40.83	45.18	68.20	-23.02	Average	100	160	P
6	13890.00	4.35	56.37	60.72	88.20	-27.48	Peak	100	160	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

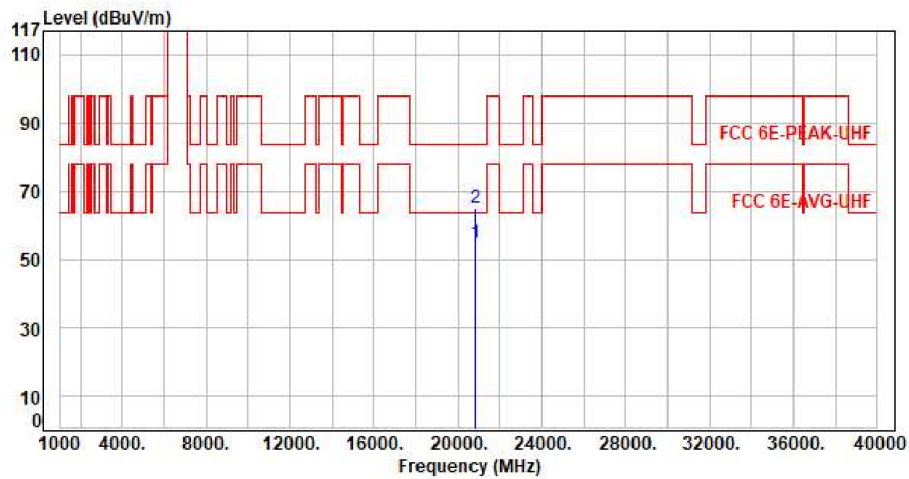


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.34	43.21	54.55	63.54	-8.99	Average	150	360	P
2	20835.00	11.34	53.79	65.13	83.54	-18.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

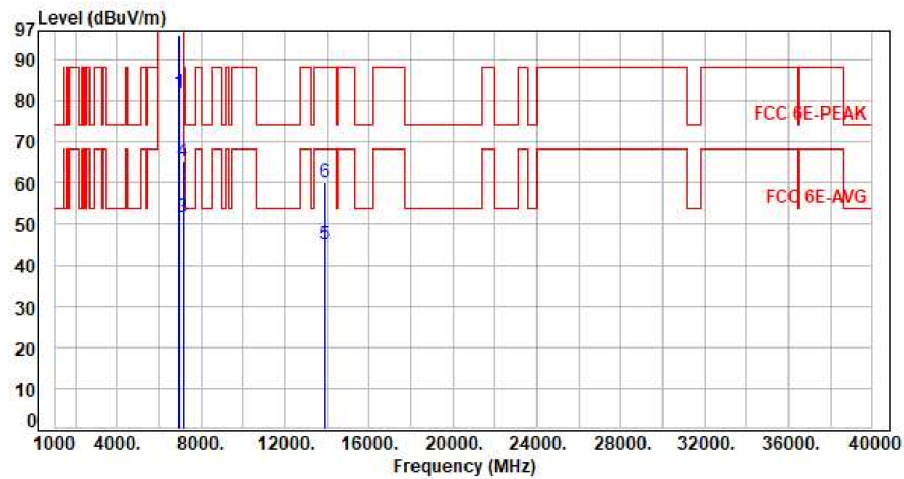


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	3.34	78.52	81.86	200.00	-118.14	Average	100	138	P
2	6945.00	3.34	92.54	95.88	200.00	-104.12	Peak	100	138	P
3	7125.00	4.64	47.07	51.71	68.20	-16.49	Average	100	138	P
4	7125.00	4.64	60.56	65.20	88.20	-23.00	Peak	100	138	P
5	13890.00	4.35	40.61	44.96	68.20	-23.24	Average	100	235	P
6	13890.00	4.35	55.66	60.01	88.20	-28.19	Peak	100	235	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

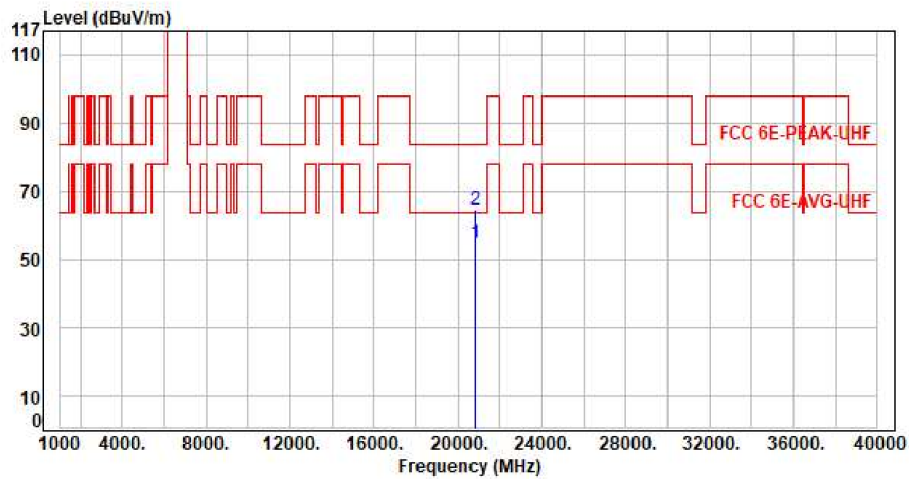


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.34	43.22	54.56	63.54	-8.98	Average	150	360	P
2	20835.00	11.34	53.38	64.72	83.54	-18.82	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

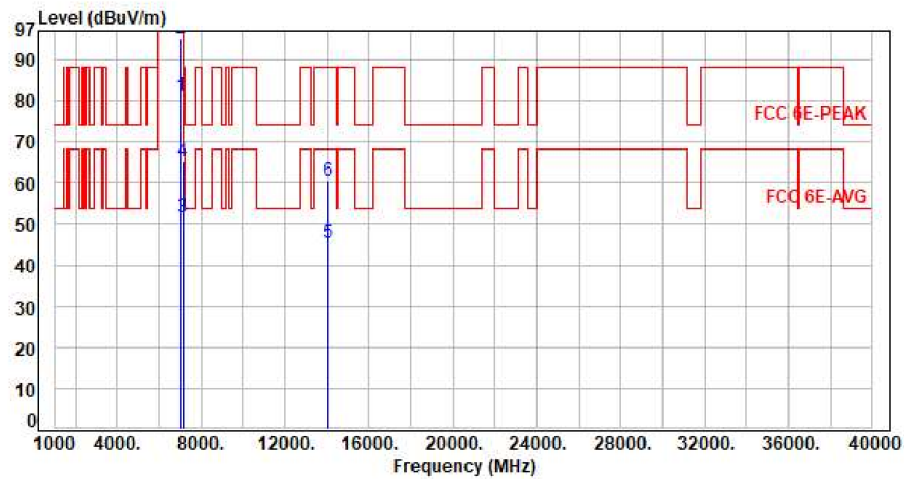


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	4.73	76.28	81.01	200.00	-118.99	Average	399	315	P
2	7025.00	4.73	90.56	95.29	200.00	-104.71	Peak	399	315	P
3	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	399	315	P
4	7125.00	4.64	60.79	65.43	88.20	-22.77	Peak	399	315	P
5	14050.00	4.85	40.39	45.24	68.20	-22.96	Average	100	166	P
6	14050.00	4.85	55.48	60.33	88.20	-27.87	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

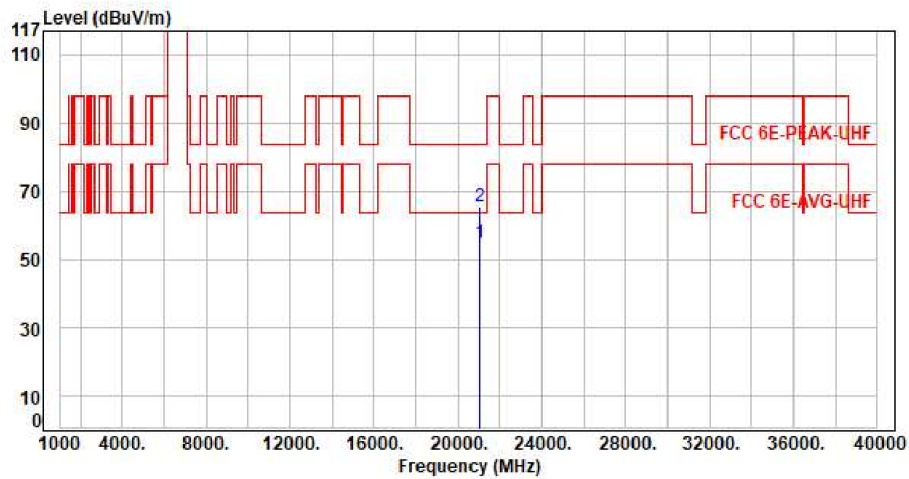

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.67	43.22	54.89	63.54	-8.65	Average	150	360	P
2	21075.00	11.67	53.87	65.54	83.54	-18.00	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

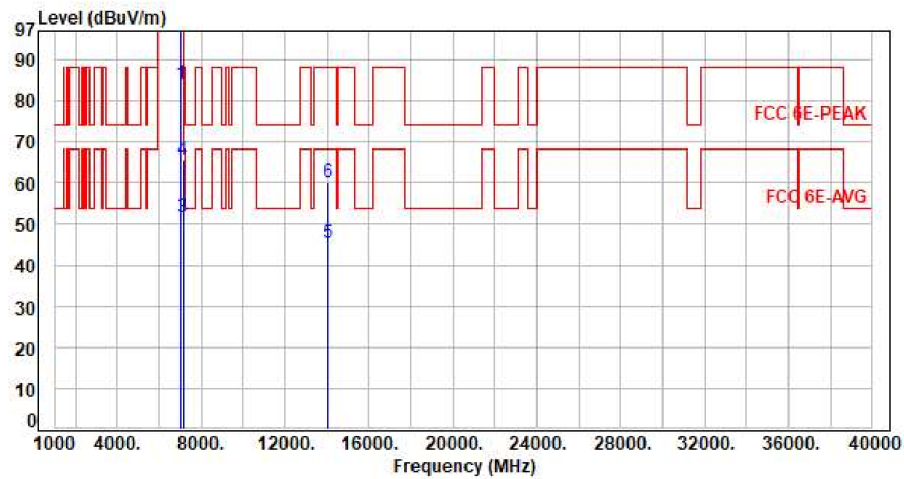


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	4.73	79.37	84.10	200.00	-115.90	Average	100	138	P
2	7025.00	4.73	93.03	97.76	200.00	-102.24	Peak	100	138	P
3	7125.00	4.64	47.03	51.67	68.20	-16.53	Average	100	138	P
4	7125.00	4.64	61.06	65.70	88.20	-22.50	Peak	100	138	P
5	14050.00	4.85	40.39	45.24	68.20	-22.96	Average	100	227	P
6	14050.00	4.85	55.45	60.30	88.20	-27.90	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

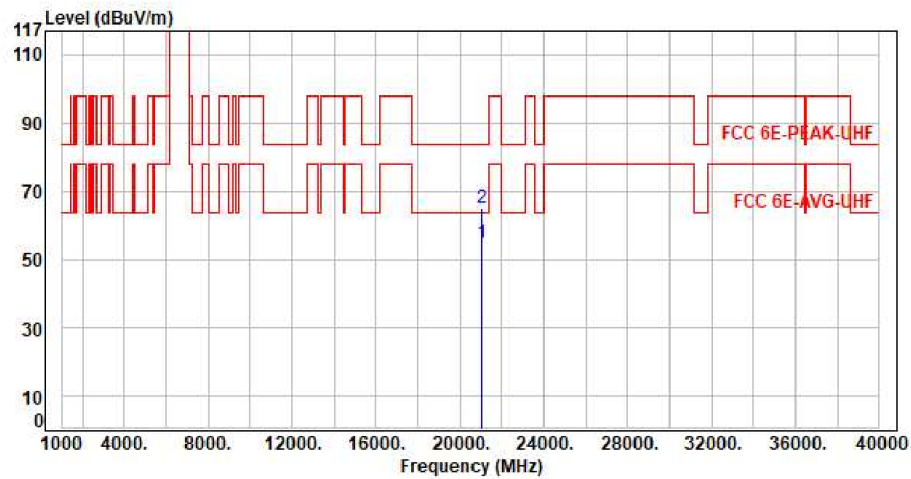

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.67	43.13	54.80	63.54	-8.74	Average	150	360	P
2	21075.00	11.67	53.29	64.96	83.54	-18.58	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor