




Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

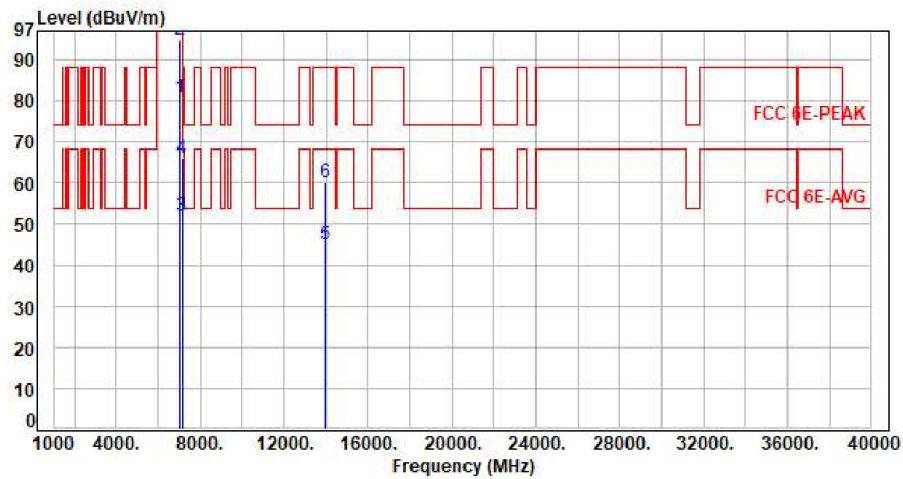


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	3.40	77.52	80.92	200.00	-119.08	Average	376	311	P
2	6985.00	3.40	91.25	94.65	200.00	-105.35	Peak	376	311	P
3	7125.00	4.64	47.35	51.99	68.20	-16.21	Average	376	311	P
4	7125.00	4.64	61.51	66.15	88.20	-22.05	Peak	376	311	P
5	13970.00	4.51	40.63	45.14	68.20	-23.06	Average	100	162	P
6	13970.00	4.51	55.48	59.99	88.20	-28.21	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

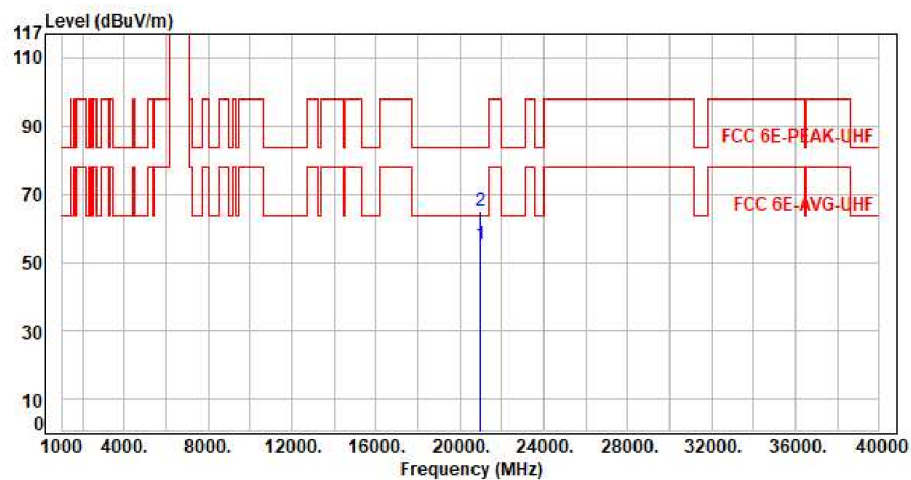


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.38	43.62	55.00	63.54	-8.54	Average	150	360	P
2	20955.00	11.38	53.36	64.74	83.54	-18.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

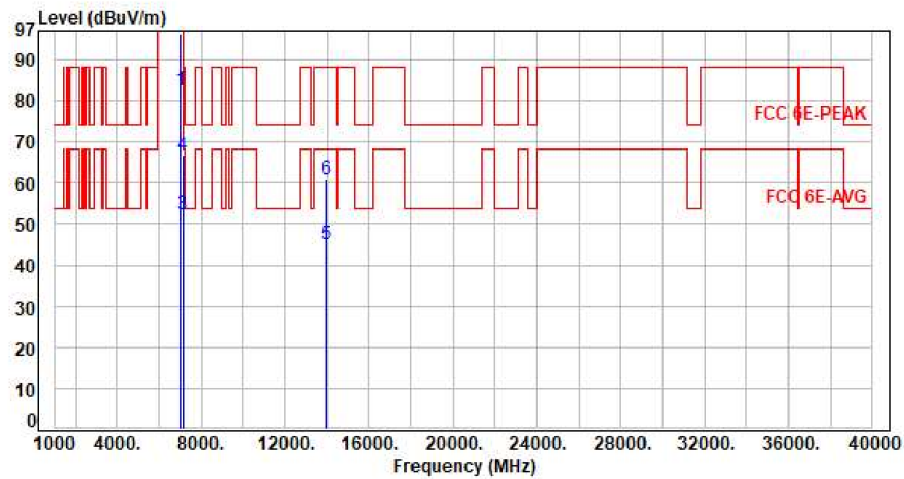


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	3.40	79.06	82.46	200.00	-117.54	Average	100	138	P
2	6985.00	3.40	92.92	96.32	200.00	-103.68	Peak	100	138	P
3	7125.00	4.64	47.74	52.38	68.20	-15.82	Average	100	138	P
4	7125.00	4.64	62.01	66.65	88.20	-21.55	Peak	100	138	P
5	13970.00	4.51	40.57	45.08	68.20	-23.12	Average	100	234	P
6	13970.00	4.51	56.50	61.01	88.20	-27.19	Peak	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

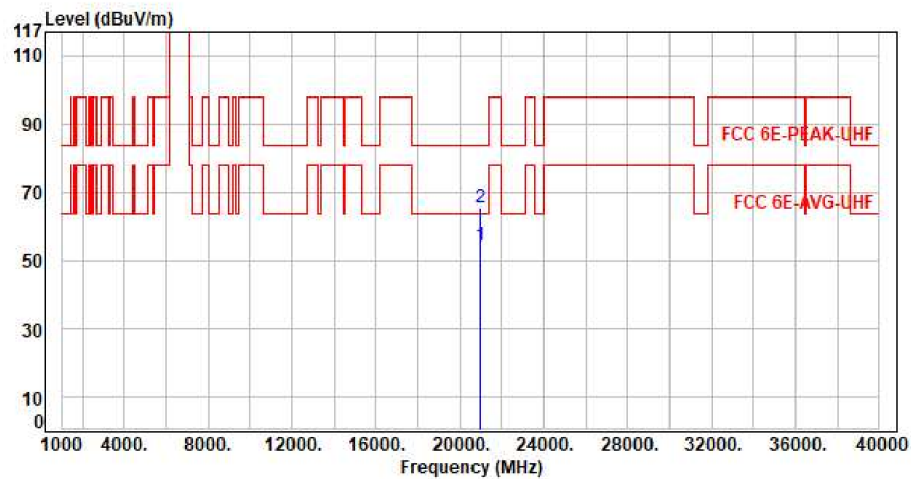


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.38	43.08	54.46	63.54	-9.08	Average	150	360	P
2	20955.00	11.38	53.88	65.26	83.54	-18.28	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

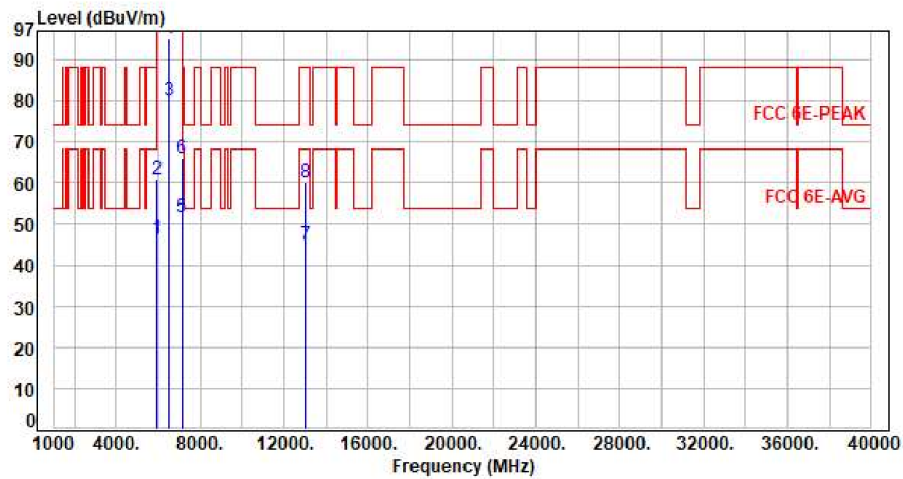


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.50	46.35	68.20	-21.85	Average	399	352	P
2	5925.00	0.85	59.97	60.82	88.20	-27.38	Peak	399	352	P
3	6525.00	3.14	76.98	80.12	200.00	-119.88	Average	399	352	P
4	6525.00	3.14	92.12	95.26	200.00	-104.74	Peak	399	352	P
5	7125.00	4.64	47.01	51.65	68.20	-16.55	Average	399	352	P
6	7125.00	4.64	61.31	65.95	88.20	-22.25	Peak	399	352	P
7	13050.00	4.31	40.56	44.87	68.20	-23.33	Average	100	165	P
8	13050.00	4.31	55.87	60.18	88.20	-28.02	Peak	100	165	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

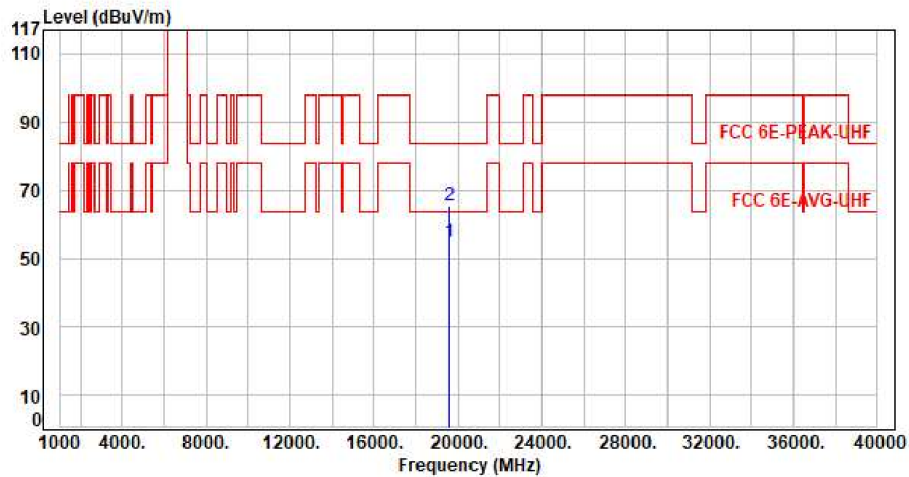


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	11.62	43.25	54.87	63.54	-8.67	Average	150	360	P
2	19575.00	11.62	53.95	65.57	83.54	-17.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

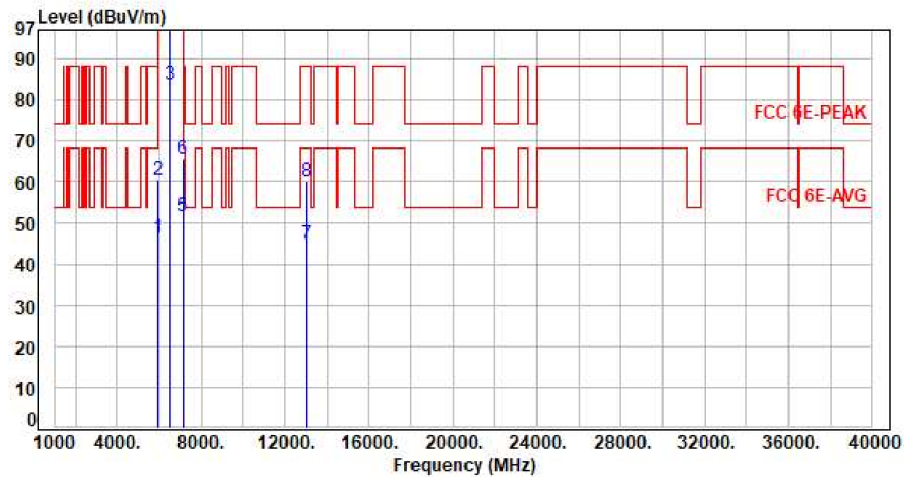


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.45	46.30	68.20	-21.90	Average	100	178	P
2	5925.00	0.85	59.65	60.50	88.20	-27.70	Peak	100	178	P
3	6525.00	3.14	80.45	83.59	200.00	-116.41	Average	100	178	P
4	6525.00	3.14	94.88	98.02	200.00	-101.98	Peak	100	178	P
5	7125.00	4.64	47.01	51.65	68.20	-16.55	Average	100	178	P
6	7125.00	4.64	61.11	65.75	88.20	-22.45	Peak	100	178	P
7	13050.00	4.31	40.77	45.08	68.20	-23.12	Average	100	234	P
8	13050.00	4.31	55.94	60.25	88.20	-27.95	Peak	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

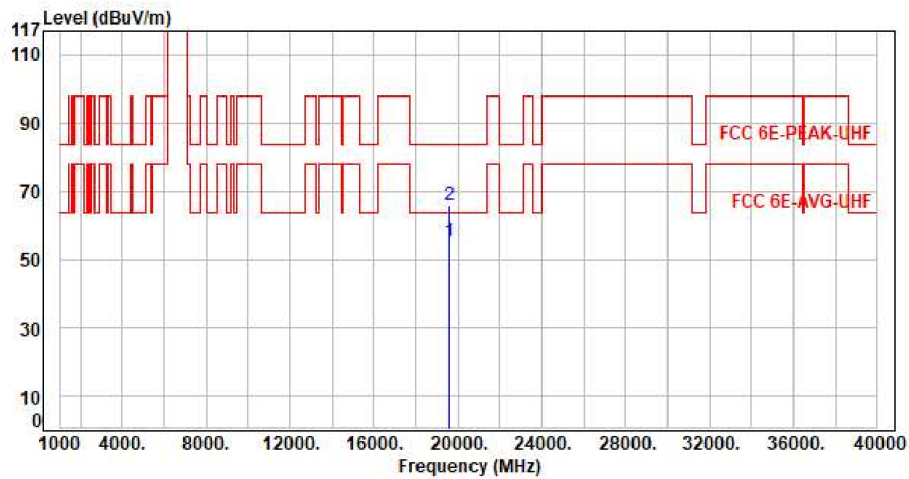

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	11.62	43.59	55.21	63.54	-8.33	Average	150	360	P
2	19575.00	11.62	54.10	65.72	83.54	-17.82	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

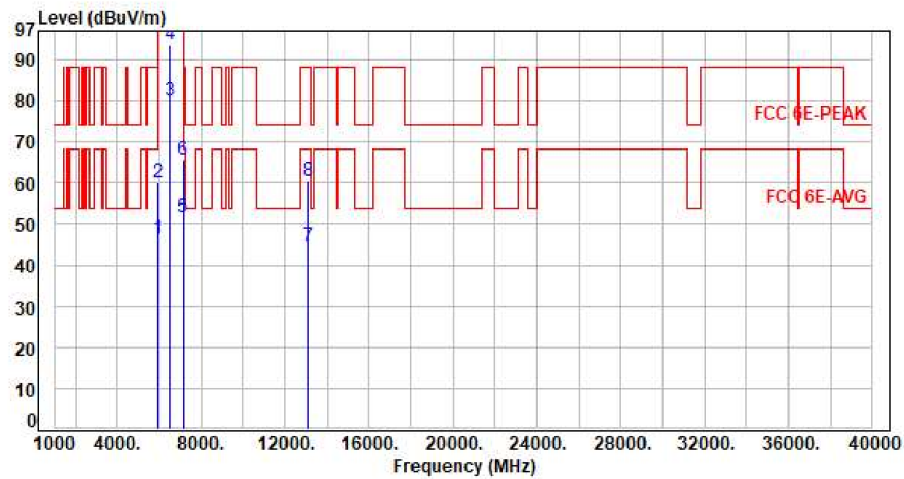

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.52	46.37	68.20	-21.83	Average	210	65	P
2	5925.00	0.85	59.44	60.29	88.20	-27.91	Peak	210	65	P
3	6545.00	3.17	76.82	79.99	200.00	-120.01	Average	210	65	P
4	6545.00	3.17	90.43	93.60	200.00	-106.40	Peak	210	65	P
5	7125.00	4.64	47.02	51.66	68.20	-16.54	Average	210	65	P
6	7125.00	4.64	61.00	65.64	88.20	-22.56	Peak	210	65	P
7	13090.00	4.32	40.39	44.71	68.20	-23.49	Average	100	166	P
8	13090.00	4.32	56.17	60.49	88.20	-27.71	Peak	100	166	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

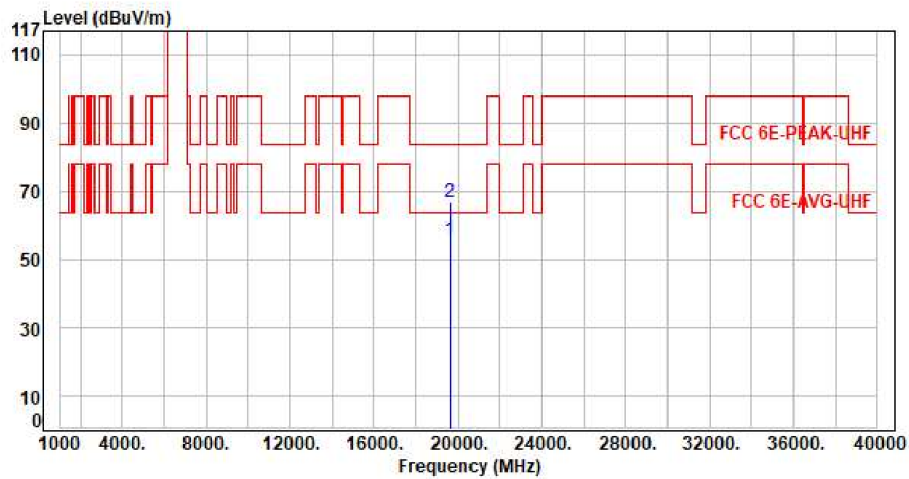


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.87	43.65	55.52	63.54	-8.02	Average	150	360	P
2	19635.00	11.87	54.75	66.62	83.54	-16.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

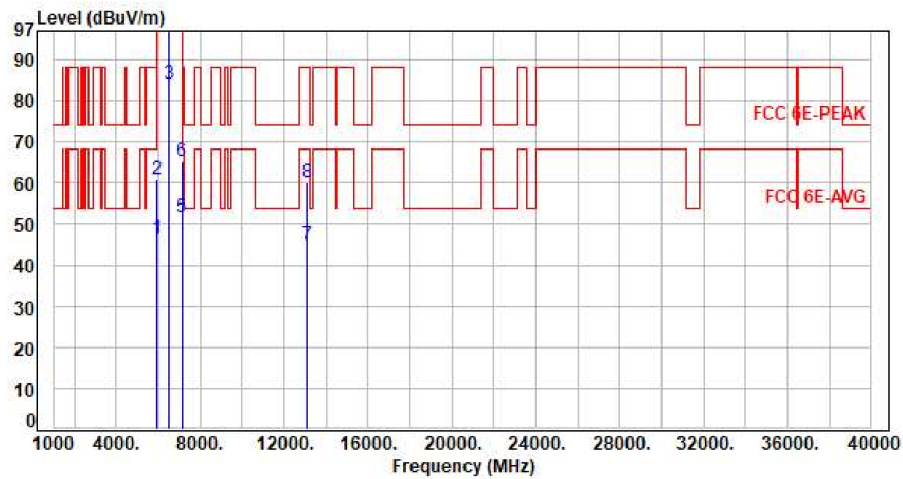


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.47	46.32	68.20	-21.88	Average	100	178	P
2	5925.00	0.85	60.00	60.85	88.20	-27.35	Peak	100	178	P
3	6545.00	3.17	80.85	84.02	200.00	-115.98	Average	100	178	P
4	6545.00	3.17	95.19	98.36	200.00	-101.64	Peak	100	178	P
5	7125.00	4.64	47.04	51.68	68.20	-16.52	Average	100	178	P
6	7125.00	4.64	60.72	65.36	88.20	-22.84	Peak	100	178	P
7	13090.00	4.32	40.66	44.98	68.20	-23.22	Average	100	226	P
8	13090.00	4.32	55.79	60.11	88.20	-28.09	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

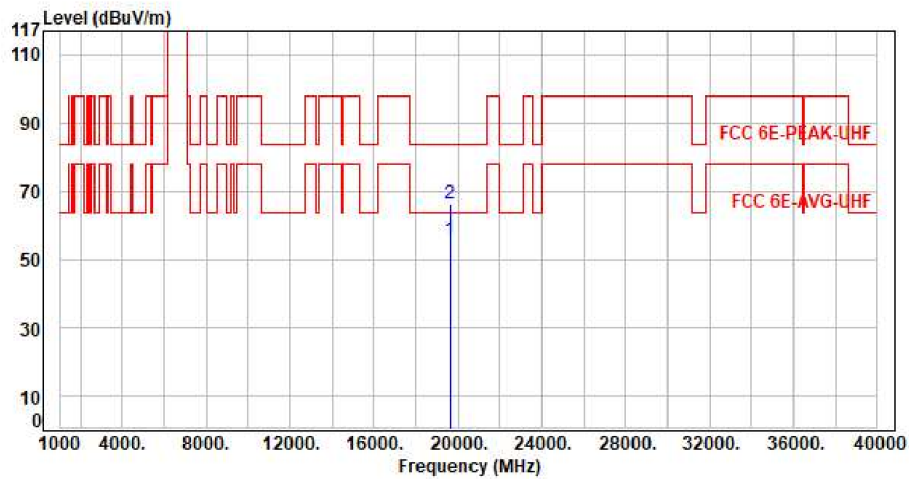


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.87	43.74	55.61	63.54	-7.93	Average	150	360	P
2	19635.00	11.87	54.27	66.14	83.54	-17.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

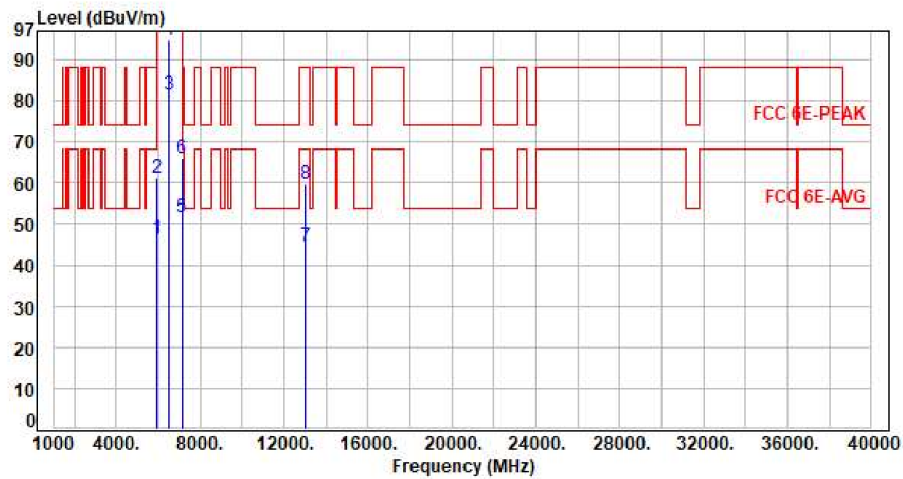


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.53	46.38	68.20	-21.82	Average	202	68	P
2	5925.00	0.85	60.19	61.04	88.20	-27.16	Peak	202	68	P
3	6505.00	3.10	78.50	81.60	200.00	-118.40	Average	202	68	P
4	6505.00	3.10	91.66	94.76	200.00	-105.24	Peak	202	68	P
5	7125.00	4.64	47.01	51.65	68.20	-16.55	Average	202	68	P
6	7125.00	4.64	61.26	65.90	88.20	-22.30	Peak	202	68	P
7	13010.00	4.38	40.38	44.76	68.20	-23.44	Average	100	164	P
8	13010.00	4.38	55.51	59.89	88.20	-28.31	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

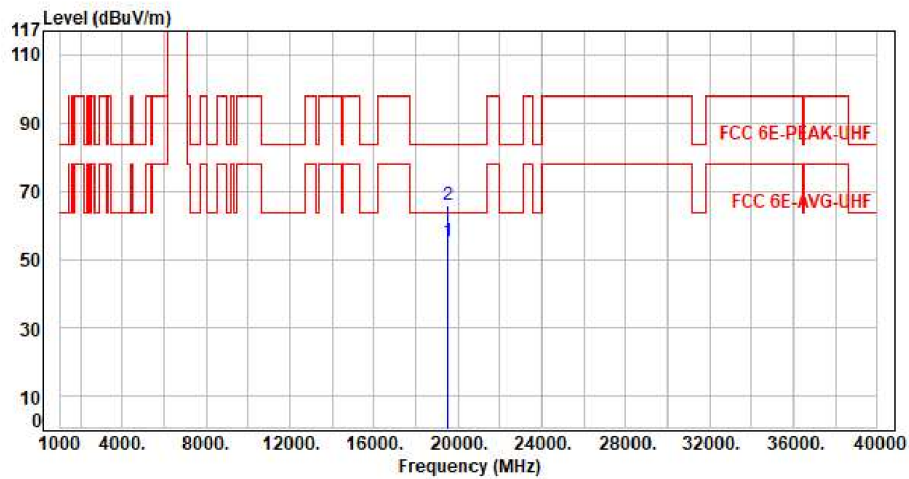

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.59	43.54	55.13	63.54	-8.41	Average	150	360	P
2	19515.00	11.59	54.09	65.68	83.54	-17.86	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

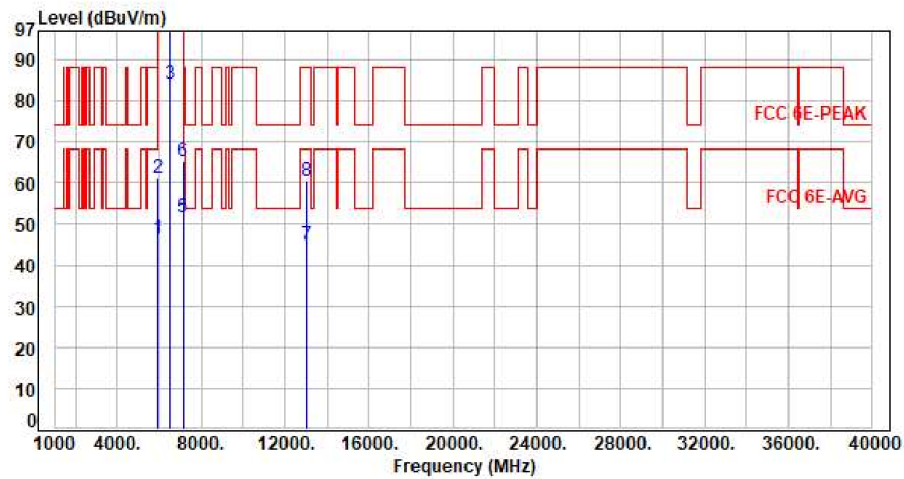


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.48	46.33	68.20	-21.87	Average	100	179	P
2	5925.00	0.85	60.46	61.31	88.20	-26.89	Peak	100	179	P
3	6505.00	3.10	81.11	84.21	200.00	-115.79	Average	100	179	P
4	6505.00	3.10	94.32	97.42	200.00	-102.58	Peak	100	179	P
5	7125.00	4.64	47.00	51.64	68.20	-16.56	Average	100	179	P
6	7125.00	4.64	60.79	65.43	88.20	-22.77	Peak	100	179	P
7	13010.00	4.38	40.54	44.92	68.20	-23.28	Average	100	232	P
8	13010.00	4.38	55.93	60.31	88.20	-27.89	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

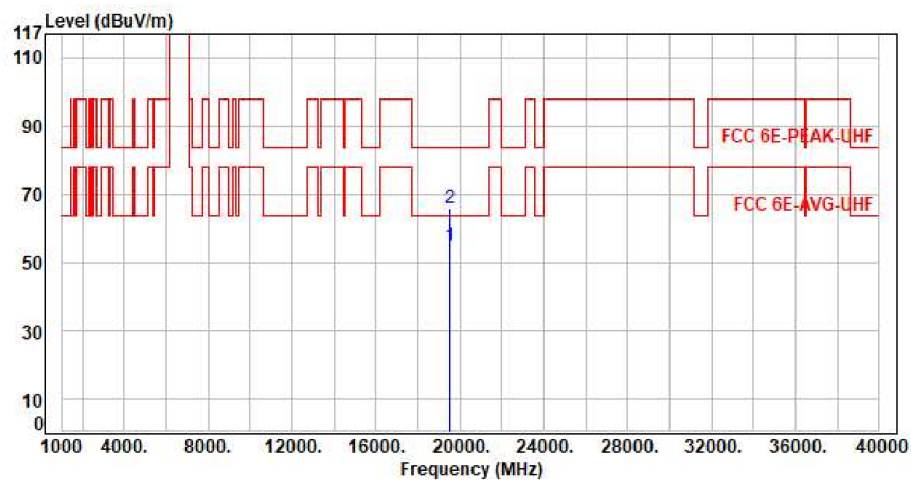

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.59	43.23	54.82	63.54	-8.72	Average	150	360	P
2	19515.00	11.59	54.41	66.00	83.54	-17.54	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

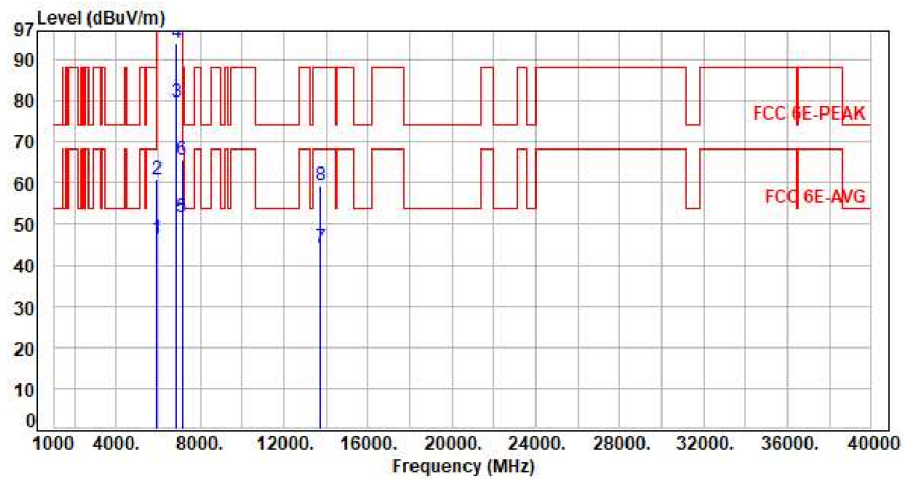

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.45	46.30	68.20	-21.90	Average	197	58	P
2	5925.00	0.85	59.91	60.76	88.20	-27.44	Peak	197	58	P
3	6875.00	3.45	76.37	79.82	200.00	-120.18	Average	197	58	P
4	6875.00	3.45	90.50	93.95	200.00	-106.05	Peak	197	58	P
5	7125.00	4.64	47.01	51.65	68.20	-16.55	Average	197	58	P
6	7125.00	4.64	60.95	65.59	88.20	-22.61	Peak	197	58	P
7	13750.00	3.98	40.11	44.09	68.20	-24.11	Average	100	167	P
8	13750.00	3.98	55.33	59.31	88.20	-28.89	Peak	100	167	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor