




Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

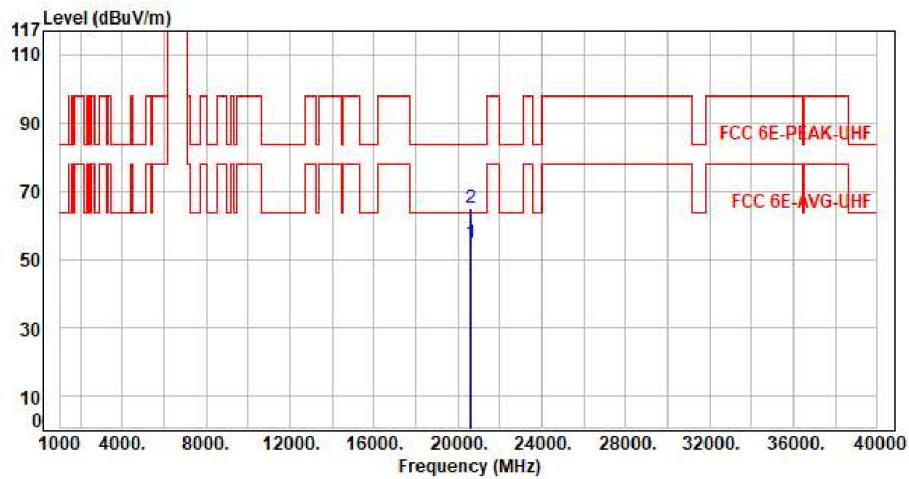


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.04	43.87	54.91	63.54	-8.63	Average	150	360	P
2	20625.00	11.04	54.05	65.09	83.54	-18.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

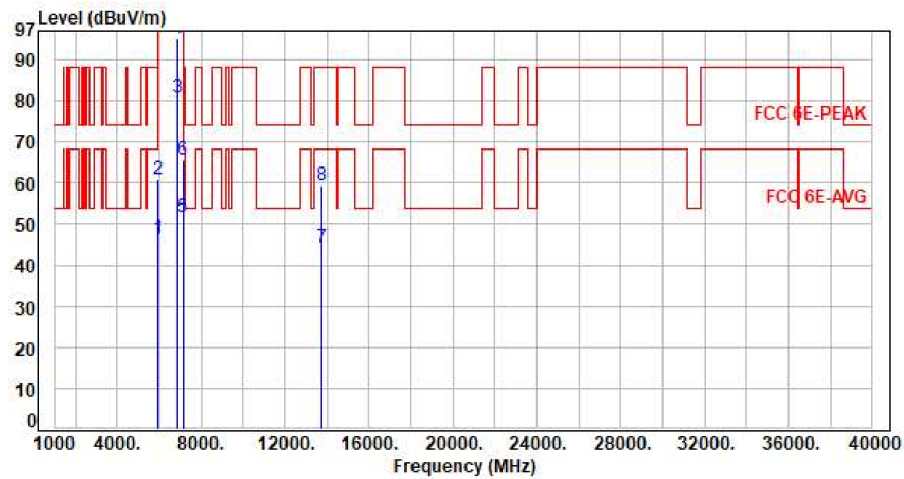


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.53	46.38	68.20	-21.82	Average	105	189	P
2	5925.00	0.85	59.95	60.80	88.20	-27.40	Peak	105	189	P
3	6875.00	3.45	77.22	80.67	200.00	-119.33	Average	105	189	P
4	6875.00	3.45	91.66	95.11	200.00	-104.89	Peak	105	189	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	105	189	P
6	7125.00	4.64	61.16	65.80	88.20	-22.40	Peak	105	189	P
7	13750.00	3.98	40.36	44.34	68.20	-23.86	Average	100	225	P
8	13750.00	3.98	55.47	59.45	88.20	-28.75	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

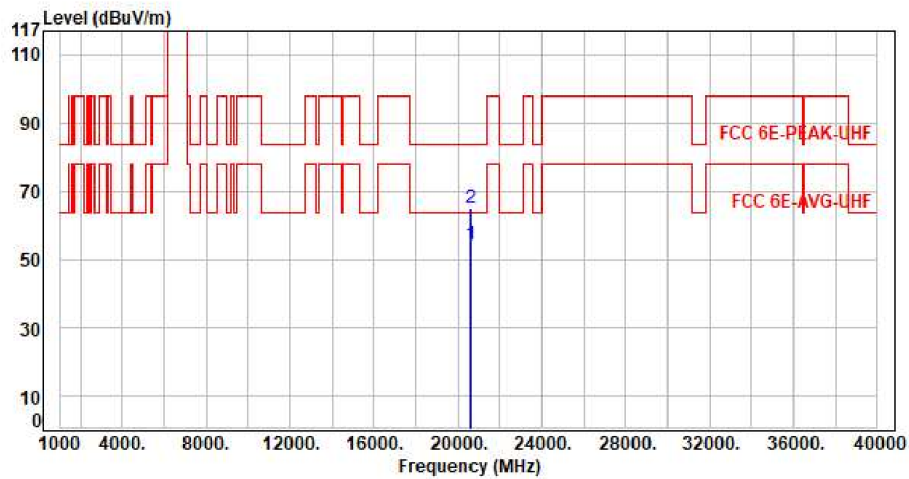


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.04	43.18	54.22	63.54	-9.32	Average	150	360	P
2	20625.00	11.04	54.11	65.15	83.54	-18.39	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

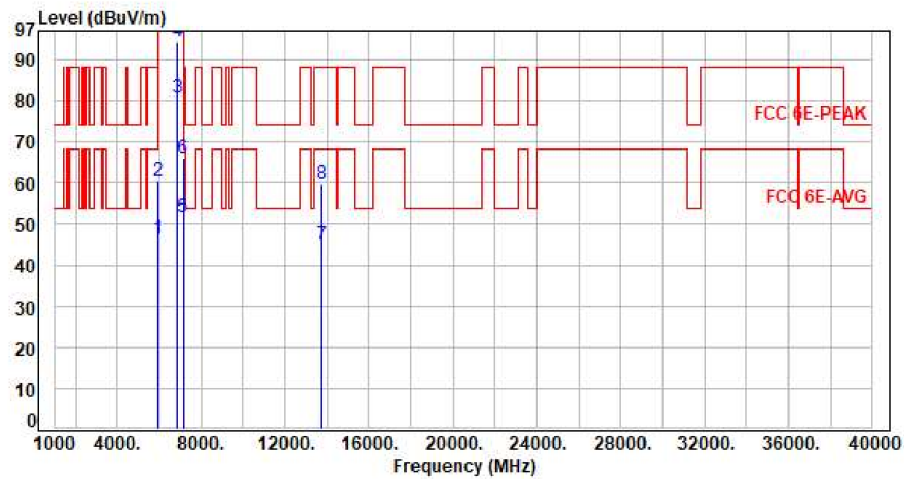

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.55	46.40	68.20	-21.80	Average	209	66	P
2	5925.00	0.85	59.80	60.65	88.20	-27.55	Peak	209	66	P
3	6885.00	3.44	77.47	80.91	200.00	-119.09	Average	209	66	P
4	6885.00	3.44	91.07	94.51	200.00	-105.49	Peak	209	66	P
5	7125.00	4.64	46.99	51.63	68.20	-16.57	Average	209	66	P
6	7125.00	4.64	61.35	65.99	88.20	-22.21	Peak	209	66	P
7	13770.00	3.95	40.90	44.85	68.20	-23.35	Average	100	159	P
8	13770.00	3.95	55.74	59.69	88.20	-28.51	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

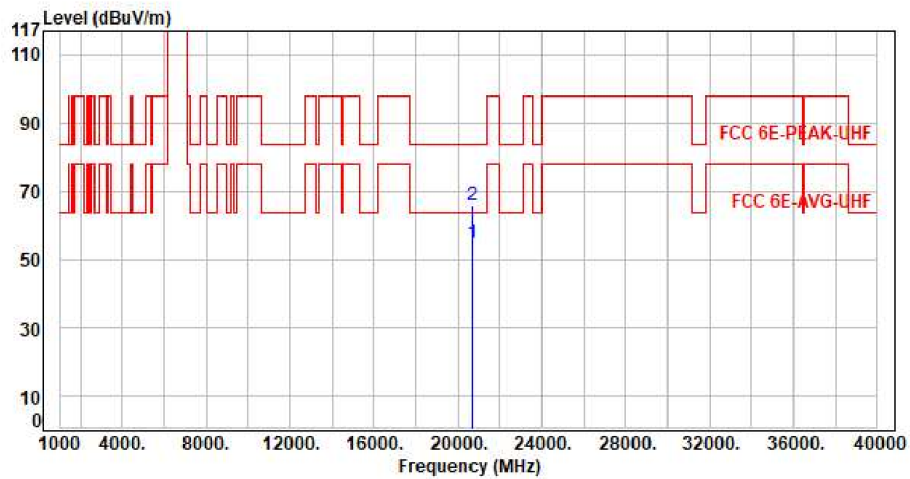

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	11.10	43.65	54.75	63.54	-8.79	Average	150	360	P
2	20655.00	11.10	54.57	65.67	83.54	-17.87	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

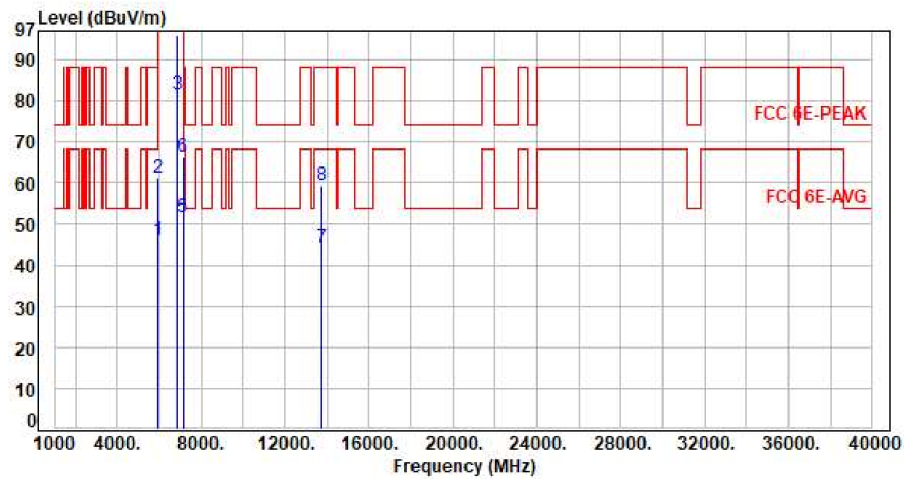


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.43	46.28	68.20	-21.92	Average	100	188	P
2	5925.00	0.85	60.43	61.28	88.20	-26.92	Peak	100	188	P
3	6885.00	3.44	77.99	81.43	200.00	-118.57	Average	100	188	P
4	6885.00	3.44	92.32	95.76	200.00	-104.24	Peak	100	188	P
5	7125.00	4.64	46.95	51.59	68.20	-16.61	Average	100	188	P
6	7125.00	4.64	61.73	66.37	88.20	-21.83	Peak	100	188	P
7	13770.00	3.95	40.39	44.34	68.20	-23.86	Average	100	230	P
8	13770.00	3.95	55.46	59.41	88.20	-28.79	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

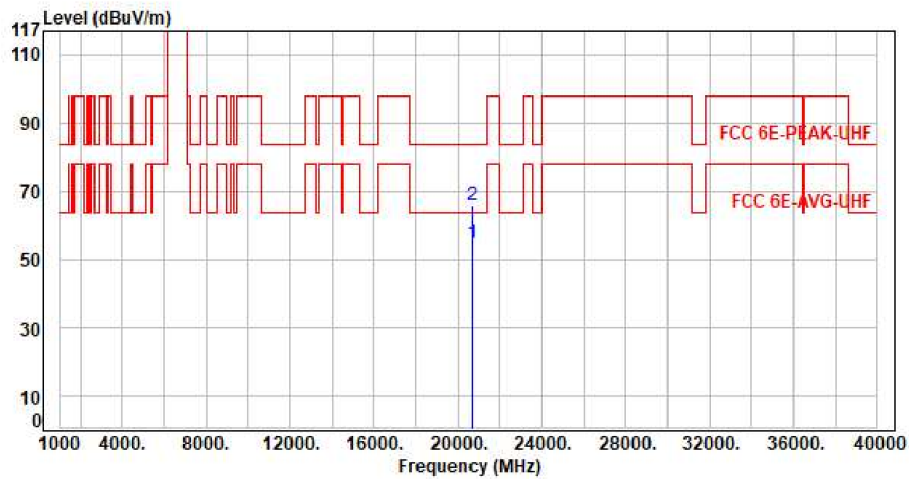


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	11.10	43.80	54.90	63.54	-8.64	Average	150	360	P
2	20655.00	11.10	54.87	65.97	83.54	-17.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

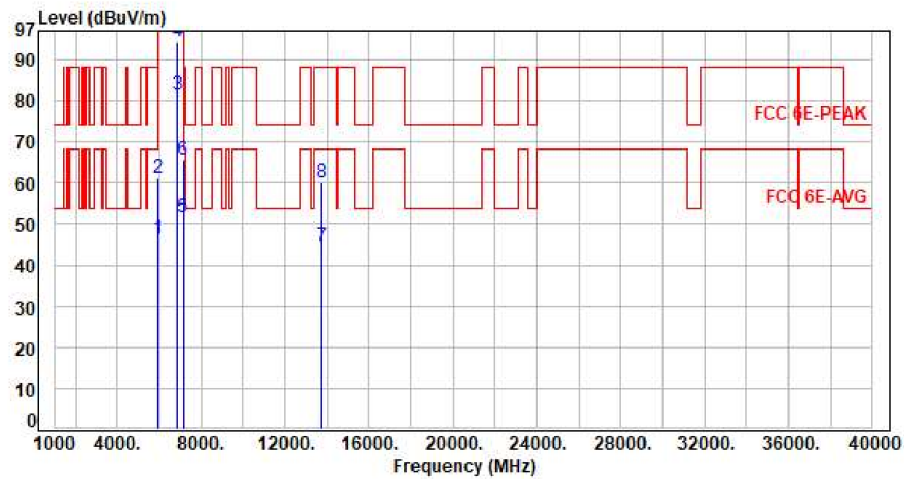


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.53	46.38	68.20	-21.82	Average	179	65	P
2	5925.00	0.85	60.52	61.37	88.20	-26.83	Peak	179	65	P
3	6865.00	3.45	78.09	81.54	200.00	-118.46	Average	179	65	P
4	6865.00	3.45	91.09	94.54	200.00	-105.46	Peak	179	65	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	179	65	P
6	7125.00	4.64	60.87	65.51	88.20	-22.69	Peak	179	65	P
7	13730.00	3.94	40.74	44.68	68.20	-23.52	Average	100	168	P
8	13730.00	3.94	56.08	60.02	88.20	-28.18	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

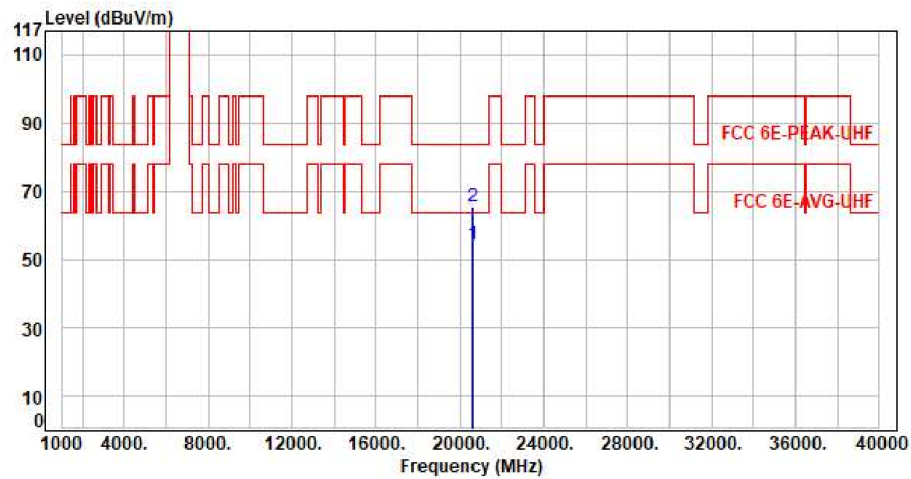

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.03	43.26	54.29	63.54	-9.25	Average	150	360	P
2	20595.00	11.03	54.16	65.19	83.54	-18.35	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

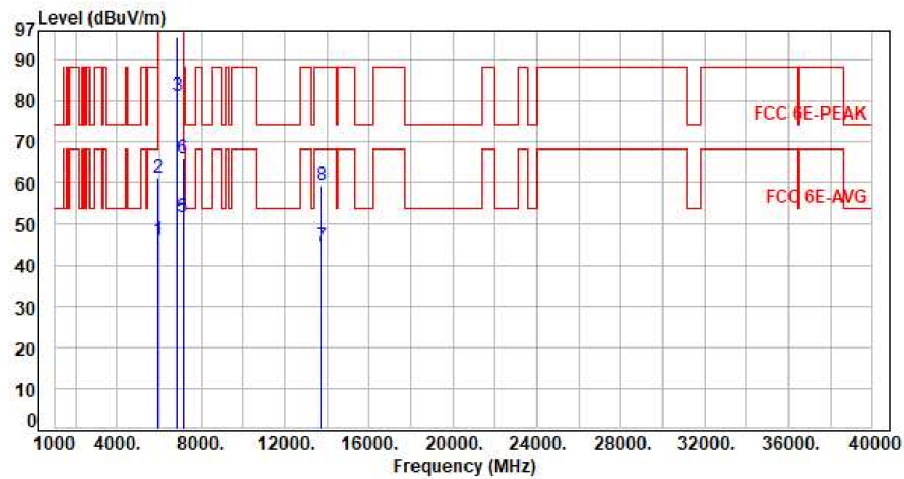


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.43	46.28	68.20	-21.92	Average	100	139	P
2	5925.00	0.85	60.51	61.36	88.20	-26.84	Peak	100	139	P
3	6865.00	3.45	77.53	80.98	200.00	-119.02	Average	100	139	P
4	6865.00	3.45	92.02	95.47	200.00	-104.53	Peak	100	139	P
5	7125.00	4.64	46.98	51.62	68.20	-16.58	Average	100	139	P
6	7125.00	4.64	61.53	66.17	88.20	-22.03	Peak	100	139	P
7	13730.00	3.94	40.67	44.61	68.20	-23.59	Average	100	239	P
8	13730.00	3.94	55.35	59.29	88.20	-28.91	Peak	100	239	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

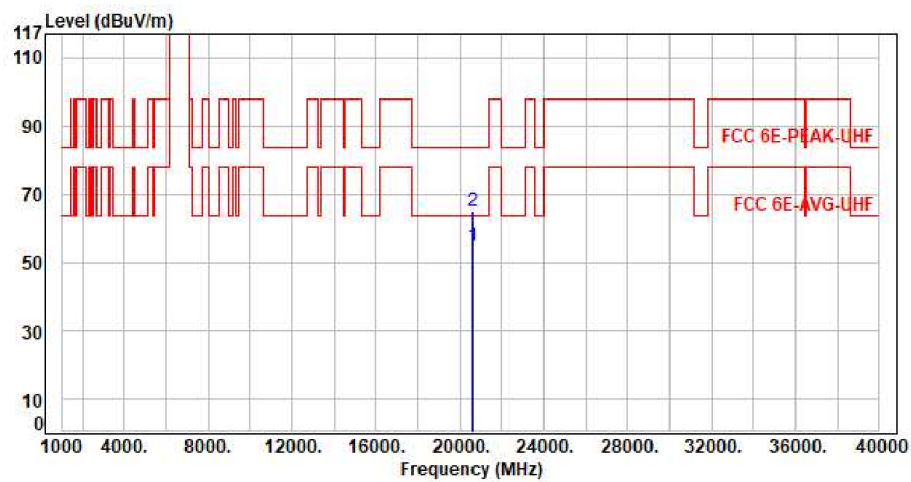


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.03	43.49	54.52	63.54	-9.02	Average	150	360	P
2	20595.00	11.03	53.72	64.75	83.54	-18.79	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

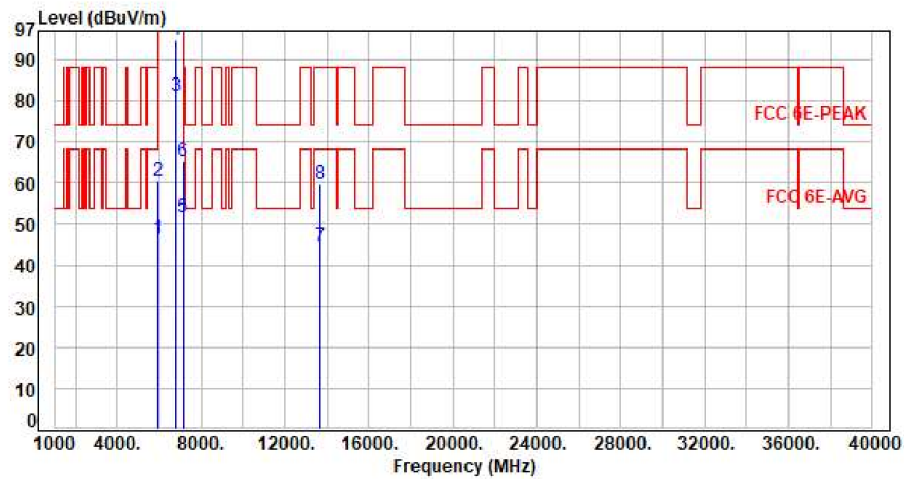


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.47	46.32	68.20	-21.88	Average	212	68	P
2	5925.00	0.85	59.79	60.64	88.20	-27.56	Peak	212	68	P
3	6825.00	3.45	77.61	81.06	200.00	-118.94	Average	212	68	P
4	6825.00	3.45	91.30	94.75	200.00	-105.25	Peak	212	68	P
5	7125.00	4.64	47.04	51.68	68.20	-16.52	Average	212	68	P
6	7125.00	4.64	60.81	65.45	88.20	-22.75	Peak	212	68	P
7	13650.00	3.82	40.68	44.50	68.20	-23.70	Average	100	164	P
8	13650.00	3.82	55.85	59.67	88.20	-28.53	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

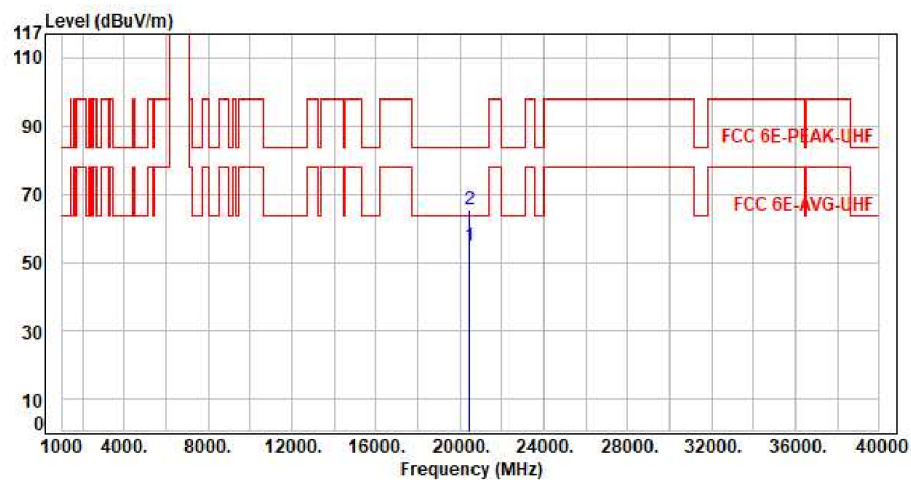

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.20	43.36	54.56	63.54	-8.98	Average	150	360	P
2	20475.00	11.20	54.12	65.32	83.54	-18.22	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

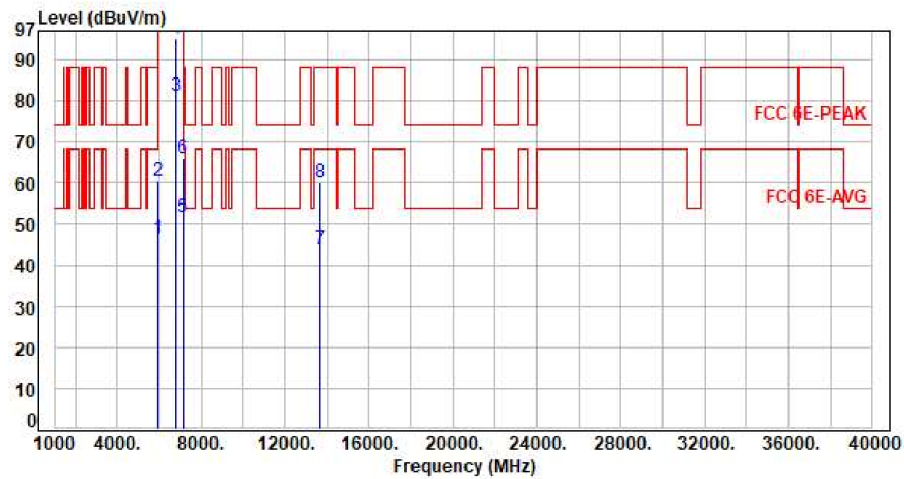


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	0.85	45.52	46.37	68.20	-21.83	Average	100	191	P
2	5925.00	0.85	59.51	60.36	88.20	-27.84	Peak	100	191	P
3	6825.00	3.45	77.74	81.19	200.00	-118.81	Average	100	191	P
4	6825.00	3.45	91.76	95.21	200.00	-104.79	Peak	100	191	P
5	7125.00	4.64	47.01	51.65	68.20	-16.55	Average	100	191	P
6	7125.00	4.64	61.26	65.90	88.20	-22.30	Peak	100	191	P
7	13650.00	3.82	40.24	44.06	68.20	-24.14	Average	100	232	P
8	13650.00	3.82	56.20	60.02	88.20	-28.18	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

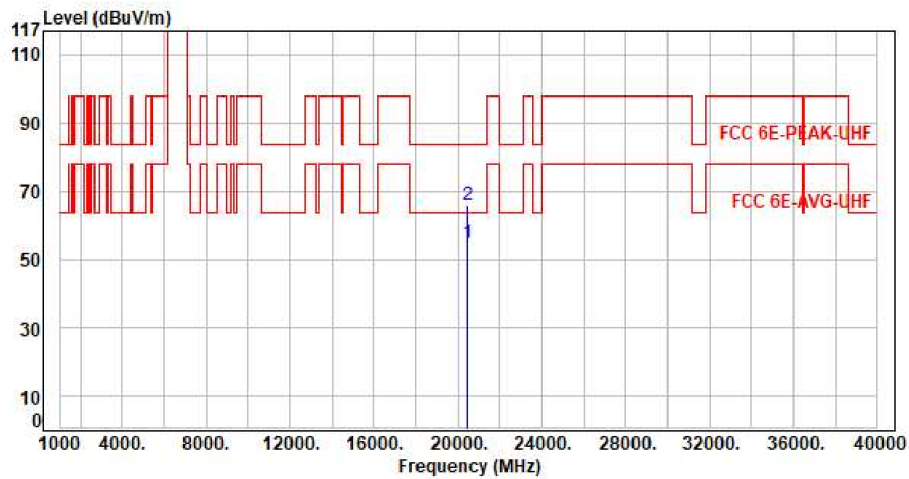

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.20	43.59	54.79	63.54	-8.75	Average	150	360	P
2	20475.00	11.20	54.80	66.00	83.54	-17.54	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.8. In-Band Emission



U-NII-5

Modulation Type: 802.11ax HE20 CH01


ANT A

Modulation Type: 802.11ax HE20 CH45


ANT A

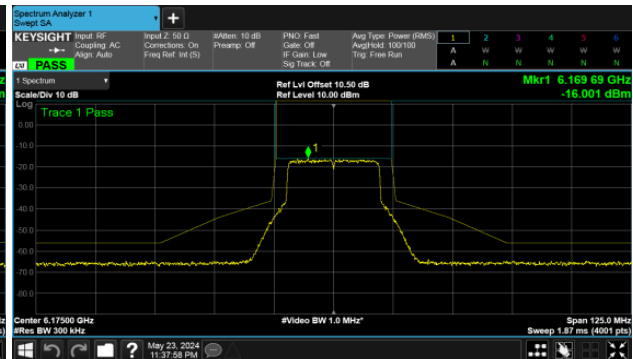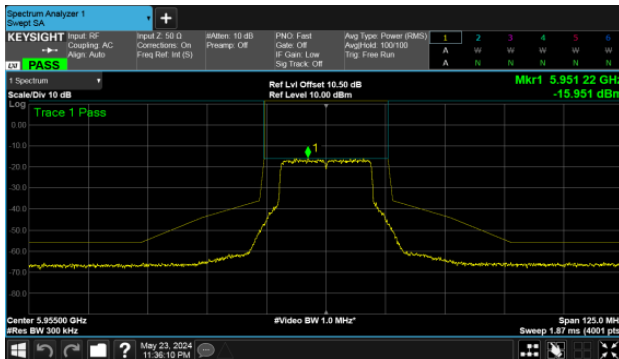

ANT B

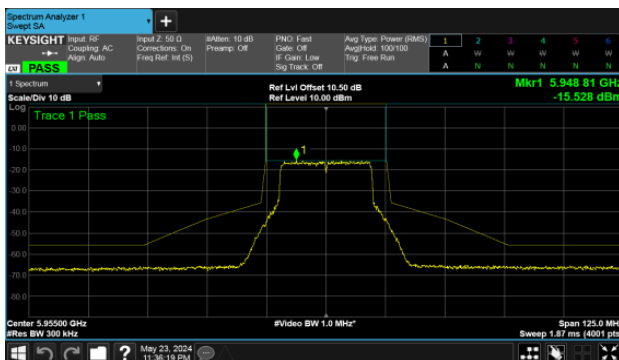


ANT B

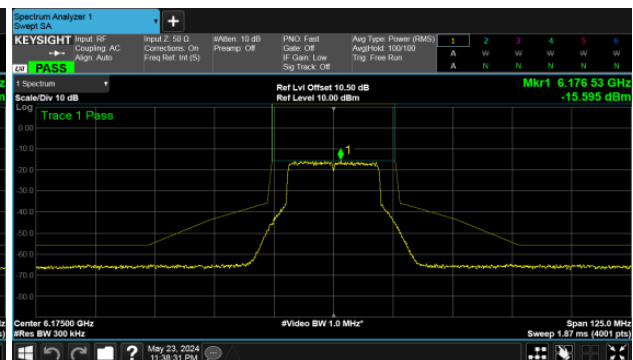



Modulation Type: 802.11ax HE20 CH93
ANT A

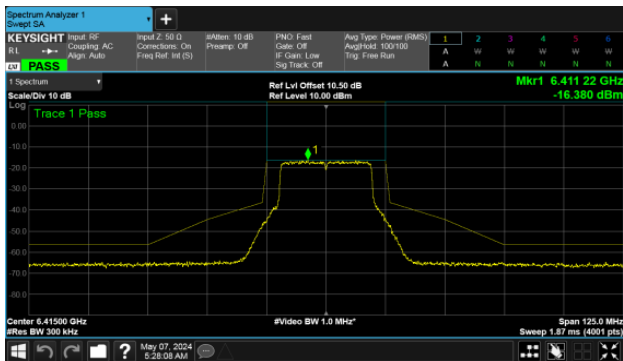

ANT B

