


**Appendix C. Test Result and Data (1GHz ~ 40GHz)**

For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

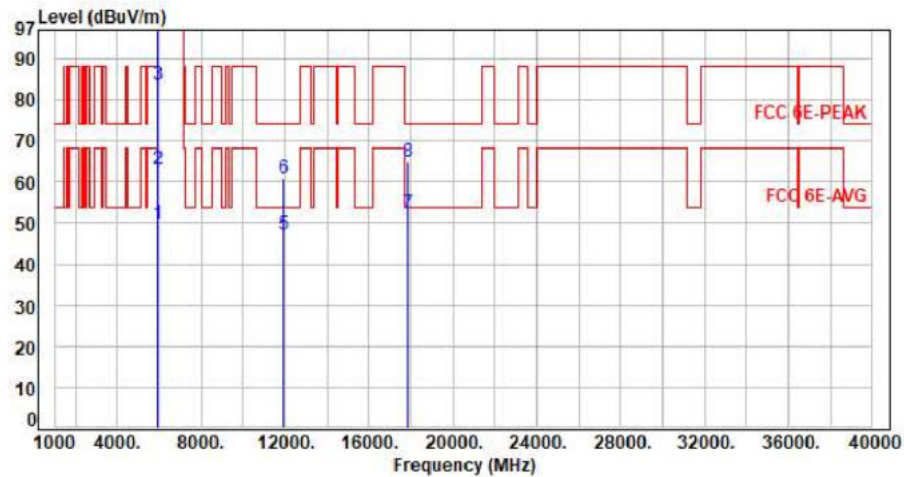

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.14	49.80	68.20	-18.40	Average	348	24	P
2	5925.00	7.66	55.25	62.91	88.20	-25.29	Peak	348	24	P
3	5955.00	7.68	76.01	83.69	200.00	-116.31	Average	348	24	P
4	5955.00	7.68	89.03	96.71	200.00	-103.29	Peak	348	24	P
5	11910.00	18.06	29.23	47.29	54.00	-6.71	Average	100	124	P
6	11910.00	18.06	42.82	60.88	74.00	-13.12	Peak	100	124	P
7	17865.00	27.77	24.57	52.34	54.00	-1.66	Average	100	265	P
8	17865.00	27.77	37.15	64.92	74.00	-9.08	Peak	100	265	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

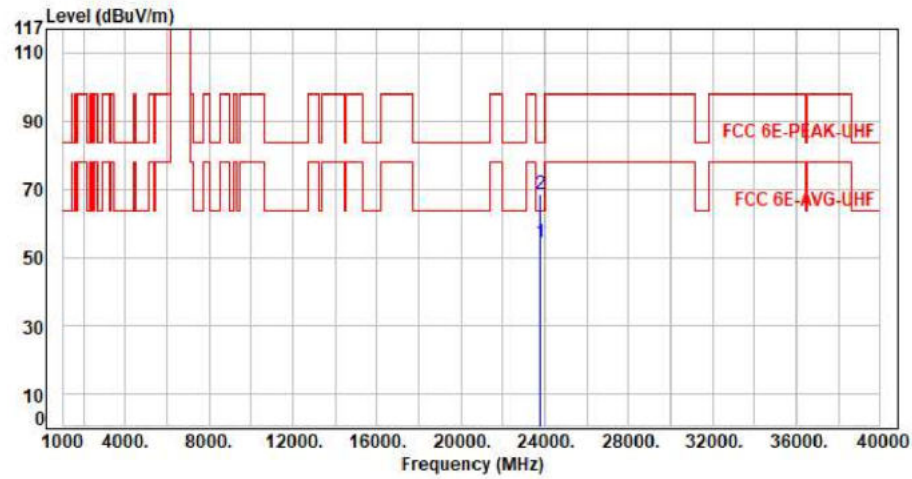


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	43.25	54.44	63.54	-9.10	Average	150	360	P
2	23820.00	11.19	57.15	68.34	83.54	-15.20	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

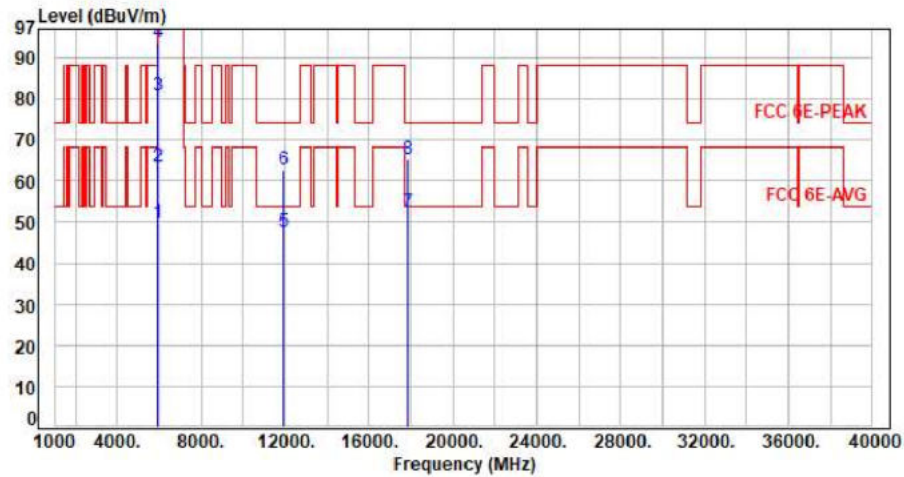

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	400	203	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	400	203	P
3	5955.00	7.68	72.96	80.64	200.00	-119.36	Average	400	203	P
4	5955.00	7.68	86.14	93.82	200.00	-106.18	Peak	400	203	P
5	11910.00	18.06	29.57	47.63	54.00	-6.37	Average	100	247	P
6	11910.00	18.06	44.71	62.77	74.00	-11.23	Peak	100	247	P
7	17865.00	27.77	24.57	52.34	54.00	-1.66	Average	100	194	P
8	17865.00	27.77	37.63	65.40	74.00	-8.60	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

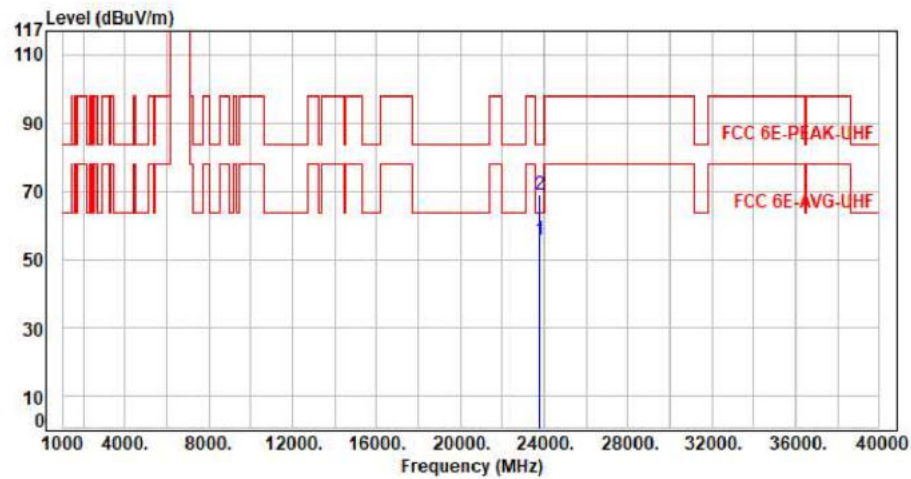


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.20	55.39	63.54	-8.15	Average	150	360	P
2	23820.00	11.19	57.66	68.85	83.54	-14.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

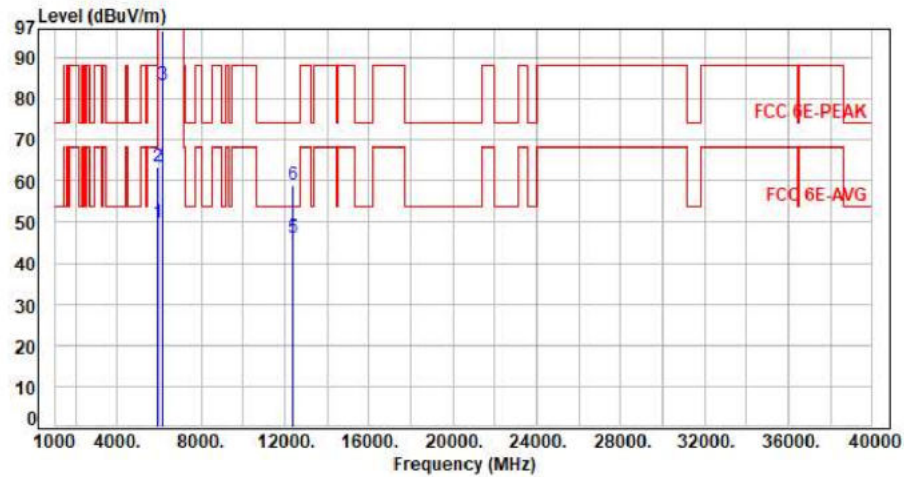


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.24	49.90	68.20	-18.30	Average	337	21	P
2	5925.00	7.66	55.83	63.49	88.20	-24.71	Peak	337	21	P
3	6175.00	8.35	75.16	83.51	200.00	-116.49	Average	337	21	P
4	6175.00	8.35	88.28	96.63	200.00	-103.37	Peak	337	21	P
5	12350.00	17.76	28.18	45.94	54.00	-8.06	Average	100	121	P
6	12350.00	17.76	41.30	59.06	74.00	-14.94	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

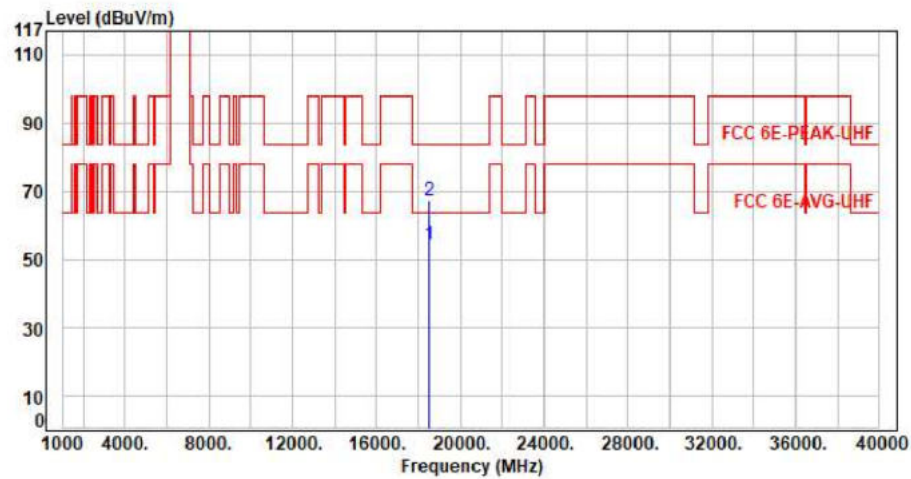


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	43.62	54.17	63.54	-9.37	Average	150	360	P
2	18525.00	10.55	56.62	67.17	83.54	-16.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

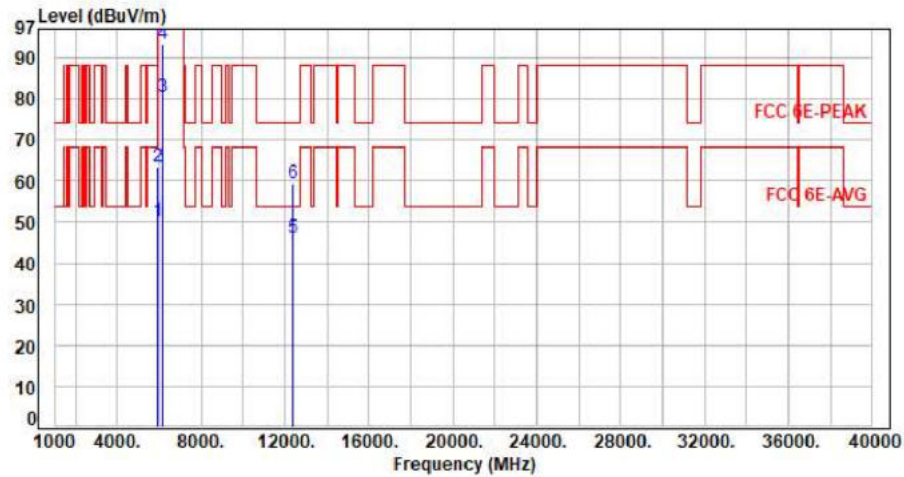


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.39	50.05	68.20	-18.15	Average	392	211	P
2	5925.00	7.66	55.82	63.48	88.20	-24.72	Peak	392	211	P
3	6175.00	8.35	71.95	80.30	200.00	-119.70	Average	392	211	P
4	6175.00	8.35	84.85	93.20	200.00	-106.80	Peak	392	211	P
5	12350.00	17.76	28.25	46.01	54.00	-7.99	Average	100	243	P
6	12350.00	17.76	41.78	59.54	74.00	-14.46	Peak	100	243	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

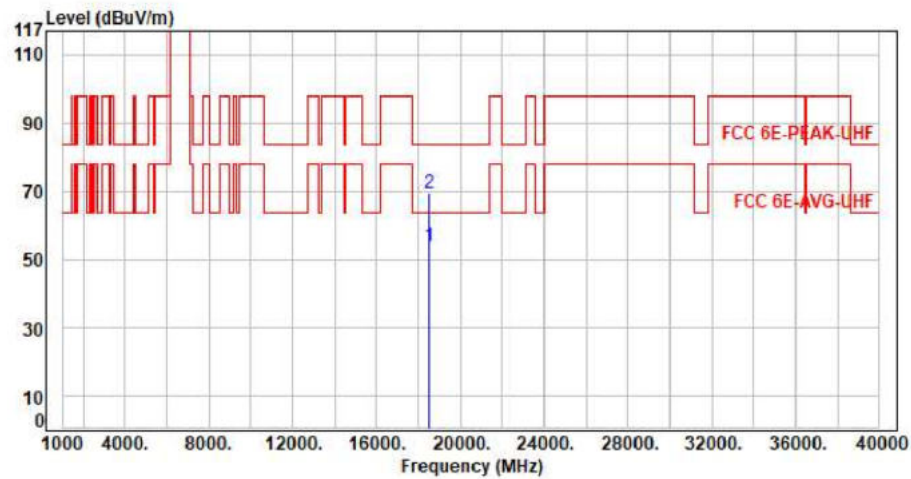


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	43.26	53.81	63.54	-9.73	Average	150	360	P
2	18525.00	10.55	58.66	69.21	83.54	-14.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

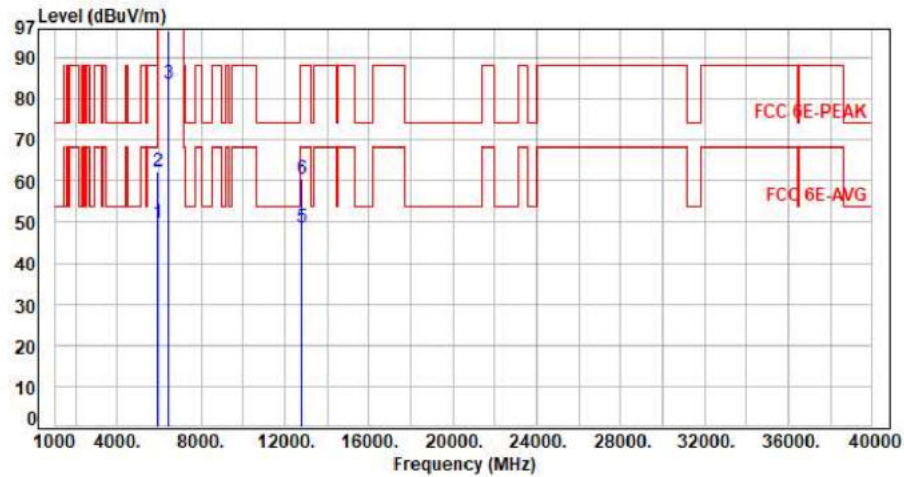


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	297	41	P
2	5925.00	7.66	54.71	62.37	88.20	-25.83	Peak	297	41	P
3	6415.00	8.34	75.52	83.86	200.00	-116.14	Average	297	41	P
4	6415.00	8.34	88.38	96.72	200.00	-103.28	Peak	297	41	P
5	12830.00	18.92	29.61	48.53	68.20	-19.67	Average	100	152	P
6	12830.00	18.92	41.58	60.50	88.20	-27.70	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

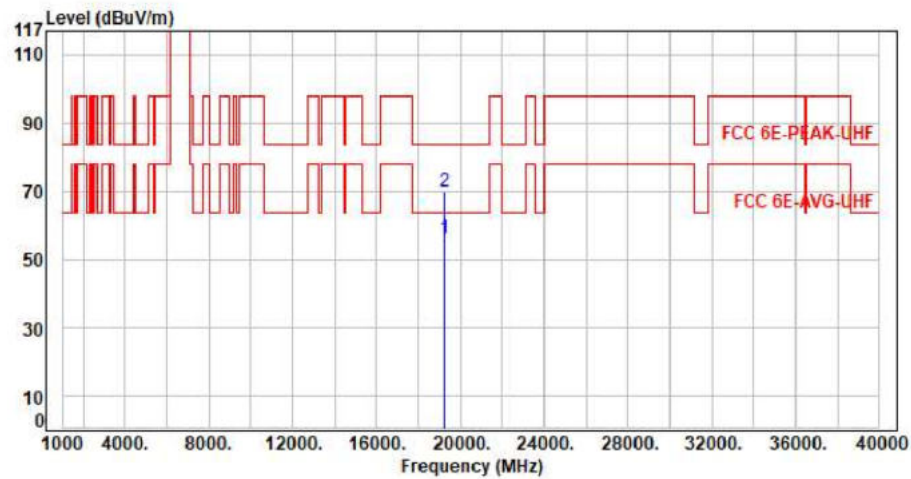


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	44.77	56.14	63.54	-7.40	Average	150	360	P
2	19245.00	11.37	58.54	69.91	83.54	-13.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

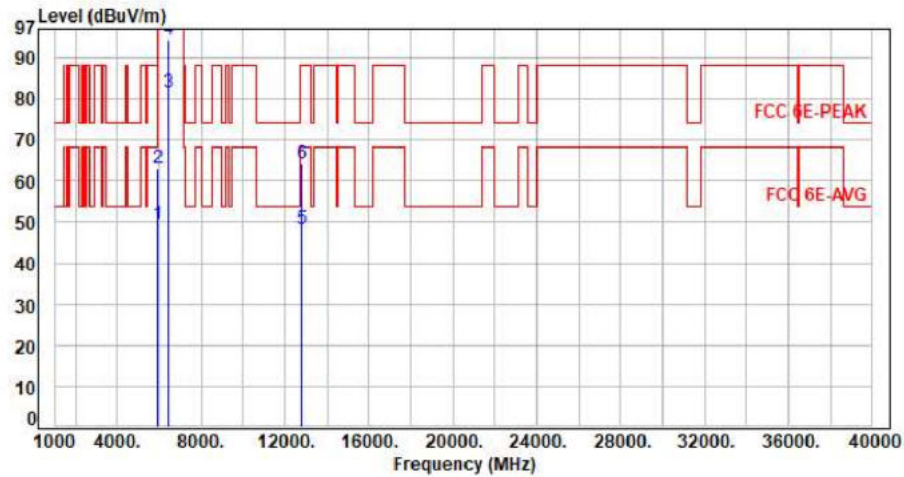


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	391	205	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	391	205	P
3	6415.00	8.34	73.19	81.53	200.00	-118.47	Average	391	205	P
4	6415.00	8.34	86.10	94.44	200.00	-105.56	Peak	391	205	P
5	12830.00	18.92	29.44	48.36	68.20	-19.84	Average	100	145	P
6	12830.00	18.92	45.18	64.10	88.20	-24.10	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

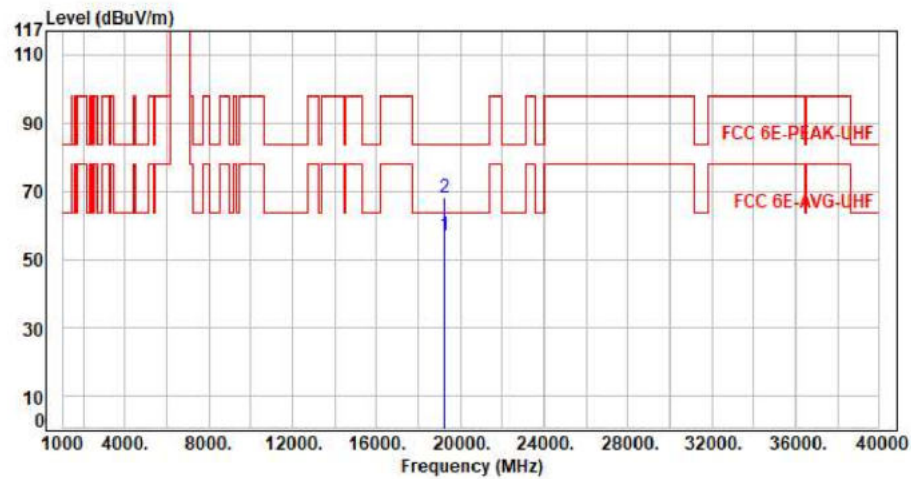


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.52	56.89	63.54	-6.65	Average	150	360	P
2	19245.00	11.37	56.87	68.24	83.54	-15.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

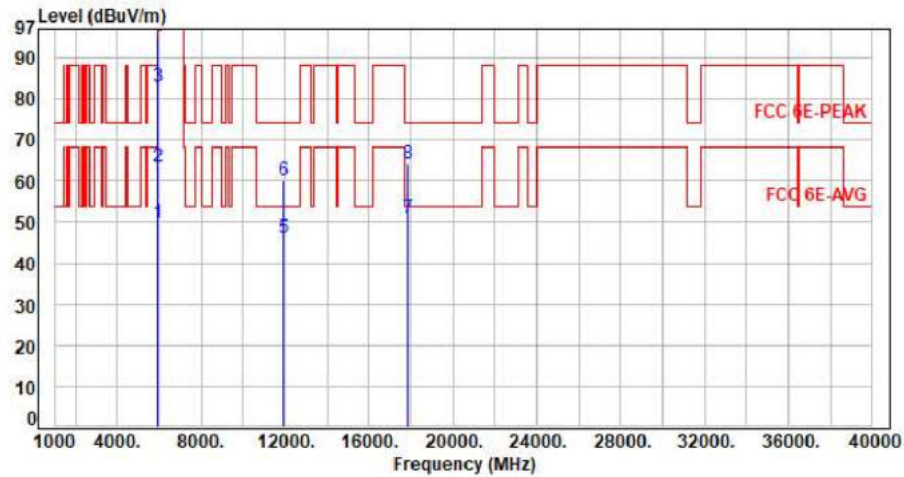

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.28	49.94	68.20	-18.26	Average	361	17	P
2	5925.00	7.66	55.64	63.30	88.20	-24.90	Peak	361	17	P
3	5965.00	7.71	75.17	82.88	200.00	-117.12	Average	361	17	P
4	5965.00	7.71	87.60	95.31	200.00	-104.69	Peak	361	17	P
5	11930.00	18.05	28.05	46.10	54.00	-7.90	Average	100	122	P
6	11930.00	18.05	42.18	60.23	74.00	-13.77	Peak	100	122	P
7	17895.00	27.89	22.97	50.86	54.00	-3.14	Average	100	268	P
8	17895.00	27.89	36.31	64.20	74.00	-9.80	Peak	100	268	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

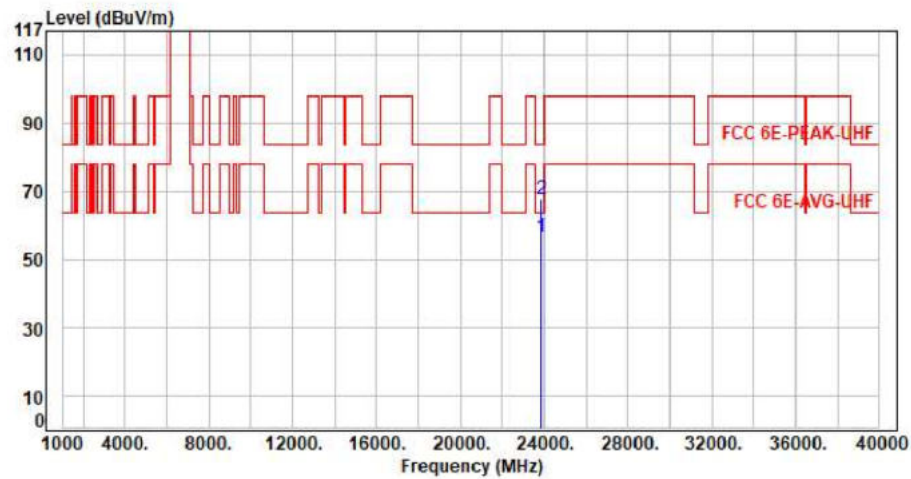


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	45.24	56.44	63.54	-7.10	Average	150	360	P
2	23860.00	11.20	56.25	67.45	83.54	-16.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

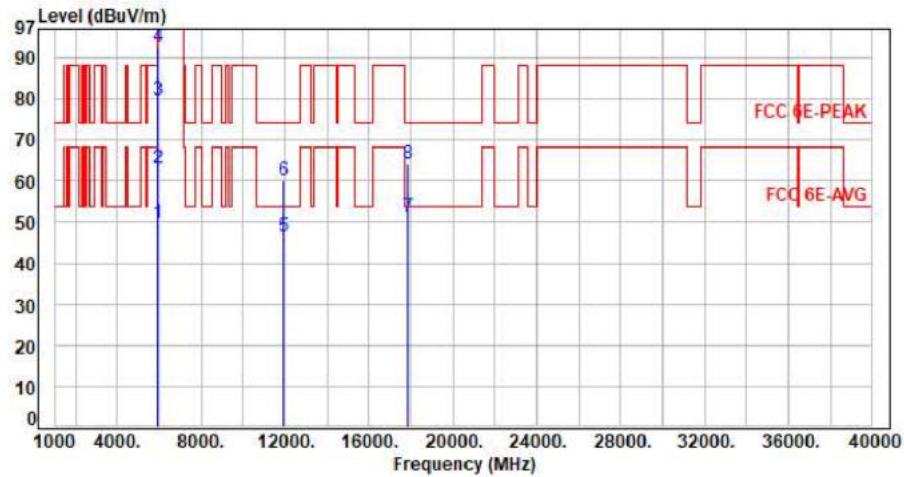


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	400	206	P
2	5925.00	7.66	55.58	63.24	88.20	-24.96	Peak	400	206	P
3	5965.00	7.71	71.93	79.64	200.00	-120.36	Average	400	206	P
4	5965.00	7.71	84.92	92.63	200.00	-107.37	Peak	400	206	P
5	11930.00	18.05	28.32	46.37	54.00	-7.63	Average	100	255	P
6	11930.00	18.05	42.24	60.29	74.00	-13.71	Peak	100	255	P
7	17895.00	27.89	23.29	51.18	54.00	-2.82	Average	100	198	P
8	17895.00	27.89	36.19	64.08	74.00	-9.92	Peak	100	198	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

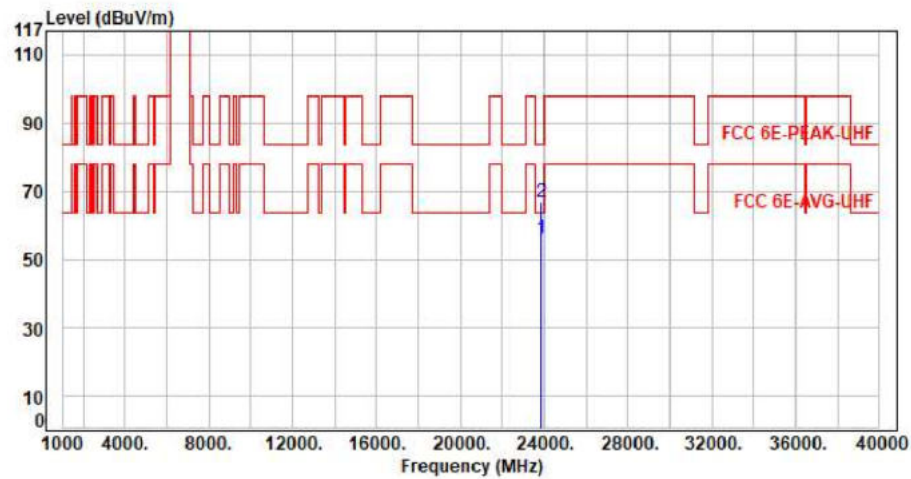

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.67	55.87	63.54	-7.67	Average	150	360	P
2	23860.00	11.20	55.64	66.84	83.54	-16.70	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

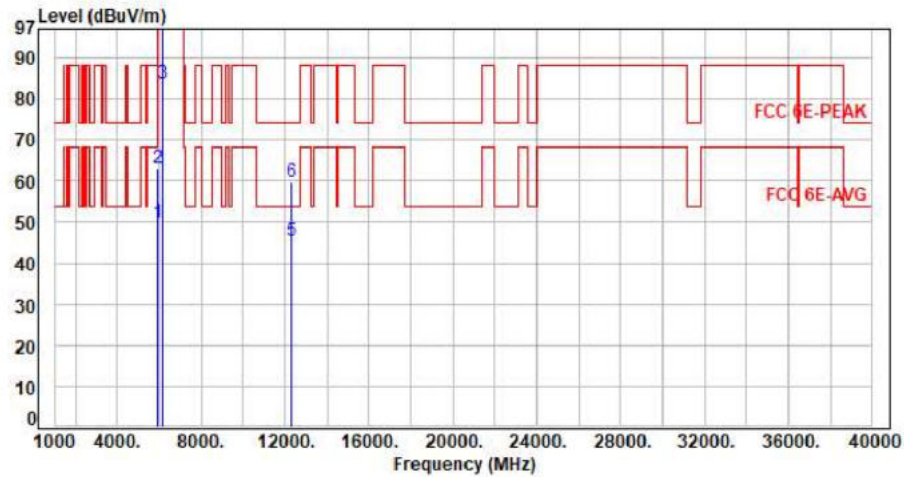


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	352	28	P
2	5925.00	7.66	55.29	62.95	88.20	-25.25	Peak	352	28	P
3	6165.00	8.34	75.42	83.76	200.00	-116.24	Average	352	28	P
4	6165.00	8.34	89.16	97.50	200.00	-102.50	Peak	352	28	P
5	12330.00	17.71	27.80	45.51	54.00	-8.49	Average	100	124	P
6	12330.00	17.71	42.07	59.78	74.00	-14.22	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

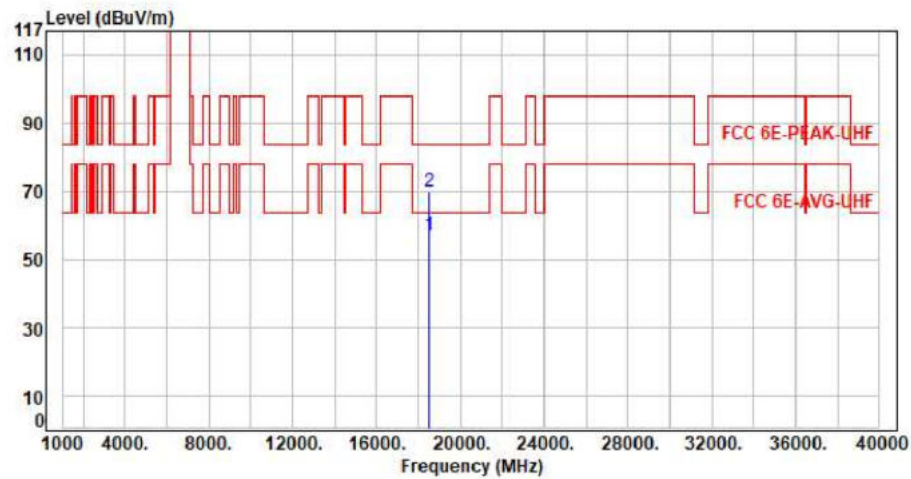


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.41	56.82	63.54	-6.72	Average	150	360	P
2	18495.00	10.41	59.64	70.05	83.54	-13.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

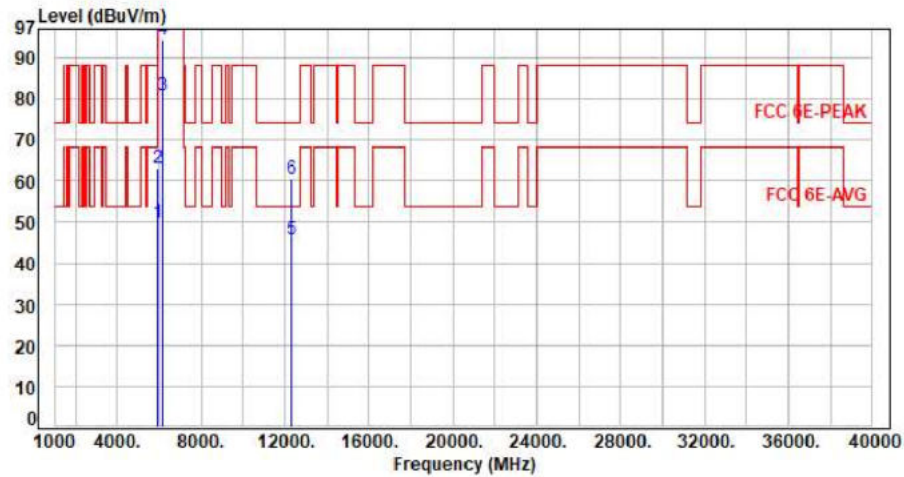


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	400	209	P
2	5925.00	7.66	55.39	63.05	88.20	-25.15	Peak	400	209	P
3	6165.00	8.34	72.48	80.82	200.00	-119.18	Average	400	209	P
4	6165.00	8.34	85.99	94.33	200.00	-105.67	Peak	400	209	P
5	12330.00	17.71	27.96	45.67	54.00	-8.33	Average	100	244	P
6	12330.00	17.71	42.68	60.39	74.00	-13.61	Peak	100	244	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

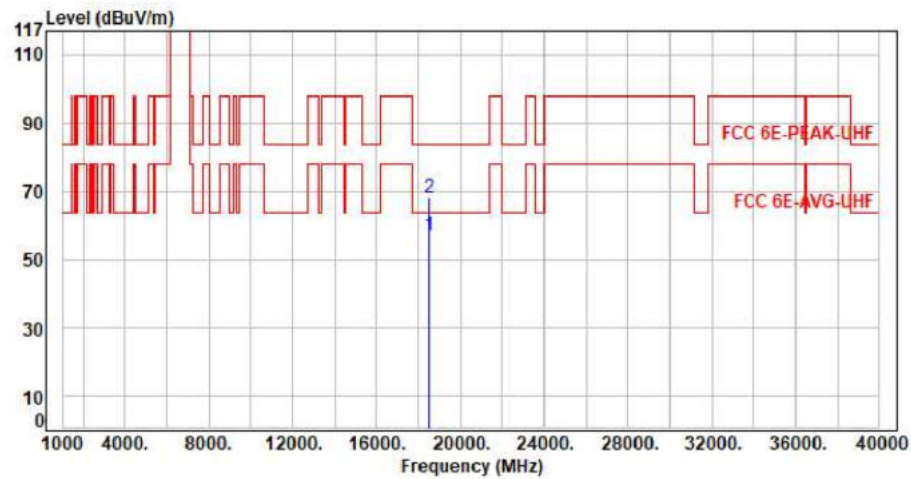


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.41	56.82	63.54	-6.72	Average	150	360	P
2	18495.00	10.41	57.84	68.25	83.54	-15.29	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

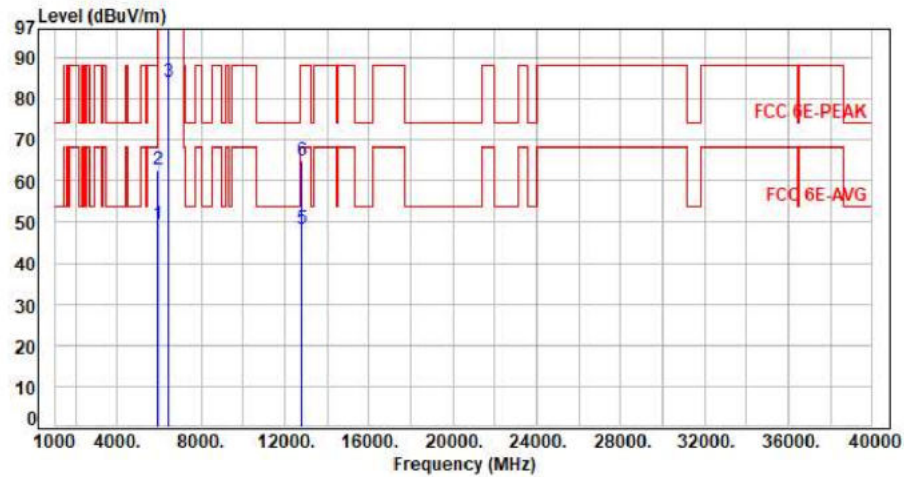


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.92	49.58	68.20	-18.62	Average	311	41	P
2	5925.00	7.66	54.86	62.52	88.20	-25.68	Peak	311	41	P
3	6405.00	8.35	75.74	84.09	200.00	-115.91	Average	311	41	P
4	6405.00	8.35	89.60	97.95	200.00	-102.05	Peak	311	41	P
5	12810.00	18.88	29.62	48.50	68.20	-19.70	Average	100	225	P
6	12810.00	18.88	45.88	64.76	88.20	-23.44	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

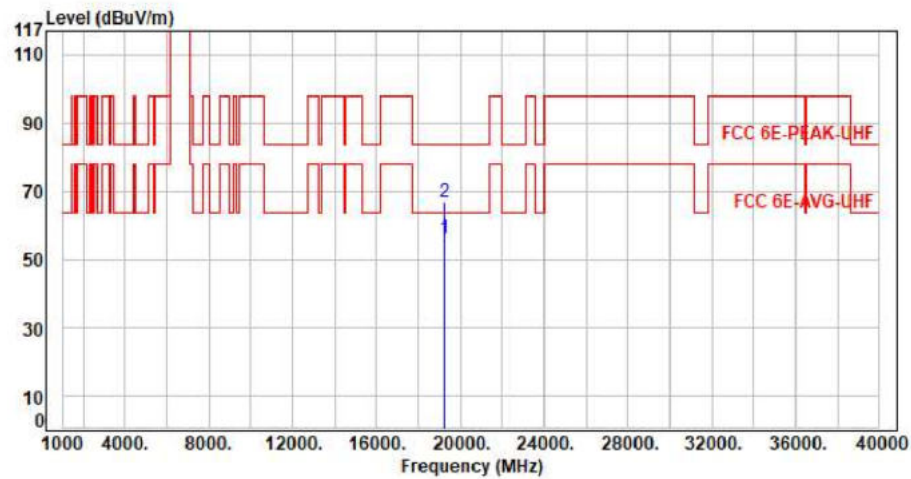


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.59	55.83	63.54	-7.71	Average	150	360	P
2	19215.00	11.24	55.63	66.87	83.54	-16.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

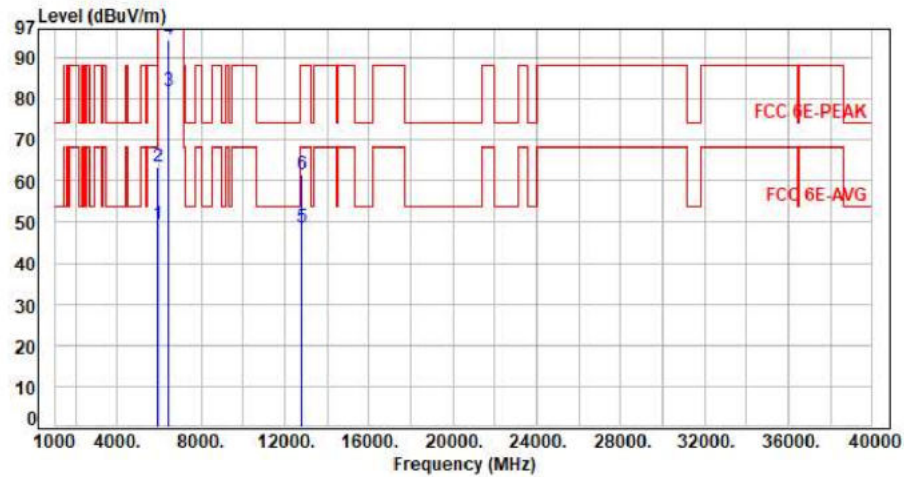


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.94	49.60	68.20	-18.60	Average	389	207	P
2	5925.00	7.66	55.67	63.33	88.20	-24.87	Peak	389	207	P
3	6405.00	8.35	73.55	81.90	200.00	-118.10	Average	389	207	P
4	6405.00	8.35	85.98	94.33	200.00	-105.67	Peak	389	207	P
5	12810.00	18.88	29.66	48.54	68.20	-19.66	Average	100	145	P
6	12810.00	18.88	42.68	61.56	88.20	-26.64	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

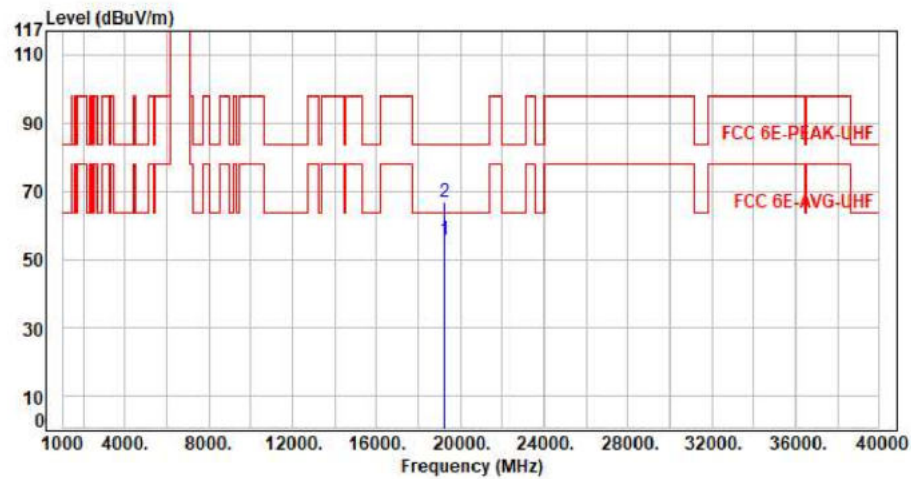


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.35	55.59	63.54	-7.95	Average	150	360	P
2	19215.00	11.24	55.55	66.79	83.54	-16.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

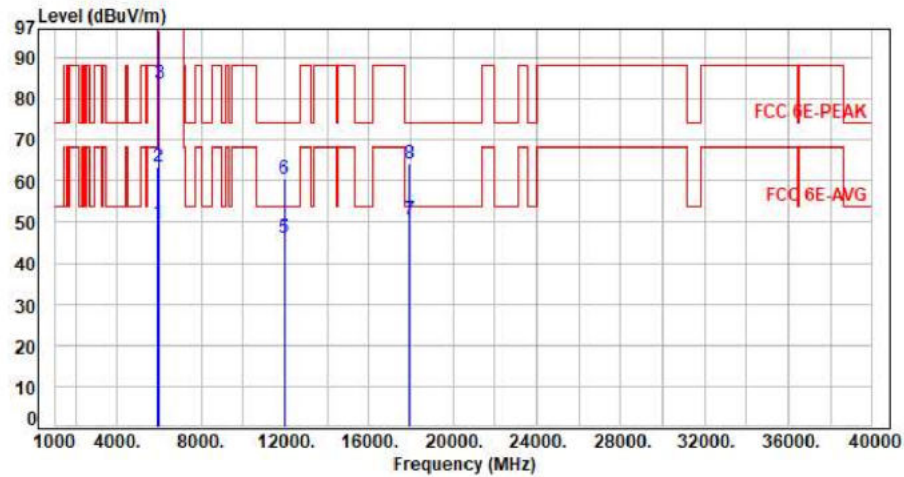


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	339	21	P
2	5925.00	7.66	55.75	63.41	88.20	-24.79	Peak	339	21	P
3	5985.00	7.75	75.82	83.57	200.00	-116.43	Average	339	21	P
4	5985.00	7.75	88.82	96.57	200.00	-103.43	Peak	339	21	P
5	11970.00	18.02	28.24	46.26	54.00	-7.74	Average	100	128	P
6	11970.00	18.02	42.60	60.62	74.00	-13.38	Peak	100	128	P
7	17955.00	28.04	22.46	50.50	54.00	-3.50	Average	100	262	P
8	17955.00	28.04	36.07	64.11	74.00	-9.89	Peak	100	262	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

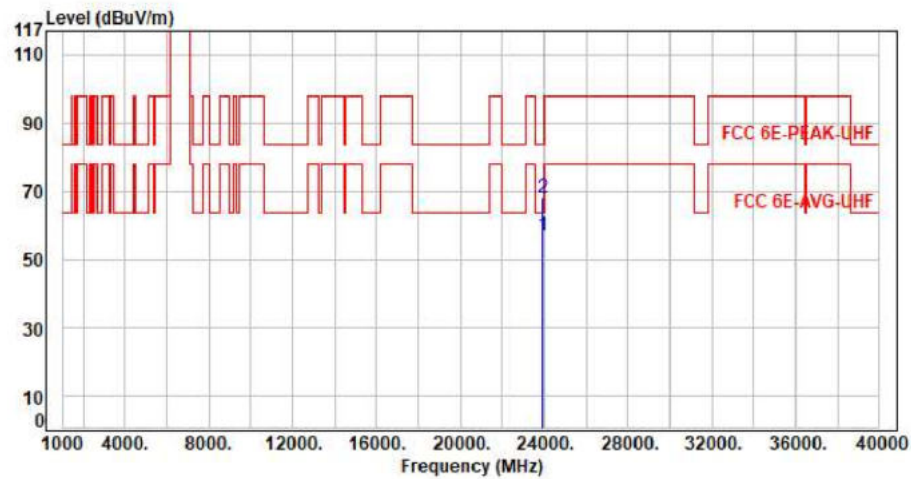

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.38	56.74	63.54	-6.80	Average	150	360	P
2	23940.00	11.36	56.54	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

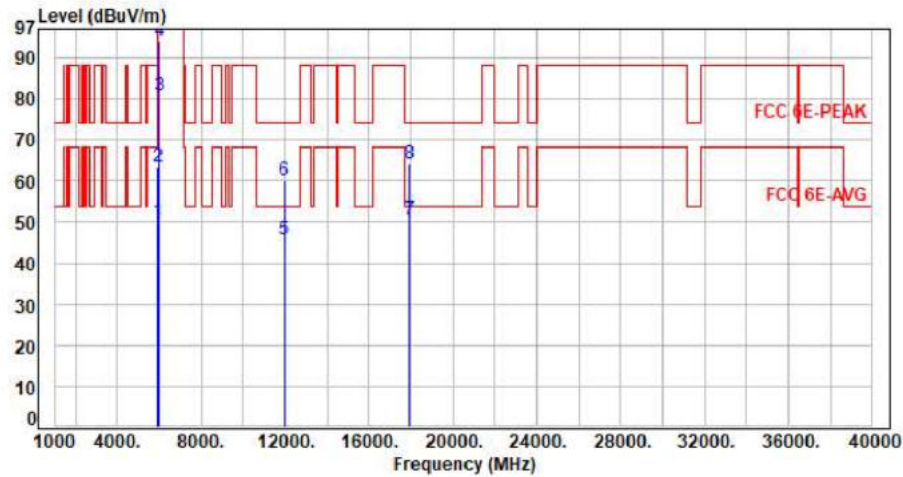

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.33	49.99	68.20	-18.21	Average	386	194	P
2	5925.00	7.66	55.79	63.45	88.20	-24.75	Peak	386	194	P
3	5985.00	7.75	72.96	80.71	200.00	-119.29	Average	386	194	P
4	5985.00	7.75	86.28	94.03	200.00	-105.97	Peak	386	194	P
5	11970.00	18.02	27.77	45.79	54.00	-8.21	Average	100	250	P
6	11970.00	18.02	42.14	60.16	74.00	-13.84	Peak	100	250	P
7	17955.00	28.04	22.35	50.39	54.00	-3.61	Average	100	194	P
8	17955.00	28.04	36.21	64.25	74.00	-9.75	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

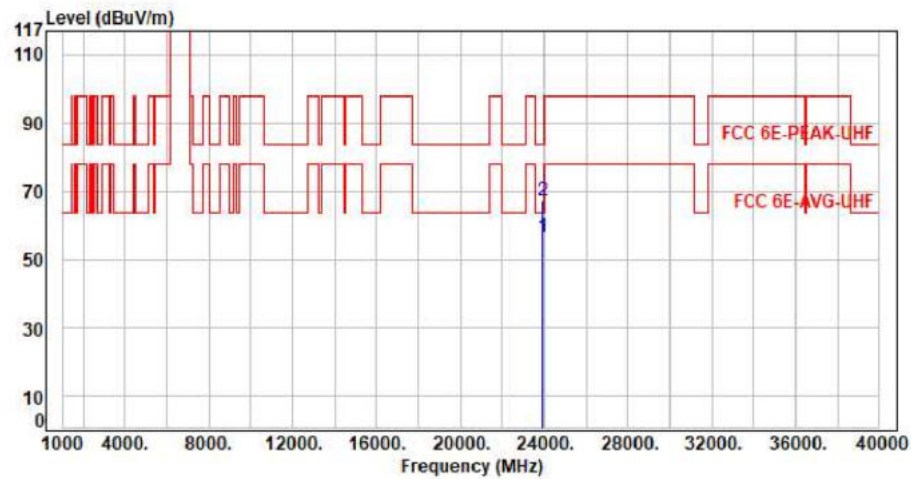


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.03	56.39	63.54	-7.15	Average	150	360	P
2	23940.00	11.36	55.83	67.19	83.54	-16.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

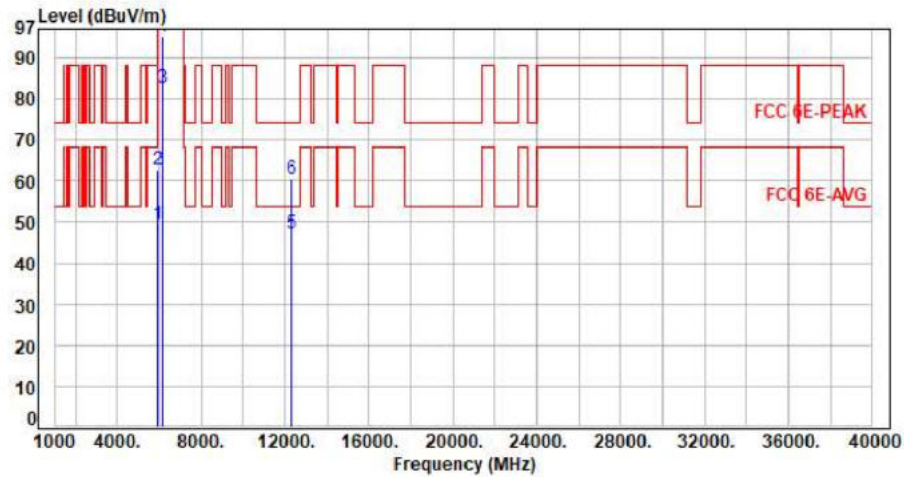


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	352	27	P
2	5925.00	7.66	54.97	62.63	88.20	-25.57	Peak	352	27	P
3	6145.00	8.31	74.33	82.64	200.00	-117.36	Average	352	27	P
4	6145.00	8.31	86.82	95.13	200.00	-104.87	Peak	352	27	P
5	12290.00	17.62	29.55	47.17	54.00	-6.83	Average	100	124	P
6	12290.00	17.62	42.86	60.48	74.00	-13.52	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

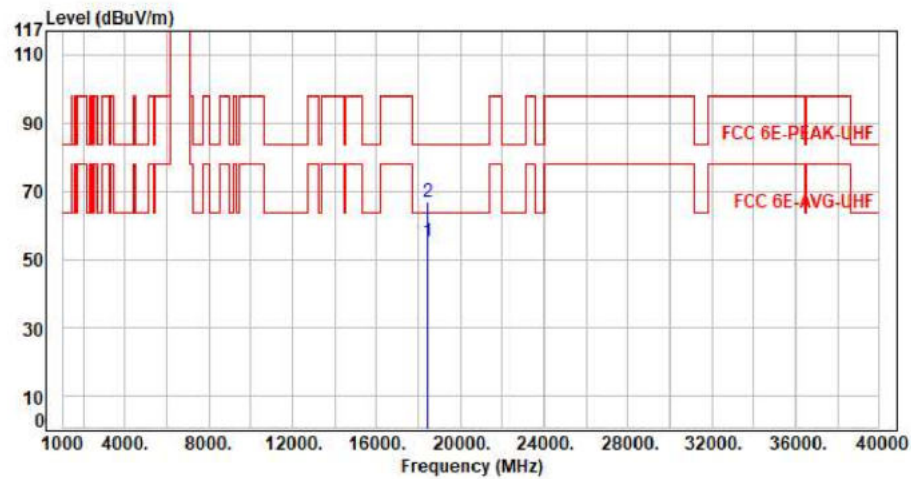


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	45.08	55.28	63.54	-8.26	Average	150	360	P
2	18435.00	10.20	56.61	66.81	83.54	-16.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

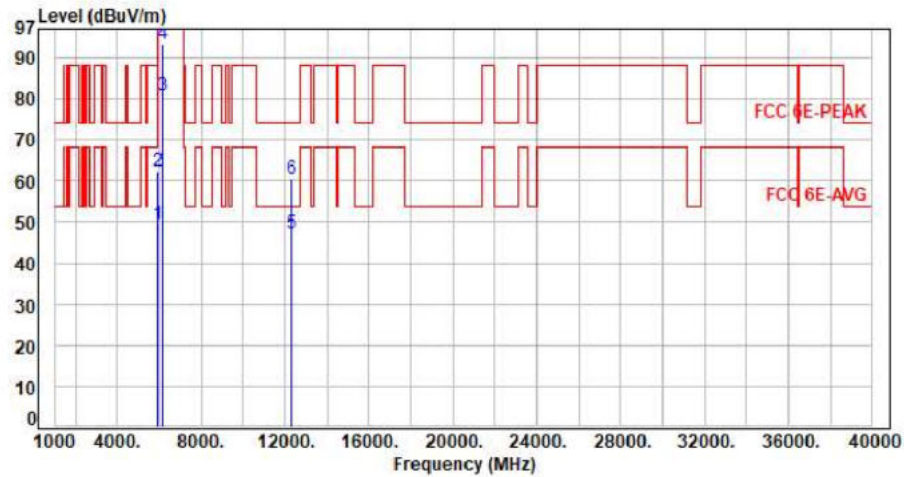


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.58	49.24	68.20	-18.96	Average	400	201	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	400	201	P
3	6145.00	8.31	72.59	80.90	200.00	-119.10	Average	400	201	P
4	6145.00	8.31	85.07	93.38	200.00	-106.62	Peak	400	201	P
5	12290.00	17.62	29.67	47.29	54.00	-6.71	Average	100	138	P
6	12290.00	17.62	43.01	60.63	74.00	-13.37	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

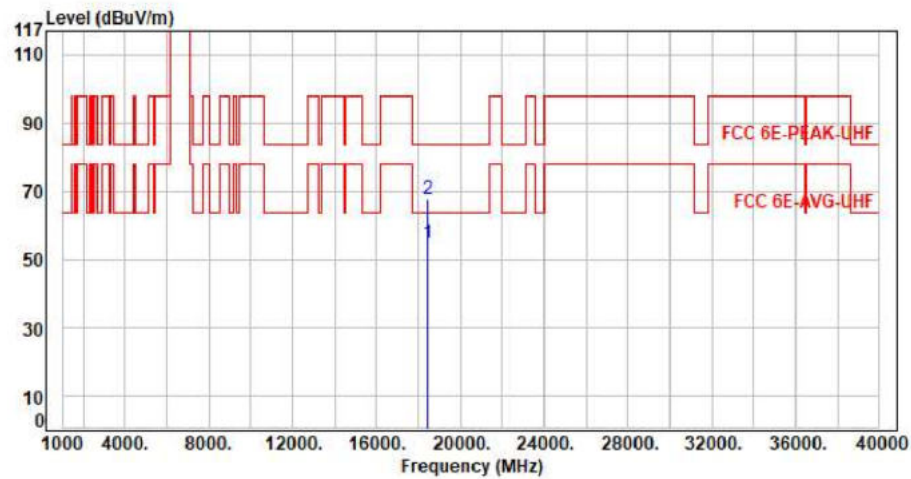


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.53	54.73	63.54	-8.81	Average	150	360	P
2	18435.00	10.20	57.50	67.70	83.54	-15.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

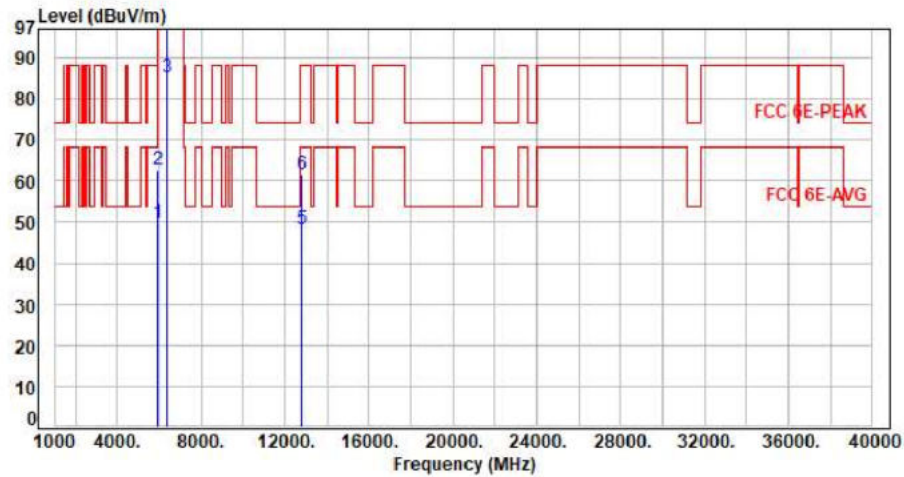


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.95	49.61	68.20	-18.59	Average	315	41	P
2	5925.00	7.66	54.86	62.52	88.20	-25.68	Peak	315	41	P
3	6385.00	8.34	76.82	85.16	200.00	-114.84	Average	315	41	P
4	6385.00	8.34	89.67	98.01	200.00	-101.99	Peak	315	41	P
5	12770.00	18.73	29.64	48.37	68.20	-19.83	Average	100	145	P
6	12770.00	18.73	42.89	61.62	88.20	-26.58	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

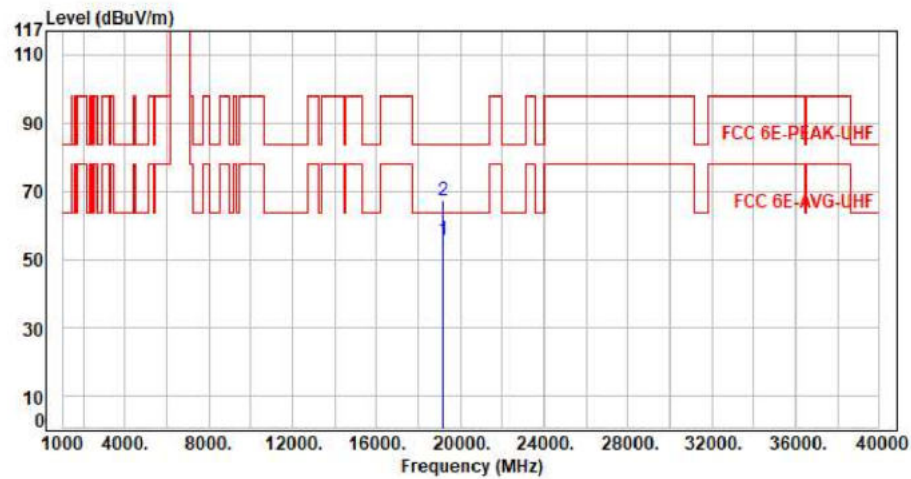


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	44.14	55.48	63.54	-8.06	Average	150	360	P
2	19155.00	11.34	55.97	67.31	83.54	-16.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

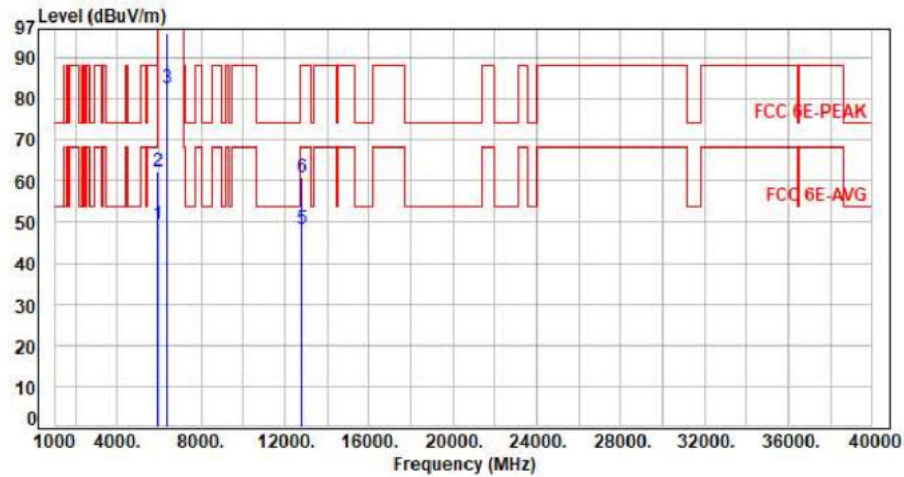

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.87	49.53	68.20	-18.67	Average	400	206	P
2	5925.00	7.66	54.69	62.35	88.20	-25.85	Peak	400	206	P
3	6385.00	8.34	74.22	82.56	200.00	-117.44	Average	400	206	P
4	6385.00	8.34	87.58	95.92	200.00	-104.08	Peak	400	206	P
5	12770.00	18.73	29.64	48.37	68.20	-19.83	Average	100	324	P
6	12770.00	18.73	42.11	60.84	88.20	-27.36	Peak	100	324	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

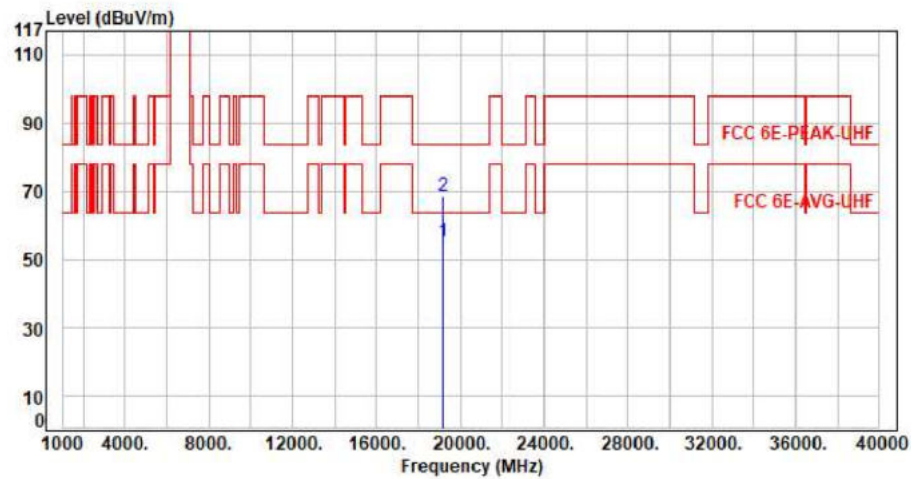


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	43.82	55.16	63.54	-8.38	Average	150	360	P
2	19155.00	11.34	57.15	68.49	83.54	-15.05	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

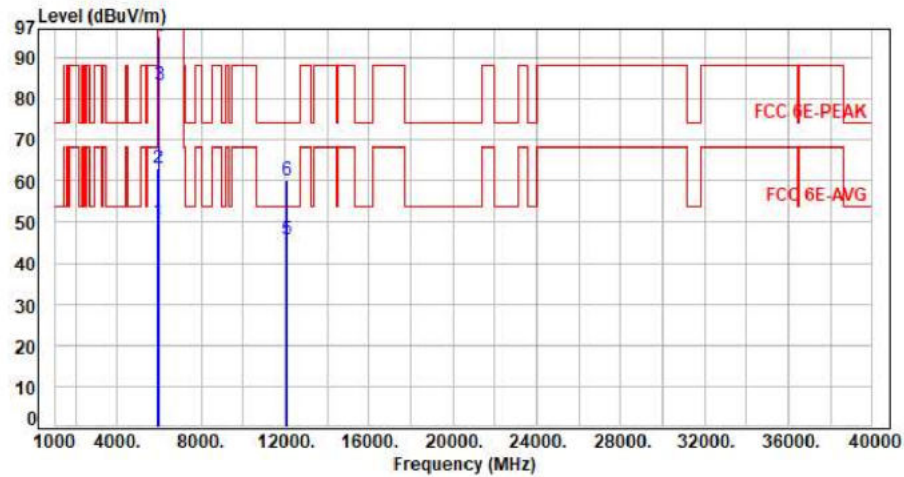


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.43	50.09	68.20	-18.11	Average	343	22	P
2	5925.00	7.66	55.50	63.16	88.20	-25.04	Peak	343	22	P
3	6025.00	7.91	75.40	83.31	200.00	-116.69	Average	343	22	P
4	6025.00	7.91	87.36	95.27	200.00	-104.73	Peak	343	22	P
5	12050.00	17.81	27.94	45.75	54.00	-8.25	Average	100	120	P
6	12050.00	17.81	42.22	60.03	74.00	-13.97	Peak	100	120	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

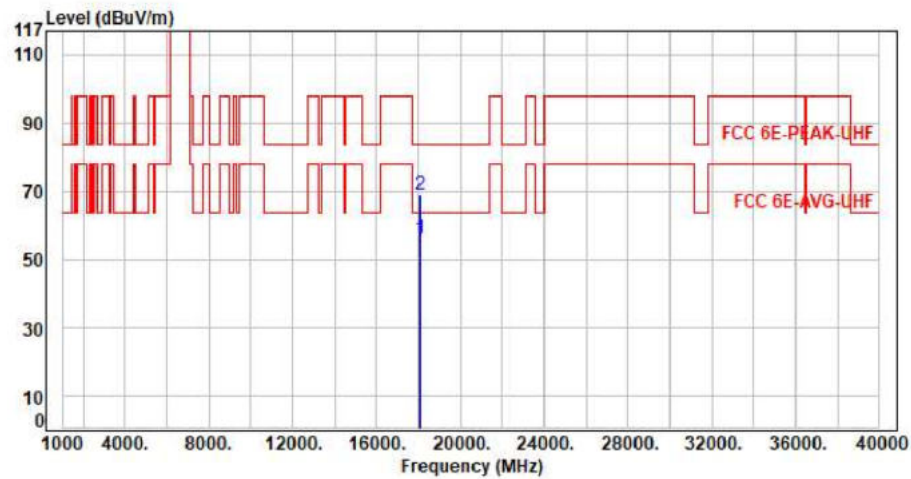


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	46.23	56.13	63.54	-7.41	Average	150	360	P
2	18075.00	9.90	58.97	68.87	83.54	-14.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

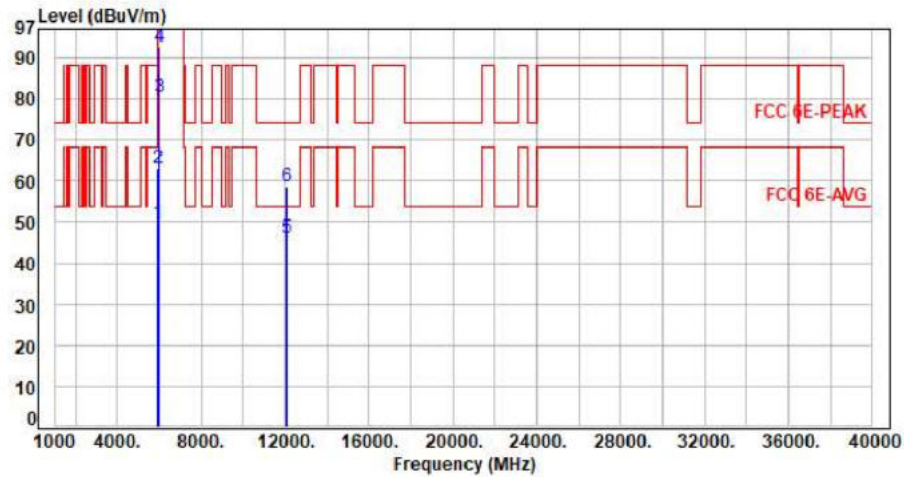


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	396	205	P
2	5925.00	7.66	55.54	63.20	88.20	-25.00	Peak	396	205	P
3	6025.00	7.91	72.37	80.28	200.00	-119.72	Average	396	205	P
4	6025.00	7.91	84.62	92.53	200.00	-107.47	Peak	396	205	P
5	12050.00	17.81	28.13	45.94	54.00	-8.06	Average	100	246	P
6	12050.00	17.81	41.00	58.81	74.00	-15.19	Peak	100	246	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

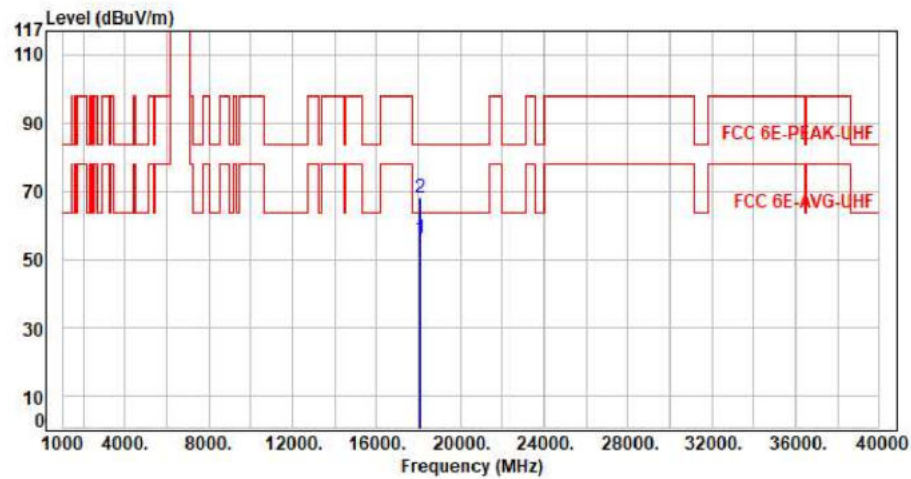


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	46.04	55.94	63.54	-7.60	Average	150	360	P
2	18075.00	9.90	57.97	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

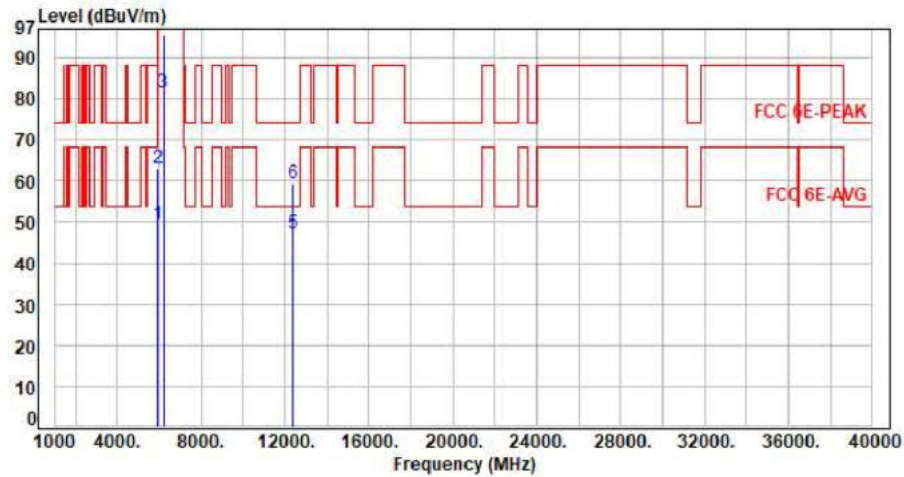


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.86	49.52	68.20	-18.68	Average	389	50	P
2	5925.00	7.66	55.58	63.24	88.20	-24.96	Peak	389	50	P
3	6185.00	8.36	73.27	81.63	200.00	-118.37	Average	389	50	P
4	6185.00	8.36	87.03	95.39	200.00	-104.61	Peak	389	50	P
5	12370.00	17.74	29.47	47.21	54.00	-6.79	Average	100	114	P
6	12370.00	17.74	41.55	59.29	74.00	-14.71	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

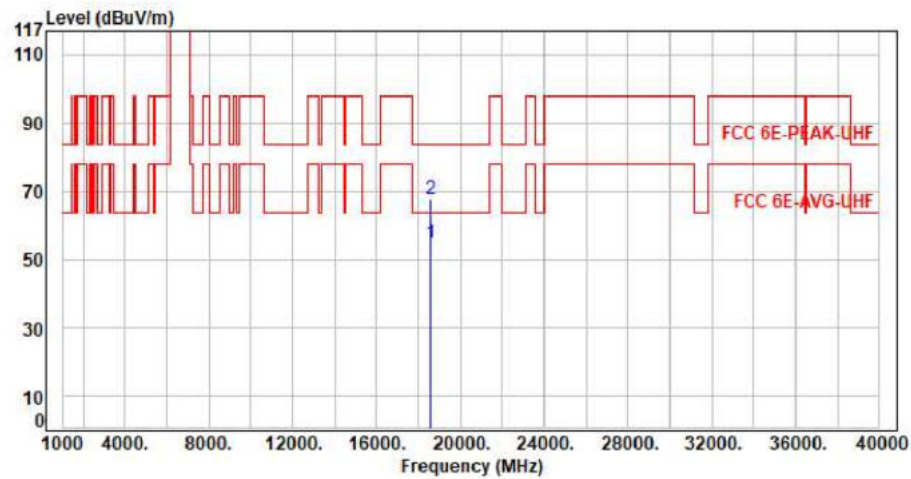


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	44.08	54.74	63.54	-8.80	Average	150	360	P
2	18555.00	10.66	56.82	67.48	83.54	-16.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

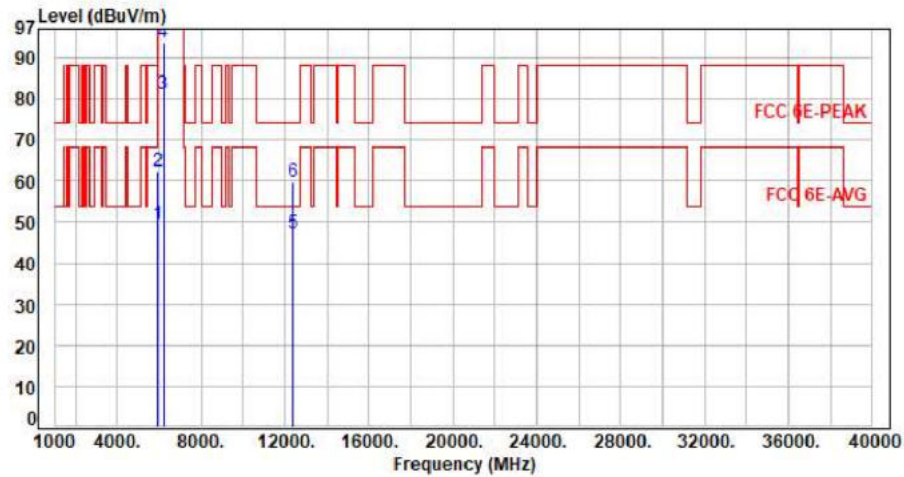


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.87	49.53	68.20	-18.67	Average	392	199	P
2	5925.00	7.66	54.71	62.37	88.20	-25.83	Peak	392	199	P
3	6185.00	8.36	72.89	81.25	200.00	-118.75	Average	392	199	P
4	6185.00	8.36	85.48	93.84	200.00	-106.16	Peak	392	199	P
5	12370.00	17.74	29.46	47.20	54.00	-6.80	Average	100	145	P
6	12370.00	17.74	42.18	59.92	74.00	-14.08	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

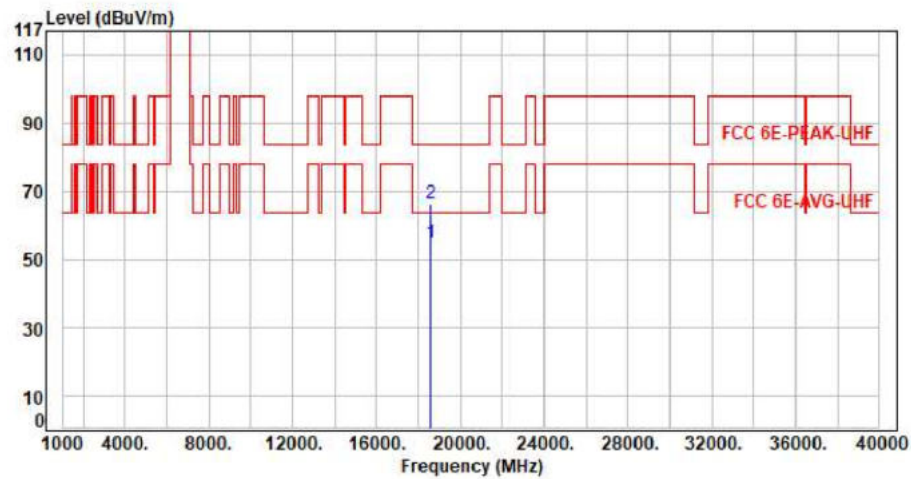


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	43.89	54.55	63.54	-8.99	Average	150	360	P
2	18555.00	10.66	55.82	66.48	83.54	-17.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

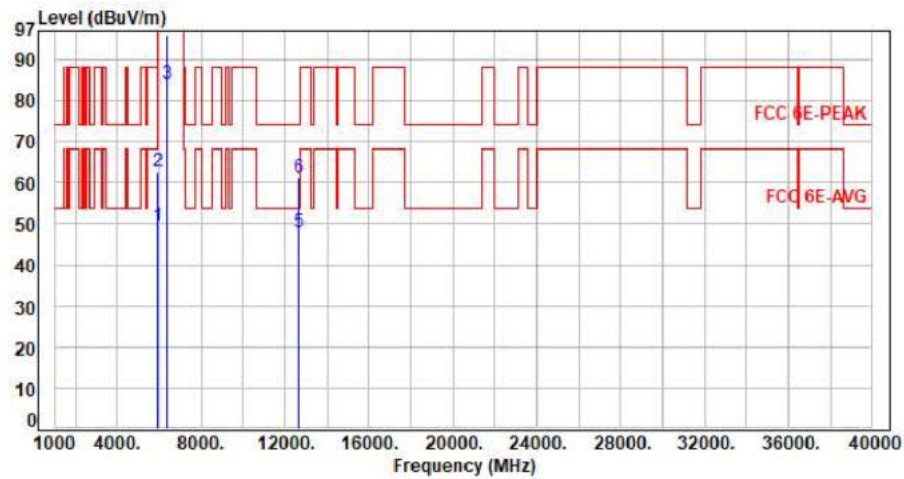


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.90	49.56	68.20	-18.64	Average	329	41	P
2	5925.00	7.66	54.94	62.60	88.20	-25.60	Peak	329	41	P
3	6345.00	8.31	75.69	84.00	200.00	-116.00	Average	329	41	P
4	6345.00	8.31	87.66	95.97	200.00	-104.03	Peak	329	41	P
5	12690.00	18.27	29.84	48.11	54.00	-5.89	Average	100	116	P
6	12690.00	18.27	42.92	61.19	74.00	-12.81	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

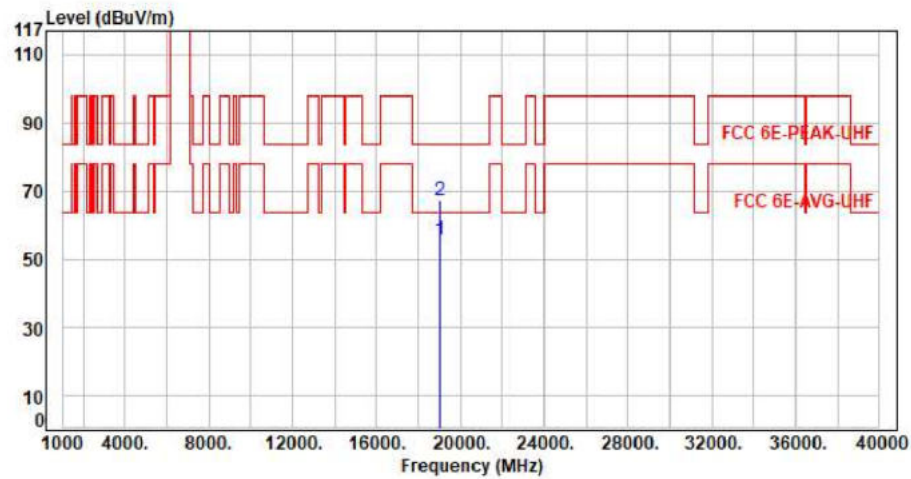


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.05	55.46	63.54	-8.08	Average	150	360	P
2	19035.00	11.41	55.96	67.37	83.54	-16.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

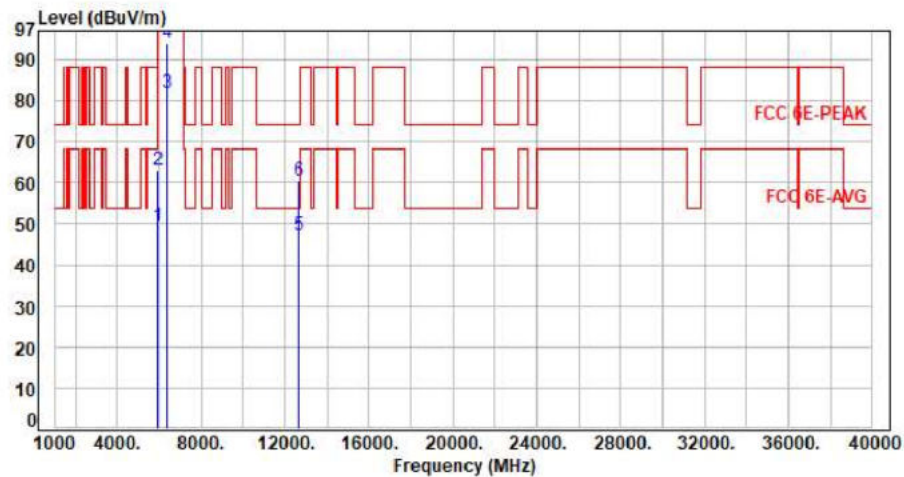

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	400	202	P
2	5925.00	7.66	55.34	63.00	88.20	-25.20	Peak	400	202	P
3	6345.00	8.31	73.39	81.70	200.00	-118.30	Average	400	202	P
4	6345.00	8.31	85.66	93.97	200.00	-106.03	Peak	400	202	P
5	12690.00	18.27	28.99	47.26	54.00	-6.74	Average	100	154	P
6	12690.00	18.27	42.09	60.36	74.00	-13.64	Peak	100	154	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

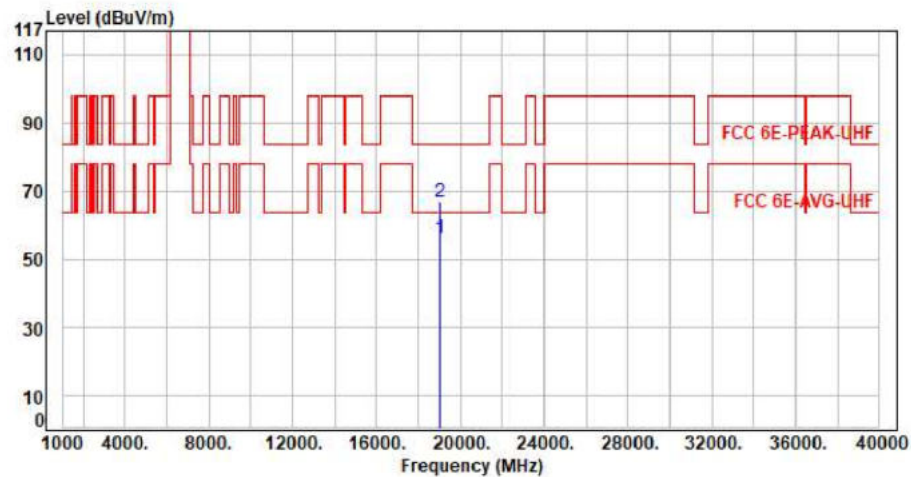


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.63	56.04	63.54	-7.50	Average	150	360	P
2	19035.00	11.41	55.47	66.88	83.54	-16.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

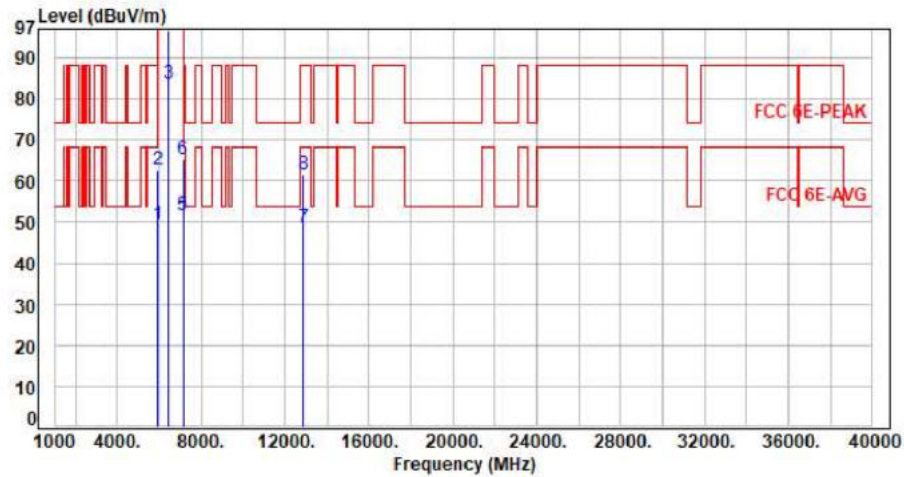

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.85	49.51	68.20	-18.69	Average	326	41	P
2	5925.00	7.66	54.91	62.57	88.20	-25.63	Peak	326	41	P
3	6435.00	8.32	75.40	83.72	200.00	-116.28	Average	326	41	P
4	6435.00	8.32	88.17	96.49	200.00	-103.51	Peak	326	41	P
5	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	326	41	P
6	7125.00	10.05	55.39	65.44	88.20	-22.76	Peak	326	41	P
7	12870.00	19.02	29.67	48.69	68.20	-19.51	Average	100	124	P
8	12870.00	19.02	42.68	61.70	88.20	-26.50	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor