




For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

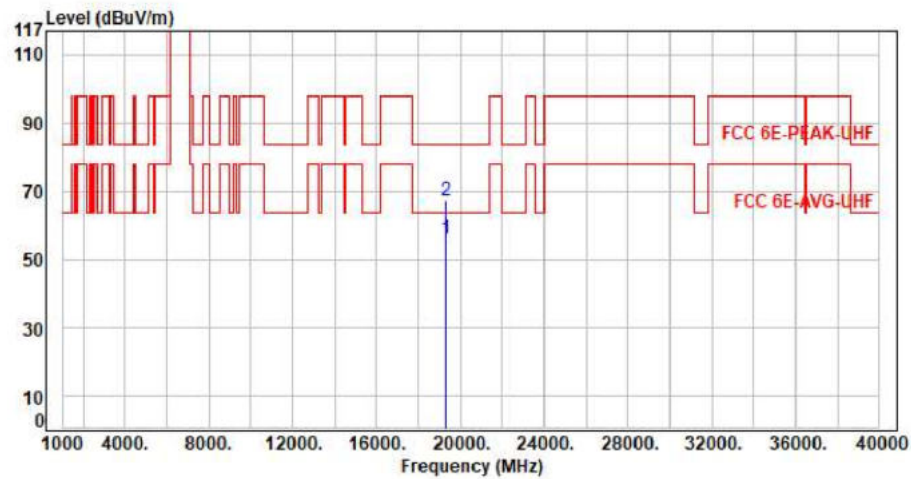


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.56	56.17	63.54	-7.37	Average	150	360	P
2	19305.00	11.61	55.38	66.99	83.54	-16.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

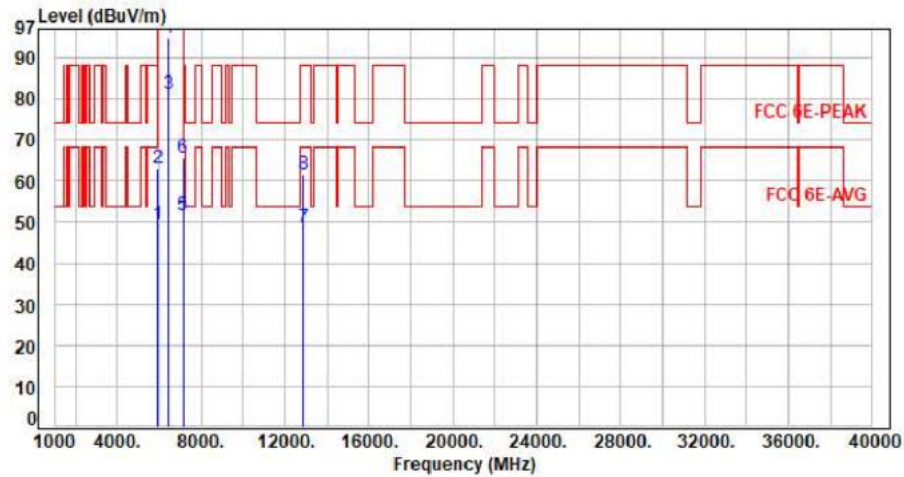

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.86	49.52	68.20	-18.68	Average	392	202	P
2	5925.00	7.66	55.56	63.22	88.20	-24.98	Peak	392	202	P
3	6435.00	8.32	72.77	81.09	200.00	-118.91	Average	392	202	P
4	6435.00	8.32	86.30	94.62	200.00	-105.38	Peak	392	202	P
5	7125.00	10.05	41.71	51.76	68.20	-16.44	Average	392	202	P
6	7125.00	10.05	55.54	65.59	88.20	-22.61	Peak	392	202	P
7	12870.00	19.02	29.83	48.85	68.20	-19.35	Average	100	188	P
8	12870.00	19.02	42.67	61.69	88.20	-26.51	Peak	100	188	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

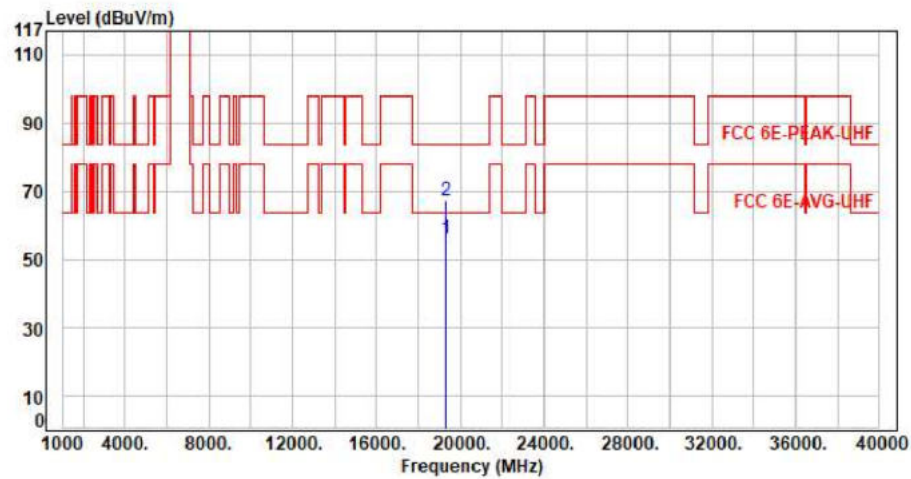


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.39	56.00	63.54	-7.54	Average	150	360	P
2	19305.00	11.61	55.46	67.07	83.54	-16.47	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

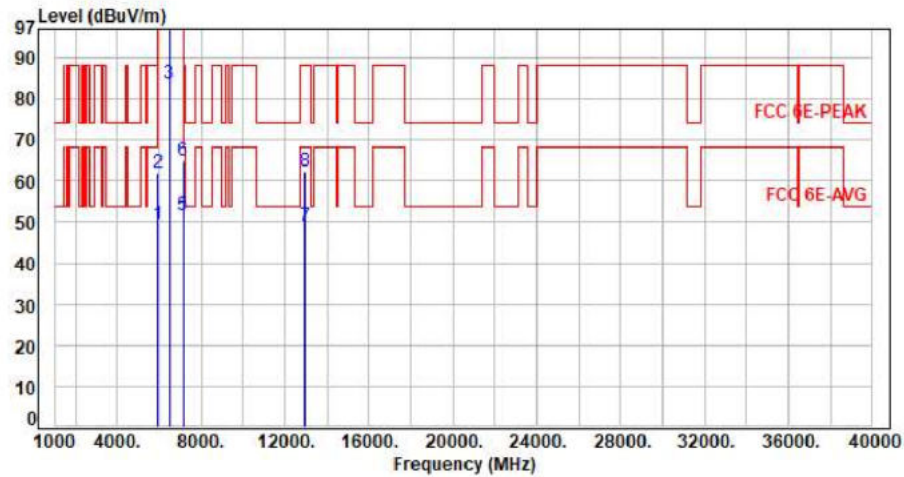

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.83	49.49	68.20	-18.71	Average	294	41	P
2	5925.00	7.66	54.46	62.12	88.20	-26.08	Peak	294	41	P
3	6475.00	8.33	75.33	83.66	200.00	-116.34	Average	294	41	P
4	6475.00	8.33	89.18	97.51	200.00	-102.49	Peak	294	41	P
5	7125.00	10.05	41.68	51.73	68.20	-16.47	Average	294	41	P
6	7125.00	10.05	54.84	64.89	88.20	-23.31	Peak	294	41	P
7	12950.00	19.39	29.68	49.07	68.20	-19.13	Average	100	124	P
8	12950.00	19.39	42.95	62.34	88.20	-25.86	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

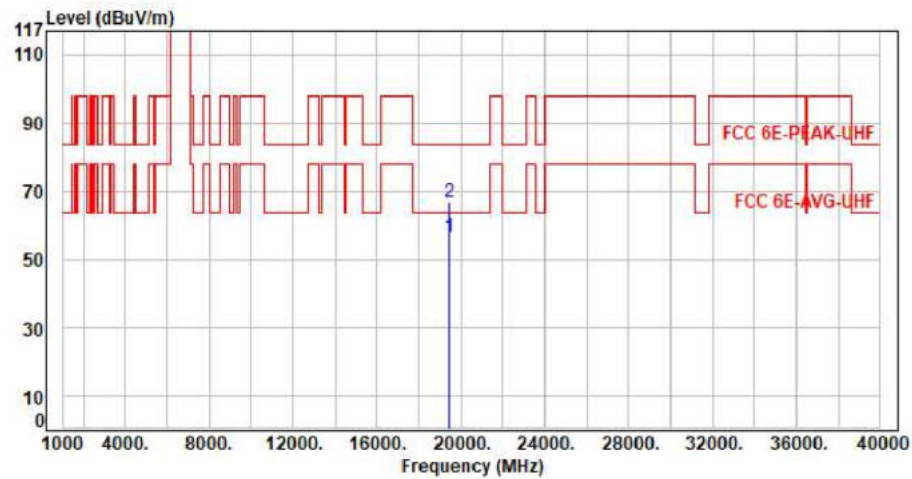


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.92	56.67	63.54	-6.87	Average	150	360	P
2	19425.00	11.75	55.02	66.77	83.54	-16.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

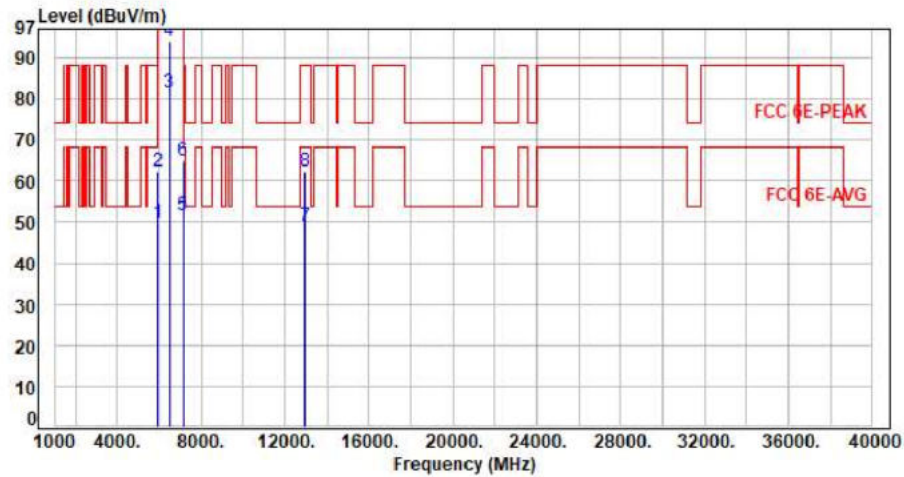

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.98	49.64	68.20	-18.56	Average	400	205	P
2	5925.00	7.66	54.73	62.39	88.20	-25.81	Peak	400	205	P
3	6475.00	8.33	73.24	81.57	200.00	-118.43	Average	400	205	P
4	6475.00	8.33	85.90	94.23	200.00	-105.77	Peak	400	205	P
5	7125.00	10.05	41.70	51.75	68.20	-16.45	Average	400	205	P
6	7125.00	10.05	54.79	64.84	88.20	-23.36	Peak	400	205	P
7	12950.00	19.39	29.61	49.00	68.20	-19.20	Average	100	142	P
8	12950.00	19.39	42.81	62.20	88.20	-26.00	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

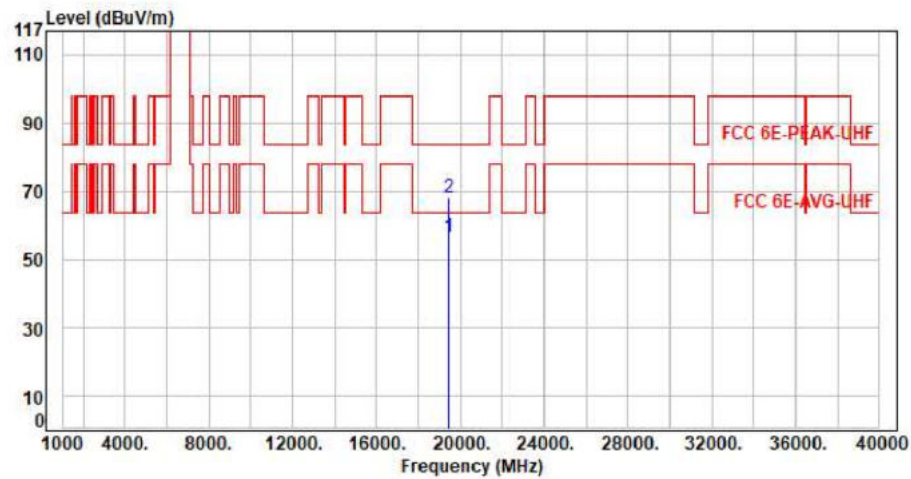


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.75	56.50	63.54	-7.04	Average	150	360	P
2	19425.00	11.75	56.18	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

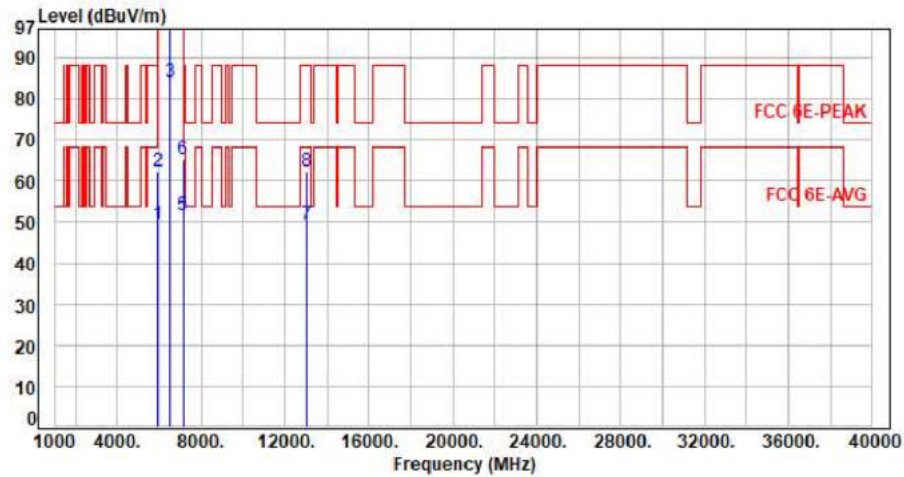

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.83	49.49	68.20	-18.71	Average	319	41	P
2	5925.00	7.66	54.59	62.25	88.20	-25.95	Peak	319	41	P
3	6515.00	8.42	75.59	84.01	200.00	-115.99	Average	319	41	P
4	6515.00	8.42	88.60	97.02	200.00	-102.98	Peak	319	41	P
5	7125.00	10.05	41.64	51.69	68.20	-16.51	Average	319	41	P
6	7125.00	10.05	55.08	65.13	88.20	-23.07	Peak	319	41	P
7	13030.00	19.86	29.47	49.33	68.20	-18.87	Average	100	127	P
8	13030.00	19.86	42.60	62.46	88.20	-25.74	Peak	100	127	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

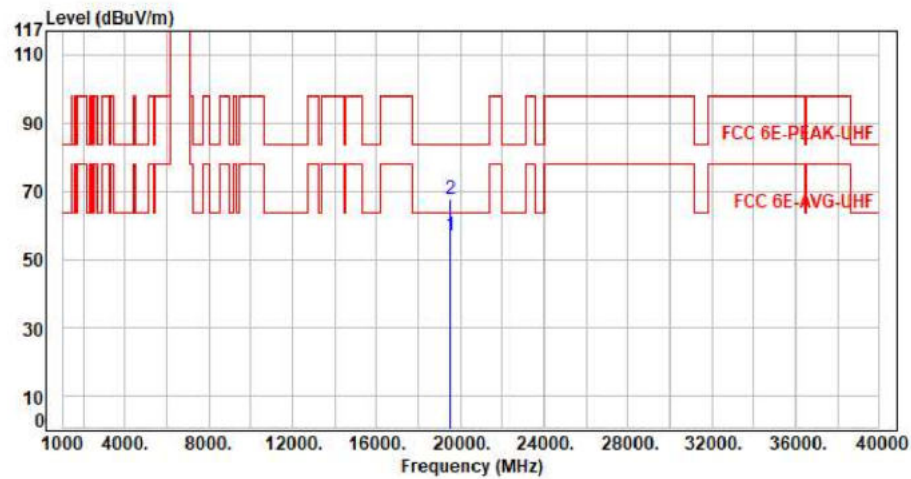


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.72	56.91	63.54	-6.63	Average	150	360	P
2	19545.00	12.19	55.61	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

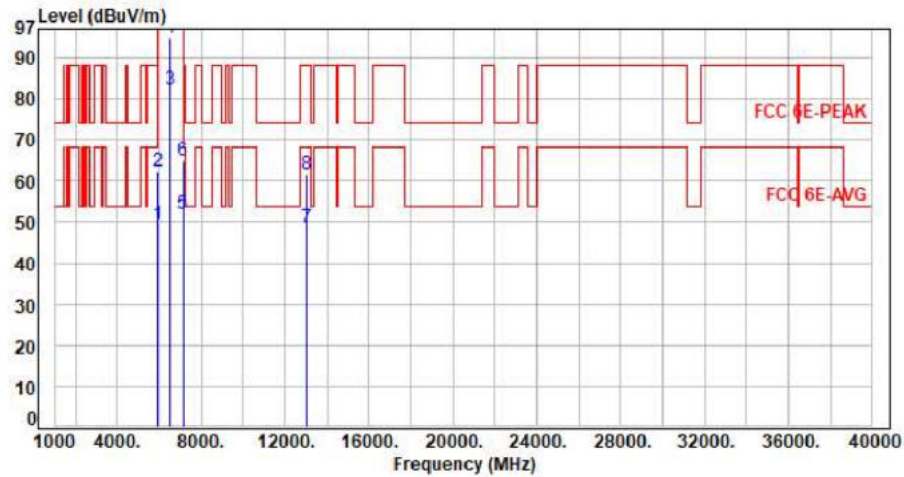


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.87	49.53	68.20	-18.67	Average	395	204	P
2	5925.00	7.66	54.67	62.33	88.20	-25.87	Peak	395	204	P
3	6515.00	8.42	73.86	82.28	200.00	-117.72	Average	395	204	P
4	6515.00	8.42	86.55	94.97	200.00	-105.03	Peak	395	204	P
5	7125.00	10.05	41.83	51.88	68.20	-16.32	Average	395	204	P
6	7125.00	10.05	54.98	65.03	88.20	-23.17	Peak	395	204	P
7	13030.00	19.86	28.87	48.73	68.20	-19.47	Average	100	124	P
8	13030.00	19.86	41.59	61.45	88.20	-26.75	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

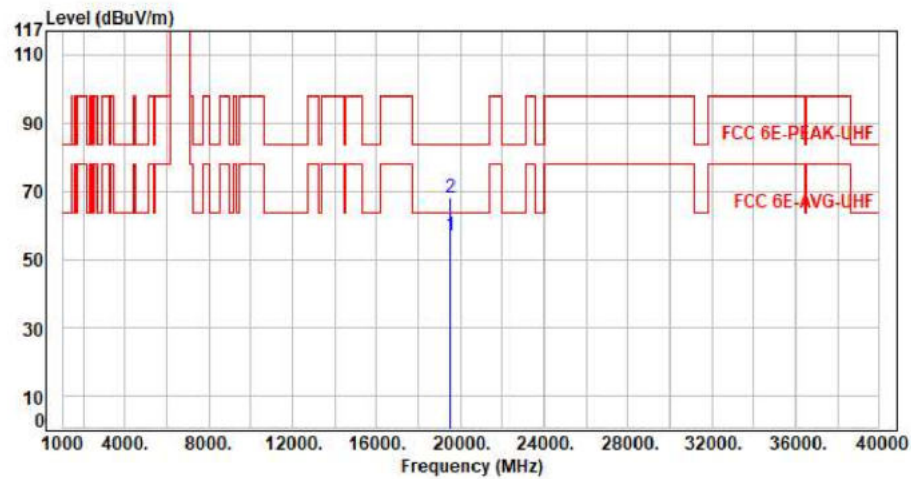


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.54	56.73	63.54	-6.81	Average	150	360	P
2	19545.00	12.19	55.83	68.02	83.54	-15.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

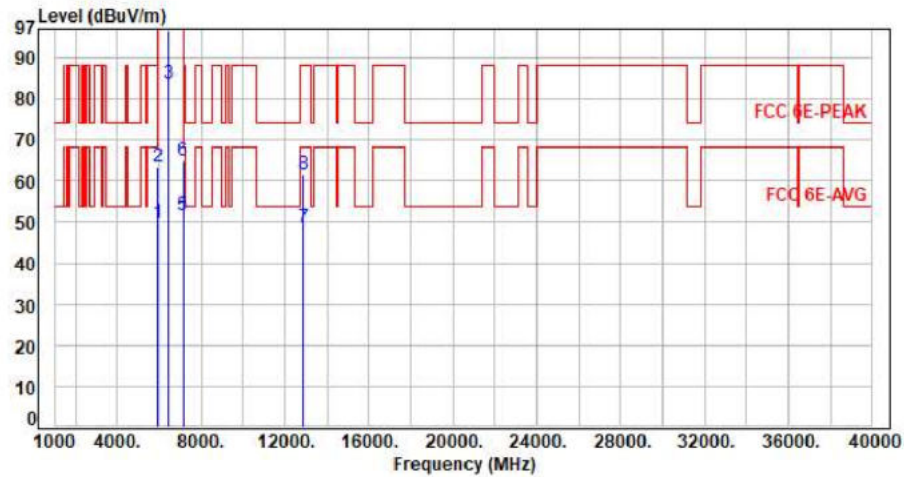


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.97	49.63	68.20	-18.57	Average	310	41	P
2	5925.00	7.66	55.83	63.49	88.20	-24.71	Peak	310	41	P
3	6445.00	8.31	75.27	83.58	200.00	-116.42	Average	310	41	P
4	6445.00	8.31	88.31	96.62	200.00	-103.38	Peak	310	41	P
5	7125.00	10.05	41.71	51.76	68.20	-16.44	Average	310	41	P
6	7125.00	10.05	54.90	64.95	88.20	-23.25	Peak	310	41	P
7	12890.00	19.05	29.49	48.54	68.20	-19.66	Average	100	124	P
8	12890.00	19.05	42.62	61.67	88.20	-26.53	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

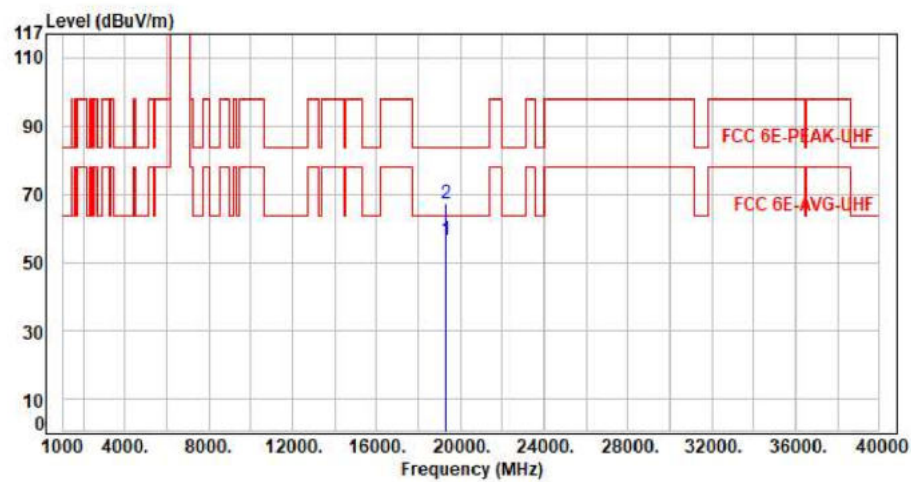


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.68	56.30	63.54	-7.24	Average	150	360	P
2	19335.00	11.62	55.66	67.28	83.54	-16.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

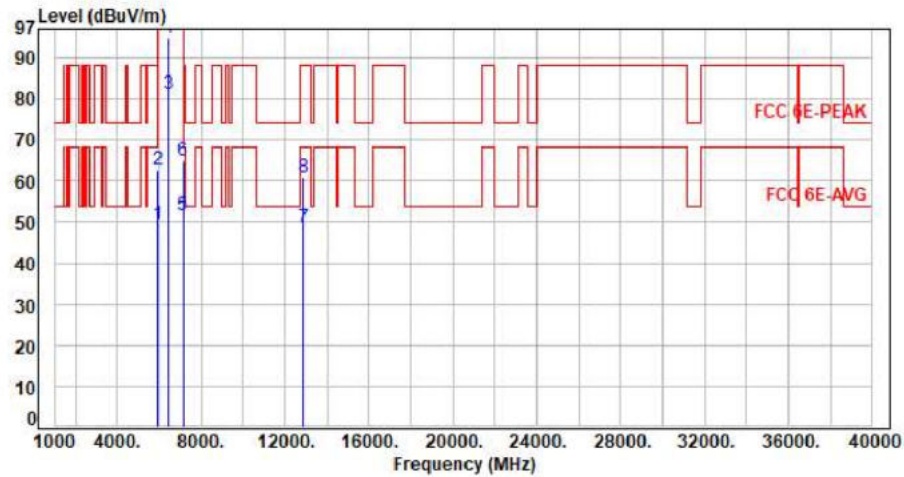

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	390	204	P
2	5925.00	7.66	55.13	62.79	88.20	-25.41	Peak	390	204	P
3	6445.00	8.31	72.84	81.15	200.00	-118.85	Average	390	204	P
4	6445.00	8.31	86.34	94.65	200.00	-105.35	Peak	390	204	P
5	7125.00	10.05	41.64	51.69	68.20	-16.51	Average	390	204	P
6	7125.00	10.05	54.92	64.97	88.20	-23.23	Peak	390	204	P
7	12890.00	19.05	29.49	48.54	68.20	-19.66	Average	100	145	P
8	12890.00	19.05	41.69	60.74	88.20	-27.46	Peak	100	145	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

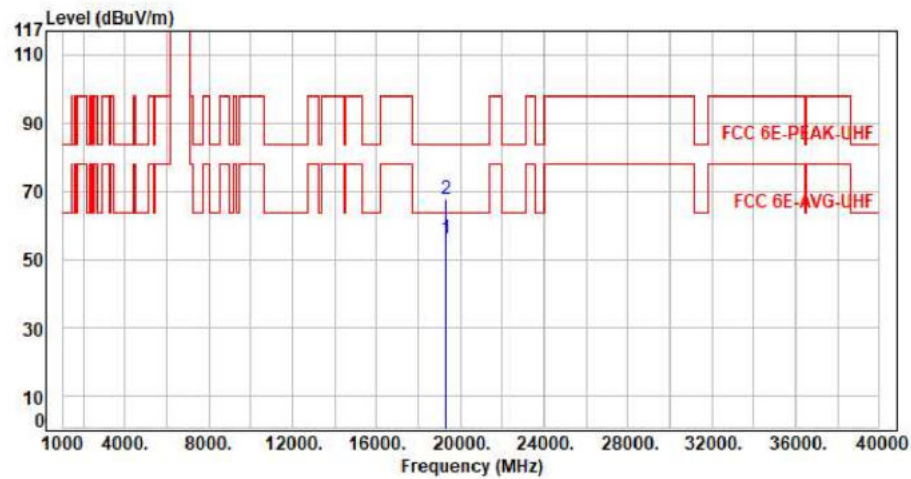


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.63	56.25	63.54	-7.29	Average	150	360	P
2	19335.00	11.62	56.02	67.64	83.54	-15.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

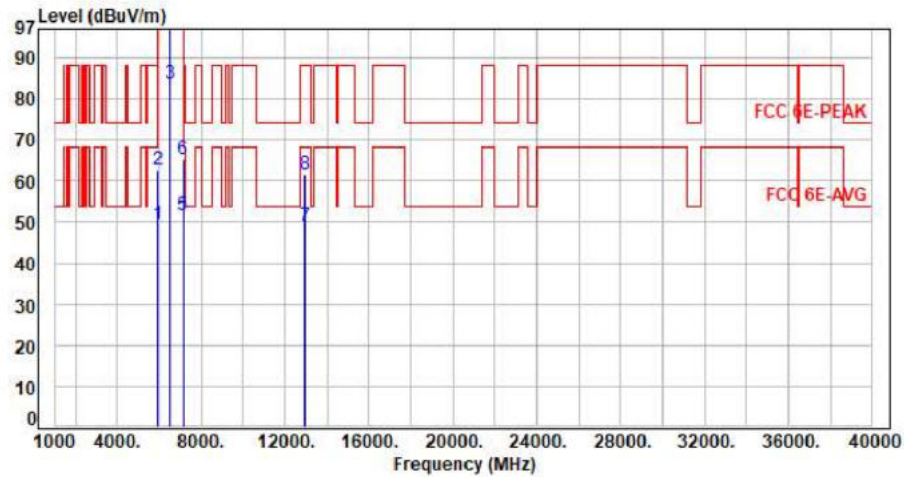

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	294	42	P
2	5925.00	7.66	54.99	62.65	88.20	-25.55	Peak	294	42	P
3	6485.00	8.34	75.21	83.55	200.00	-116.45	Average	294	42	P
4	6485.00	8.34	88.49	96.83	200.00	-103.17	Peak	294	42	P
5	7125.00	10.05	41.66	51.71	68.20	-16.49	Average	294	42	P
6	7125.00	10.05	55.35	65.40	88.20	-22.80	Peak	294	42	P
7	12970.00	19.47	29.74	49.21	68.20	-18.99	Average	100	124	P
8	12970.00	19.47	42.09	61.56	88.20	-26.64	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

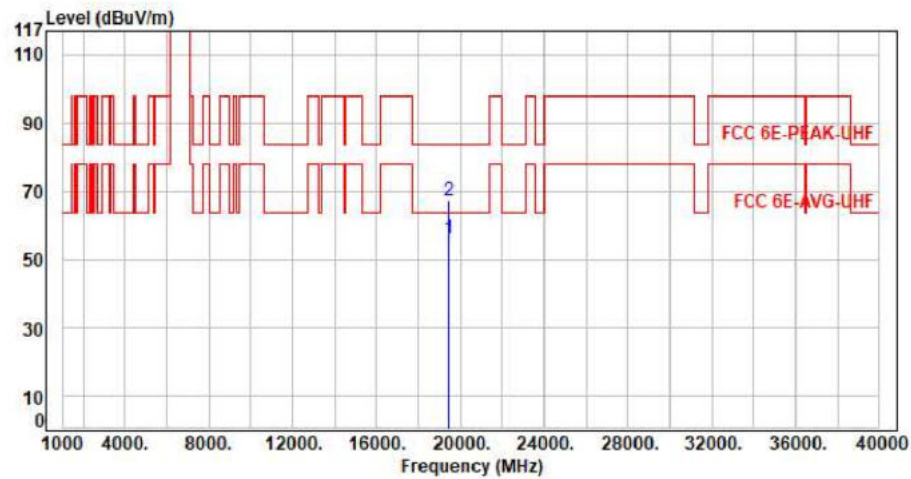


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.58	56.15	63.54	-7.39	Average	150	360	P
2	19455.00	11.57	55.65	67.22	83.54	-16.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

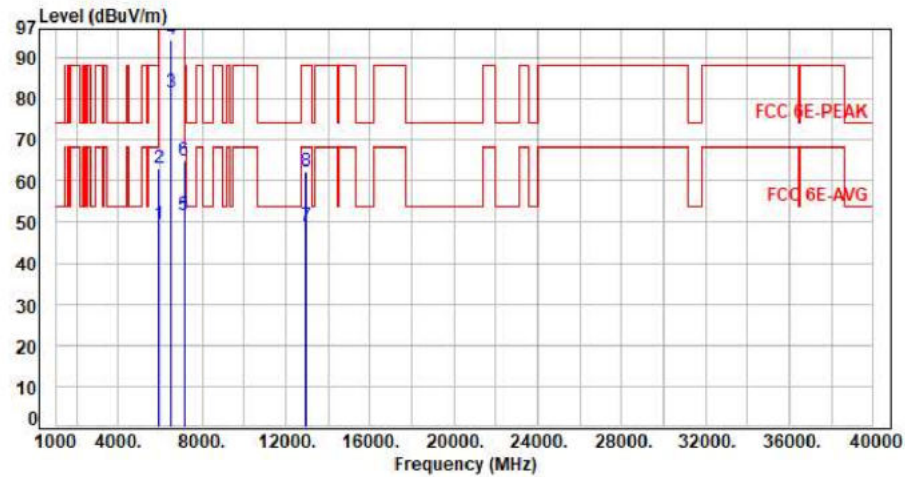

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.92	49.58	68.20	-18.62	Average	399	204	P
2	5925.00	7.66	55.57	63.23	88.20	-24.97	Peak	399	204	P
3	6485.00	8.34	73.07	81.41	200.00	-118.59	Average	399	204	P
4	6485.00	8.34	86.09	94.43	200.00	-105.57	Peak	399	204	P
5	7125.00	10.05	41.68	51.73	68.20	-16.47	Average	399	204	P
6	7125.00	10.05	54.81	64.86	88.20	-23.34	Peak	399	204	P
7	12970.00	19.47	29.47	48.94	68.20	-19.26	Average	100	245	P
8	12970.00	19.47	42.81	62.28	88.20	-25.92	Peak	100	245	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

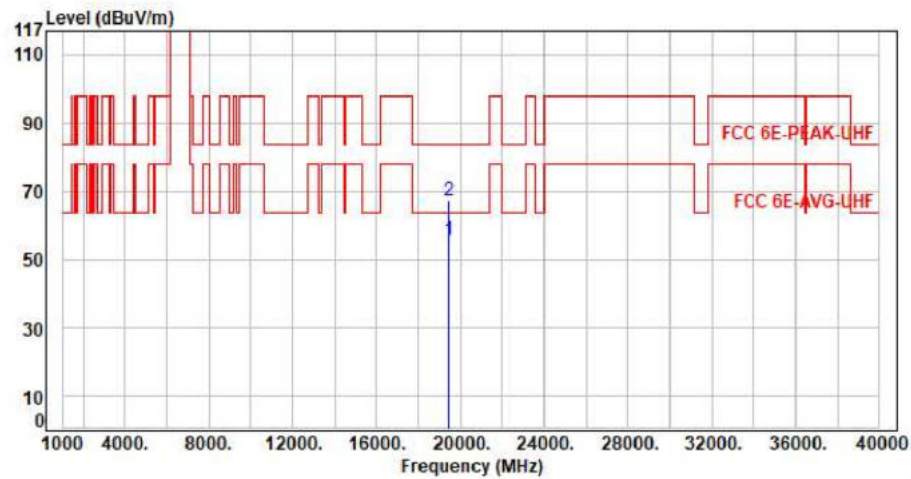


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.17	55.74	63.54	-7.80	Average	150	360	P
2	19455.00	11.57	55.83	67.40	83.54	-16.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

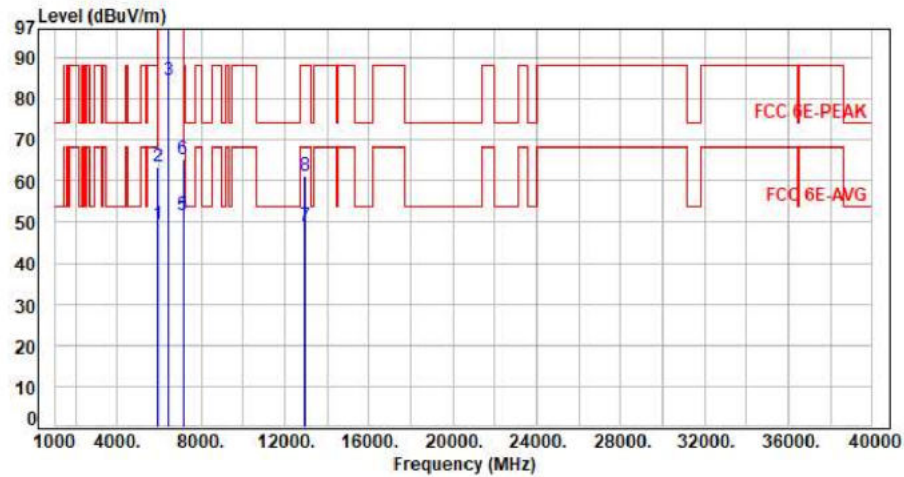

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.78	49.44	68.20	-18.76	Average	308	42	P
2	5925.00	7.66	55.66	63.32	88.20	-24.88	Peak	308	42	P
3	6465.00	8.32	76.23	84.55	200.00	-115.45	Average	308	42	P
4	6465.00	8.32	89.64	97.96	200.00	-102.04	Peak	308	42	P
5	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	308	42	P
6	7125.00	10.05	55.06	65.11	88.20	-23.09	Peak	308	42	P
7	12930.00	19.27	29.74	49.01	68.20	-19.19	Average	100	224	P
8	12930.00	19.27	41.90	61.17	88.20	-27.03	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

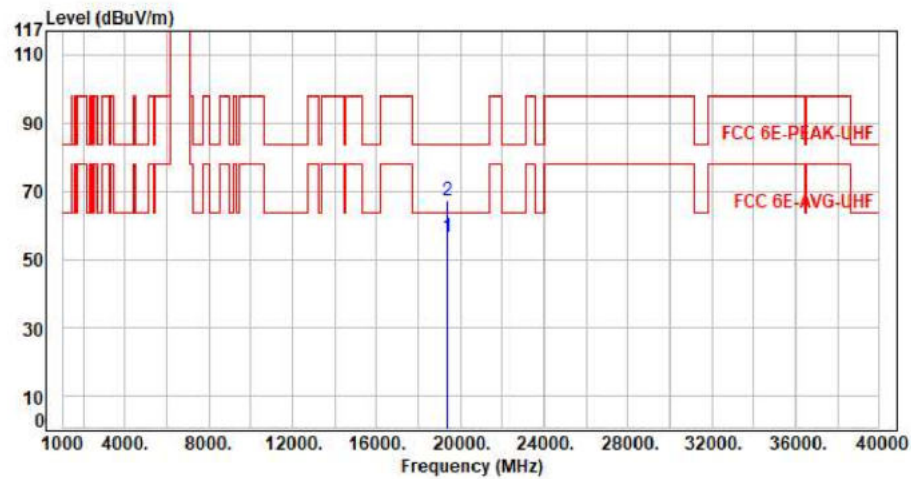


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	44.77	56.68	63.54	-6.86	Average	150	360	P
2	19395.00	11.91	55.18	67.09	83.54	-16.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

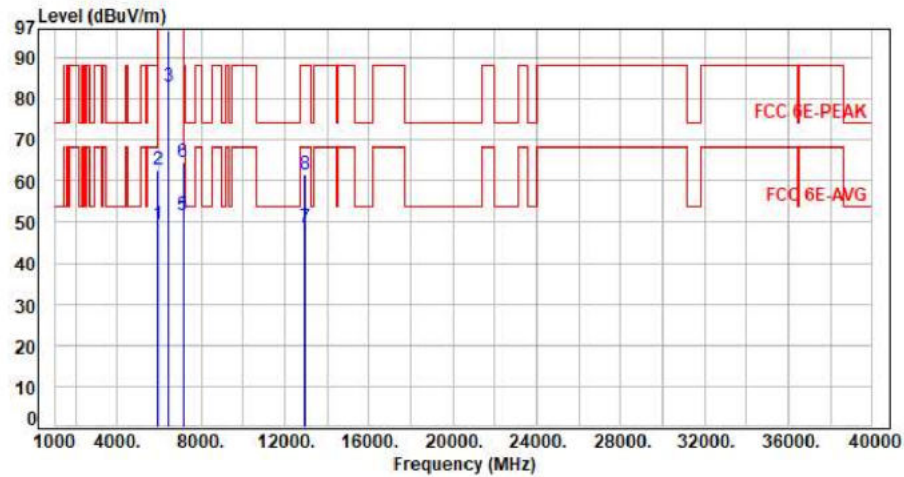

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.87	49.53	68.20	-18.67	Average	399	205	P
2	5925.00	7.66	54.94	62.60	88.20	-25.60	Peak	399	205	P
3	6465.00	8.32	74.69	83.01	200.00	-116.99	Average	399	205	P
4	6465.00	8.32	88.16	96.48	200.00	-103.52	Peak	399	205	P
5	7125.00	10.05	41.61	51.66	68.20	-16.54	Average	399	205	P
6	7125.00	10.05	54.60	64.65	88.20	-23.55	Peak	399	205	P
7	12930.00	19.27	29.47	48.74	68.20	-19.46	Average	100	167	P
8	12930.00	19.27	42.15	61.42	88.20	-26.78	Peak	100	167	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

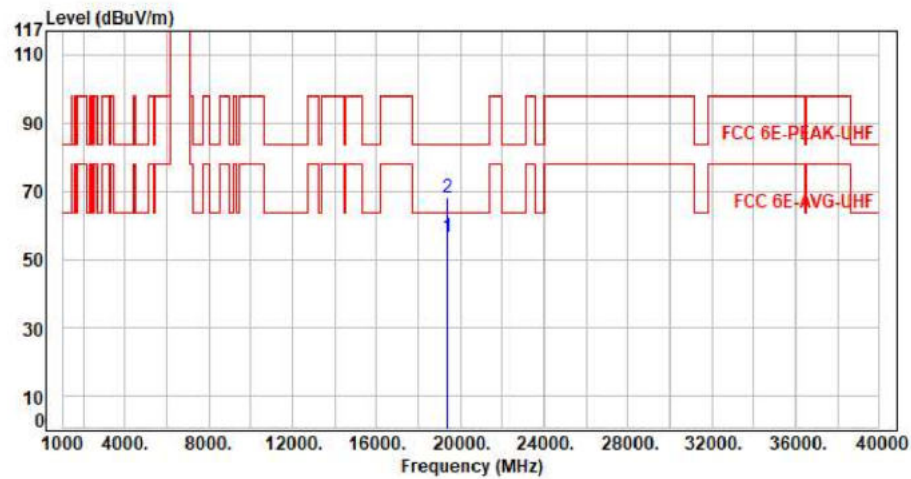


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	44.62	56.53	63.54	-7.01	Average	150	360	P
2	19395.00	11.91	56.27	68.18	83.54	-15.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

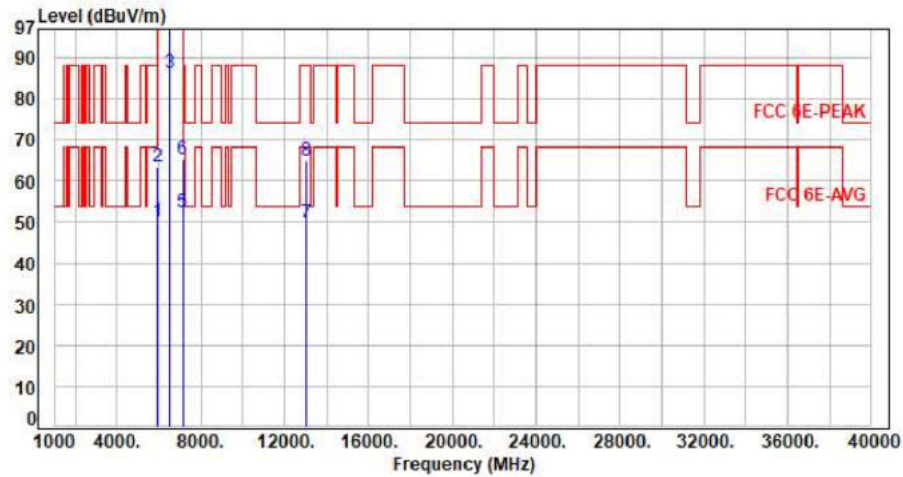

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.32	49.98	68.20	-18.22	Average	334	41	P
2	5925.00	7.66	55.88	63.54	88.20	-24.66	Peak	334	41	P
3	6525.00	8.45	77.88	86.33	200.00	-113.67	Average	334	41	P
4	6525.00	8.45	90.50	98.95	200.00	-101.05	Peak	334	41	P
5	7125.00	10.05	42.16	52.21	68.20	-15.99	Average	334	41	P
6	7125.00	10.05	55.29	65.34	88.20	-22.86	Peak	334	41	P
7	13050.00	20.02	29.66	49.68	68.20	-18.52	Average	100	185	P
8	13050.00	20.02	44.76	64.78	88.20	-23.42	Peak	100	185	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

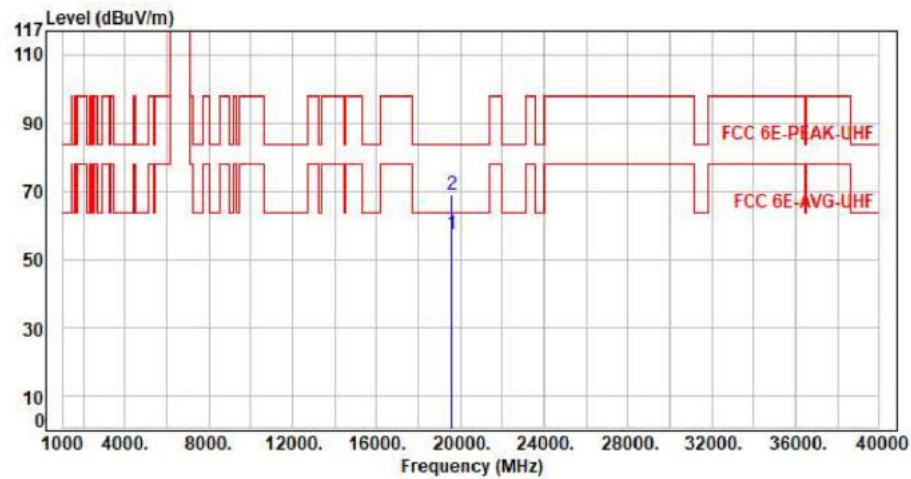


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.49	57.51	63.54	-6.03	Average	150	360	P
2	19575.00	12.02	56.88	68.90	83.54	-14.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

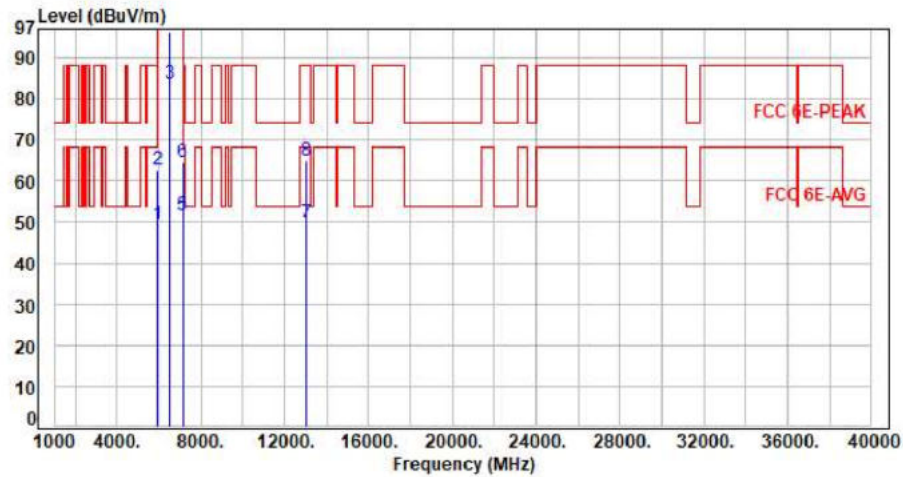


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.62	49.28	68.20	-18.92	Average	394	209	P
2	5925.00	7.66	54.98	62.64	88.20	-25.56	Peak	394	209	P
3	6525.00	8.45	75.28	83.73	200.00	-116.27	Average	394	209	P
4	6525.00	8.45	87.88	96.33	200.00	-103.67	Peak	394	209	P
5	7125.00	10.05	41.58	51.63	68.20	-16.57	Average	394	209	P
6	7125.00	10.05	54.37	64.42	88.20	-23.78	Peak	394	209	P
7	13050.00	20.02	29.66	49.68	68.20	-18.52	Average	100	214	P
8	13050.00	20.02	44.76	64.78	88.20	-23.42	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

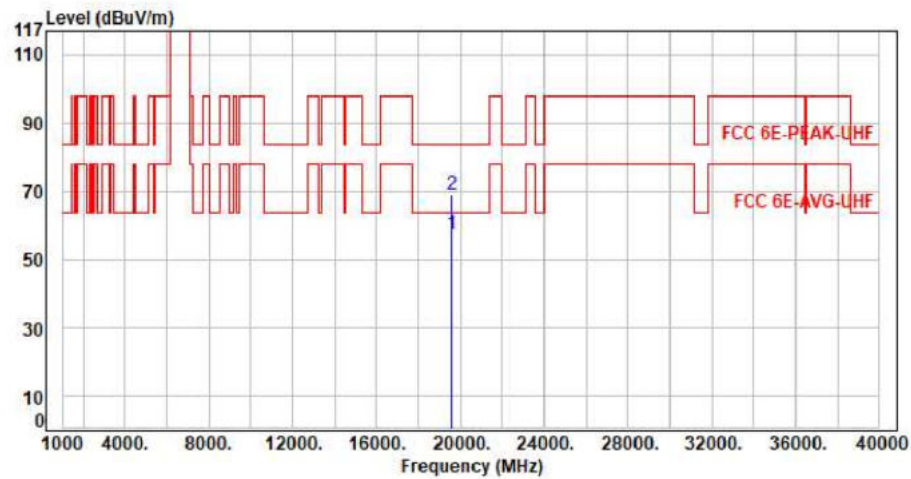


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.42	57.44	63.54	-6.10	Average	150	360	P
2	19575.00	12.02	56.72	68.74	83.54	-14.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

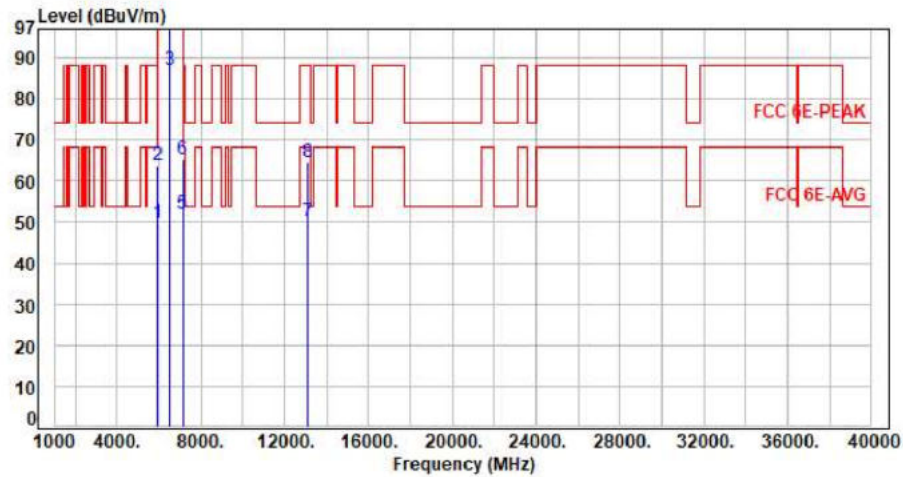

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.26	49.92	68.20	-18.28	Average	331	41	P
2	5925.00	7.66	56.11	63.77	88.20	-24.43	Peak	331	41	P
3	6545.00	8.55	78.53	87.08	200.00	-112.92	Average	331	41	P
4	6545.00	8.55	91.74	100.29	200.00	-99.71	Peak	331	41	P
5	7125.00	10.05	42.07	52.12	68.20	-16.08	Average	331	41	P
6	7125.00	10.05	55.32	65.37	88.20	-22.83	Peak	331	41	P
7	13090.00	20.20	29.88	50.08	68.20	-18.12	Average	100	123	P
8	13090.00	20.20	44.36	64.56	88.20	-23.64	Peak	100	123	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

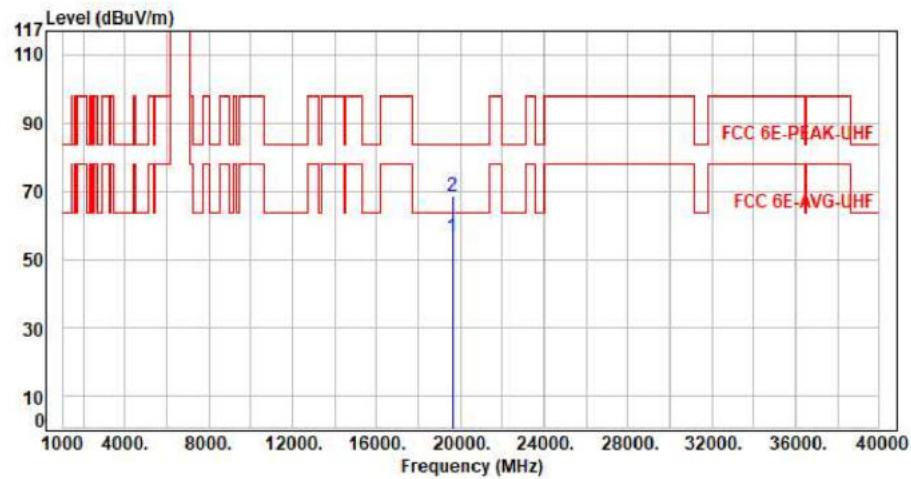


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	45.12	56.70	63.54	-6.84	Average	150	360	P
2	19635.00	11.58	56.99	68.57	83.54	-14.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

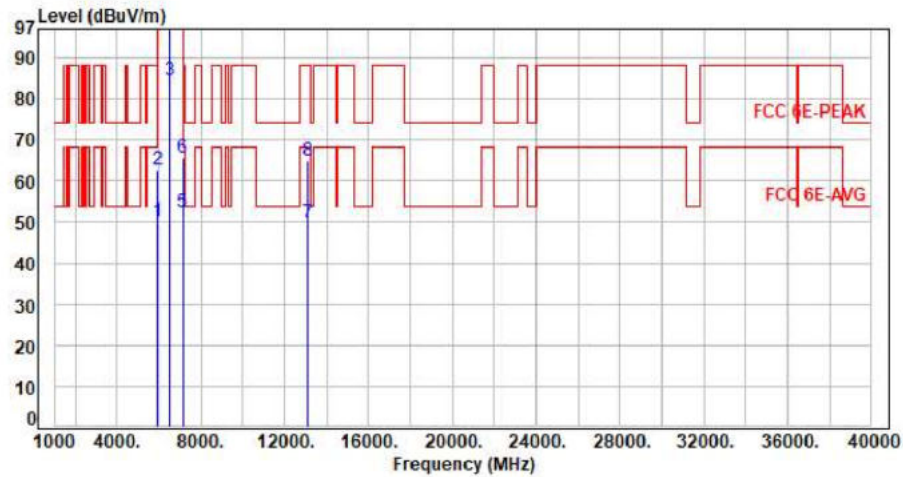


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.62	50.28	68.20	-17.92	Average	400	213	P
2	5925.00	7.66	55.22	62.88	88.20	-25.32	Peak	400	213	P
3	6545.00	8.55	75.89	84.44	200.00	-115.56	Average	400	213	P
4	6545.00	8.55	89.60	98.15	200.00	-101.85	Peak	400	213	P
5	7125.00	10.05	42.14	52.19	68.20	-16.01	Average	400	213	P
6	7125.00	10.05	55.70	65.75	88.20	-22.45	Peak	400	213	P
7	13090.00	20.20	29.63	49.83	68.20	-18.37	Average	100	241	P
8	13090.00	20.20	44.69	64.89	88.20	-23.31	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

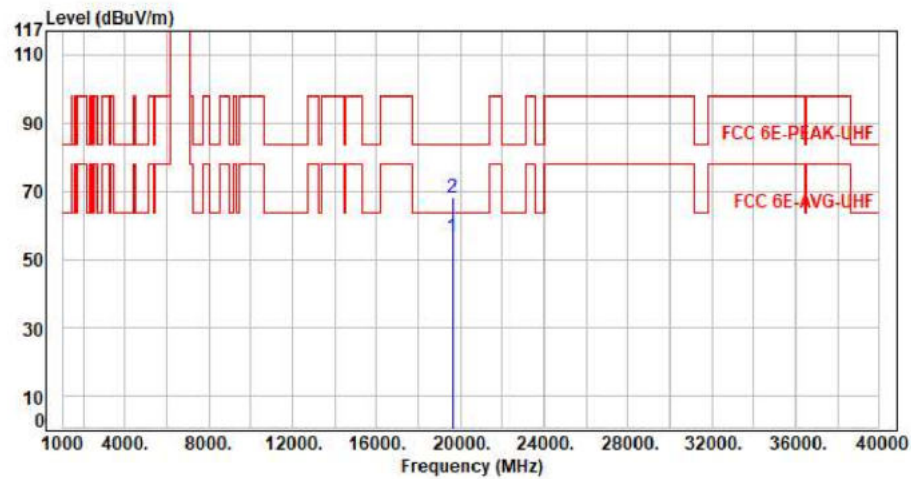


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	45.10	56.68	63.54	-6.86	Average	150	360	P
2	19635.00	11.58	56.59	68.17	83.54	-15.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

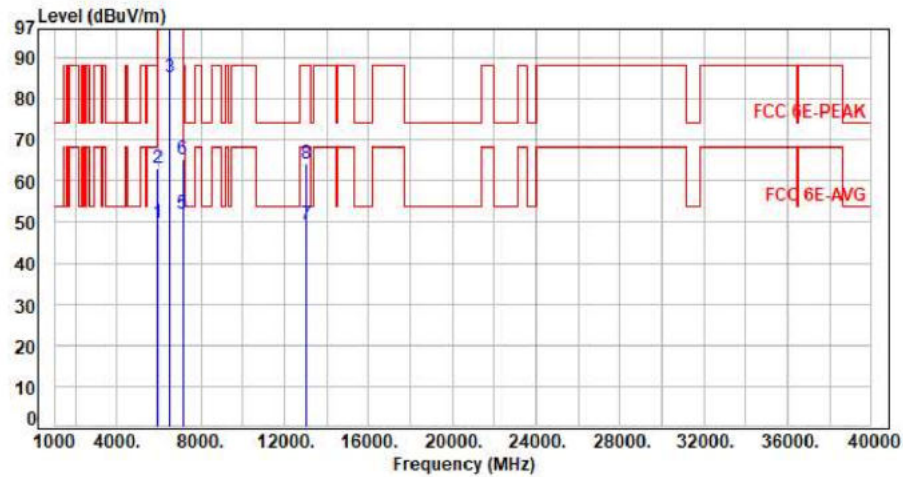

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	317	41	P
2	5925.00	7.66	55.48	63.14	88.20	-25.06	Peak	317	41	P
3	6505.00	8.37	76.96	85.33	200.00	-114.67	Average	317	41	P
4	6505.00	8.37	90.11	98.48	200.00	-101.52	Peak	317	41	P
5	7125.00	10.05	42.08	52.13	68.20	-16.07	Average	317	41	P
6	7125.00	10.05	55.14	65.19	88.20	-23.01	Peak	317	41	P
7	13010.00	19.69	29.86	49.55	68.20	-18.65	Average	100	115	P
8	13010.00	19.69	44.62	64.31	88.20	-23.89	Peak	100	115	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

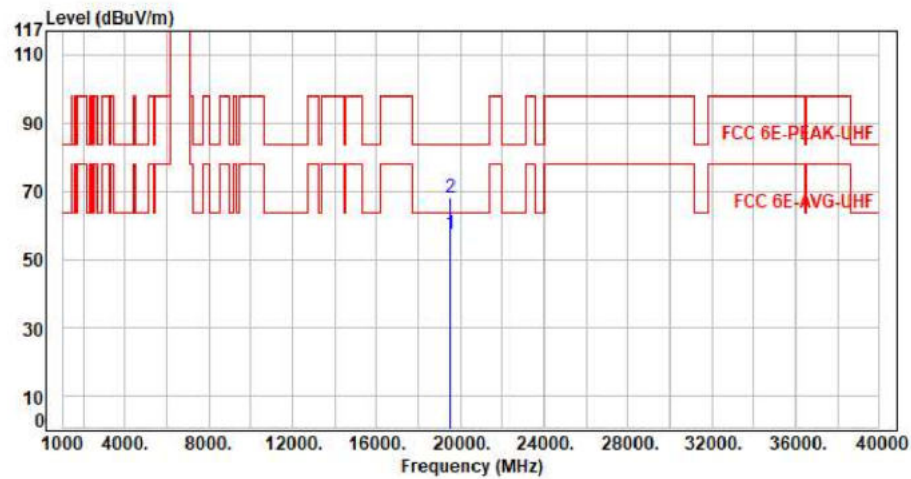


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.48	57.39	63.54	-6.15	Average	150	360	P
2	19515.00	11.91	56.21	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

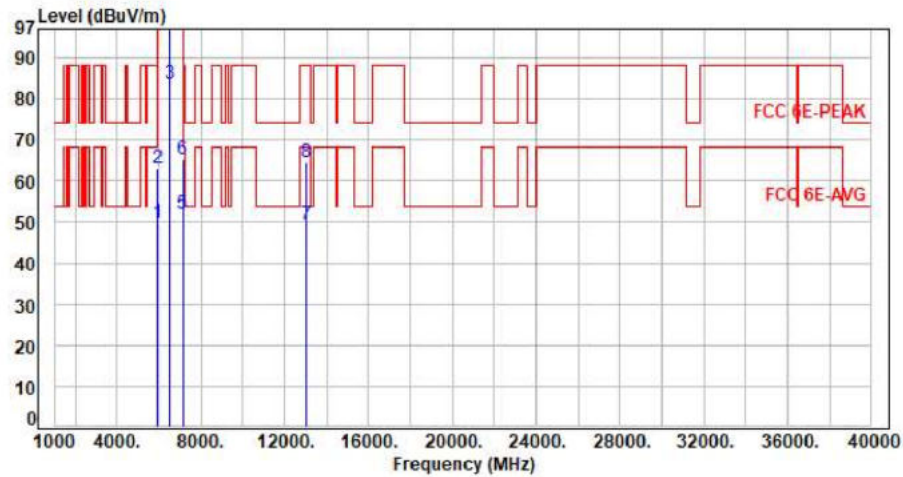


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	400	211	P
2	5925.00	7.66	55.31	62.97	88.20	-25.23	Peak	400	211	P
3	6505.00	8.37	75.18	83.55	200.00	-116.45	Average	400	211	P
4	6505.00	8.37	88.78	97.15	200.00	-102.85	Peak	400	211	P
5	7125.00	10.05	42.03	52.08	68.20	-16.12	Average	400	211	P
6	7125.00	10.05	55.38	65.43	88.20	-22.77	Peak	400	211	P
7	13010.00	19.69	29.67	49.36	68.20	-18.84	Average	100	119	P
8	13010.00	19.69	44.88	64.57	88.20	-23.63	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

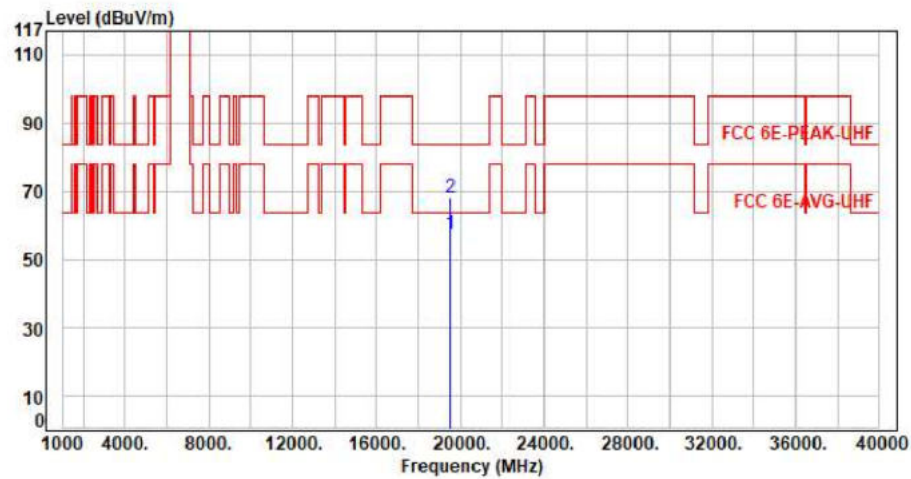


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.28	57.19	63.54	-6.35	Average	150	360	P
2	19515.00	11.91	56.12	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

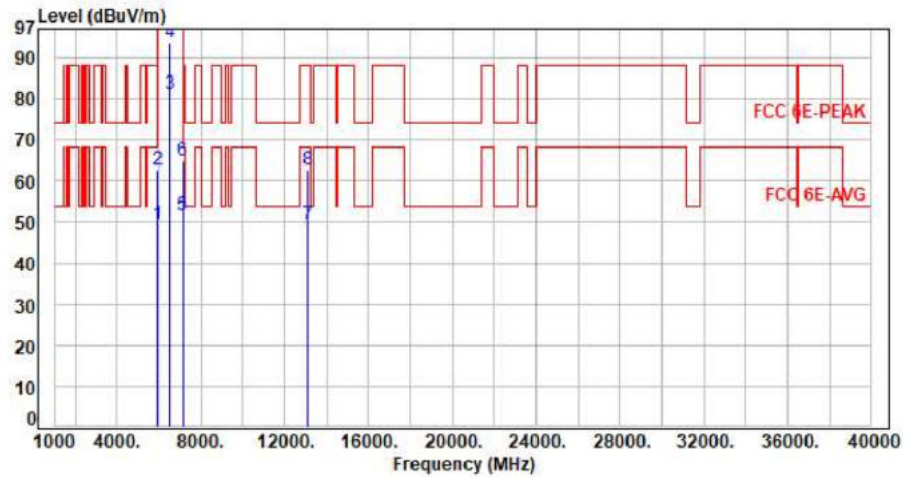


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.83	49.49	68.20	-18.71	Average	260	55	P
2	5925.00	7.66	55.21	62.87	88.20	-25.33	Peak	260	55	P
3	6535.00	8.50	72.54	81.04	200.00	-118.96	Average	260	55	P
4	6535.00	8.50	85.07	93.57	200.00	-106.43	Peak	260	55	P
5	7125.00	10.05	41.66	51.71	68.20	-16.49	Average	260	55	P
6	7125.00	10.05	54.87	64.92	88.20	-23.28	Peak	260	55	P
7	13070.00	20.11	29.45	49.56	68.20	-18.64	Average	100	124	P
8	13070.00	20.11	42.61	62.72	88.20	-25.48	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

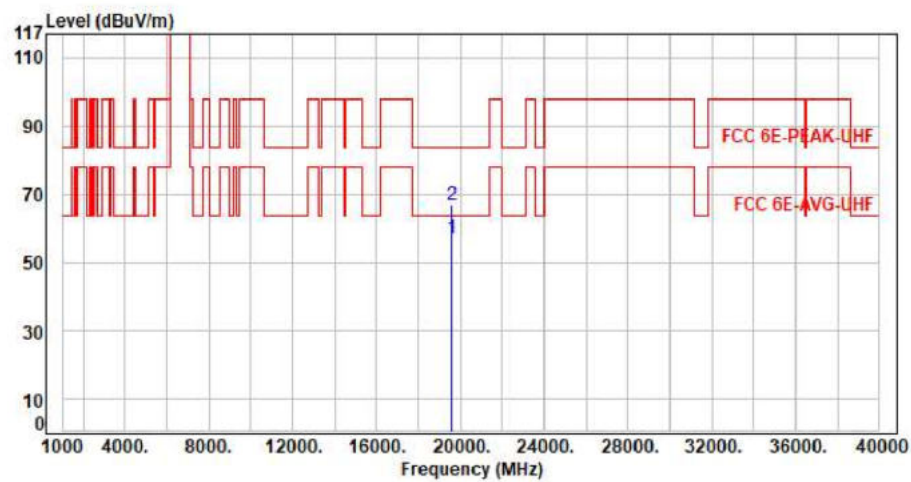

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.95	56.73	63.54	-6.81	Average	150	360	P
2	19605.00	11.78	54.85	66.63	83.54	-16.91	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

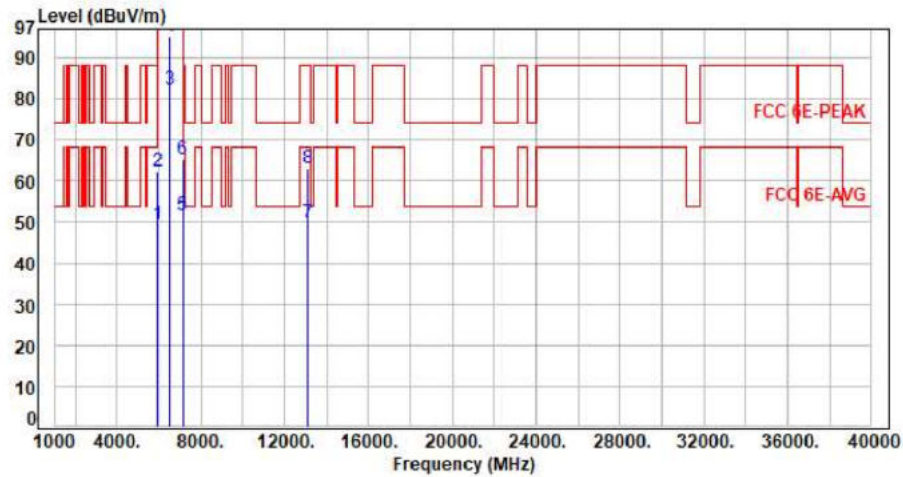

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.86	49.52	68.20	-18.68	Average	400	206	P
2	5925.00	7.66	54.72	62.38	88.20	-25.82	Peak	400	206	P
3	6535.00	8.50	73.75	82.25	200.00	-117.75	Average	400	206	P
4	6535.00	8.50	86.83	95.33	200.00	-104.67	Peak	400	206	P
5	7125.00	10.05	41.58	51.63	68.20	-16.57	Average	400	206	P
6	7125.00	10.05	55.08	65.13	88.20	-23.07	Peak	400	206	P
7	13070.00	20.11	29.58	49.69	68.20	-18.51	Average	100	124	P
8	13070.00	20.11	42.91	63.02	88.20	-25.18	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

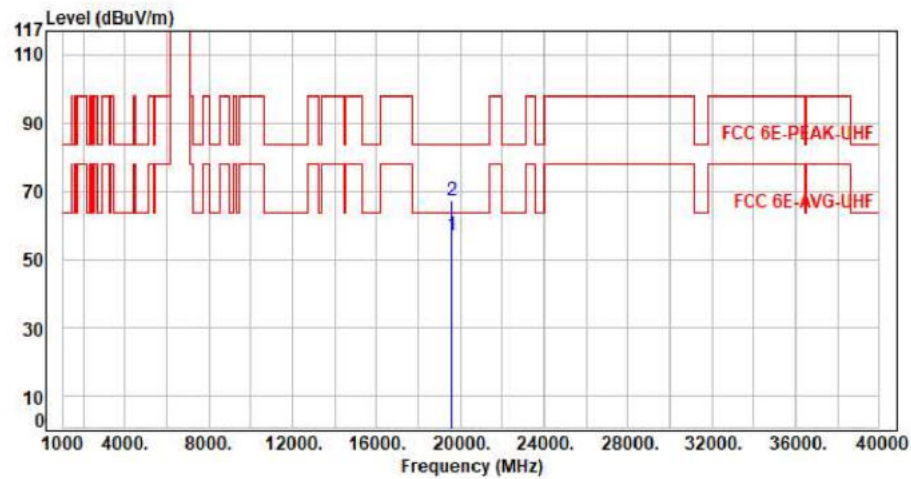


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	45.12	56.90	63.54	-6.64	Average	150	360	P
2	19605.00	11.78	55.59	67.37	83.54	-16.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

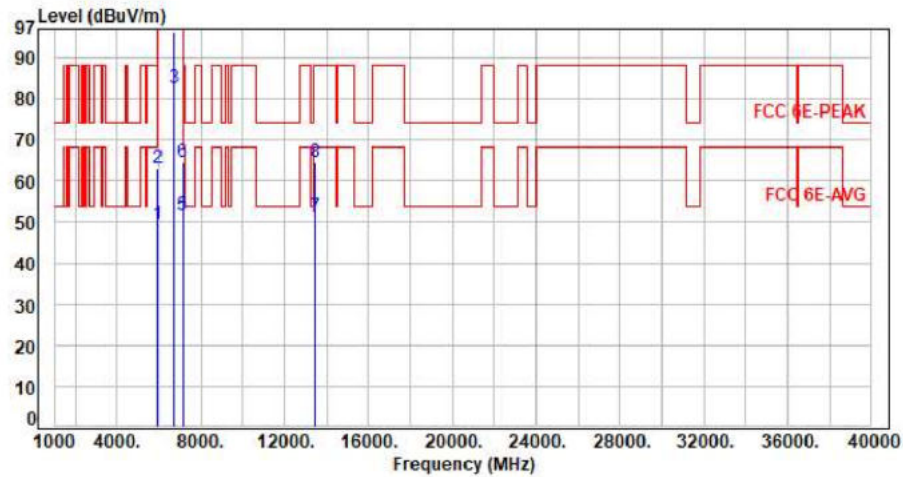

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	297	61	P
2	5925.00	7.66	55.35	63.01	88.20	-25.19	Peak	297	61	P
3	6715.00	9.29	73.39	82.68	200.00	-117.32	Average	297	61	P
4	6715.00	9.29	87.07	96.36	200.00	-103.64	Peak	297	61	P
5	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	297	61	P
6	7125.00	10.05	54.61	64.66	88.20	-23.54	Peak	297	61	P
7	13430.00	21.71	29.54	51.25	68.20	-16.95	Average	100	113	P
8	13430.00	21.71	42.71	64.42	88.20	-23.78	Peak	100	113	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

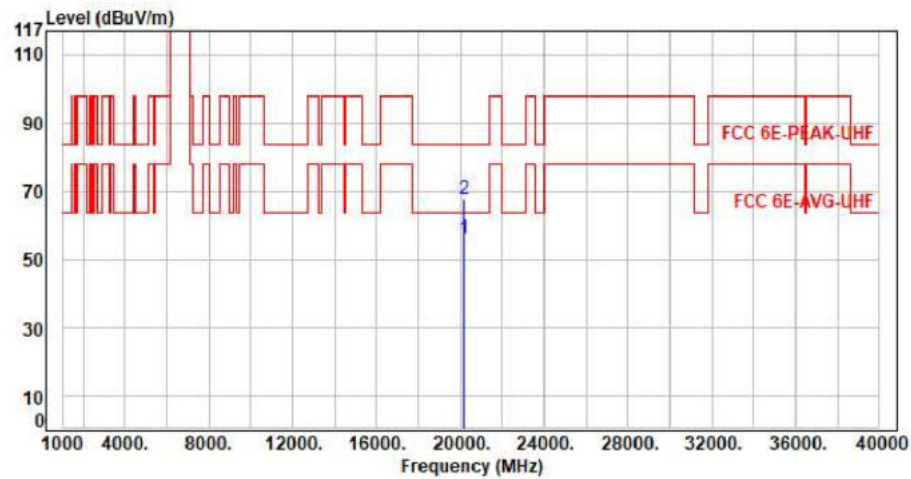


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.84	56.27	63.54	-7.27	Average	150	360	P
2	20145.00	11.43	56.20	67.63	83.54	-15.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

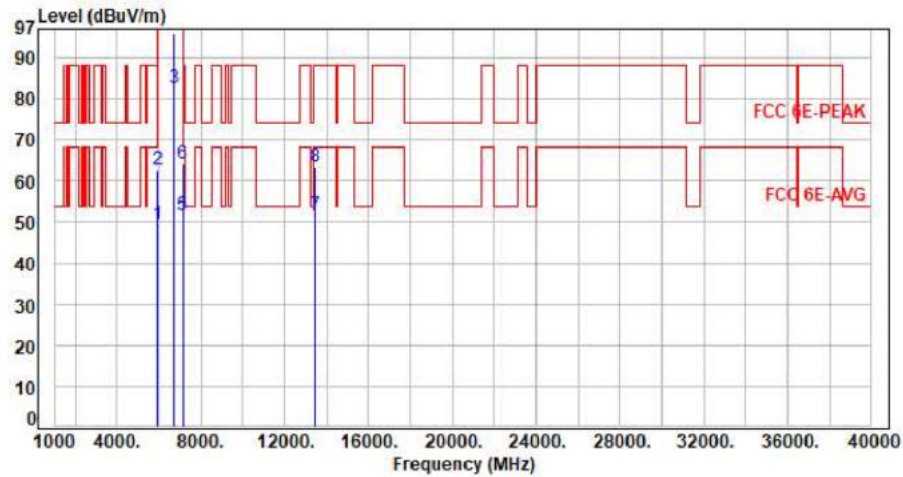


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.74	49.40	68.20	-18.80	Average	393	204	P
2	5925.00	7.66	54.95	62.61	88.20	-25.59	Peak	393	204	P
3	6715.00	9.29	73.26	82.55	200.00	-117.45	Average	393	204	P
4	6715.00	9.29	86.70	95.99	200.00	-104.01	Peak	393	204	P
5	7125.00	10.05	41.68	51.73	68.20	-16.47	Average	393	204	P
6	7125.00	10.05	54.28	64.33	88.20	-23.87	Peak	393	204	P
7	13430.00	21.71	29.88	51.59	68.20	-16.61	Average	100	245	P
8	13430.00	21.71	41.64	63.35	88.20	-24.85	Peak	100	245	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

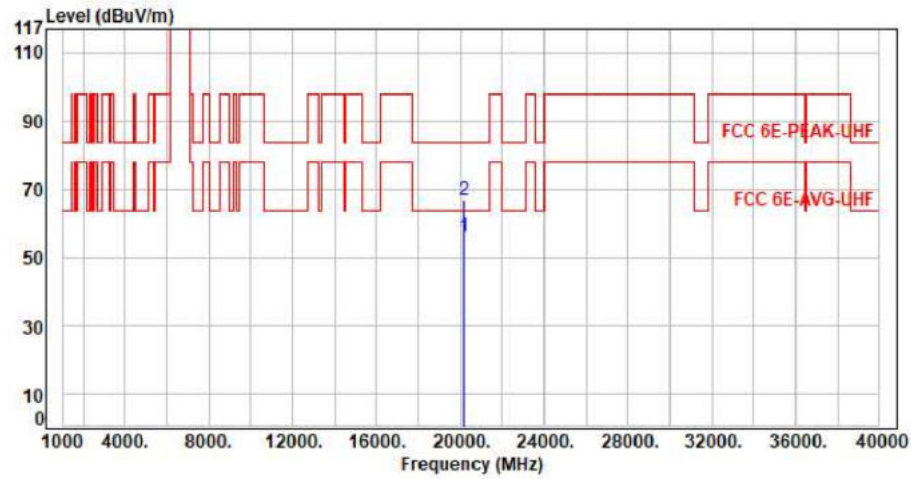


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.77	56.20	63.54	-7.34	Average	150	360	P
2	20145.00	11.43	55.11	66.54	83.54	-17.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

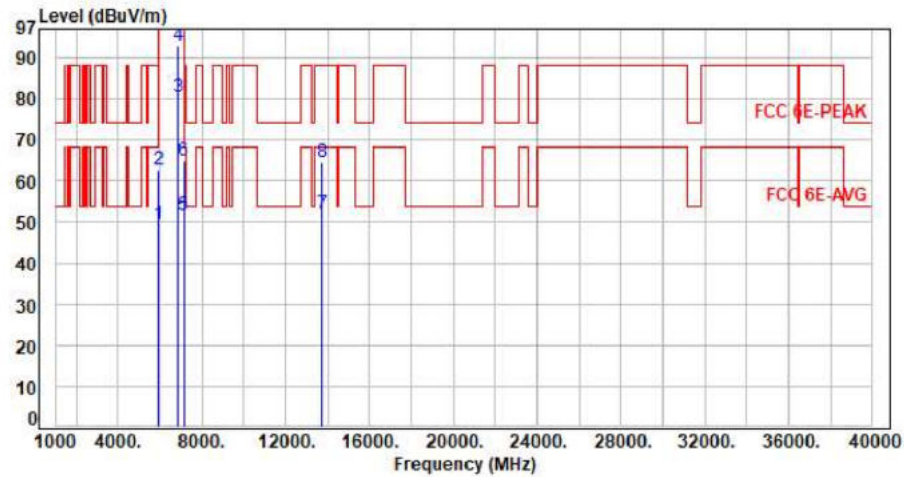

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	274	62	P
2	5925.00	7.66	55.21	62.87	88.20	-25.33	Peak	274	62	P
3	6855.00	9.50	70.97	80.47	200.00	-119.53	Average	274	62	P
4	6855.00	9.50	83.48	92.98	200.00	-107.02	Peak	274	62	P
5	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	274	62	P
6	7125.00	10.05	54.92	64.97	88.20	-23.23	Peak	274	62	P
7	13710.00	22.48	29.42	51.90	68.20	-16.30	Average	100	135	P
8	13710.00	22.48	42.12	64.60	88.20	-23.60	Peak	100	135	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

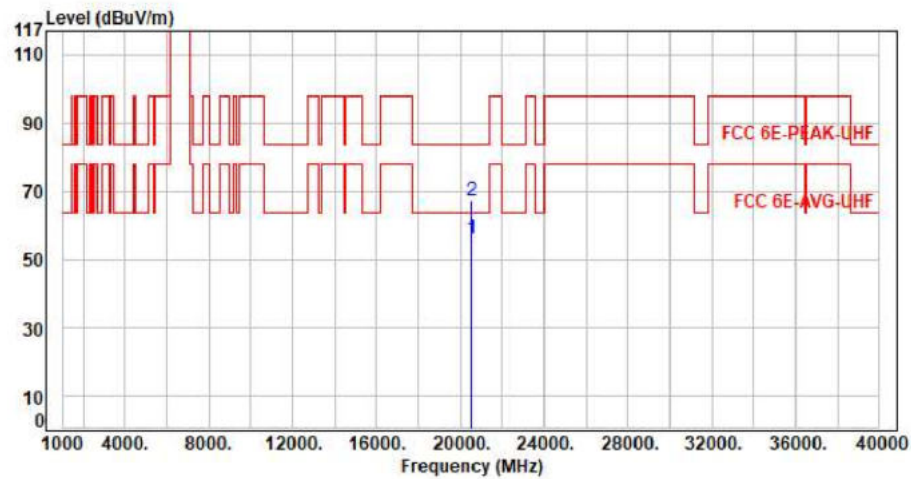


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.58	55.96	63.54	-7.58	Average	150	360	P
2	20565.00	11.38	55.89	67.27	83.54	-16.27	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

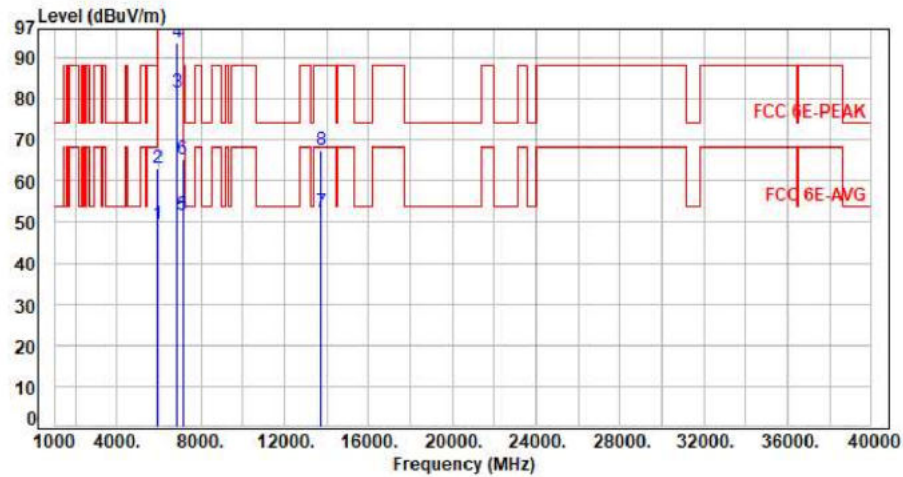

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.87	49.53	68.20	-18.67	Average	399	203	P
2	5925.00	7.66	55.35	63.01	88.20	-25.19	Peak	399	203	P
3	6855.00	9.50	71.89	81.39	200.00	-118.61	Average	399	203	P
4	6855.00	9.50	84.36	93.86	200.00	-106.14	Peak	399	203	P
5	7125.00	10.05	41.66	51.71	68.20	-16.49	Average	399	203	P
6	7125.00	10.05	55.21	65.26	88.20	-22.94	Peak	399	203	P
7	13710.00	22.48	29.85	52.33	68.20	-15.87	Average	100	224	P
8	13710.00	22.48	45.18	67.66	88.20	-20.54	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

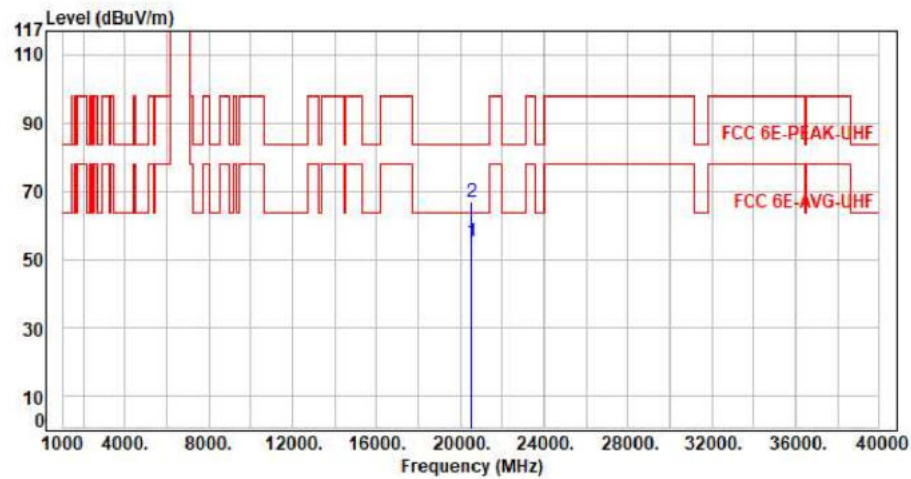


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	43.79	55.17	63.54	-8.37	Average	150	360	P
2	20565.00	11.38	55.41	66.79	83.54	-16.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

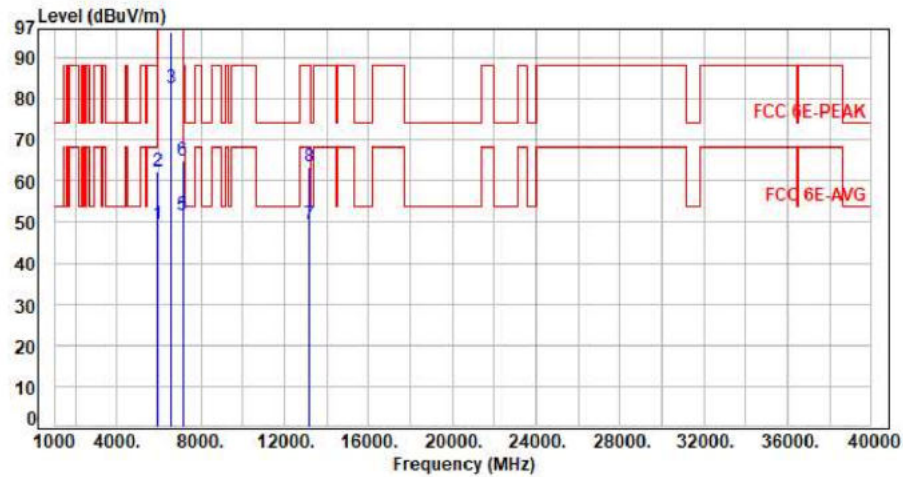

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	270	58	P
2	5925.00	7.66	54.74	62.40	88.20	-25.80	Peak	270	58	P
3	6565.00	8.67	73.81	82.48	200.00	-117.52	Average	270	58	P
4	6565.00	8.67	87.42	96.09	200.00	-103.91	Peak	270	58	P
5	7125.00	10.05	41.68	51.73	68.20	-16.47	Average	270	58	P
6	7125.00	10.05	54.89	64.94	88.20	-23.26	Peak	270	58	P
7	13130.00	20.32	29.16	49.48	68.20	-18.72	Average	100	157	P
8	13130.00	20.32	43.08	63.40	88.20	-24.80	Peak	100	157	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

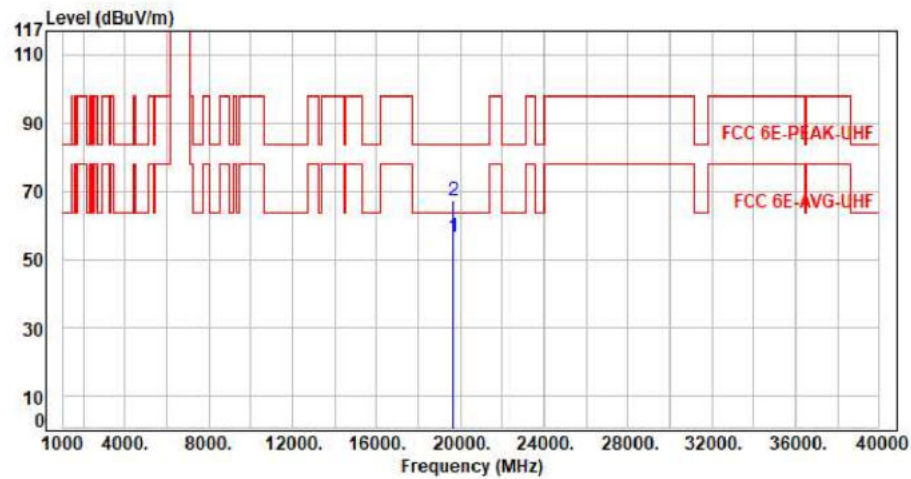

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.95	56.40	63.54	-7.14	Average	150	360	P
2	19695.00	11.45	55.64	67.09	83.54	-16.45	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor