




For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

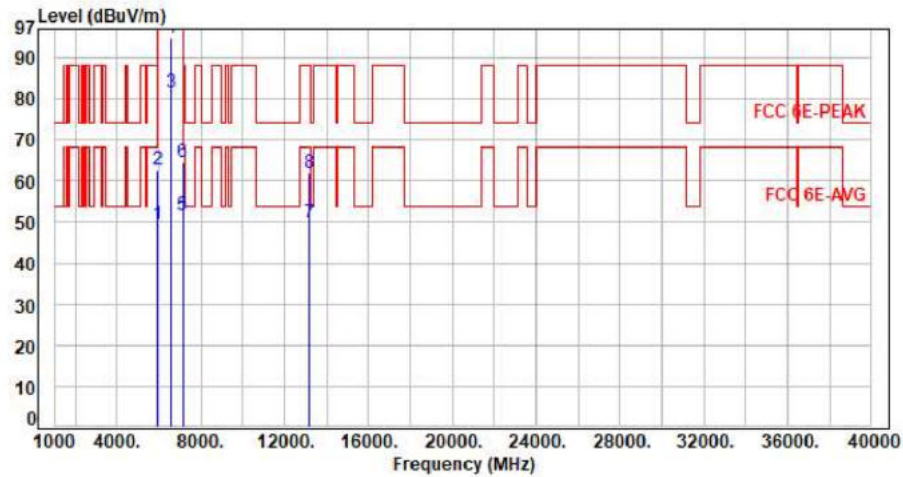

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.92	49.58	68.20	-18.62	Average	391	200	P
2	5925.00	7.66	54.98	62.64	88.20	-25.56	Peak	391	200	P
3	6565.00	8.67	72.93	81.60	200.00	-118.40	Average	391	200	P
4	6565.00	8.67	86.17	94.84	200.00	-105.16	Peak	391	200	P
5	7125.00	10.05	41.64	51.69	68.20	-16.51	Average	391	200	P
6	7125.00	10.05	54.50	64.55	88.20	-23.65	Peak	391	200	P
7	13130.00	20.32	29.64	49.96	68.20	-18.24	Average	100	138	P
8	13130.00	20.32	41.68	62.00	88.20	-26.20	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

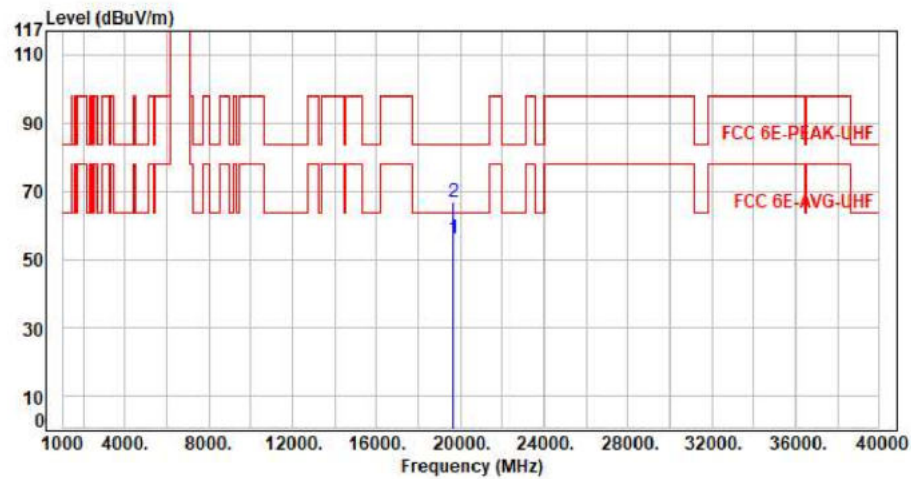


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.52	55.97	63.54	-7.57	Average	150	360	P
2	19695.00	11.45	55.31	66.76	83.54	-16.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

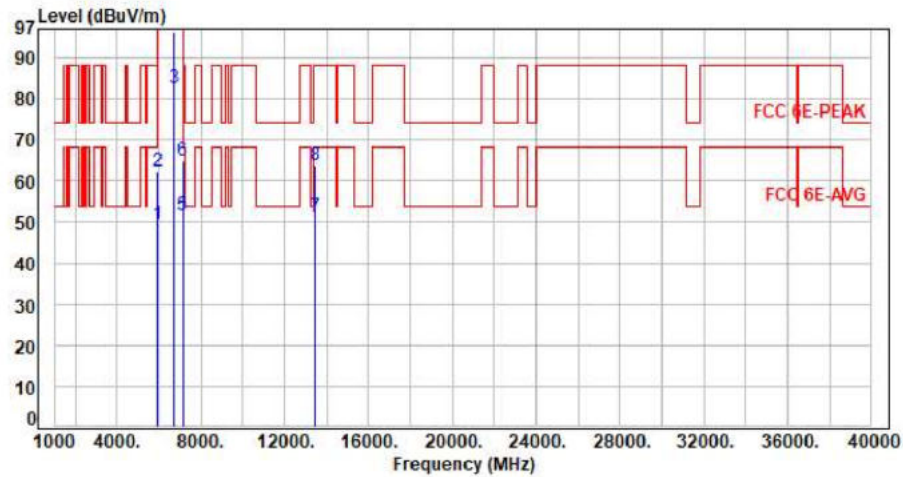


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.83	49.49	68.20	-18.71	Average	269	62	P
2	5925.00	7.66	54.65	62.31	88.20	-25.89	Peak	269	62	P
3	6725.00	9.33	73.43	82.76	200.00	-117.24	Average	269	62	P
4	6725.00	9.33	86.91	96.24	200.00	-103.76	Peak	269	62	P
5	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	269	62	P
6	7125.00	10.05	54.77	64.82	88.20	-23.38	Peak	269	62	P
7	13450.00	21.80	29.61	51.41	68.20	-16.79	Average	100	338	P
8	13450.00	21.80	42.09	63.89	88.20	-24.31	Peak	100	338	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

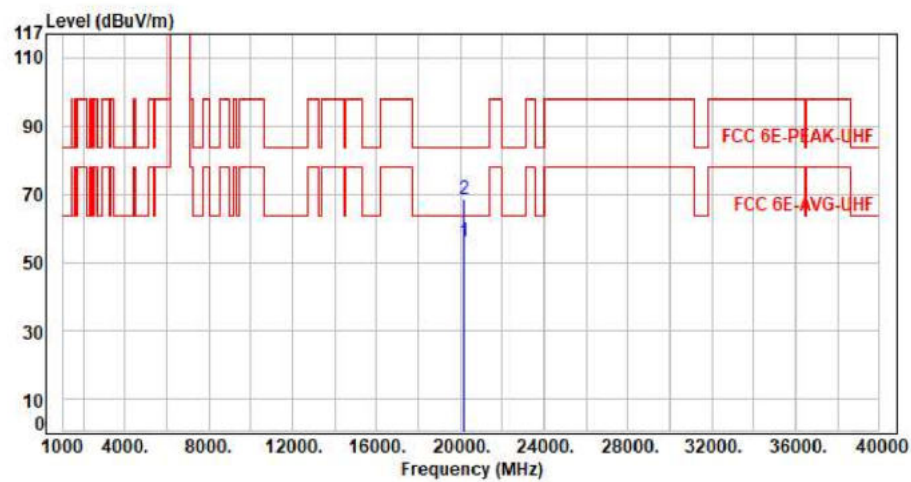

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.43	55.89	63.54	-7.65	Average	150	360	P
2	20175.00	11.46	56.96	68.42	83.54	-15.12	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

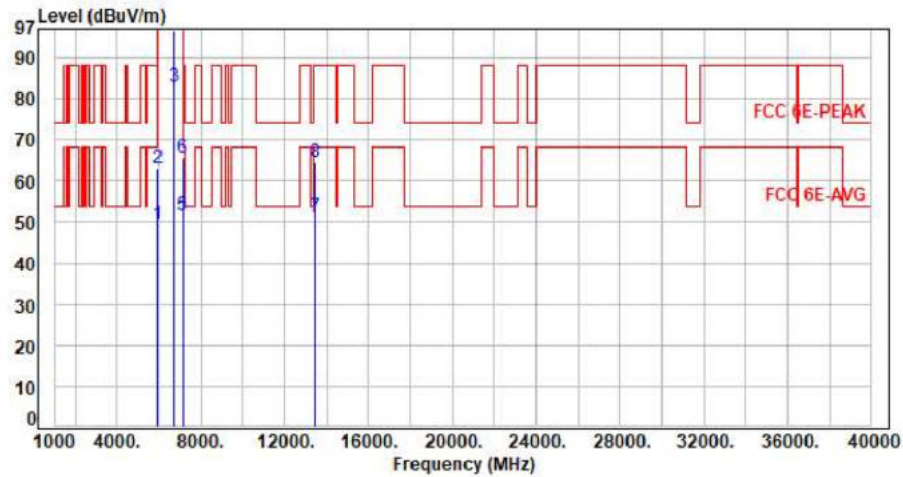

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.84	49.50	68.20	-18.70	Average	389	205	P
2	5925.00	7.66	55.34	63.00	88.20	-25.20	Peak	389	205	P
3	6725.00	9.33	73.66	82.99	200.00	-117.01	Average	389	205	P
4	6725.00	9.33	87.43	96.76	200.00	-103.24	Peak	389	205	P
5	7125.00	10.05	41.62	51.67	68.20	-16.53	Average	389	205	P
6	7125.00	10.05	55.52	65.57	88.20	-22.63	Peak	389	205	P
7	13450.00	21.80	29.44	51.24	68.20	-16.96	Average	100	124	P
8	13450.00	21.80	42.80	64.60	88.20	-23.60	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

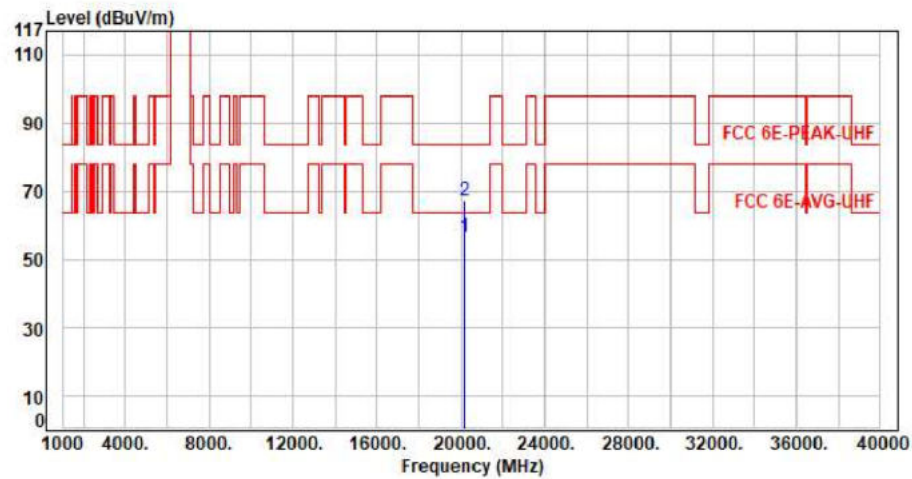

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.86	56.32	63.54	-7.22	Average	150	360	P
2	20175.00	11.46	55.76	67.22	83.54	-16.32	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

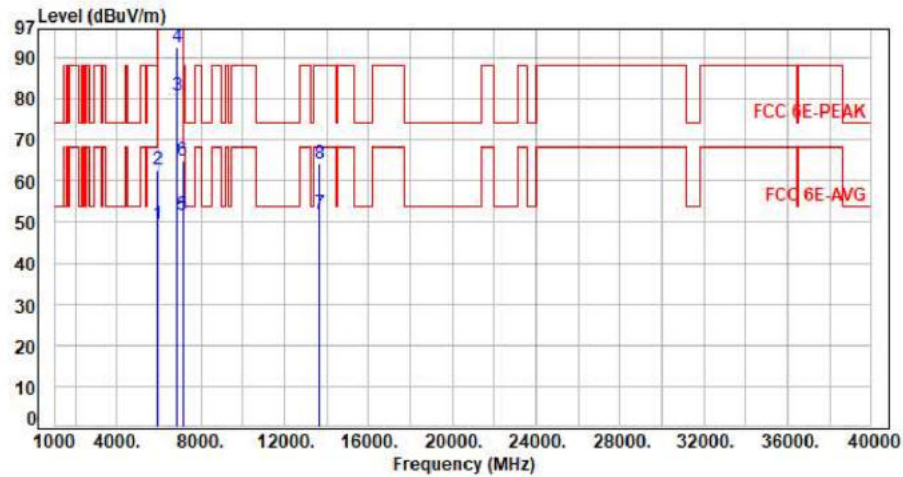

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.87	49.53	68.20	-18.67	Average	255	59	P
2	5925.00	7.66	55.15	62.81	88.20	-25.39	Peak	255	59	P
3	6845.00	9.48	71.26	80.74	200.00	-119.26	Average	255	59	P
4	6845.00	9.48	83.04	92.52	200.00	-107.48	Peak	255	59	P
5	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	255	59	P
6	7125.00	10.05	54.98	65.03	88.20	-23.17	Peak	255	59	P
7	13690.00	22.40	29.61	52.01	68.20	-16.19	Average	100	225	P
8	13690.00	22.40	41.92	64.32	88.20	-23.88	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

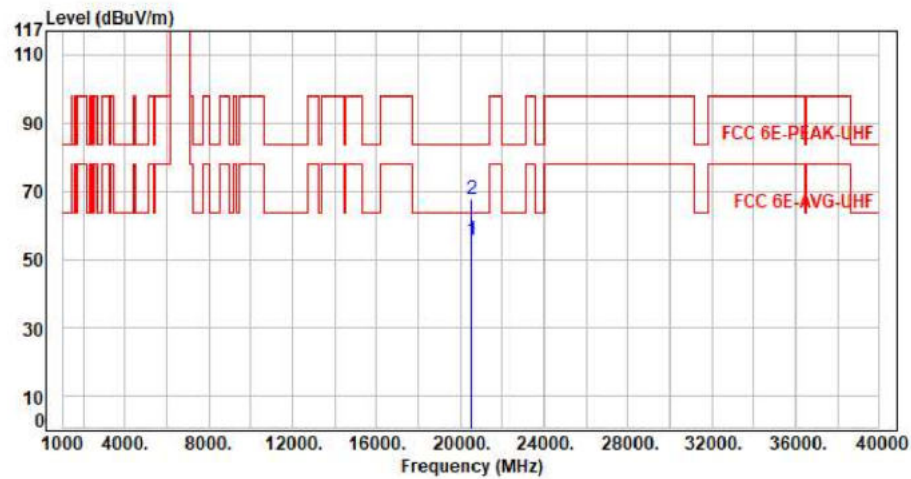

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.09	55.53	63.54	-8.01	Average	150	360	P
2	20535.00	11.44	55.99	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

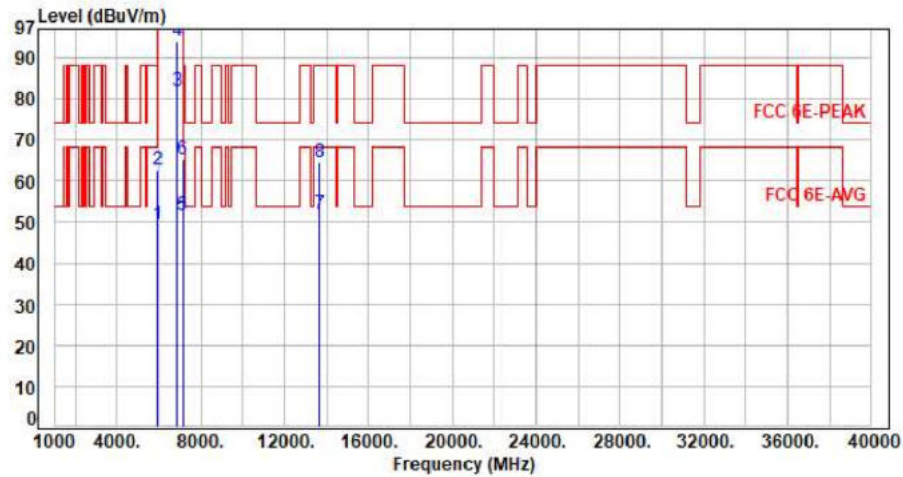


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.81	49.47	68.20	-18.73	Average	397	204	P
2	5925.00	7.66	55.19	62.85	88.20	-25.35	Peak	397	204	P
3	6845.00	9.48	72.34	81.82	200.00	-118.18	Average	397	204	P
4	6845.00	9.48	84.54	94.02	200.00	-105.98	Peak	397	204	P
5	7125.00	10.05	41.60	51.65	68.20	-16.55	Average	397	204	P
6	7125.00	10.05	55.27	65.32	88.20	-22.88	Peak	397	204	P
7	13690.00	22.40	29.76	52.16	68.20	-16.04	Average	100	138	P
8	13690.00	22.40	42.19	64.59	88.20	-23.61	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

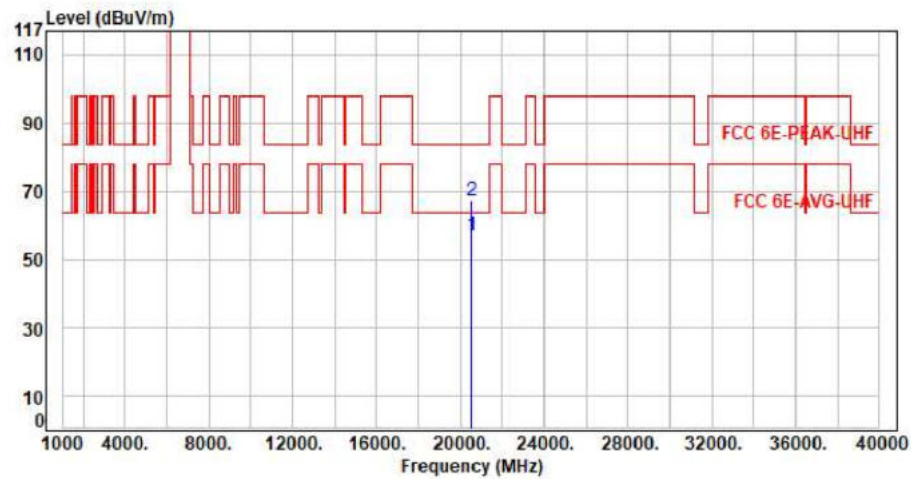

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	45.42	56.86	63.54	-6.68	Average	150	360	P
2	20535.00	11.44	55.53	66.97	83.54	-16.57	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

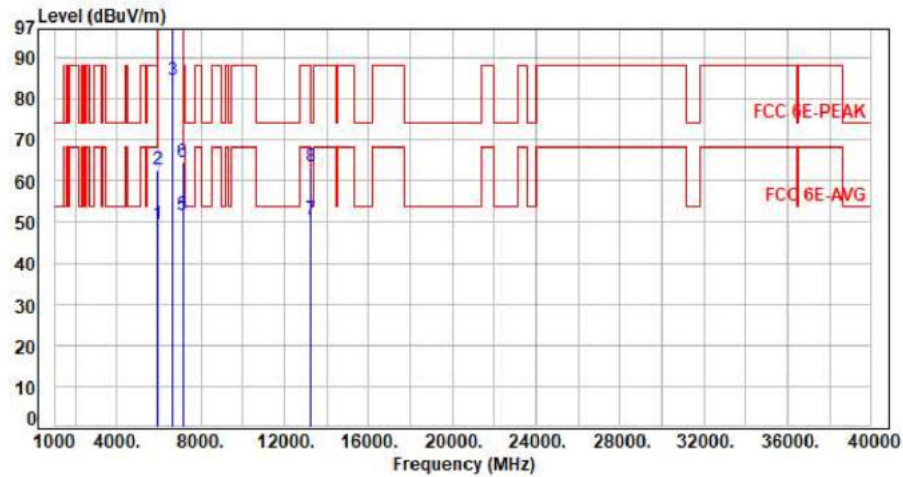

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	284	61	P
2	5925.00	7.66	54.88	62.54	88.20	-25.66	Peak	284	61	P
3	6625.00	8.94	75.42	84.36	200.00	-115.64	Average	284	61	P
4	6625.00	8.94	88.68	97.62	200.00	-102.38	Peak	284	61	P
5	7125.00	10.05	41.60	51.65	68.20	-16.55	Average	284	61	P
6	7125.00	10.05	54.36	64.41	88.20	-23.79	Peak	284	61	P
7	13250.00	21.00	29.62	50.62	54.00	-3.38	Average	100	152	P
8	13250.00	21.00	42.37	63.37	74.00	-10.63	Peak	100	152	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

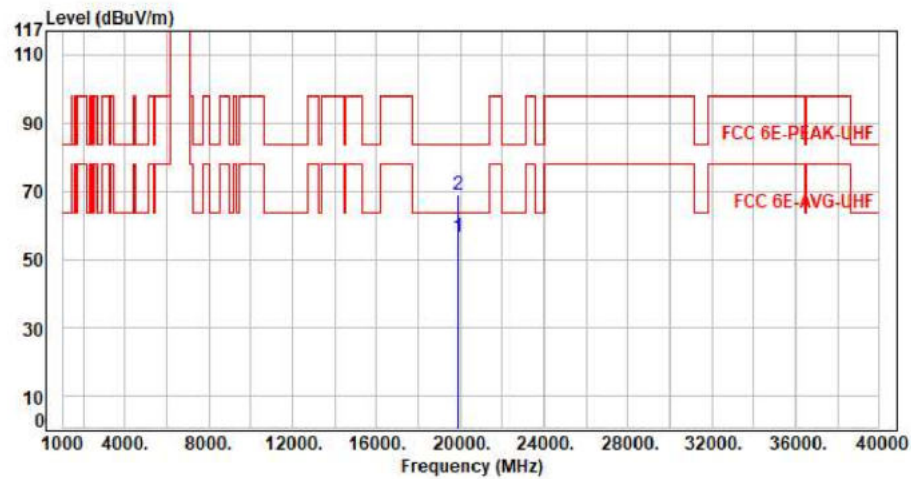

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.82	56.72	63.54	-6.82	Average	150	360	P
2	19875.00	11.90	56.91	68.81	83.54	-14.73	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

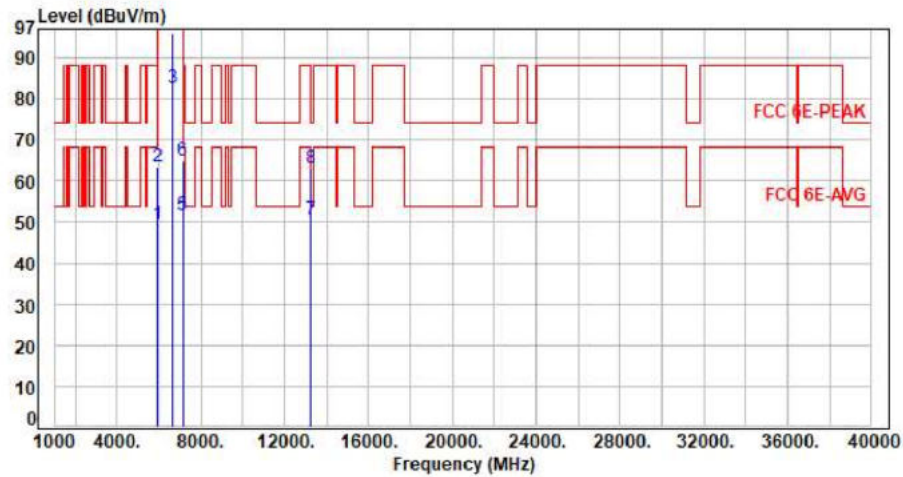


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.94	49.60	68.20	-18.60	Average	384	200	P
2	5925.00	7.66	55.64	63.30	88.20	-24.90	Peak	384	200	P
3	6625.00	8.94	73.64	82.58	200.00	-117.42	Average	384	200	P
4	6625.00	8.94	86.98	95.92	200.00	-104.08	Peak	384	200	P
5	7125.00	10.05	41.60	51.65	68.20	-16.55	Average	384	200	P
6	7125.00	10.05	54.90	64.95	88.20	-23.25	Peak	384	200	P
7	13250.00	21.00	29.43	50.43	54.00	-3.57	Average	100	128	P
8	13250.00	21.00	42.20	63.20	74.00	-10.80	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

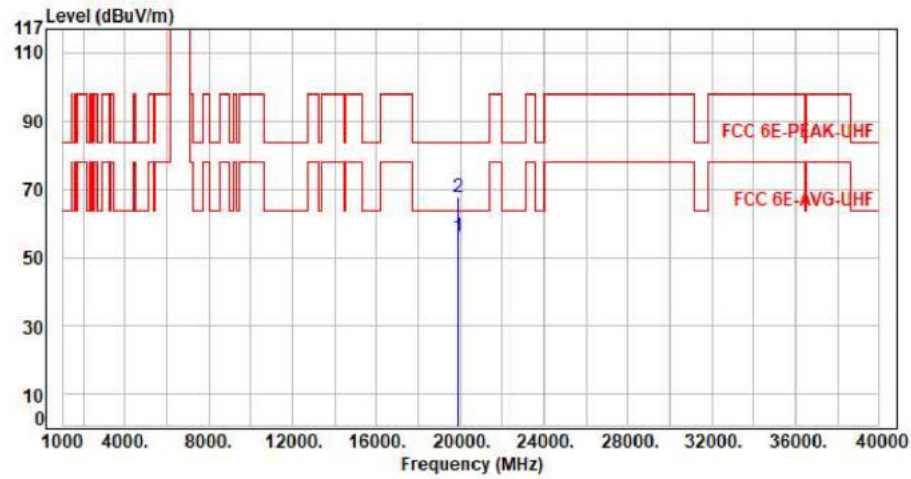


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.18	56.08	63.54	-7.46	Average	150	360	P
2	19875.00	11.90	55.94	67.84	83.54	-15.70	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

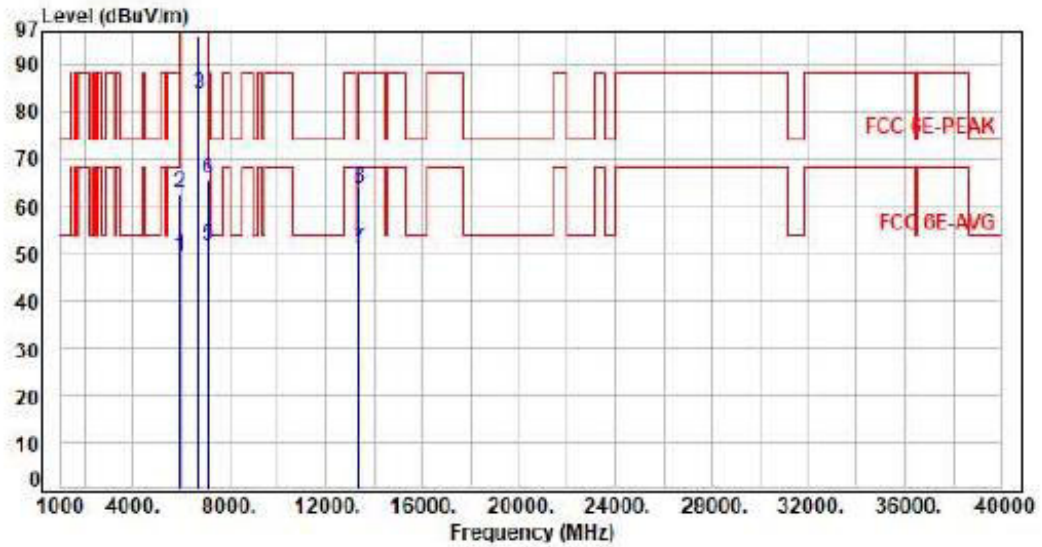

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.83	49.49	68.20	-18.71	Average	313	62	P
2	5925.00	7.66	54.93	62.59	88.20	-25.61	Peak	313	62	P
3	6705.00	9.25	74.31	83.56	200.00	-116.44	Average	313	62	P
4	6705.00	9.25	86.79	96.04	200.00	-103.96	Peak	313	62	P
5	7125.00	10.05	41.56	51.61	68.20	-16.59	Average	313	62	P
6	7125.00	10.05	55.53	65.58	88.20	-22.62	Peak	313	62	P
7	13410.00	21.62	29.38	51.00	68.20	-17.20	Average	100	119	P
8	13410.00	21.62	42.18	63.80	88.20	-24.40	Peak	100	119	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

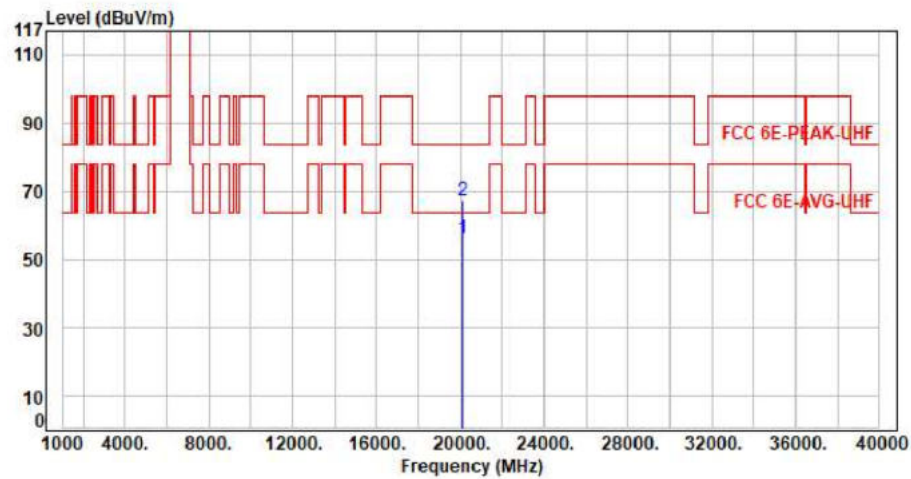


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	44.76	56.16	63.54	-7.38	Average	150	360	P
2	20115.00	11.40	55.76	67.16	83.54	-16.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

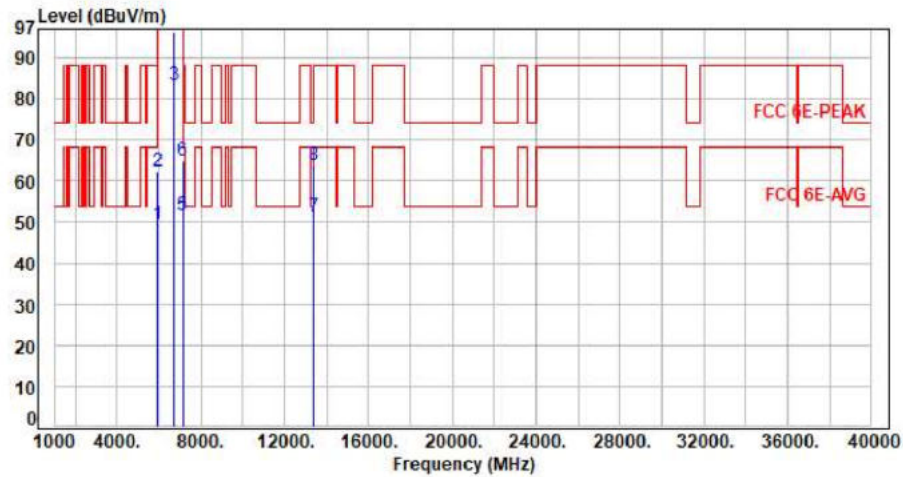


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	399	205	P
2	5925.00	7.66	54.51	62.17	88.20	-26.03	Peak	399	205	P
3	6705.00	9.25	74.03	83.28	200.00	-116.72	Average	399	205	P
4	6705.00	9.25	86.96	96.21	200.00	-103.79	Peak	399	205	P
5	7125.00	10.05	41.74	51.79	68.20	-16.41	Average	399	205	P
6	7125.00	10.05	54.96	65.01	88.20	-23.19	Peak	399	205	P
7	13410.00	21.62	29.61	51.23	68.20	-16.97	Average	100	124	P
8	13410.00	21.62	42.19	63.81	88.20	-24.39	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

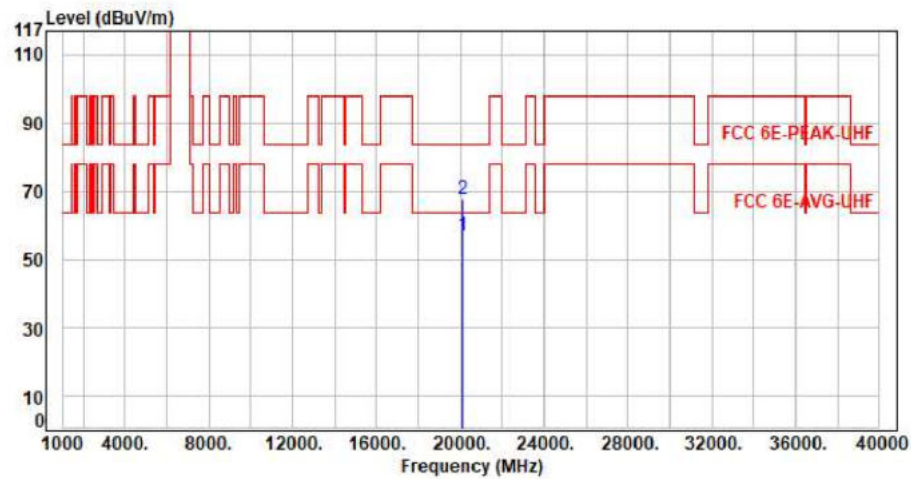


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.47	56.87	63.54	-6.67	Average	150	360	P
2	20115.00	11.40	56.13	67.53	83.54	-16.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

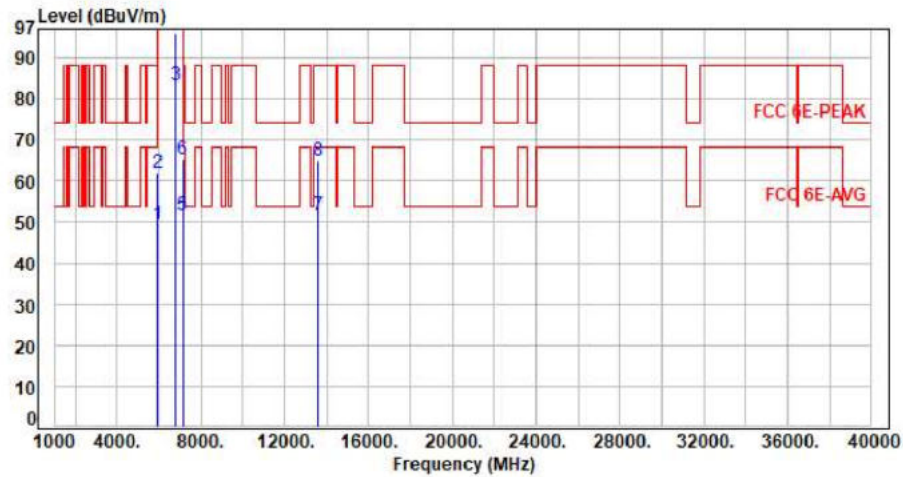


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.84	49.50	68.20	-18.70	Average	275	60	P
2	5925.00	7.66	54.23	61.89	88.20	-26.31	Peak	275	60	P
3	6785.00	9.46	73.76	83.22	200.00	-116.78	Average	275	60	P
4	6785.00	9.46	86.61	96.07	200.00	-103.93	Peak	275	60	P
5	7125.00	10.05	41.66	51.71	68.20	-16.49	Average	275	60	P
6	7125.00	10.05	55.17	65.22	88.20	-22.98	Peak	275	60	P
7	13570.00	22.06	29.48	51.54	68.20	-16.66	Average	100	331	P
8	13570.00	22.06	42.92	64.98	88.20	-23.22	Peak	100	331	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

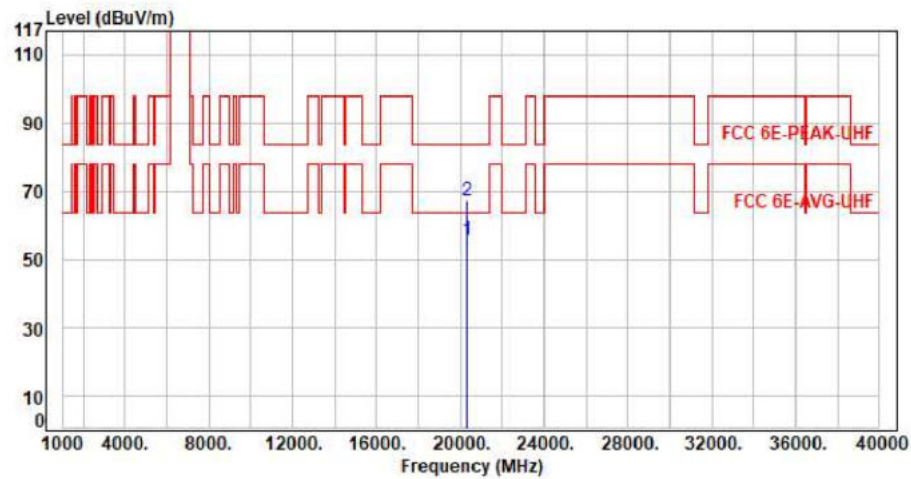


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.65	55.71	63.54	-7.83	Average	150	360	P
2	20355.00	11.06	55.95	67.01	83.54	-16.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

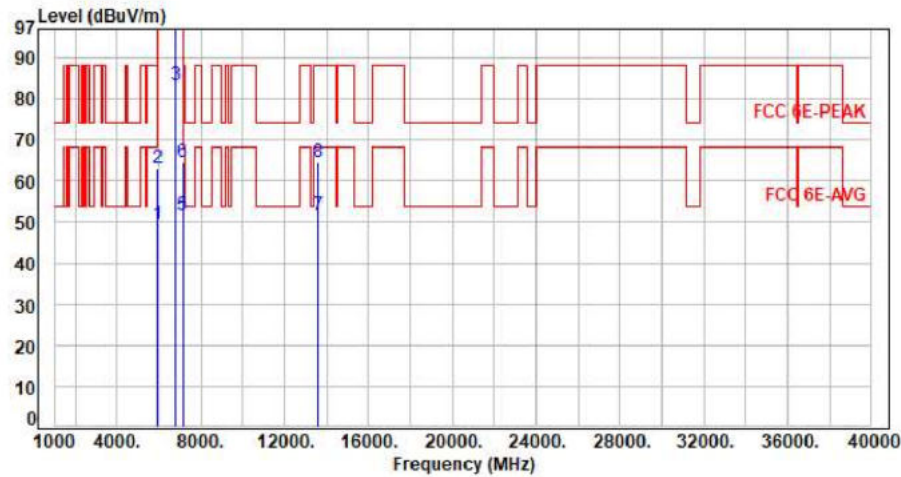

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.83	49.49	68.20	-18.71	Average	398	204	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	398	204	P
3	6785.00	9.46	74.05	83.51	200.00	-116.49	Average	398	204	P
4	6785.00	9.46	87.84	97.30	200.00	-102.70	Peak	398	204	P
5	7125.00	10.05	41.65	51.70	68.20	-16.50	Average	398	204	P
6	7125.00	10.05	54.59	64.64	88.20	-23.56	Peak	398	204	P
7	13570.00	22.06	29.69	51.75	68.20	-16.45	Average	100	131	P
8	13570.00	22.06	42.62	64.68	88.20	-23.52	Peak	100	131	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

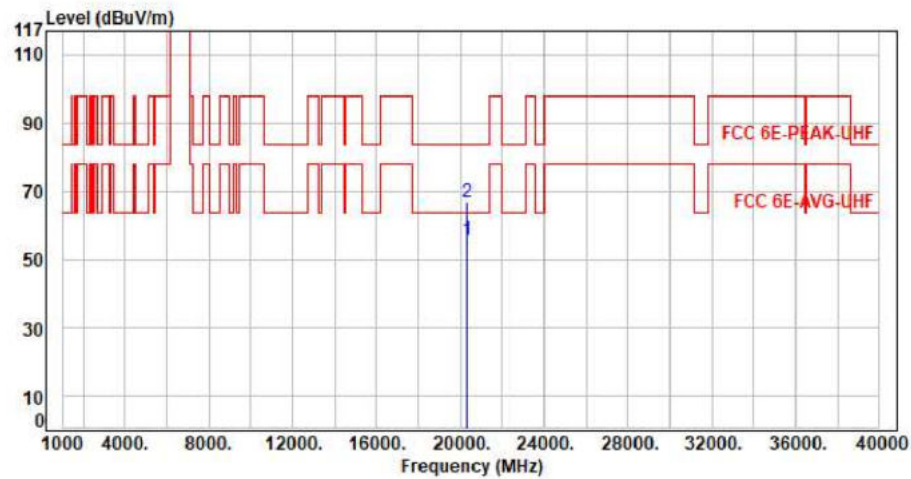


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.41	55.47	63.54	-8.07	Average	150	360	P
2	20355.00	11.06	55.45	66.51	83.54	-17.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

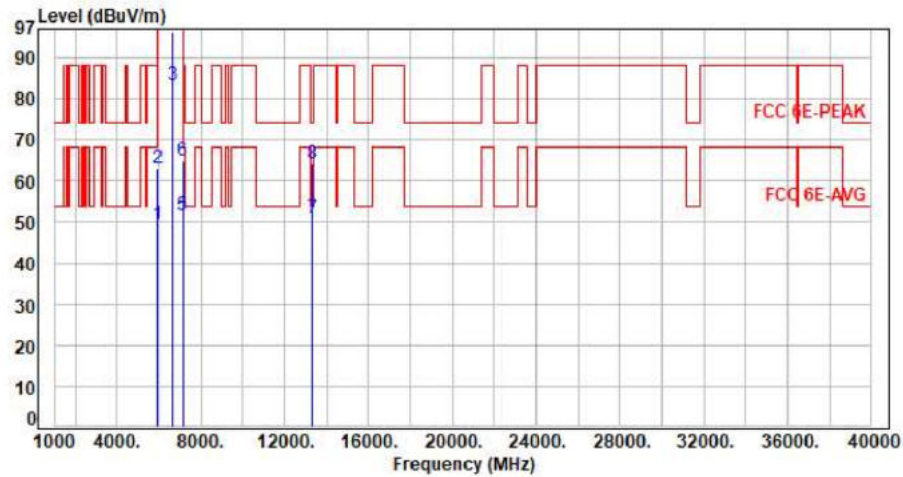


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	277	60	P
2	5925.00	7.66	55.46	63.12	88.20	-25.08	Peak	277	60	P
3	6665.00	9.08	74.20	83.28	200.00	-116.72	Average	277	60	P
4	6665.00	9.08	87.26	96.34	200.00	-103.66	Peak	277	60	P
5	7125.00	10.05	41.62	51.67	68.20	-16.53	Average	277	60	P
6	7125.00	10.05	54.71	64.76	88.20	-23.44	Peak	277	60	P
7	13330.00	21.30	29.69	50.99	54.00	-3.01	Average	100	142	P
8	13330.00	21.30	42.82	64.12	74.00	-9.88	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

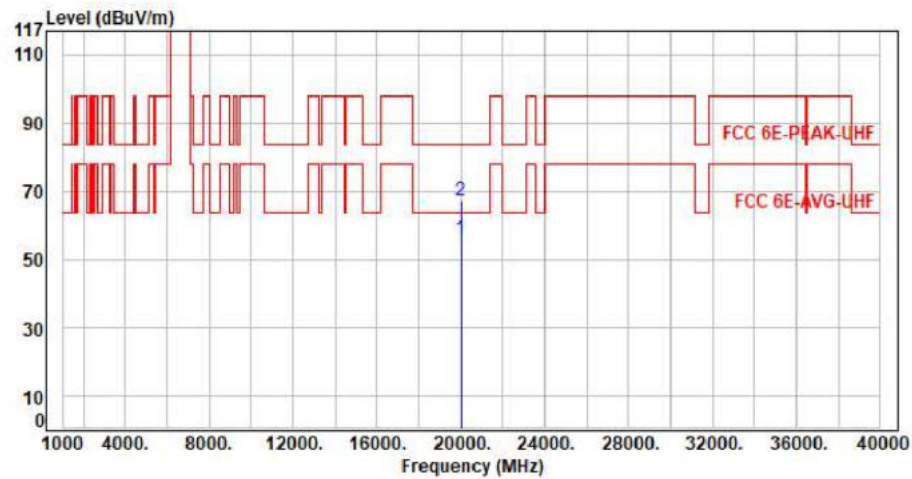

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	44.38	56.08	63.54	-7.46	Average	150	360	P
2	19995.00	11.70	55.49	67.19	83.54	-16.35	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

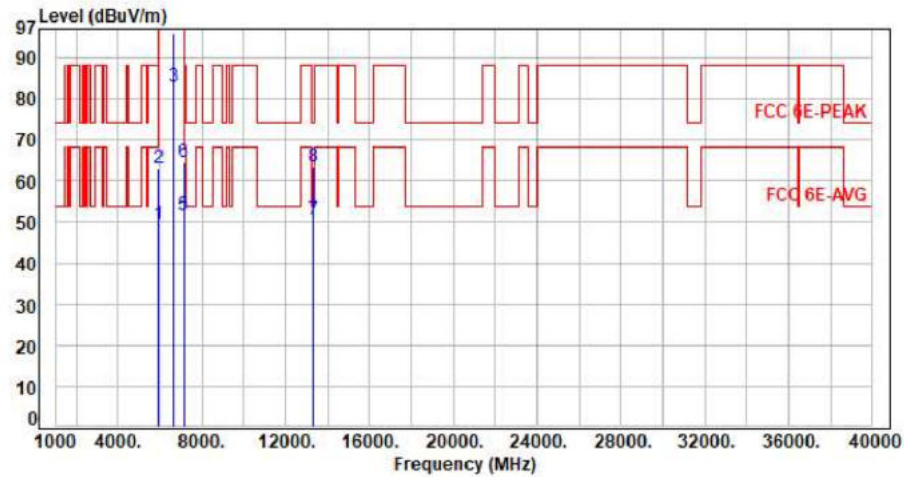

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.79	49.45	68.20	-18.75	Average	389	204	P
2	5925.00	7.66	55.24	62.90	88.20	-25.30	Peak	389	204	P
3	6665.00	9.08	73.87	82.95	200.00	-117.05	Average	389	204	P
4	6665.00	9.08	86.68	95.76	200.00	-104.24	Peak	389	204	P
5	7125.00	10.05	41.65	51.70	68.20	-16.50	Average	389	204	P
6	7125.00	10.05	54.66	64.71	88.20	-23.49	Peak	389	204	P
7	13330.00	21.30	29.18	50.48	54.00	-3.52	Average	100	225	P
8	13330.00	21.30	42.20	63.50	74.00	-10.50	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

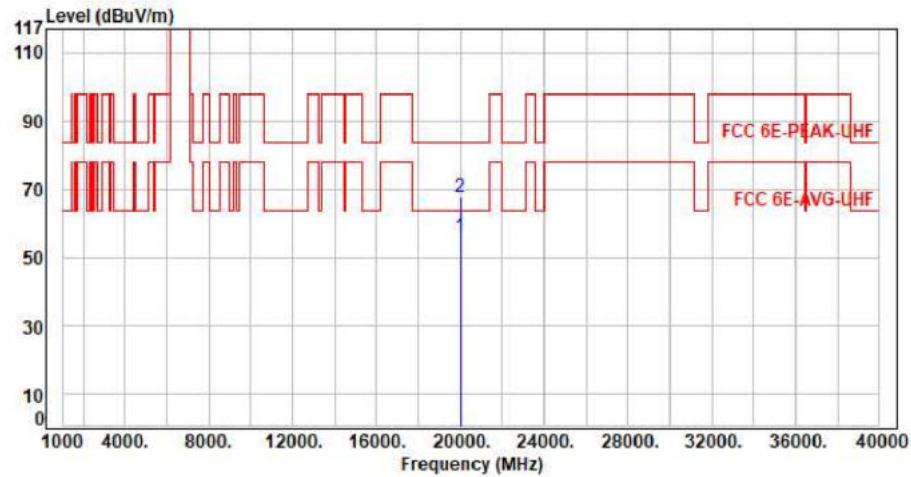


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	44.35	56.05	63.54	-7.49	Average	150	360	P
2	19995.00	11.70	55.91	67.61	83.54	-15.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

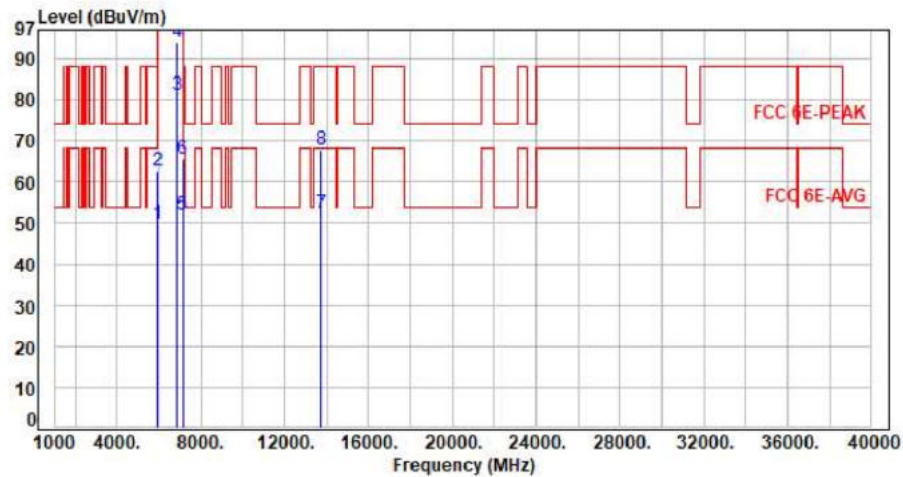

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.96	49.62	68.20	-18.58	Average	264	61	P
2	5925.00	7.66	55.03	62.69	88.20	-25.51	Peak	264	61	P
3	6875.00	9.55	71.75	81.30	200.00	-118.70	Average	264	61	P
4	6875.00	9.55	84.65	94.20	200.00	-105.80	Peak	264	61	P
5	7125.00	10.05	41.89	51.94	68.20	-16.26	Average	264	61	P
6	7125.00	10.05	55.57	65.62	88.20	-22.58	Peak	264	61	P
7	13750.00	22.65	29.58	52.23	68.20	-15.97	Average	100	228	P
8	13750.00	22.65	45.21	67.86	88.20	-20.34	Peak	100	228	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

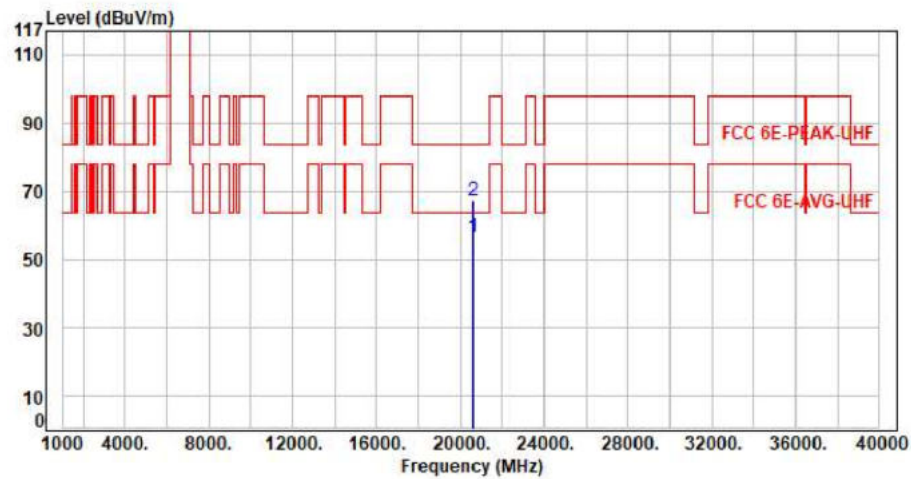

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.33	56.47	63.54	-7.07	Average	150	360	P
2	20625.00	11.14	56.19	67.33	83.54	-16.21	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

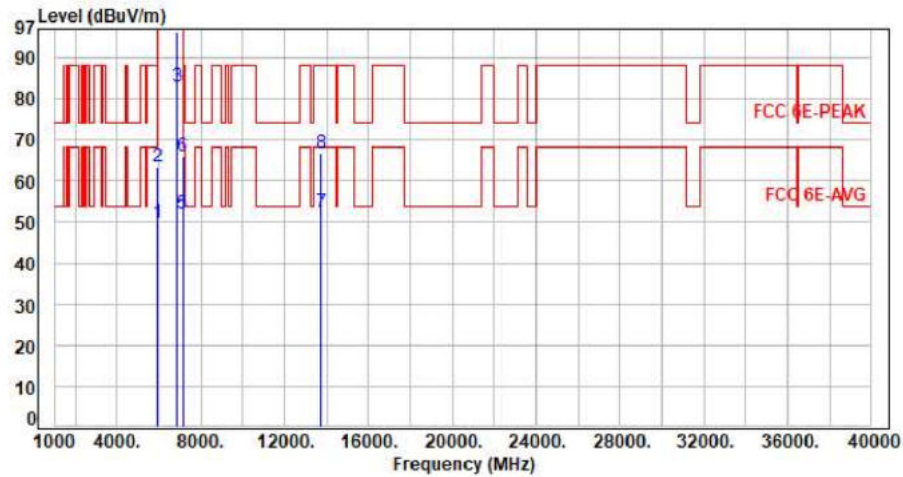

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	384	204	P
2	5925.00	7.66	55.79	63.45	88.20	-24.75	Peak	384	204	P
3	6875.00	9.55	73.25	82.80	200.00	-117.20	Average	384	204	P
4	6875.00	9.55	86.59	96.14	200.00	-103.86	Peak	384	204	P
5	7125.00	10.05	42.00	52.05	68.20	-16.15	Average	384	204	P
6	7125.00	10.05	56.14	66.19	88.20	-22.01	Peak	384	204	P
7	13750.00	22.65	29.67	52.32	68.20	-15.88	Average	100	128	P
8	13750.00	22.65	44.28	66.93	88.20	-21.27	Peak	100	128	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

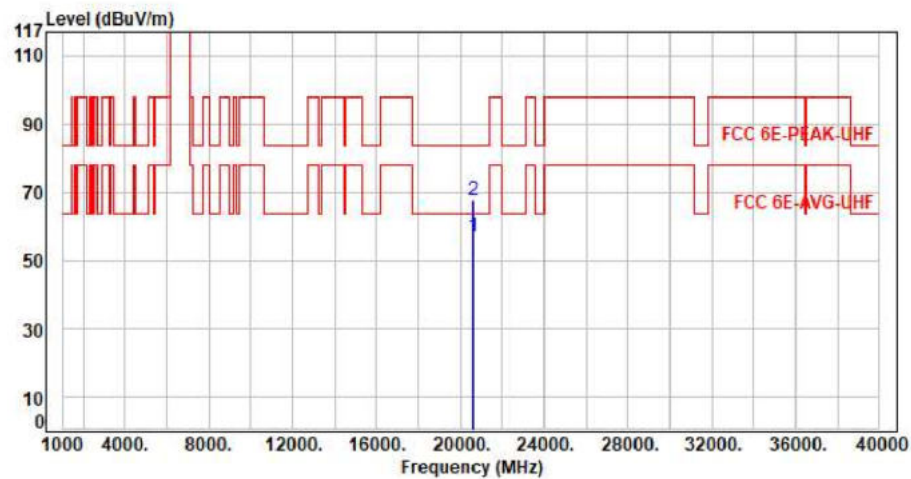


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.75	56.89	63.54	-6.65	Average	150	360	P
2	20625.00	11.14	56.68	67.82	83.54	-15.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

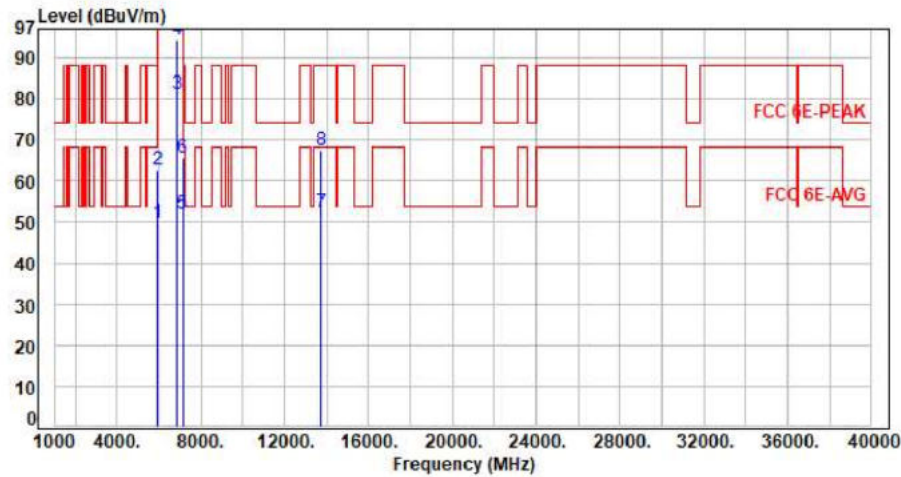


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	262	70	P
2	5925.00	7.66	54.93	62.59	88.20	-25.61	Peak	262	70	P
3	6885.00	9.56	71.72	81.28	200.00	-118.72	Average	262	70	P
4	6885.00	9.56	85.02	94.58	200.00	-105.42	Peak	262	70	P
5	7125.00	10.05	41.93	51.98	68.20	-16.22	Average	262	70	P
6	7125.00	10.05	55.49	65.54	88.20	-22.66	Peak	262	70	P
7	13770.00	22.69	29.62	52.31	68.20	-15.89	Average	100	228	P
8	13770.00	22.69	44.68	67.37	88.20	-20.83	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

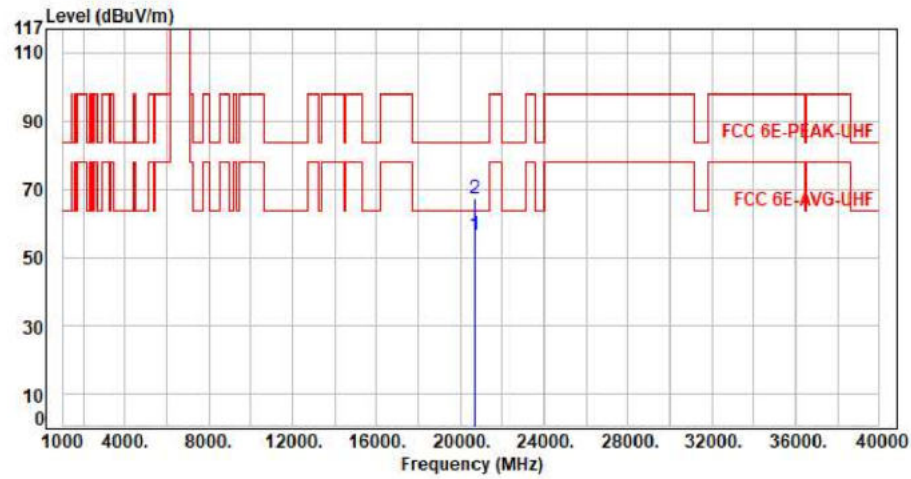


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.51	56.50	63.54	-7.04	Average	150	360	P
2	20655.00	10.99	56.22	67.21	83.54	-16.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

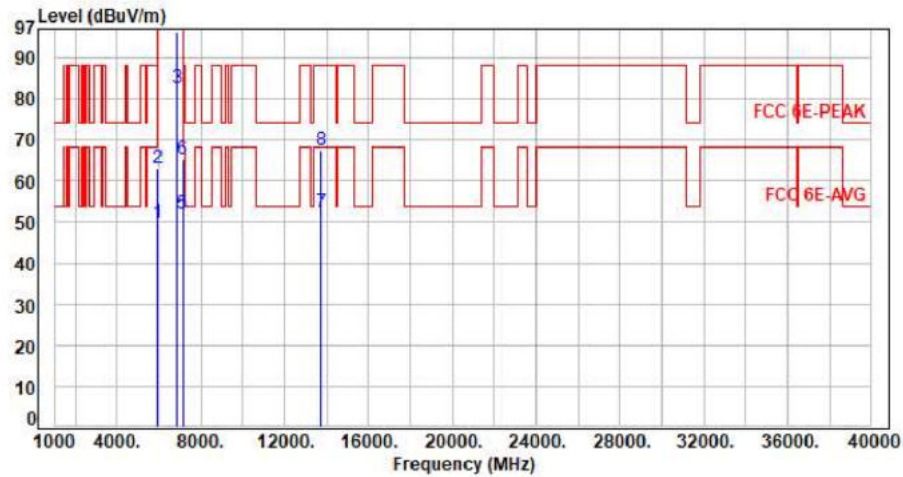

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	400	204	P
2	5925.00	7.66	55.44	63.10	88.20	-25.10	Peak	400	204	P
3	6885.00	9.56	73.04	82.60	200.00	-117.40	Average	400	204	P
4	6885.00	9.56	86.68	96.24	200.00	-103.76	Peak	400	204	P
5	7125.00	10.05	41.96	52.01	68.20	-16.19	Average	400	204	P
6	7125.00	10.05	55.14	65.19	88.20	-23.01	Peak	400	204	P
7	13770.00	22.69	29.76	52.45	68.20	-15.75	Average	100	221	P
8	13770.00	22.69	44.82	67.51	88.20	-20.69	Peak	100	221	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

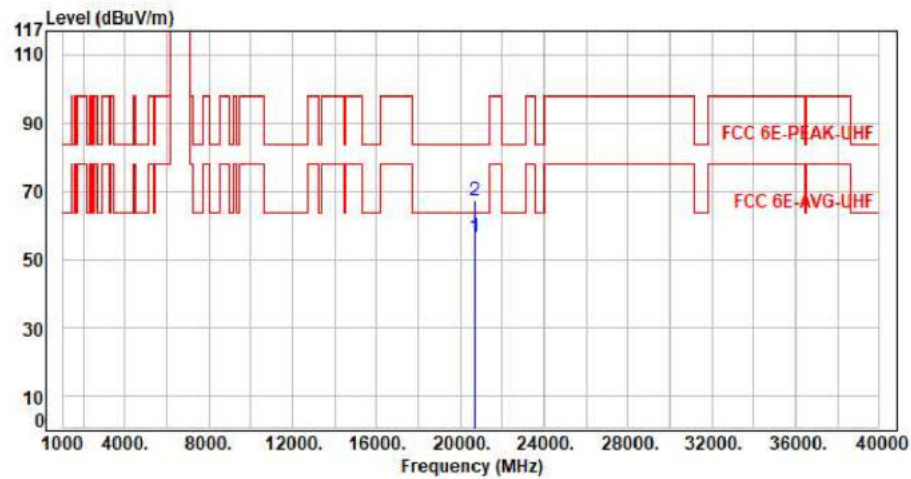


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.58	56.57	63.54	-6.97	Average	150	360	P
2	20655.00	10.99	56.11	67.10	83.54	-16.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

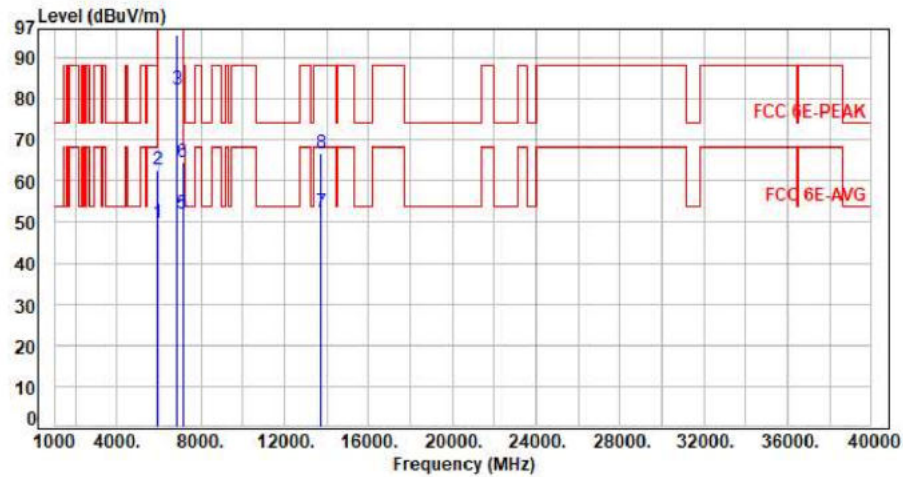

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	265	63	P
2	5925.00	7.66	54.95	62.61	88.20	-25.59	Peak	265	63	P
3	6865.00	9.52	72.83	82.35	200.00	-117.65	Average	265	63	P
4	6865.00	9.52	86.06	95.58	200.00	-104.42	Peak	265	63	P
5	7125.00	10.05	42.09	52.14	68.20	-16.06	Average	265	63	P
6	7125.00	10.05	54.64	64.69	88.20	-23.51	Peak	265	63	P
7	13730.00	22.57	29.73	52.30	68.20	-15.90	Average	100	245	P
8	13730.00	22.57	44.30	66.87	88.20	-21.33	Peak	100	245	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

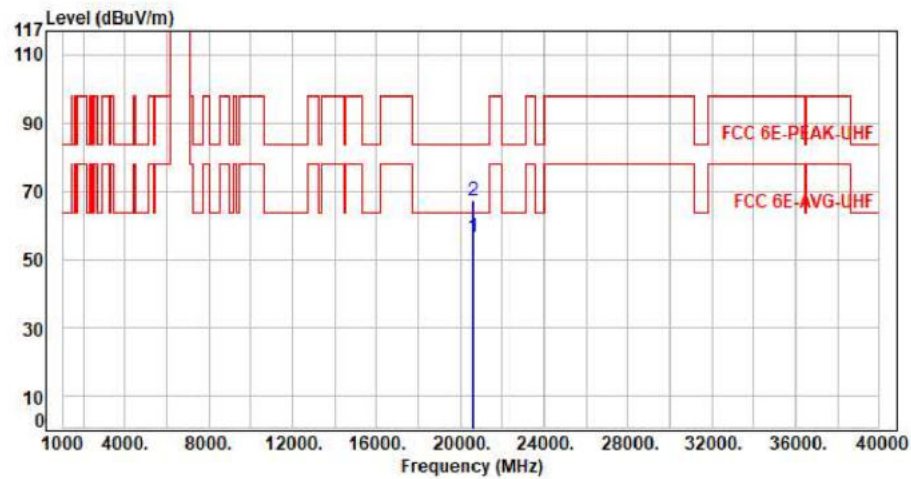


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.38	56.69	63.54	-6.85	Average	150	360	P
2	20595.00	11.31	55.69	67.00	83.54	-16.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

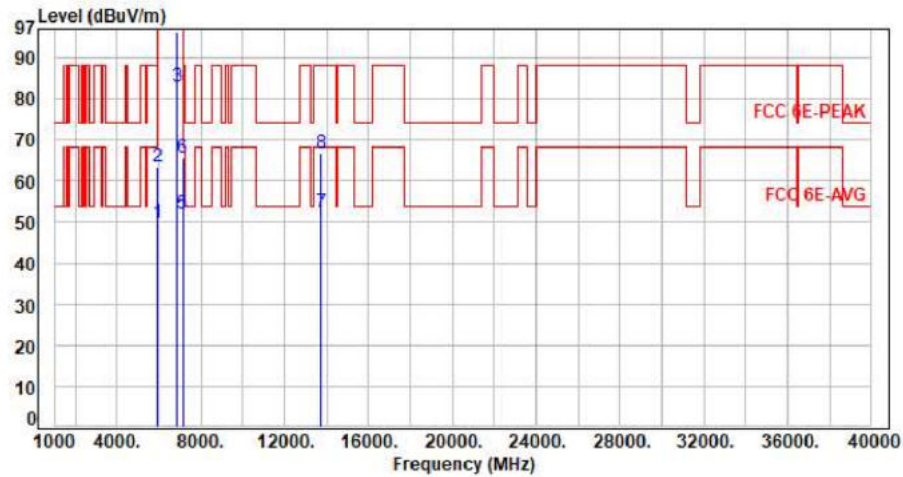


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	400	202	P
2	5925.00	7.66	55.67	63.33	88.20	-24.87	Peak	400	202	P
3	6865.00	9.52	73.51	83.03	200.00	-116.97	Average	400	202	P
4	6865.00	9.52	86.75	96.27	200.00	-103.73	Peak	400	202	P
5	7125.00	10.05	41.98	52.03	68.20	-16.17	Average	400	202	P
6	7125.00	10.05	55.65	65.70	88.20	-22.50	Peak	400	202	P
7	13730.00	22.57	29.70	52.27	68.20	-15.93	Average	100	331	P
8	13730.00	22.57	44.21	66.78	88.20	-21.42	Peak	100	331	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

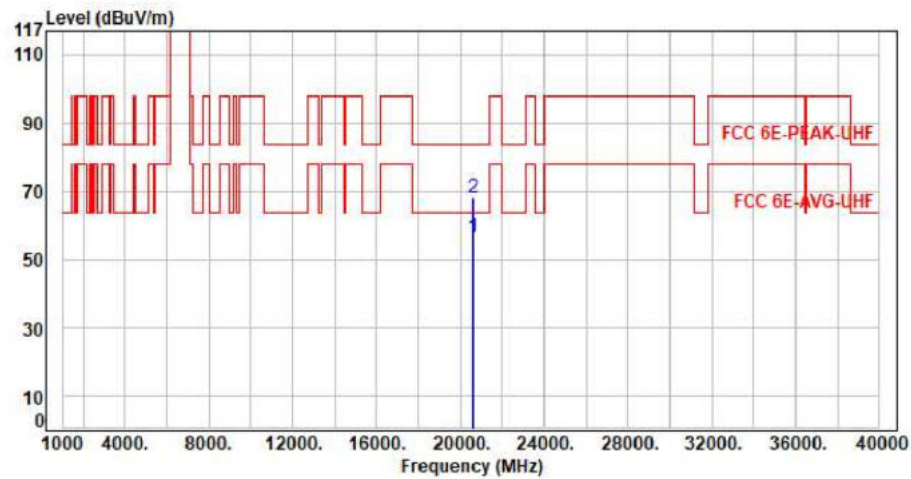


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.08	56.39	63.54	-7.15	Average	150	360	P
2	20595.00	11.31	56.87	68.18	83.54	-15.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

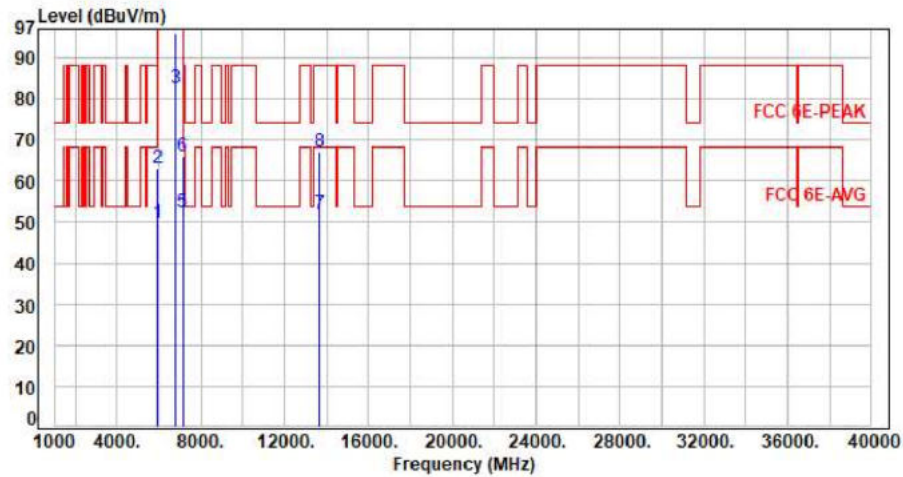


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	270	69	P
2	5925.00	7.66	55.31	62.97	88.20	-25.23	Peak	270	69	P
3	6825.00	9.47	73.27	82.74	200.00	-117.26	Average	270	69	P
4	6825.00	9.47	86.35	95.82	200.00	-104.18	Peak	270	69	P
5	7125.00	10.05	42.19	52.24	68.20	-15.96	Average	270	69	P
6	7125.00	10.05	55.88	65.93	88.20	-22.27	Peak	270	69	P
7	13650.00	22.24	29.72	51.96	68.20	-16.24	Average	100	124	P
8	13650.00	22.24	44.95	67.19	88.20	-21.01	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

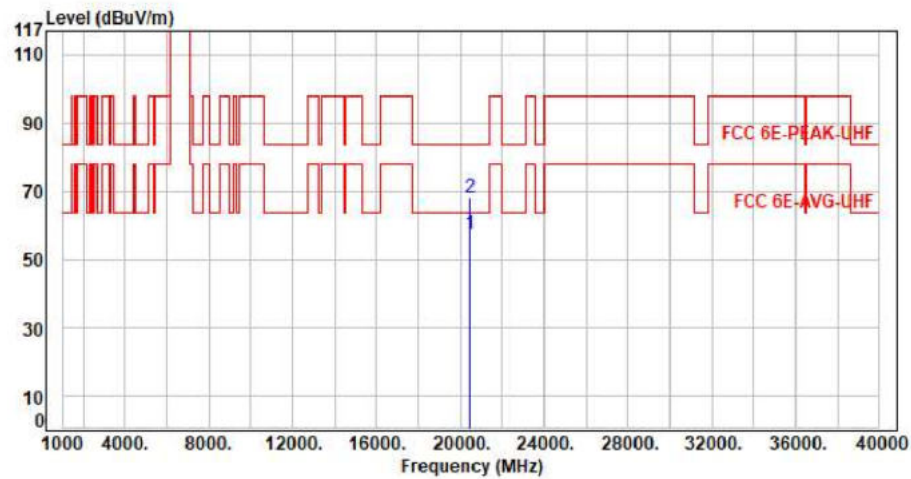


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.87	57.32	63.54	-6.22	Average	150	360	P
2	20475.00	11.45	56.57	68.02	83.54	-15.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

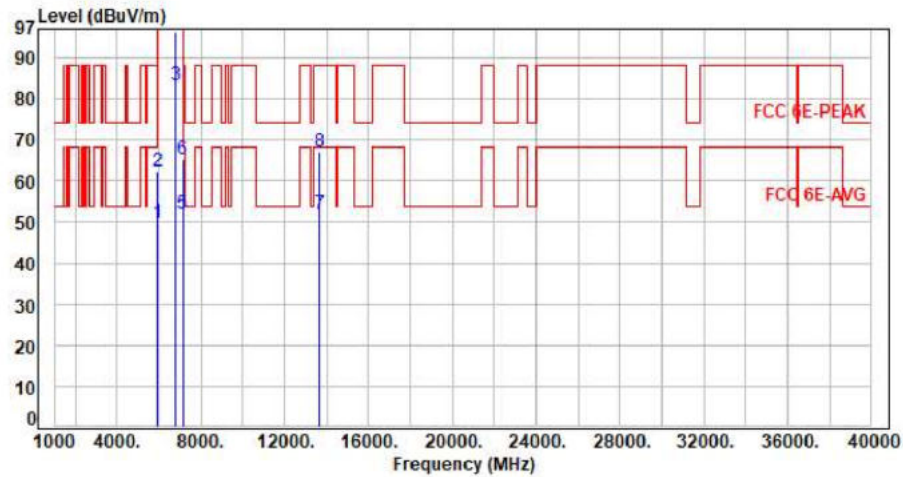

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	385	212	P
2	5925.00	7.66	54.69	62.35	88.20	-25.85	Peak	385	212	P
3	6825.00	9.47	73.71	83.18	200.00	-116.82	Average	385	212	P
4	6825.00	9.47	86.79	96.26	200.00	-103.74	Peak	385	212	P
5	7125.00	10.05	42.07	52.12	68.20	-16.08	Average	385	212	P
6	7125.00	10.05	55.29	65.34	88.20	-22.86	Peak	385	212	P
7	13650.00	22.24	29.83	52.07	68.20	-16.13	Average	100	204	P
8	13650.00	22.24	45.05	67.29	88.20	-20.91	Peak	100	204	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

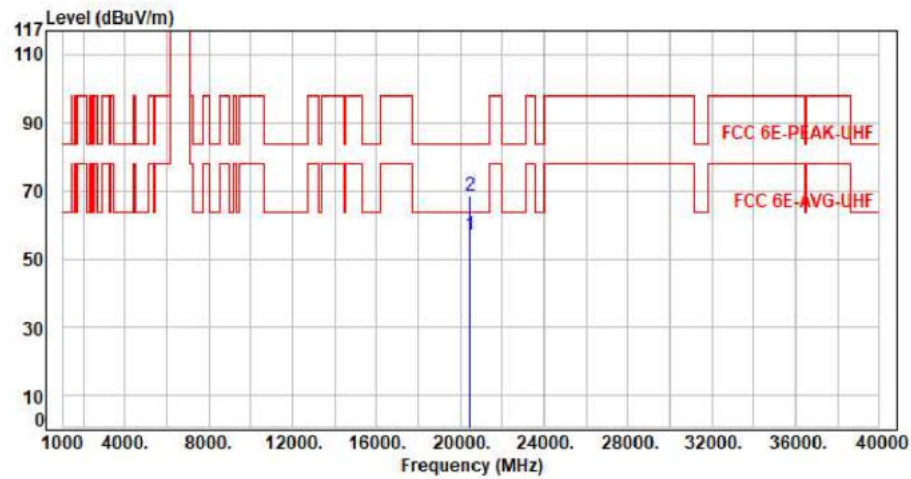


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.68	57.13	63.54	-6.41	Average	150	360	P
2	20475.00	11.45	56.97	68.42	83.54	-15.12	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

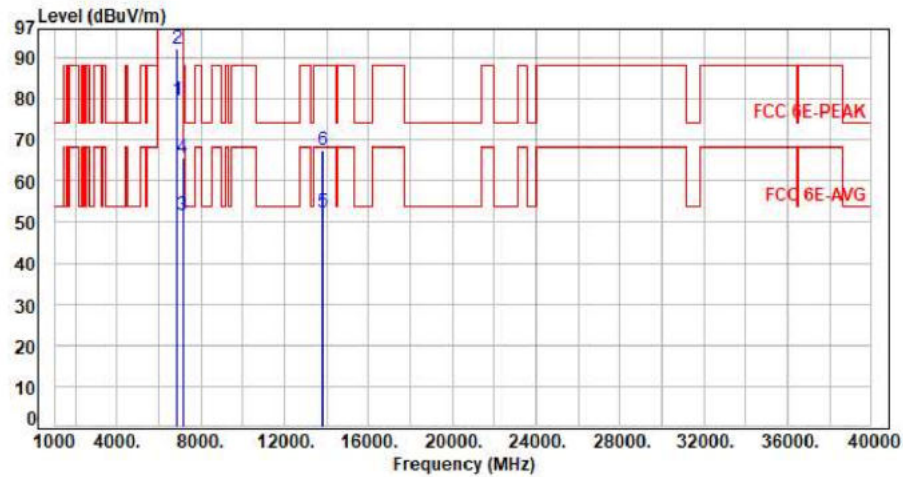


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	69.98	79.57	200.00	-120.43	Average	260	60	P
2	6895.00	9.59	82.65	92.24	200.00	-107.76	Peak	260	60	P
3	7125.00	10.05	41.65	51.70	68.20	-16.50	Average	260	60	P
4	7125.00	10.05	55.43	65.48	88.20	-22.72	Peak	260	60	P
5	13790.00	22.74	29.66	52.40	68.20	-15.80	Average	100	196	P
6	13790.00	22.74	44.57	67.31	88.20	-20.89	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

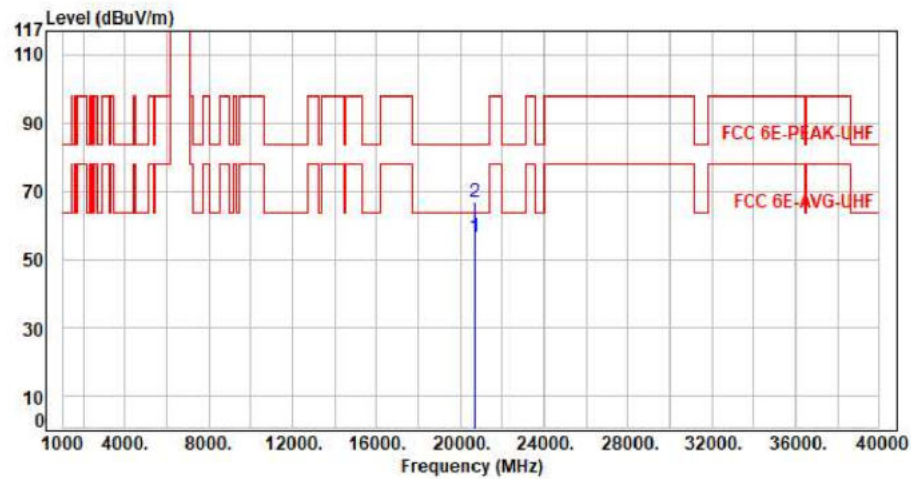


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.31	56.35	63.54	-7.19	Average	150	360	P
2	20685.00	11.04	55.76	66.80	83.54	-16.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

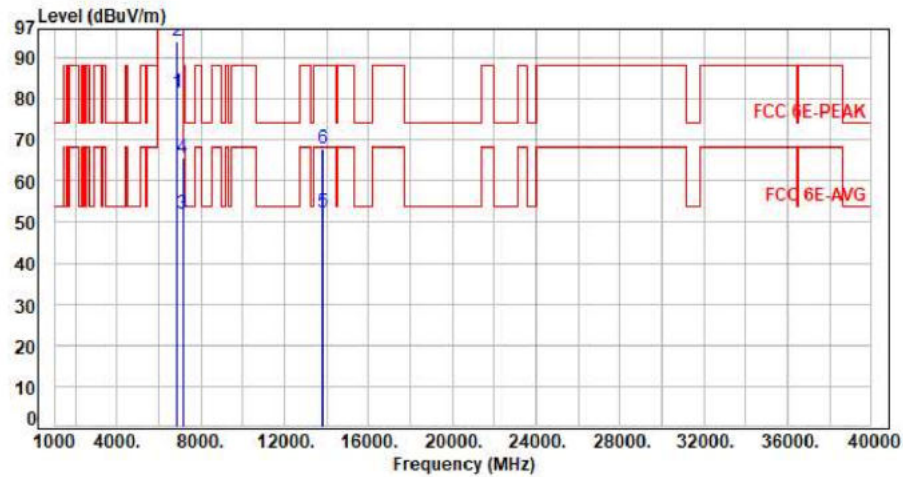


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	71.99	81.58	200.00	-118.42	Average	389	202	P
2	6895.00	9.59	84.29	93.88	200.00	-106.12	Peak	389	202	P
3	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	389	202	P
4	7125.00	10.05	55.77	65.82	88.20	-22.38	Peak	389	202	P
5	13790.00	22.74	29.77	52.51	68.20	-15.69	Average	100	265	P
6	13790.00	22.74	45.01	67.75	88.20	-20.45	Peak	100	265	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

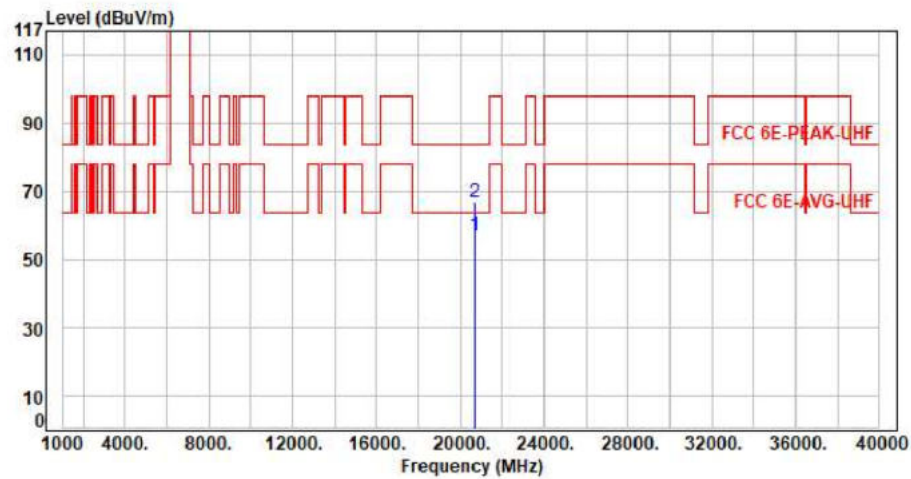


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.85	56.89	63.54	-6.65	Average	150	360	P
2	20685.00	11.04	55.56	66.60	83.54	-16.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

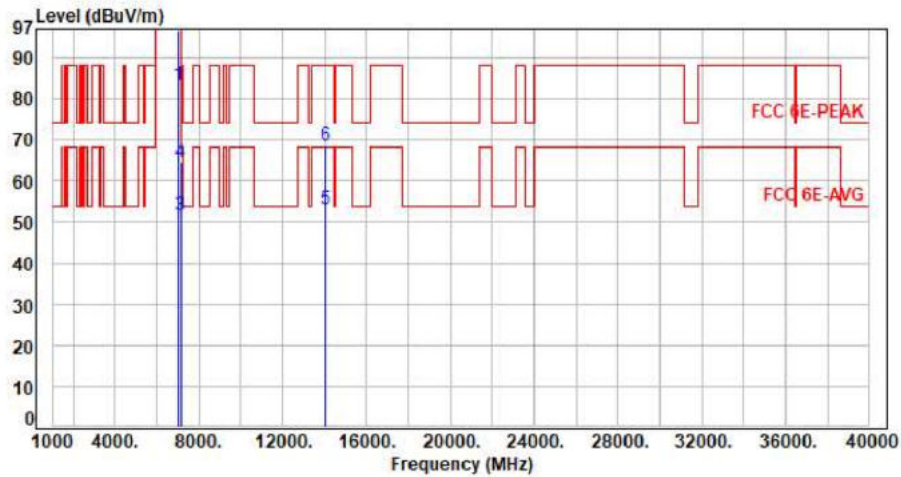


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	73.66	83.34	200.00	-116.66	Average	369	237	P
2	7015.00	9.68	86.79	96.47	200.00	-103.53	Peak	369	237	P
3	7125.00	10.05	41.66	51.71	68.20	-16.49	Average	369	237	P
4	7125.00	10.05	54.61	64.66	88.20	-23.54	Peak	369	237	P
5	14030.00	23.39	29.75	53.14	68.20	-15.06	Average	369	237	P
6	14030.00	23.39	45.11	68.50	88.20	-19.70	Peak	369	237	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

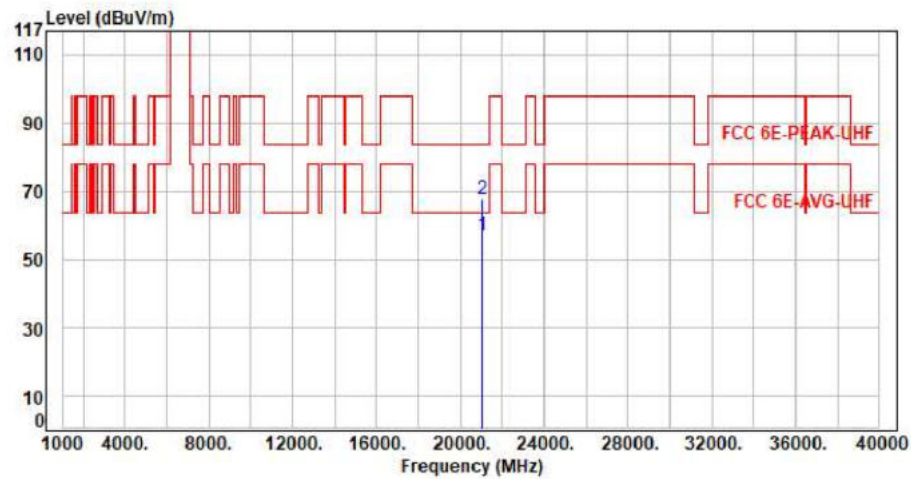


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.22	56.72	63.54	-6.82	Average	150	360	P
2	21045.00	11.50	56.08	67.58	83.54	-15.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

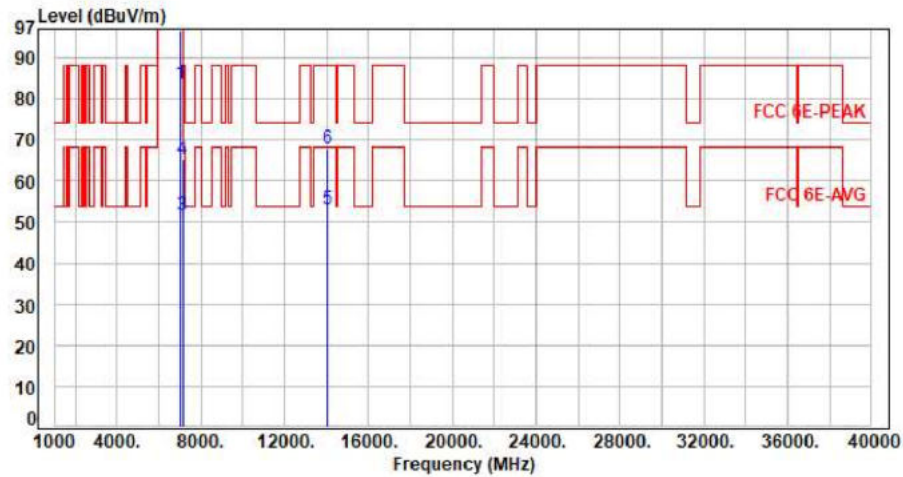

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	74.05	83.73	200.00	-116.27	Average	392	201	P
2	7015.00	9.68	86.98	96.66	200.00	-103.34	Peak	392	201	P
3	7125.00	10.05	41.63	51.68	68.20	-16.52	Average	392	201	P
4	7125.00	10.05	55.06	65.11	88.20	-23.09	Peak	392	201	P
5	14030.00	23.39	29.63	53.02	68.20	-15.18	Average	100	314	P
6	14030.00	23.39	44.52	67.91	88.20	-20.29	Peak	100	314	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor